SinoGNSS

PRODUCT SPECIFICATION

For

K922 GNSS Module



INTRODUCTION

©2025, Comnav Technology Ltd. All rights reserved. SinoGNSS is the trade mark of Comnav Technology Ltd. registered in People's Republic of China. All other trademarks are the property of their respective owners.

REVISION HISTORY

Revision	Modification	Date
1.0	New Release	2024/09
1.1	Add an Identification of PIN 1	2024/12
1.2	Add Usage Requirements of Pin SYS_RSTN	2024/12
1.3	Add Transformer Connection Mode	2025/02
1.4	Modify the Protect Image	2025/03
1.5	Modify the pin definitions	2025/06
1.6	Optimize the document structure and modify some parameters	2025/06
1.7	Precautions for Increasing SMT Soldering Temperature	2025/12

SinoGNSS

©2025, Comnav Technology Ltd. All rights reserved. SinoGNSS is the trademark of Comnav Technology Ltd. registered in People's Republic of China. All other trademarks are the property of their respective owners.

DIRETORY

REVISION HISTORY....2
DIRETORY....3
1. Introduction....4
1.1. Product Characteristics....4
2. Size....8
3. Pin Arrangement and Definition....9
3.1. Remarks....10
4. Assembling & Repairing Note....14
4.1. Module Assembling Note....14
4.2. Repairing Note....14
5. Application Connection Example....16
5.1. Minimum Circuit Description....16
6. Package....18

Figures

Figure 1. K922 Product Photo....8
Figure 2. K922 Mechanical Drawing....8
Figure 3. K922 Includes 48-Pin Pad....9
Figure 4. Furnace Temperature Curve....14
Figure 5. Minimum Hardware Design of K922....16
Figure 6. K922 Roll Tape Packing....18

Tables

Table 1. Product Characteristics....4
Table 2. Pin Definition of K922 48-Pin Pad....9
Table 3. Maximum withstand value....10
Table 4. Operating Conditions....10
Table 5. I/O Threshold Characteristics....11
Table 6. Antenna Characteristics....11
Table 7. Minimum Circuit Description of K922....16
Table 8. K922 Package Description....19

SinoGNSS

©2025, Comnav Technology Ltd. All rights reserved. SinoGNSS is the trademark of Comnav Technology Ltd. registered in People's Republic of China. All other trademarks are the property of their respective owners.

1. Introduction

The K922 module is a compact, high-precision positioning and heading module independently developed by SinoGNSS, supporting all satellite navigation systems and full frequency bands. It supports signal tracking from satellite navigation systems including BDS-2, BDS-3, GPS, GLONASS, Galileo, and QZSS. Equipped with an on-board inertial measurement unit (IMU), it supports integrated navigation algorithms and is suitable for applications such as precision agriculture and intelligent driving.

Based on new-generation integrated high-precision GNSS SoC chip, the K922 module adopts a 22nm low-power process, integrates a dual-core processor, and features 1688 channels. It is also equipped with wideband signal reception technology, narrowband anti-jamming technology, continuous wave interference suppression technology, multi-system joint positioning technology, ground-based and satellite-based augmentation technology, SBAS technology, and integrity monitoring technology. With enhanced satellite signal processing capabilities, it provides users with highly reliable positioning and attitude information.

1.1. Product Characteristics

Table 1. Product Characteristics

Characteristics	Technical index	
Signals	Positioning	BDS-2: B1I, B2I, B3I BDS-3: B1I, B1C*, B2a, B2b*, B3I
		GPS: L1C/A, L2P*, L2C, L5, L1C*
		GLONASS: G1, G2, G3*
		Galileo: E1, E5a, E5b, E5 AltBoC*, E6c*
		QZSS: L1C/A, L2C, L5, L1C*
		SBAS: L1C/A, L5
		NavIC: L5*
		L-Band*
	Heading	BDS-2: B1I, B2I BDS-3: B1I, B2a

©2025, Comnav Technology Ltd. All rights reserved. SinoGNSS is the trademark of Comnav Technology Ltd. registered in People's Republic of China. All other trademarks are the property of their respective owners.

		GPS: L1C/A, L5
		Galileo: E1, E5a
		QZSS: L1C/A, L5
	Items with * will be adjusted with the version.	
Time to First Fix	Cold Start	30s
	Hot Start (with RTC)	10s
Signal Capture	Reacquisition	1s
	Signals Tracking Sensitivity	-160dBm
	Signal Capture Sensitivity	-145dBm
Measurement Precision	Pseudo-range Accuracy	10cm
	Carrier Phase Accuracy	1mm
Accuracy	PPS（RMS）	20ns
	SPP Accuracy	Horizontality：1.5m Verticality：3m
	Velocity Accuracy	0.02m/s
	Heading Accuracy	0.2° / 1m baseline
	Assisted dead reckoning（error）	3%d (d = driving distance)
PPP	PPP Convergence Time	20min
	PPP Accuracy	Horizontality：0.1m Verticality：0.2m
RTK	RTK Initialization Time	5s（D<10km）

©2025, Comnav Technology Ltd. All rights reserved. SinoGNSS is the trademark of Comnav Technology Ltd. registered in People's Republic of China. All other trademarks are the property of their respective owners.

	Initialization Reliability	99.9%
	RTK Accuracy	Horizontality: $(8+10^{-6}\times D)$mm Verticality: $(15+10^{-6}\times D)$mm D-Baseline length (Unit: mm)
Anti-interference	It can suppress the potential narrowband and single tone radio interference signals in the GNSS signal frequency band, and the interference to signal ratio can reach 60dB.	
IMU	Gyroscope	Measurement ranges：±125°/s
		Zero-biased repeatability：0.5°/s
		Zero-biased stability：5°/h
		Angular random walk：0.12°/sqrt(h)
	Accelerometer	Measurement ranges：±2g
		Zero-biased repeatability：20mg
		Bias instability：50ug
		Velocity random walk：0.07m/s/sqrt(h)
Data Rates	Position	The default is 10Hz, and the maximum option is 50Hz
	RTK	The default is 10Hz, and the maximum option is 50Hz
	IMU	The default is 10Hz, and the maximum option is 100Hz
Data Formats	NMEA-0183	GPGGA, GPGSV, GPGLL, GPGSA, GPGST, GPHDT, GPRMC, GPVTG, GPZDA etc.
	ComNav Binary（CNB）	ComNav Self-Defined Binary

©2025, Comnav Technology Ltd. All rights reserved. SinoGNSS is the trademark of Comnav Technology Ltd. registered in People's Republic of China. All other trademarks are the property of their respective owners.

	CMR(GPS)	CMROBS, CMRREF
	RTCM2.X	RTCM1, RTCM3, RTCM9, RTCM1819, RTCM31, RTCM41, RTCM42
	RTCM3.X	1004 ~ 1008, 1012, 1019, 1020, 1033, 1042, 1045/1046, 1230, 4078 MSM3~MSM7: 1073~1077, 1083~1087, 1123~1127, 1093~1097
Electrical	Voltage	+3.1V~3.5V DC
	Power Consumption	0.5W (Anti-interference off) Set anti-interference on consumes more about 0.1W
Environmental	Operating Temperature	-40℃~+85℃ Attention: The module's heat dissipation pad must be effectively grounded, and the heat dissipation area must be no less than the area of the module.
	Storage Temperature	-55℃~+95℃
Hardware Interface		UART×3，CAN*×1（Option） I2C×1，SPI×1，PPS×1，EVENT×1
		* CAN and UART3 are multiplexed. By default, UART3 is used.
Physical	Size	16mm×21mm×2.5mm
	Weight	1.8g
	Package	LGA（48PIN）


©2025, Comnav Technology Ltd. All rights reserved. SinoGNSS is the trademark of Comnav Technology Ltd. registered in People's Republic of China. All other trademarks are the property of their respective owners.

2. Size

In this section, product photo, mechanical drawing and the dimension of K922 is provided for customers' further hardware design and installation.



Figure 1. K922 Product Photo

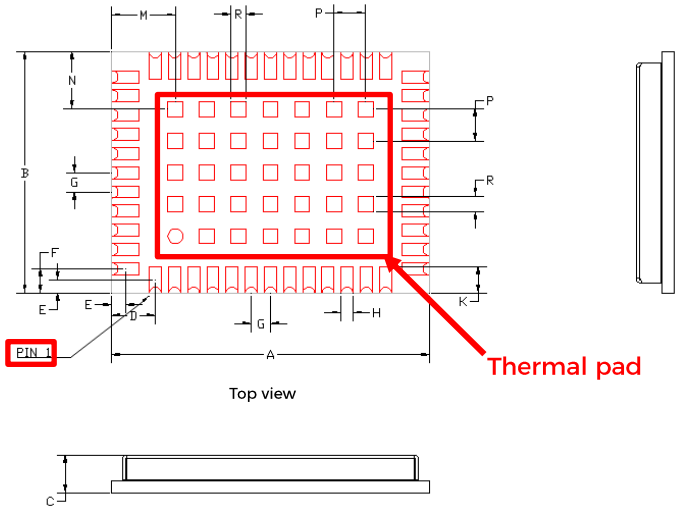

No.	Numerical value (mm)	Tolerance (mm)
A	21.00	±0.2
B	16.00	±0.2
C	2.50	±0.2
D	2.88	-
E	0.90	-
F	1.65	-
G	1.27	-
H	0.80	-
M	4.20	-
N	3.80	-
R	1.00	-
P	2.10	-
K	1.80	-

Figure 2. K922 Mechanical Drawing

©2025, Comnav Technology Ltd. All rights reserved. SinoGNSS is the trademark of Comnav Technology Ltd. registered in People's Republic of China. All other trademarks are the property of their respective owners.

3. Pin Arrangement and Definition

K922 is surface-mount OEM Module which integrates 48 Pin.

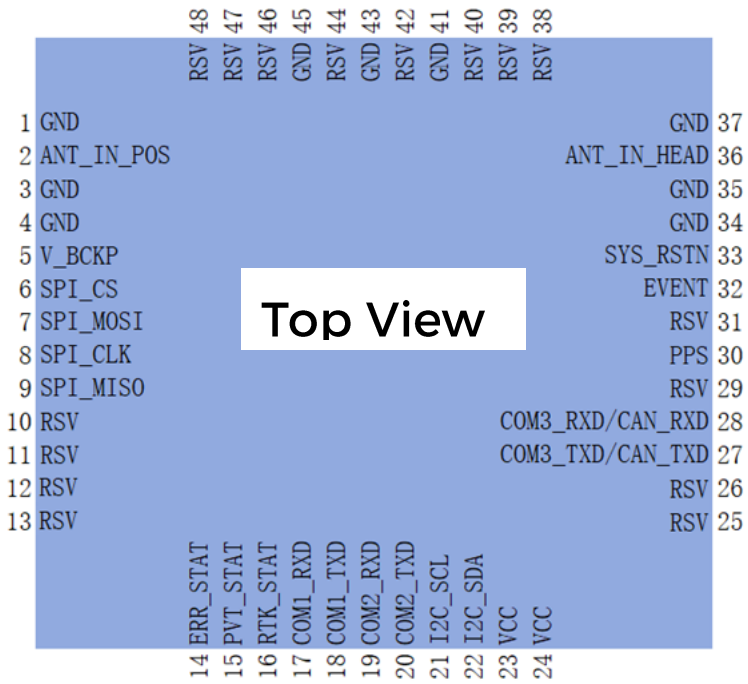


Figure 3. K922 Includes 48-Pin Pad

Table 2. Pin Definition of K922 48-Pin Pad

Pin	Signal	Type	Description
1	GND	GND	Ground Reference
2	ANT_IN_POS	I	ANT1 input（Position）
3~4	GND	GND	Ground Reference
5	V_BCKP	PWR	Backup supply voltage
6	SPI_CS	I/O	SPI_CS
7	SPI_MOSI	I/O	SPI_MOSI
8	SPI_CLK	I/O	SPI_CLK
9	SPI_MISO	I/O -	SPI_MISO
10~13	RSV	-	Reserved
14	ERR_STAT	O	Failure Indication
15	PVT_STAT	O	Number of search satellites
16	RTK_STAT	O	RTK Data Indicator
17	COM1_RXD	I	UART1 receive
18	COM1_TXD	O	UART1 transmit
19	COM2_RXD	I	UART2 receive

©2025, Comnav Technology Ltd. All rights reserved. SinoGNSS is the trademark of Comnav Technology Ltd. registered in People's Republic of China. All other trademarks are the property of their respective owners.

Pin	Signal	Type	Description
20	COM2_TXD	O	UART2 transmit
21	I2C_SCL	I/O	Clock Line
22	I2C_SDA	I/O	Data Line
23~24	VCC	PWR	Voltage supply
25~26	RSV	-	Reserved
27	COM3_TXD/CAN_TXD	O	UART3/CAN transmit
28	COM3_RXD/CAN_RXD	I	UART3/CAN receive
29	RSV	-	Reserved
30	PPS	O	Pulse Per Second
31	RSV	-	Reserved
32	EVENT	I	External Interrupt Pin
33	SYS_RSTN	I	System Reset Negative
34~35	GND	GND	Ground Reference
36	ANT_IN_HEAD	I	ANT2 input（Heading）
37	GND	GND	Ground Reference
38~40	RSV	-	Reserved
41	GND	GND	Ground Reference
42	RSV	-	Reserved
43	GND	GND	Ground Reference
44	RSV	-	Reserved
45	GND	GND	Ground Reference
46~48	RSV	-	Reserved

3.1. Remarks

1. Electrical Characteristics

Table 3. Maximum withstand value

Specification	Symbol	Minimal value	Maximum value	Unit
Supply voltage (VCC)	VCC	-0.3	3.6	V
Input pin voltage	Vin	-0.3	VCC+0.3	V

Table 4. Operating Conditions

Specification	Symbol	Minimal value	Typical value	Maximum value	Unit	Condition
Supply voltage (VCC)	VCC	3.1	3.3	3.5	V	
Maximum VCC Ripple	V_{rpp}	0		50	mV	
Operating Current	I_{opr}		151		mA	VCC=3.3V

©2025, Comnav Technology Ltd. All rights reserved. SinoGNSS is the trademark of Comnav Technology Ltd. registered in People's Republic of China. All other trademarks are the property of their respective owners.

Power Consumption	P	500	mW

Table 5. I/O Threshold Characteristics

Specification	Symbol	Minimal value	Typical value	Maximum value	Unit	Condition
Input pin low level	V_{in_low}	-0.3		0.8	V	
Input pin high level	V_{in_high}	2		VCC+0.3	V	
Output pin low level	V_{out_low}	0		0.41	V	I_{out}=4mA
Output pin high level	V_{out_high}	VCC-0.4		VCC	V	I_{out}=4mA

Table 6. Antenna Characteristics

Specification	Symbol	Minimal value	Maximum value	Unit
Optimal input gain value	G_{ant}	20	35	dB

Note: The gain difference between the external master and slave antennas must not exceed 20 dB.

2. Power On and Off the module

VCC/V_BCKP

- VCC/V_BCKP power-on, the initial level is lower than 0.4V, and has a good monotonicity, and the upstroke and ringing are guaranteed within the range of 5% VCC/V_BCKP;
- Power-on interval, after the VCC/V_BCKP is powered off less than 0.4V, before the next power-on, the interval must be greater than 500ms.

3. Usage Requirements of Pin SYS_RSTN

- The module is equipped with an internal power-on reset circuit, eliminating the need for an external hardware reset circuit;
- If resetting SYS_RSTN via GPIO control, ensure that VCC is properly powered first. Then pull SYS_RSTN low to GND for a reset (duration greater than 1 ms and less than 100 ms), followed by pulling it high to 3.3 V.

4. RTK_STAT

RTK_STAT signal pin, receiving or transmitting differential signals will output high level pulse, other states output low level, needing to connect to the external indicator light.

5. Hardware Integration Considerations

1) Use the VCC pin to provide a reliable power supply and all GND pins of the module are grounded;

©2025, Comnav Technology Ltd. All rights reserved. SinoGNSS is the trademark of Comnav Technology Ltd. registered in People's Republic of China. All other trademarks are the property of their respective owners.

2) Connect the ANT_IN signal to the antenna, pay attention to the 50Ω impedance matching of the line;
3) The module reset pin SYS_RSTN is for reset. Please connect it correctly to ensure that the module can be reset reliably;
4) Special attention should be paid to:
   ①. Place the power supply as close to the module as possible
   ②. Widen the power supply lines or use split copper surface to transmit current;
   ③. Power routing should avoid high-power and high-inductive devices, such as magnetic coils.
   ④. To ensure good heat dissipation of the module, it is recommended that the grounding pad of the module be fully in contact with the PCB and that more ground holes be added to facilitate heat dissipation
5) Antenna interface: The antenna line is as short and smooth as possible, avoiding acute angles;
6) Avoid wiring directly under K922;
7) The module is as far away from the high temperature airflow as possible.
8) When the user integrates the module, an external high-gain choke antenna is connected. If a surge protector is not added, it is easy to damage antenna feed circuit. It is recommended that users install a surge protector on the antenna when connecting a high-gain choke antenna;
9) The K922 module contains temperature-sensitive components inside, requiring a stable temperature environment; hence, during PCB layout, the module needs to be positioned away from heat-generating or low-temperature areas. The TCXO (Temperature Compensated X Tal Oscillator) inside the module is highly sensitive to temperature changes, and sudden temperature fluctuations can affect the module's ability to track satellite signals. Consequently, the layout of the module should maintain a certain distance from heat-generating components, cooling fans, or heat dissipation vents.

6. Static Electricity Protection

Some components on K922 module are easily damaged by static electricity, which in turn affects the IC circuit and other components. Therefore, you should pay attention to electrostatic protection measures when using it.

1) When handling the module, try to wear gloves or finger cots and an anti-static wrist strap that meets the electrostatic protection standards;
2) During the process of taking the module, only the edge of the board should be taken, and the solder joints, circuit parts or components should not be directly touched to avoid sweat fingerprints from contaminating the solder joints;
3) The module should be protected by a soft protective pad between the module and the module interval during transportation;
4) When the module is idle, it should be placed on a soft protective pad (such as anti-static sponge pad, etc.), and do not stack at will;
5) The modules should be placed neatly and orderly, with a certain interval between modules to avoid collision with each other;
6) The module should be handled with care during use to prevent the module from being damaged by rough operation;
7) When powering on, pay attention to the positive and negative poles of the power supply and the voltage to avoid reverse connection and excessive voltage from burning the module;
8) When soldering the module to the motherboard, please ensure that the GND is soldered first, and then the ANT_IN pin;

©2025, Comnav Technology Ltd. All rights reserved. SinoGNSS is the trademark of Comnav Technology Ltd. registered in People's Republic of China. All other trademarks are the property of their respective owners.

9) When handling ANT_IN pin, do not touch any live capacitance or material (e.g., surface mount antenna, coaxial cable, wire iron, etc.) to avoid damage to the ANT_IN pin by the charge generated or stored by said capacitor or material;
10) Please make sure to solder the ANT_IN pin with an electrical protection iron.

SinoGNSS

©2025, Comnav Technology Ltd. All rights reserved. SinoGNSS is the trade mark of Comnav Technology Ltd. registered in People's Republic of China. All other trademarks are the property of their respective owners.

4. Assembling & Repairing Note

4.1. Module Assembling Note

K922 is surface mounted, SMT welding is used for assembly.

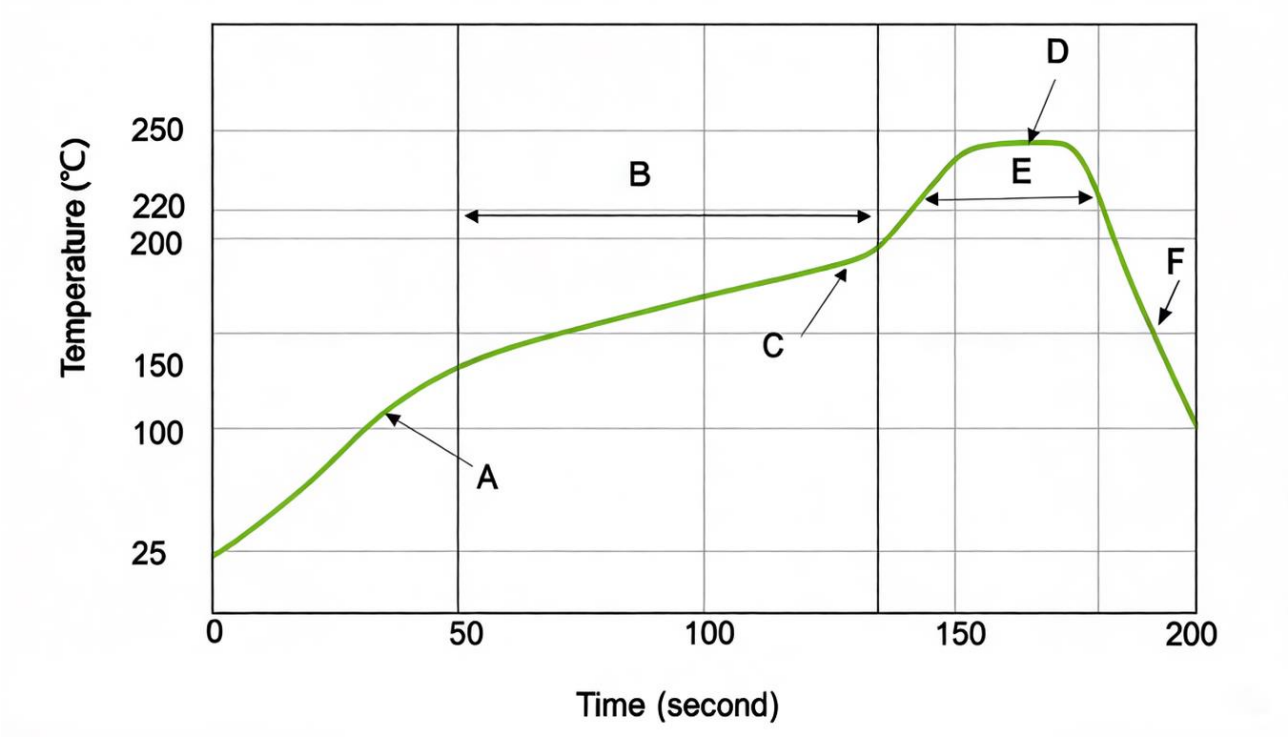


Figure 4. Furnace Temperature Curve

The process temperature limits are as follows:

A: Heating Zone: Rising Slope: 1 ~ 3℃ / sec

B: Constant Temperature Zone: Range: 150 ~ 190 ℃ , Time: 80 ~ 110 S

C: Constant Temperature→Reflow Zone: Rising Slope: 1 ~ 3℃ / sec

D: Peak Temperature: 235 ~ 245℃

E: Reflow Zone: Range: Over 220℃ Time: 50 ~ 80 S

F: Descent Slope: -5℃ ~ -1℃ / sec

Note: To prevent module damage caused by repeated heating, it is recommended to mount the module only after the reflow soldering of the first side of the PCB is completed. SMT soldering must be performed in strict accordance with the above temperature range. The peak temperature must not be exceeded, and a heat gun shall not be used for soldering. Otherwise, any resulting losses shall be borne by the user.

4.2. Repairing Note

©2025, Comnav Technology Ltd. All rights reserved. SinoGNSS is the trademark of Comnav Technology Ltd. registered in People's Republic of China. All other trademarks are the property of their respective owners.

When disassembling the module, it is suggested using a BGA welding bench. Please use correct air tuyere and choose certain temperature curve. Keep peak temperature under 245℃, rising slope under 3℃/s.

SinoGNSS

©2025, Comnav Technology Ltd. All rights reserved. SinoGNSS is the trade mark of Comnav Technology Ltd. registered in People's Republic of China. All other trademarks are the property of their respective owners.

5. Application Connection Example

5.1. Minimum Circuit Description

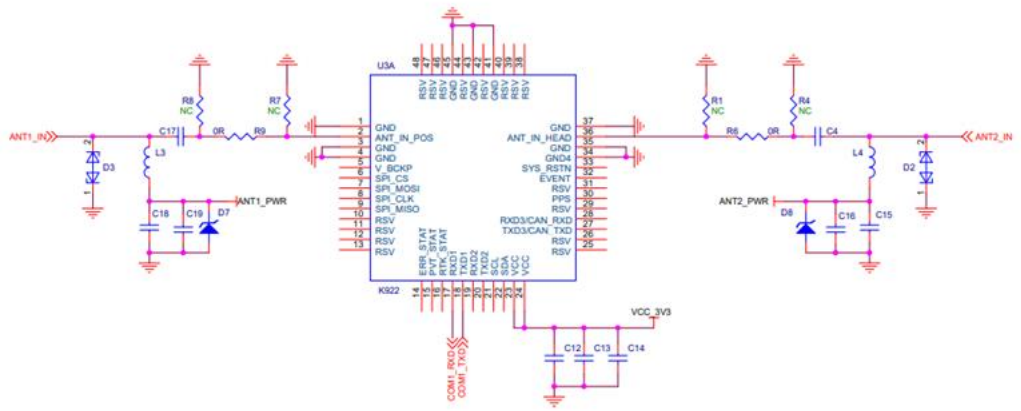


Figure 5. Minimum Hardware Design of K922

Table 7. Minimum Circuit Description of K922

位号	类型	数值	作用
C12,C13	Decoupling Capacitor	22uF	Suppress low-frequency ripples and stabilize voltage.
C14	Decoupling Capacitor	1uF	Suppress high-frequency ripples and stabilize voltage.
C16,C19	Decoupling Capacitor	0.1uF	Suppress high-frequency ripples and stabilize voltage.
C15,C18	Decoupling Capacitor	1uF	Suppress low-frequency ripples and stabilize voltage.
L3,L4	Feeding Inductor	68nH	RF Blocking, a 68nH RF inductor is recommended for use.
D2,D3	ESD Diode	-	ESD protection device for anti-static purposes and support of high-frequency signals (above 2000MHz).
D7,D8	TVS Diode	-	To prevent component damage caused by overvoltage, select a TVS diode with qualified clamping characteristics in accordance with the feed voltage, antenna voltage withstand and other specifications.
C4,C7	DC Blocking Capacitor	100pF	DC Blocking, Prevents Voltage Backflow Module.

©2025, Comnav Technology Ltd. All rights reserved. SinoGNSS is the trademark of Comnav Technology Ltd. registered in People's Republic of China. All other trademarks are the property of their respective owners.

R1,R4,R7,R8	Resistor	-	A π-type circuit is reserved to ensure 50Ω impedance matching.
R6,R9	Resistor	0Ω	Reserve component positions to ensure matching.

SinoGNSS

©2025, Comnav Technology Ltd. All rights reserved. SinoGNSS is the trade mark of Comnav Technology Ltd. registered in People's Republic of China. All other trademarks are the property of their respective owners.

6. Package

The K922 module is supplied in tape-and-reel packaging (compatible with mainstream surface mount equipment) and sealed in a vacuum antistatic aluminum foil bag (the shelf life of the K922 module in this antistatic bag is one year) with a desiccant included for moistureproofing. Moistureproof measures must still be implemented during transportation or when the module is unused after unpacking to prevent module failure. When soldering the module using the reflow soldering process, strictly comply with the IPC/JEDEC J-STD-033 standard for moisture control of the module. Since packaging materials such as the tape can only withstand a temperature of 55˚C, the module must be removed from the packaging before baking.

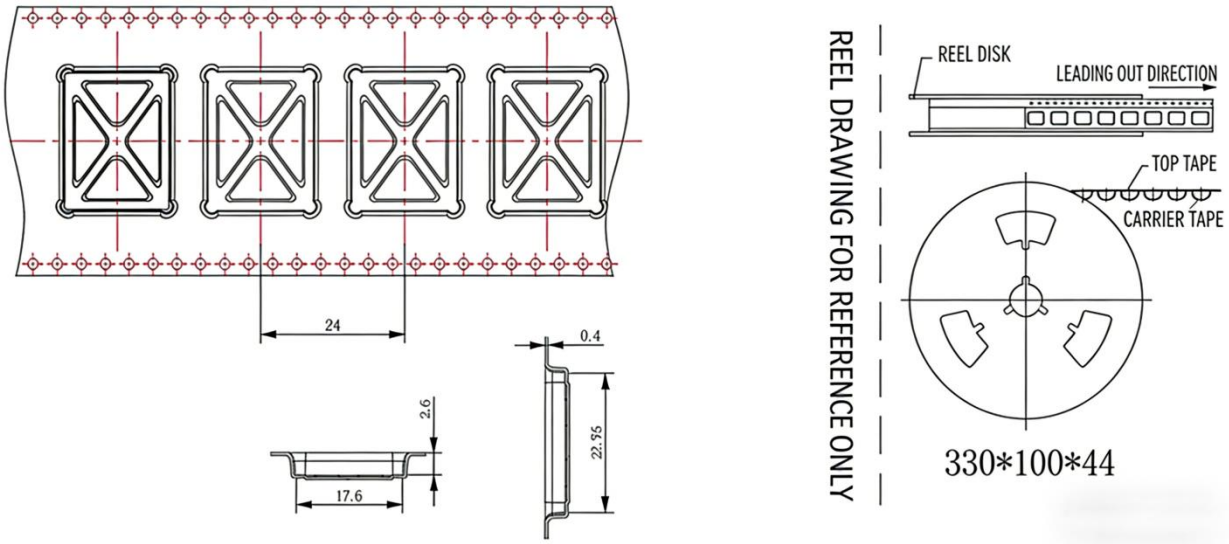


Figure 6. K922 Roll Tape Packing

©2025, Comnav Technology Ltd. All rights reserved. SinoGNSS is the trademark of Comnav Technology Ltd. registered in People's Republic of China. All other trademarks are the property of their respective owners.

Table 8. K922 Package Description

Project		Description
模块包装	Number of Modules	500 Slice/Roll
	Reel Size	Material tray: 13 inches
		Outer diameter: 330mm, inner diameter: 100mm, width: 44mm, wall thickness: 3.3mm
		Package of each module: length 21.8mm, width 16.8mm
	Carrier Belt	Module Spacing (Center Distance): 24mm
	Quantity of Desiccant	1 pcs/box
	Number of Humidity card	1 piece/box Before surface mounting, check the humidity indicator card inside the package: the 30% indicator circle on the humidity card should normally appear blue. If the 20% indicator circle turns pink and the 30% indicator circle turns lavender, the module must be baked as required before mounting. The K922 module has a humidity sensitivity level (HSL) of 3. Packaging and handling precautions related to the humidity sensitivity level shall be

©2025, Comnav Technology Ltd. All rights reserved. SinoGNSS is the trademark of Comnav Technology Ltd. registered in People's Republic of China. All other trademarks are the property of their respective owners.

		in accordance with the IPC/JEDEC J-STD-033 standard.

Comnav Technology, LTD.

Building 2, 618 Chengliu Middle Road, Jiading District, Shanghai

Website: https://www.comnavtech.com/

Tel: +86 21 64056796

SinoGNSS

©2025, Comnav Technology Ltd. All rights reserved. SinoGNSS is the trademark of Comnav Technology Ltd. registered in People's Republic of China. All other trademarks are the property of their respective owners.