

ÉCOLE CENTRALE DE NANTES

UNIVERSITÀ DI GENOVA

MASTER CORO-IMARO
“CONTROL AND ROBOTICS”

MASTER ERASMUS MUNDUS
EMARO+ “EUROPEAN MASTER IN ADVANCED ROBOTICS”

2025 / 2026

Master Thesis Report

Presented by

Chiara Buono

26th August 2026

Modeling and Control of Cable-Driven UAV Systems for Collaborative Load Manipulation

Jury

Evaluators:	Marco Tognon	position (institution)
	Olivier Kermorgant	Associate professor (ECN)
Supervisor(s):	Yigit Arda	Researcher (LS2N - CNRS)
	Fantoni Isabelle	Researcher Director (LS2N - CNRS)
(EMARO)	Enrico Simetti	Associate professor, UniGe

Laboratory: Laboratoire des Sciences du Numérique de Nantes LS2N

Abstract

Acknowledgements

- My professors;
- All the people in the Shieldbot project
- People I left in Reggio and people I found in Genoa and Nantes

Notations

$F_0(O, x_0, y_0, z_0)$	Inertial reference world frame
$F_p(P, x_p, y_p, z_p)$	Platform reference frame at its center of mass
$F_i(A_i, x_i, y_i, z_i)$	Quadrotor reference frame at cable connection
$F_{C_i}(A_{C_i}, x_{C_i}, y_{C_i}, z_{C_i})$	Quadrotor reference frame attached to the quadrotor at its center of mass
$F_k(A_k, x_k, y_k, z_k)$	Ground vehicle reference frame

Abbreviations

ACT	Aerial Cable Towed
ACTR	Aerial Cable Towed Robot
ACTS	Aerial Cable Towed System
AW	Available Wrench set
CDPR	Cable-Driven Parallel Robot
DKM	Direct Kinematic Model
DoF	Degree of Freedom
IKC	Inverse Kinematic Controller
INDI	Incremental Nonlinear Dynamic Inversion
MPC	Model Predictive Control
NMPC	Nonlinear Model Predictive Control
OCF	Optimal Control Problem
ORCA	Optimal Reciprocal Collision Avoidance
rAW	Radius of the Available Wrench
SAW	Static Available Wrench set
SW	Static workspace
UAV	Unmanned Aerial Vehicle
UGV	Unmanned Ground Vehicle
VIC	Variable Impedance Control
WFW	Wrench Feasible Workspace

List of Figures

1.1	Graphical representation of the platform	10
1.2	Forces acting on the ACTS	12
2.1	Possible UAVs connection to the payload	14
2.2	Possible UGVs connection to the payload	14
2.3	One drone system connected to the ground through a cable	15
2.4	Simplified ACTS with one drone and one ground anchor	16
2.5	Tension directed arbitrary	17
2.6	Payload connected through two cable to the ground	17
2.7	Over actuated ACTS with 6 ground cables and 3 UAVs	21
2.8	High level control scheme	22
2.9	Gogh Stewart schematics [1]	23
3.1	Possible 6 UGVs connections	33
3.2	Possible 3 UAVs connection with one cable	34

List of Tables

3.1	Comparative performance indices and tracking errors for Stewart baseline configuration across Scenarios A, B, and C.	31
-----	--	----

Contents

1	Kinematic-static model	9
1.1	Kinematic model	9
1.2	Static model	11
1.3	Kinematic-static model	12
2	ACTS starting configuration	13
2.1	Connections to the payload	13
2.2	Force Control on point-mass payload	13
2.2.1	Case: one drone connected to the ground through a cable	15
2.2.2	Case: payload connected to the ground and a drone	16
2.2.3	Case: payload connected to the ground through two cables	17
2.3	Performance Indices	18
2.4	Architecture Selection Strategy	21
2.5	High level architecture	22
2.5.1	Quadratic Approximation of the UAV Disposition Problem	25
3	Experiments	26
3.1	Experimental methodology and evaluation framework	28
3.2	Stewart platform baseline	29
3.2.1	Numerical Verification of the Implementation	29
3.2.2	Comparison τ_{min} and τ_{opt}	30
3.3	Ground cable routing	31
3.4	Ground hook placement	32
3.5	Discussion	32
4	Conclusions	35
	Appendix	36
A	Singularity	37

Kinemato-static model

A kinemato-static model is a model that combines kinematics (motion and geometry) with statics (forces and equilibrium) to describe how a mechanical system moves and how forces are transmitted through it.

1.1 Kinematic model

Given the payload twist ${}^0\xi = [{}^0v_p \quad {}^0\omega_p]^\top$ in the inertial reference frame $\langle 0 \rangle$, we can write the position and velocity of the attachment point B_i (resp. B_k) of the aerial vehicle (resp. ground) in $\langle 0 \rangle$.

$${}^0\mathbf{r}_i = {}^0\mathbf{p} + {}^0_P R {}^P\mathbf{b}_i \quad (1.1)$$

where b_i is the attachment point on payload.

$${}^0\dot{\mathbf{r}}_i = {}^0\mathbf{v}_p + {}^0\boldsymbol{\omega}_p \times ({}^0_P R {}^P\mathbf{b}_i) \quad (1.2)$$

For definition, the cable vector is $\mathbf{l}_i = \mathbf{a}_i - \mathbf{r}_i = A_i - B_i$ with $\mathbf{a}_i$ being the anchor position. Under a centralized controller, the positions of all UAV A_i and UGV A_k are known, which directly determine the anchor vector $\mathbf{a}_i$. Furthermore, the payload's position and orientation are assumed to be known. Together with the known locations of the attachment points relative to the payload, this information allows us to calculate the cable vectors $\mathbf{l}_i$.

The final form of cable vector variation is given by applying Equation 1.2 in its definition:

$$\dot{\mathbf{l}}_i = \dot{\mathbf{a}}_i - \dot{\mathbf{r}}_i = \dot{\mathbf{a}}_i - \frac{d}{dt} (\mathbf{p} + {}^P R {}^P\mathbf{b}_i) = \dot{\mathbf{a}}_i - (\mathbf{v}_p + \boldsymbol{\omega}_p \times ({}^P R {}^P\mathbf{b}_i)) \quad (1.3)$$

Each $\dot{l}_i$ corresponds to the projection of the relative velocity of B_i along the cable direction

$$\begin{aligned} \dot{l}_i &= \mathbf{u}_i^\top (\dot{\mathbf{a}}_i - (\mathbf{v}_p + \boldsymbol{\omega}_p \times ({}^P R {}^P\mathbf{b}_i))) \\ &= \mathbf{u}_i^\top \dot{\mathbf{a}}_i - [\mathbf{u}_i^\top ({}^P R {}^P\mathbf{b}_i \times \boldsymbol{\omega}_p)] \xi \\ &= J_{a,i} \dot{\mathbf{a}}_i - J_{p,i} \xi, \end{aligned} \quad (1.4)$$

This gives us the kinematic model that relates the variation of cable length vector $\boldsymbol{\rho}$ with the change in position of the anchors and the payload twist:

$$\dot{\boldsymbol{\rho}} = J_a \dot{\mathbf{a}} - J_p \xi = J_a \begin{bmatrix} \dot{\mathbf{a}}^{(a)} \\ \dot{\mathbf{a}}^{(g)} \end{bmatrix} - J_p \xi \quad (1.5)$$

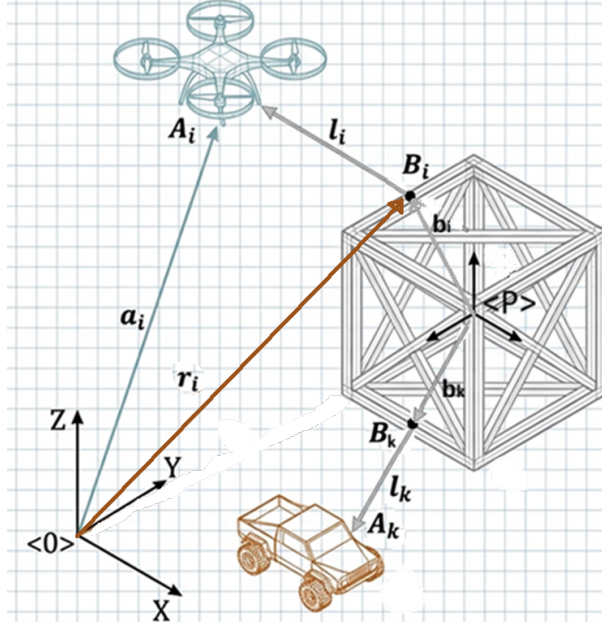


Figure 1.1: Graphical representation of the platform

Let $m = n_a + n_g$ be the total number of winches (or cables) and $u_i = l_i / \|l_i\|$ the unit cable direction, then:

- $\dot{\rho} = [\dot{l}_1 \ \dot{l}_2 \ \dots \ \dot{l}_m]^\top$ is the cable length rate (dimension $[m \times 1]$).
- J_a is the Jacobian relating the anchor velocities to the cable-length rates $[m \times 3m]$. In particular, each cable depends only on its anchor velocity.

$$J_a = \begin{bmatrix} u_1 & 0 & \dots & 0 \\ 0 & u_2 & \dots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \dots & u_{n_a+n_g} \end{bmatrix}, \quad u_j = \frac{(a_j - r_j)}{\|a_j - r_j\|}. \quad (1.6)$$

- J_p is the Jacobian relating the payload twist to the cable-length $[m \times 6]$

$$J_p = \begin{bmatrix} u_1^\top & ({}_p R^p b_1 \times u_1)^\top \\ \vdots & \vdots \\ u_m^\top & ({}_p R^p b_m \times u_m)^\top \end{bmatrix} \quad (1.7)$$

Note 1. Equation 1.4 contains m equations in 6 unknown. I need at least six independent cable directions ($\text{rank}(J_p) = 6$).

The control allocation matrix maps the actuator inputs (cable tension vector) to the system (payload) wrench. For this definition $J_p^\top$ is the allocation matrix.

$$W_p = J_p^\top \tau \quad (1.8)$$

Let W_p^* being the desired payload wrench, the control allocation problem to solve is

$$J_p^\top \tau = W_p^*, \quad \text{s.t. } \tau_i > 0 \quad (1.9)$$

1.2 Static model

Let $\tau = [\tau_{uav}^\top, \tau_{ugv}^\top]^\top \in \mathbb{R}^{m \times 1}$ the cable tension vector, then

$$\begin{aligned} \underbrace{\tau^\top \dot{\rho}}_{\text{total cable power}} &= \underbrace{\tau^\top J_a \dot{a}}_{\text{UAVs and UGVs mechanical power}} - \underbrace{\tau^\top J_p \xi}_{\text{payload power}} \\ &= (J_a^\top \tau)^\top \dot{a} - (J_p^\top \tau)^\top \xi \\ &= F_a^\top \dot{a} - W_p^\top \xi \end{aligned} \quad (1.10)$$

Each cable i applies a force on the payload $F_{a,i}$ and an equal and opposite force on the UAV (resp. UGV). We can write balance equation on our elements:

Payload Balance

$$\underbrace{W_p}_{J_p^\top \tau} + \underbrace{W_g}_{\begin{bmatrix} 0 \\ 0 \\ -m_p g \\ 0 \\ 0 \\ 0 \end{bmatrix}} + W_{contact} + \underbrace{W_{wind}}_{\text{let} = 0} = 0 \quad (1.11)$$

where since each cable produces a wrench on the payload, the contribution given by the i -th cable is:

$$\underbrace{w_{p,i}}_{6 \times 1} = \underbrace{J_{p,i}^\top}_{6 \times 1} \underbrace{\tau_i}_{1 \times 1} = \begin{bmatrix} u_i^\top & ({}_P R^P b_i \times u_i)^\top \end{bmatrix}^\top \tau_i = \begin{bmatrix} \tau_i u_i \\ ({}_P R^P b_i \times \tau_i u_i) \end{bmatrix} \quad (1.12)$$

and $W_{contact} = 0$ when there is no contact with the environment.

UAV balance

$$-F_{a,i} + F_{prop,i} + \underbrace{F_{g,i}}_{\begin{bmatrix} 0 \\ 0 \\ -m_i g \end{bmatrix}} = 0 \quad (1.13)$$

with ${}^i F_{prop} = [0 \ 0 \ F_{prop,z,i}]^\top$ and $F_{a,i} = J_{a,i}^\top \tau_i = \tau_i u_i$.

UAVs must always generate sufficient thrust to maintain flight and ensure their own stability. As a result, only a portion of their available thrust can be allocated to payload manipulation, which reduces the effective force that can be transmitted through the cables.

UGV balance

$$-F_{a,j} + \underbrace{F_{ground,j}}_{\begin{bmatrix} F_{frict,x,j} \\ F_{frict,y,j} \\ F_{norm} \end{bmatrix}} + \underbrace{F_{g,j}}_{\begin{bmatrix} 0 \\ 0 \\ -m_j g \end{bmatrix}} = 0 \quad (1.14)$$

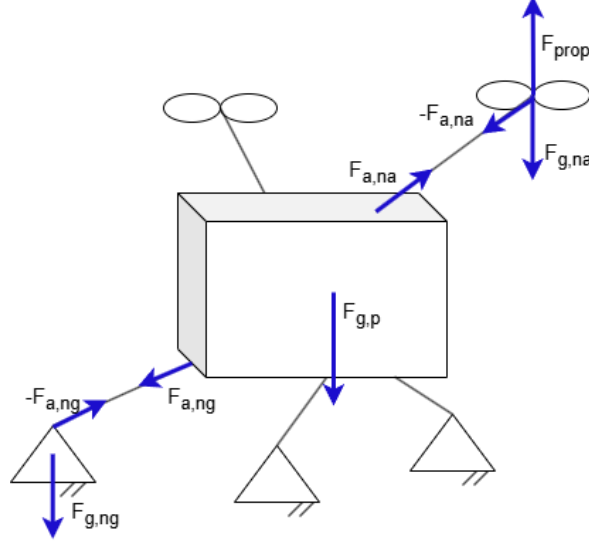


Figure 1.2: Forces acting on the ACTS

with $\|F_{frict}\| \leq \mu F_{norm}$ and $F_{norm} = m_j g - F_{a,z,j}$ and $F_{a,j}$ is obtained through Equation 1.15.

Similarly, UGVs are subject to ground interaction constraints. In particular, they must satisfy friction limits to remain stationary when no motion is commanded. This imposes bounds on the admissible cable forces, as excessive tension may cause slipping. By Newton's third law, the force the cable exerts on the drone $F_{a,i}$ (resp. on the UGV $F_{a,j}$) is equal and opposite to the force it exerts on the payload. Since u_i points from B_i toward A_i , the cable pulls the drone with

$$F_{a,i} = J_{a,i}^\top \tau_i = \tau_i u_i \quad (1.15)$$

As a consequence, the total cable force on the payload is:

$$F_p = - \sum_{i=1}^{n_a} F_{a,i} - \sum_{j=n_a+1}^{n_a+n_g} F_{a,j} \quad (1.16)$$

where the payload wrench is $W_p = [F_p \quad M_p]^\top$

1.3 Kinemato-static model

Writing Equation 1.11, 1.13 and 1.14 in term of τ , we obtain:

$$W_{sys} = \begin{bmatrix} W_p \\ F_a \end{bmatrix} = \begin{bmatrix} J_p^\top \\ J_a^\top \end{bmatrix} \tau = G\tau = \begin{bmatrix} -W_g - W_{contact} - W_{wind} \\ F_{prop} + F_{ground} + F_g \end{bmatrix} \quad (1.17)$$

where $F_{prop,j} = 0$ for the UGVs and $F_{ground,i} = 0$ for the UAVs. Then W_{sys} is $(6+3m) \times 1$ and

$$G\tau + \begin{bmatrix} W_g + W_{contact} + W_{wind} \\ -F_{prop} - F_{ground} - F_g \end{bmatrix} = 0 \quad (1.18)$$

ACTS starting configuration

The ACTS consists of at least one UAV, required as the payload needs to be lifted from the ground, and one UGV, included for safety and operational constraints. To fully control the payload in space, we need at least six cables

2.1 Connections to the payload

The configuration of the UAV connections is crucial as it directly affects how forces are applied to the payload. UAVs are responsible for generating the lifting force required to lift the payload. Consequently, the number of UAVs depends strongly on the payload mass. However, increasing the number of UAVs leads to higher power consumption and greater system complexity. So, adding more UAVs does not necessarily improve performance. Additionally, each UAV can be connected to the payload using either a single cable or multiple cables. The choice of configuration affects controllability, wrench feasibility, robustness, and energy efficiency, and should be evaluated accordingly. A practical compromise is to use three UAVs connected to the payload at distinct attachment points, providing a balance between the metrics just mentioned (Figure 2.1).

Not actually this the reason: especially in our case the hook are fixed in space so they are independent, look to what said for the ppt

In contrast, UGVs do not contribute to lifting the payload, and therefore do not require multiple cable connections for stability. In most cases, a single cable connection between each UGV and the payload is sufficient. Adding more cables would increase system complexity without significant benefits. Since the system is designed to be redundant, the overall number of UAVs and UGVs must be carefully selected.

2.2 Force Control on point-mass payload

Say this better

Before going in details on the full consideration, let's analyze some easier configurations.

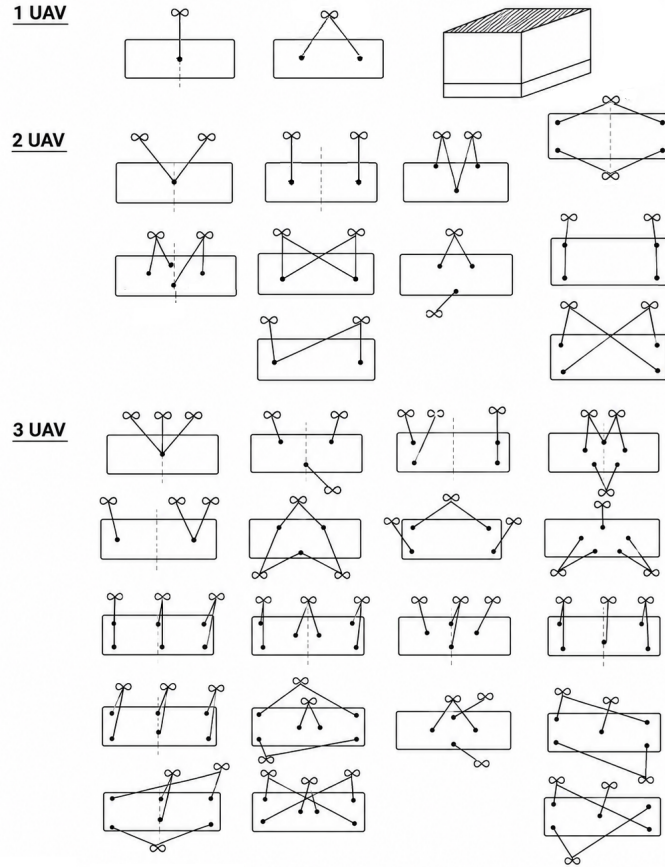


Figure 2.1: Possible UAVs connection to the payload

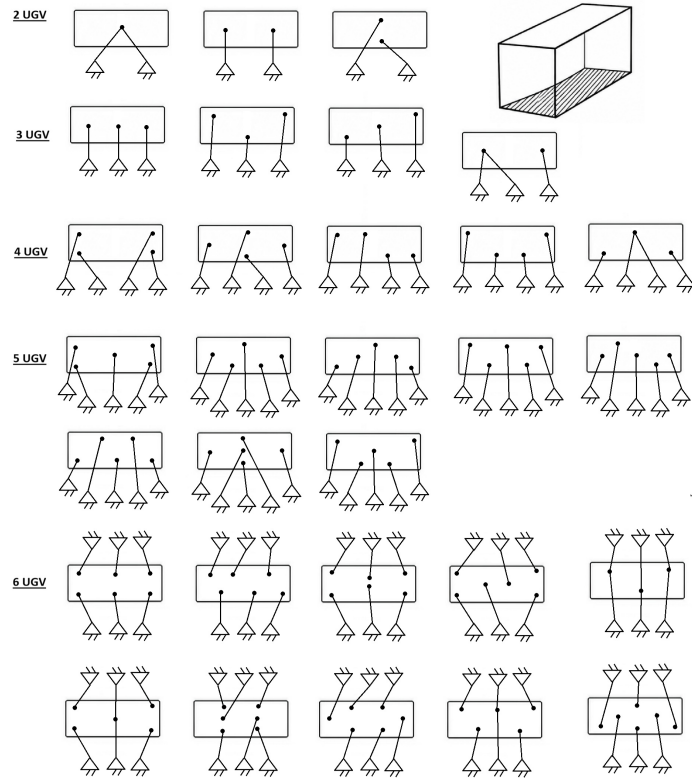


Figure 2.2: Possible UGVs connection to the payload

2.2.1 Case: one drone connected to the ground through a cable

The goal is to design the drone force F_{prop} such as that the ground tension is controlled. Since only a tension in the cable direction is imposable, an arbitrary force f^* at the ground anchor can be achieved only by moving the drone, changing the cable direction u . Called a the drone's position and b the attachment point to the ground:

$$u = \frac{a - b}{\|a - b\|} \quad (2.1)$$




Figure 2.3: One drone system connected to the ground through a cable

Option 1

Defined the desired cable tension τ^* and the desired cable direction u^* as:

$$\tau^* = \|f^*\| \quad (2.2) \quad u^* = \frac{f^*}{\|f^*\|} \quad (2.3)$$

the ground tension is obtained using the geometric constraint which relates the anchor point to the drone position:

$$a^* = b + l u^* \quad (2.4)$$

where l is the cable length. Equation 2.4 is then used as a reference to compute the propeller force.

$$F_{prop} = m_i g e_3 + K_p(a^* - a) + K_d(\dot{a}^* - \dot{a}) + \tau^* u \quad (2.5)$$

Option 2

Given the drone Newton's Second Law described in Equation 1.13, we are able to estimate the cable force $\hat{f} = F_{a,i}^{est}$

$$m_i \ddot{a}_i = F_{prop,i} - \hat{f} + F_{g,i} \quad \rightarrow \quad \hat{f} = F_{prop,i} + F_{g,i} - m_i \ddot{a}_i \quad (2.6)$$

where all the forces are in the world frame and $\ddot{a}_i$ is the drone linear acceleration. Using Equation 1.13, we would like to apply a propulsion force equal to

$$F_{prop,i}^* = f^* - F_{g,i} \quad (2.7)$$

Finally, the closed loop equation is:

$$F_{prop,i} = F_{prop,i}^* + K_p e + K_d \dot{e}, \quad \text{with } e = f^* - \hat{f} \quad (2.8)$$

The result is given to the attitude controller, which aligns the body z-axis with the commanded thrust vector.

2.2.2 Case: payload connected to the ground and a drone

In this case, we are working with the simplified case of an ACTS composed by a drone, a ground anchor and a point-mass payload. Called with subscript 1 the cable that connects the payload to the drone and with 2 the one that connects it to the ground, for definition the vector u_i , $i = 1 \div n$ is given by

$$u_i = \frac{a_i - p}{\|a_i - p\|} \quad (2.9)$$

being a_i and p respectively the actuator and the payload position.

Payload position control

The goal is to design $F_{prop,1}$ such that the payload reaches a desired position ($p \rightarrow p^*$), which is reachable for the length of the cable.




Figure 2.4: Simplified ACTS with one drone and one ground anchor

The payload dynamics is given by:

$$\begin{aligned} m_p \ddot{p} &= \tau_1 u_1 + \tau_2 u_2 - m_p g e_3 \\ &= F_{a,1} + F_{a,2} + F_g \quad \rightarrow \quad F_p = m_p(\ddot{p} + g e_3) \\ &= F_p + F_g \end{aligned} \quad (2.10)$$

The desired payload force is defined using an impedance controller:

$$F_p^* = m_p(\ddot{p}^* + g e_3) + K_p(p^* - p) + K_d(\dot{p}^* - \dot{p}) \quad (2.11)$$

with $\dot{p}^* = 0$ and $\ddot{p}^* = 0$ as we required the payload to maintain the position once it is reached. The remaining force to be generated by cable 1 is:

$$F_{a,1}^* = F_p^* - F_{a,2} \quad (2.12)$$

where $F_{a,2} = \tau_2 u_2$. This brings us back to the situation in Section 2.2.1, where $F_{a,1}$ is f^* .

Tension and orientation control

The goal can also be design $F_{prop,1}$ such that an arbitrary force f^* on the ground can be applied ($F_2 \rightarrow f^*$). In other words, $u_2 \rightarrow u_2^*$ and $\tau_2 \rightarrow \tau_2^*$. This case can be interesting to study as in a redundancy system situation, it may be helpful to add additional constraint in one of the cables. The only difference from the previous case is that the desired position for the payload p^* is not an input anymore, but obtained such that the 2nd cable is aligned along the desired direction given by f^* (Equation 2.2 and 2.3). Then:

$$p^* = a_2 - l_2 u_2^* \quad (2.13)$$




Figure 2.5: Tension directed arbitrary

2.2.3 Case: payload connected to the ground through two cables

The ACTS consists of a point-mass payload connected to the ground through two cables and to an UAV. The enumeration is shown in Figure 2.6.




Figure 2.6: Payload connected through two cable to the ground

Payload position control

If the input is the desired payload position p^* , we find ourselves in three situations:

1. p^* lies precisely on the intersecting boundary arcs dictated by the maximum lengths of the ground cables;
2. p^* is out of reach;
3. p^* is inside the triangle A_1A_3P , resulting into slack cables

In the first case, p^* is used to compute the desired payload force F_p^* (Equation 2.11). Using the simplified payload balance equation related to the forces acting on the payload (Equation 1.16), we obtain the following.

$$F_{a,1}^* = F_p^* - \sum_{i=2}^n F_{a,i} \quad (2.14)$$

which brings us back to the previous case.

Because the payload is physically constrained at a boundary where both ground cables are stretched straight, any movement or external disturbance is perfectly resisted by the tension of the cables.

In the second case, since the ground cables physically block the payload from reaching p^* , a steady error $e = (p^* - p) \neq 0$ builds up. The actual tension will be directly proportional to the control gains and the distance of the unreachable input:

$$\sum F_{virtual} \propto (p^* - p_{geom}) \implies \sum F_{virtual} = K(p^* - p_{geom}) \quad (2.15)$$

where p_{geom} is the closest reachable point that lies on the workspace boundary. In this case, we may impose a controlled tension on the ground cables directed along $(p^* - p_{geom})$ to ensure the drone continues to pull toward the desired target:

$$F_{a,1}^* = F_p^* - \sum_{i=2}^n F_{a,i} + F_{virtual} \quad (2.16)$$

In the last case, the distance from the anchors to the payload is less than the cable length, resulting into slack cables as the latter cannot push. Mathematically $\tau_2 = 0$ and/or $\tau_3 = 0$. Then, $F_{a,1}^* = F_p^*$

Desired tension in the cable on the ground

The desired variable to control is the tension of one of the cables $F_{a,2} \rightarrow f^*$.

$$F_{a,1}^* = F_p - f^* - F_{a,2} \quad (2.17)$$

where $F_p = m_p(\ddot{p} + ge_3)$ and $F_{a,2} = \tau_2 u_2$.

Desired tension difference between the cables on the ground

The desired variable to control a linear combination of the two $F_{a,2} + \alpha F_{a,3} \rightarrow f^*$.

$$F_{a,1} = F_p - F_{a,2} - F_{a,3} \quad \rightarrow \quad \begin{aligned} F_{a,1}^* &= F_p - (f^* - \alpha F_{a,3}^* + F_{a,3}^*) \\ &= F_p - f^* - (1 - \alpha)F_{a,3} \end{aligned} \quad (2.18)$$

In particular, we can analyze the case $F_{a,2} - F_{a,3} \rightarrow f^*$.

$$F_{a,1}^* = F_p - f^* - 2F_{a,3}^* = F_p - f'^* \quad (2.19)$$

2.3 Performance Indices

In the context of the ShieldBot project, we are working with two questions:

1. Which attachment geometry gives the best ability to generate the required payload wrench over the entire mission workspace?
2. Given the chosen architecture, where should the actuators (UAVs and anchor points in the ground) be positioned and what cable lengths should be used during operation?

In both cases, we need an objective measurement that guides us in the selection.

Every configuration to be eligible needs to satisfy feasibility metrics first, such as [2]:

- Wrench closure conditions (WCC), which guarantees that the payload is fully constrained and arbitrary wrenches can be generated. Mathematically: $\text{rank}(J_p) = 6$ and positive tensions exist.
- Wrench Feasible Condition (WFC), which checks whether tensions remain in the feasible bound $0 \leq \tau_{\min} \leq \tau \leq \tau_{\max}$, included UAV thrust limits, cable strength limits and UGV friction limits in a future where the ground anchor point will be movable.
- Interference-Free Condition (IFC), ensuring that there is no cable rubbing and no collision with payload edges. Mathematically:

$$\begin{aligned} d_{ij} &\geq d_{\text{safe}}, \quad \text{where } d_{ij} = \text{dist}(\text{cable } i, \text{cable } j) & \forall i, j \\ d_i &\geq d_{\text{safe}}, \quad \text{where } d_i = \min_{s \in [0,1]} (\text{dist}(r_i + s(a_i - r_i), P)) & \forall i \end{aligned} \quad (2.20)$$

where P is the payload geometry and d_{safe} is a clearance threshold.

check that this is a right conclusion

However, assuming that all cable attachment points are on the same face of the payload, the only feasible interference between the latter and one of the cables is a near-tangent cable that touches that face. This requirement will be assumed to always be met, as this study places the ACTS in a scenario where this corner case is rarely encountered.

After passing the feasibility filters, we need a way to assign a score to each hook configuration.

Capacity margin or minimum degree of constraint satisfaction

The capacity margin is a robustness index that is used to analyze the degree of feasibility of a configuration. It is defined as the shortest signed distance from the task wrench to the boundary of the available wrench set (AWS). Mathematically, it is the minimum of the distances of each one of the n vertex $w_{e,j}$ to each one of the p facet $(\mathbf{a}_l, b_l)$ of the AWS.

$$\gamma = \min_{j=1 \div n} \min_{l=1 \div p} \gamma_{j,l}, \quad \text{where } \gamma_{j,l} = \frac{b_l - w_{e,j}^\top \mathbf{a}_l}{\|\mathbf{a}_l\|_2} \quad (2.21)$$

where $\mathbf{a}_l$ is the normal vector to the l -th facet and b_l is its offset [3].

Worst-Case Capacity Margin

Additionally, we can define the worst-case capacity margin as how far the system remains from actuator saturation in the most demanding operating condition. Mathematically:

$$\zeta = \min \left(1 - \max_i \frac{\tau_i}{\tau_{i,\max}} \right) \quad (2.22)$$

For each drone, the maximum available cable tension $t_{i,\max}$ is based on its maximum thrust $f_{i,\max}$ and its current orientation relative to the cable [4]

$$t_{i,\max} = m_i \mathbf{u}_i^T (\mathbf{g} - \ddot{\mathbf{x}}_i) + \sqrt{f_{i,\max}^2 + m_i^2 \left((\mathbf{u}_i^T (\ddot{\mathbf{x}}_i - \mathbf{g}))^2 - \ddot{\mathbf{x}}_i^T \ddot{\mathbf{x}}_i - \mathbf{g}^T \mathbf{g} \right)} \quad (2.23)$$

Considering only quasi-static motion, this can be reduced to the following, where $u_{iz} = \begin{bmatrix} 0 & 0 & 1 \end{bmatrix} \mathbf{u}_i$ and $g = \begin{bmatrix} 0 & 0 & 1 \end{bmatrix} \mathbf{g}$.

$$t_{i,max} = m_i g u_{iz} + \sqrt{f_{i,max}^2 + m_i^2 g^2 (u_{iz}^2 - 1)} \quad (2.24)$$

Radius of Available Wrench (rAw)

The radius of the available wrench (rAw) is the maximum magnitude of force that the system can generate uniformly in all directions while remaining within admissible tension limits [5]. Its optimization helps identify arrangements that simultaneously maximize force robustness, geometric and collision-avoidance constraints, resulting into an enlargement of the static workspace [5].

$$rAW = \min_i \left(\min \left(\frac{|d_{pi}|}{\|\mathbf{n}_{null,i}\|}, \frac{|d_{qi}|}{\|\mathbf{n}_{null,i}\|} \right) \right) \quad (2.25)$$

being $u_{null,i} = \text{null}(M_i)$ with M_i containing combinations of linearly independent cable unit vectors and d_{pi} and d_{qi} defined as:

$$\begin{aligned} d_{pi} &= \sum_{j \in I^+} \tau_{max} u_{null,i}^T u_j + \sum_{j \in I^-} \tau_{min} u_{null,i}^T u_j - m |u_{null,i}^T g| \\ d_{qi} &= - \sum_{j \in I^-} \tau_{max} u_{null,i}^T u_j - \sum_{j \in I^+} \tau_{min} u_{null,i}^T u_j - m |u_{null,i}^T g| \end{aligned} \quad (2.26)$$

However, since [5] consider the case of a point-mass payload, it does not take in consideration the torques, we may compute separately rAW_{force} and rAW_{moment} , the maximum pure force (resp. torque) the platform can exert in any direction while generating zero net moment (resp. linear force).

Conditioning index

The conditioning index measures how uniformly the system can generate forces and moments in different directions. Mathematically:

$$\nu = \frac{\sigma_{\min}(J_p)}{\sigma_{\max}(J_p)} \in [0, 1] \quad (2.27)$$

$\sigma_{\min}$ and $\sigma_{\max}$ are the minimum and maximum singular values of the Jacobian matrix, obtained via Singular Value Decomposition (SVD) [6]. A small conditioning number indicates a well-conditioned system, far-away from singular configuration.

Manipulability

The manipulability index, defined as $w = \sqrt{\det(J_p J_p^T)}$, measures the volume of the wrench ellipsoid. A value close to 0 means that the system hit a kinematic singularity, while large value means a large overall wrench generation capability.

2.4 Architecture Selection Strategy

Say that this is an option but then just announced which one we used, but it will be talked better in the next chapter

Once the feasibility constraints are satisfied, we may want to proceed either by

$$N = w_1 \hat{\gamma} + w_2 \hat{r} \hat{w} + w_3 \hat{\zeta} \quad (2.28)$$

where all the metrics are scaled to $[0, 1]$, or either choosing the solution that maximizes the radius of available wrench between all the solutions that satisfy $\gamma > \gamma_{\min}$ and using the worst-case capacity margin as a tie breaker.

Our solution will finally be:

$$U^* = \arg \max_U (N(U)) \quad (2.29)$$

We are interested in working with an over-actuated system. Therefore, we will start using six cables for fully control the payload pose and three drones acting as an anti-gravitational force. A schematic is shown in Figure 2.7.

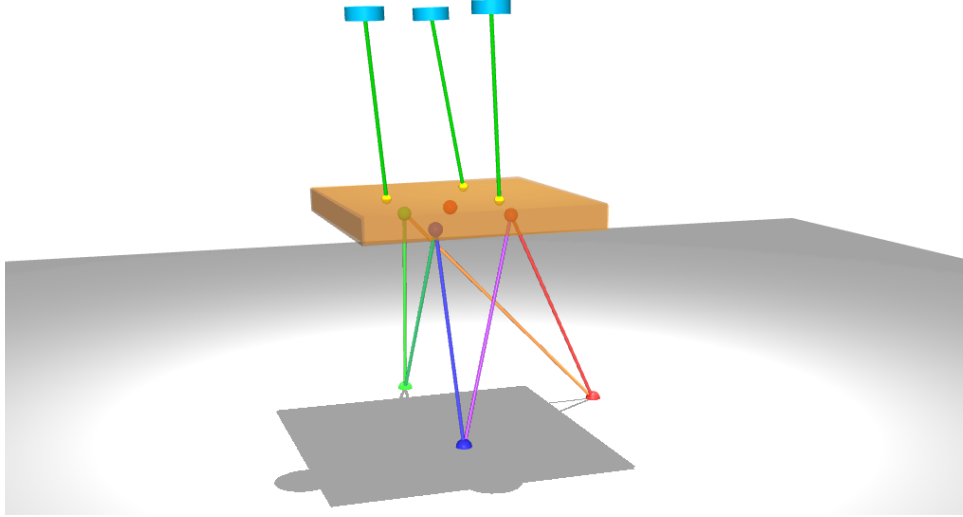


Figure 2.7: Over actuated ACTS with 6 ground cables and 3 UAVs

2.5 High level architecture

At high level, the architecture that enables the system to reach the goal is shown in Figure 2.8.

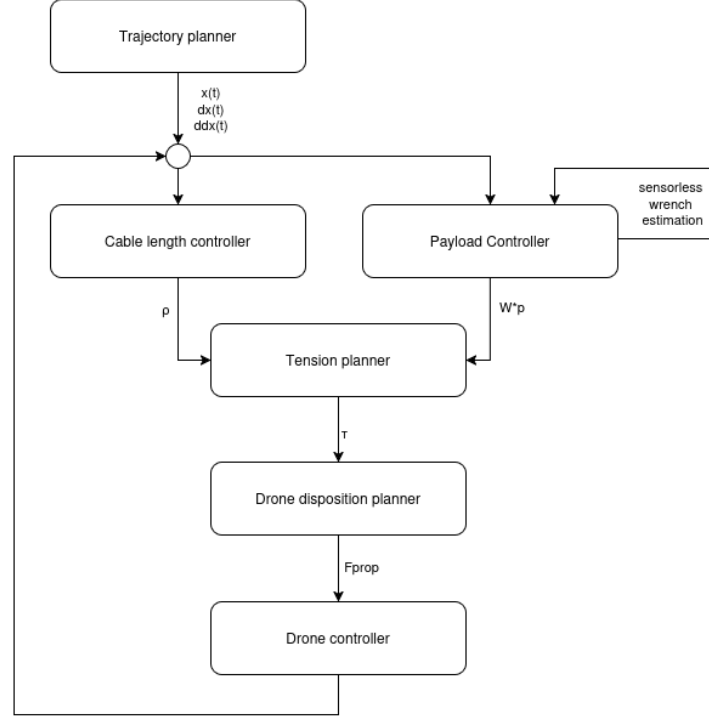


Figure 2.8: High level control scheme

Trajectory planner

The trajectory planner is able to compute the payload trajectory $x(t)$ and its velocity $\dot{x}(t)$ and acceleration $\ddot{x}(t)$ given the system's goal, such as:

1. Make the payload fly;
2. Bring the payload at the right height and orientation;
3. Approach the façade.

and/or the initial and final position of the payload.

Payload Controller

Then, the desired payload wrench W_p^* is computed for each point in the trajectory based on the previous state of the system. One strategy is using a PD controller:

$$\begin{aligned} F_p^* &= m_p(\ddot{p}^* + g) + K_p(p^* - p) + K_d(\dot{p}^* - \dot{p}) \\ M_p^* &= K_r e_r + K_w e_w \end{aligned} \quad (2.30)$$

How we computed e_r and e_w and add paper reference

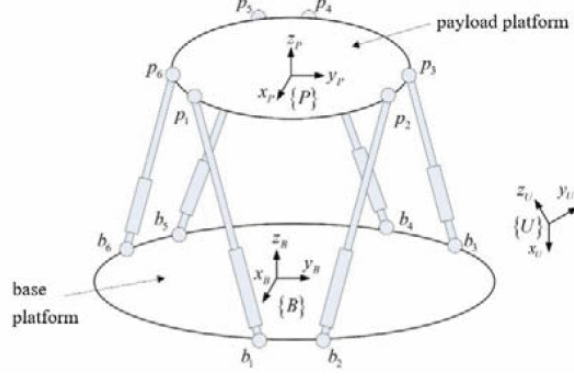


Figure 2.9: Gough Stewart schematics [1]

Cable length controller (winch level control)

When transitioning from a desired payload pose to the next along the planned trajectory, the operational priority is given to the ground actuators, as they can be controllable with significantly higher precision than UAVs.

As the starting ACTS configuration consists of six ground cables, the ground sub-system can be modeled as a Gough-Stewart parallel platform (Figure 2.9), where the required positive cable tensions are guaranteed by the drones.

Given the desired payload position p^* and the rotation matrix ${}^0_p R^*$ that defines the desired orientation of the payload relative to the fixed world frame, the desired i -th ground cable vector ${}^0\mathbf{l}_i^*$ is geometrically defined as:

$${}^0\mathbf{l}_i^* = {}^0\mathbf{a}_i - {}^0\mathbf{r}_i = {}^0\mathbf{a}_i - ({}^0\mathbf{p}^* + {}^0_p R^* {}^p\mathbf{b}_i) \quad (2.31)$$

The target leg length is $\rho_i^* = \|\mathbf{l}_i^*\|$. To ensure precise tracking of the ground cable lengths, we can either implement a PD controller at the winch level, where the velocity command $\dot{\rho}_i$ is given by:

$$\dot{\rho}_i = \dot{\rho}_i^* + K_i(\rho_i^* - \rho_i) + K_p(\dot{\rho}_i^* - \dot{\rho}_i) \quad (2.32)$$

Under the assumption of stationary winches ($\dot{a} = 0$), $\dot{\rho}_{ground}^* = -J_{p,ground}\xi^*$ (Equation 1.5), where ξ^* is the desired payload twist and $J_{p,ground} \in \mathbb{R}^{6 \times 6}$ is the Jacobian matrix mapping the payload twist to the ground cable length variation. In simulation, we implement a control directly on the cable length:

$$l_i = l_i^* + K_p(l_i^* - l_i) + K_d(\dot{l}_i^* - \dot{l}_i) \quad (2.33)$$

Tension planner

The tension planner is the layer responsible for guaranteeing that every cable stays taut throughout the motion. In fact, when working with ACTS, a payload wrench configuration is statically admissible if and only if there exists a set of strictly positive cable tensions ($\tau_i \geq \tau_{min} > 0$) that balance the target operational wrench. This is due to the fact that cables can only pull and not push. Mathematically, this layout optimization is formulated as:

$$\begin{aligned}
& \min_{p_a} \quad \sum_{i=1}^{n_a} \|F_{prop}(p_{a,i}, \tau_{optimal,i})\|^2 + K \|J_p \tau_{optimal} - W_p^*\|^2 \\
\text{subj. to} \quad & x_i^2 + y_i^2 + z_i^2 = l_i^2 \quad \forall i \in [1, n_a] \\
& \rho_{WCC}(\mathcal{U}) \leq 0 \\
& \rho_{IFC}(\mathcal{U}) \leq 0
\end{aligned} \tag{2.34}$$

which is a Nonlinear optimization Problem (NLP) due to the Euclidean distance constraints. In Section 2.5.1, we propose some ways to turn it into a Quadratic Programming problem (QP).

This objective function aims to minimize the propulsion force of the drones while satisfying the wrench equilibrium equations on the payload. The parameter K acts as a penalty weight that prioritizes the tracking performance over energy efficiency; setting a high value (e.g., $K = 1000$), heavily penalizes any mismatch between the generated wrench and the commanded target wrench W_p^* .

For whatever positions p_a , the cable tensions τ are determined by a second inner loop

$$\begin{aligned}
\tau_{optimal} &= \arg \min_{\tau} \frac{1}{2} \tau^\top H \tau \\
\text{subj. to} \quad & J_p^\top(\mathbf{u}) \tau = W_p^* \\
& \tau_{min,i} \leq \tau_i \leq \tau_{max,i} \quad \forall i \in [1, n_a + n_g]
\end{aligned} \tag{2.35}$$

The lower bound $\tau_{min,i} > 0$ in the wrench feasible condition is what enforces the taut-cable requirement.

As the winch-level control drives $\rho \rightarrow \rho^*$, tracking the payload's motion toward its target pose, and $\mathbf{u} \rightarrow \mathbf{u}^*$, the achievable wrench set used by the tension planner is itself changing over the trajectory, since it depends on $\mathbf{u}$. As a consequence, $\mathbf{W}_p^*$ may be reachable at the target configuration but momentarily unreachable at the actual configuration, with all tensions kept strictly positive. When this occurs, Equation 2.35 should relax the equality constraint $\mathbf{J}_p^\top(\mathbf{u}) \tau = \mathbf{W}_p^*$ to a least-squares objective, while keeping $\tau_{min,i} > 0$ as a hard constraint.

$$\begin{aligned}
\tau_{optimal} &= \arg \min_{\tau} \left(\frac{1}{2} \tau^\top H \tau + \gamma \|J_p^\top(\mathbf{u}) \tau - W_p^*\|^2 \right) \\
\text{subj. to} \quad & \tau_{min,i} \leq \tau_i \leq \tau_{max,i} \quad \forall i \in [1, n_a + n_g]
\end{aligned} \tag{2.36}$$

This guarantees that the tension planner always returns a taut solution, one that approximates the desired wrench as closely as the actual geometry allows, rather than returning no solution at all during the transient.

For the initial stage of development, this general QP is replaced by a simplified strategy: every cable tension is fixed at the minimum admissible value,

$$\|\tau_i^*\| = \tau_{min}, \quad \forall i \in [1, n_a + n_g]. \tag{2.37}$$

Drone disposition planner

Once the tension planner computes the scalar target tension magnitudes, the drones must dynamically adjust their orientation and propeller thrusts to impose these forces.

From the static equilibrium balance (Equation 1.13) the required propeller thrust vector is given by:

$$\mathbf{F}_{prop,i} = \mathbf{F}_{a,i} - \mathbf{F}_{g,i} = \mathbf{J}_{a,i}^\top \tau_i + m_i \mathbf{g} = T_i^0 \mathbf{R} \mathbf{e}_3, \quad T_i = \|\mathbf{F}_{prop,i}\| \quad (2.38)$$

which is then handed to the attitude controller, responsible for aligning the body z -axis with the commanded thrust vector.

2.5.1 Quadratic Approximation of the UAV Disposition Problem

delete it? We don't use it

The nonlinear optimization problem presented in the previous section:

$$\begin{aligned} \min_{p_a} \quad & \sum_{i=1}^{n_a} \|F_{prop}(p_{a,i}, \tau_{optimal})\| \\ \text{subj. to} \quad & x_i^2 + y_i^2 + z_i^2 = l_i^2 \quad \forall i \in [1, n_a] \\ & \rho_{WCC}(\mathcal{U}) \leq 0 \\ & \rho_{IFC}(\mathcal{U}) \leq 0 \end{aligned}$$

can be rewritten as a quadratic problem where possible.

Wrench closure condition

The rank condition $\text{rank}(J_p) = 6$ is not a smooth inequality. To overcome this problem, we could:

- Use the manipulability index squared $w^2 = \det(J_p J_p^\top) \geq w_{\min}^2 > 0$ in which $w = 0$ indicates a singular configuration;
- Impose positive value for the smaller singular value ϵ : $\sigma_{\min}(J_p) \geq \epsilon$

The cost function

The objective function can be approximated by replacing the sum of Euclidean norms with the sum of squared Euclidean norms,

$$\min_{p_a} \sum_{i=1}^{n_a} \|F_{prop}(p_{a,i}, \tau_{optimal})\| \approx \min_{p_a} \sum_{i=1}^{n_a} \|F_{prop}(p_{a,i}, \tau_{optimal})\|_2 = \min_{p_a} \sum_{i=1}^{n_a} F_{prop}^\top F_{prop} \quad (2.39)$$

as for definition $\|u\|_2 = \sqrt{u^\top u}$. This approximation penalizes large outliers more than small ones.

Therefore, the problem becomes:

$$\begin{aligned} \min_{p_a} \quad & \sum_{i=1}^{n_a} F_{prop}^\top F_{prop} \\ \text{subj. to} \quad & x_i^2 + y_i^2 + z_i^2 = l_i^2 \quad \forall i \in [1, n_a] \\ & w_{\min}^2 - w^2 \leq 0 \\ & d_{\text{safe}} - d_{ij} \leq 0 \\ & d_{\text{safe}} - d_i \leq 0 \end{aligned} \quad (2.40)$$

Experiments

How to structure this chapter:

1. Why did we chose to go for the method: controller and see if that pose is reacheable? [DONE]
2. Talk about Stewart configurations,
 - which are the indices values [DONE]
 - what these can tell us about everything [DONE]
 - How do I want each performance index? [DONE]
 - Show them in a graph
3. Given an UAV configuration (we chose triangle), analyze cable routing
 - Why we choose the triangle for the UAVs configuration?
 - How the code work, how a given cable routing has been found
 - How can I know a configuration is mure suscettibile to be singular? Something with a jacobian?
 - How the results before simulation and after simulation differ?
 - Rectangle-same really unstable configuration
 - line or diagonal results in not-feasible configurations, why? what does this mean? Geometric reasons?
4. Given the results of the previous step, lets analyze the first 3/5 configurations with all 6 possible uav configurations
 - Expetation: triangle being the best one, if not, which one is best? Rerun step 2 and see how things change
 - How drone attachment influences reaching the goal? Show evolution graph
5. Can a more spread-out hook configuration on the ground better the performance or it is irrelevant?
 - Does the answer change when the desired position is If so, it opens results to the moving hook point.further away?
 - Show example on the top configuration and a really bad one.

- Is there any papers/theorem that says so?
 - Show evolution graph
6. How a configuration far away from the hook point on the ground performs?
- (a) Stewart: the position is reachable with a relative small error, but it is not stable.
 - (b) The hook position should cover more space on the ground
 - (c) Is there a geometric reason/ theory for that?

3.1 Experimental methodology and evaluation framework

The objective of this chapter is to evaluate how the architectural design of an ACTS influences its ability to accurately and robustly manipulate a payload. The focus is on how different cable routing strategies, UAV attachment configurations, and ground hook placements influence the overall system performance.

In fact, a configuration is considered successful if the desired payload is reached with sufficiently small position and orientation errors, all cables remain under positive tension throughout the maneuver, and the payload converges to an equilibrium without persistent oscillations.

In this chapter we will answer questions like "Which configuration gives the best payload control performance according to the theoretical indices?" and "Which configuration would I actually choose for the robot?"

The geometric and static performance indices provided in Section 2.3 describe the instantaneous ability of a given architecture to generate payload wrenches and identify configurations that are close to kinematic singularities. However, these indices are evaluated under static or quasi-static assumptions and therefore cannot fully characterize the behavior of the closed-loop system during motion. During motion, cable directions, tensions and payload dynamics continuously evolve. Consequently, a configuration that appears favorable according to static indices may still exhibit oscillations, poor tracking or instability. Closed-loop simulation is therefore necessary to verify whether the theoretical advantages translate into practical performance.

All simulations are carried out using the MuJoCo (Multi-Joint Dynamics with Contact) physics extensions, allowing simulation of closed-loop systems, such as CDPRs and ACTSs, which is not possible in Gazebo. Another reason I switched from Gazebo to MuJoCo was the ability to model cables as tendons, which are minimum-path-length strings with wrapping and tracking, constraints [7]. However, for the purpose of this thesis, the cables are treated as pure physical constraints, without stiffness or damping.

The payload mass, UAV model, controller gains, drone cable lengths, simulation duration, and desired payload pose are kept constant throughout all experiments to ensure a fair comparison between different architectural configurations. The only variables that change from one experiment to another are the cable routing, the UAV attachment geometry, and the placement of the ground hook points.

Two desired payload poses are taken in considerations. In the first scenario, the desired payload orientation coincides with the world reference frame; while in the other scenario a non-zero desired orientation is imposed. This allows to analyze separately the rotational motions from the translation tracking.

First, the classical Stewart configuration is analyzed and used as a reference architecture due to its geometric symmetry and extensive use in the literature. In fact, if even Stewart-like performs poorly, the problem is likely the controller rather than the architecture. The remaining experiments then investigate how modifications to the ground cable routing, UAV attachment geometry, and hook placement affect both the theoretical performance indices and the closed-loop behavior of the system. This progressive analysis makes it possible to identify which geometric features have the greatest influence on payload manipulation performance.

3.2 Stewart platform baseline

Thanks to its symmetrical geometry, the Stewart ground cable configuration is expected to ensure uniform torque generation in all directions while maintaining an optimal distance from singularities. Consequently, high values of the manipulability, capacity margin, radius of available wrench, and composite score are expected, together with a relatively high conditioning index. From a control perspective, these characteristics should result in accurate payload tracking while maintaining all cable tensions within their admissible limits.

3.2.1 Numerical Verification of the Implementation

Before comparing different ACTS architectures, one representative Stewart configuration is manually verified. The optimized cable tensions, payload wrench and UAV thrusts are recomputed directly from the governing equations presented in Chapter 2 and compared with the values returned by the implementation. This verification confirms the correctness of the numerical optimization and the controller implementation before performing the comparative study.

Configuration

Payload dimensions $2.0 \times 2.0 \times 0.2$

Desired pose $p^* = [0.5, -0.5, 2.0]^\top$

Desired orotation $R^* = \mathbb{I}$

attachment	points	hook points	
$A_4 \equiv A_5$	$[0.0, 1.1, 0.0]^\top$	$B_4 \equiv B_9$	$[0.5, 0.05, 1.9]^\top$
$A_6 \equiv A_7$	$[-0.9526, -0.55, 0.0]^\top$	$B_5 \equiv B_6$	$[-0.0237, -0.775, 1.9]^\top$
$A_8 \equiv A_9$	$[0.9526, -0.55, 0.0]^\top$	$B_7 \equiv B_8$	$[0.9763, -0.775, 1.9]^\top$

Cable directions u_i

Using Equation 1.6b

$$\begin{aligned}
 u_4 &= [-0.2245, 0.4713, -0.8529]^\top & u_7 &= [-0.7100, 0.0828, -0.6993]^\top \\
 u_5 &= [-0.0089, 0.7024, -0.7117]^\top & u_8 &= [-0.0124, 0.1176, -0.9930]^\top \\
 u_6 &= [-0.4545, 0.1047, -0.8846]^\top & u_9 &= [0.2215, -0.2937, -0.9299]^\top
 \end{aligned}$$

Ground jacobian

Cable tensions τ_i

Payload wrench W_p

Required drone thrust

Does it correspond

3.2.2 Comparison τ_{min} and τ_{opt}

As mentioned in Section 2.5, we evaluate two distinct tension allocation strategies:

- Minimal tension strategy, in which every cable tension is imposed such that $\|\tau_i\| = \tau_{min}$.
- Optimal tension strategy, in which cable tensions are determined by the quadratic optimization problem in Equation 2.36

The performance indices and tracking errors under both strategies across three operational scenarios are summarized in Table 3.1.

Even though being faster, the minimal tension strategy has negative consequences on the system's robustness. Pinning the tension vector to its lower limit τ_{min} collapses the tension space from an N -orthotope $[\tau_{min}, \tau_{max}]^N$ to a single point, which linearly maps through the wrench matrix W to degenerate the Available Wrench Set (AWS) into a single point [8]. As a result, any deviation of the desired payload wrench W_p^* from this single point results in a negative capacity margin (as seen in Scenario A where $\gamma = -1.16757$). This indicates that the system is theoretically incapable of resisting external disturbances or maintaining equilibrium without violating the tension constraints.

Switching to the optimal tension allocation, allows the cable tensions to vary dynamically between τ_{min} and τ_{max} . Hence, the radius of the Available Wrench increases and the capacity margin takes on a positive value ($\gamma = 5.20$). As a result, also the composite score increases.

Differently, changing the tension allocation algorithm has no effect on the conditioning index or manipulability because they are kinematic metrics that only depend on the platform's geometric position.

Although the nested structure of this optimization problem inherently increases the overall computational complexity, the primary objective of this study is offline structural and kinematic analysis rather than real-time control execution. Consequently, the computational overhead does not limit the validity of the current framework. For future real-time applications, this hierarchical formulation can be mapped to more efficient schemes.

show how position and orientation error changes overtime

On the other hand, it is worth to notice that, since the objective function does not contain any state-tracking terms, this optimizer does not directly minimize the payload's real-time position or orientation tracking errors. Because of this, a spatial configuration that yields globally minimal propulsion effort does not guarantee a minimum in tracking error.

update the table based on the changes made to the code

show performance indices of one of the scenarios over time, which one?

Although the Stewart configuration exhibits good overall performance and provides an excellent reference architecture, the proposed ACTS differs from a classical Stewart platform because the UAV cables can be connected to the payload in several different ways. Moreover, different ground cable routings may further improve specific performance aspects such as stability, wrench generation capability, or robustness. For these reasons, the Stewart configuration is adopted as a baseline against which all alternative architectures are compared.

	Scenario A (Stable)		Scenario B (Oscillating)		Scenario C (Stable)	
Metric / Parameter	τ_{min}	τ_{opt}	τ_{min}	τ_{opt}	τ_{min}	τ_{opt}
Desired Position	$[0.5, -0.5, 2.0]^\top$		$[0.5, -0.5, 2.0]^\top$		$[0.5, -0.5, 2.0]^\top$	
Desired Orientation	$[1.0, 0.0, 0.0, 0.0]^\top$		$[1.0, 0.1, 0.1, 0.3]^\top$		$[1.0, 0.1, 0.1, 0.0]^\top$	
Conditioning Index	0.10480	0.09573	0.04361	0.03986	0.10596	0.09451
Manipulability	0.49089	0.42466	0.19713	0.17907	0.51002	0.42760
Radius Avail. Wrench	13.65493	20.80839	19.70489	24.23539	13.41358	17.58092
Capacity Margin	-1.16757	5.20271	0.65833	-1.70736	-0.37528	4.27541
Worst-case CM	0.86285	0.68944	0.86521	0.86435	0.86385	0.69290
Composite Score	4.45007	8.90018	7.07614	7.79746	4.63405	7.51641
Position Error	0.03150	0.05885	0.04953	0.05134	0.02904	0.05358
Orientation Error	0.01769	0.02321	0.22120	0.18969	0.01036	0.02237

Table 3.1: Comparative performance indices and tracking errors for Stewart baseline configuration across Scenarios A, B, and C.

An ideal ACTS architecture should remain far from singular configurations, generate payload wrenches efficiently in every direction, and maintain sufficient redundancy to accommodate disturbances while respecting cable tension limits. Consequently, all the considered performance indices should be as big as possible.

The considerations from now on will be done using the optimal tension strategy.

does the configuration chooser use tau min or tau optimal?

3.3 Ground cable routing

Why we choose the triangle for the UAVs configuration?

How the code work, how a given cable routing has been found

How can I know a configuration is more susceptible to be singular? Something with a jacobian?

How the results before simulation and after simulation differ?

Rectangle-same really unstable configuration

line or diagonal results in not-feasible configurations, why? what does this mean? Geometric reasons?

Given a candidate pair of layouts (a payload-node layout and a ground-anchor layout, e.g. pentagon/triangle), there are usually hundreds to thousands of physically valid ways to route the 6 ground cables between the two sets of nodes. Scoring an architecture using only one (arbitrarily chosen) routing confounds two different things: how good the architecture is, and how lucky the routing choice was. This script removes that confound by exhaustively enumerating every valid routing for a given architecture, scoring each one against three necessary conditions from Sec. 2.3 of the thesis (Wrench Closure, Wrench Feasibility, Interference-Freedom), and keeping only the best surviving routing — so architectures are compared on their best achievable performance, not on chance.

It also scores every routing at every pose you supply, and keeps the worst-case result across poses (max-min), because a routing that looks excellent at one setpoint can be nearly singular at another — Sec. 2.3’s performance indices are pose-dependent, and a single-pose evaluation would be misleading.

The six ground cables are treated in isolation from the three UAV cables, justified by Sec. 2.6: the ground subsystem is modeled as its own Gough-Stewart parallel platform, with the UAVs supplying only a separate, vertical anti-gravity force.

Algorithm 1 Cable Routing Optimization and Architecture Ranking

```

1: for all (payload_layout, ground_layout) pairs do
2:   Enumerate every valid 6-cable routing via ENUMERATE_ROUTINGS
3:   for all routing do
4:     for all pose  $\in$  test-pose set do
5:       Build  $J_p$  via BUILD_JP_GROUND ▷ Eq. 1.7
6:       Check Wrench Closure via SCORE_JP / rank test ▷ Note 1, Sec. 2.3
7:       ▷ Optional Checks:
8:       Check Wrench Feasibility via CHECK_WFC ▷ Eq. 1.9 / 2.35
9:       Check Interference-Freedom via CHECK_IFC ▷ Eq. 2.20
10:    end for
11:    Record this routing’s worst-case score across all poses
12:  end for
13:  Keep the best surviving routing for this architecture
14: end for
15: Rank all architectures by their best routing’s worst-case conditioning index
16: Generate MuJoCo XML for the top 5

```

The line and diagonal configurations approach kinematic or wrench singularities, where the cable arrangement cannot generate the desired six-dimensional wrench while maintaining positive tensions. Conversely, the Rectangle-Same configuration remains kinematically feasible but exhibits poor rotational stiffness due to its asymmetric cable pairing. As a result, although the Jacobian remains full rank, the payload develops a rocking motion that cannot be predicted by the geometric performance indices alone.

Increasing the spacing between the ground hooks enlarges the available wrench set and moves the system farther from wrench singularities, explaining the observed improvement in tracking performance.

3.4 Ground hook placement

3.5 Discussion

Write this better

After realizing a workable controller, which was tested using the gough stewart platform, we can proceed to consider different way to connect 6 ground cable to the platform (Figure 3.1) and the drone (Figure 3.2). The same coniguration to the ground can change the stability of the system based on which point is connected to which hook on the ground.

Add the figure showing the evolution of the indices over time

Discuss what we see and why of these results

We will compare the other configuration to this to find out if there's a better one or not.

We can let our imaginations run wild as we create different combinations. Here, some combination which have given interesting results or that compared to others helps us drawing conclusions.

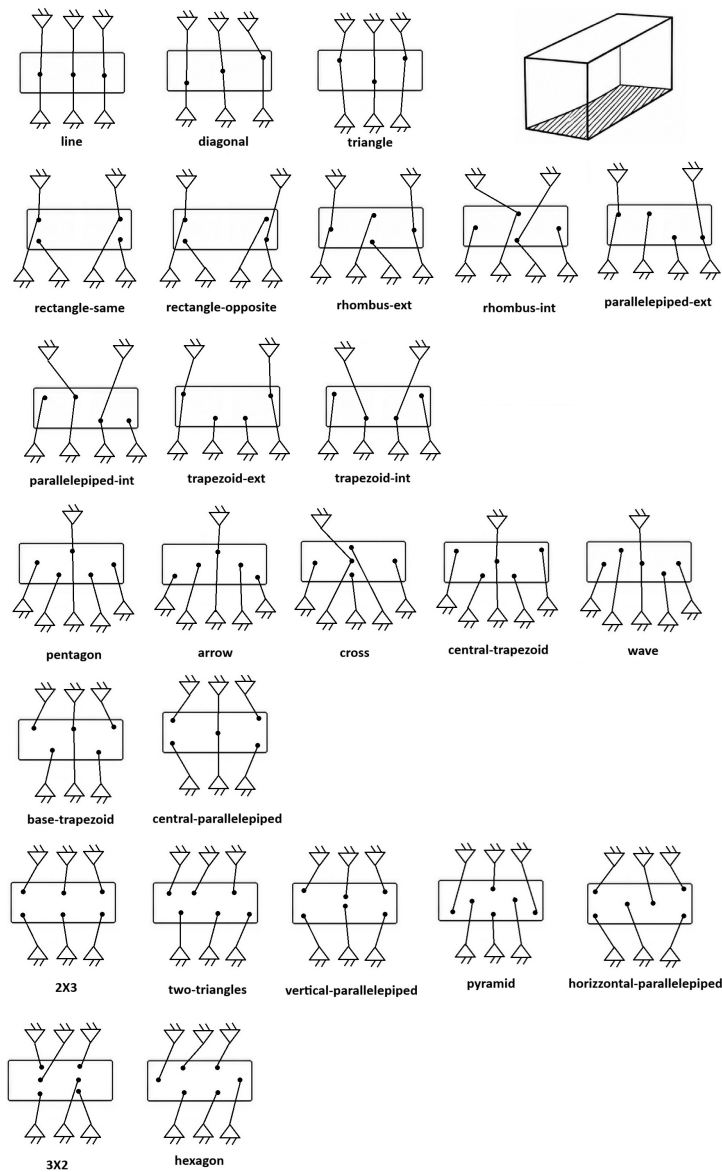


Figure 3.1: Possible 6 UGVs connections

Add link to the repository

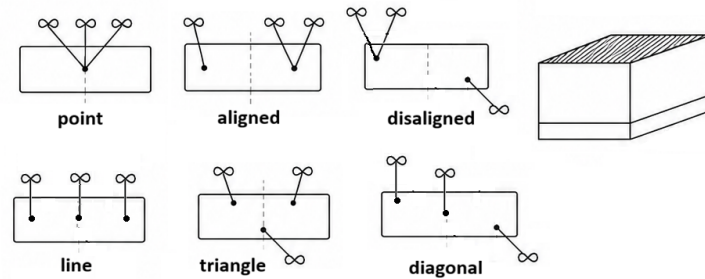


Figure 3.2: Possible 3 UAVs connection with one cable

Rectangle-same

The Hinge Effect: Two corners of your rectangle have double the pulling force (2 cables), while the other two corners have half the force (1 cable). This sets up a physical "rocking axis" or line of asymmetry across the platform.

Loss of Torsional Stiffness: Because the rectangle's corners are orthogonal and symmetric, pairing them up this way creates an instantaneous center of rotation where the platform can twist or tilt with almost zero resistance from the cables.

Pure Kinematics vs. Statics: Your SVD code (score_Jp) evaluates the kinematics at a perfectly static, frozen snapshot in space. It sees that the matrix is invertible and says "Feasible!". But it doesn't account for the fact that the moment a controller applies real force, this geometric asymmetry creates an unconstrained twisting motion that causes the platform to lose control.

A full-rank Jacobian is necessary but not sufficient for good closed-loop performance.

This is a very important statement.

Then explain why.

The Jacobian says

Can I generate arbitrary infinitesimal wrenches?

It does not say

Will the closed-loop system remain dynamically stable?

Your rectangle is the perfect example.

It has full rank, acceptable manipulability, acceptable conditioning

yet poor torsional stiffness, uneven load distribution, asymmetric restoring moments, oscillatory dynamics

In other words

The Jacobian is only a local kinematic property.

The simulation captures

inertia controller load redistribution dynamic coupling restoring torques

which the Jacobian completely ignores.

Conclusions

Future developments

- Consider different configuration rather than 6 on the ground and 3 on the top
- Façade interaction

Also answering these questions:

- Is it better having the drone connected through one or two cables to the payload in terms of easy maneuverability, feasible workspace, available wrench set and energy consumption?
- How accuracy on drones' position affects the accuracy on the platform's position?
- Are UAVs (resp. UGVs) strictly connected to the upper (resp. down) face or can they be attached to the down (resp. upper) face?

Bibliography

- [1] J. Wang, Z. Zuo, K. Xia, and Y. Zou, “Adaptive position tracking control of uncertain stewart platform,” in *2023 2nd Conference on Fully Actuated System Theory and Applications (CFASTA)*, 2023, pp. 815–821.
- [2] H. H. Cheng and D. Lau, “Cable attachment optimization for reconfigurable cable-driven parallel robots based on various workspace conditions,” *IEEE Transactions on Robotics*, vol. 39, no. 5, pp. 3759–3775, 2023. [Online]. Available: <https://ieeexplore.ieee.org/document/10269667>
- [3] A. L. C. Ruiz, S. Caro, P. Cardou, and F. Guay, “ARACHNIS: Analysis of robots actuated by cables with handy and neat interface software,” in *Cable-Driven Parallel Robots*, A. Pott and T. Bruckmann, Eds. Springer International Publishing, 2015, vol. 32, pp. 293–305. [Online]. Available: https://link.springer.com/10.1007/978-3-319-09489-2_21
- [4] J. Erskine, A. Chriette, and S. Caro, “Wrench analysis of cable-suspended parallel robots actuated by quadrotor unmanned aerial vehicles,” *Journal of Mechanisms and Robotics*, vol. 11, no. 20909, 2019. [Online]. Available: <https://doi.org/10.1115/1.4042513>
- [5] H. Jamshidifar and A. Khajepour, “Static workspace optimization of aerial cable towed robots with land-fixed winches,” *IEEE Transactions on Robotics*, vol. 36, no. 5, pp. 1603–1610, 2020. [Online]. Available: <https://ieeexplore.ieee.org/document/9119199>
- [6] J. Erskine, “Dynamic control and singularities of rigid bearing-based formations of quadrotors,” issue: 2021ECDN0044. [Online]. Available: <https://theses.hal.science/tel-03699595>
- [7] DeepMind, “Mujoco documentation: Overview (version 2.3.7),” <https://mujoco.readthedocs.io/en/2.3.7/overview.html>, 2023, accessed: 2026-07-10.
- [8] Y. Yang, S. Zhao, Y. Zhang, and L. Wu, “Robust wrench-feasible control for multiple UAVs aerial transportation system with adaptive cable configuration,” in *2025 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pp. 18 029–18 035, ISSN: 2153-0866. [Online]. Available: <https://ieeexplore.ieee.org/document/11246861>

APPENDIX A

Singularity

make it better/explain it

Type	Cause	Detection	Consequence
Kinematic	$\text{rank}(J_p) < 6$	Conditioning, Manipulability	Loss of DOF
Wrench	Desired wrench outside AWS	Capacity Margin, RAW	Desired wrench cannot be generated
Tension	Negative or zero cable tensions	Tension optimization	Cable slack
Stiffness	Poor cable distribution	Simulation	Oscillations, rocking
Dynamic	Closed-loop instability	Simulation	Tracking failure