


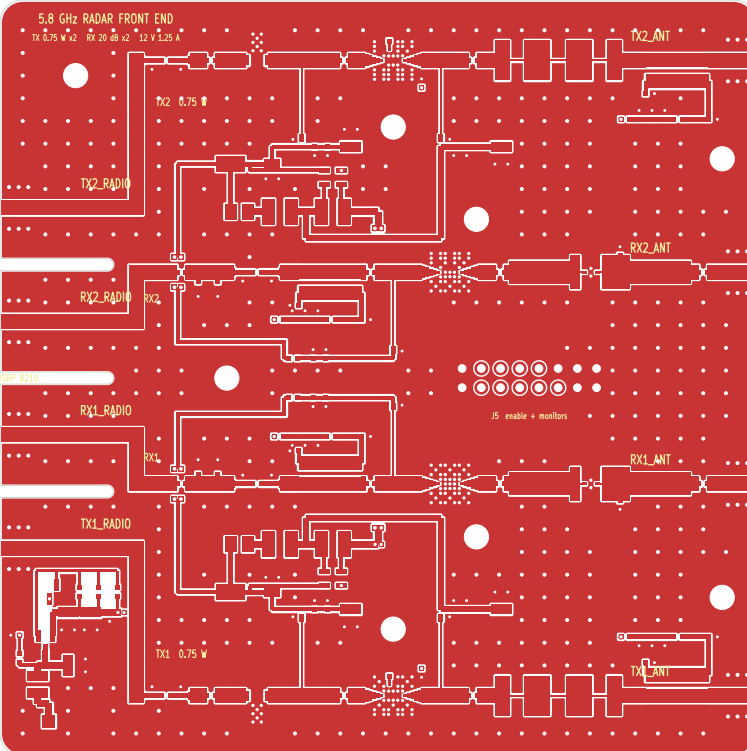

NOTES: ZYF300CA-P 0.76 mm top dielectric, er 3.0, loss tangent 0.0018 -- NO SUBSTITUTION
 4 copper layers, finished thickness 1.576 mm +/- 10 per cent
 surface finish immersion silver, 1 oz copper all layers
 minimum track 0.20 mm, minimum gap 0.15 mm, minimum hole 0.25 mm
 50 ohm microstrip on F.Cu referenced to In1.Cu: 1.854 mm wide
 solder mask omitted on B.Cu under the amplifiers -- intentional, this is the thermal contact face
 copper to board edge 0.15 mm at the six launches -- intentional
 connector: Cinch 142-0701-801 (0.062 in) end launch, six off