



HELI

CPD15/18/20/25 /30/35/38

A3LiH4-M A7LiH4-S A7XLiH4-S



H4 SERIES

1.5-3.8 t LITHIUM-ION

H4 series Lithium-ion Battery
Forklift Truck



ANHUI HELI CO., LTD.

Add / No.668, FangXing Road, Hefei, China
Fax / +86-551-63639966
Tel / +86-551-63639068(America); 63639258(Europe);
63639358(Asia); 63662105(Africa & Middle East)

* Our products are subject to improvements and changes without notice.



LinkedIn



YouTube



Facebook

Lead & Lithium Are Ready To Go.

- / People oriented design concept
- / Inheritance family design concept
- / Seek breakthrough in a appearance
- / Showing dynamic charm in design details



Comfort and energy saving

01-02

The user experience is fully considered, and the superior operating space design provides high driving comfort.



Stable and Reliable

03-04

CAE analysis, component batch test and whole truck strengthening test are used to ensure reliability.



Intelligent security

05

Intelligent control and protection improve the safety of drivers.



Convenient maintenance

06

More convenient maintenance operation improves the maintenance efficiency of after-sale services.

Comfort and energy saving

The user experience is fully considered, and the superior operating space design provides high driving comfort.

Wide view mast design, wide front view

The big handle and the superspacious cab design are suitable for people of different heights.

Steering wheel start steering (optional)

P, E, S three speed regulation

P	Powerful	Multi gear performance mode can be freely selected according to actual working conditions.
E	Economics	
S	Energy saving	

The whole truck is equipped with LED lighting system as standard, with high brightness, long service life and more energy saving


Reversing horn handle (s optional, M standard)




Semi enclosed shock-absorbing seat offers high comfort.



Electric special pattern tyre has low driving damping.



Mast lowering buffer



Gantry lifting buffer (optional)

Right set operating valve stem offers good operation comfort.

Intelligent color screen instrument offers more friendly human-computer interaction.



Graphical interface design / Chinese fault display / integrated handheld unit function / optional integrated vehicle networking function



Full package design of instrument panel; Water cup holder, mobile phone storage space; USB interface (optional for S, standard for M)

Stable and Reliable

CAE analysis, component bench test and whole truck strengthening test are used to ensure reliability.

Reliable components



Steering axle:
Cast axle body, tapered roller bearing



Drive axle:
Integral brake drum, integral cast axle housing, half shaft oil seal design, high-precision gear with large coincidence



Mast:
Borrowing the main components of mature mast of internal combustion forklift truck

Sheet metal stamping side cover

All metal anti-skid pedal



Good lateral stability of the whole truck and guaranteed safety during operation




High rotation point steering axle



Middle and sink layout of the battery

Good heat dissipation



Side mounted welded oil tank



Test verification



Rain test

Simulate the operation under 15min rainstorm, reach IP44 protection grade, and meet the needs of outdoor operation.



Cold storage test

The whole truck can run continuously after 6 hours of alternating operation in the -20°C cold storage and 12 hours of parking in the cold storage.



Vehicle vibration test

The vibration frequency of the whole truck is tested to optimize and improve the operating comfort.





Reliability endurance test

800 hour strengthening of the whole truck (including climbing, rain, bumpy road, etc.).

Intelligent security

Intelligent control and protection
improve the safety of drivers.

- Dual core controller
- OPS protection
(standard driving OPS / optional hydraulic OPS)
- Hydraulic burst protection,
forward tilting self-locking
protection
- Electrical multiple protection
(short circuit protection, overheat protection,
low power protection, sequence protection)
- Parking safety reminder
- Reminder through slow
sliding on ramp
- Turning automatic
deceleration (optional)




- Flexible battery charging mode (can be charged with the truck or replaced)
- Pump, pump motor, controller and other main electrical components are located on the counterweight, which is convenient for maintenance.
- Friendly Interface



Convenient maintenance

More convenient maintenance operation
improves the maintenance efficiency of
after-sale services.

Manufacturer and Technical Data(Tabulation 1)											
Characteristics											
1.01 Manufacturer											
1.02 Model			CPD15	CPD18		CPD15		CPD18		CPD20	
1.03 Configuration number			A3LIH4-M				A7LIH4-S		A7LIH4-S		
1.04 Rated capacity	Q	kg	1500	1800		1500		1800		2000	
1.05 Load center distance	c	mm									
1.06 Power mode	Lithium battery										
1.07 Driving mode	Seated										
1.08 Front overhang	x	mm	409				409				
1.09 Wheelbase	y	mm	1475				1475		414		
Weight											
2.01 Total weight (with/without battery)	kg	2855/2675		2970/2790		2835/2672		2950/2787		3100/2920	
2.02 Axle load (laden, front/rear)	kg	3719/336		4203/567		3711/624		4196/555		4547/553	
2.03 Axle load (unladen, front/rear)	kg	1294/1561		1293/1677		1287/1548		1286/1664		1308/1792	
Tyres											
3.01 Tyre type	Pneumatic tyre					Pneumatic tyre					
3.02 Tyre size, front	6.50-10-10PR					6.50-10-12PR					
3.03 Tyre size, rear	16×6-8-10PR					16×6-8-10PR					
3.04 Wheels, number front/rear (x/driven wheels)	2/2					2/2					
3.05 Tread, front	b10	mm	934		920		934		920		
3.06 Tread, rear	b11	mm	920		920		920		920		
Dimensions											
4.01 Mast tilt angle (forward/backward)	α/β	°	6/8		6/8		6/8		6/8		
4.02 Height (mast lowered)	h1	mm	1995		1995		1995		1995		
4.03 Free lifting height	h2	mm	155		155		155		155		
4.04 Lifting height (standard)	h3	mm	3000		3000		3000		3000		
4.05 Max. height, extended (with backrest)	h4	mm	4014		4014		4014		4014		
4.06 Height of overhead guard	h6	mm	2130		2130		2130		2130		
4.07 Seat height relating to SIP (to ground)	h7	mm	1125		1125		1125		1125		
4.08 Towing coupling height	h10	mm	250		250		250		250		
4.09 Overall length (with fork)	l1	mm	3120		3120		3120		3125		
4.10 Overall length (without fork)	l2	mm	2200		2200		2200		2205		
4.11 Overall width	d1	mm	1120		1120		1120		1120		
4.12 Fork size/thickness x width x length	s/φ/l	mm	2A 35×100×920		2A 35×100×920		2A 35×100×920		2A 35×100×920		
4.13 Fork carriage, according to ISO2328	s/φ	mm	960/200		960/200		960/200		960/200		
4.14 Distance across fork-arms, Max./Min.	m1	mm	100		100		100		100		
4.15 Ground clearance (at mast)	m2	mm	95		95		95		95		
4.16 Ground clearance (center of wheelbase)	m2	mm	95		95		95		95		
4.17 Right angle stacking side with forklift 1200x1200mm crossways	Ast	mm	3575		3575		3575		3580		
4.18 Right angle stacking side with forklift 800x1200mm lengthways	Ast	mm	3770		3770		3770		3775		
4.19 Min. outside turning radius	Wa	mm	1920		1920		1920		1920		
Performance data											
5.01 Travel speed (laden/unladen)	km/h	14.5/15		12/13		12/13		12/13		12/13	
5.02 Lift speed (laden/unladen)	m/s	0.320/0.440		0.290/0.400		0.290/0.400		0.270/0.400		0.260/0.400	
5.03 Lowering speed (laden/unladen)	m/s	0.400/0.400		0.400/0.400		0.400/0.400		0.400/0.400		0.400/0.400	
5.04 Max.drawbar pull (laden)	N	10200/9700		10200/9700		10200/9700		10200/9800		10100/10700	
5.05 Max.gradeability (laden/unladen)	%	17/27		15/26		15/23		15/22		15/25	
5.06 Acceleration time(10 m)(laden/unladen)	s	5.5/5.2		5.6/5.3		6.0/5.7		6.1/5.8		5.6/5.2	
Battery											
6.01 Battery voltage/Capacity	V/Ah	80/150		80/125		80/125		80/150		80/150	
6.02 Battery weight	kg	180		163		163		180		180	
Motor and controller											
7.01 Driving motor powering (52-60min)	kW	8		8		8		8		8	
7.02 Lifting motor powering (53-15%)	kW	10.6		10.6		10.6		10.6		10.6	
7.03 Driving motor controlling mode	MOSFET/AC										
7.04 Lifting motor controlling mode	MOSFET/AC										
Addition data											
8.01 Service brake/Parking brake	Hydraulic/Mechanical					Hydraulic/Mechanical					
8.02 Operating pressure for attachments	Mpa	16					16				

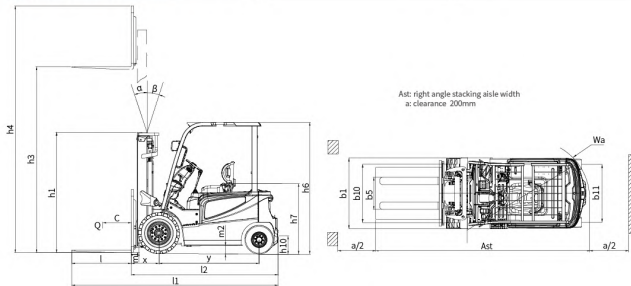

Manufacturer and Technical Data(Tabulation 2)											
Characteristics											
1.01	Manufacturer										
1.02	Model		CPD20	CPD25	CPD20	CPD25	CPD30	CPD35	CPD30	CPD35	
1.03	Configuration number	Q	A3LIH4-M		A7LIH4-S		A3LIH4-M		A7LIH4-S	A7LIH4-S	
1.04	Rated capacity	Q	2000	2500	2000	2500	3000	3500	3000	3500	
1.05	Load center distance	c	mm				500		500		
1.06	Power mode		Lithium battery								
1.07	Driving mode		Seated								
1.08	Front overhang	x	mm		460		477	482	477	482	
1.09	Wheelbase	y	mm		1660		1750		1750	1780	
Weight											
2.01	Total weight (with/without battery)	kg	3585/3395	3925/3735	3540/3375	3880/3715	4550/4310	4860/4620	4500/4290	5240/5000	
2.02	Axle load (laden,front/rear)	kg	4970/615	5700/655	4940/600	5760/620	6750/800	7630/730	6710/790	8150/8000	
2.03	Axle load (unladen, front/rear)	kg	1750/1835	1780/1845	1720/1800	1750/1810	2050/2080	2110/2150	2000/2080	2090/2140	
Tyres											
3.01	Tyre type		Pneumatic tyre				Front Pneumatic tyre/Rear Solid tyre				
3.02	Tyre size, front		7.00-12-14PR				26×9-15-14PR				
3.03	Tyre size, rear		18×7-8-14PR				18×7-8				
3.04	Wheels, number front/rear (x/driven wheels)		2/2				2/2				
3.05	Tread, front	b10	mm	970				1000			
3.06	Tread, rear	b11	mm	960				970			
Dimensions											
4.01	Mast tilt angle (forward/backward)	α/β	6/10				6/10				
4.02	Height (mast lowered)	h1	2000				2070				
4.03	Free lifting height	h2	165				155				
4.04	Lifting height (standard)	h3	3000				3000				
4.05	Max. height, extended (with backrest)	h4	4200				4217				
4.06	Height of overhead guard	h6	2170				2180				
4.07	Seat height relating to SIP (to ground)	h7	1154				1164				
4.08	Towing coupling height	h10	300				310				
4.09	Overall length (with fork)	l1	mm	3354	3504	3354	3504	3637	3642	3642	
4.10	Overall length (without fork)	l2	mm			2434		2567	2572	2612	
4.11	Overall width	d1	mm	1180				1260			
4.12	Fork size/thickness x width x length	s/φ/l	3A 40×122×920				3A 40×122×900				
4.13	Fork carriage, according to ISO2328	s/φ	1080/250				1080/250				
4.14	Distance across fork-arms, Max./Min.	m1	100				100				
4.15	Ground clearance (at mast)	m2	125				125				
4.16	Ground clearance (center of wheelbase)	m2	125				135				
4.17	Right angle stacking side width for pallet 1200x1200mm crossways	Ast	3753				3912				
4.18	Right angle stacking side width for pallet 800x1200mm lengthways	Ast	3953				4115				
4.19	Min. outside turning radius	Wa	2140				2235				
Performance data											
5.01	Travel speed (laden/unladen)	km/h	14.5/15				12/13				
5.02	Lift speed (laden/unladen)	m/s	0.320/0.440				0.290/0.400				
5.03	Lowering speed (laden/unladen)	m/s	0.360/0.460				0.400/0.400				
5.04	Max.drawbar pull (laden)	N	13000/13000				14000/13000				
5.05	Max.gradeability (laden/unladen)	%	17/28				15/23				
5.06	Acceleration time 0-10km/h (laden/unladen)	s	5.9/5.5				6.2/5.3				
Battery											
6.01	Battery voltage/Capacity	V/kWh	80/202				80/250				
6.02	Battery weight	kg	165				240				
Motor and controller											
7.01	Driving motor power rating (52-60min)	kW	12				15				
7.02	Lifting motor power rating (33-15%)	kW	12				16				
7.03	Driving motor controlling mode		MOSFET/AC				MOSFET/AC				
7.04	Lifting motor controlling mode		MOSFET/AC				MOSFET/AC				
Additional data											
8.01	Service brake/Parking brake						Hydraulic/Mechanical				
8.02	Operating pressure for attachments	Mpa	16				16				


Lithium battery		HELI												CATL											
Battery brand		HELI												CATL											
Voltage/Capacity		8V/125Ah	8V/135Ah	8V/150Ah	8V/170Ah	8V/180Ah	8V/200Ah	8V/210Ah	8V/220Ah	8V/230Ah	8V/240Ah	8V/250Ah	8V/260Ah	12V/15Ah	12V/18Ah	12V/20Ah	12V/22Ah	12V/24Ah	12V/26Ah	12V/28Ah	12V/30Ah	12V/32Ah	12V/34Ah	12V/36Ah	
1.5-1.8t S		●	○	○	○	○	○	—	—	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
1.5-1.8t M		—	●	○	○	○	○	—	—	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
2t/2.0t S		—	○	○	○	○	○	—	—	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
2.2-2.5t S		—	●	○	○	○	○	—	—	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
2.2-2.5t M		—	—	●	○	○	○	—	—	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
3.3-3.5t S		—	—	—	●	○	○	—	—	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
3.3-3.5t M		—	—	—	—	○	○	—	—	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
3.8t S		—	—	—	●	○	○	—	—	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
Heats at low Temperature										●															

Note: ● standard; ○ optional; — non-configurable.

Charger		DB0V100AL1-438	
Model		Three-phase four-wiring type	
Wiring type		10	
Air switch model of Upper level power	KVA	32	
Input voltage range	Vac	380±15%	
Input current	A	<20A	
Output current	A	5-100	
Protection level		For indoor use	
Working ambient temperature	°C	-20~+45	
Plugs and sockets		REMA320	

Full charging time=required charging capacity/charging current×0.2h
For example: the battery capacity is 80V/250Ah, and the discharging state is alarmed by instrument, the charger is 100A, thus the full charging time is 250×0.9/100×0.2=2.45h

Lithium Battery Advantages

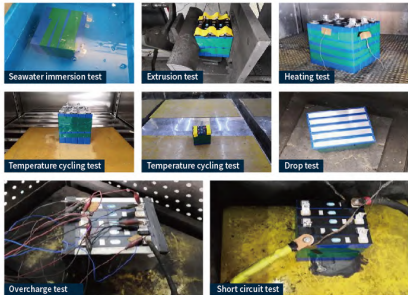

- The truck selects mature and economical square iron phosphate lithium battery core and module used by large numbers of commercial vehicles;
- The module adopts aluminum alloy plate frame, which is firm, light in weight and has good heat dissipation effect;
- Fast charging: fast charging makes truck gapless operation possible, and it can be filled in 2 hours;
- High efficiency and safety: The charging and discharging efficiency is up to 98%, and temperature of thermal runaway is over 600 °C;
- Low temperature adaptability: Standard configuration of heating function ensures normal operation of low temperature environment;
- Long service life: the normal charging and discharging cycles is more than 3000 times or 5 years, and capacity retention rate is more than 75%;
- Maintenance free: the battery does not need manual maintenance and does not need to add distilled water electrolyte;
- Green and clean: no pollution and zero emission.

HELI smart fleet management system (domestic basic edition)

Vehicle positioning	Statistical form
Remote diagnosis	Vehicle management
Remote monitoring	Identification recognition (optional)
Maintenance reminder	Weight management (optional)
Battery management	Collision management (optional)



1.5t/1.8t/2t(E) Mast parameters													
Mast type	Mast model	Load capacity (load center 500mm)(kg)			Height (mast lowered)(mm)			Free lift (with backrest)(mm)			Service weight (kg)		
		Max lifting height (mm)	1.5t	1.8t	2t(E)	1.5-1.8t	2t(E)	1.5-1.8t	2t(E)	1.5-S	1.5-M	1.8-S	1.8-M
2-stage standard mast	M200	2000	1500	1800	2000	1485	1485	155	155	2771	2791	2886	2905
	M250	2500	1500	1800	2000	1745	1745	155	155	2803	2823	2918	2938
	M300	3000	1500	1800	2000	1995	1995	155	155	2835	2855	2950	2970
	M350	3500	1500	1800	2000	2145	2145	155	155	2854	2874	2969	2989
	M400	4000	1500	1800	2000	2345	2345	155	155	2867	2887	2982	3002
	M425	4250	1500	1800	2000	2445	2445	155	155	2880	2900	2995	3015
	M450	4500	1500	1800	2000	2545	2545	155	155	2928	2948	3043	3063
	M500	5000	1500	1800	2000	2670	2670	155	155	2945	2965	3060	3080
	M550	5500	1500	1800	2000	2845	2845	155	155	2993	3013	3108	3128
	M600	6000	1500	1800	2000	3045	3045	155	155	3095	3115	3210	3230
2-stage full free mast	M200	2000	1500	1800	2000	1485	1485	485	485	2020	2040	2035	2055
	M250	2500	1500	1800	2000	1745	1745	735	735	2052	2072	2067	2087
	M300	3000	1500	1800	2000	1995	1995	985	985	2086	2106	2101	2121
	M350	3500	1500	1800	2000	2145	2145	1135	1135	2108	2128	2123	2143
	M400	4000	1500	1800	2000	2345	2345	1335	1335	2135	2155	2150	2170
	M425	4250	1500	1800	2000	2445	2445	1535	1535	2163	2183	2178	2198
	M450	4500	1500	1800	2000	2545	2545	1735	1735	2191	2211	2206	2226
	M500	5000	1500	1800	2000	2670	2670	1935	1935	2219	2239	2234	2254
	M550	5500	1500	1800	2000	2845	2845	2135	2135	2247	2267	2262	2282
	M600	6000	1500	1800	2000	3045	3045	2335	2335	2275	2295	2290	2310
3-stage full free mast	M200	2000	1500	1800	2000	1485	1485	785	785	2054	2074	2069	2089
	M250	2500	1500	1800	2000	1745	1745	1035	1035	2086	2106	2101	2121
	M300	3000	1500	1800	2000	1995	1995	1285	1285	2118	2138	2133	2153
	M350	3500	1500	1800	2000	2145	2145	1535	1535	2150	2170	2165	2185
	M400	4000	1500	1800	2000	2345	2345	1785	1785	2182	2202	2197	2217
	M425	4250	1500	1800	2000	2445	2445	1985	1985	2214	2234	2229	2249
	M450	4500	1500	1800	2000	2545	2545	2185	2185	2246	2266	2261	2281
	M500	5000	1500	1800	2000	2670	2670	2385	2385	2278	2298	2293	2313
	M550	5500	1500	1800	2000	2845	2845	2585	2585	2310	2330	2325	2345
	M600	6000	1500	1800	2000	3045	3045	2785	2785	2342	2362	2357	2377

Note: *Indicates the rated load capacity of the front wheel with twin tyres; 2t (E) indicates that the truck type is CP200-ATX1LH-4; when the front wheels of 1.5-1.8t are twin tyres (pneumatic tyres) and twin tyres (solid tyres), the service weight is increased by 15kg and 155kg respectively according to the table data.
2-stage full free mast: 1.5-2t(E): When there is no backrest, the free lifting height increases by 37mm.
3-stage full free mast: 1.5-2t(E): When there is no backrest, the free lifting height increases by 48mm.

2t/2.5t Mast parameters														
Mast type	Mast model	Load capacity (load center 500mm)(kg)			Height (mm)			Free lift(mm) (wall back)			Service weight (kg)			Mast tilt angle
		Max lifting height (mm)	2t	2.5t	2.2-2.5t	2.2-2.5t	2.2-2.5t	2t	2.5t	2.2-2.5t	2t	2.5t	2.2-2.5t	
2-stage standard mast	M200	2000	2000	2500	1500	150	3460	3505	3800	3845	6/10	6/10		
	M250	2500	2000	2500	1750	150	3508	3553	3848	3893	6/10	6/10		
	M300	3000	2000	2500	2000	150	3540	3585	3880	3925	6/10	6/10		
	M350	3500	2000	2500	2250	150	3580	3625	3920	3965	6/10	6/10		
	M400	4000	2000	2500	2500	150	3599	3644	3939	3984	6/10	6/10		
	M425	4250	2000	2500	2750	150	3615	3660	3955	4000	6/10	6/10		
	M450	4500	2000	2500	3000	150	3687	3732	4027	4072	6/10	6/10		
	M500	5000	2000	2500	3250	150	3777	3822	4117	4162	6/10	6/10		
	M550	5500	2000	2500	3500	150	3868	3913	4208	4253	6/10	6/10		
	M600	6000	2000	2500	3750	150	3913	3958	4253	4298	6/10	6/10		
2-stage full free mast	M200	2000	2000	2500	1500	496	3727	3772	4067	4112	6/10	6/10		
	M250	2500	2000	2500	1750	746	3793	3838	4133	4178	6/10	6/10		
	M300	3000	2000	2500	2000	996	3860	3905	4200	4245	6/10	6/10		
	M350	3500	2000	2500	2250	1146	3900	3945	4240	4285	6/10	6/10		
	M400	4000	2000	2500	2500	1246	3927	3972	4267	4312	6/10	6/10		
	M425	4250	2000	2500	2750	1346	3953	3998	4293	4338	6/10	6/10		
	M450	4500	2000	2500	3000	1546	4044	4089	4384	4429	6/10	6/10		
	M500	5000	2000	2500	3250	1646	4077	4122	4417	4462	6/10	6/10		
	M550	5500	2000	2500	3500	1746	4117	4162	4457	4502	6/10	6/10		
	M600	6000	2000	2500	3750	1846	4177	4222	4517	4562	6/10	6/10		
3-stage full free mast	M200	2000	2000	2500	1500	796	3945	3990	4285	4330	6/10	6/10		
	M250	2500	2000	2500	1750	946	3978	4023	4318	4363	6/10	6/10		
	M300	3000	2000	2500	2000	1046	4012	4057	4352	4397	6/10	6/10		
	M350	3500	2000	2500	2250	1196	4025	4070	4385	4430	6/10	6/10		
	M400	4000	2000	2500	2500	1296	4042	4087	4392	4437	6/10	6/10		
	M425	4250	2000	2500	2750	1396	4075	4120	4425	4470	6/10	6/10		
	M450	4500	2000	2500	3000	1496	4052	4097	4390	4435	6/10	6/10		
	M500	5000	2000	2500	3250	1596	4078	4123	4418	4463	6/10	6/10		
	M550	5500	2000	2500	3500	1696	4112	4157	4452	4497	6/10	6/10		
	M600	6000	2000	2500	3750	1796	4209	4254	4549	4594	6/10	6/10		

Note: *Indicates the rated load capacity of the front wheel with twin tyres; when the front wheels of 2.2-2.5t are twin tyres (pneumatic tyres) and twin tyres (solid tyres), the service weight is increased by 15kg and 155kg respectively according to the table data.
2-stage full free mast: 2.2-2.5t: When there is no backrest, the free lifting height increases by 37mm.
3-stage full free mast:

3t/3.5t/3.8t Mast parameters																		
Mast type	Mast model	Max lifting height (mm)	Load capacity (load center 500mm)(kg)				Height (mast lowered)(mm)				Free lift (with backrest)(mm)				Service weight (kg)	Max lift angle(°)		
			3t	3.5t	3.8t	3t	3.5t	3.8t	3t	3.5t	3.8t	3t	3.5t	3.8t				
3t	M300	2000	3000	3500	3800	1570	1620	1680	155	160	160	4404	4454	4704	4754	5134	6/10	
	M350	2500	3000	3500	3800	1820	1870	1930	155	160	160	4452	4502	4757	4807	5187	6/10	
	M390	3000	3000	3500	3800	2070	2120	2180	155	160	160	4500	4550	4810	4860	5240	6/10	
	M430	3500	3000	3500	3800	2320	2370	2430	155	160	160	4529	4579	4842	4892	5272	6/10	
	M350	3500	3000	3500	3800	2320	2370	2430	155	160	160	4548	4598	4863	4913	5293	6/10	
	M470	3700	3000	3300	3800	2420	2470	2530	155	160	160	4567	4617	4884	4934	5314	6/6	
	M400	4000	2850	3150	3700	2620	2670	2730	155	160	160	4647	4697	4968	5018	5398	6/6	
	M425	4250	2750	3050	3600	2745	2795	2855	155	160	160	4671	4721	4994	5044	5424	6/6	
	M450	4500	2650	2950	3500	2870	2920	2980	155	160	160	4695	4745	5021	5071	5451	6/6	
	M500	5000	2550	2850	3400	3120	3170	3230	155	160	160	4743	4793	5074	5124	5504	6/6	
3.5t standard Mast	M350	5500	3000	3500	3800	3420	3470	3530	155	160	160	4841	4891	5178	5228	5608	6/6	
	M600	6000	2900	3200	3700	3670	3720	3780	155	160	160	4889	4939	5231	5281	5661	6/6	
	ZM300	2000	3000	3500	3800	1570	1620	1680	340	442	503	4422	4482	4728	4778	5158	6/10	
	ZM250	2500	3000	3500	3800	1820	1870	1930	590	693	753	4482	4532	4781	4831	5211	6/10	
	ZM390	3000	3000	3500	3800	2070	2120	2180	840	943	1003	4532	4582	4835	4885	5265	6/10	
	ZM330	3300	3000	3500	3800	2220	2270	2330	990	1093	1153	4564	4614	4868	4918	5298	6/10	
	ZM350	3500	3000	3500	3800	2320	2370	2430	1090	1193	1253	4584	4634	4889	4939	5319	6/10	
	ZM370	3700	3000	3200	3800	2420	2470	2530	1190	1293	1353	4604	4654	4910	4960	5340	6/6	
	ZM400	4000	2850	3200	3700	2620	2670	2730	1390	1493	1553	4682	4732	4990	5040	5420	6/6	
	ZM425	4250	2750	3050	3600	—	2745	2795	2855	1515	1618	—	4708	4758	5017	5067	—	6/6
3.8t	ZM450	4500	2650	2950	3500	—	2870	2920	2980	1640	1743	—	4736	4786	5046	5096	—	6/6
	ZM500	5000	2550	2850	3400	—	3120	3170	3230	1800	1903	—	4790	4840	5102	5152	—	6/6
	ZM550	5500	3000	3500	3800	—	3420	3470	3530	2190	2293	—	4889	4939	5205	5255	—	6/6
	ZM600	6000	2900	3200	3700	—	3670	3720	3780	2440	2543	—	4942	4992	5261	5311	—	6/6
	ZSM300	2000	2900	3250	3800	1870	1870	1920	640	640	693	4643	4693	4911	4911	5354	6/6	
	ZSM400	4000	2750	3100	3700	2020	2020	2055	790	790	843	4684	4734	4962	5012	5395	6/6	
	ZSM435	4350	2650	2950	3500	2120	2120	2160	890	890	943	4713	4763	4991	5041	5424	6/6	
	ZSM450	4500	2550	2850	3400	2170	2170	2210	940	940	993	4738	4788	5016	5066	5449	6/6	
	ZSM470	4700	2450	2750	3300	2230	2230	2295	1000	1000	1053	4746	4796	5024	5074	5457	6/6	
	ZSM480	4800	2350	2650	3200	2270	2270	2330	1040	1040	1093	4756	4806	5034	5084	5447	6/6	
4t	ZSM500	5000	2250	2550	3100	2370	2370	2430	1140	1140	1193	4763	4813	5041	5091	5474	6/6	
	ZSM540	5400	2150	2450	3000	2470	2470	2535	1240	1240	1293	4813	4863	5091	5141	5524	6/6	
	ZSM600	6000	2050	2350	2900	2670	2670	2730	1440	1440	1493	4917	4967	5193	5243	5626	6/6	
	ZSM650	6500	1950	2250	2800	—	2870	2870	—	1640	1640	—	4971	5022	5250	5300	—	6/6
	ZSM700	7000	*1800	*2000	—	—	3045	3045	—	1815	1815	—	5022	5072	5300	5350	—	6/6

Note: * Indicates the rated load capacity of the front wheel with twin tyres. When the front wheels of 3.5t are twin tyres (pneumatic tyres) and twin tyres (solid tyres), the service weight is increased by 140kg and 208kg respectively according to the table data. When the front wheels of 3.8t are twin tyres (pneumatic tyres) and twin tyres (solid tyres), the service weight is increased by 158kg and 221kg respectively according to the table data.
 2 stage full free mast: When there is no backrest, the free lifting height increases by 477mm; 3.5-3.8t: When there is no backrest, the free lifting height increases by 477mm.
 3 stage full free mast: When there is no backrest, the free lifting height increases by 477mm; 3.5-3.8t: When there is no backrest, the free lifting height increases by 477mm.

Optional item

Optional item	S
Model	S
Pneumatic tyre*	●
Solid tyre	○
Single tyre (front wheel)	●
Twin tyre (front wheel)**	○
Two piece valve	●
Three or four piece valve	○
Basic type: 3M lifting height mast	●
Other type and other height series mast***	○
Standard series fork	●
Non standard series forks and attachments	○
Standard exterior color (blue grey + Hell red)	●
Other exterior colors (customized)	○
Turning speed limit	○
Reversing armrest with horn switch	○
Overspeed 5km / h alarm	○
Overspeed 8km / h alarm	○
Overspeed 10km / h alarm	○
Traveling + lifting + tilting + equipped with OPS function (without lowering)	●
Full set of OPS functions	○
Seat belt switch	○
Multi way valve overload	●
Dry powder fire extinguisher (0.5kg)	○
Dry powder fire extinguisher (2kg)	○
Carbon dioxide fire extinguisher (2kg)	○
Reversing buzzer	●
Reversing Chinese speaker	○
No universal key	●
With universal key	○
Electronic lifting upper buffer	○
Central wide-angle rearview mirror	●
Both side rear-view mirrors + center wide-angle rear-view mirror	○
Reversing radar (4 probes)	○
Reversing Image (1 Camera + 4 radar probes)	○
Semi enclosed seat	●
Fully suspended seat	○
Instrument panel with 1 USB interface (5V / 1A)	○
Steering wheel starts steering	○
Synchronous steering	○
Steering wheel with handle ball	●
Steering wheel without handle ball	○
Electric fan	○
panel mounted cab (including fan + wiper)	○
Heater	○
Single cooling air conditioner	○
Single cooling air conditioner + heater	○
Front windshield (including wiper)	○
Rear windshield	○
Top windshield (excluding fan)	○
50mm increased of overhead guard height	○
50mm reduced of overhead guard height	○
Overhead guard (with protective net)	○
LED rear work light (1)	○
Rear LED red / Blue spotlight (1)	○
Rear and lateral red / blue bar lights	○
Fixed LED flashing warning light	○
Fixed LED rotary warning lamp	○
Fixed LED rotary buzzer warning light	○
Metric thread	●
Tilt cylinder jacket	○
Steering cylinder jacket	○
REMA 320V charging port	●
Onboard charger	○
FICS standard type (for China)	○

Note:

●: Standard ; ○: Optional ;

Some non-standard options need to be customized. Please consult local sales personnel or product development technicians before purchasing.

*5.8t rear wheel is equipped with solid tyre as standard.

**The small 2t truck is not equipped with twin tyres.

***There are restrictions on the type and height of small 2t and 3.8t mast. See the table of mast parameters for details.