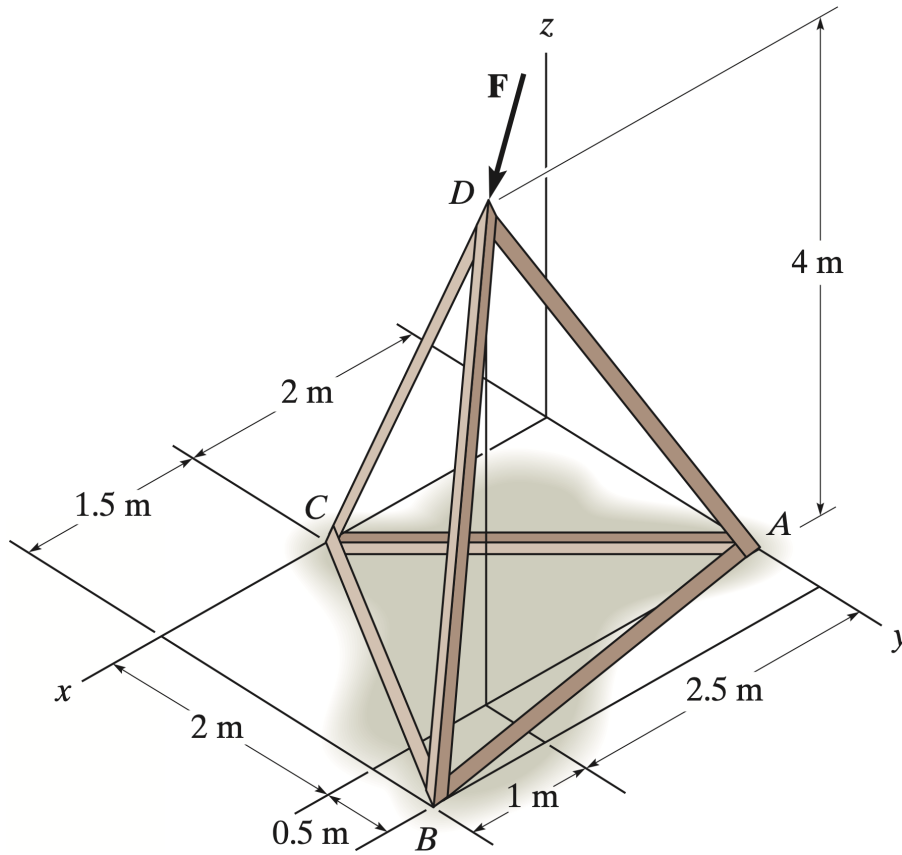


# CVE154 Exam 2, Part 3

prepared by Christian Cahig for classes of A.Y. 2024-2025 S1

2024-11-14

Referring to Figure 1, the rigid tripod assembly is subject to a force  $\mathbf{F} = 4.2\mathbf{i} + 1.7\mathbf{j} - 6.9\mathbf{k}$  N, supported by a ball-and-socket joint at  $A$  and by rollers at  $B$  and  $C$ .



**Figure 1** The tripod assembly is supported by a ball-and-socket joint and rollers. The image is a screenshot of the accompanying figure for Problem 4-61 of *Engineering Mechanics: Statics and Dynamics (14th ed.)*, the authorship and copyright of which belong to R. C. Hibbeler.

**P1 (15 pt.)** Derive a system of linear equations  $\mathbf{Ax} = \mathbf{b}$  where  $\mathbf{x}$  collects the unknown  $z$ -components of the reaction forces. Comment on the solvability of the linear system by making observations on  $\mathbf{A}$ .

Let  $\mathbf{F} = F_x\mathbf{i} + F_y\mathbf{j} + F_z\mathbf{k}$  N. Introduce  $A_z$ ,  $B_z$ , and  $C_z$  as the  $z$ -components of the reaction forces at  $A$ ,  $B$ , and  $C$ , respectively. Force balance implies

$$A_z + B_z + C_z + F_z = 0. \quad (1)$$

Moment balance about the  $x$ -axis gives

$$2A_z + 2.5B_z - 4F_y + 2F_z = 0, \quad (2)$$

and about the  $y$ -axis,

$$3.5B_z + 2C_z - 4F_x + 2.5F_z = 0. \quad (3)$$

(Note that it is possible to set up other moment balance equations, depending on where the moment axis is taken.) Therefore, with  $F_x = 4.2$ ,  $F_y = 1.7$ , and  $F_z = -6.9$ ,

$$\begin{bmatrix} 1 & 1 & 1 \\ 2 & 2.5 & 0 \\ 0 & 3.5 & 2 \end{bmatrix} \begin{bmatrix} A_z \\ B_z \\ C_z \end{bmatrix} = \begin{bmatrix} F_z \\ 4F_y - 2F_z \\ 4F_x - 2.5F_z \end{bmatrix} = \begin{bmatrix} -6.9 \\ 20.6 \\ 34.05 \end{bmatrix}. \quad (4)$$

The coefficient matrix has a determinant of 8 and is nonsingular. Hence, Equation (4) is solvable; specifically yielding

$$A_z = -11.090625 \text{ N}, \quad B_z = 17.1125 \text{ N}, \quad \text{and} \quad C_z = -12.921875 \text{ N}. \quad (5)$$

**P2 (10 pt.)** Solve for  $\mathbf{x}$  via Gaussian elimination. You may use any pivoting strategy.

The following sequence of elementary row operations,

$$R_2 \leftarrow R_2 - 2R_1, \quad (6a)$$

$$R_3 \leftarrow R_3 - 7R_2, \quad (6b)$$

are sufficient to transform the augmented matrix corresponding to Equation (4) into its reduced row echelon form,

$$\begin{bmatrix} 1 & 1 & 1 & -6.9 \\ 0 & 0.5 & -2 & 34.4 \\ 0 & 0 & 16 & -206.75 \end{bmatrix}, \quad (7)$$

and thence obtain via backward substitution the values in Equation (5).

**P3 (15 pt.)** Solve for  $\mathbf{x}$  via LU decomposition. You may use any pivoting strategy.

One can infer from Equations (6) and (7) that the coefficient matrix of Equation (4) can be LU-factored as

$$\begin{bmatrix} 1 & 0 & 0 \\ 2 & 1 & 0 \\ 0 & 7 & 1 \end{bmatrix} \begin{bmatrix} 1 & 1 & 1 \\ 0 & 0.5 & -2 \\ 0 & 0 & 16 \end{bmatrix}. \quad (8)$$

Successive forward and backward substitutions lead to the values in Equation (5).