

*BUILDING
SERVICES*

*ELECTRICAL
SERVICES*

CIVILPracto

ELECTRICAL INSTALLATIONS IN BUILDINGS



Illumination
(Fluorescent,
Incandescent lamps,
LED)



Circulation of Air
(Ceiling fans,
Exhaust fans)



Cooling of Air
(Air conditioners)




Supply of Hot Water
(Geysors)




Lifting of Water
(Pumps)

Points to be considered while planning electrical installations:

- *Electrical installations must be planned with regard to anticipated increase in the use of electricity in future.*
- *Wiring should be done by qualified electricians with care*
- *Wiring may be concealed or opened. In case of concealed wirings, junction boxes must be provided at all corners and bends.*
- *Each socket outlet should be controlled by a switch located adjacent to socket. Ordinary sockets may be placed at a convenient height of 20 cm above floor level. Socket outlets must be installed with mechanism such that they automatically get screened when plug is withdrawn from socket.*

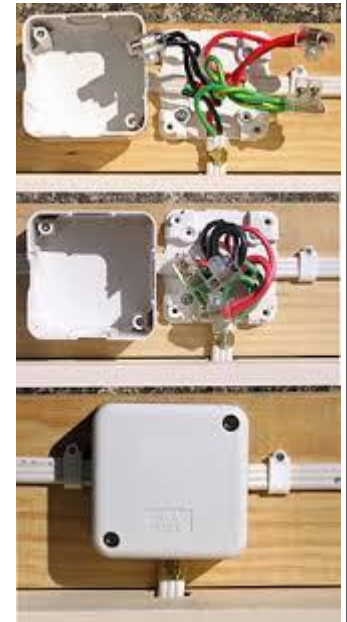

- *In case of earthed system of supply, three pin socket outlets must be provided, The third terminal should be connected to the earth point.*
- *All switchboards must be located at spaces where there is no possibility of danger due to injury by sudden hitting. Switchboards should also not be provided near wash basins, showers, sinks etc.*
- *No flammable reflectors/shades should be provided with lighting fittings. Reflectors made with enameled iron sheet or China clay are used.*

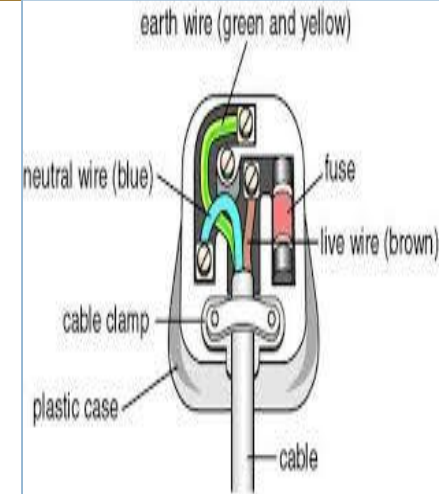

- Number of outlets required as per national building code:

Location	No. of Socket outlets required	
	5 Amperes	15 Amperes
Bed	2 to 3	1
Living room	2 to 3	2
Kitchen	1	2
Dining room	2	1
Garage	1	1
For refrigerator	—	1
For air conditioner	—	1 (one for each)
Verandah	1 per 10 sqm	1
Bath room	1	1

- External lamps must be weather proof and resistant to ingress of moisture and dust.

- *For better illumination, fluorescent lamps are used as they are economical.*
- *Incandescent lamps should be preferred at places where switching off lights is required for a short duration, in dressing tables, bathroom mirrors. (fluorescent lamps give grayish tinge to complexion)*
- *Entire wiring should be free from short circuits. They should be checked for defects.*
- *Ceiling fan should have control from regulator and switch. Suspension rods must be strong enough.*
- *In case of RCC slabs, fan clamps must be buried within the casting. They should extend to atleast 20 cm on either side and should be provided with end hooks for proper grip. For wooden beams, firm iron flat clamp should be fixed to hang the ceiling fan.*




- *Ceiling fan is fixed such that its bottom most part is at a height of 2.40 m from floor level,*
- *Blades of fan should be 30 cm clear off the ceiling, for better circulation.*
- *Electrical appliances and other control panels must not be locate din wet areas. Naked wires should be inserted inside the sockets.*
- *Water should not be able to extinguish electrical fire. Fire extinguishers must be used.*
- *Main switchboard must not be overcrowded and must be accessible easily.*
- *Entire electrical system must be earthed properly.*




COMPONENTS OF ELECTRICAL SERVICES

Wiring Materials:

- Main switches
- PVC wires
- Earthing wire
- Wooden switchboards
- Plugs, 5A
- Switches 5 A
- Bracket holder
- Ceiling Rose
- Clips
- Junction boxes

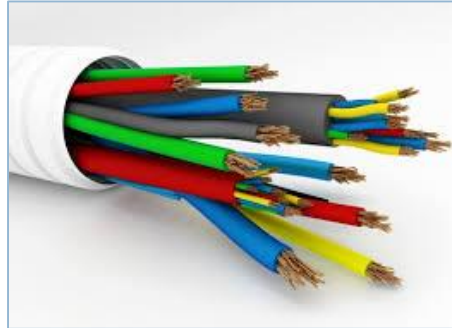

- Fuse Kit Kat 5 A

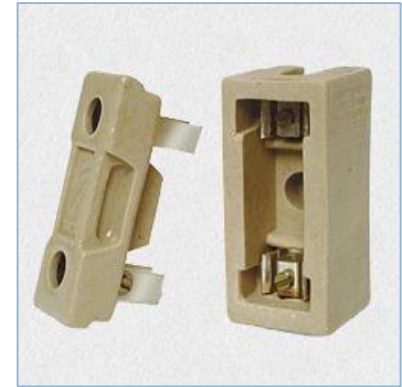


- Conduit pipes



- Screws

Electrical Fittings:

- *Bulbs 5 A of various watts*
- *Ceiling fans*
- *Wall brackets*
- *Tube light 40 W, 250 V*
- *Decorative wall and ceiling electric light fittings*
- *Night lamps*
- *Call bell*
- *Two way switch for stair light*
- *Water tight fittings for external lights*
- *Ceiling light*

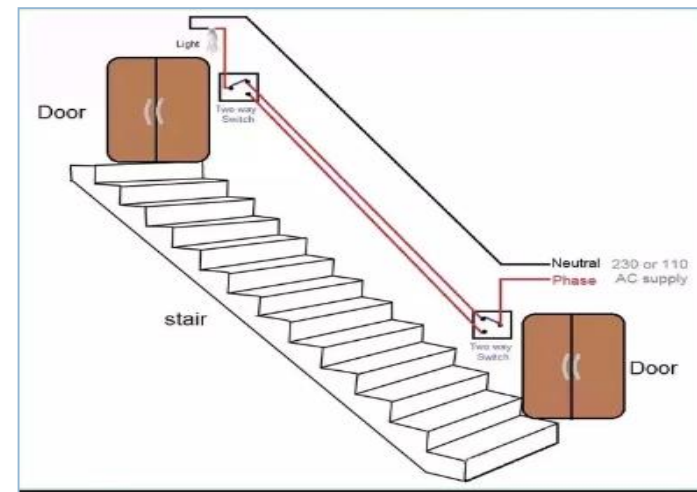

ELECTRICAL SYMBOLS






















		
General wiring	Wiring on the surface	Wiring under the surface
		
Conduit on surface	conduit concealed	Wiring going upwards
		
Wiring going downwards	Main fuse board without switches	Main fuse board with switches
		
Distribution fuse board without switches	Distribution fuse board with switches	Two way switch
		
One way switch single pole	One way switch two pole	One way switch three pole
		
Time switch	Socket outlet, 15 A	Socket outlet, 5 A
		
Combined switch and socket outlet, 5 A	Combined switch and socket outlet, 15 A	Lamp or outlet for lamp

Fig. 23.9. Symbols for electrical installations



5 Ampere socket outlet



15 Ampere socket outlet



Combined switch and socket outlet



Socket outlet 2 pin






















		
Lamp Mounted on wall	Lamp Mounted on ceiling	Single Fluorescent lamp
		
Fluorescent lamp double	Group of fluorescent lamps 3nos. 40W	Heater
		
Storage type electric water heaters	Bell	Buzzer
		
Ceiling Fan	Bracket Fan	Exhaust Fan
		
Fan regulator	Aerial	Bell connected to fire alarm switch
		
Fire alarm indicator (N- no of ways)	Earth point	Telephone point
		
Fire alarm push	Light plug	Power plug


Fig. 23.10. Symbols of electrical installations



*Lamp mounted
on wall*



*Lamp mounted
on ceiling*

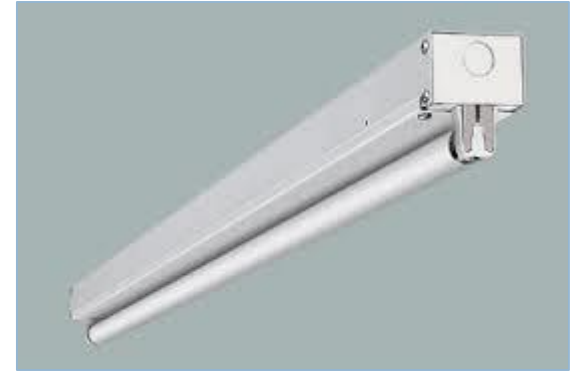


*Single
fluorescent light*



*Double fluorescent
light*



*Storage type electric
water heater*

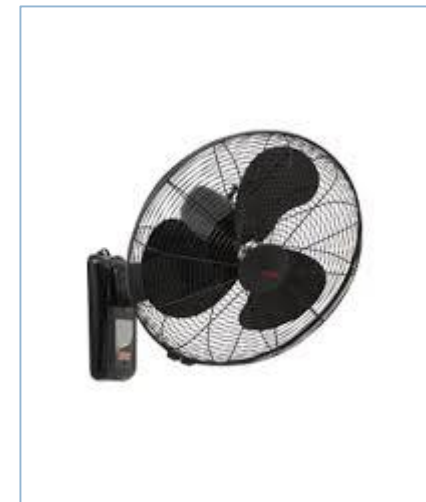

Bracket fan



Telephone point



Fire alarm push



Power plug

SANITARY ENGINEERING
















		
Meter	Single light-pendant	Light-bracket
		
One way switch	Two way switch	Three way switch
		
Pendant switch	Socket outlet 2 pin, 5 Amp	Socket outlet 3 Pin, 5 Amp.
		
Socket outlet with switch combined 2pin, 5Amp.	Socket outlet with switch combined 3pin, 5Amp	Socket outlet 2pin, 15Amp.
		
Socket outlet 3 pin, 15Amp.	Socket outlet with switch combined 2pin, 15 Amp.	Socket outlet with switch combined 3pin, 15Amp.

Fig. 23.11. Symbols of electrical installations



Meter




*Single Pendant
Light*



Light Bracket

PLAN SHOWING ELECTRICAL INSTALLATIONS

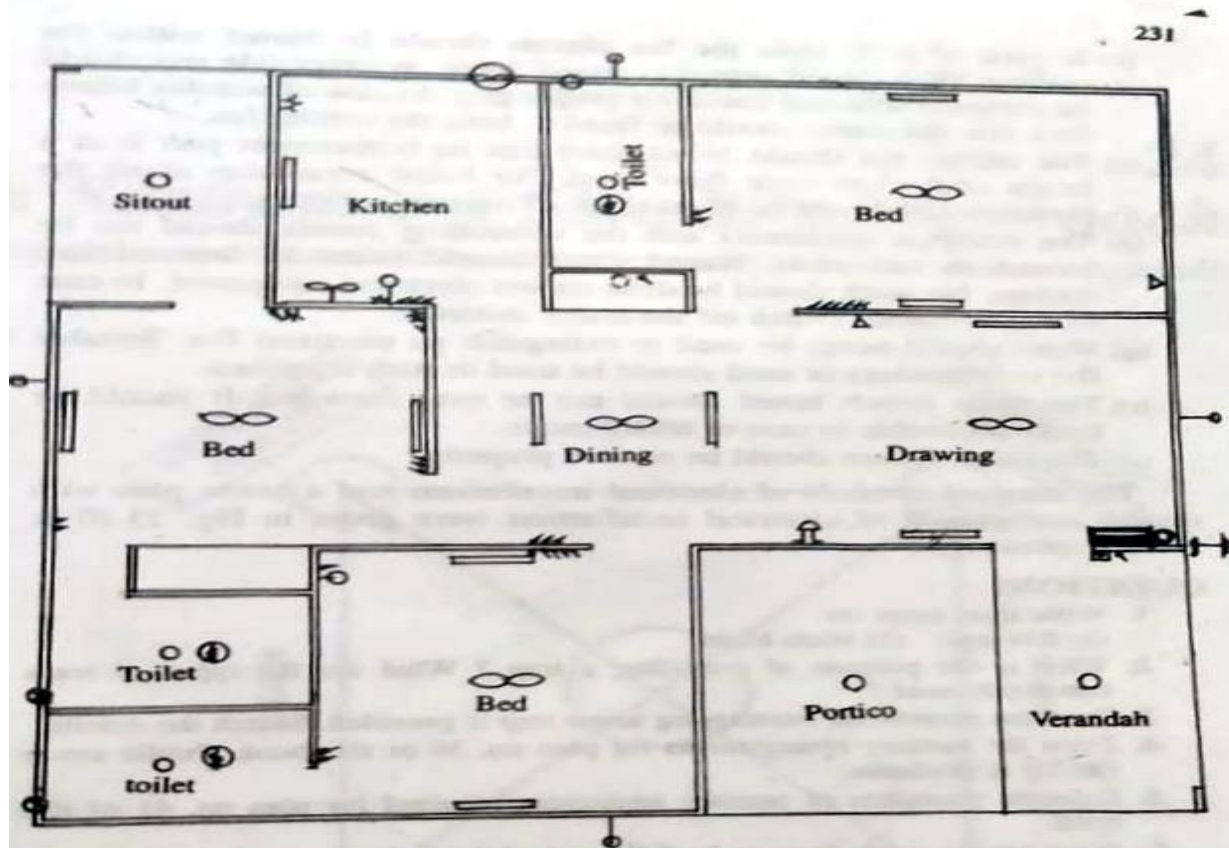


Details:


- | | |
|-----------------------------------|----------|
| 1. Fan points, ceiling (122 cm) | — 5 nos |
| 2. Flourescent light points (40W) | — 11 nos |
| 3. Incandescent lamps (60W) | — 13 nos |
| 4. Buzzer with switch | — 1 no |
| 5. Geysors | — 3 nos |
| 6. Exhaust fan | — 1 no |
| 7. Mini exhaust fans | — 3 nos |
| 8. Socket outlet (5 A) | — 9 nos |
| 9. — do — (15 A) | — 2 nos |
| 10. Bracket fan | — 1 no |
| 11. Telephone points | — 2 nos |
| 12. One way switches | — 48 nos |
| 13. Main fuse board | — 1 no |
| 14. Meter | — 1 no |
| 15. Earth point | — 1 no. |

Fig. 23.12. Sketch Showing Electrical Installations for a Building

PLAN SHOWING ELECTRICAL INSTALLATIONS

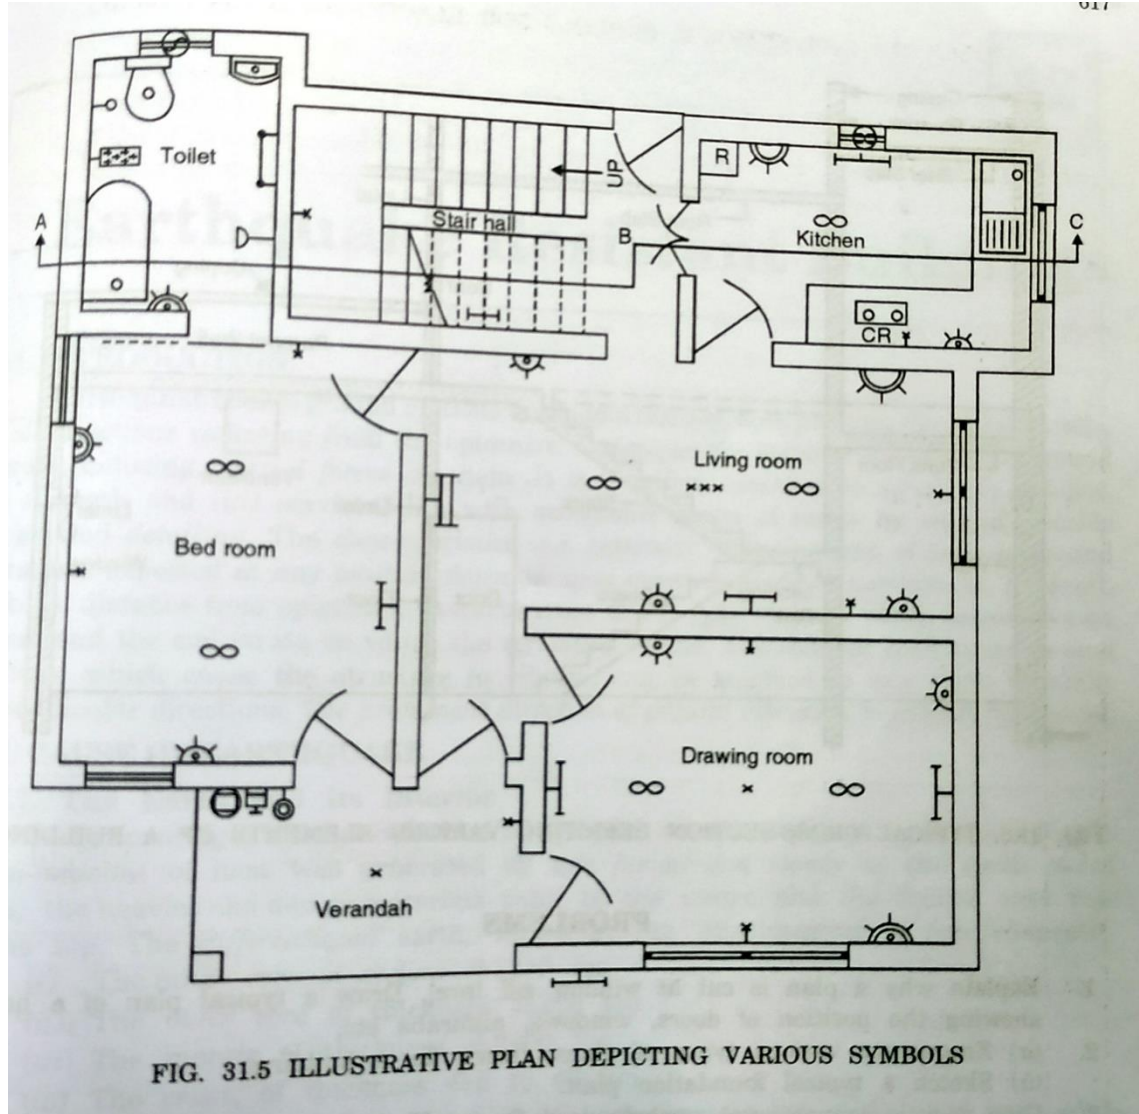

CIRCUIT DIAGRAM OF HOUSE WIRING

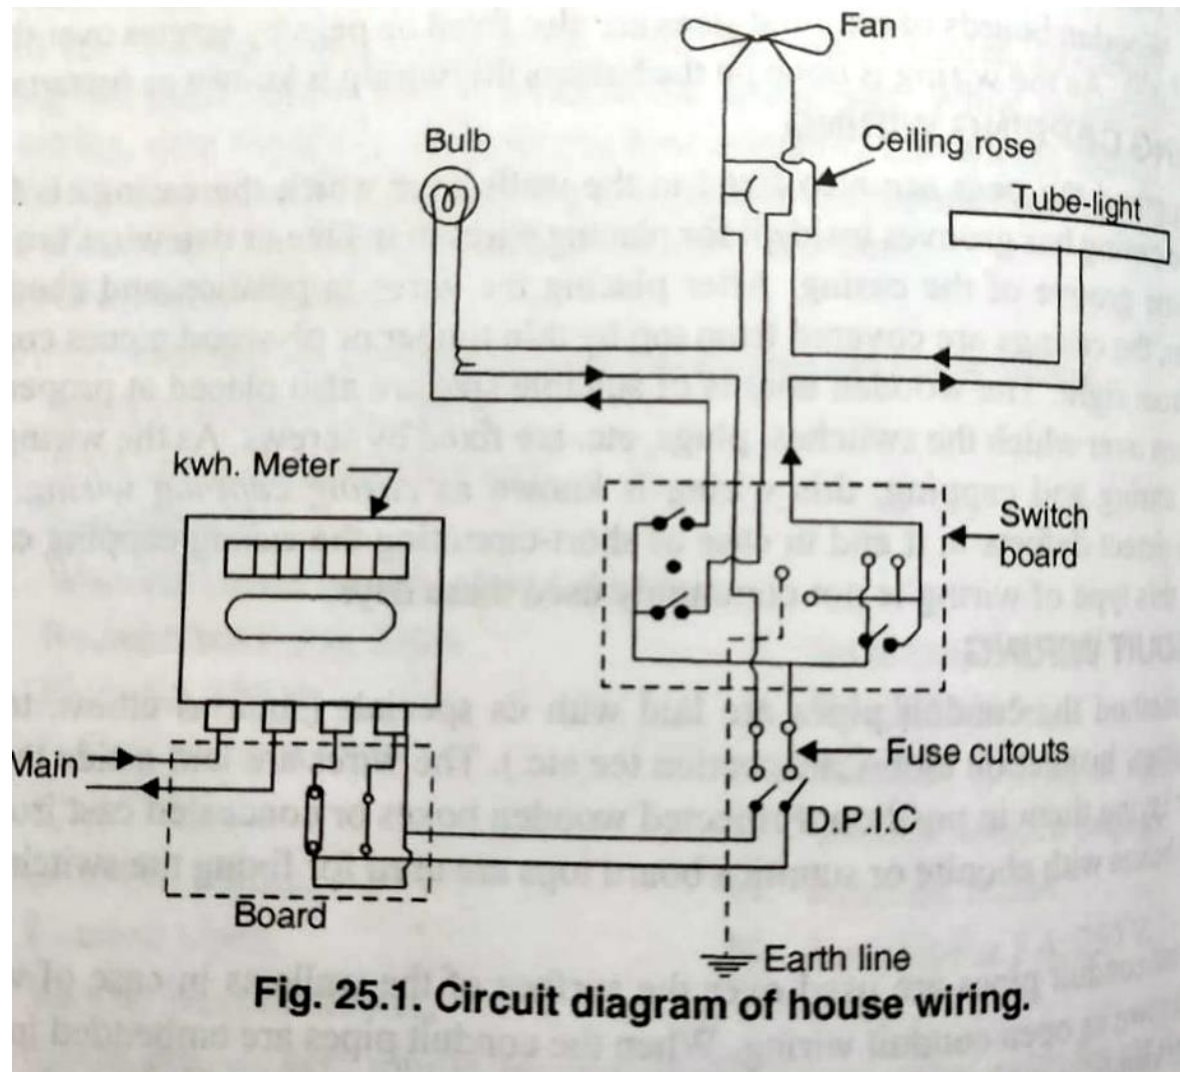

SAFETY AND PRECAUTIONS

Points to be taken care of while working and jointing electric wires and doing house wiring:

- No live naked wire should be touched.*
- If anyone comes in contact of live wire, work should not be removed by hand nor the person should be touched before switching off main supply.*
- If it is not possible to cut off supply, wire should be detached by dry timber or any other bad conductor of electricity.*
- Safety belts should be used in the poles.*
- No live electric gadget must be touched.*
- Overhead line should not be touched.*
- Line should be energied only when it is clear that no one is working over it.*

- *All electric equipments should be earthed properly.*
- *Live wires should always be connected with switches.*
- *Plugs should be removed carefully.*
- *Earthing should be embedded in moist earth below ground.*
- *No water should be thrown on wires in case of fire.*
- *Proper tools and equipments must be used.*