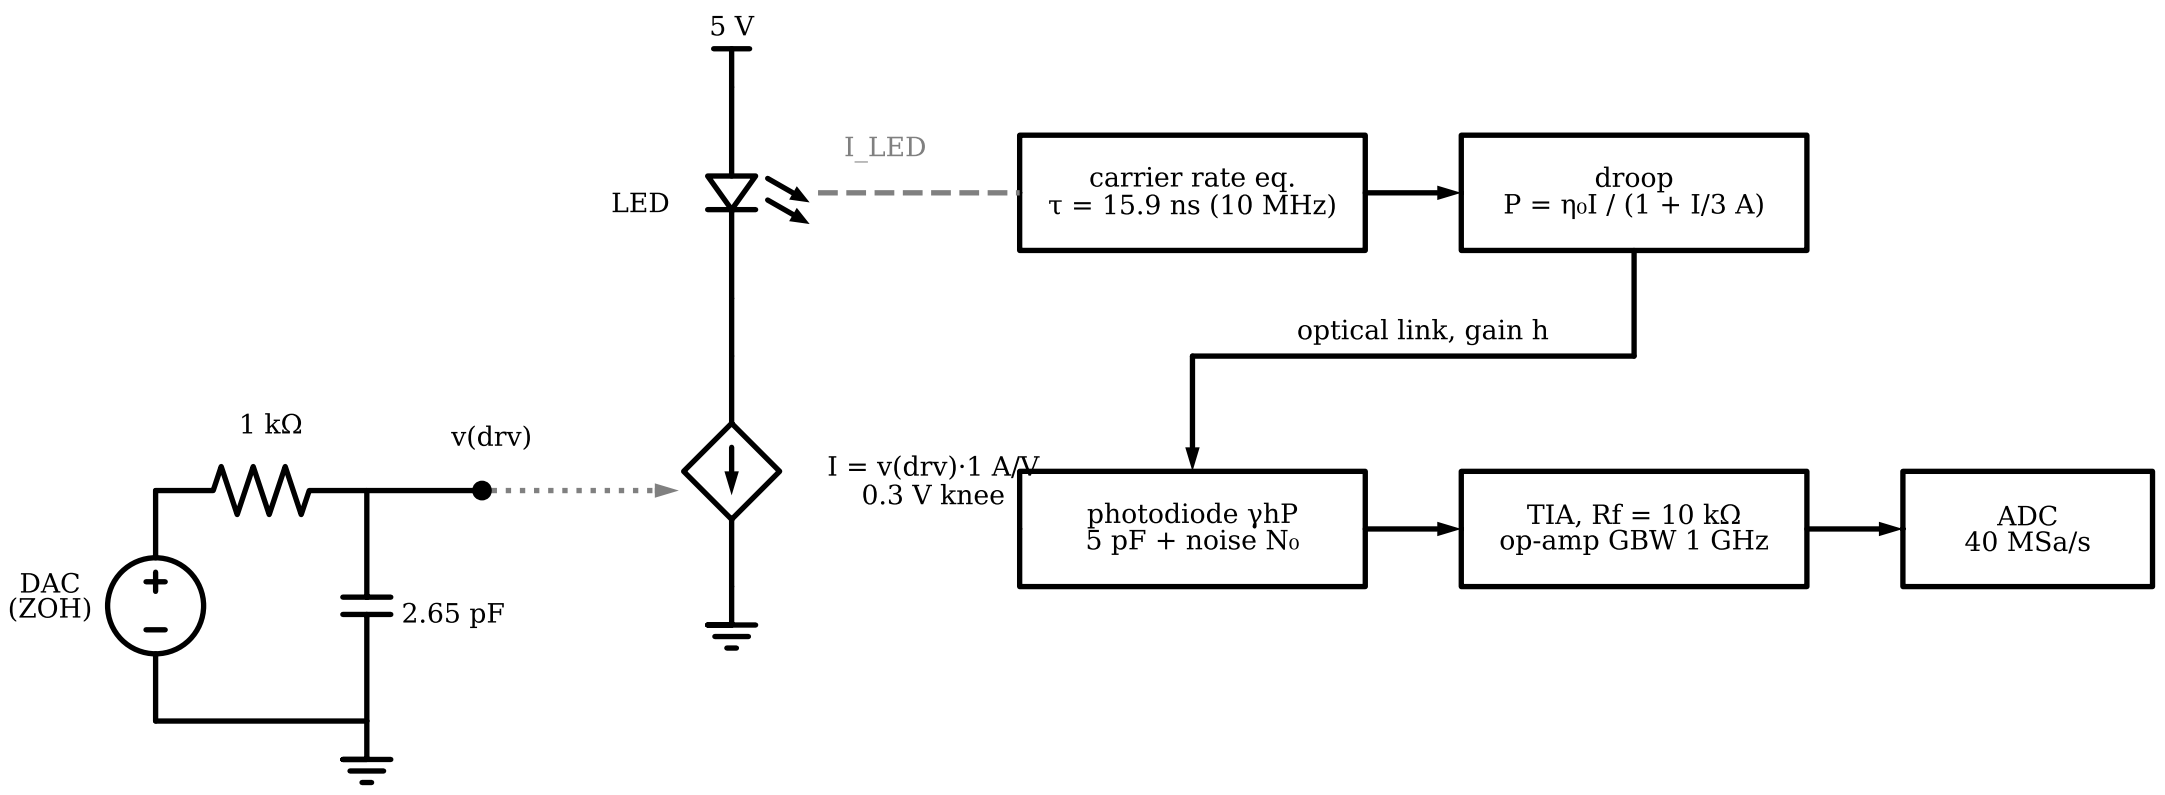
5 V
LED
I_LED
carrier rate eq.
τ = 15.9 ns (10 MHz)
droop
P = η₀I / (1 + I/3 A)
optical link, gain h
1 kΩ
v(drv)
I = v(drv)·1 A/V
0.3 V knee
DAC
(ZOH)
2.65 pF
photodiode γhP
5 pF + noise N₀
TIA, Rf = 10 kΩ
op-amp GBW 1 GHz
ADC
40 MSa/s