

USB-C, ESD protection

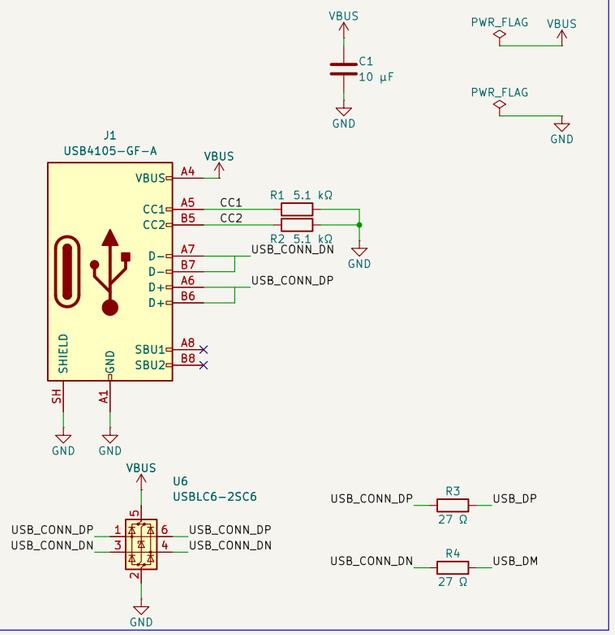


LiPo charger with power path (500 mA USB limit, 494 mA charge)

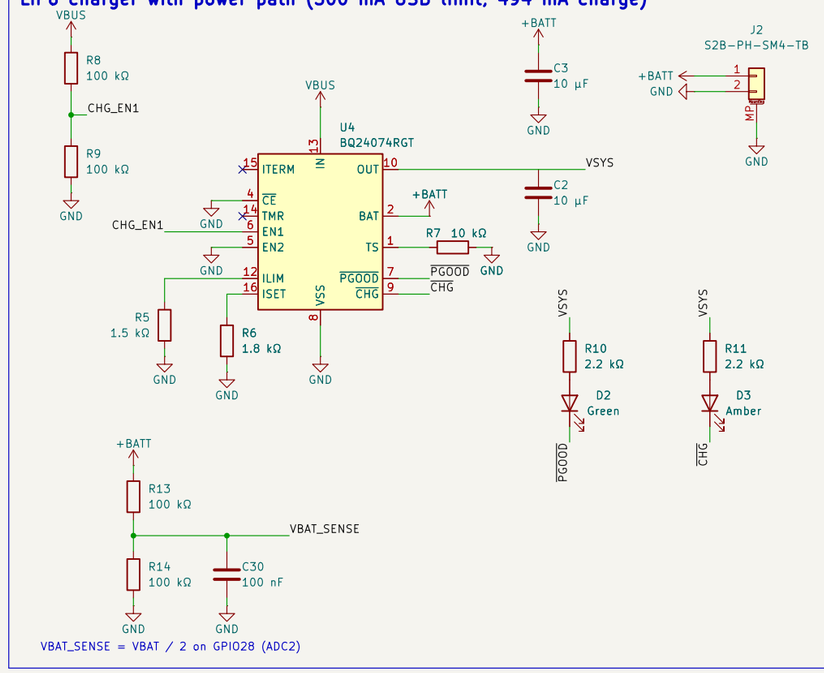


VBAT_SENSE = VBAT / 2 on GPIO28 (ADC2)

3.3 V regulator

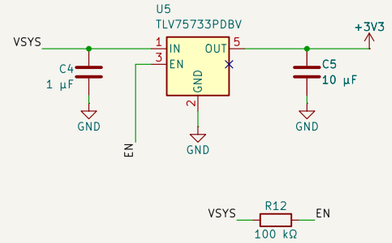


Wi-Fi 4 + Bluetooth 5.2 (Pico 2 W pinout)

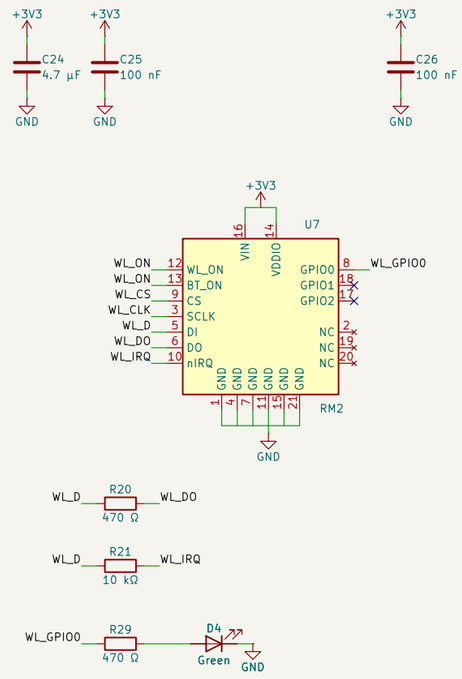


User LED on WL_GPIO0

Headers, Qwiic, debug

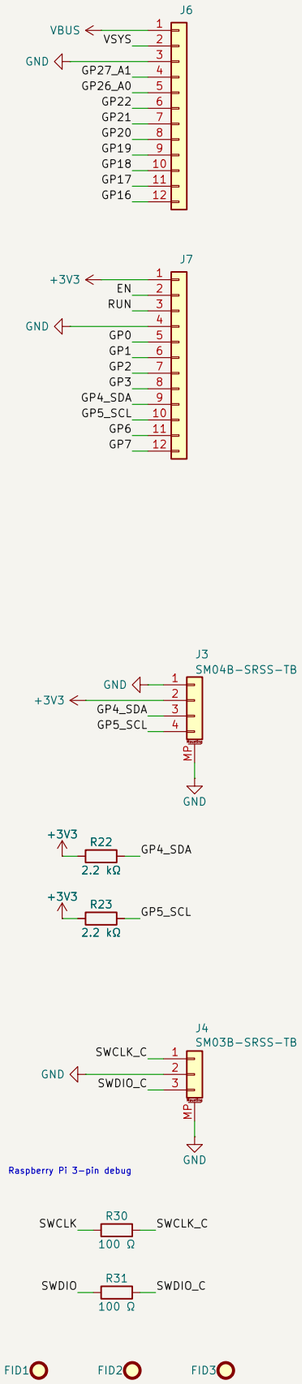


Raspberry Pi 3-pin debug


RP2350A, core regulator, crystal, decoupling

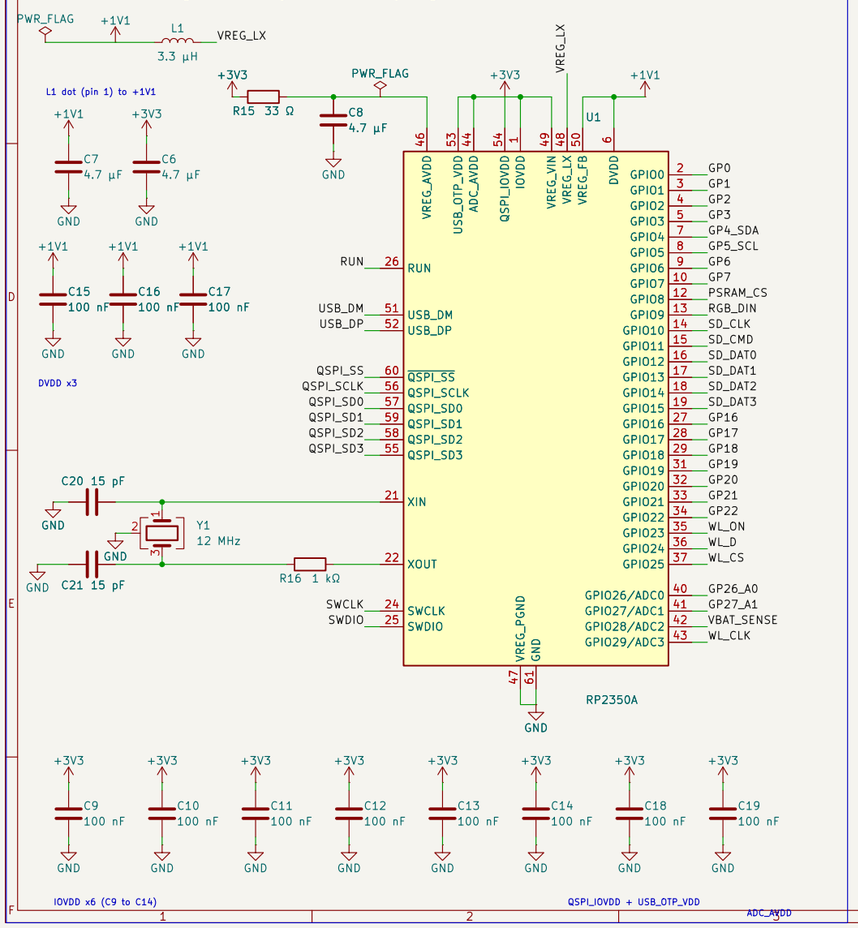


16 MB QSPI flash, 8 MB QSPI PSRAM, BOOT and RESET

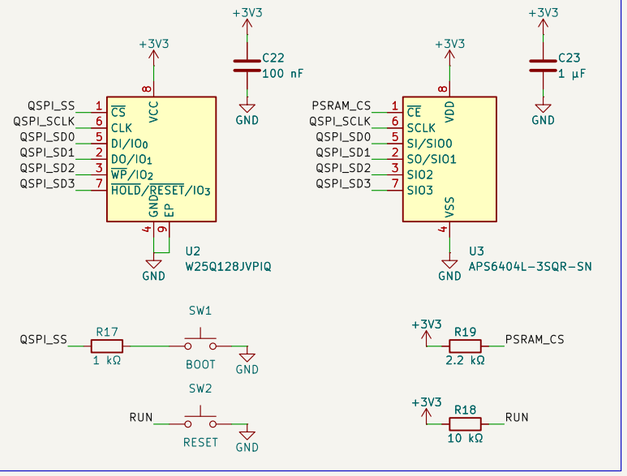

microSD (SPI1 or 4-bit SDIO)

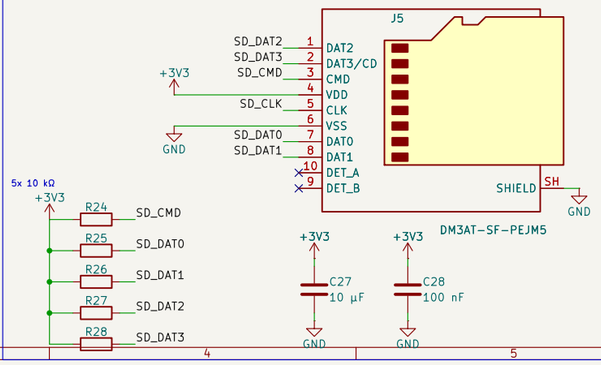

Addressable RGB LED

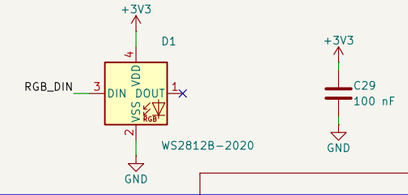

Open hardware, built for PCBWay turnkey assembly

Sheet: /
File: rp2350-devboard.kicad_sch

Title: RP2350 Wi-Fi dev board

Size: A3	Date: 2026-11-10	**Rev: A**
KiCad E.D.A. 10.99.0-6344-g8c85ac1452		Id: 1/1