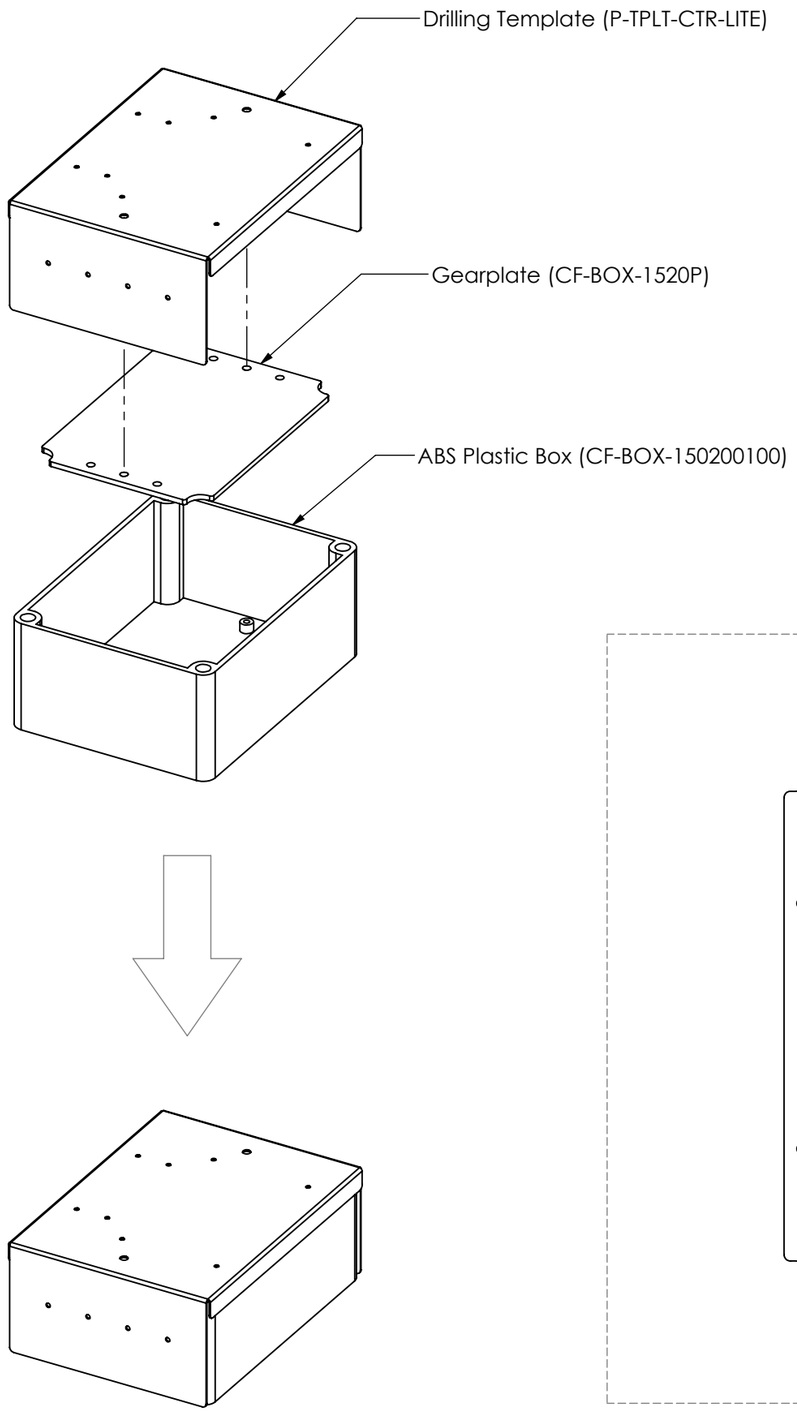


1. Attach the Gearplate to the 'underside' of the Drilling Template using M5 Screws, washers, & nuts ***(making sure that the gearplate is 'parallel' & 'centrally' aligned to the Drilling Template & the fasteners are sufficiently tightened to prevent movement when drilling).***


2. Remove the Clear Lid from the ABS Plastic Box, then fit the Drilling Template over the box as shown.

3. Use the Drilling Template to drill the following holes using a 3.2mm Drill Bit:


   - 8x holes on the Gearplate
   - 4x holes on one end of the ABS Plastic Box
   - 2x holes on the other end of the ABS Plastic Box

4. Enlarge **ONLY** the specific holes shown on the **Gearplate View.**

5. Enlarge the holes as shown on **both ends** of the **ABS Plastic Box View.**

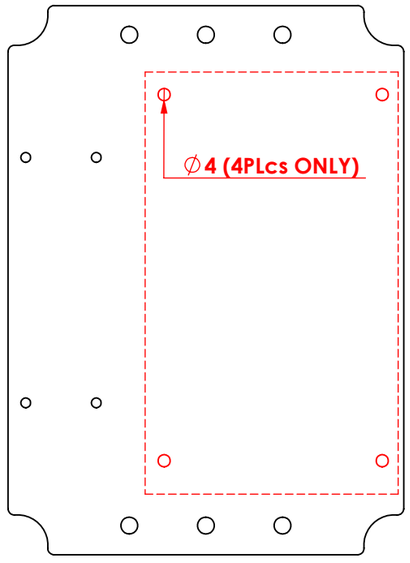

Gearplate View

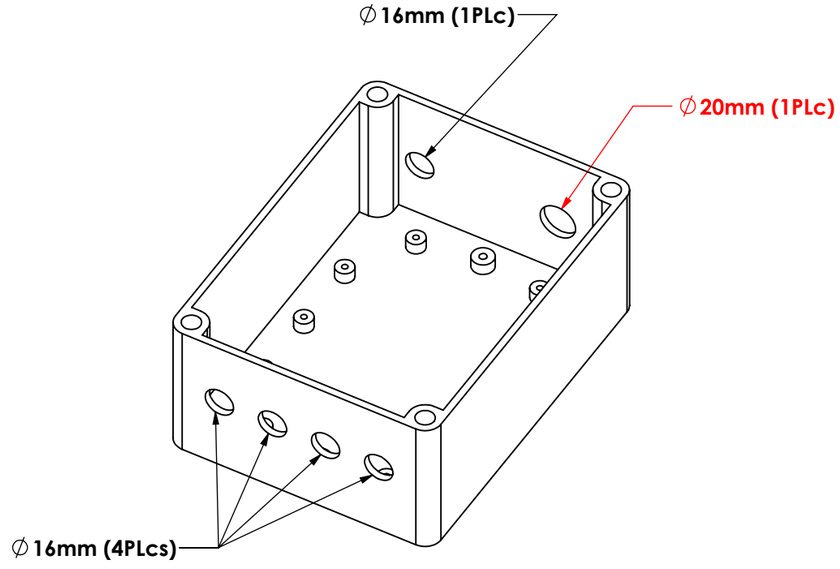

ABS Plastic Box View

Date: 6/07/2026

Revision Description: Initial Release

© Copyright
Compac Industries Ltd
PO Box 12-417
52 Walls Road
Penrose, Auckland, NZ
Ph 649 5792094
Fax 649 5790635


General Tolerances

Remove all burrs and sharp edges. Original Size A3. Do not scale from drawing.

Controller Lite Drilling Operations

Drawing	Sheet	Part Revision
ASM0169A	1/3	A

EARTH STUD ASSEMBLY (in order):
- M4x20 SS Pan Pozi screw
- M4 SS internal lock washer
- M4 SS internal lock washer
- M4 SS hex nut
- M4 SS flat washer
- M4 SS flat washer
- M4 SS hex nut
-M4 SS hex nut

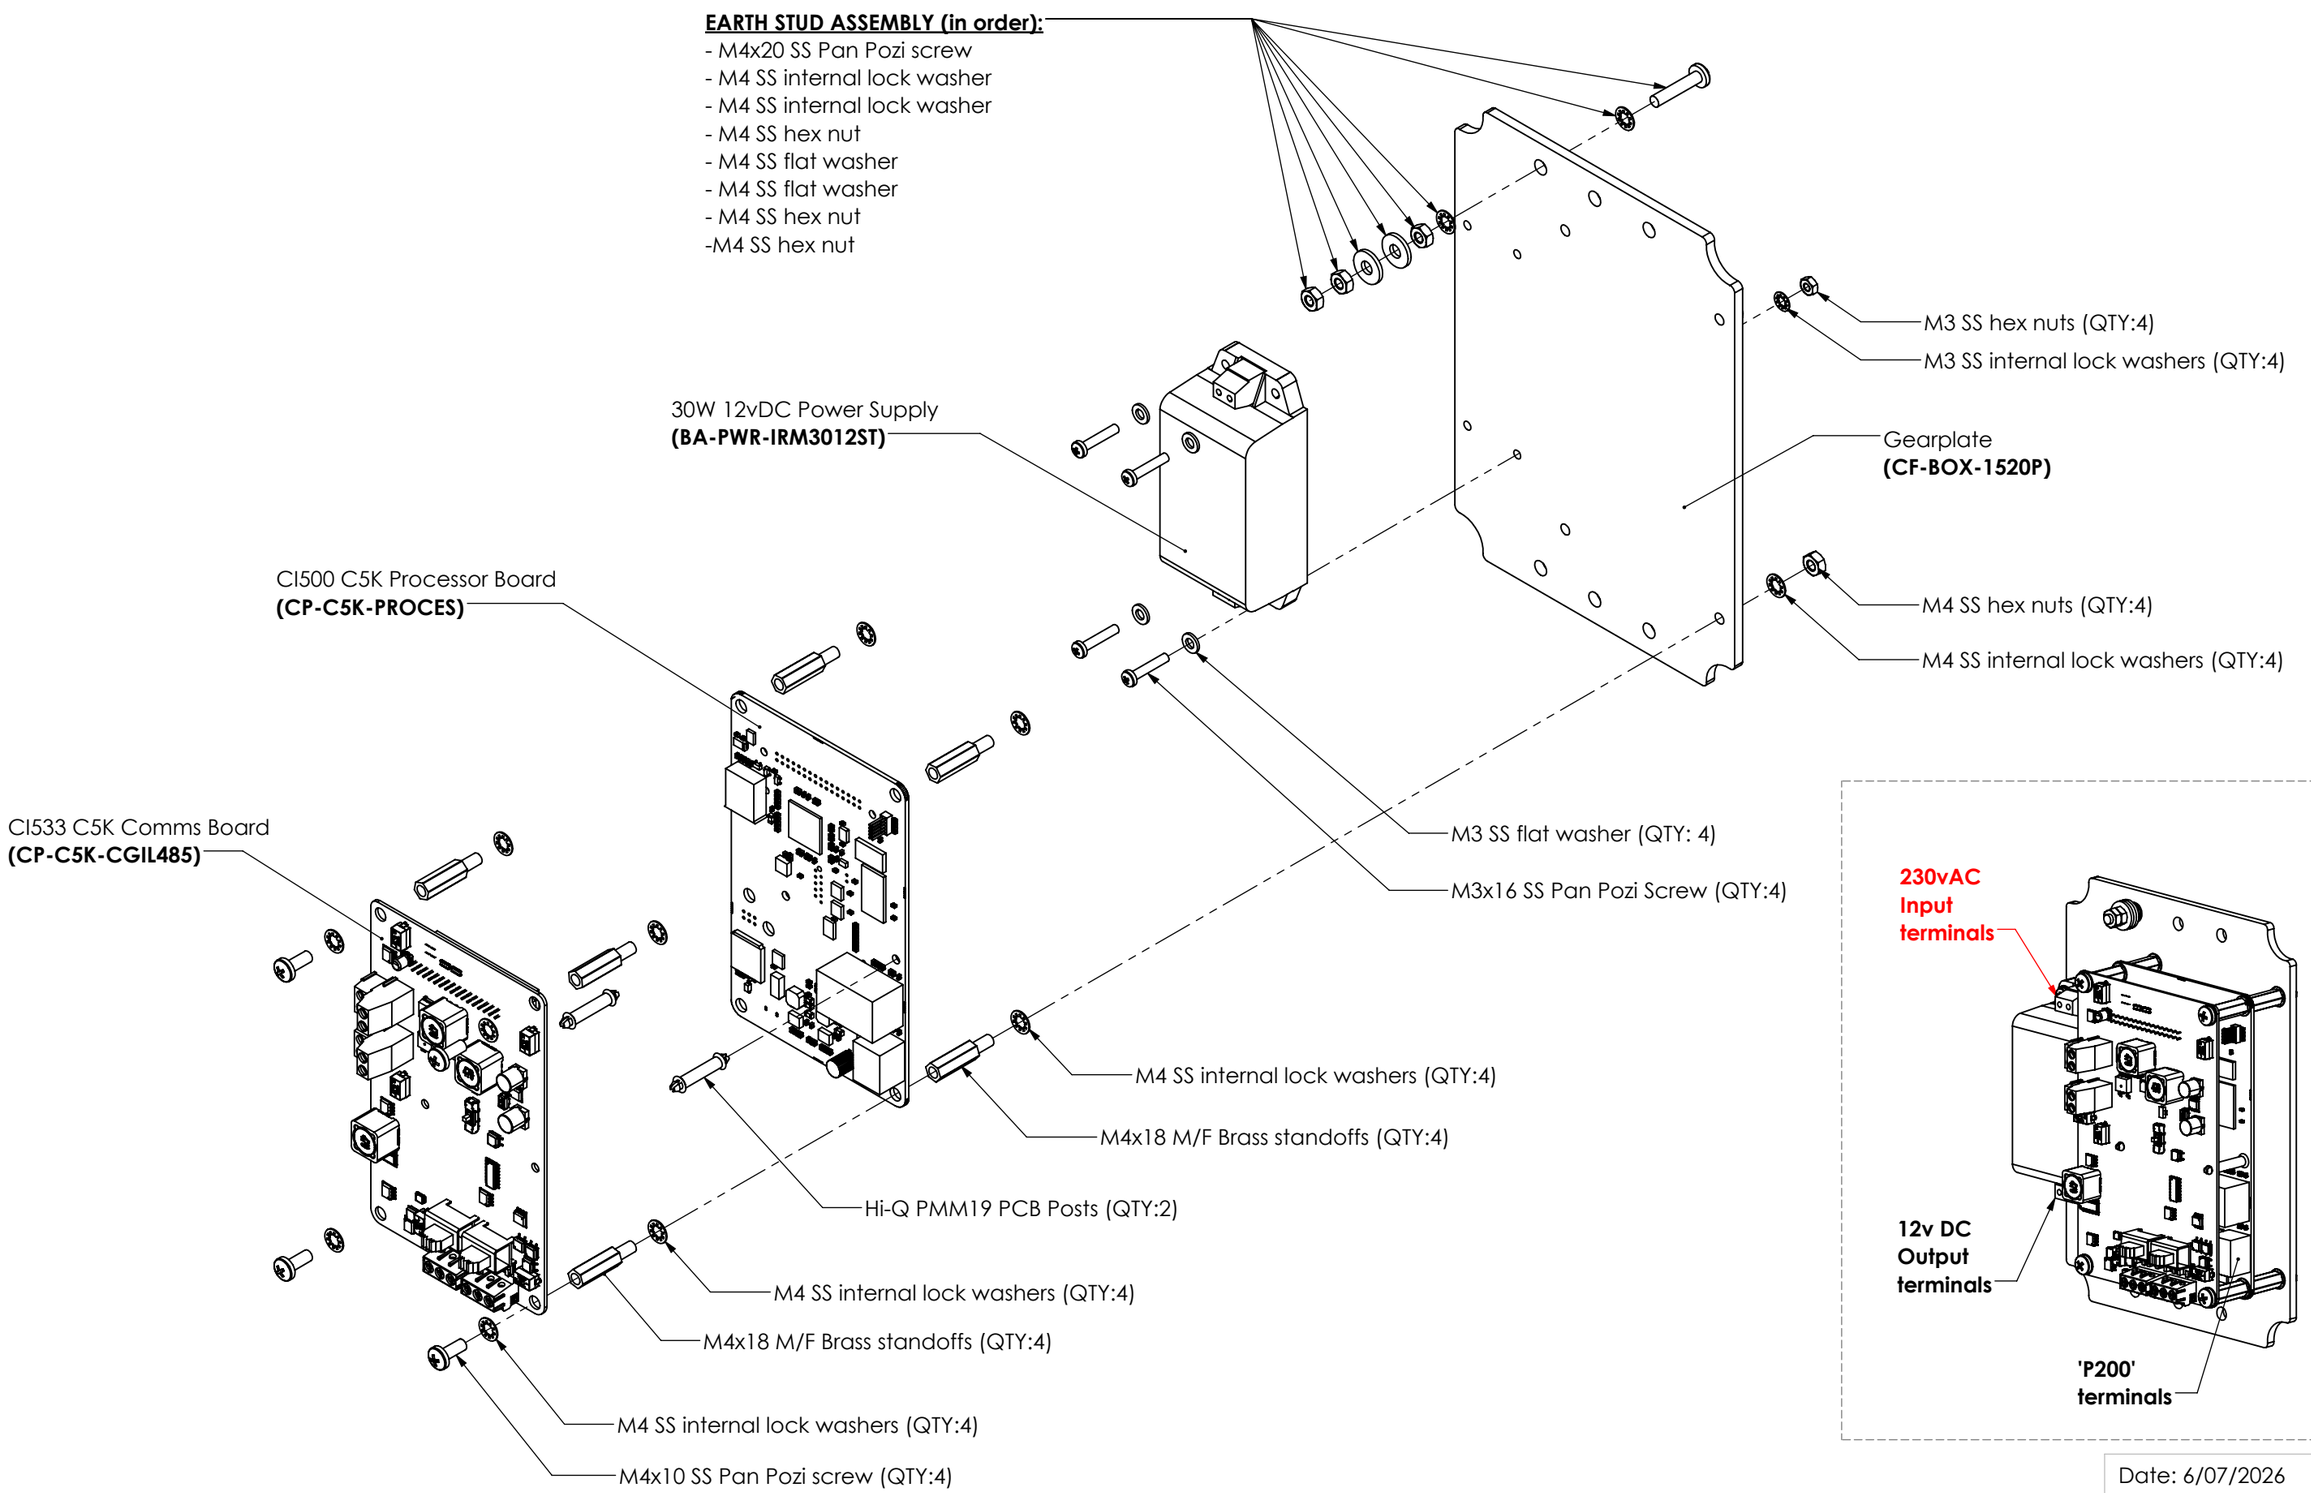

Date: 6/07/2026

Revision Description: Initial Release


© Copyright
Compac Industries Ltd
PO Box 12-417
52 Walls Road
Penrose, Auckland, NZ
Ph 649 5792094
Fax 649 5790635


General Tolerances

Remove all burrs and sharp edges. Original Size A3. Do not scale from drawing.

Controller Lite Gearplate Assembly


Drawing	Sheet	Part Revision
ASM0169A	2/3	A

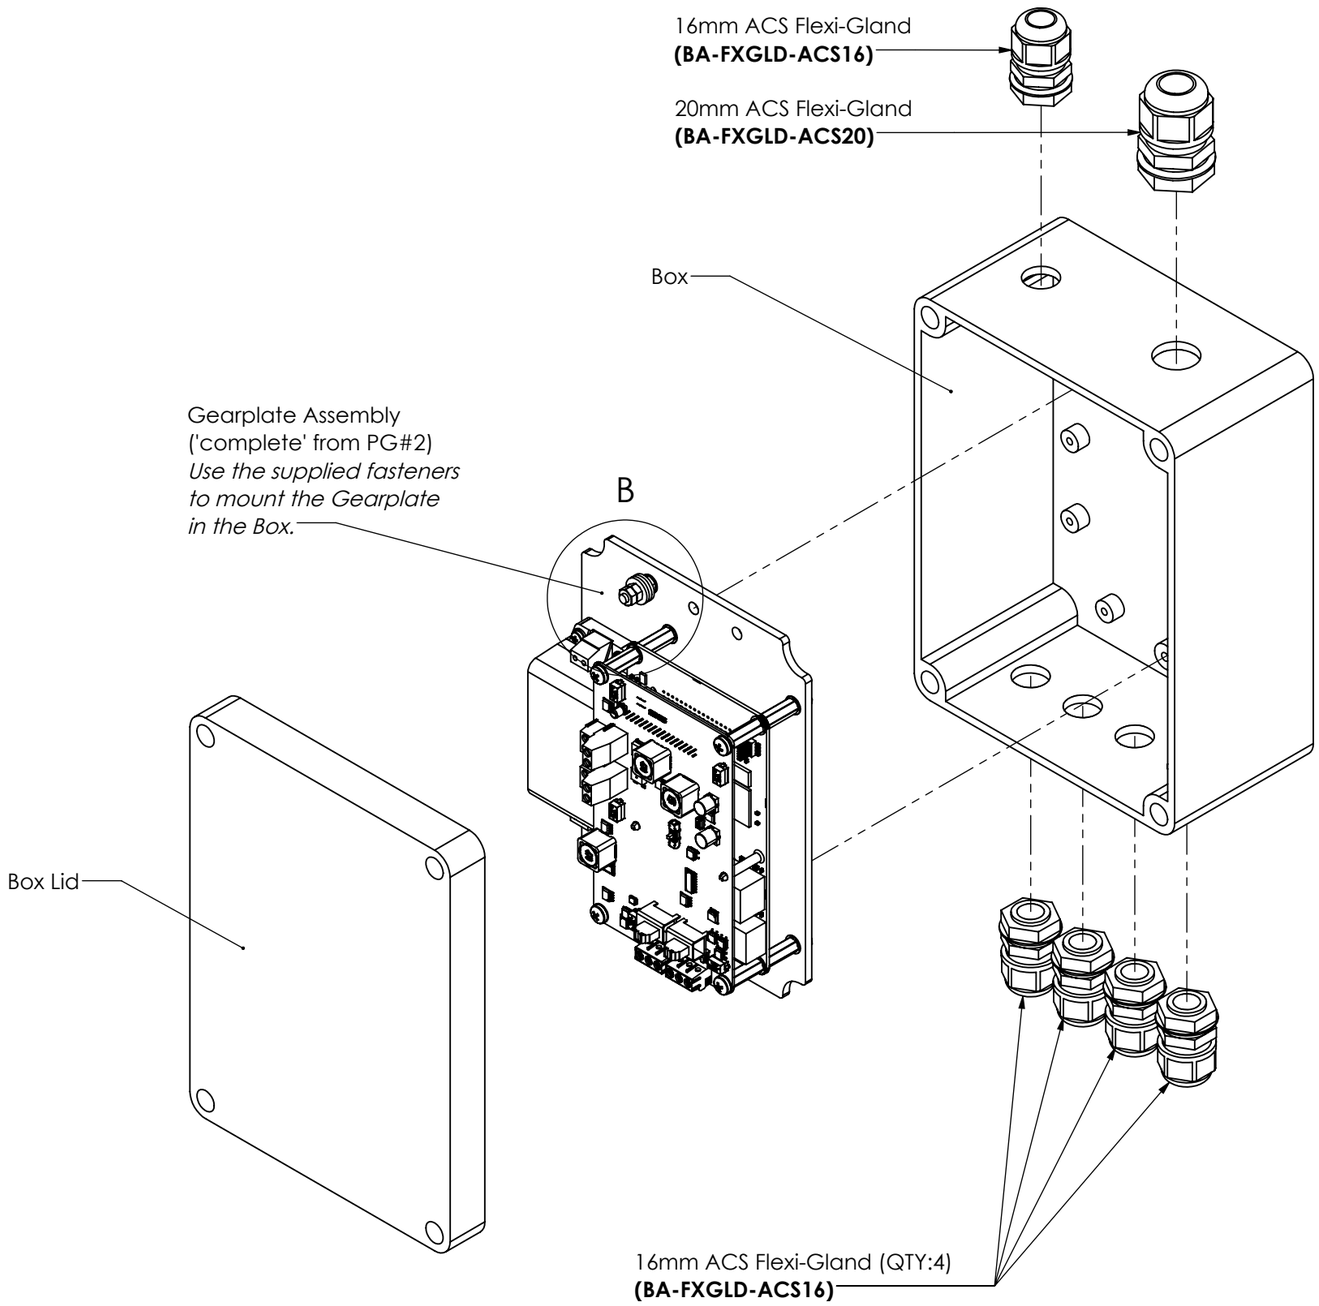

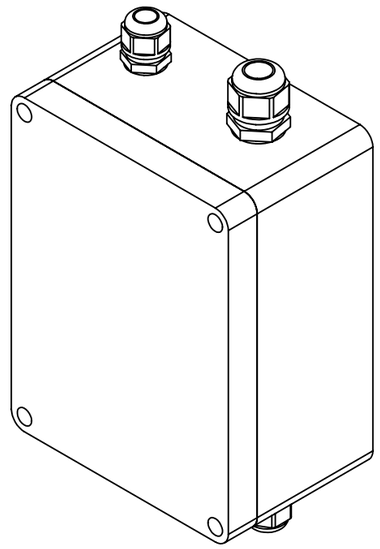

Use Red & Black 1.5mm2 appliance wire to connect the 12v DC Outputs ('+' & 'GND') of the Power Supply to the 'P200' '12v' & 'GND' terminals of the CI500 C5K Processor Board *(see inset Sheet 2).*

<u>NOTE:</u> The 'GND' terminal on the 12v DC Output of the Power Supply must also be connected to the 'Earth Stud'. Use 0.75mm2 Green appliance wire.

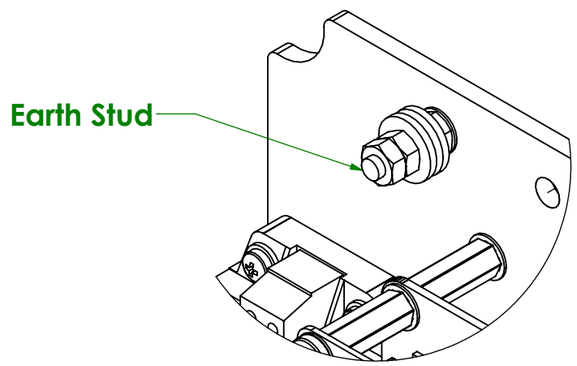

DETAIL B

Date: 6/07/2026

Revision Description: Initial Release

© Copyright
Compac Industries Ltd
PO Box 12-417
52 Walls Road
Penrose, Auckland, NZ
Ph 649 5792094
Fax 649 5790635

General Tolerances

Remove all burrs and sharp edges. Original Size A3. Do not scale from drawing.

Controller Lite Final Assembly

Drawing	Sheet	Part Revision
ASM0169A	3/3	A