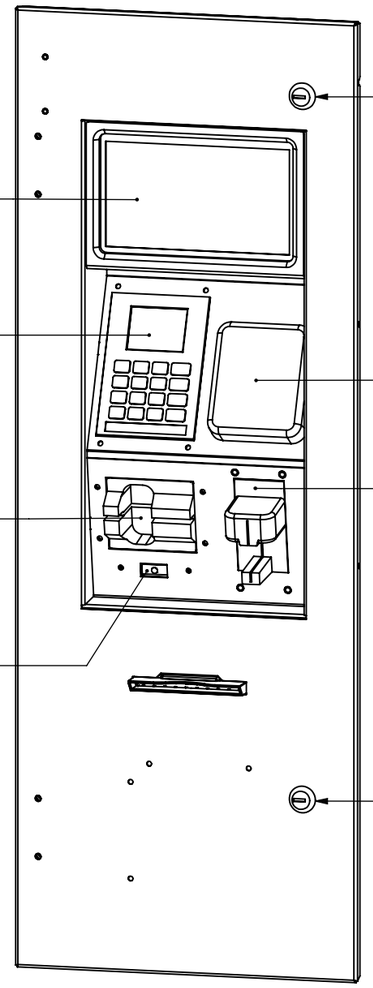


418 Key Lock
Turn clockwise from 0° to 180° to open.

STM32 Embedded 7-inch TFT Display

F-series SKP200 Pinpad.


F-series BRF210F PayWave Reader

F-series SCR200 Card Reader

(Optional)Secondary Reader Module:
-Blank for Pin Authorization
-TTL2 Fuel Card Reader (shown)
-HID Reader
(Assembly details are on Sheet 4)


(Optional)
NLV3101 Barcode Scanner
(Assembly details are on Sheet 2)

144 Key Lock
Turn clockwise from 180° to 270° to open.

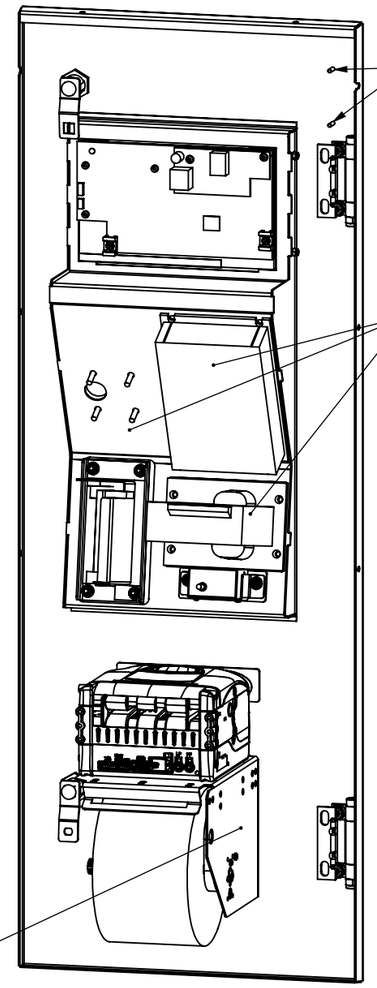

Security Alarm Reed Switch (Optional)

F-series Eftpos Payment Module
(uses M4 Nuts supplied with each
of the components)

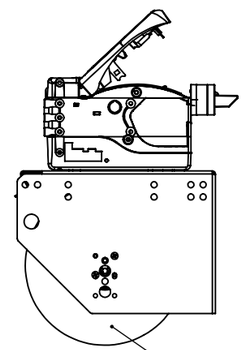

130mm dia Paper roll

VKP80iii printer module
-Modify the printer assembly to include a paper mouth shutter.
-Attach the printer assembly to the printer bracket using M4x10 screws, M4 spring washers, and nuts (3 places).
-Attach the paper holder module to the printer bracket, orienting it so that the adjuster is accessible.
-Assemble through nozzle gasket (part of gasket set) and secure with M4 Nyloc nuts and flat washers.

Date: 17/09/2025

Revision Description: Add ethernet board

© Copyright
Compac Industries Ltd
PO Box 12-417
52 Walls Road
Penrose, Auckland, NZ
Ph 649 5792094
Fax 649 5790635


General Tolerances
All dimensions millimetres

Remove all burrs and sharp edges.
Original Size A3.
Do not scale from drawing.

COM5 OPT Sheetmetals
C5PT Door - 7inch Display, Smart RDR W PWV
LAYOUT

Drawing	Sheet	Part Revision
ASM0121C	1/7	C

*** When fitting the display into the slot, peel off the adhesive backing and align the top face of the display before pressing it into place.**
This step strictly applies only to the first two batches of doors, which do not have the additional undercut for cable clearance below the display △C

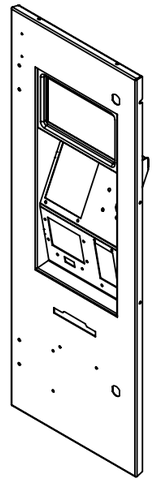


Bezel', fasteners (Supplied loose in a plastic bag for the upgrade kit.)
Part of PT1 BOM or Upgrade kit BOMs

The hinge side is secured with
Grub screws ((2x)CP-C5PT-DISP-BZG) and
M3 Nyloc nuts, Retain with M3 SS Flat washers

CF-C5PT-DISP-BZ
Display Bezel

BL-CGLCD-DSP-7P
7 inch Display module.
tested and pre-programmed.
(Refer to sheet 7)

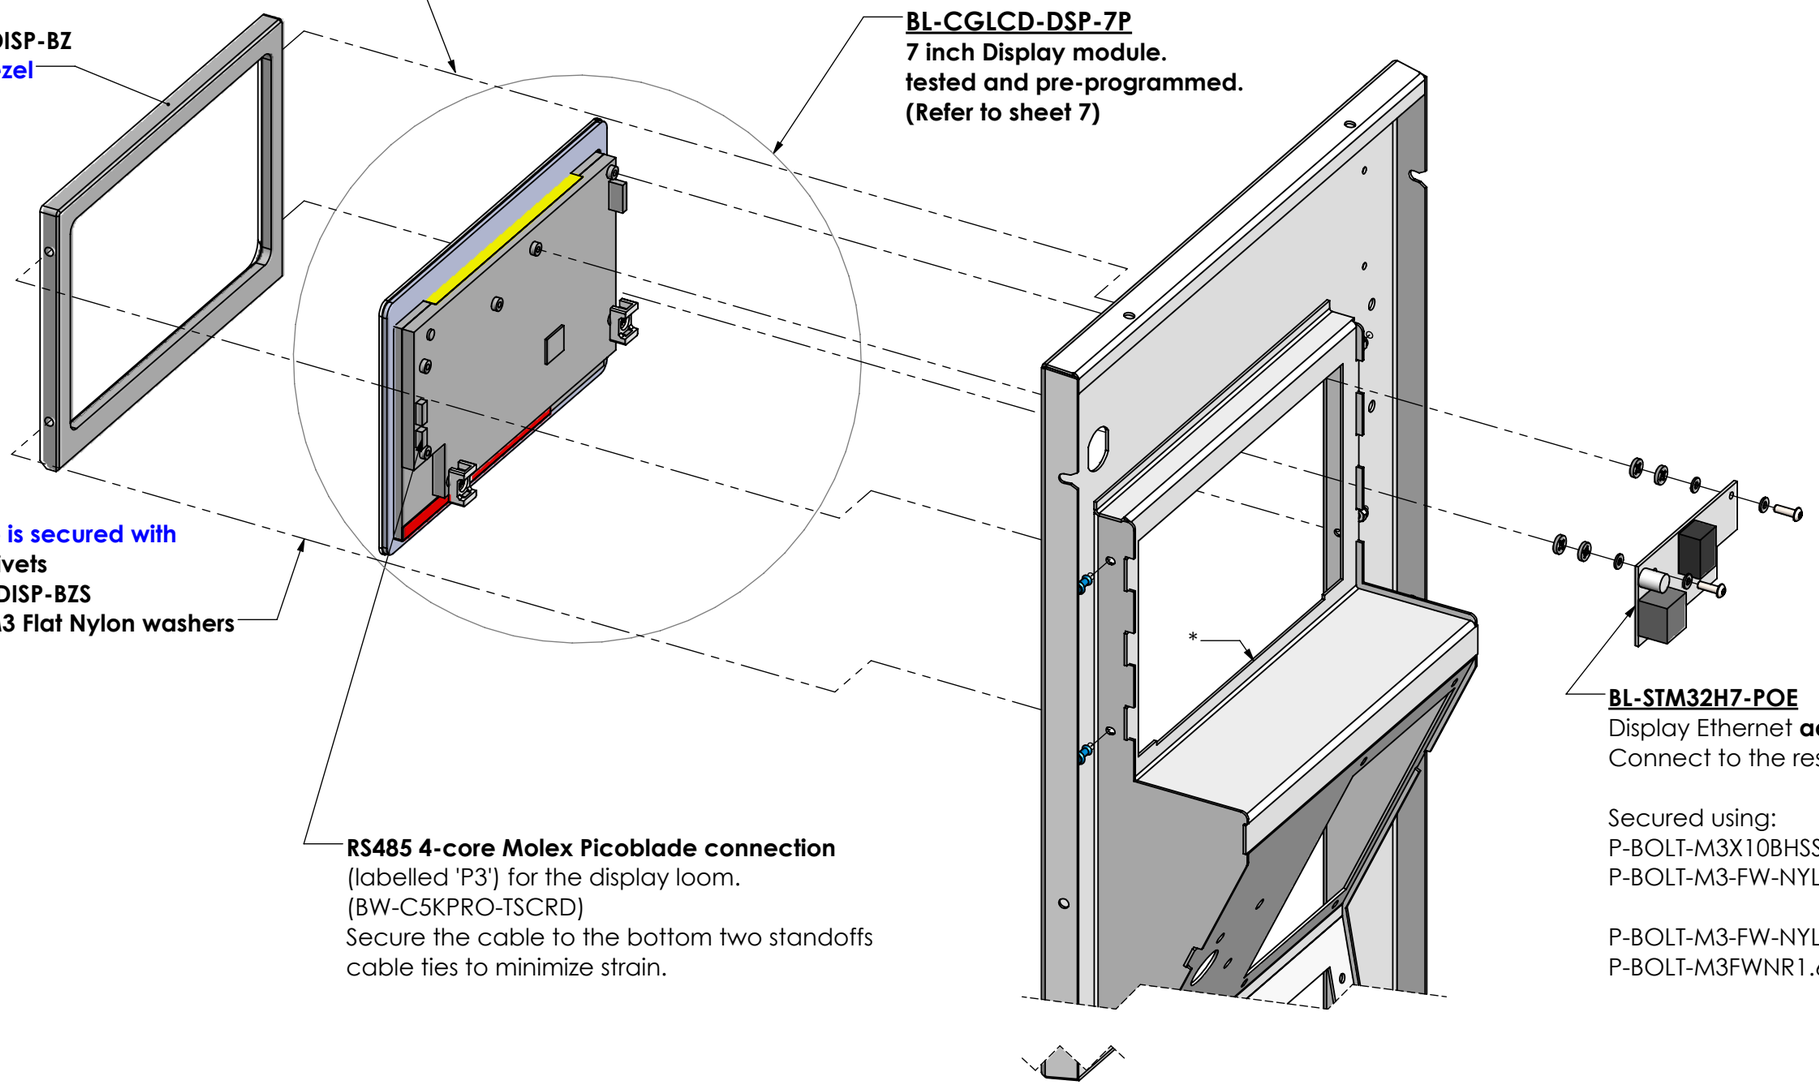

The latch side is secured with
plastic snap rivets
(2x)CP-C5PT-DISP-BZS
,Retain with M3 Flat Nylon washers

RS485 4-core Molex Picoblade connection
(labelled 'P3') for the display loom.
(BW-C5KPRO-TSCRD)
Secure the cable to the bottom two standoffs
cable ties to minimize strain.

BL-STM32H7-POE △C
Display Ethernet **add-on** board
Connect to the reserved "LAN" port on the router.

Secured using:
P-BOLT-M3X10BHSS and
P-BOLT-M3-FW-NYL above the board

P-BOLT-M3-FW-NYL and
P-BOLT-M3FWNR1.6 × 2 below the board as spacers

Date: 17/09/2025

Revision Description: Add ethernet board


© Copyright
Compac Industries Ltd
PO Box 12-417
52 Walls Road
Penrose, Auckland, NZ
Ph 649 5792094
Fax 649 5790635


General Tolerances
All dimensions millimetres

Remove all burrs and sharp edges. Original Size A3. Do not scale from drawing.

COM5 OPT Sheetmetals
C5PT Door - 7inch Display, Smart RDR W PWV
TOUCH SCREEN ASSEMBLY

Drawing	Sheet	Part Revision
ASM0121C	2/7	C

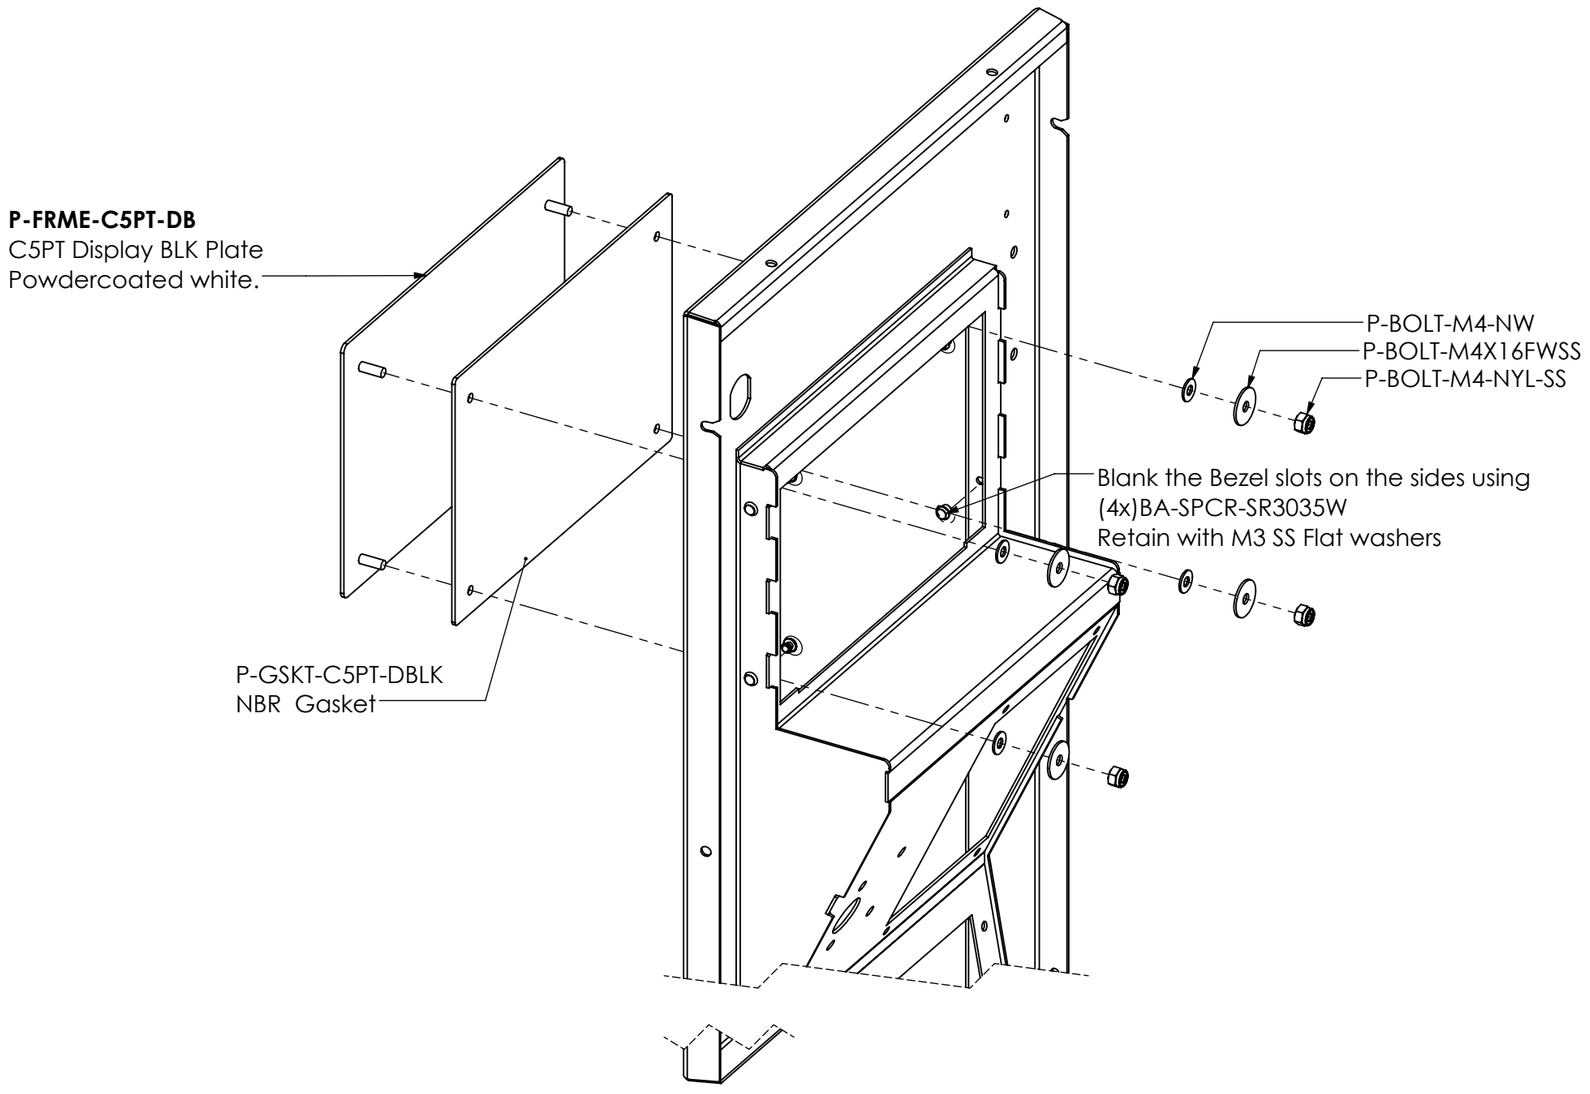

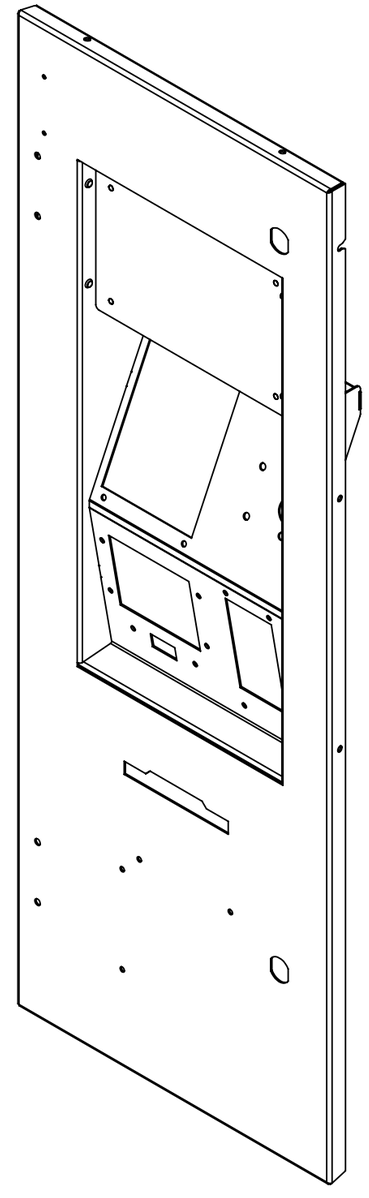

Date: 17/09/2025

Revision Description: Add ethernet board

© Copyright
Compac Industries Ltd
PO Box 12-417
52 Walls Road
Penrose, Auckland, NZ
Ph 649 5792094
Fax 649 5790635


General Tolerances
All dimensions millimetres

Remove all burrs and sharp edges.
Original Size A3.
Do not scale from drawing.


COM5 OPT Sheetmetals
C5PT Door - 7inch Display, Smart RDR W PWV
EXCLUDE TOUCH SCREEN

Drawing	Sheet	Part Revision
ASM0121C	3/7	C


All mountings use M4 stainless steel flat washers and M4 stainless steel Nyloc nuts.
The gaskets listed on this page are part of the 2mm Neoprene Sponge Gasket Set (P-GSKT-C5PT-GS2).

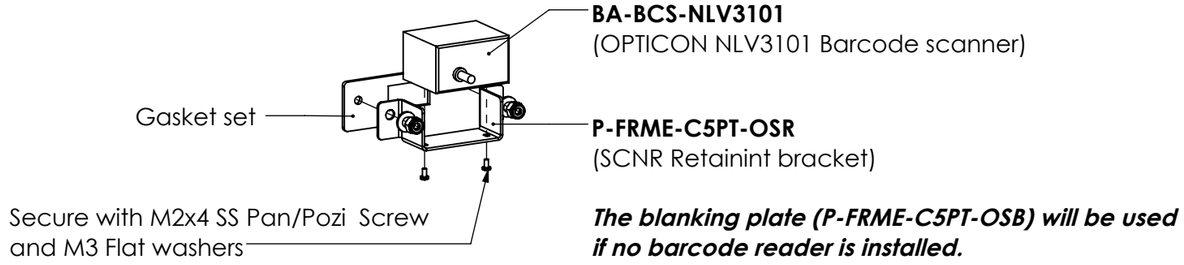


The blanking plate (P-FRME-C5PT-OSB) will be used if no barcode reader is installed.

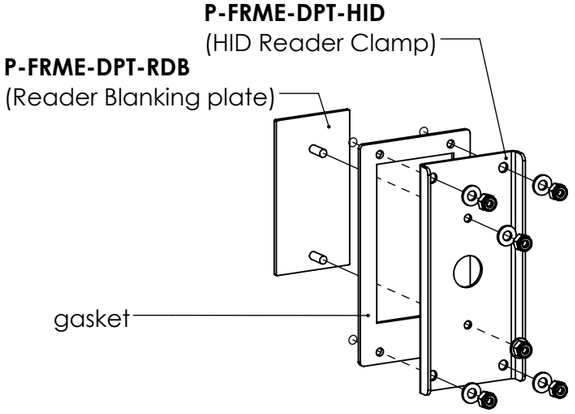

Blank for Pin Authorisation
Reader Blanking Module
Module to be assembled to the door with:
M4 SS Flat washers and Nyloc Nuts

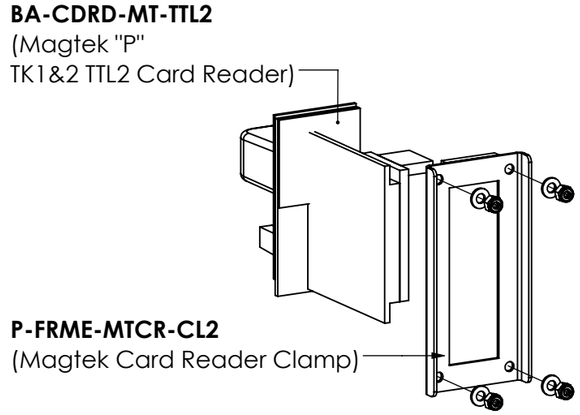

Fuel Card Authorisation
TTL2 Card reader Module
Module to be assembled to the door with:
M4 SS Flat washers and Nyloc Nuts

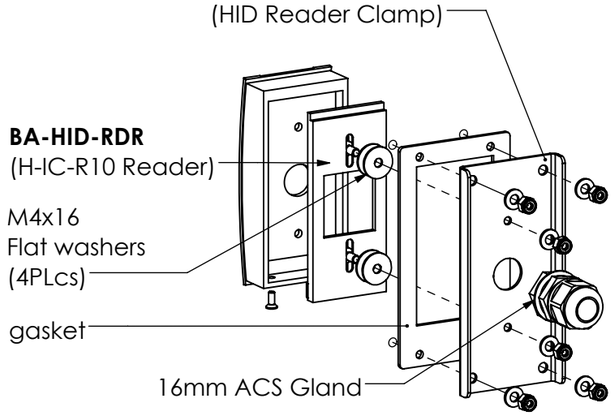

HID Authorisation
HID Reader Module
Module to be assembled to the door with:
M4 SS Flat washers and Nyloc Nuts

Date: 17/09/2025

Revision Description: Add ethernet board


© Copyright
Compac Industries Ltd
PO Box 12-417
52 Walls Road
Penrose, Auckland, NZ
Ph 649 5792094
Fax 649 5790635


General Tolerances
All dimensions millimetres


Remove all burrs and sharp edges.
Original Size A3.
Do not scale from drawing.


COM5 Payment Terminal (Optional)Secondary Reader Modules

Drawing	Sheet	Part Revision
ASM0121C	4/7	B

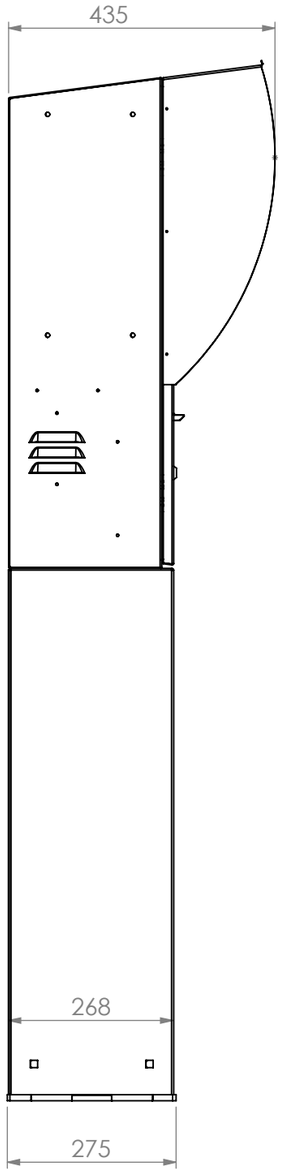


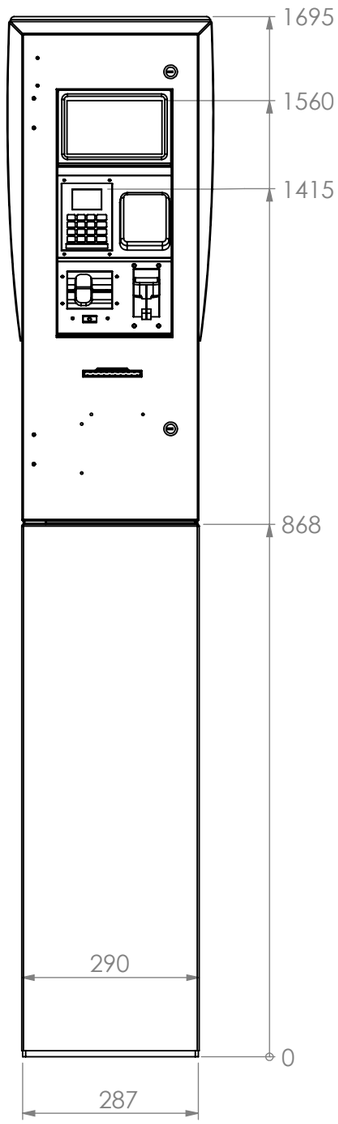

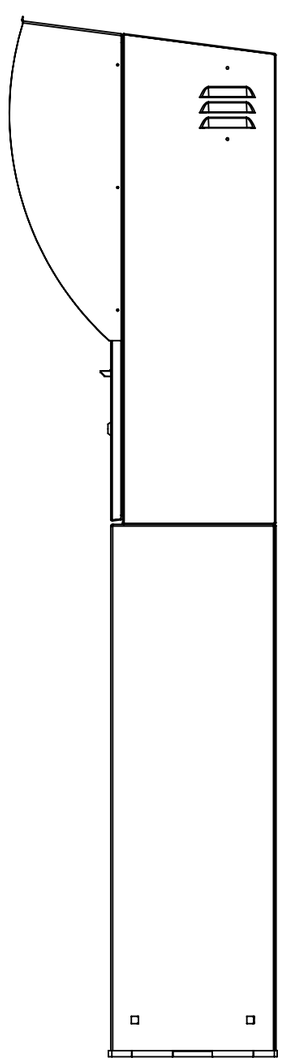

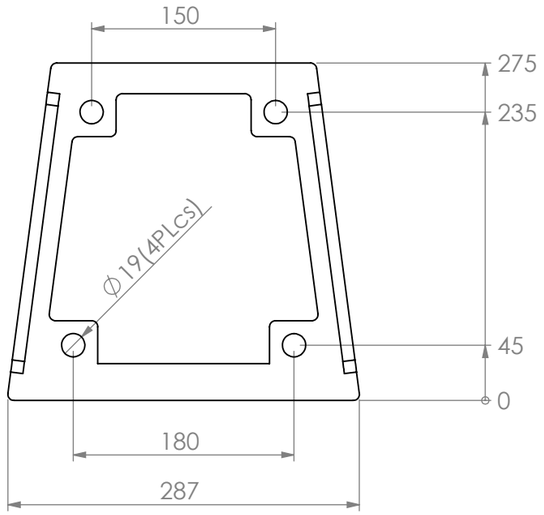

BASE FOOTPRINT

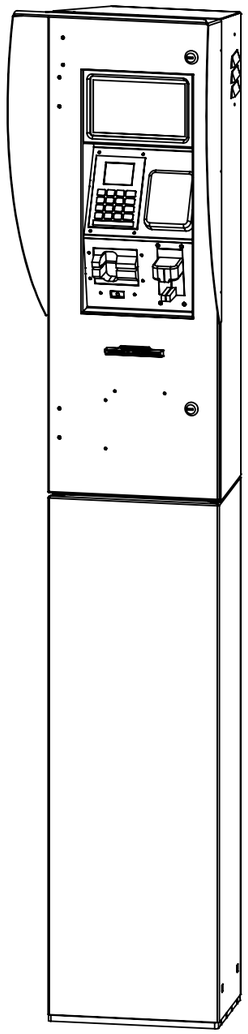

Date: 17/09/2025

Revision Description: Add ethernet board


© Copyright
Compac Industries Ltd
PO Box 12-417
52 Walls Road
Penrose, Auckland, NZ
Ph 649 5792094
Fax 649 5790635


General Tolerances
All dimensions millimetres

Remove all burrs and sharp edges.
Original Size A3.
Do not scale from drawing.

COM5 OPT Sheetmetals
C5PT Door - 7inch Display, Smart RDR W PWV
Overall dimensions

Drawing	Sheet	Part Revision
ASM0121C	5/7	C

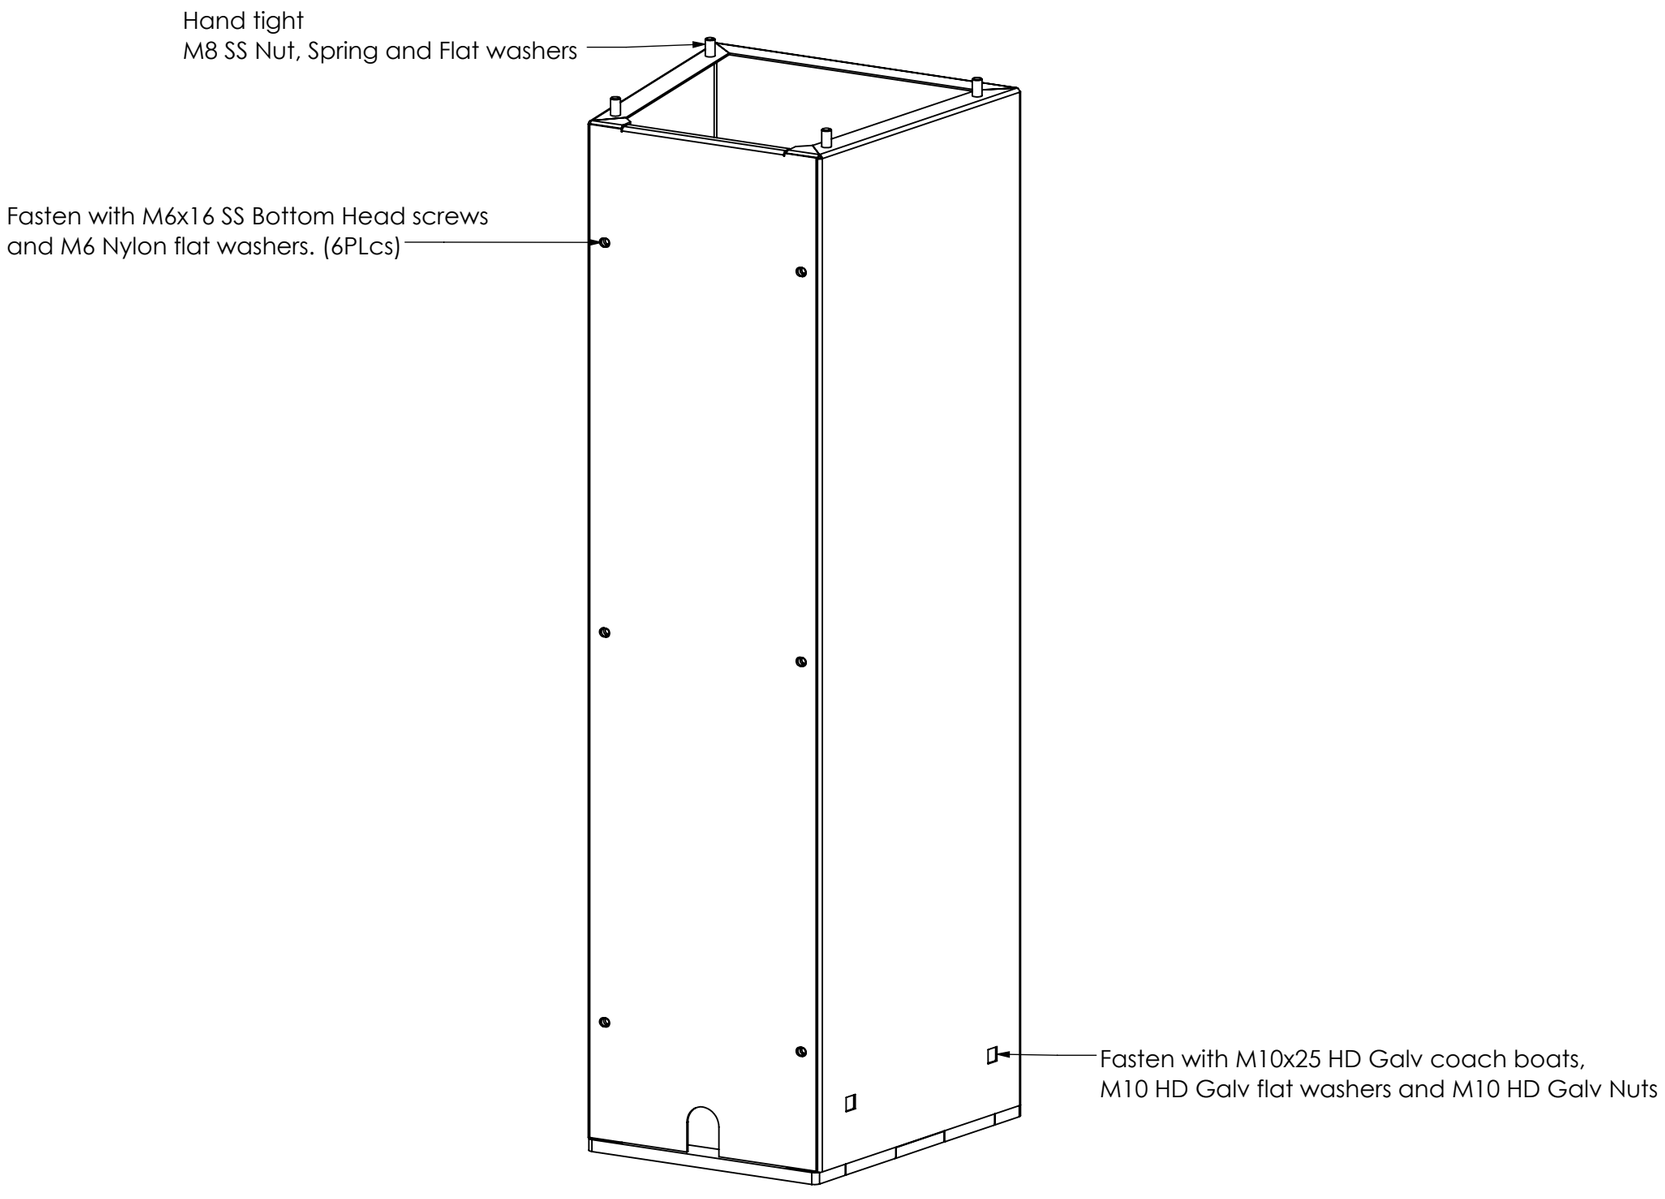

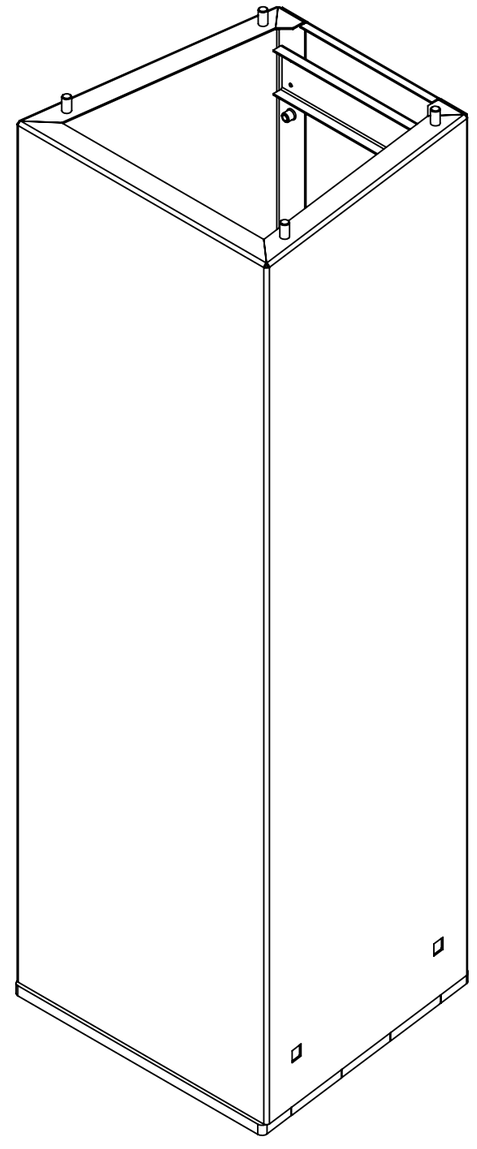

HO-PTMPOS----011 - Default post with removable cover on the REAR side of the terminal, as shown on the model.
Optional:
HO-PTMPOS----012 - Post with removable cover on the FRONT side of the terminal.

Date: 17/09/2025

Revision Description: Add ethernet board


© Copyright
Compac Industries Ltd
PO Box 12-417
52 Walls Road
Penrose, Auckland, NZ
Ph 649 5792094
Fax 649 5790635


General Tolerances
All dimensions millimetres

Remove all burrs and sharp edges.
Original Size A3.
Do not scale from drawing.

COM5 OPT
COM5 Payment Terminal Post Assembly

Drawing	Sheet	Part Revision
ASM0121C	6/7	A

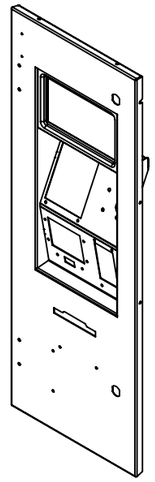

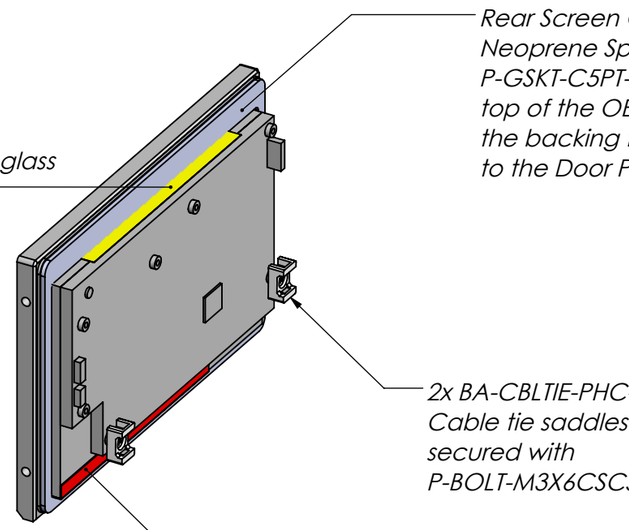

Rear Screen Gasket (part of the 2mm Neoprene SpongeGasket Set P-GSKT-C5PT-GS2) fitted on top of the OEM gasket - remove the backing film first before fitting to the Door Panel.

T1350 PE tape is applied between the glass backing and the backlight assembly for reinforcement. Leave approx 5mm clearance from the edge of the glass to maintain the adhesive bond to the gasket.

2x BA-CBLTIE-PHC-1 Cable tie saddles. secured with P-BOLT-M3X6CSCSS

Glass-fibre tape is applied over the Display ribbon cables for protection

Date: 17/09/2025

Revision Description: Add ethernet board

© Copyright
Compac Industries Ltd
PO Box 12-417
52 Walls Road
Penrose, Auckland, NZ
Ph 649 5792094
Fax 649 5790635

General Tolerances
All dimensions millimetres

Remove all burrs and sharp edges. Original Size A3. Do not scale from drawing.

COM5 OPT Sheetmetals
7 inch Display module.
tested and pre-programmed.

BL-CGLCD-DSP-7P

Drawing	Sheet	Part Revision
ASM0121C	7/7	C