



Experiment No. 3
To study Edge detection with Canny
Name of Student: - 09_Amruta Poojary
Date of Performance: 2/7/2023
Date of Submission: 9/7/2023



Aim: To study Edge detection with Canny

Objective: Perform Canny Edge detector using Noise reduction using Gaussian filter ,Gradient calculation along the horizontal and vertical axis
Non-Maximum suppression of false edges ,Double thresholding for segregating strong and weak edges ,Edge tracking by hysteresis

Theory:

The Canny edge detector is an edge detection operator that uses a multi-stage algorithm to detect a wide range of edges in images. It was developed by John F. Canny in 1986. Canny also produced a computational theory of edge detection explaining why the technique works.





What are the three stages of the Canny edge detector

To fulfill these objectives, the edge detection process included the following stages.

- Stage One - Image Smoothing.
- Stage Two - Differentiation.
- Stage Three - Non-maximum Suppression.

The basic steps involved in this algorithm are:

- Noise reduction using Gaussian filter
- Gradient calculation along the horizontal and vertical axis
- Non-Maximum suppression of false edges
- Double thresholding for segregating strong and weak edges
- Edge tracking by hysteresis

Now let us understand these concepts in detail:

1. Noise reduction using Gaussian filter

This step is of utmost importance in the Canny edge detection. It uses a Gaussian filter for the removal of noise from the image, it is because this noise can be assumed as edges due to sudden intensity change by the edge detector. The sum of the elements in the Gaussian kernel is 1, so the kernel should be normalized before applying convolution to the image. In this Experiment, we will use a kernel of size 5 X 5 and $\sigma = 1.4$, which will blur the image and remove the noise from it. The equation for Gaussian filter kernel is



$$G_{\sigma} = \frac{1}{2\pi\sigma^2} e^{-\frac{(x^2+y^2)}{2\sigma^2}}$$

$$K_x = \begin{pmatrix} -1 & 0 & 1 \\ -2 & 0 & 2 \\ -1 & 0 & 1 \end{pmatrix}, K_y = \begin{pmatrix} 1 & 2 & 1 \\ 0 & 0 & 0 \\ -1 & -2 & -1 \end{pmatrix}.$$

after applying these kernel we can use the gradient magnitudes and the angle to further process this step. The magnitude and angle can be calculated as

$$|G| = \sqrt{I_x^2 + I_y^2},$$
$$\theta(x, y) = \arctan\left(\frac{I_y}{I_x}\right)$$

Non-Maximum Suppression

This step aims at reducing the duplicate merging pixels along the edges to make them uneven. For each pixel find two neighbors in the positive and negative gradient directions, supposing that each neighbor occupies the angle of $\pi/4$, and 0 is the direction straight to the right. If the magnitude of the current pixel is greater than the magnitude of the neighbors, nothing changes, otherwise, the magnitude of the current pixel is set to zero.

4. Double Thresholding

The gradient magnitudes are compared with two specified threshold values, the first one is lower than the second. The gradients that are smaller than the low threshold value are suppressed, the gradients higher than the high threshold value are marked as strong ones and the corresponding pixels are included in the final edge map. All the rest gradients are marked as weak ones and pixels corresponding to these gradients are considered in the next step.



5. Edge Tracking using Hysteresis

Since a weak edge pixel caused by true edges will be connected to a strong edge pixel, pixel W with weak gradient is marked as edge and included in the final edge map if and only if it is involved in the same connected component as some pixel S with strong gradient. In other words, there should be a chain of neighbor weak pixels connecting W and S (the neighbors are 8 pixels around the considered one). We will make up and implement an algorithm that finds all the connected components of the gradient map considering each pixel only once. After that, you can decide which pixels will be included in the final edge map. Below is the implementation.



Code :-

```
import numpy as np
import os
import cv2
import matplotlib.pyplot as plt

# defining the canny detector function

# here weak_th and strong_th are thresholds for
# double thresholding step
def Canny_detector(img, weak_th = None, strong_th = None):

    # conversion of image to grayscale
    img = cv2.cvtColor(img, cv2.COLOR_BGR2GRAY)

    # Noise reduction step
    img = cv2.GaussianBlur(img, (5, 5), 1.4)

    # Calculating the gradients
    gx = cv2.Sobel(np.float32(img), cv2.CV_64F, 1, 0, 3)
    gy = cv2.Sobel(np.float32(img), cv2.CV_64F, 0, 1, 3)

    # Conversion of Cartesian coordinates to polar
    mag, ang = cv2.cartToPolar(gx, gy, angleInDegrees = True)

    # setting the minimum and maximum thresholds
    # for double thresholding
    mag_max = np.max(mag)
    if not weak_th: weak_th = mag_max * 0.1
    if not strong_th: strong_th = mag_max * 0.5

    # getting the dimensions of the input image
    height, width = img.shape

    # Looping through every pixel of the grayscale
    # image
    for i_x in range(width):
```



```
for i_y in range(height):

    grad_ang = ang[i_y, i_x]
    grad_ang = abs(grad_ang-180) if abs(grad_ang)>180 else
abs(grad_ang)

    # selecting the neighbours of the target pixel
    # according to the gradient direction
    # In the x axis direction
    if grad_ang<= 22.5:
        neighb_1_x, neighb_1_y = i_x-1, i_y
        neighb_2_x, neighb_2_y = i_x + 1, i_y

    # top right (diagonal-1) direction
    elif grad_ang>22.5 and grad_ang<=(22.5 + 45):
        neighb_1_x, neighb_1_y = i_x-1, i_y-1
        neighb_2_x, neighb_2_y = i_x + 1, i_y + 1

    # In y-axis direction
    elif grad_ang>(22.5 + 45) and grad_ang<=(22.5 + 90):
        neighb_1_x, neighb_1_y = i_x, i_y-1
        neighb_2_x, neighb_2_y = i_x, i_y + 1

    # top left (diagonal-2) direction
    elif grad_ang>(22.5 + 90) and grad_ang<=(22.5 + 135):
        neighb_1_x, neighb_1_y = i_x-1, i_y + 1
        neighb_2_x, neighb_2_y = i_x + 1, i_y-1

    # Now it restarts the cycle
    elif grad_ang>(22.5 + 135) and grad_ang<=(22.5 + 180):
        neighb_1_x, neighb_1_y = i_x-1, i_y
        neighb_2_x, neighb_2_y = i_x + 1, i_y

    # Non-maximum suppression step
    if width>neighb_1_x>= 0 and height>neighb_1_y>= 0:
        if mag[i_y, i_x]<mag[neighb_1_y, neighb_1_x]:
            mag[i_y, i_x]= 0
            continue
```



```
        if width>neighb_2_x>= 0 and height>neighb_2_y>= 0:
            if mag[i_y, i_x]<mag[neighb_2_y, neighb_2_x]:
                mag[i_y, i_x]= 0

weak_ids = np.zeros_like(img)
strong_ids = np.zeros_like(img)
ids = np.zeros_like(img)

# double thresholding step
for i_x in range(width):
    for i_y in range(height):

        grad_mag = mag[i_y, i_x]

        if grad_mag<weak_th:
            mag[i_y, i_x]= 0
        elif strong_th>grad_mag>= weak_th:
            ids[i_y, i_x]= 1
        else:
            ids[i_y, i_x]= 2

# finally returning the magnitude of
# gradients of edges
return mag


frame = cv2.imread('food.jpeg')

# calling the designed function for
# finding edges
canny_img = Canny_detector(frame)

# Displaying the input and output image
plt.figure()
f, plots = plt.subplots(2, 1)
plots[0].imshow(frame)
plots[1].imshow(canny_img)
```




Output: -

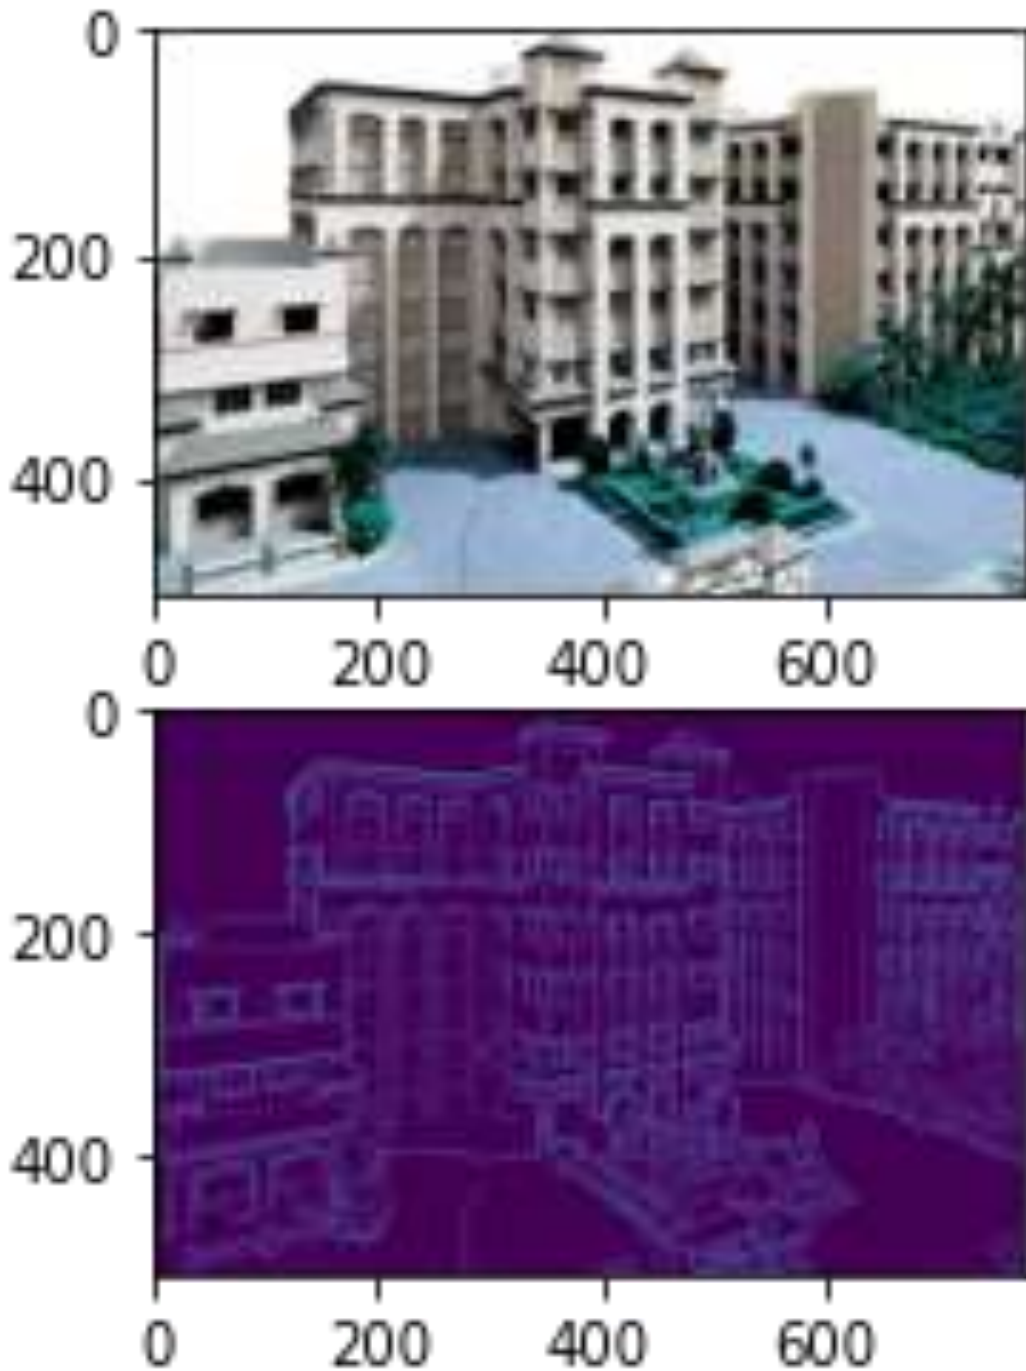



Conclusion:

The Canny edge detection algorithm is a 5 steps process which involves

- 1) Denoise the image with a Gaussian filter.
- 2) Calculate the gradients.
- 3) Apply non-maximum suppression (NMS) on the edges
- 4) Apply a double threshold to all the detected edges to eliminate any false positives
- 5) Analyze all the edges and their connection to each other to keep the real edges and discard the weak ones

After finding Canny edges, we can do further analysis of the edges in order to determine whether they match a common shape, such as a line or a circle.