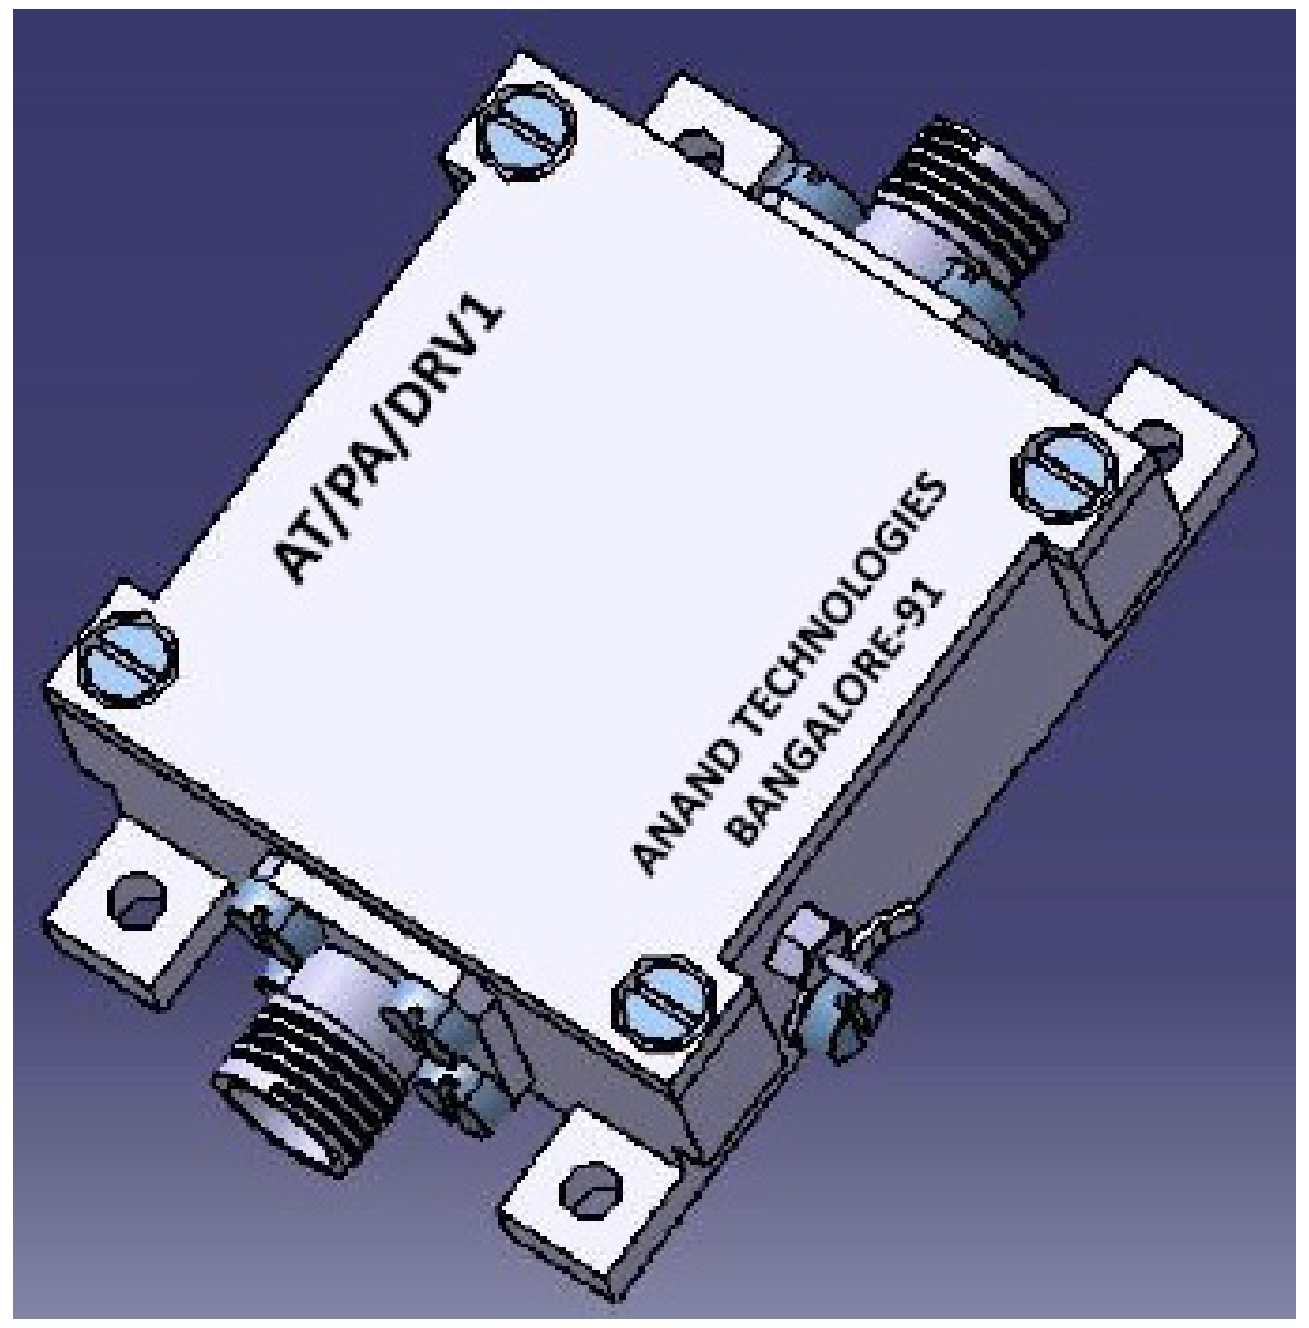

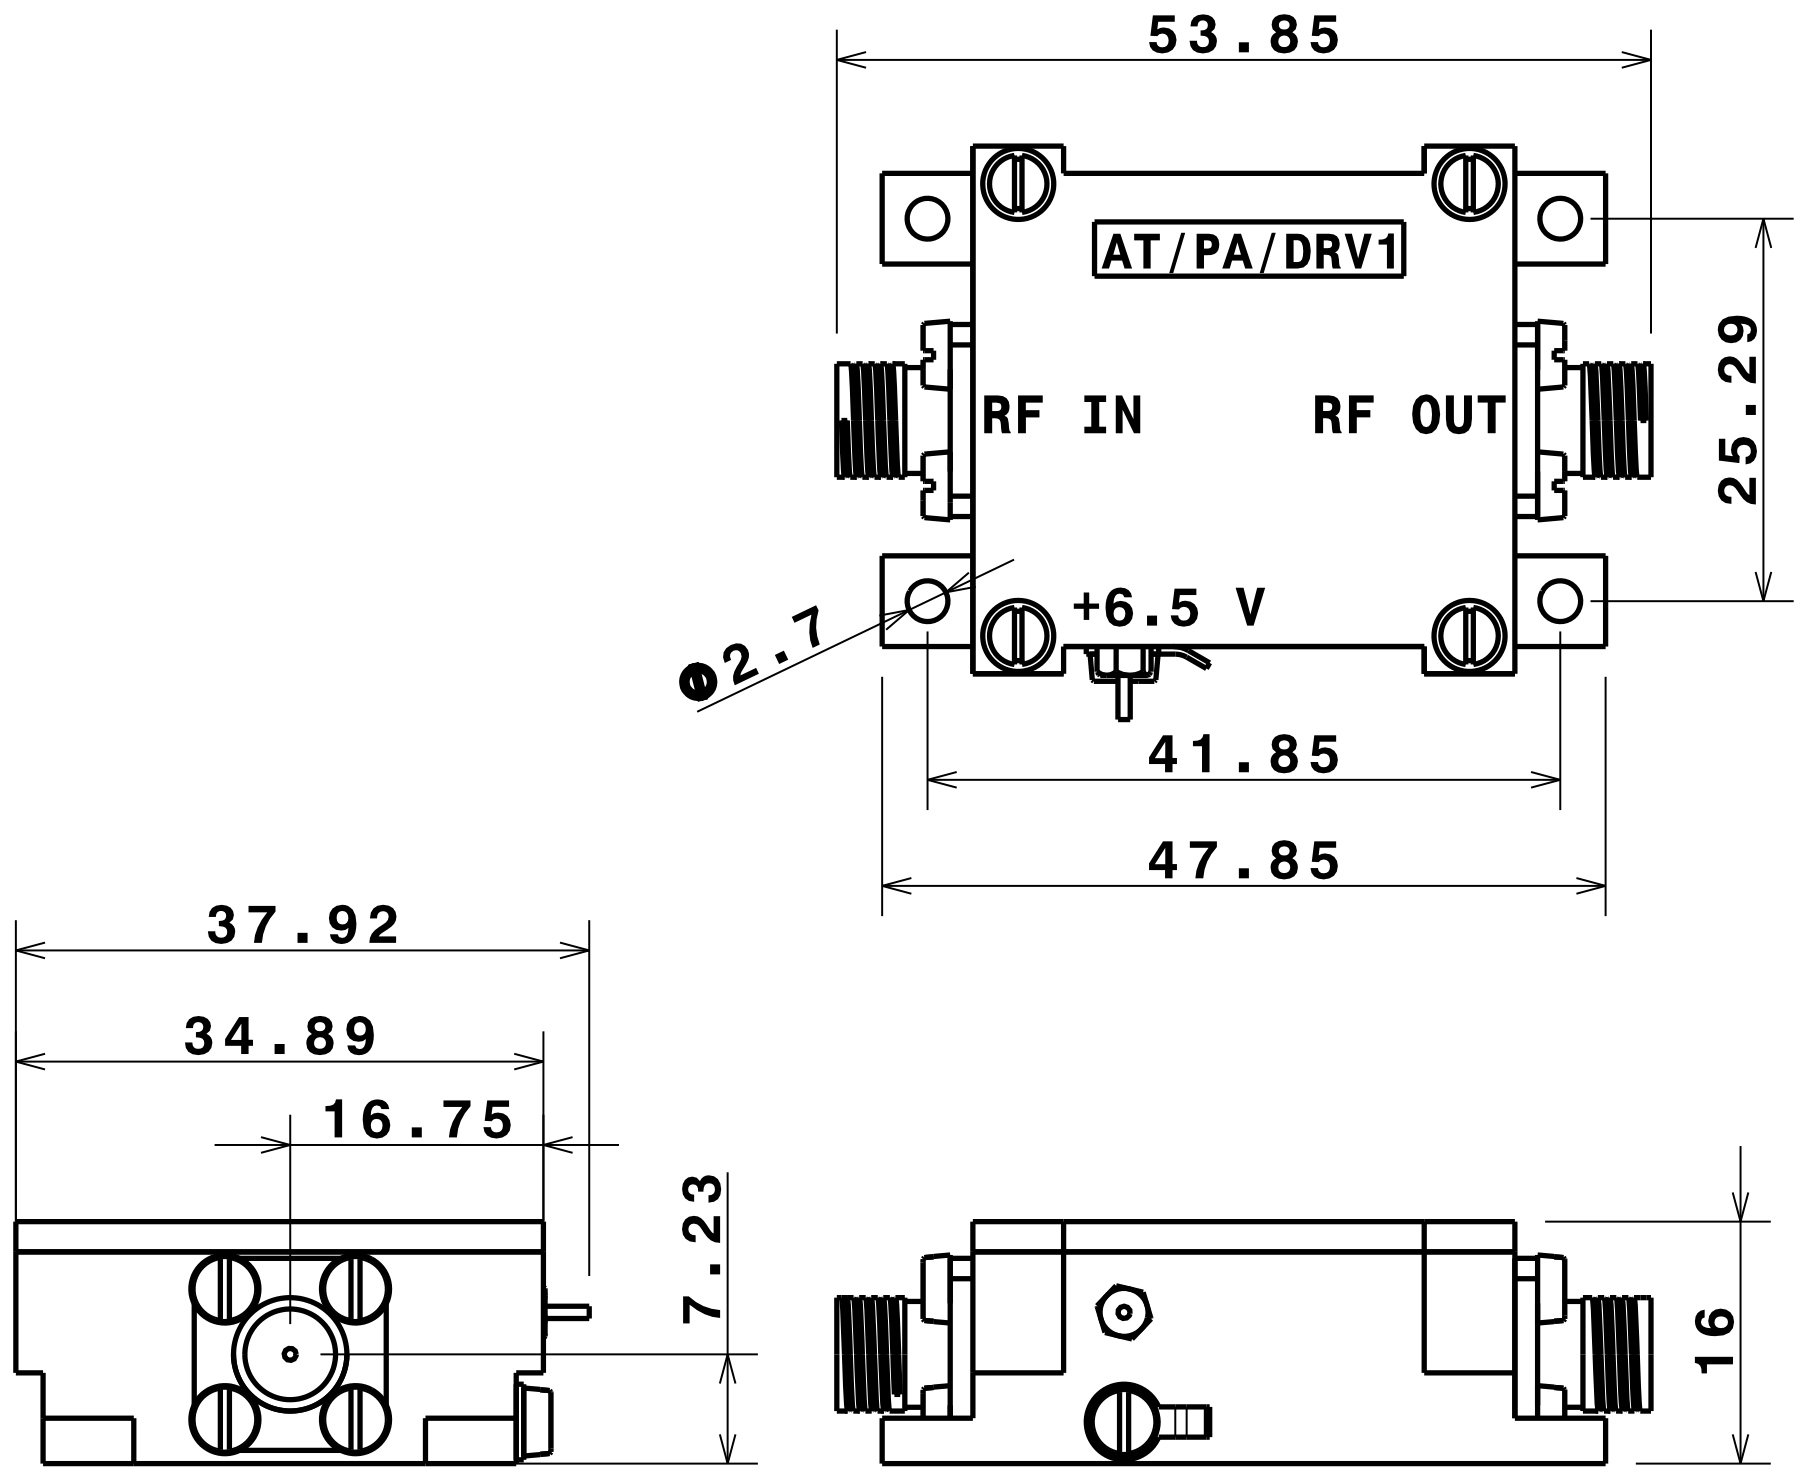

Typical Applications

- Repeaters
- Mobile infrastructure
- LTE, CDMA, GSM, GPRS, WCDMA
- General purpose wireless

Features

- 400 - 2600 MHz
- 20 dB Linear Gain at 2.3 GHz
- 1.5 dB Noise Figure at 2.3 GHz
- 50 Ω Cascadable Gain Block
- Unconditionally Stable
- High Input Power Capability
- Miniature Package

Electrical Specifications (at 25°C)

Operating Frequency Range	400 to 2600 MHz
Linear Gain	20 dB (Min)
Input Return Loss	13 dB
Output Return Loss	10 dB
Output Power (Pout)	+22 dBm (Min), with +6 dBm Power Input
Output IP3	+39 dBm (Typ), Pout = +3 dBm/tone, Δf=1 MHz
Noise Figure	1.5 dB (Max)
In / Out Connector	SMA (F)
Power Supply	+6.5 V , 140 mA (Max)
Operating Temperature	-30 to +55°C
Finish	Al Alloy Housing
Heat Transfer	Through Base Plate mounted on external heat sink

General Description

The AT/PA/DRV1 is a cascadable high linearity gain block amplifier packaged in a miniature housing, operating on single supply with inbuilt regulator. The AT/PA/DRV1 covers 0.4 to 2.6 GHz frequency band and is targeted for wireless infrastructure or other applications requiring high linearity and low noise figure.

DESIGNED BY: GURU BIRADAR
DATE: 02/08/2017
CHECKED BY: Mr. S. METRI
DATE: 02/08/2017

Linear Gain Amplifier

SIZE: A3

ANAND TECHNOLOGIES

SCALE: 1:1 | WEIGHT (kg): NA | DRAWING NUMBER: AT/PA/DRV1 | SHEET: 1/1

I	_
H	_
G	_
F	_
E	_
D	_
C	_
B	_
A	_