



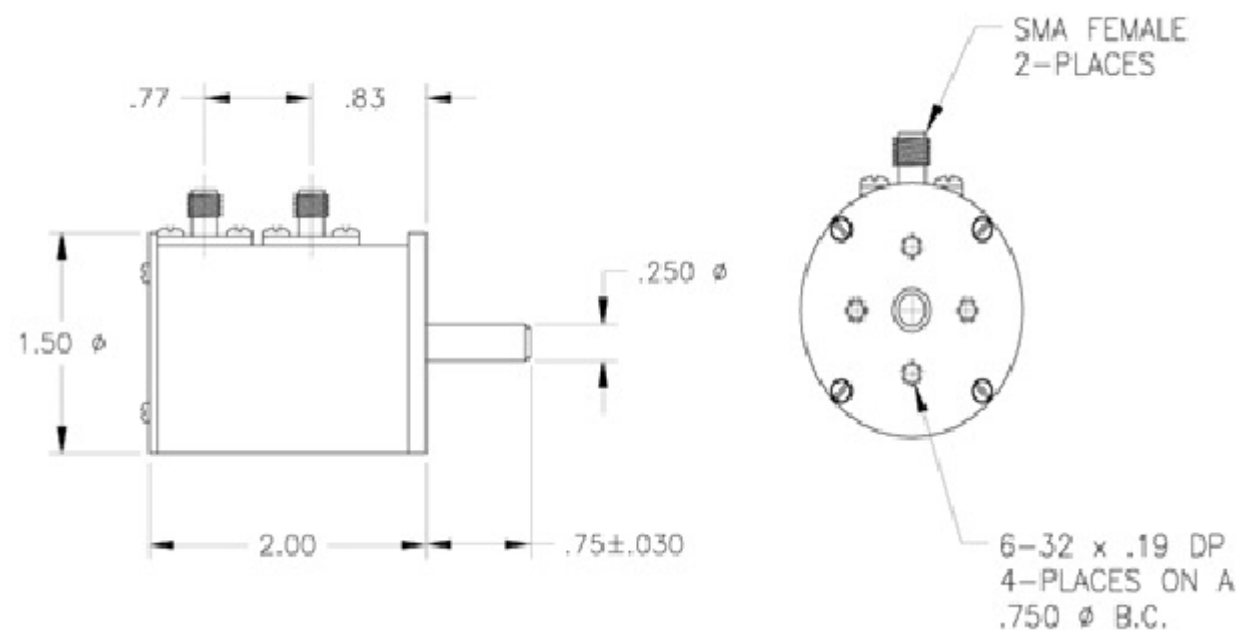

Specification

Part No	:	AT-VA-SR-8000-60
Frequency Range	:	DC-8000 MHz
Impedance	:	50 Ω
Attenuation Range	:	0-60 dB
Attenuation Step	:	6 dB
VSWR	:	1.3:1 max DC-4000MHz 1.6:1 max 4000-8000MHz
Insertion loss	:	0.7dB maximum
Attenuation Accuracy	:	± 0.5 dB or 2% DC-4000MHz ± 1.0 dB or 3% 4000-8000MHz
RF Input Power	:	2 watts average 200 watts peak
Direction of Rotation	:	Attenuation increases in clockwise direction
Indexing	:	36 degree with stops at minimum and maximum settings
RF Connector	:	SMA Female
Operating Temperature	:	-20 to +85(°C)



DESIGNED BY: Kiran Kumar		AT - VA - SR - 8000 - 60		I	—
DATE: 15/12/2016				H	—
CHECKED BY: SM				G	—
DATE: 16/12/2016				F	—
SIZE A3		ANAND TECHNOLOGIES		E	—
SCALE 1 : 1	WEIGHT (kg)			D	—
DRAWING NUMBER AT - VA - SR - 8000 - 60		SHEET 1 / 1		C	—
This drawing is our property; it can't be reproduced or communicated without our written agreement.				B	—
				A	—

This drawing is our property; it can't be reproduced or communicated without our written agreement.