

4

4

Electricl Specification






Part No	:	AT-MF-1090	AT-MF-4460	AT-MF-4700	AT-MF-4940
Center Frq(MHz)	:	1090	4460	4700	4940
Pass Bandwidth(MHz)	:	(1085-1095)	(4400-4520)	(4640-4760)	(4880-5000)
Insertion Loss at F0	:	2.5 dB Max	0.8dB Max	0.8dB Max	0.8dB Max
Ripple in Pass Band	:	±0.1 dB Max	±0.1 dB Max	±0.1 dB Max	±0.1 dB Max
Return Loss	:	20 dB Min	17.7 Min	17.7 Min	17.7 Min
80 dB Bandwidth(MHZ)	:	-	(4300-4620)	(4540-4860)	(4780-5100)
2nd Harmonic rejection:		60dB Min	-	-	-
rejection at 2fc&3fc	:	-	80 dB Min	80 dB Min	80 dB Min
Nominal Impedance	:	50 Ω	50 Ω	50 Ω	50 Ω
Power Handling capacity	:	10 W Max	50 W Max	50 W Max	50 W Max

3


Mechanical Specification

Material	:	Aluminium
Finish	:	Silver Plating & Silver lockaring

2

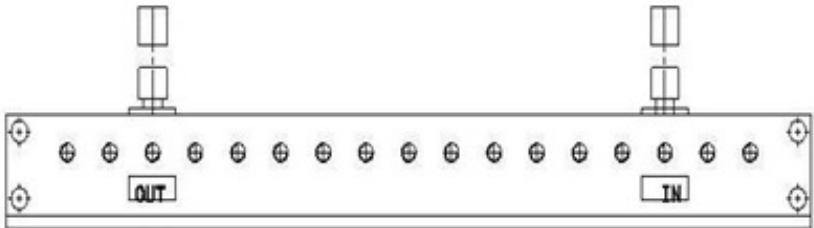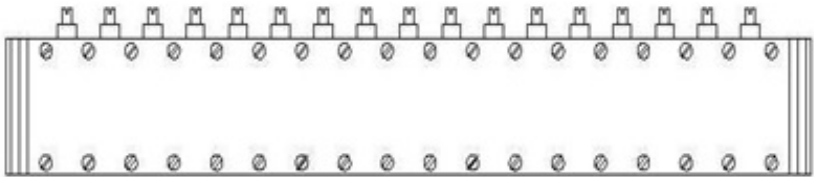

1

DESIGNED BY: Kiran Kumar		BANDPASS FILTER		I	-
DATE: 15/12/2016				H	-
CHECKED BY: Mr. S. Metri				G	-
DATE: 16/12/2016		ANAND TECHNOLOGIES		F	-
SIZE A3				E	-
SCALE 1 : 1	WEIGHT (kg) XXX	DRAWING NUMBER BANDPASS FILTER		D	-
				C	-
				B	-
				A	-
This drawing is our property; it can't be reproduced or communicated without our written agreement.					