




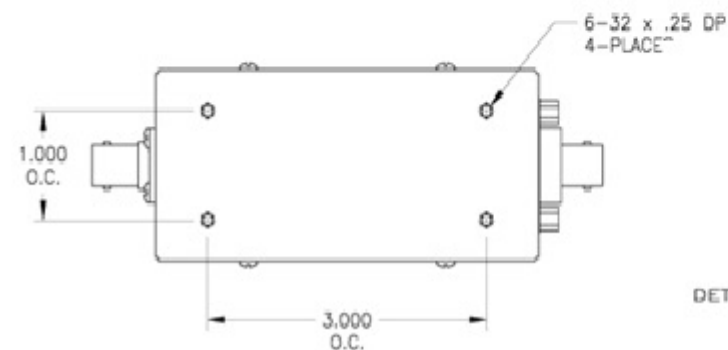


Specification

Part No	:	AT-PA-500
Frequency Range	:	20-500 MHz
Impedance	:	50 Ω
Attenuation Range	:	0-63 dB in 1dB step
Attenuation Step	:	1, 2, 4, 6, 8 and 32 dB
VSWR	:	1.5:1 max DC-1000MHz
Phase Shift	:	$\pm 5^\circ$ maximum at any setting
Insertion loss	:	3dB maximum
Attenuation Accuracy	:	± 0.5 dB or 2% of programmed
RF Input Power	:	10 dBm avg
Switching Speed	:	2 micro seconds maximum 1.5 micro seconds typical
Direction of Rotation	:	Attenuation increases in clockwise direction
Indexing	:	30 degree with stops at minimum and maximum
RF Connector	:	SMA Female
Operating Temperature	:	-20 to +85($^\circ$ C)

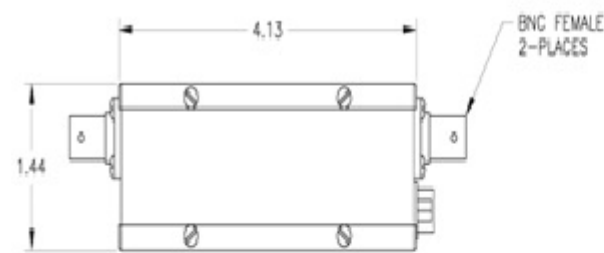

PIN	FUNCTION
1	1dB TTL CONTROL
2	2dB TTL CONTROL
3	4dB TTL CONTROL
4	8dB TTL CONTROL
5	16dB TTL CONTROL
6	32dB TTL CONTROL
7	
8	GROUND
9	+5 Vdc

DESIGNED BY: Kiran Kumar		AT - PA - 500		I	—
DATE: 15/12/2016				H	—
CHECKED BY: SM				G	—
DATE: 16/12/2016				F	—
SIZE A3		ANAND TECHNOLOGIES		E	—
SCALE 1:1				D	—
WEIGHT (kg)		AT - PA - 500		C	—
DRAWING NUMBER				B	—
				A	—
This drawing is our property; it can't be reproduced or communicated without our written agreement.					