

Specification

Part No : AT-PA-6000

Frequency Range : 200-6000 MHz

Impedance : 50 Ω

Attenuation Range : 0-63 dB in 1dB step

Attenuation Step : 1, 2, 4, 8, 16 and 32 dB

VSWR : 1.8:1 max 200-800MHz

: 1.5:1 max 800-6000MHz

Insertion loss : 5.5dB maximum

: 2.6 dB typical @200

: 3dB typical @800/3.5dB typical@2000

: 5 dB typical @6000

Attenuation Accuracy : ±0.5 dB 1-7dB

: ±1 dB 8-11dB

: ±1.25dB or4% 12-63dB

RF Input Power : 20 dBm operating

: 25 dBm (no damage)

Switching Speed : 1 micro seconds maximum


: 0.7 micro seconds typical

DC Supply : 5V DC @50mA Nominal


DC Connector : T & B #609-1007

RF Connector : SMA Female

Operating Temperature : -40 to +85(°C)

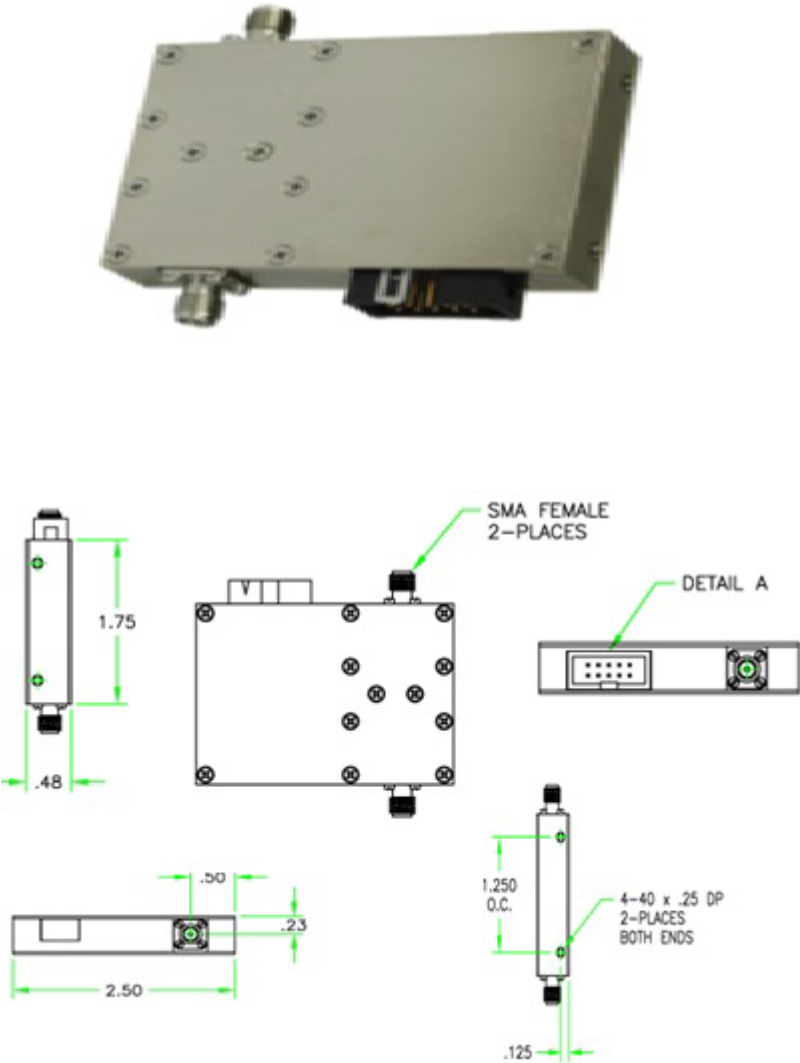

PIN	FUNCTION
1	1dB TTL CONT.
2	2dB TTL CONT.
3	4dB TTL CONT.
4	8dB TTL CONT.
5	16dB TTL CONT.
6	32dB TTL CONT.
7	NO CONNECTION
8	NO CONNECTION
9	DC SUPPLY
10	GROUND

DESIGNED BY: Kiran Kumar		AT - PA - 6000	I	-
DATE: 15/12/2016			H	-
CHECKED BY: SM			G	-
DATE: 16/12/2016			F	-
SIZE A3		ANAND TECHNOLOGIES	E	-
SCALE 1 : 1			D	-
WEIGHT (kg)		DRAWING NUMBER AT - PA - 6000	C	-
			SHEET 1 / 1	B
This drawing is our property; it can't be reproduced or communicated without our written agreement.			A	-