CORONA
— RESORT & CASINO —

Slot Machine Department


SC Series Bill Acceptor Configurations

Technical Luke


January 1, 2025




- Click the Cashflow STS Application to open the file.
- Make sure USB Netplex is connected between Bill Validator and Computer.

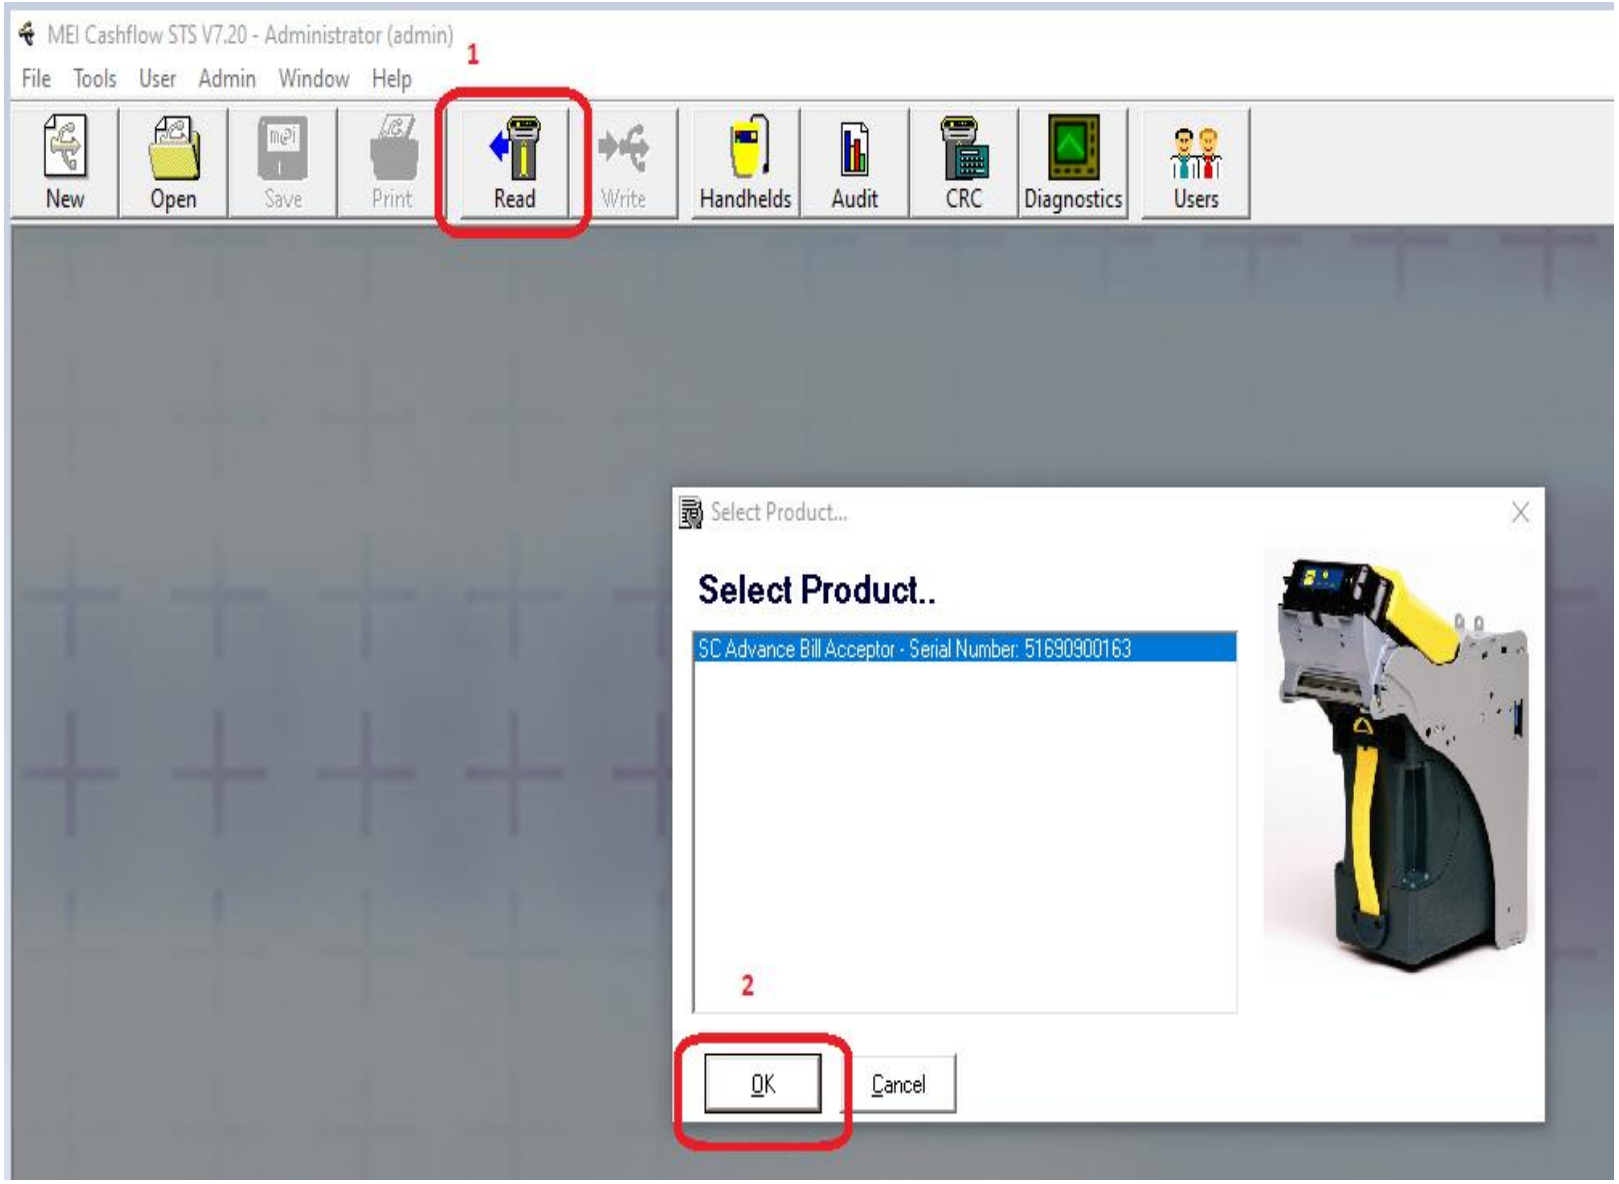


- **Click “Read” to show the configuration then click OK**

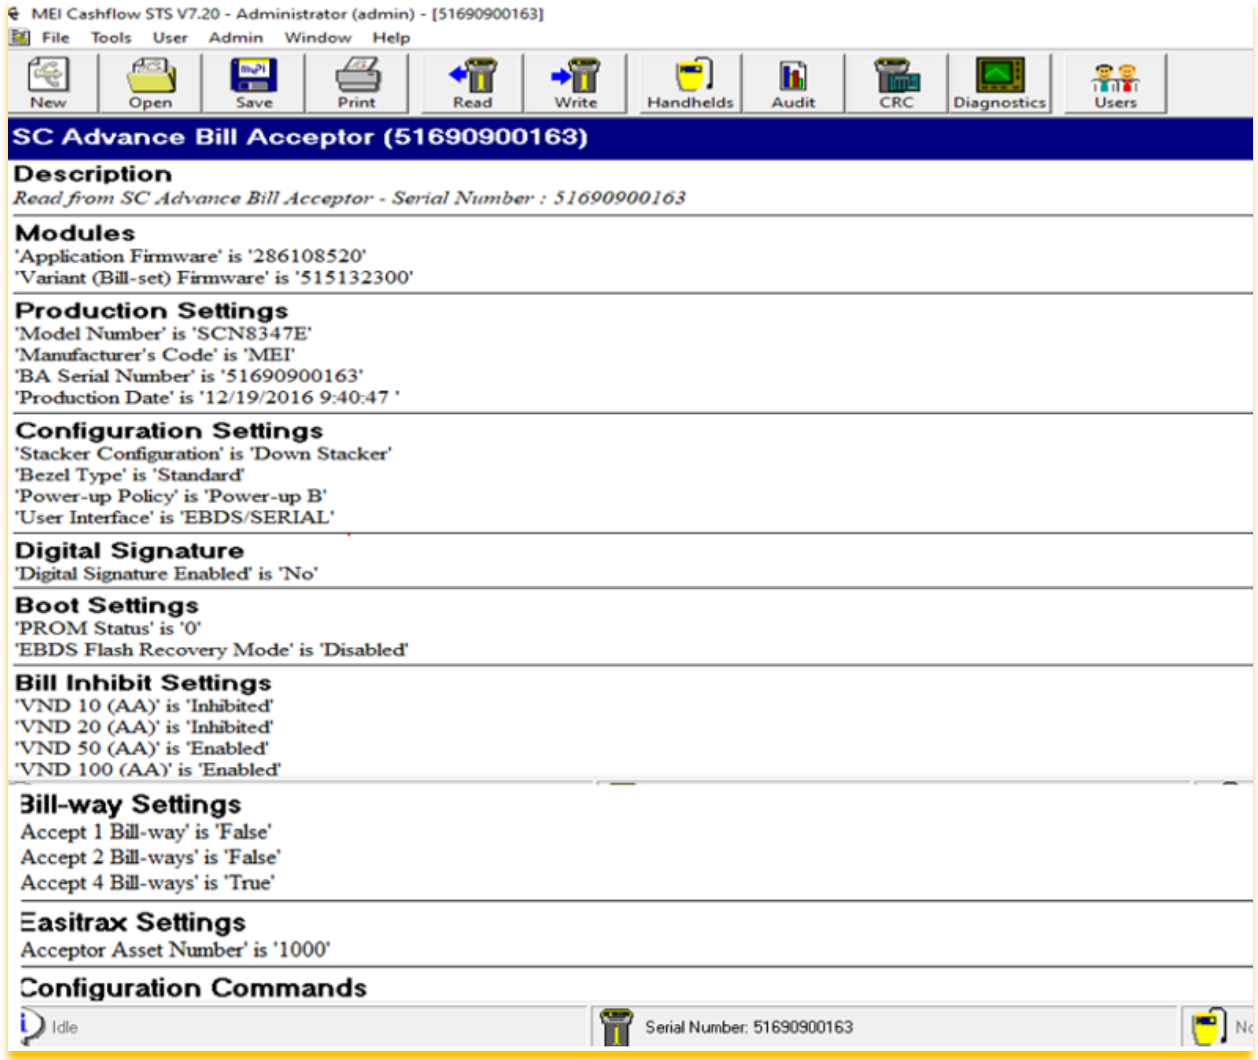


This is what shows when you press “Read”, this will read all the configurations information that has been loaded into Bill Validator.

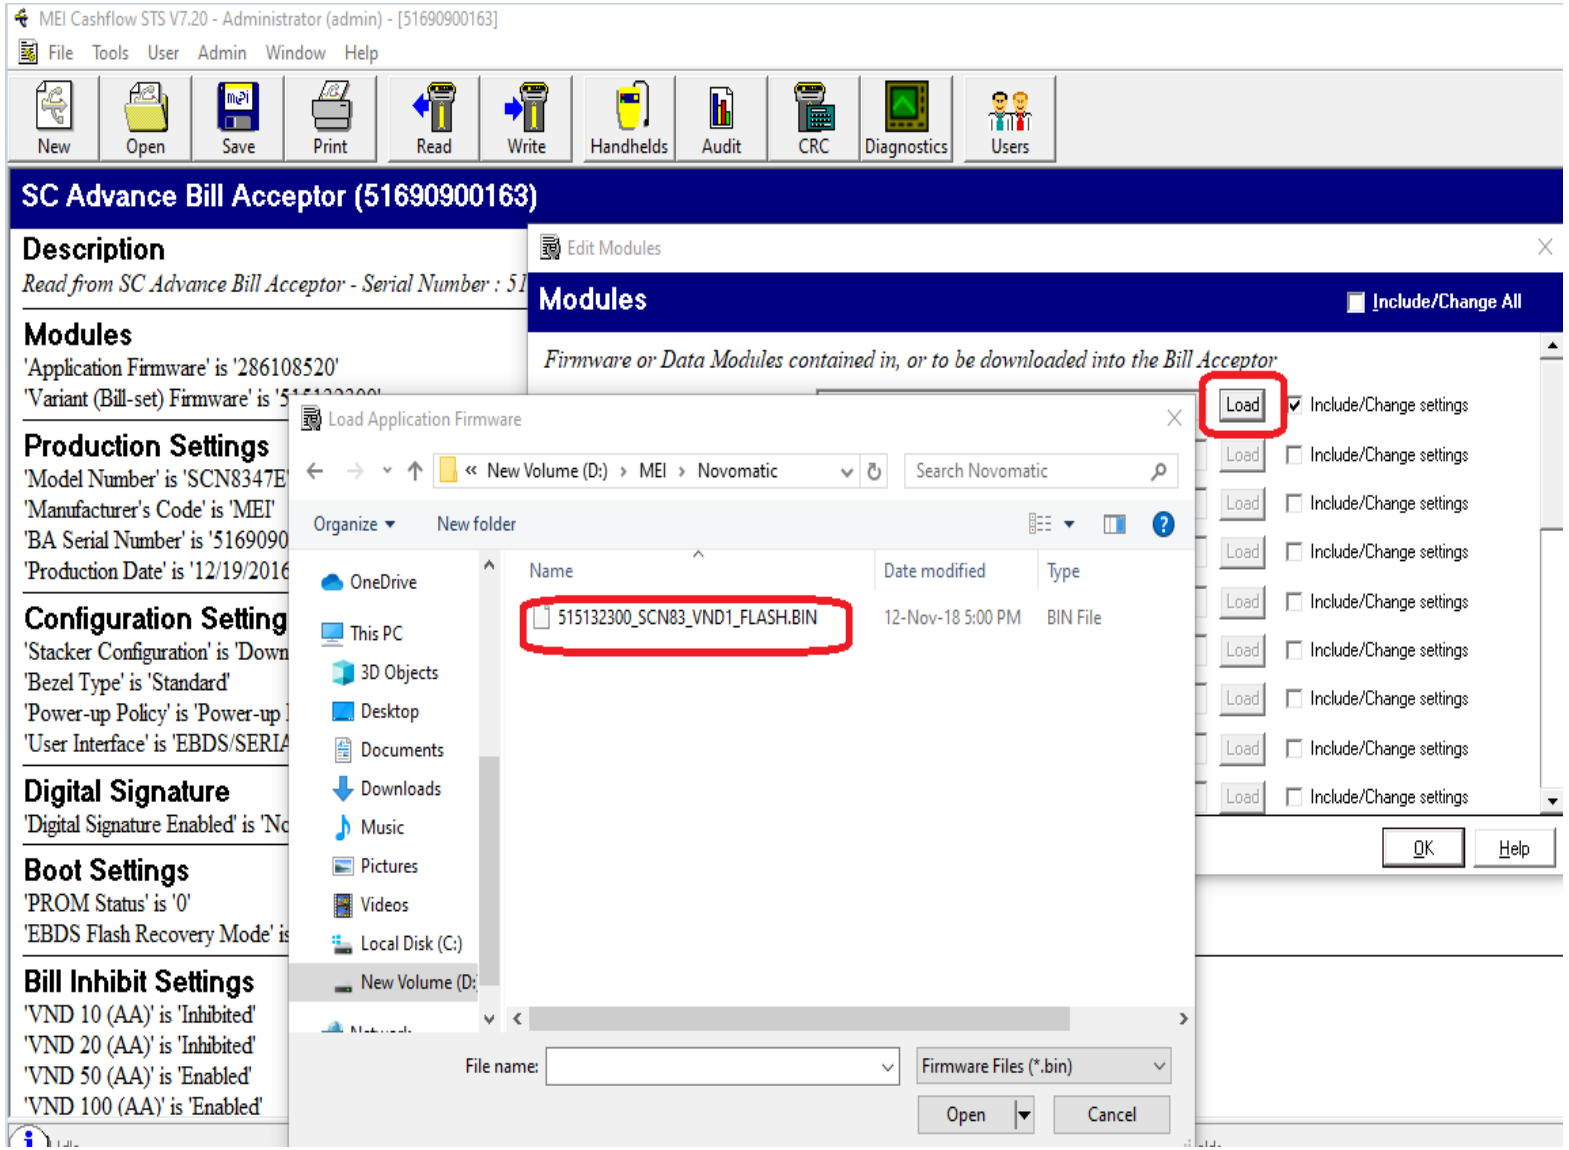


Once click “Load” you will find the application firmware version (depending on the manufacturers) you want to load.

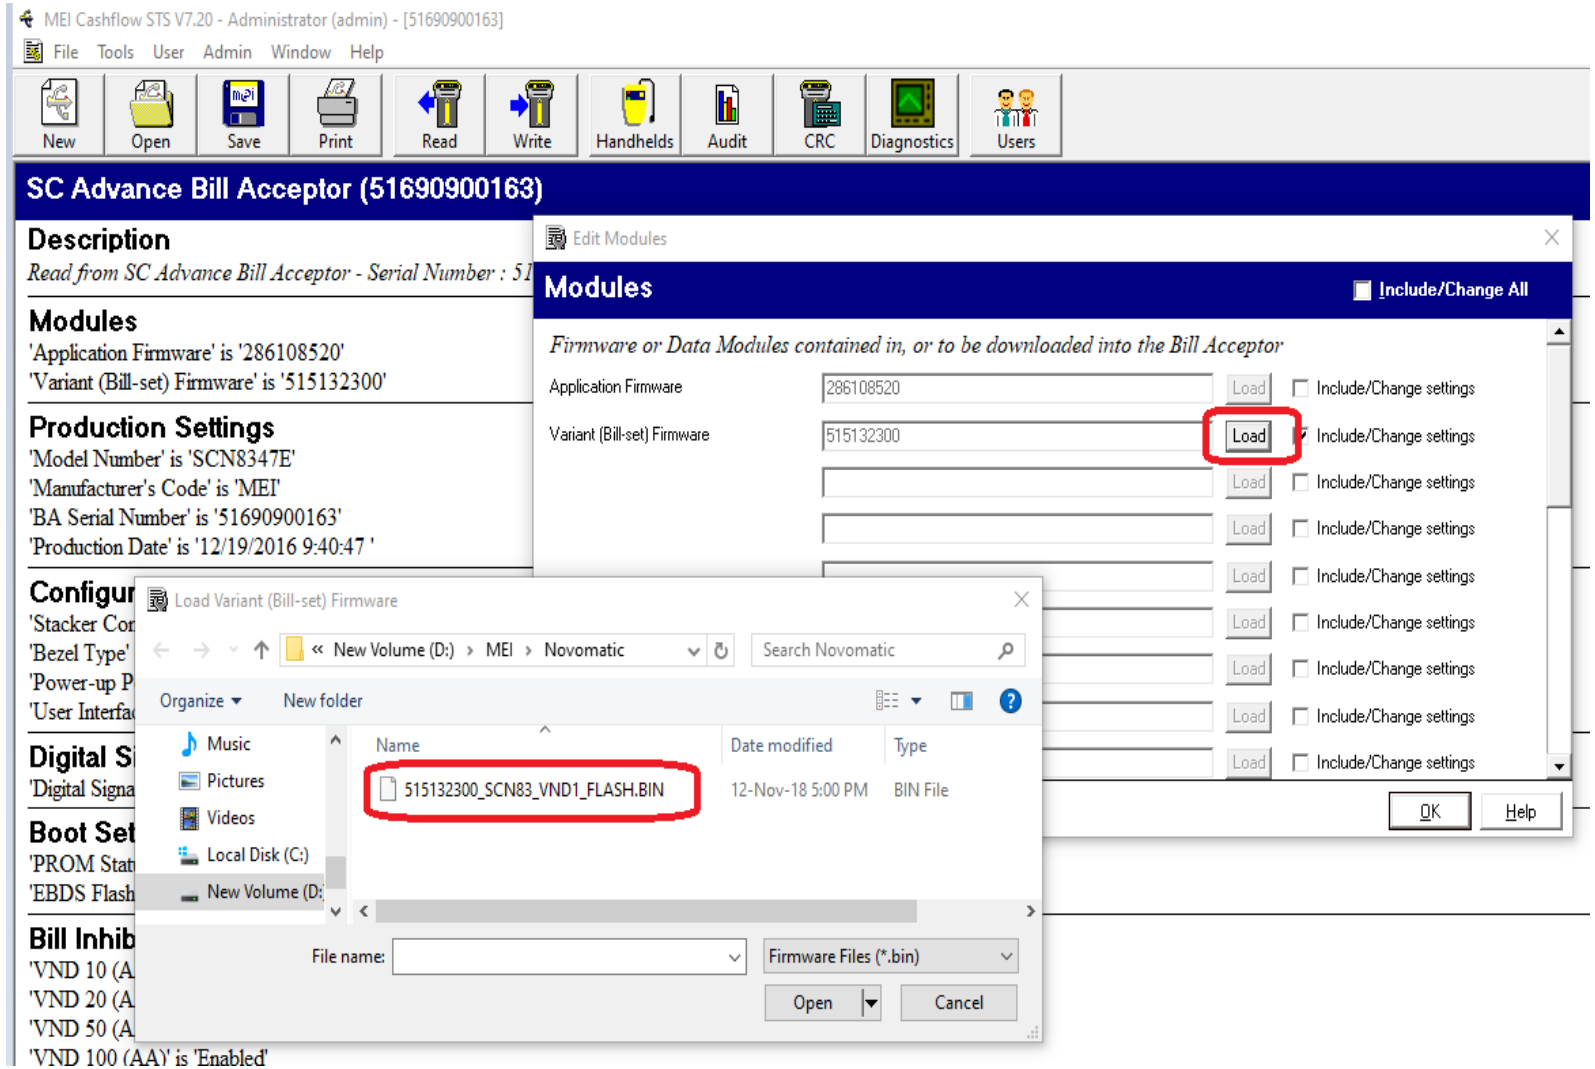


Once click “Load” you will find the Variant firmware version (depending on the manufacturers) you want to load.

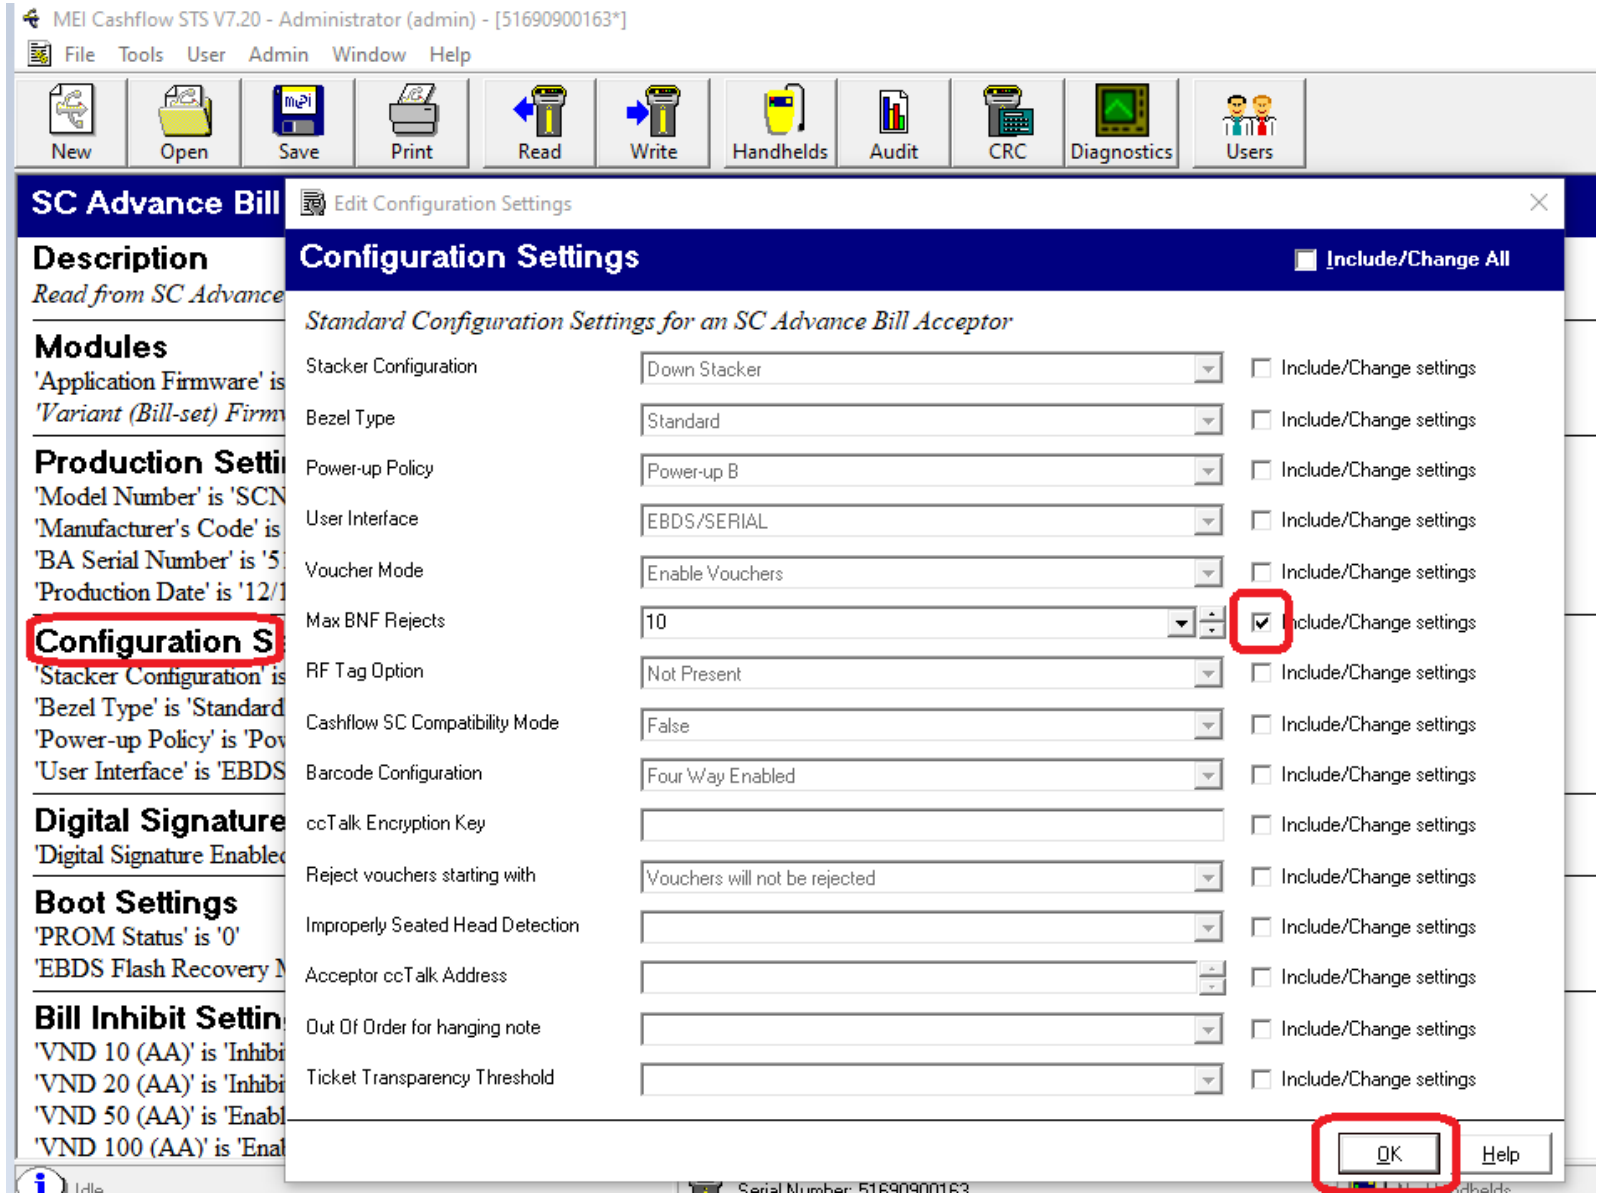

MEI Cashflow STS V7.20 - Administrator (admin) - [51690900163*]
File Tools User Admin Window Help
New Open Save Print Read Write Handhelds Audit CRC Diagnostics Users
SC Advance Bill
Description
Read from SC Advance
Modules
'Application Firmware' is
'Variant (Bill-set) Firmv
Production Setti
'Model Number' is 'SCN
'Manufacturer's Code' is
'BA Serial Number' is '5
'Production Date' is '12/1
Configuration S
'Stacker Configuration' is
'Bezel Type' is 'Standard
'Power-up Policy' is 'Pov
'User Interface' is 'EBDS
Digital Signature
'Digital Signature Enable
Boot Settings
'PROM Status' is '0'
'EBDS Flash Recovery M
Bill Inhibit Settin
'VND 10 (AA)' is 'Inhibi
'VND 20 (AA)' is 'Inhibi
'VND 50 (AA)' is 'Enabl
'VND 100 (AA)' is 'Enal
Idle
Edit Configuration Settings
Configuration Settings
Include/Change All
Standard Configuration Settings for an SC Advance Bill Acceptor
Stacker Configuration
Down Stacker
Include/Change settings
Bezel Type
Standard
Include/Change settings
Power-up Policy
Power-up B
Include/Change settings
User Interface
EBDS/SERIAL
Include/Change settings
Voucher Mode
Enable Vouchers
Include/Change settings
Max BNF Rejects
10
Include/Change settings
RF Tag Option
Not Present
Include/Change settings
Cashflow SC Compatibility Mode
False
Include/Change settings
Barcode Configuration
Four Way Enabled
Include/Change settings
ccTalk Encryption Key
Include/Change settings
Reject vouchers starting with
Vouchers will not be rejected
Include/Change settings
Improperly Seated Head Detection
Include/Change settings
Acceptor ccTalk Address
Include/Change settings
Out Of Order for hanging note
Include/Change settings
Ticket Transparency Threshold
Include/Change settings
OK
Help
Serial Number: 51690900163

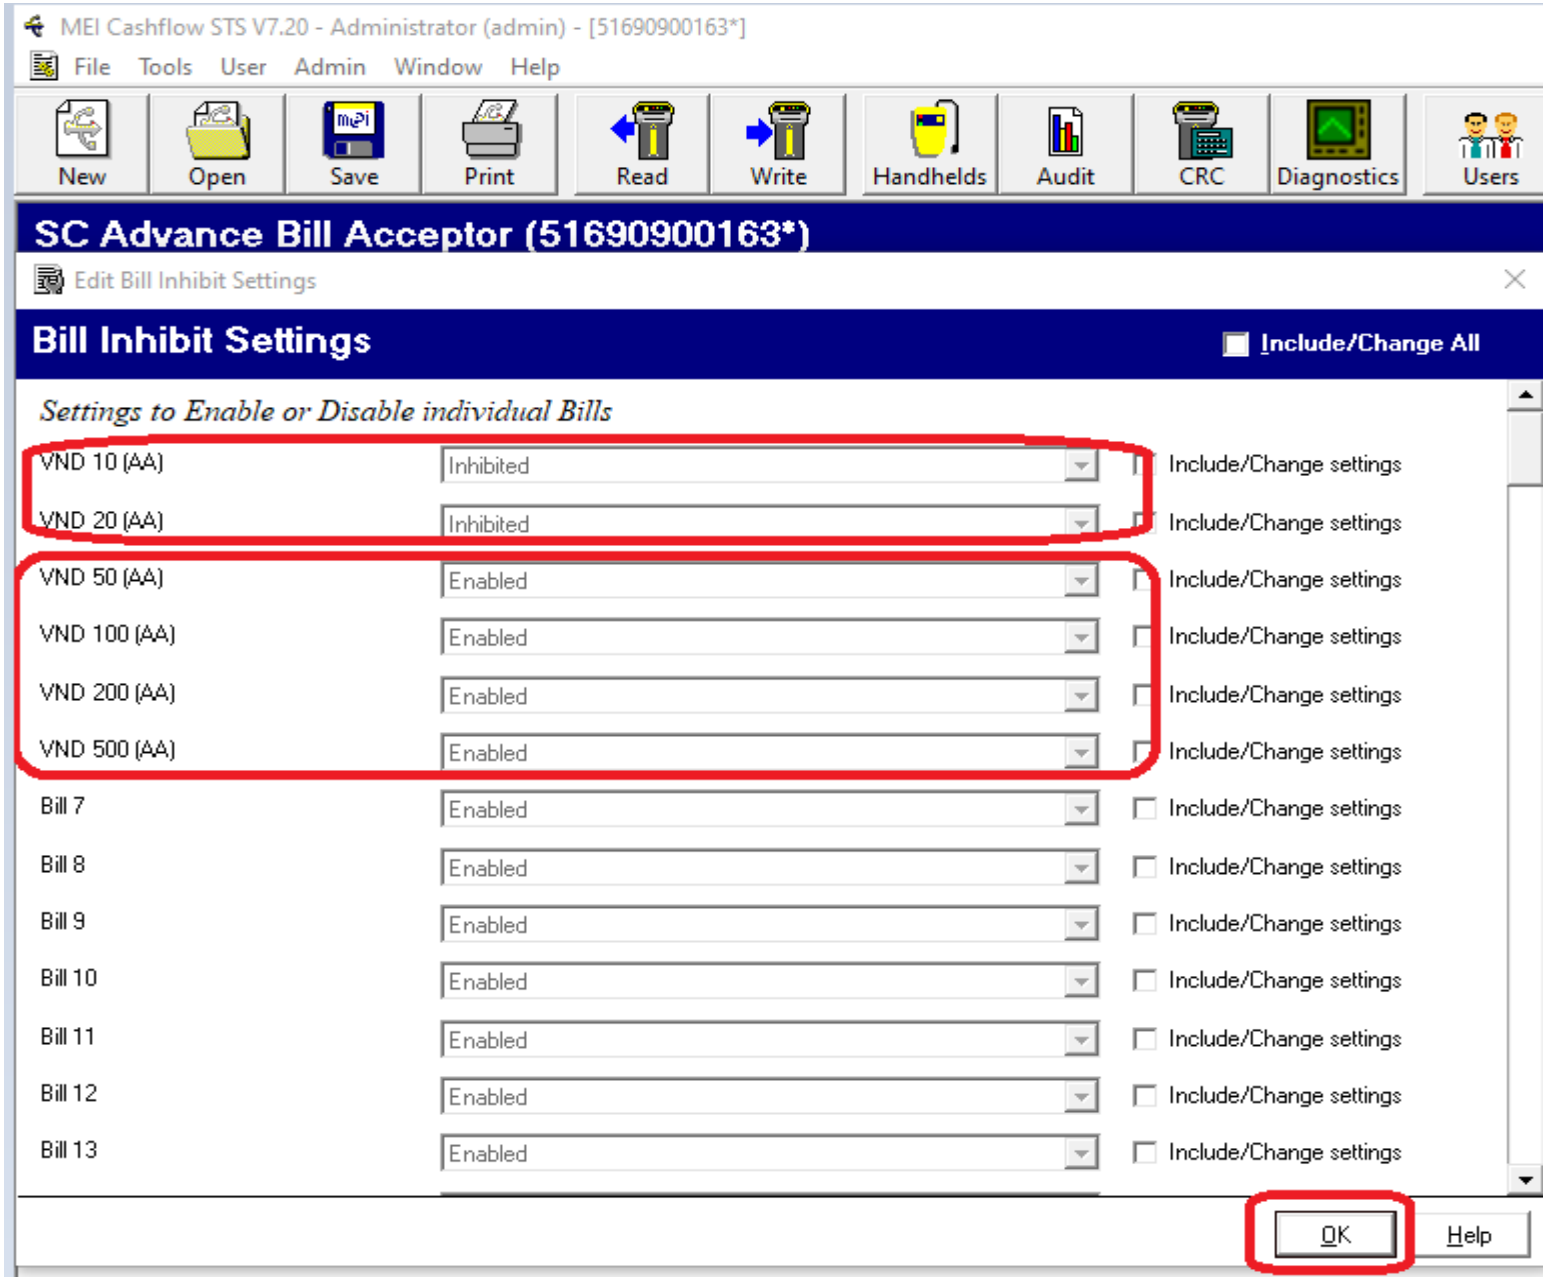


On the Bill Inhibit Settings' it all depends on the operator which exactly the bills you want to enable and disable. Please don't forget to tick the box then press Ok.

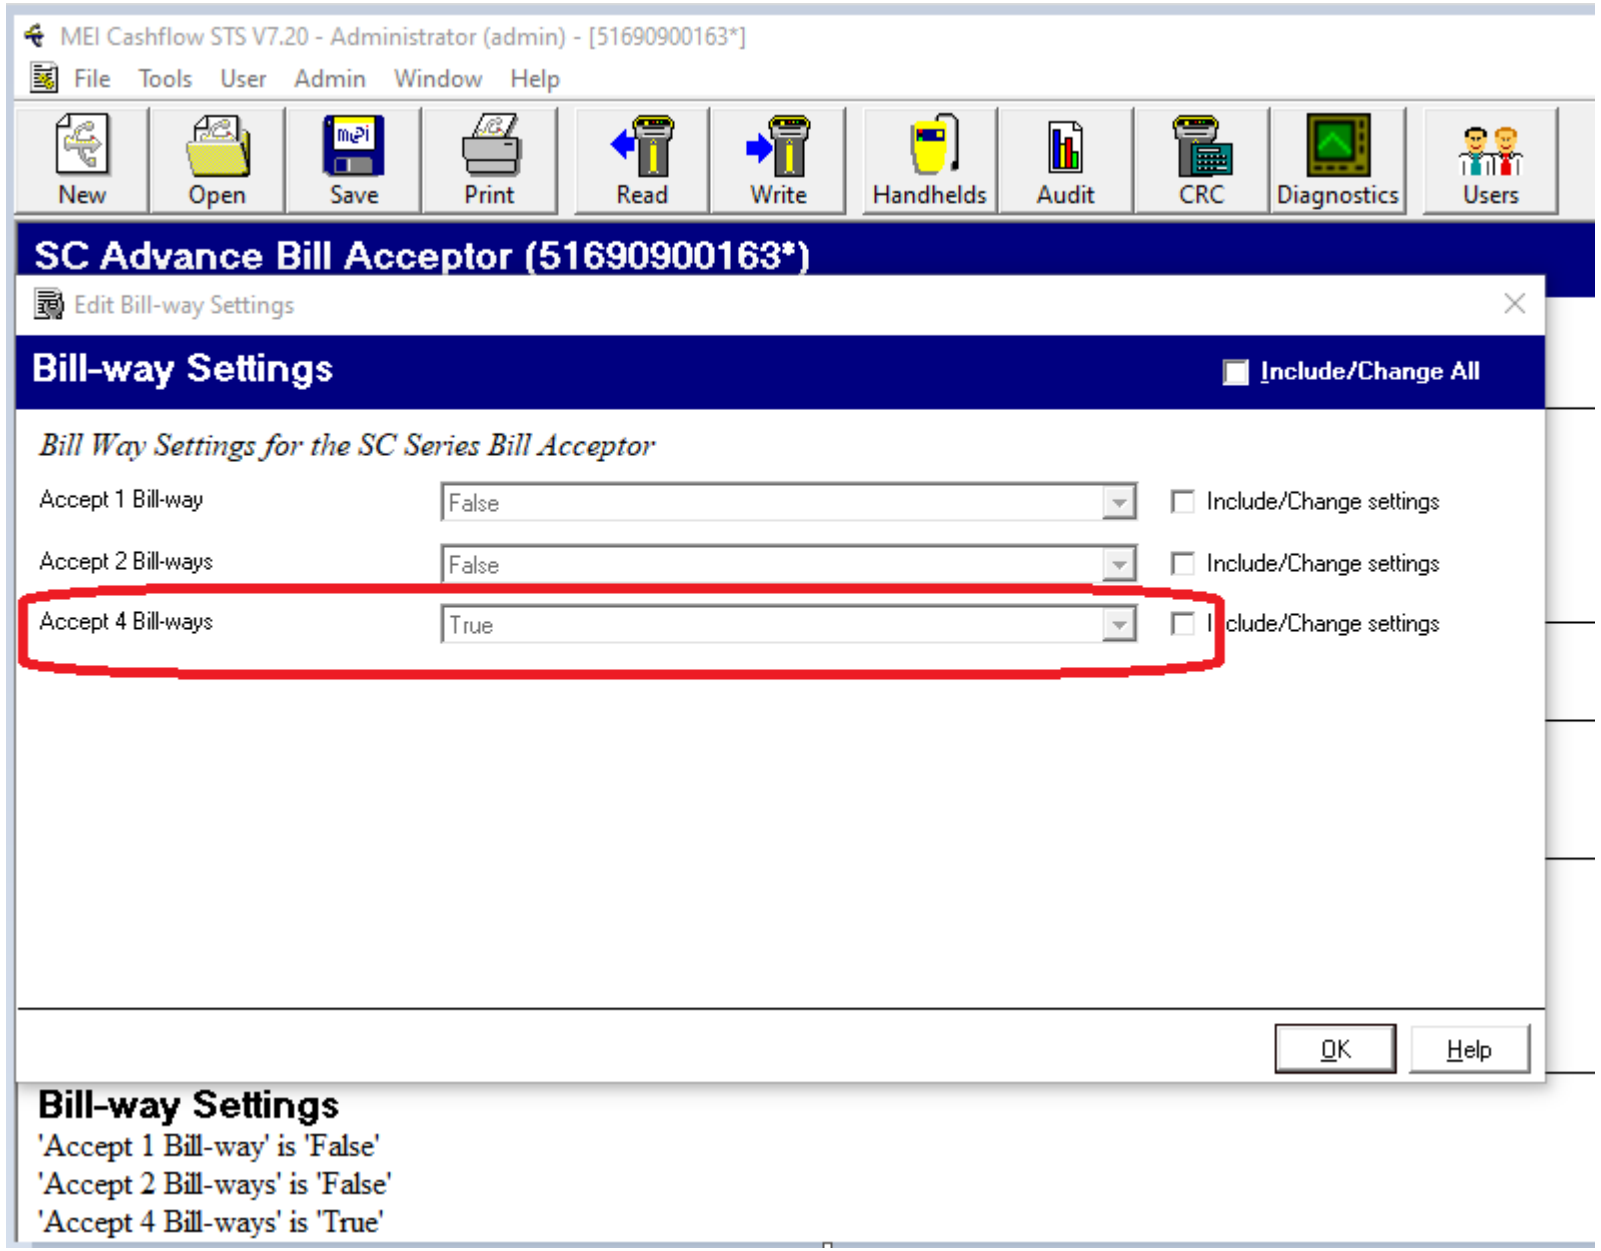

For the Bill way settings, you have to select the “Accept4 Bill-ways and set to True then click OK.

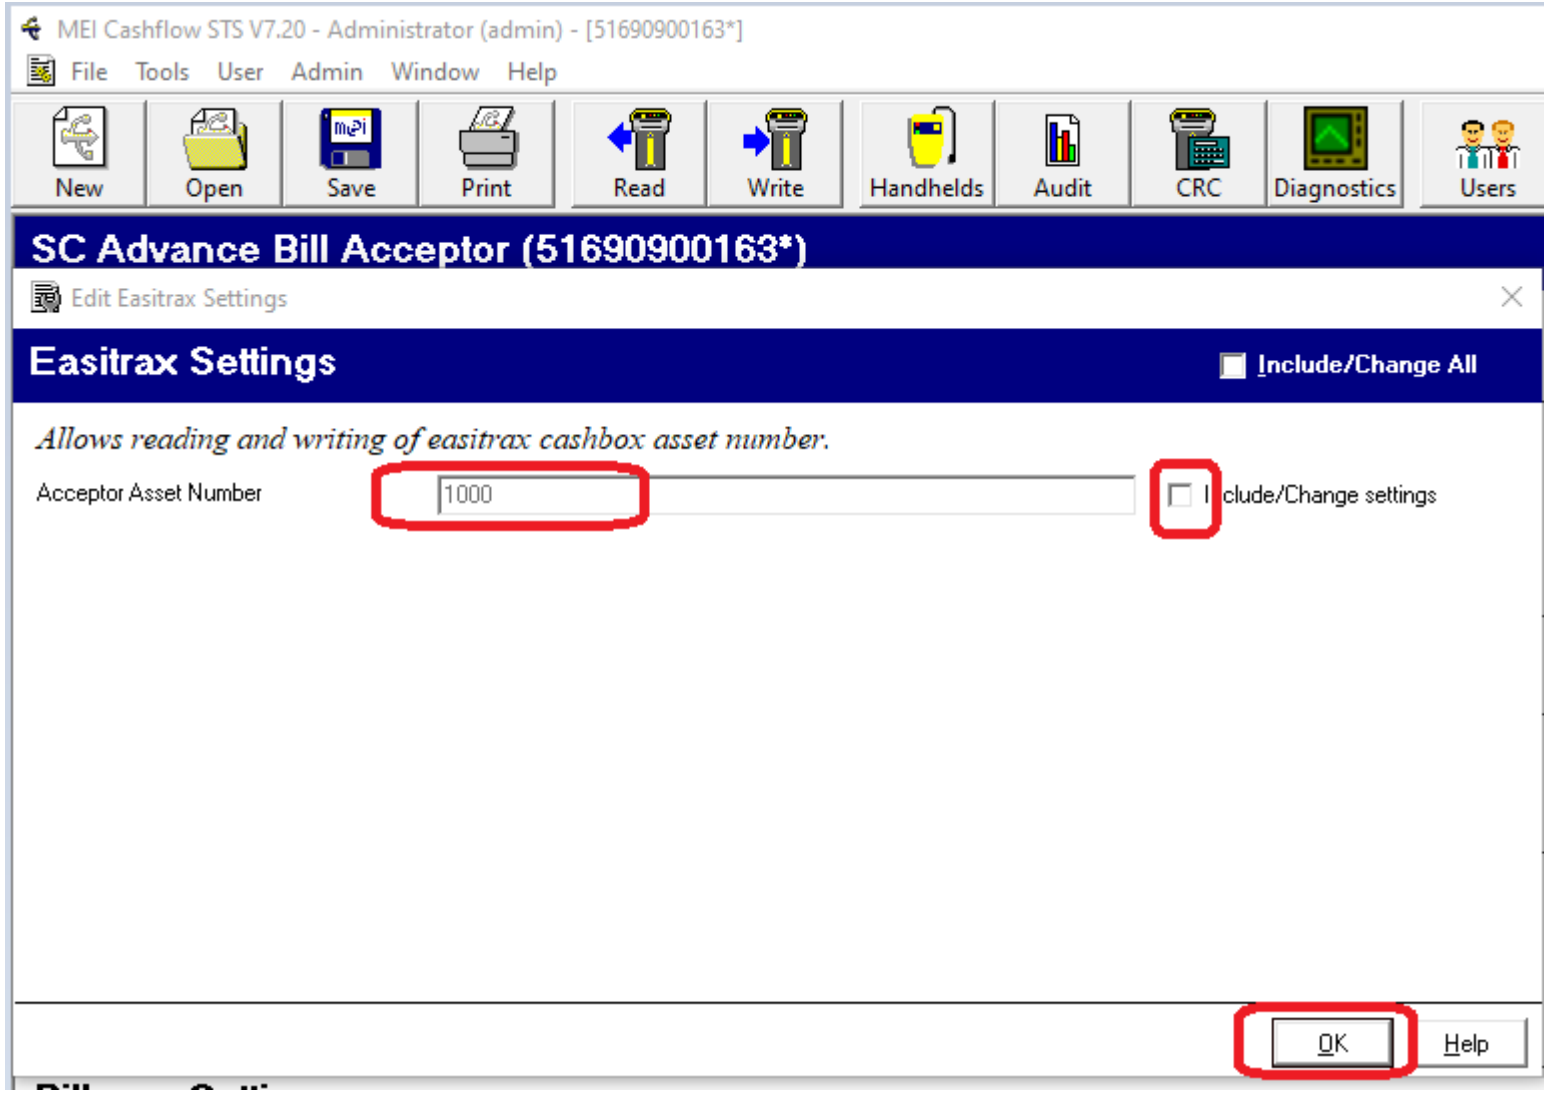


Set the Acceptor Asset Number similar as the Asset Number of the EGM

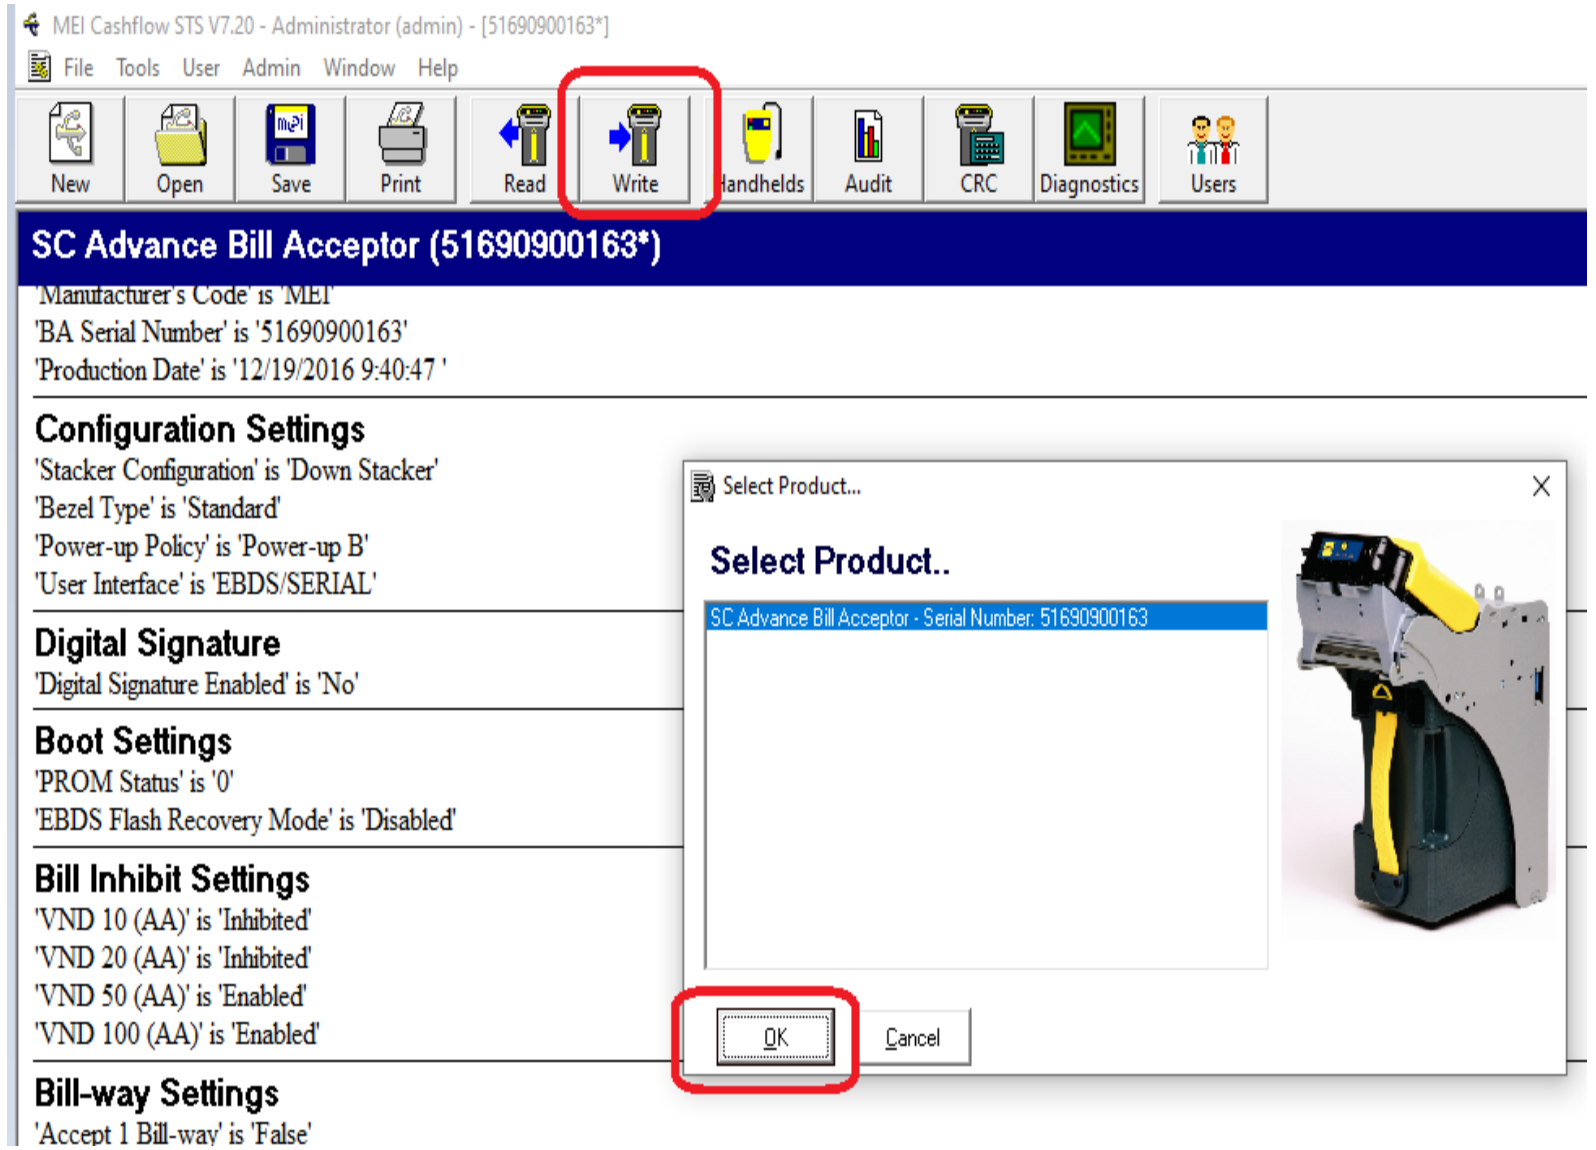


Please don't forget to "WRITE", meaning you are saving all the settings you have made then press OK.

You can re-checked all the setting by clicking READ again and you will see the correct application firmware you have loaded.

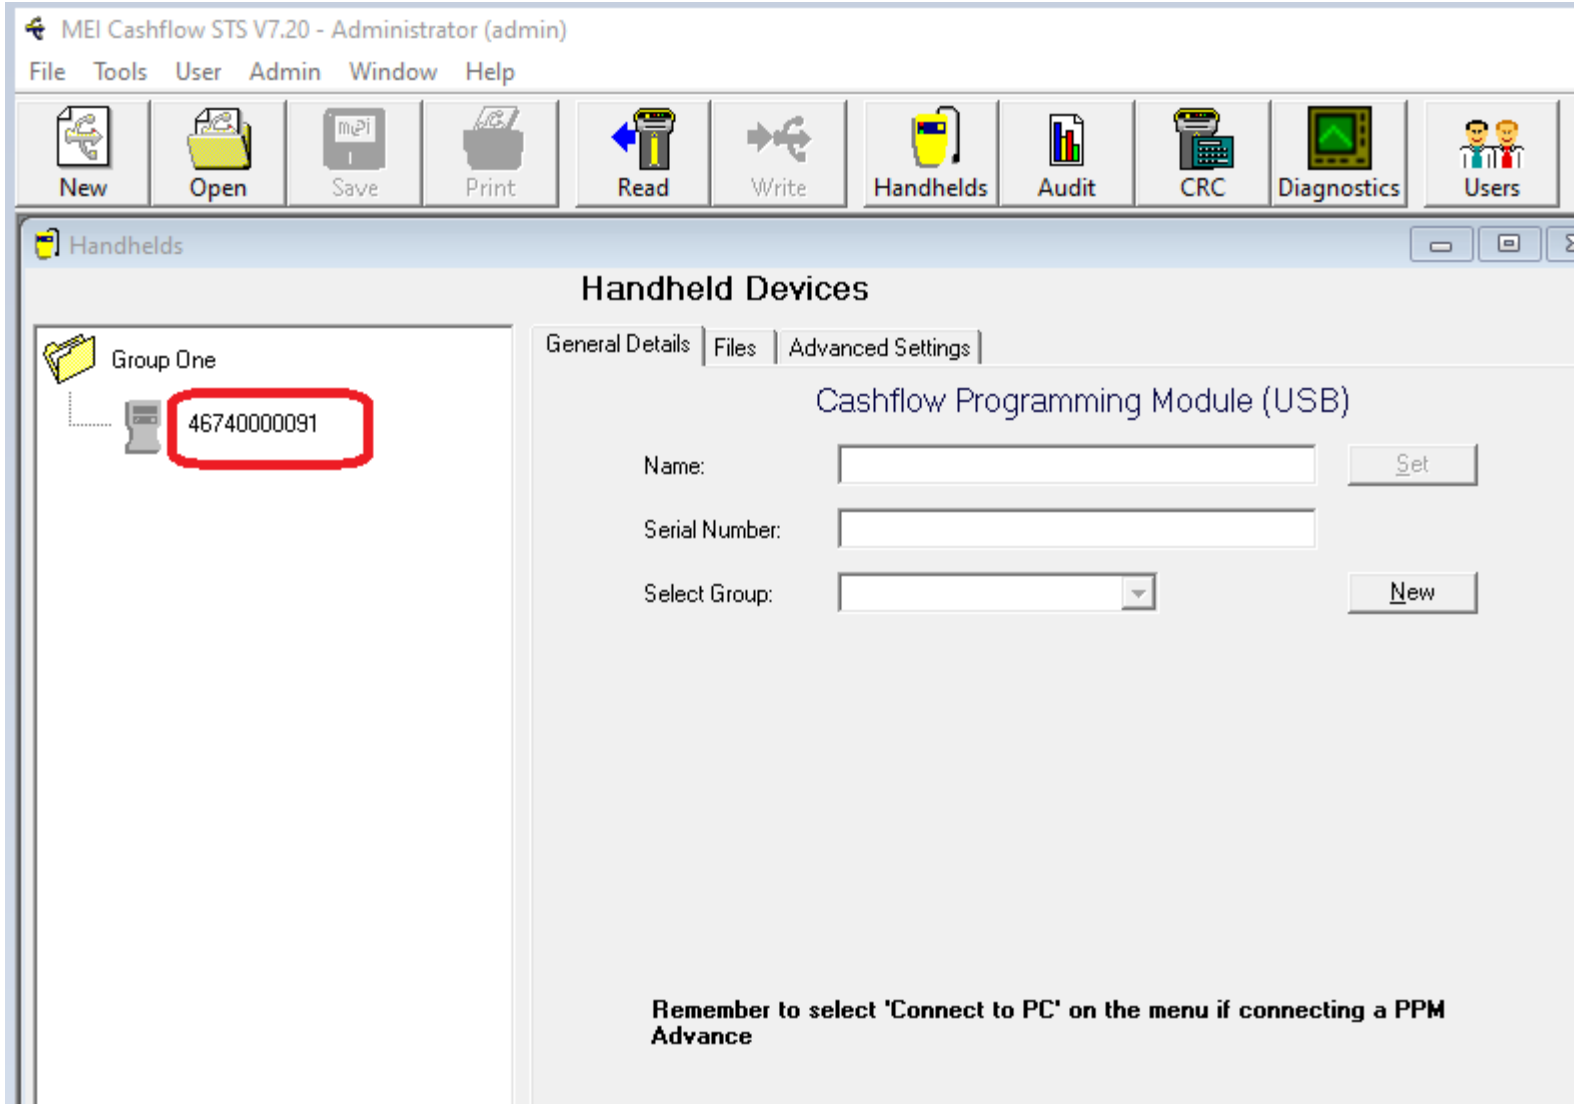


On the Handheld menu, you will see if the handheld device can be used and enabled.

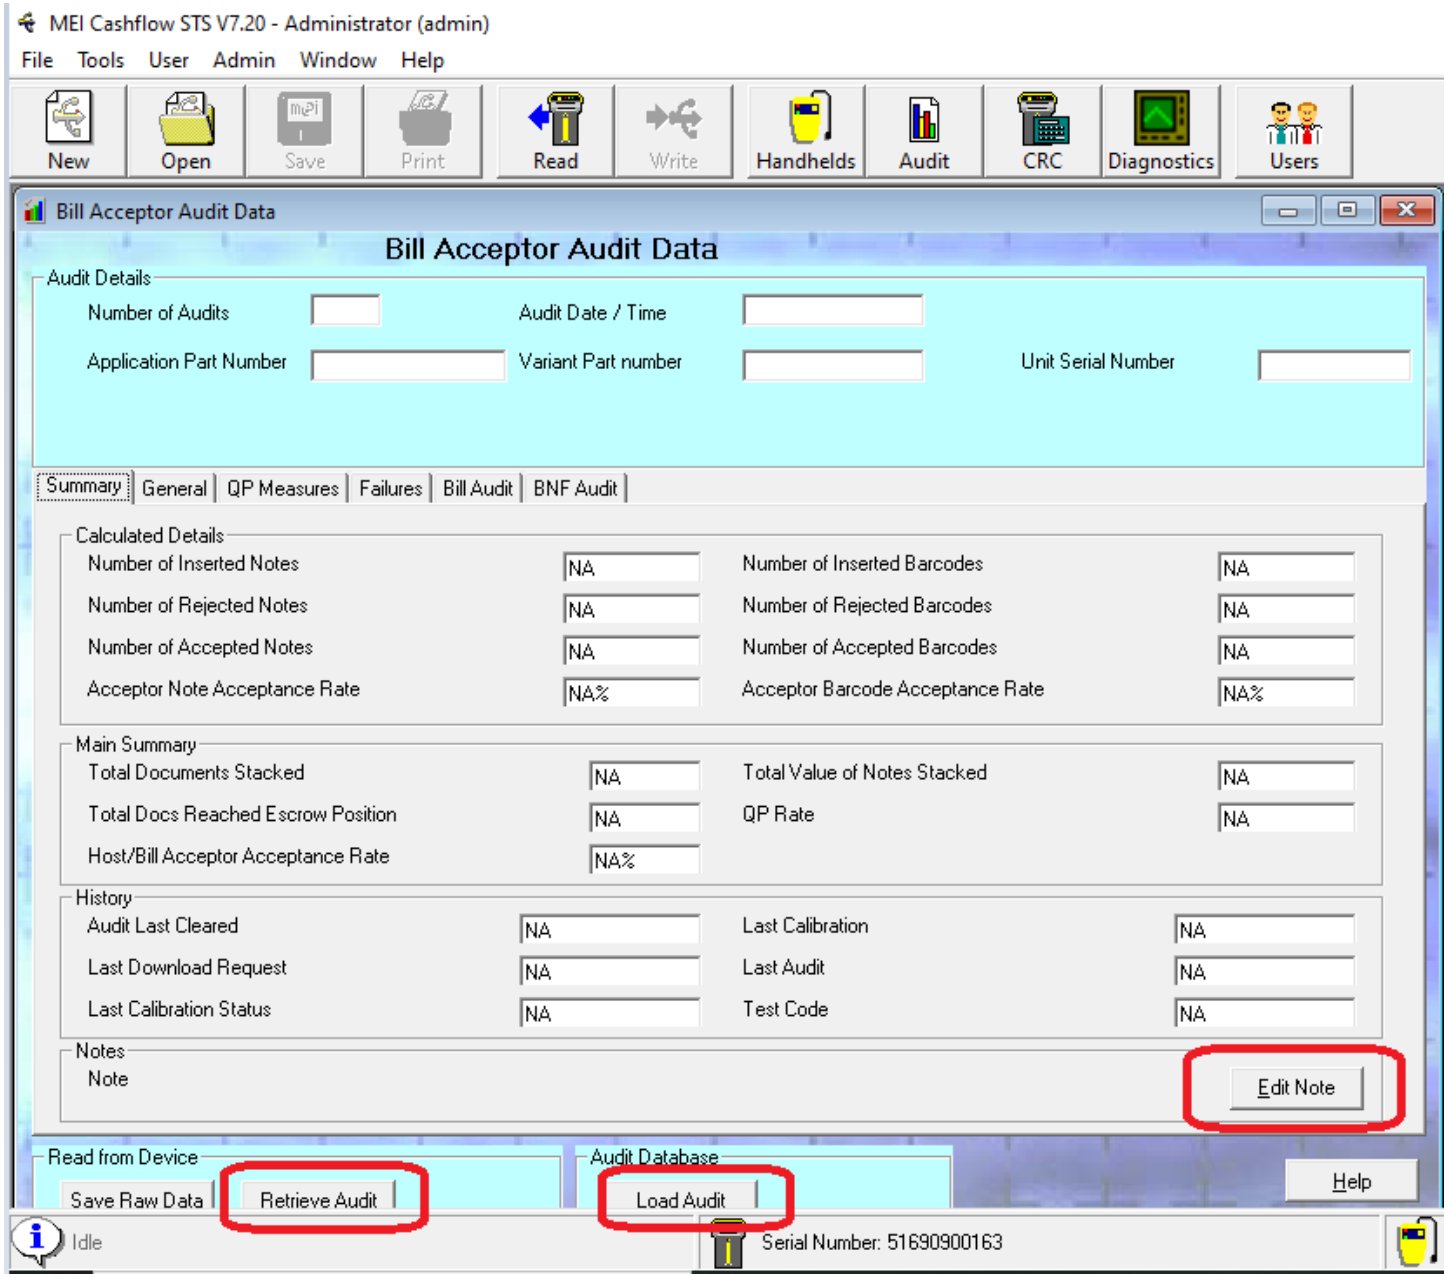


Under Audit Menu, you can refresh or load audit these event will show the Number of Bills pass through, Bills has been rejected.

Bills Acceptor Audit Data will be your guide on how many bills has been counted.

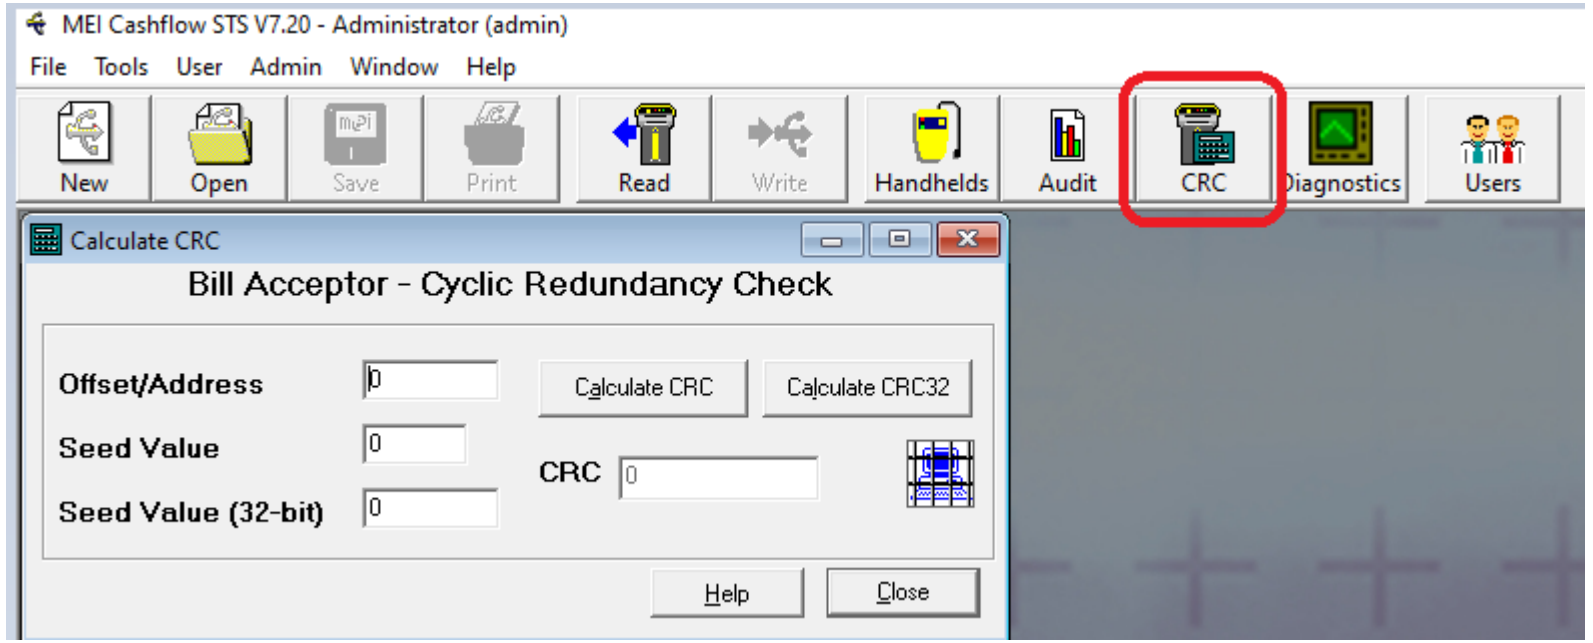

It's a Cyclic Redundancy Check, it's an error detecting code, blocking any counterfeited bills, storage of bills.

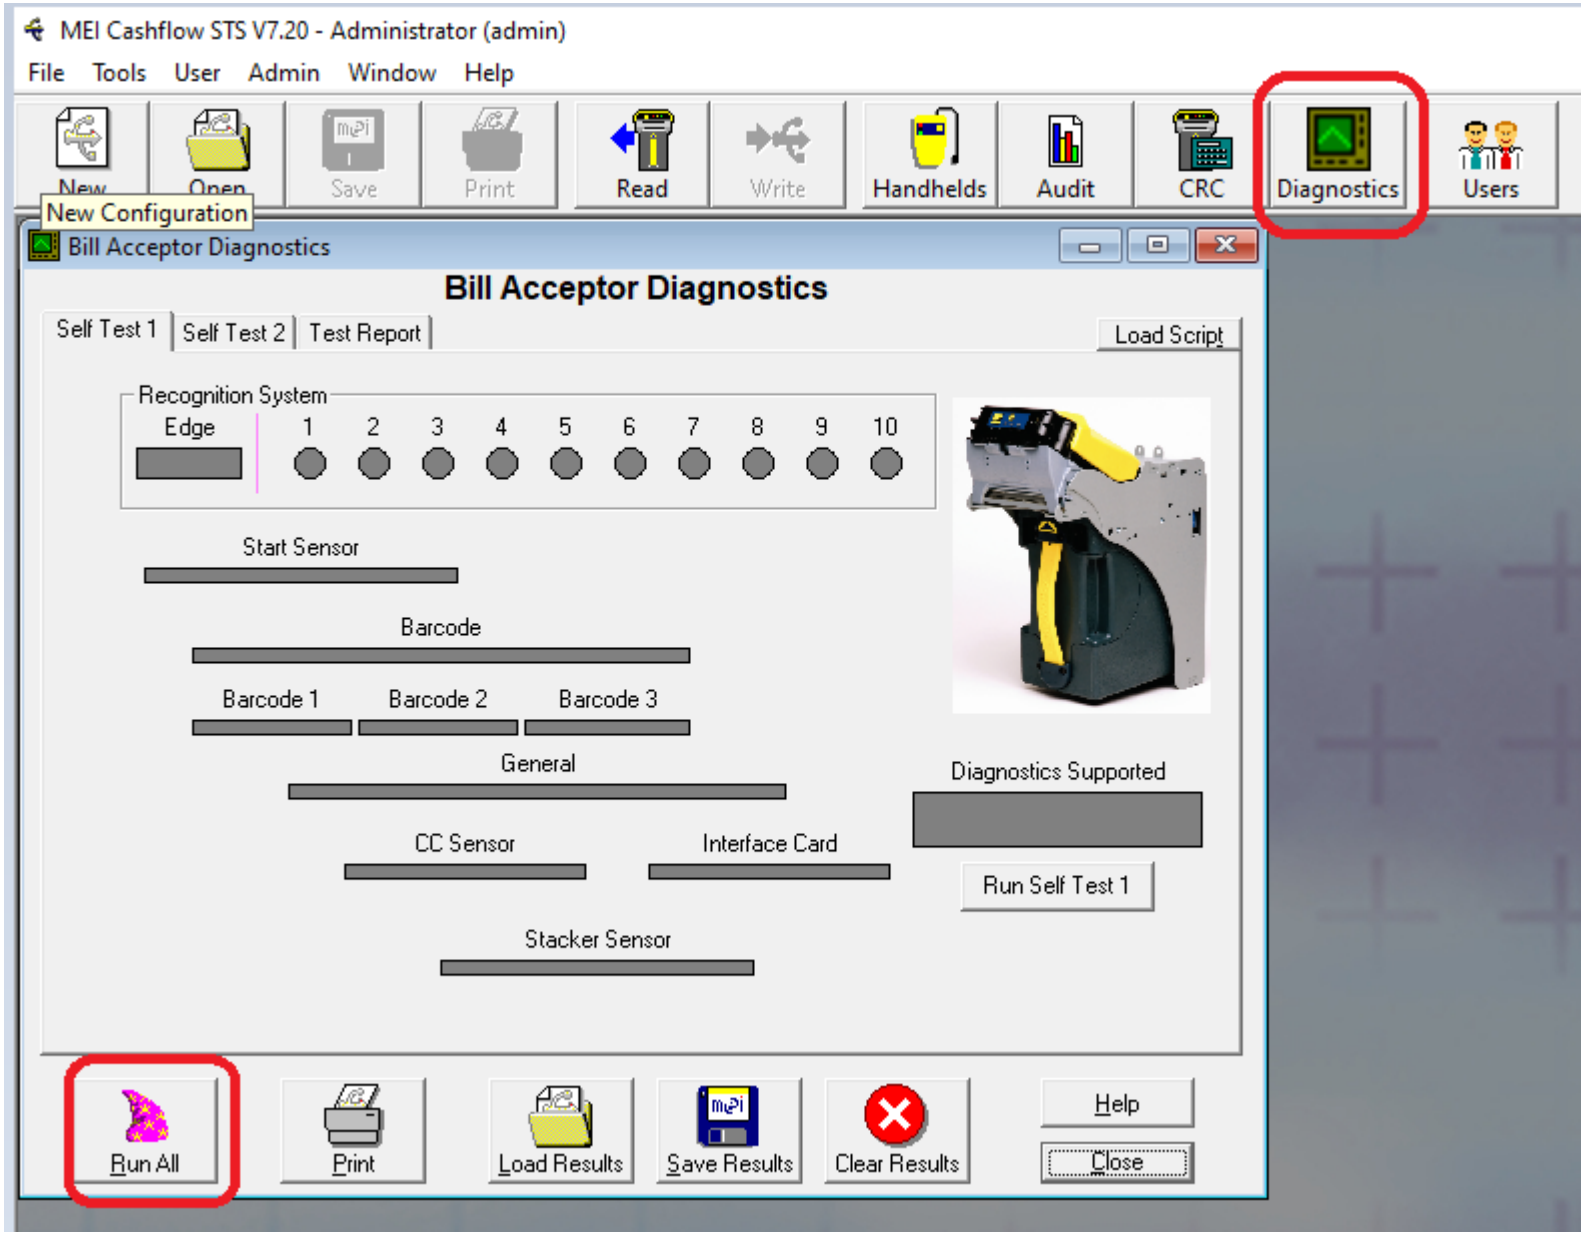

Bill Acceptor Diagnostics, shows all the sensors, barcodes, interface card if working properly by pressing Run All.