CORONA
— RESORT & CASINO —
PHÚ QUỐC

Slot Technical Department

SG Equinox RAM Clear Procedure

Technical Luke

January 1, 2025



SG Equinox Cabinet (Stand Alone and Link Progressive)



SG Rapid Fusion Mojo Cabinet (Roulette)




SG Bally Prowave Series Cabinet (Stand Alone and Link Progressive)

- **See the Scientific Games Cabinets**





Maindoor lock

- **Open the main door of the machine to access the logic box and turnoff the main power switch**

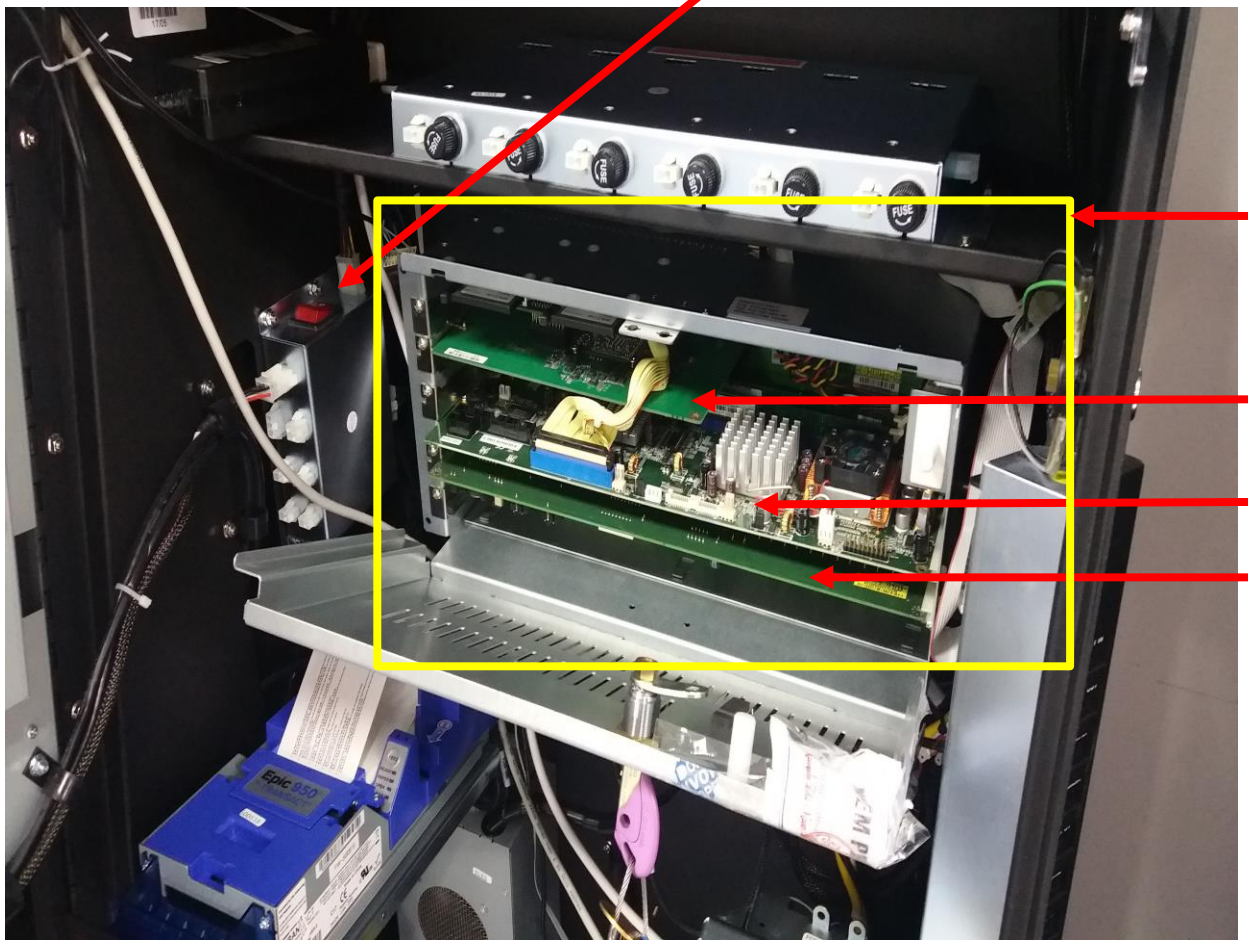

- Open the Logic box door
- Switch on the main power switch

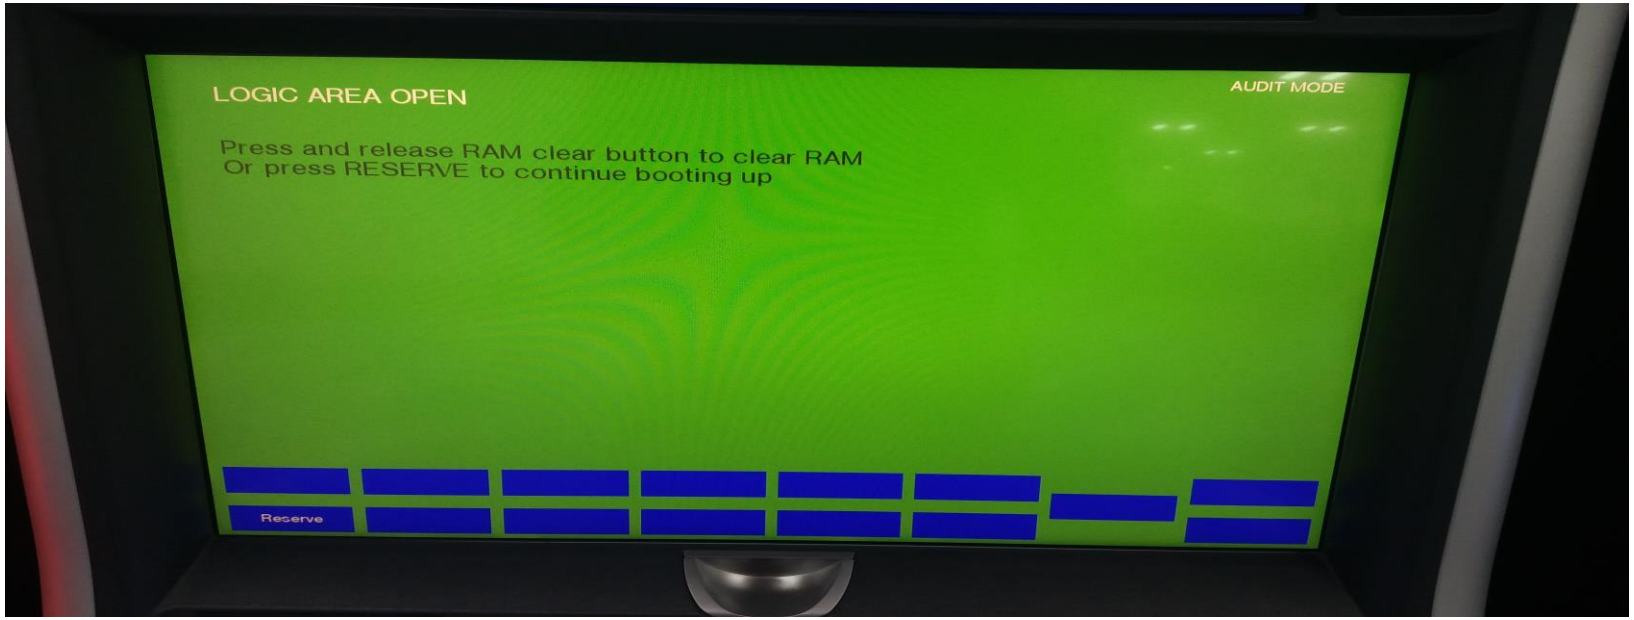


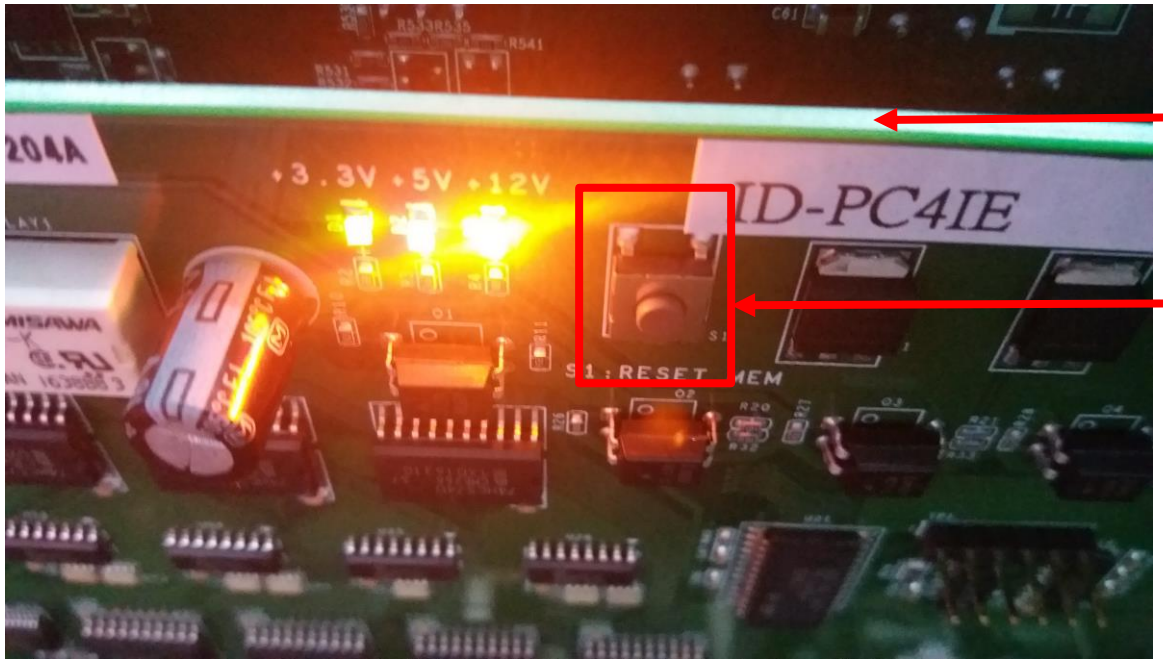


IO Board

RAM Clear Button

- After machine boot up the machine will ask you to press the RAM Clear button to proceed with the RAM clear or press Reserve to load the game
- Locate the IO Board inside the Logic box/MPU
- Press the RAM Clear button to proceed

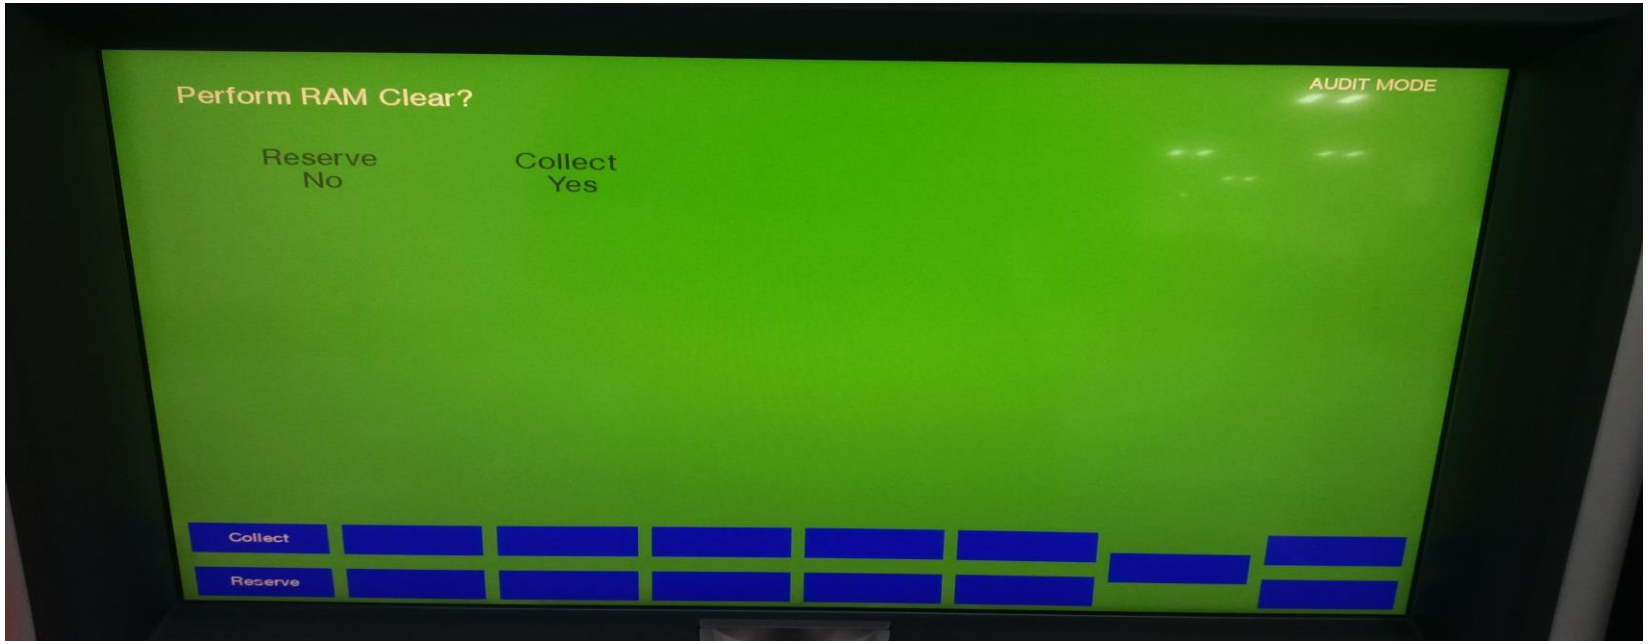

- **After pressing the RAM Clear button machine will confirm to perform RAM Clear**

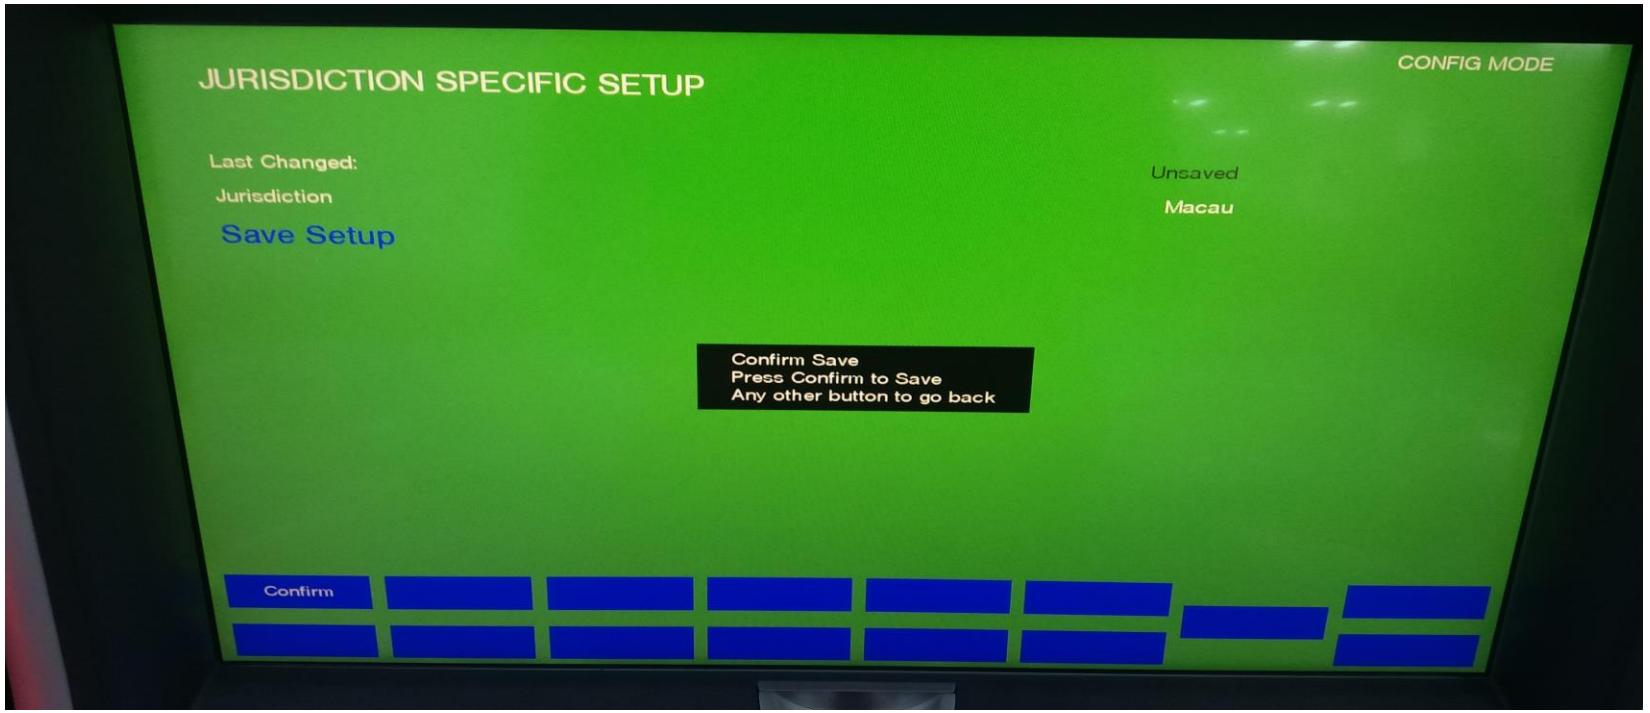

Jurisdiction Specific Setup

- **Select <u>Macau</u> for the jusrisdiction and Save Setup to confirm settings**






BV (Bill Validator)


Currency Configuration

- **On this configuration it means that the machine just detected that the BV(Bill Validator has a VND firmware). No need to change anything.**

- **Remove the BV (Bill Validator) when the machine already detected the VND firmware**

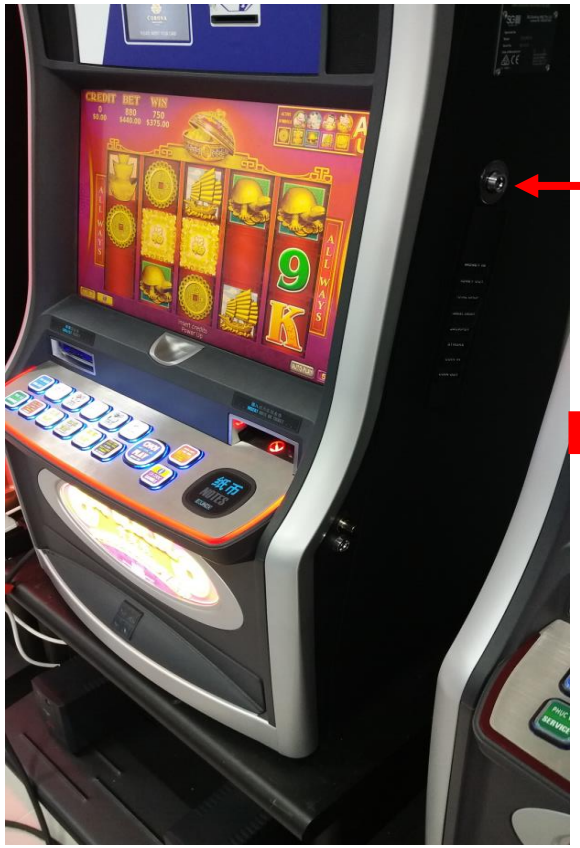



Reset/Audit switch

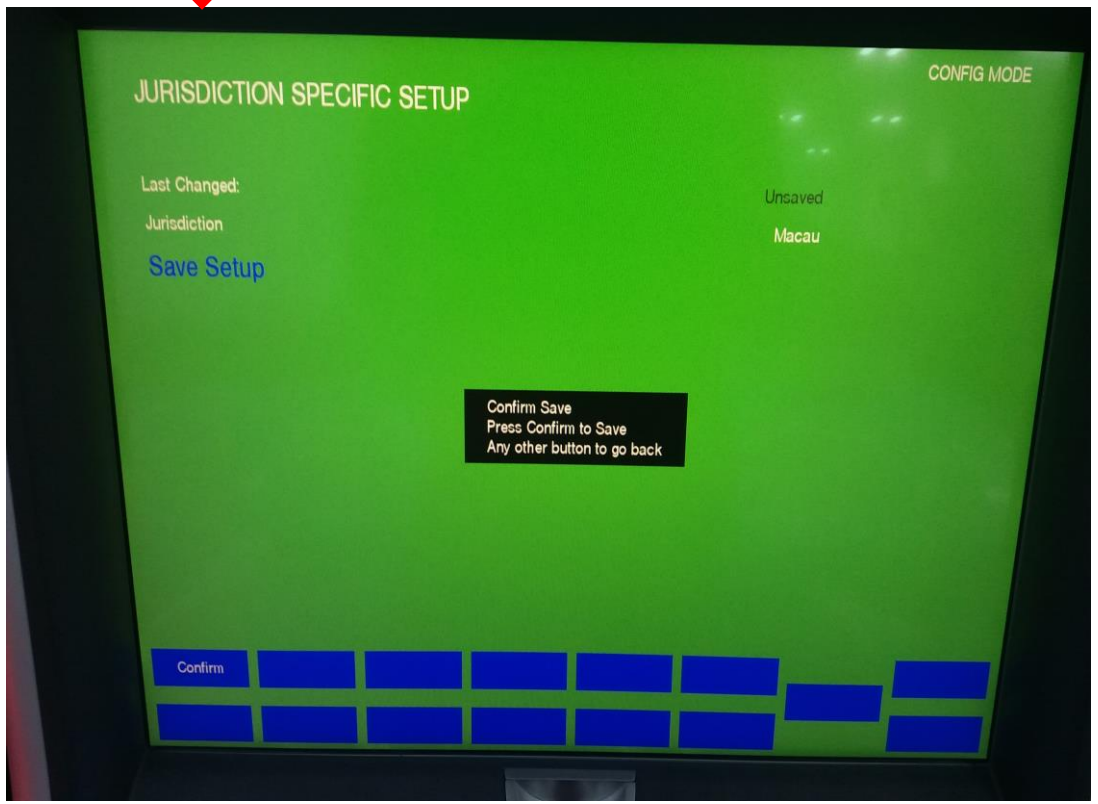

- **Turn the <u>Reset/Audit</u> switch on the neutral position and Turn again for the Audit menu**

- **After Turning the <u>Reset/Audit</u> switch you will be redirected back to the Jurisdiction Specific Setup**
- **Again set Macau for the Jurisdiction and Save Setup to confirm settings**

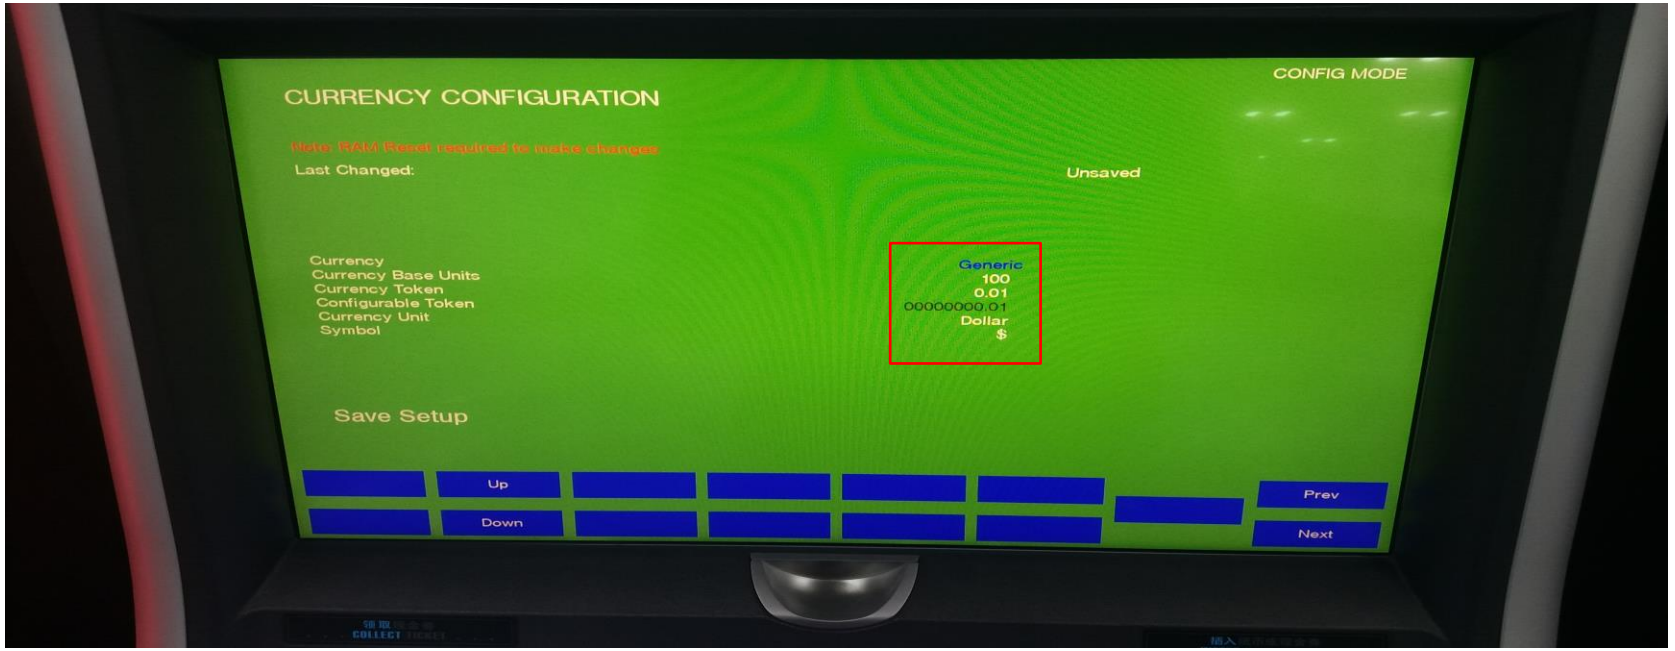

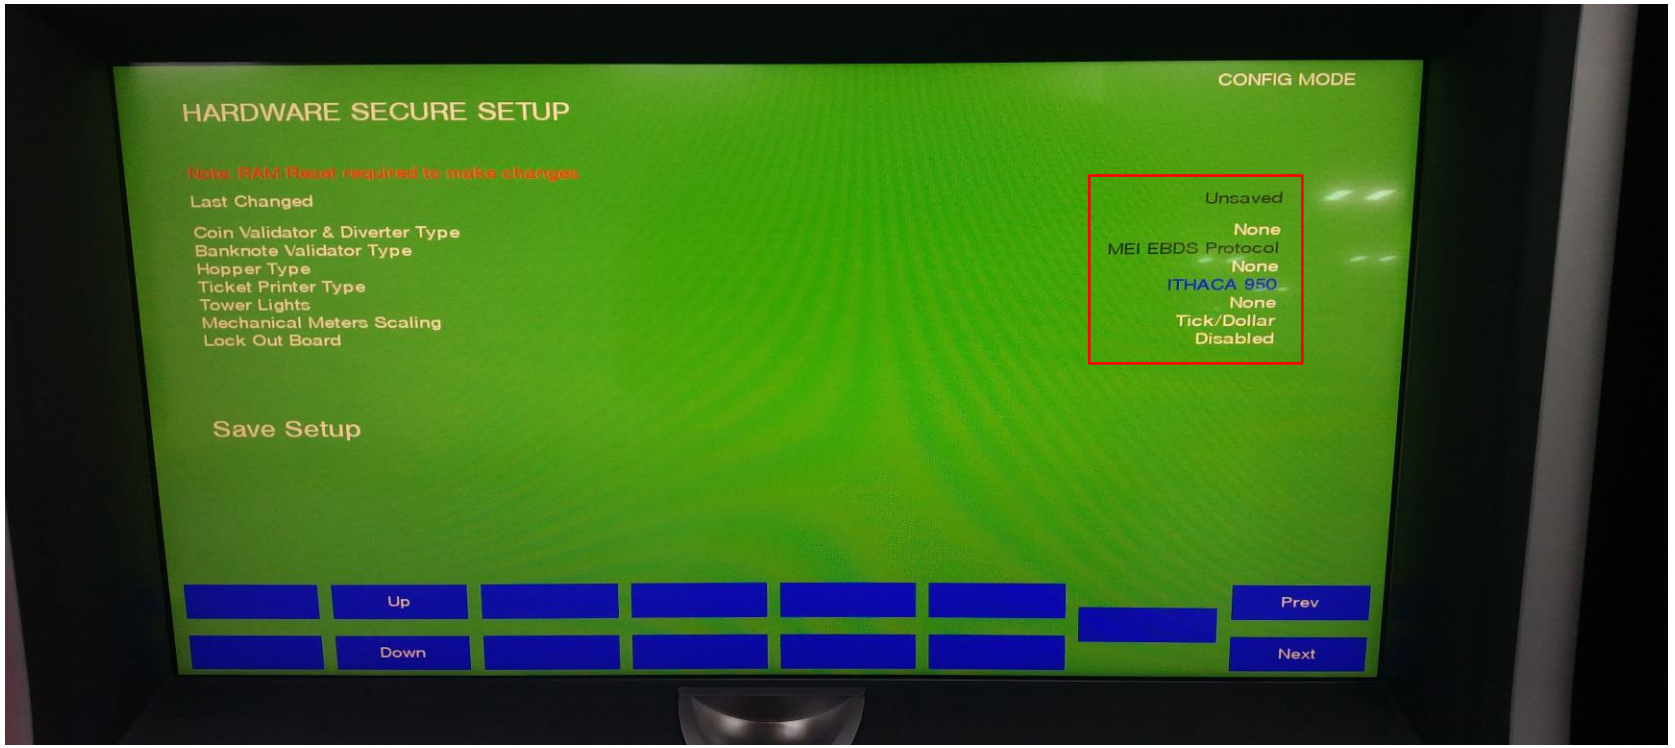



Currency Configuration

- **Just wait few moments for the machine to detect the $ configuration**
- **Set the Currency to Generic by pressing the Up/Down option on the screen**
- **After changing it to Generic Save Setup to confirm settings**

Hardware Secure Setup

- **Change the Ticket Printer Type to ITHACA 950 the other settings stays the same and Save Setup to confirm settings**

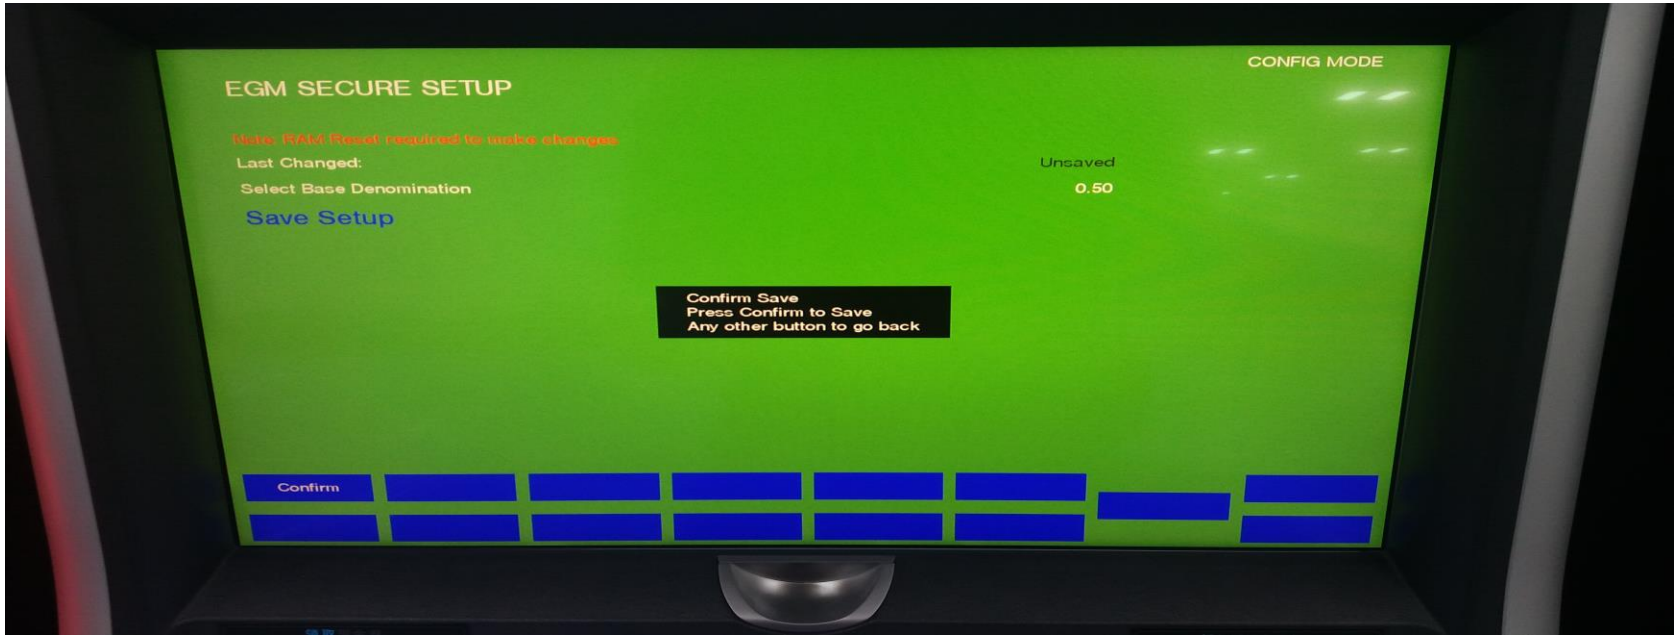

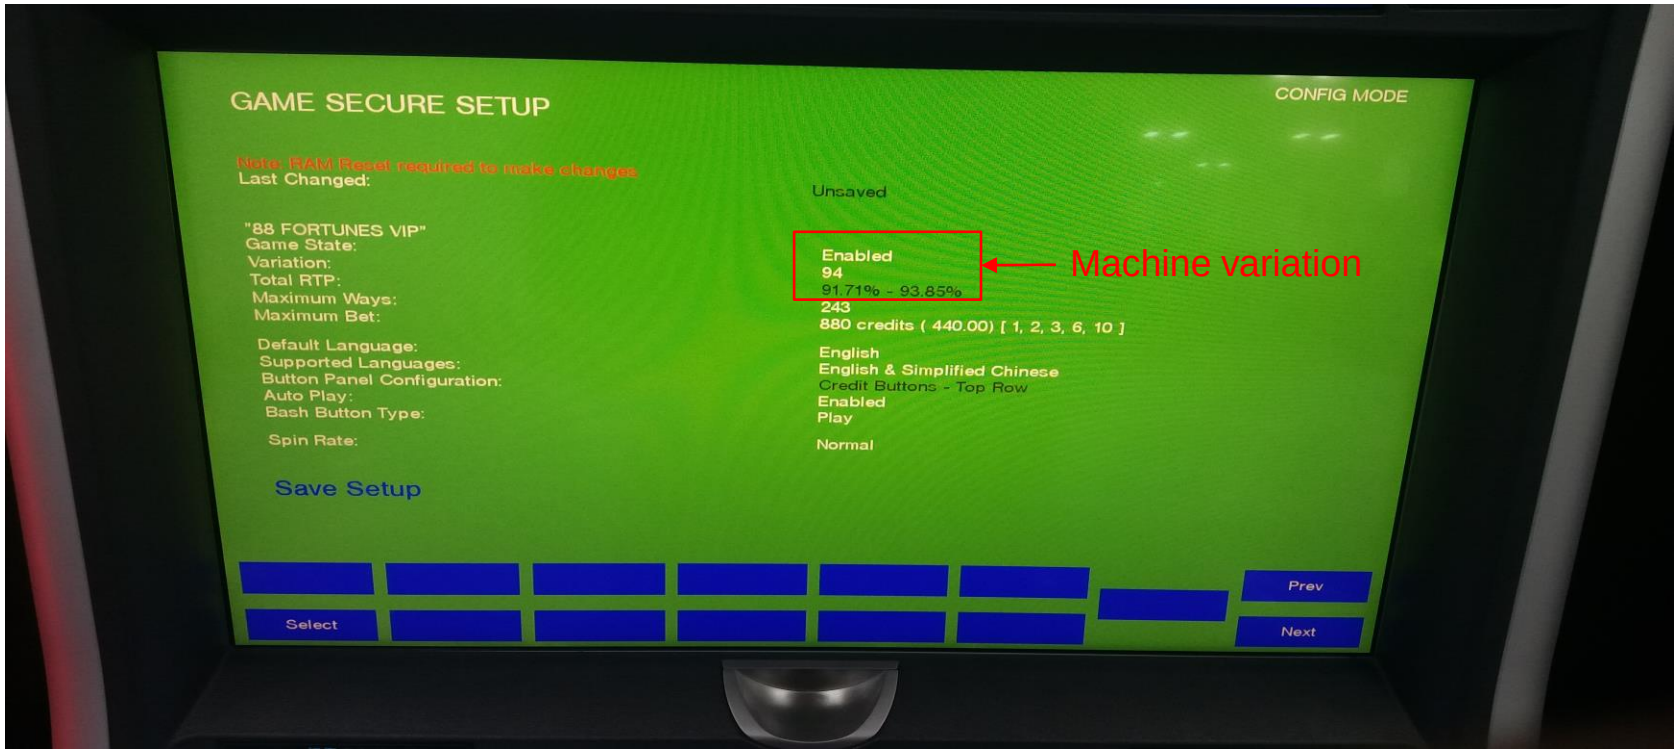


EGM Secure Setup

- **Select Base Denomination choose the correct machine denomination based on our Slot Mix and Save Setup to confirm settings**

Game Secure Setup


- **On the Variation set the correct variation based on our Slot Mix (For the Stand Alone Progressive (SAP) the variation is 94 but for the Link Progressive(LP) we are using Variation 99)**
- **Set Default Language to English**
- **Set Supported Language to English and Simplified Chinese**
- **Set Auto Play Enable**
- **Set Bash Button Type Play**
- **Save Setup to confirm settings**



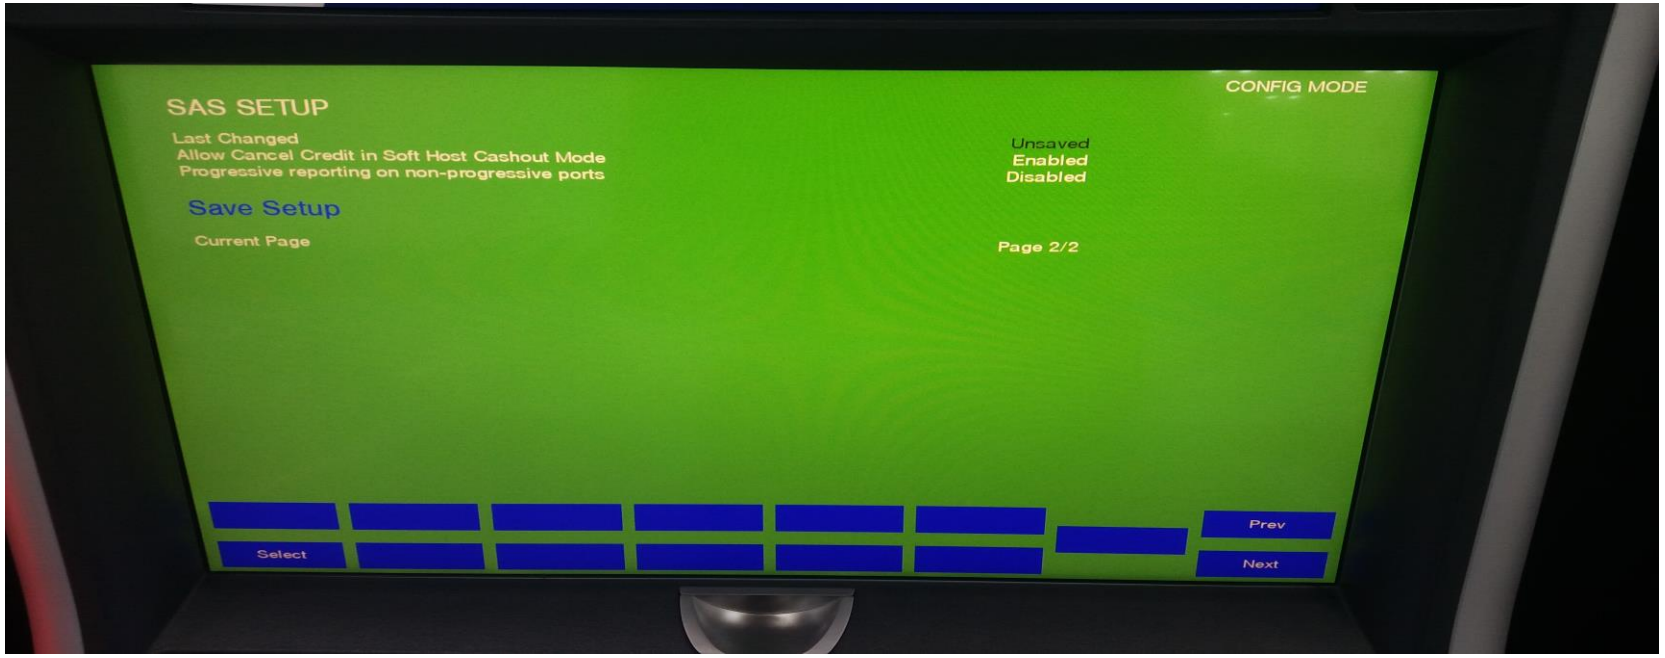


SAS Setup


- If the machine is one of the Link Progressive (LP) Set the Poll Address for Port 2 GMID number located inside the machine
- Set Money Transfer to AFT
- Set the Asset Number base on the attached details on machine
- Set Legacy Bonusing Enabled
- Set Ticket Validation Secure Enhanced
- Set Handpay Receipt Disable
- Go to page 2 Save Setup to confirm settings

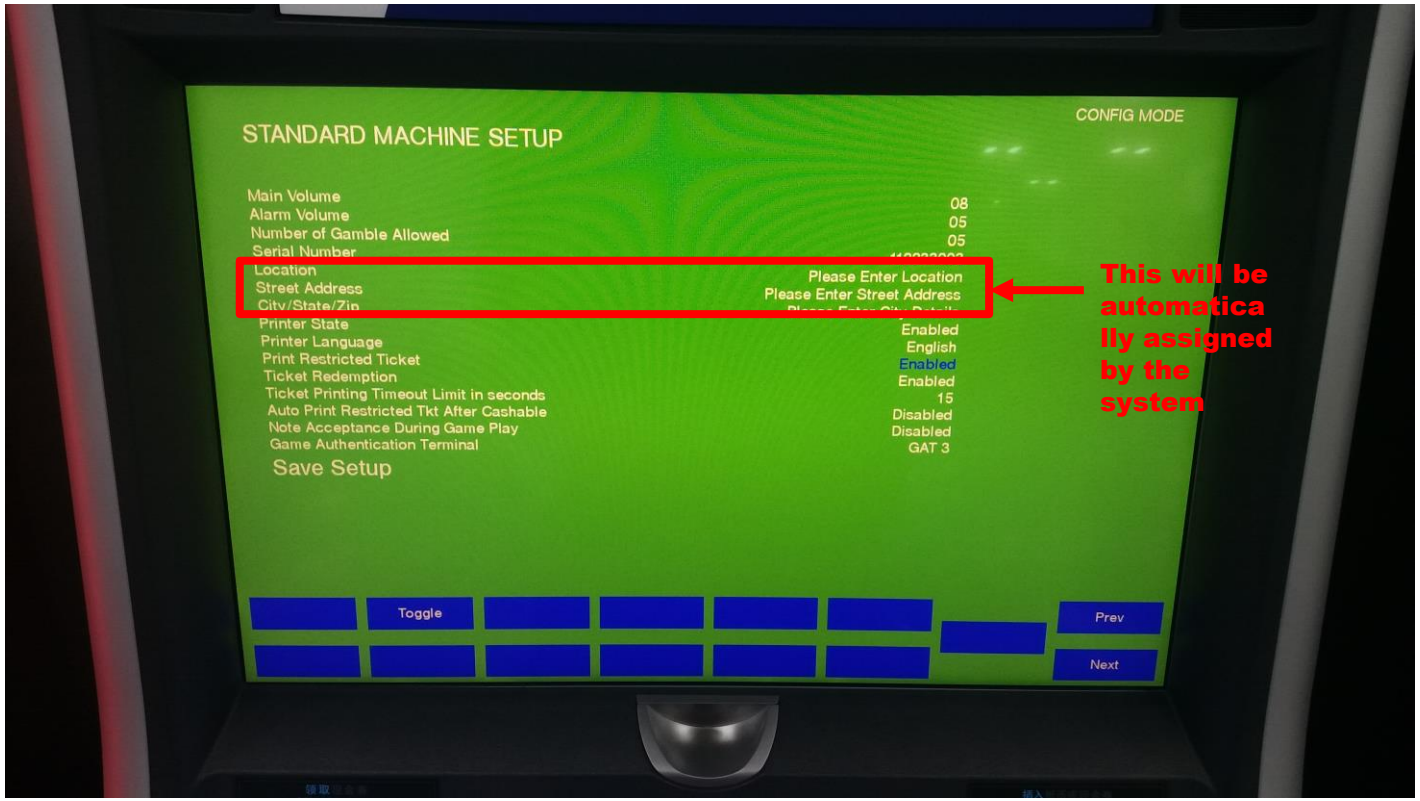

Standard Machine Setup

- Serial Number based on the Serial plate attached in the machine
- Printer state Enabled
- Printer language to English
- Print Restricted Ticket Enabled
- Ticket Redemption Enabled
- Save Setup to confirm settings

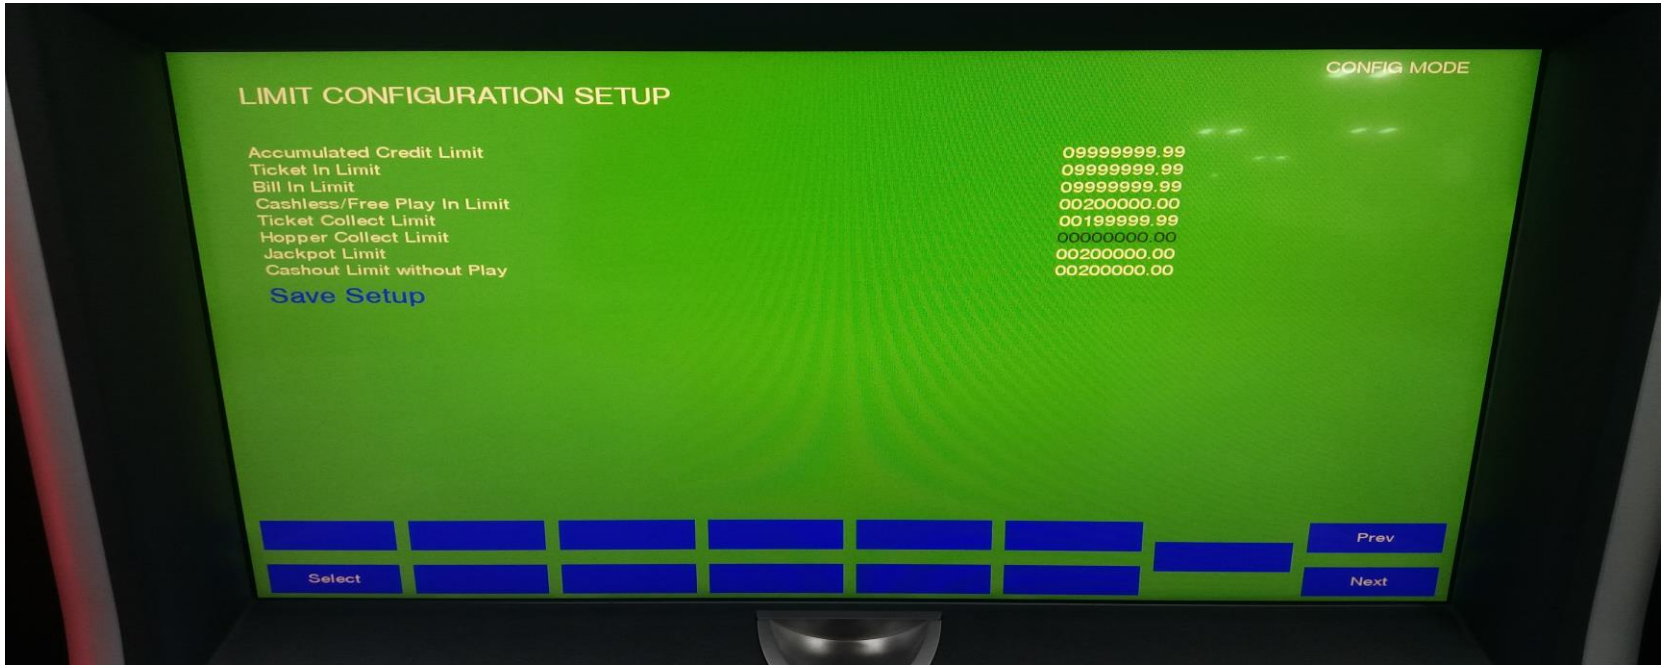

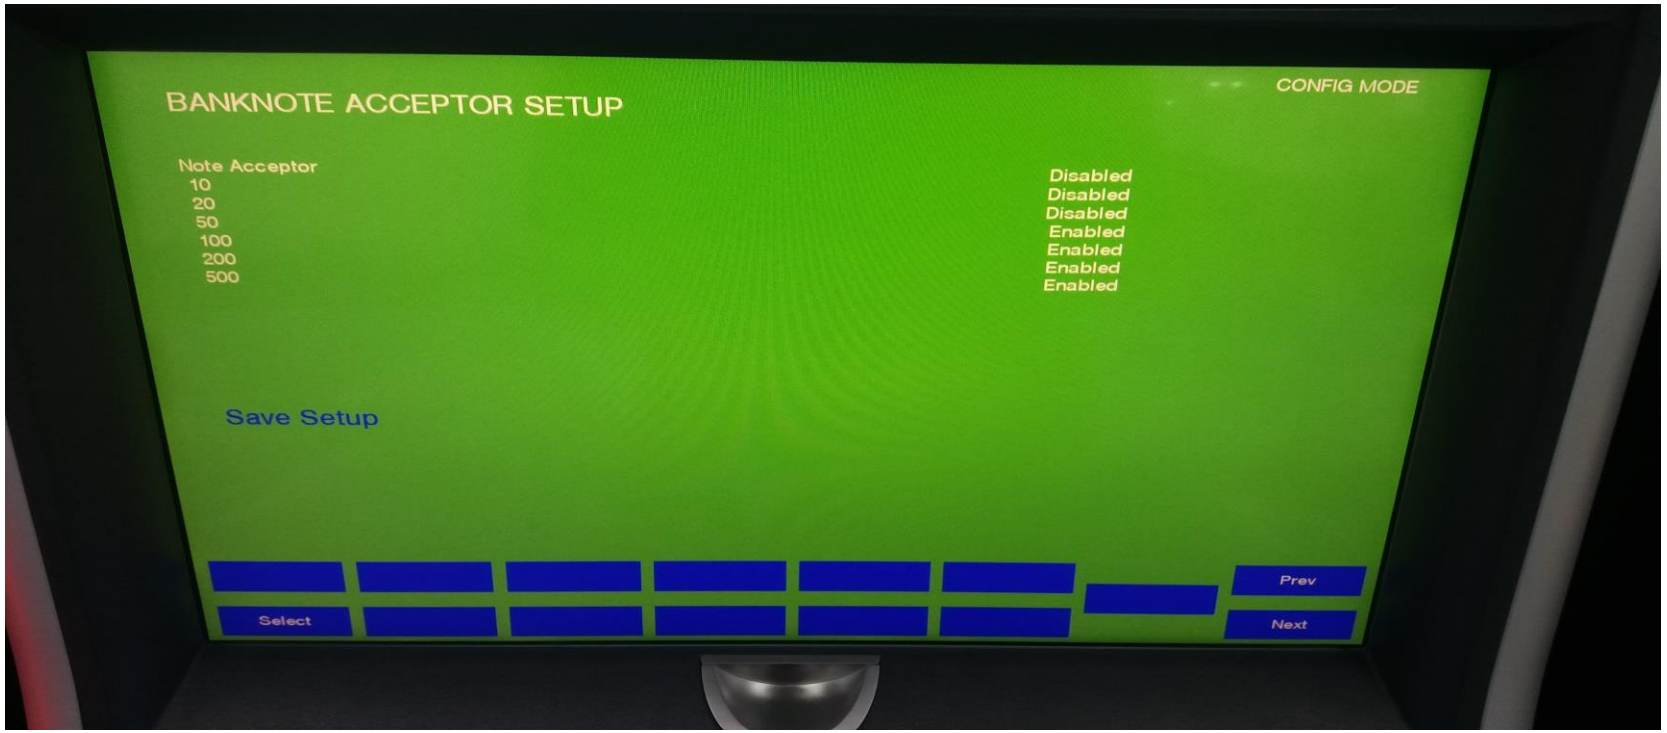


Limit Configuration Setup

- Accumulated Credit Limit 9999999.99
- Ticket In Limit 9999999.99
- Bill In Limit 9999999.99
- Cashless/Free Play In Limit 200000.00
- Ticket Collect Limit 199999.99
- Jackpot Limit 200000.00
- Cashout Limit without Play 200000.00
- Save Setup to confirm settings

Banknote Acceptor Setup

- Note acceptor Disabled
- 10 Disabled
- 20 Disabled
- Save Setup to confirm settings

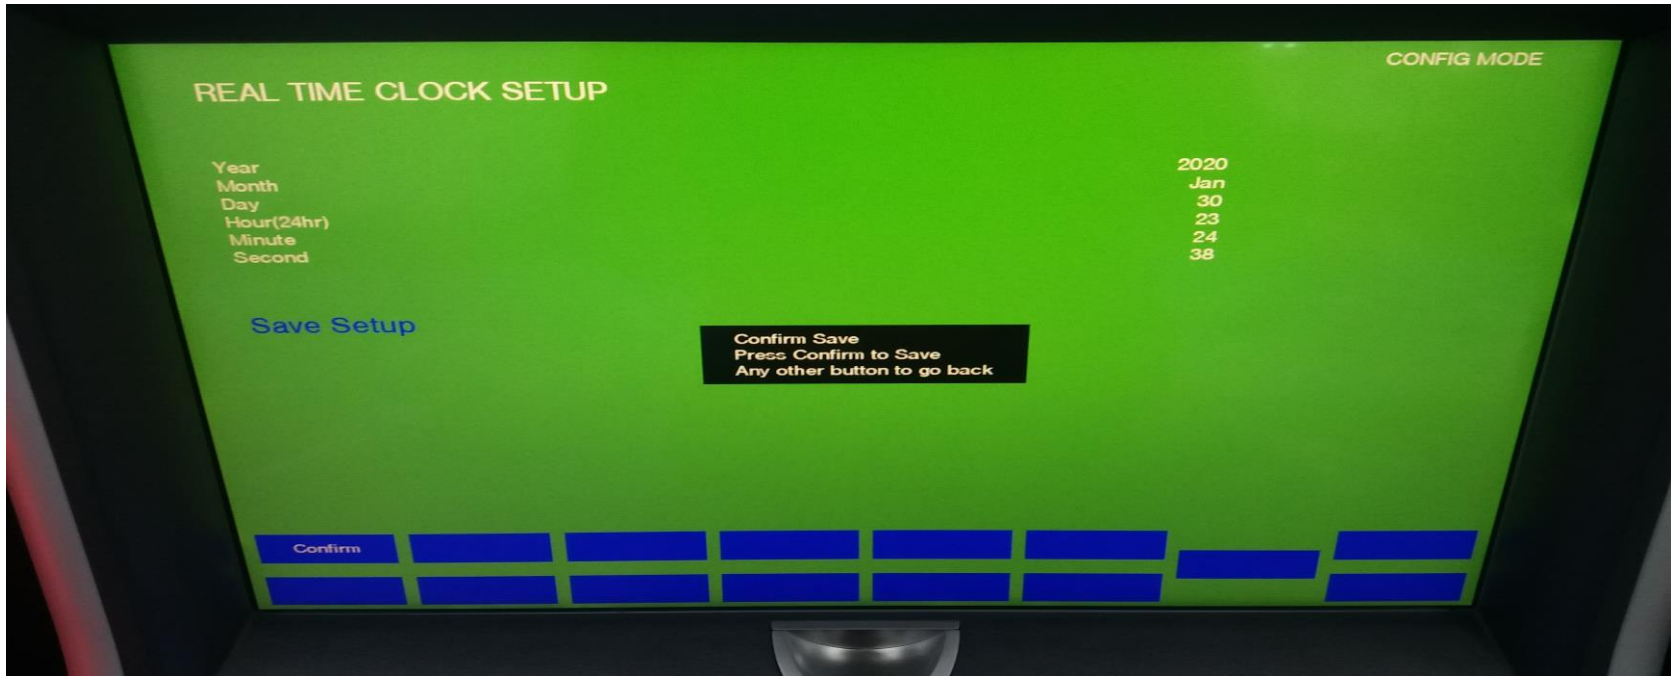




Real Time Clock Setup

- **Confirm the machine clock are correct**
- **Save Setup to confirm settings**

Jackpot Configuration

- **Set the correct Initial value of the Jackpot amount based on the documentation of Operation department for all the Four Jackpot levels**
- **Save Setup to confirm settings**

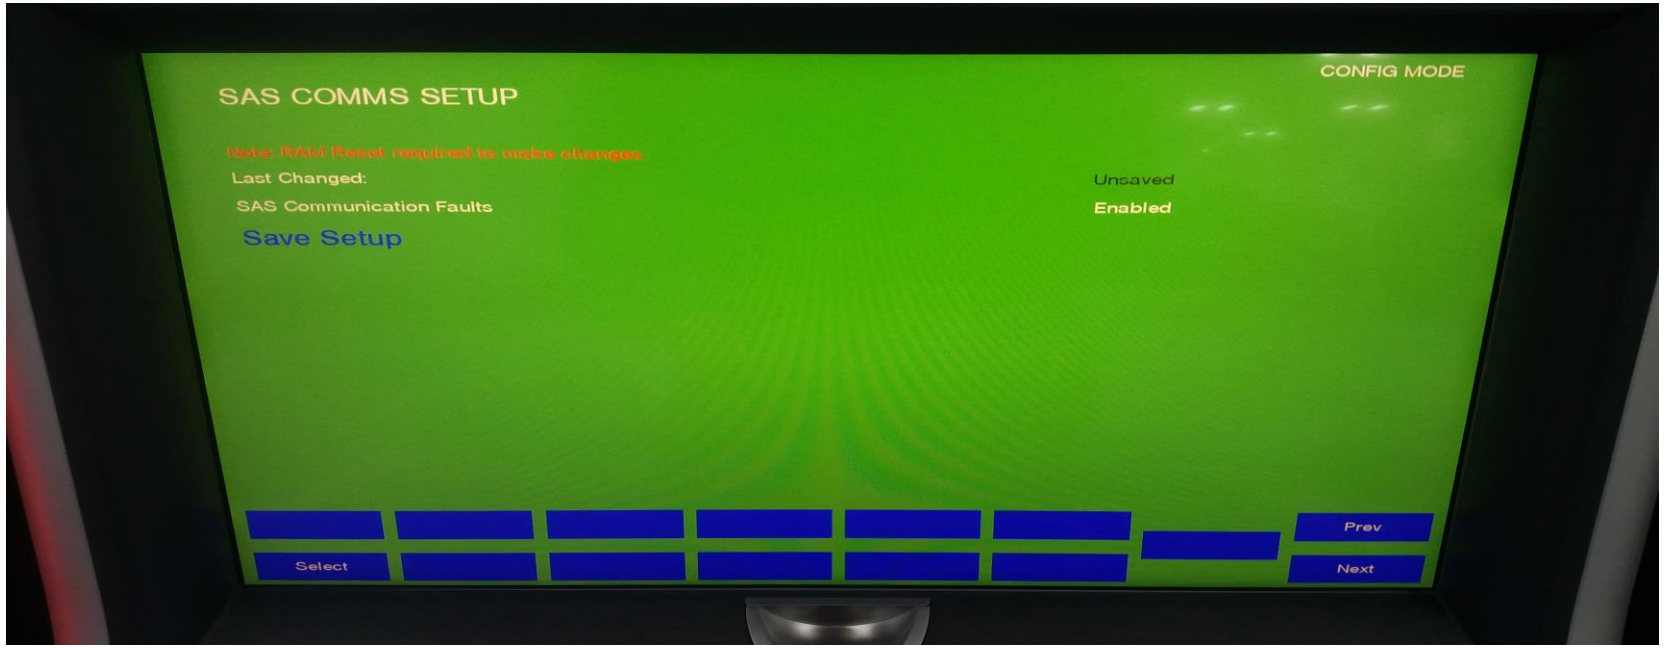



SAS Comms Setup

- **Save Setup to confirm settings**

- **After saving the settings machine will automatically restart (Close the Logic box door and properly insert back the BV (Bill Validator)) to completely load the game**
- **Verify all the settings are correct before putting back on service**