WIDEX ALLURE™ RECHARGEABLE BTE R D




The WIDEX BTE R D is part of the WIDEX ALLURE family. Built around the WIDEX ALLURE platform, providing crystal-clear speech in challenging situations while maintaining unparalleled awareness of surroundings.

Fitting BTE R D is easier than ever before, thanks to the new fitting software "Widex Compass Cloud". A cloud-based solution, that can provide a convenient and streamlined fitting software that is always up to date.

The BTE R D is powered by a built-in lithium-ion battery.

- Direct mobile wireless connectivity (2.4 GHz)
- Compatible with TV PLAY 2 and RC-DEX
- 4 performance levels: 440/330/220/110
- Preference control, program button and telecoil are standard
- Powered by a lithium-ion rechargeable battery
- LED built in Preference Control button
- Protection class IP68
- Minimal to severe-to-profound hearing losses

SUGGESTED FITTING RANGE

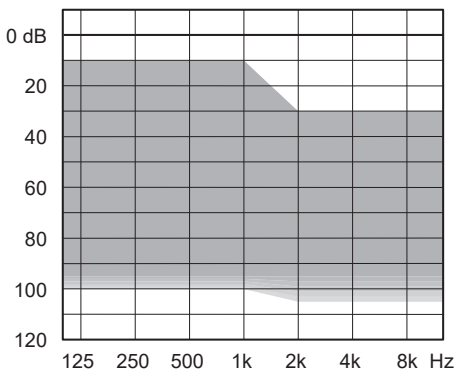


STANDARD TECHNOLOGY

- Allure Platform with ZeroDelay technology
- Dynamic Feedback Controller
- Widex Fitting Rationale 2.0 for improved first fit
- TruAcoustics for individualized sound and fitting
- Speech Enhancer Pro for improved speech in noise


KEY FEATURES	440	330	220	110
Processing and fine-tuning channels	15	12	10	8
Dynamic Feedback Controller	•	•	•	•
Allure PureSound	•	•	•	•
TruAcoustics 2.0	•	•	•	•
Speech Enhancer Pro	••••••	•••••	••••	•••
Widex Fitting Rationale 2.0	•	•	•	•
CONNECTIVITY				
MFi (iOS) and ASHA (Android) compatibility	•	•	•	•
2.4 GHz Bluetooth Connectivity	•	•	•	•
Hands-Free Communication (iOS)	•	•	•	•
BT LE Audio	•	•	•	•
Telecoil	•	•	•	•
Auracast	•	•	•	•
APPs FOR iOS AND ANDROID				
ALLURE App	•	•	•	•
FEATURES				
Sound Classifier – Classes	11	8	6	4
Programs	5	4	3	3
HD Locator Bands	15	12	10	8
Digital Pinna	•	•		
TruSound Softener	••••••	••••••	•••	•••
Smartwind Manager	••••••	••••••	•••	•••
Soft-level noise reduction	••••••	••••••	••••••	•••
Preference control with LED	•	•	•	•
Programmable Push Button	•	•	•	•
Call Control (iOS)	•	•	•	•
Zen	•	•	•	•

For information regarding which devices WIDEX ALLURE direct streaming supports, please go to: global.widex.com/compatibility


MAXIMUM OUTPUT - EAR SIMULATOR

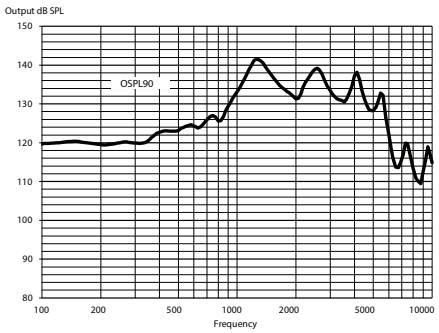


MAXIMUM OUTPUT - 2CC COUPLER

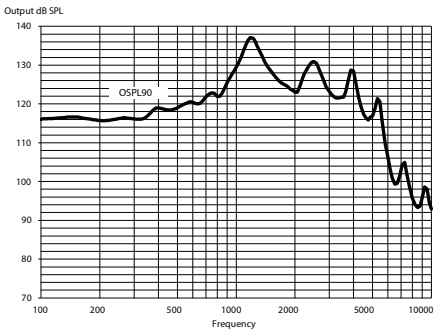

OUTPUT - EAR SIMULATOR

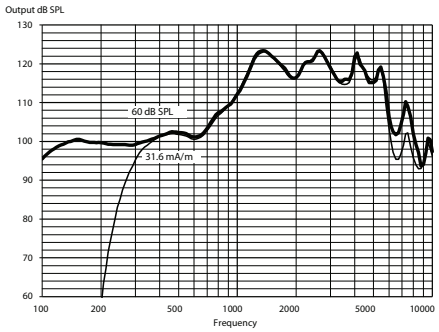

OUTPUT - 2CC COUPLER

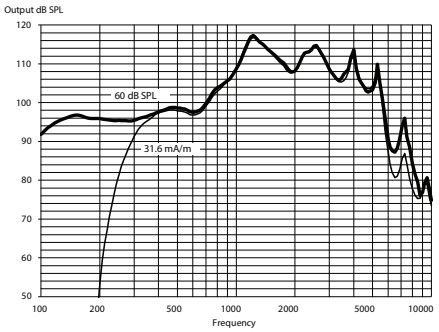

Technical data: Typical data obtained through standard pure tone measurements. Hearing aid set to Reference Test Gain, unless stated otherwise. Measured in a standard ITE coupler. For further information, please contact Widex via Widex.com.

		EAR SIMULATOR IEC 60118-0:1983 + A1:1994	2CC COUPLER EN IEC 60118-0:2024, ANSI S3.22-2014
OSPL90	1600 Hz Maximum HFA	135 dB SPL 141 dB SPL -	- 137 dB SPL 129 dB SPL
Acoustic output (Input 60 dB SPL)	1600 Hz Maximum HFA	121 dB SPL 124 dB SPL -	- 118 dB SPL 112 dB SPL
Reference test gain	RTF/HFA	61 dB	52 dB
Full-on gain (Input 50 dB SPL)	1600 Hz Maximum HFA	72 dB 76 dB -	- 67 dB 65 dB
Telecoil output (Input 31.6 mA/m)	1600 Hz Maximum HFA	122 dB SPL 124 dB SPL -	- 119 dB SPL 113 dB SPL
Acoustic frequency range		110 Hz - 8300 Hz	100 Hz - 5800 Hz
Harmonic distortion (typical)	500 Hz 800 Hz 1600 Hz 3200 Hz	<3% <3% <2% -	<3% <3% <2% <2%
Latency		<15 ms	<15 ms
Equivalent input noise		18 dB SPL	19 dB SPL
Battery runtime*	(Rechargeable)	up to 24 h	
Mobile phone immunity	(IEC 60118-13:2019) (ANSI C63.19:2019)	IEC M: User compatible / T: User compatible ANSI M: In compliance / T: In compliance	

*Battery runtime is based on initial settings using 60% of the fitting range and an ISTS input signal at 65 dB SPL, **including 5 hours of daily streaming plus 1 hour of headset mode**. The actual battery runtime, which is based on 1500 full battery cycle charges (approximately 4 years), depends on various factors such as the activated feature set, hearing loss, streaming time, and sound environment.

Do not modify this equipment without authorization of the manufacturer. Spare parts and instructions for correct repair can be acquired from Widex.