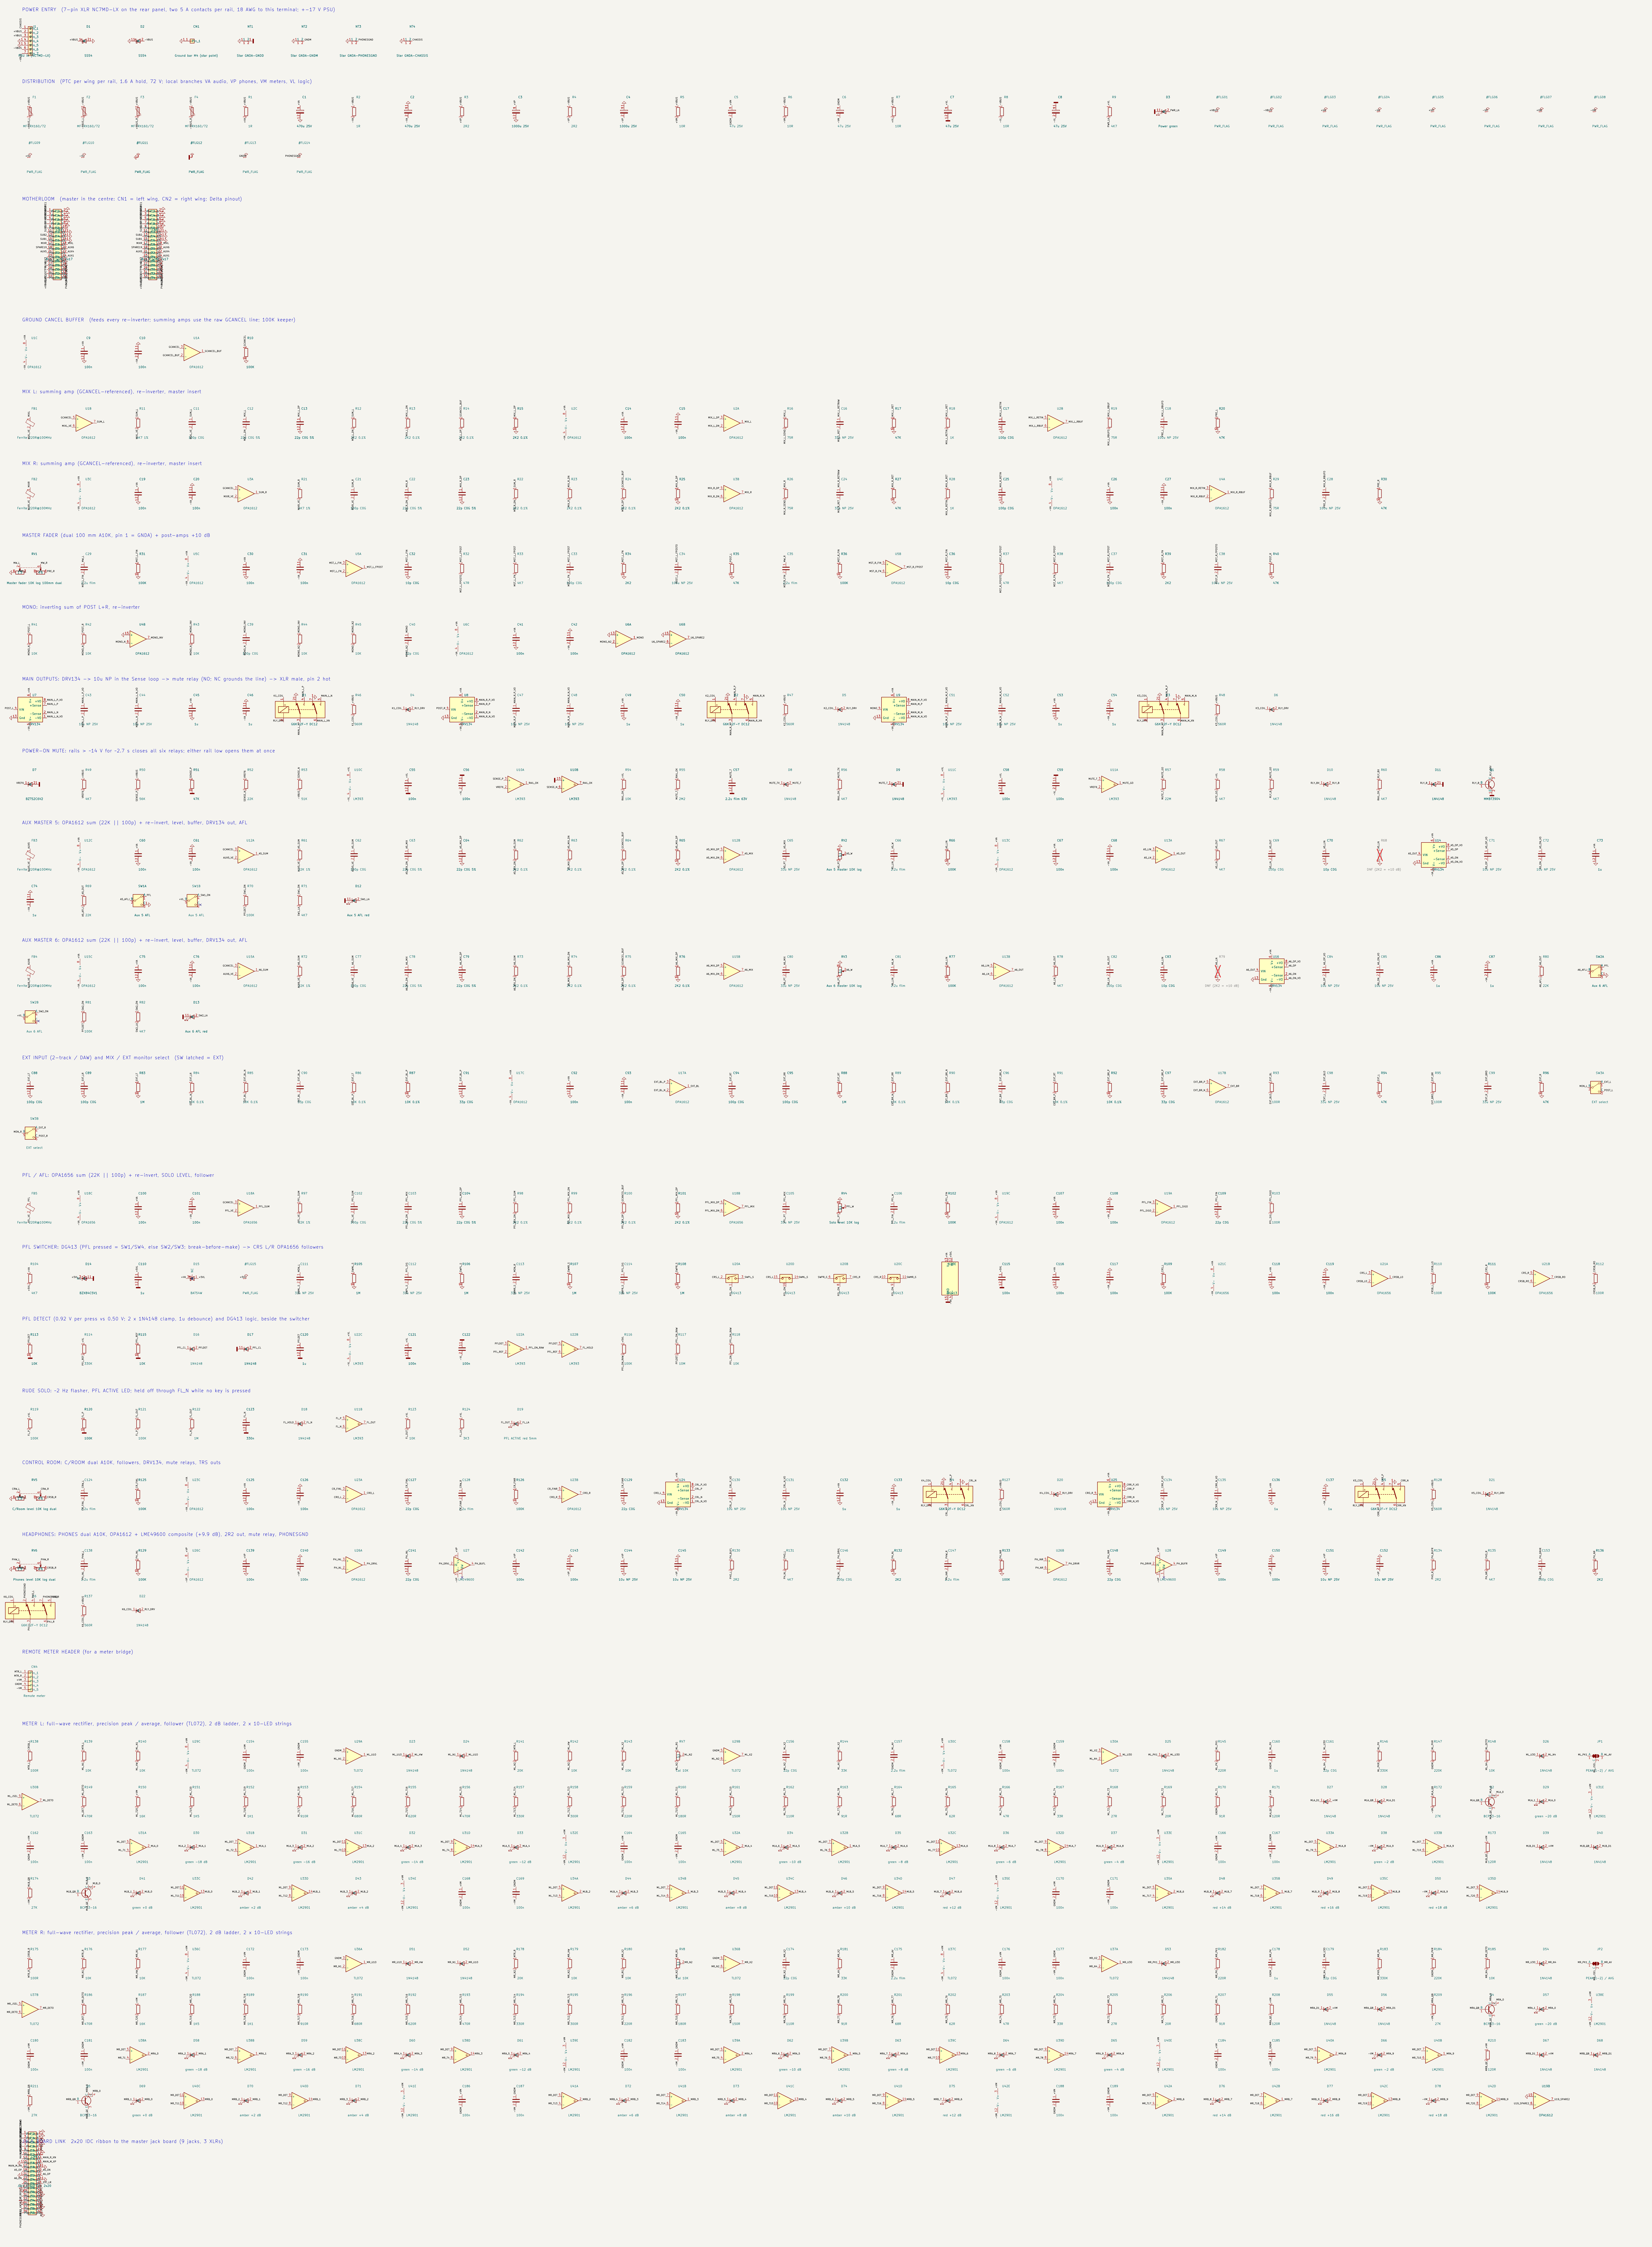
POWER ENTRY (7-pin XLR NC7MD-LX on the rear panel, two 5 A contacts per rail, 18 AWG to this terminal; +-17 V PSU)
DISTRIBUTION (PTC per wing per rail, 1.6 A hold, 72 V; local branches VA audio, VP phones, VM meters, VL logic)
MOTHERLOOM (master in the centre: CN1 = left wing, CN2 = right wing; Delta pinout)
GROUND CANCEL BUFFER (feeds every re-inverter; summing amps use the raw GCANCEL line; 100K keeper)
MIX L: summing amp (GCANCEL-referenced), re-inverter, master insert
MIX R: summing amp (GCANCEL-referenced), re-inverter, master insert
MASTER FADER (dual 100 mm A10K, pin 1 = GNDA) + post-amps +10 dB
MONO: inverting sum of POST L+R, re-inverter
MAIN OUTPUTS: DRV134 -> 10u NP in the Sense loop -> mute relay (NO; NC grounds the line) -> XLR male, pin 2 hot
POWER-ON MUTE: rails > ~14 V for ~2.7 s closes all six relays; either rail low opens them at once
AUX MASTER 5: OPA1612 sum (22K || 100p) + re-invert, level, buffer, DRV134 out, AFL
AUX MASTER 6: OPA1612 sum (22K || 100p) + re-invert, level, buffer, DRV134 out, AFL
EXT INPUT (2-track / DAW) and MIX / EXT monitor select (SW latched = EXT)
PFL / AFL: OPA1656 sum (22K || 100p) + re-invert, SOLO LEVEL, follower
PFL SWITCHER: DG413 (PFL pressed = SW1/SW4, else SW2/SW3; break-before-make) -> CRS L/R OPA1656 followers
PFL DETECT (0.92 V per press vs 0.50 V; 2 x 1N4148 clamp, 1u debounce) and DG413 logic, beside the switcher
RUDE SOLO: ~2 Hz flasher, PFL ACTIVE LED; held off through FL_N while no key is pressed
CONTROL ROOM: C/ROOM dual A10K, followers, DRV134, mute relays, TRS outs
HEADPHONES: PHONES dual A10K, OPA1612 + LME49600 composite (+9.9 dB), 2R2 out, mute relay, PHONESGND
REMOTE METER HEADER (for a meter bridge)
METER L: full-wave rectifier, precision peak / average, follower (TL072), 2 dB ladder, 2 x 10-LED strings
METER R: full-wave rectifier, precision peak / average, follower (TL072), 2 dB ladder, 2 x 10-LED strings
JACK BOARD LINK 2x20 IDC ribbon to the master jack board (9 jacks, 3 XLRs)

Nets joined by labels; refs auto-assigned
Generated by tools/gen_master.py from master_section_spec.md v0.8

Sheet: /
File: master.kicad_sch

Title: Master section — goa console

Size: User	Date: 2026-10-19	**Rev: 0.8**
KiCad E.D.A. 10.0.7		Id: 1/1