

goa console PSU: Hammond 1402KV case and Fischer SK 47 75 SA heatsink, drilling

FRONT end panel (from outside; heatsink outline dashed)

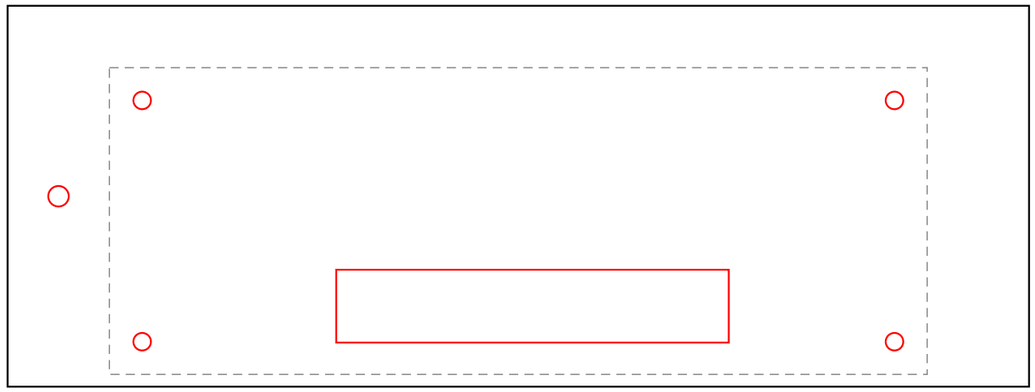


96.0 x 17.8 at (128.37, 19.70) the four TO-220s (tab backs 1.68 proud of the board edge, through the panel onto the heatsink)
Ø4.3 at (32.91, 11.00) heatsink fixing M4
Ø4.3 at (216.91, 11.00) heatsink fixing M4
Ø4.3 at (32.91, 70.00) heatsink fixing M4
Ø4.3 at (216.91, 70.00) heatsink fixing M4
Ø5.0 at (12.45, 46.57) power LED (panel clip)

REAR end panel (from outside)

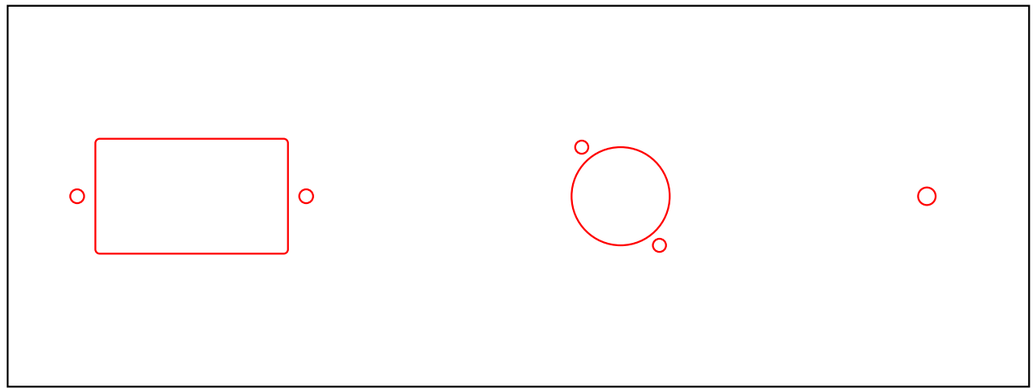


47.1 x 28.1 R1 at (45.00, 46.57) Schurter DD11 (inlet, 2-pole switch, fuse)
Ø3.4 at (17.00, 46.57) DD11 screw
Ø3.4 at (73.00, 46.57) DD11 screw
Ø24 at (149.91, 46.57) Neutrik NC7FD-LX (console output)
Ø3.2 at (140.41, 58.57) NC7FD-LX screw
Ø3.2 at (159.41, 34.57) NC7FD-LX screw
Ø4.3 at (224.81, 46.57) M4 earth stud (star washers both sides)

HEATSINK SK 47 75 SA base, seen from the front as the panel (origin its bottom-left)

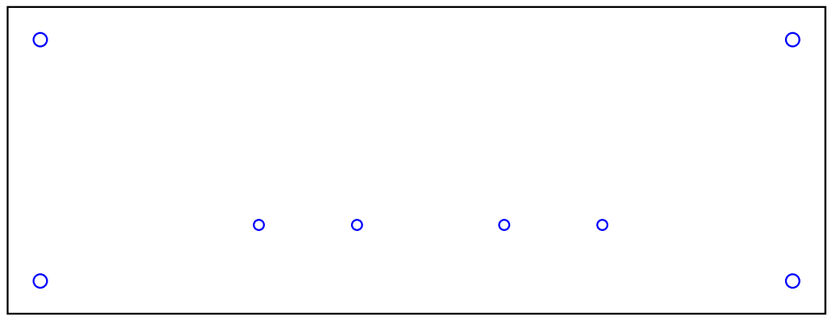

M3 x 6 at (145.46, 21.70) U1 tab (shoulder washer, pad)
M3 x 6 at (121.46, 21.70) Q2 tab (shoulder washer, pad)
M3 x 6 at (85.46, 21.70) U3 tab (shoulder washer, pad)
M3 x 6 at (61.46, 21.70) Q4 tab (shoulder washer, pad)
M4 x 8 at (8.00, 8.00) panel fixing
M4 x 8 at (192.00, 8.00) panel fixing
M4 x 8 at (8.00, 67.00) panel fixing
M4 x 8 at (192.00, 67.00) panel fixing

BASE (from above, front panel at y 0; board and LRS-150 stack dashed)

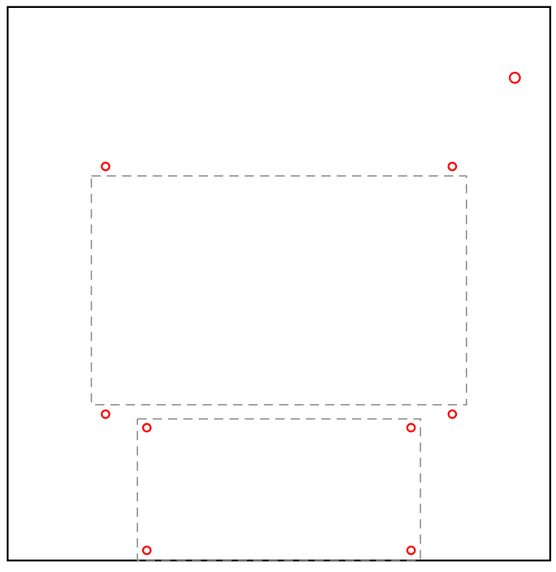

Ø3.2 at (171.00, 4.30) board standoff M3 x 8 (H1-H4)
Ø3.2 at (59.00, 4.30) board standoff M3 x 8 (H1-H4)
Ø3.2 at (171.00, 56.30) board standoff M3 x 8 (H1-H4)
Ø3.2 at (59.00, 56.30) board standoff M3 x 8 (H1-H4)
Ø3.2 at (41.50, 62.00) shelf post M3 x 45
Ø3.2 at (41.50, 167.00) shelf post M3 x 45
Ø3.2 at (188.50, 62.00) shelf post M3 x 45
Ø3.2 at (188.50, 167.00) shelf post M3 x 45
Ø4.3 at (215.00, 204.60) base-to-earth bond (M4, lug to the stud)

Panels and heatsink seen from the front / rear outside, origin bottom-left; base from above, origin front-left inner corner. Red: through, blue: tapped. CHECK before cutting: panel-to-floor offset, TO-220 seating height (2.0 spacer), Neutrik D-size pattern; or mark the heatsink holes from the assembled board.