Rév. Rev.	Date Date	Etabli Prepared	Vérifié Checked	Approuvé Approved	Modifications Modifications	Statut Status
E	04.12.2025.	L. Božičević	D. Burčul	G. Kolić	Après ERU / After FAT	BPE
D	21.07.2025.	T. Trogrlić	D. Burčul	G. Kolić	Pour fabrication / For manufacturing	BPE
C	03.06.2025.	T. Trogrlić	D. Burčul	G. Kolić	Arrêt d'urgence mise à jour / Emergency matrix update	PRE
B	14.04.2025.	L. Božičević	D. Burčul	G. Kolić	Mise à jour générale / General update	PRE
A	07.03.2025.	L. Božičević	D. Burčul	G. Kolić	Etablissement du plan / First issue	PRE

Maîtrise d'ouvrage
Project Owner

ALBIOMA
NOTRE NATURE EST PLEINE D'ÉNERGIE

ALBIOMA BOIS ROUGE

2, Chemin Bois Rouge
97440 Saint-Andre
LA REUNION - FRANCE

Maîtrise d'œuvre
Engineering & Project Management

sepoc
Groupe MERLIN

31, rue Ferrandière
69002 Lyon
Tél : 04-72-32-57-00
Fax : 04-72-32-57-29

Réf. MOE : -

Maîtrise d'ouvrage délégué
Project Owner Delegate

ALBIOMA
NOTRE NATURE EST PLEINE D'ÉNERGIE

Tour OPUS 12 - LA DÉFENSE 9
77, Esplanade du Général de Gaulle
92914 LA DEFENSE CEDEX - FRANCE
Téléphone : +33(0)1.47.76.67.00

UNITE DE VALORISATION CRS ABR
ABR RDF POWER PLANT

+4LKF001AR
BOILER/WSC EMERGENCY POWERED MCC
Schéma électrique
-

Fournisseur / Supplier

ANDRITZ

ANDRITZ TEP d.o.o.
Ulica 108. brigade ZNG, 84
35000 Slavonski Brod, Croatia

Réf. F/S : IF21273

Sous-traitant / Sub-Supplier

SINTAKSA
A Voith Company

Ulica Domovinskog rata 104C, 21 000 Split,
Tuškanova 37, 10000 Zagreb
T: +385 1 2310 273
info@sintaksa.hr
www.sintaksa.hr

Réf. ST/SS : xxxxxxxxxx

Projet Project				Tranche unit		Emetteur Issuer						Numéro Number					Révision Revision
B	R	C	-	4	-	A	T	E	P	0	-	1	8	7	0	-	F

Approbation de la dernière révision : Approval of the latest revision :	Format	Echelle Scale	Folio
	A3	1/XX	1/250

SINTAKSA
A Voith Company

Ulica Domovinskog rata 104C,
21 000 Split, Hrvatska / Croatia
OIB: 32357958120
T: +385 1 2310 273
www.sintaksa.hr

SCHÉMA DE CÂBLAGE ÉLECTRIQUE

Projet / tâche:

RDF Albioma Les Bois Rouge
Reunion - France

Cadre:

BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 1 +4LKF001AR

Client / acheteur:

ANDRITZ TEP d.o.o.
Ulica 108. brigade ZNG 84, 35000
Slavonski Brod, Croatia

Code du document:

BRC-4-ATEP0-1870-F

Date:
17.03.2026.

Table of contents

WIRE COLOR		
VOLTAGE	DESIGNATION	COLOR
400VAC	PHASE 1	BLACK - BLACK SLEEVE
400VAC	PHASE 2	BLACK - BROWN SLEEVE
400VAC	PHASE 3	BLACK - RED SLEEVE
	GROUND	GREEN & YELLOW
230VAC	PHASE	BROWN / BLACK
230VAC	NEUTRAL	BLUE / LIGHT BLUE
48VAC	PHASE 1	WHITE
48VAC	PHASE 2	GREY
24VDC	+24V PLC	RED
24VDC	-24V PLC	BLUE
EXTERNE	VOLTAGE > 48 VAC	ORANGE
ANALOG SIGNALS	ALL CONDUCTORS	VIOLET

INTERNAL CABINET WIRING	
CURRENT	SECTION
< 10A	1 mm²
10A	1.5 mm²
16-20A	2.5 mm²
25A	4 mm²
32A	6 mm²
40-50A	10 mm²
63A	16 mm²
80-100A	25 mm²
125A	35 mm²
160A	50 mm²
WIRE TYPE : HO7VK	

POWER	SECTION MIN : 2,5 mm²
INTERNAL WIRING MARK	WIRE/LINE OF CELL" e.g.: WIRE 3/LINE 4 → 3.4
CABLE MARKING	SEE CABLE BOOK
WIRE MARKING	MARKING BY SES V 37

TERMINAL TYPE	SECTION
PUSH-IN CONNECTION TERMINALS	≤ 6mm²
SCREW CONNECTION TERMINALS	> 6mm²

GROUNDING TYPE	IT
NETWORK VOLTAGE	400/230VCA, 48VCA
SHORT CIRCUIT CURRENT	IK3MAX: 31 kA

DEVICE TAG

DESIGNATION	DEVICE TYPE	ACCORDING TO
-BA	MEASUREMENT MODULE (VOLTAGE)	NF EN 81346-2
-BC	MEASUREMENT MODULE (CURRENT)	NF EN 81346-2
-BE	MODULE FOR INSULATION AND FAULT LOCATION	NF EN 81346-2
-BE	FAULT-LOCATING MODULE	NF EN 81346-2
-DS	DISTRIBUTION BLOCK	NF EN 81346-2
-EP	HEATER	NF EN 81346-2
-FA	SURGE PROTECTOR	NF EN 81346-2
-FU	FUSE-DISCONNECTOR	TYPICAL
-CQ	VENTILATOR	NF EN 81346-2
-HL	SIGNAL LAMP	TYPICAL
-IG	SWITCH DISCONNECTOR	TYPICAL
-K	RELAY	TYPICAL
-KF	PLC	NF EN 81346-2
-KM	CONTACTOR	TYPICAL
-P	MULTIMETER	NF EN 81346-2
-P	THERMOSTAT, HYGROSTAT	NF EN 81346-2
-PF	LAMP	NF EN 81346-2
-PG	AMMETER	NF EN 81346-2
-Q	CIRCUIT BREAKER, MCB, MPCB	TYPICAL
-QA	SOFT STARTER	NF EN 81346-2
-QB	CIRCUIT BREAKER, MCCB, ACB	TYPICAL
-R	DIODE MODULES	NF EN 81346-2
-RF	FILTER	NF EN 81346-2
-RP	SAFETY RELAY	NF EN 81346-2
-S	SELECTOR SWITCHES, PUSH-BUTTON, DOOR SWITCH	TYPICAL
-TA	VARIABLE FREQUENCY DRIVE	NF EN 81346-2
-TB	INVERTER, RECTIFIER	NF EN 81346-2
-TC	CURRENT TRANSFORMER	TYPICAL
-TCU	CURRENT TRANSFORMER PHASE L1	TYPICAL
-TCV	CURRENT TRANSFORMER PHASE L2	TYPICAL
-TCW	CURRENT TRANSFORMER PHASE L3	TYPICAL
-U	SWITCH	NF EN 81346-2
-X	TERMINAL BLOCK	TYPICAL
-XS	SOCKET	NF EN 81346-2

CABLE DESIGNATION

DESIGNATION	LIAISON TYPE
-A	HV POWER SUPPLY
-B	LV POWER SUPPLY > 24V
-C	POWER SUPPLY 24 VDC, CONTROL / DIGITAL INPUT/OUTPUT
-E	LIGHTING, SOCKET, HEATING/COOLING, VENTILATION
-M	MEASUREMENTS, ANALOGICAL SIGNALS
-S	COMMUNICATION
-T	TELEPHONE - INTERCOM

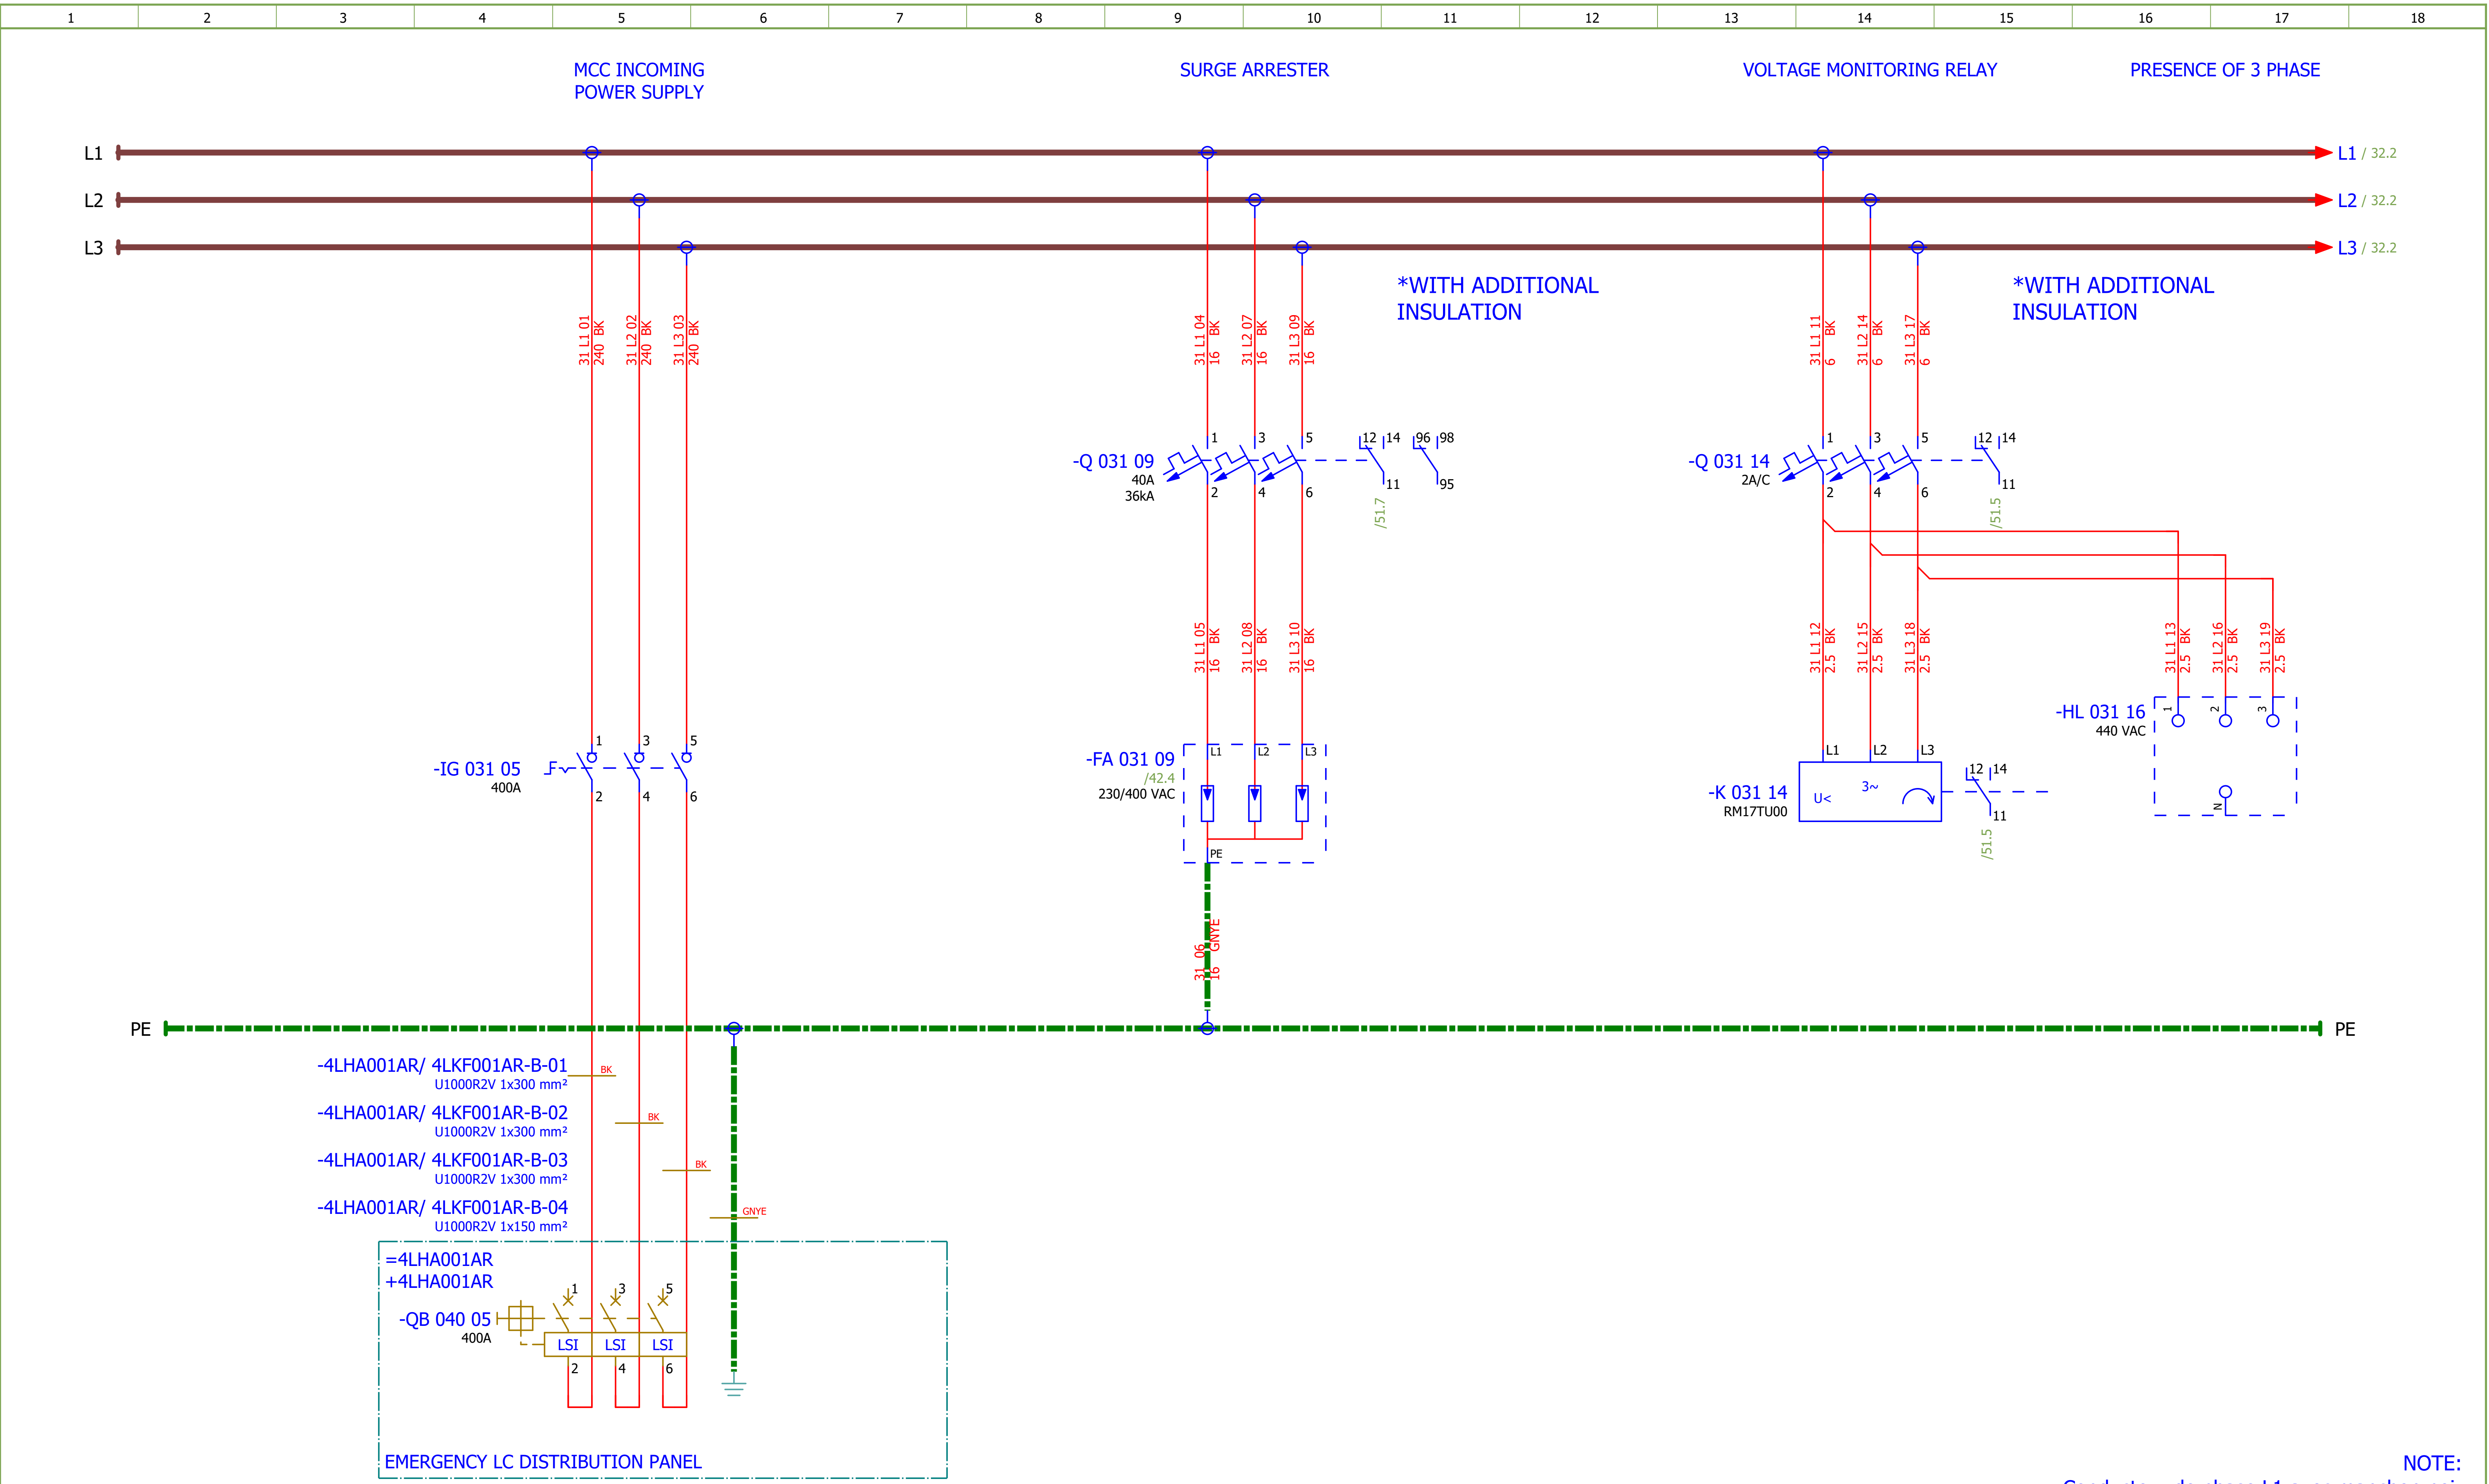

NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date: 17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 1	Project: BRC-4	Unit & Issuer: ATEP0
Drawn: Luka Božičević				Number: 1870	Revision: F
Approved: Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: 400VAC INCOMING SUPPLY	Drawing designation: BRC-4-ATEP0-1870-F	=4LKF001AR
Format: A3				#D	+4LKF001AR
Sheet: 31	Next: 32				

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

GROUND FAULT MEASUREMENT

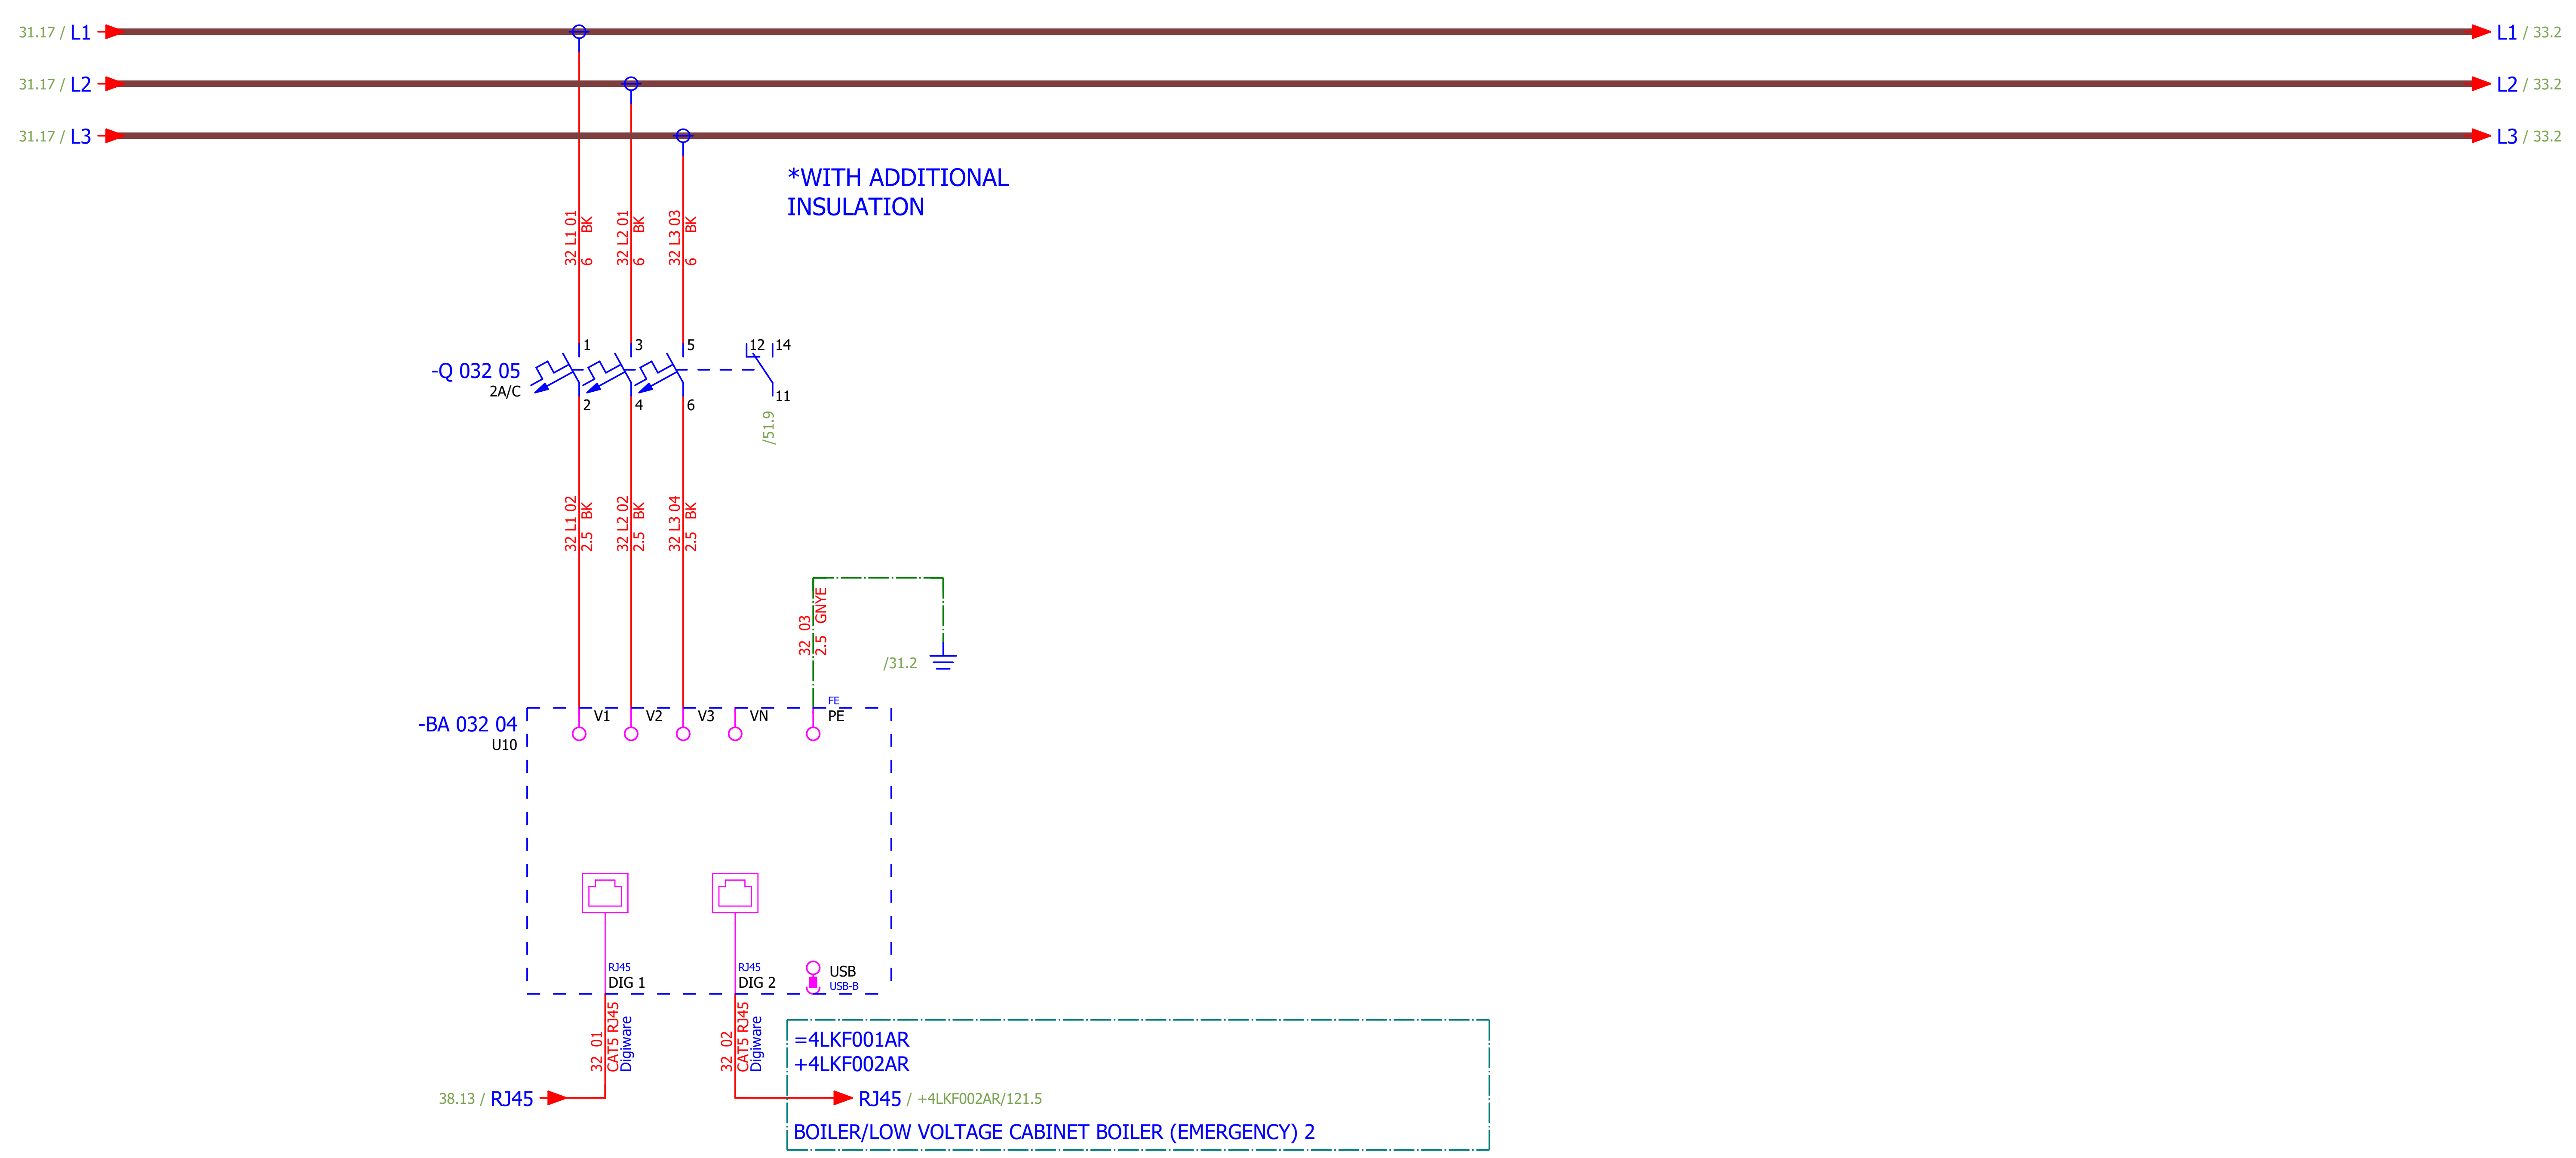

NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 1	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: 400VAC INCOMING SUPPLY	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 32
Format:	A3								+4LKF001AR	Next: 33

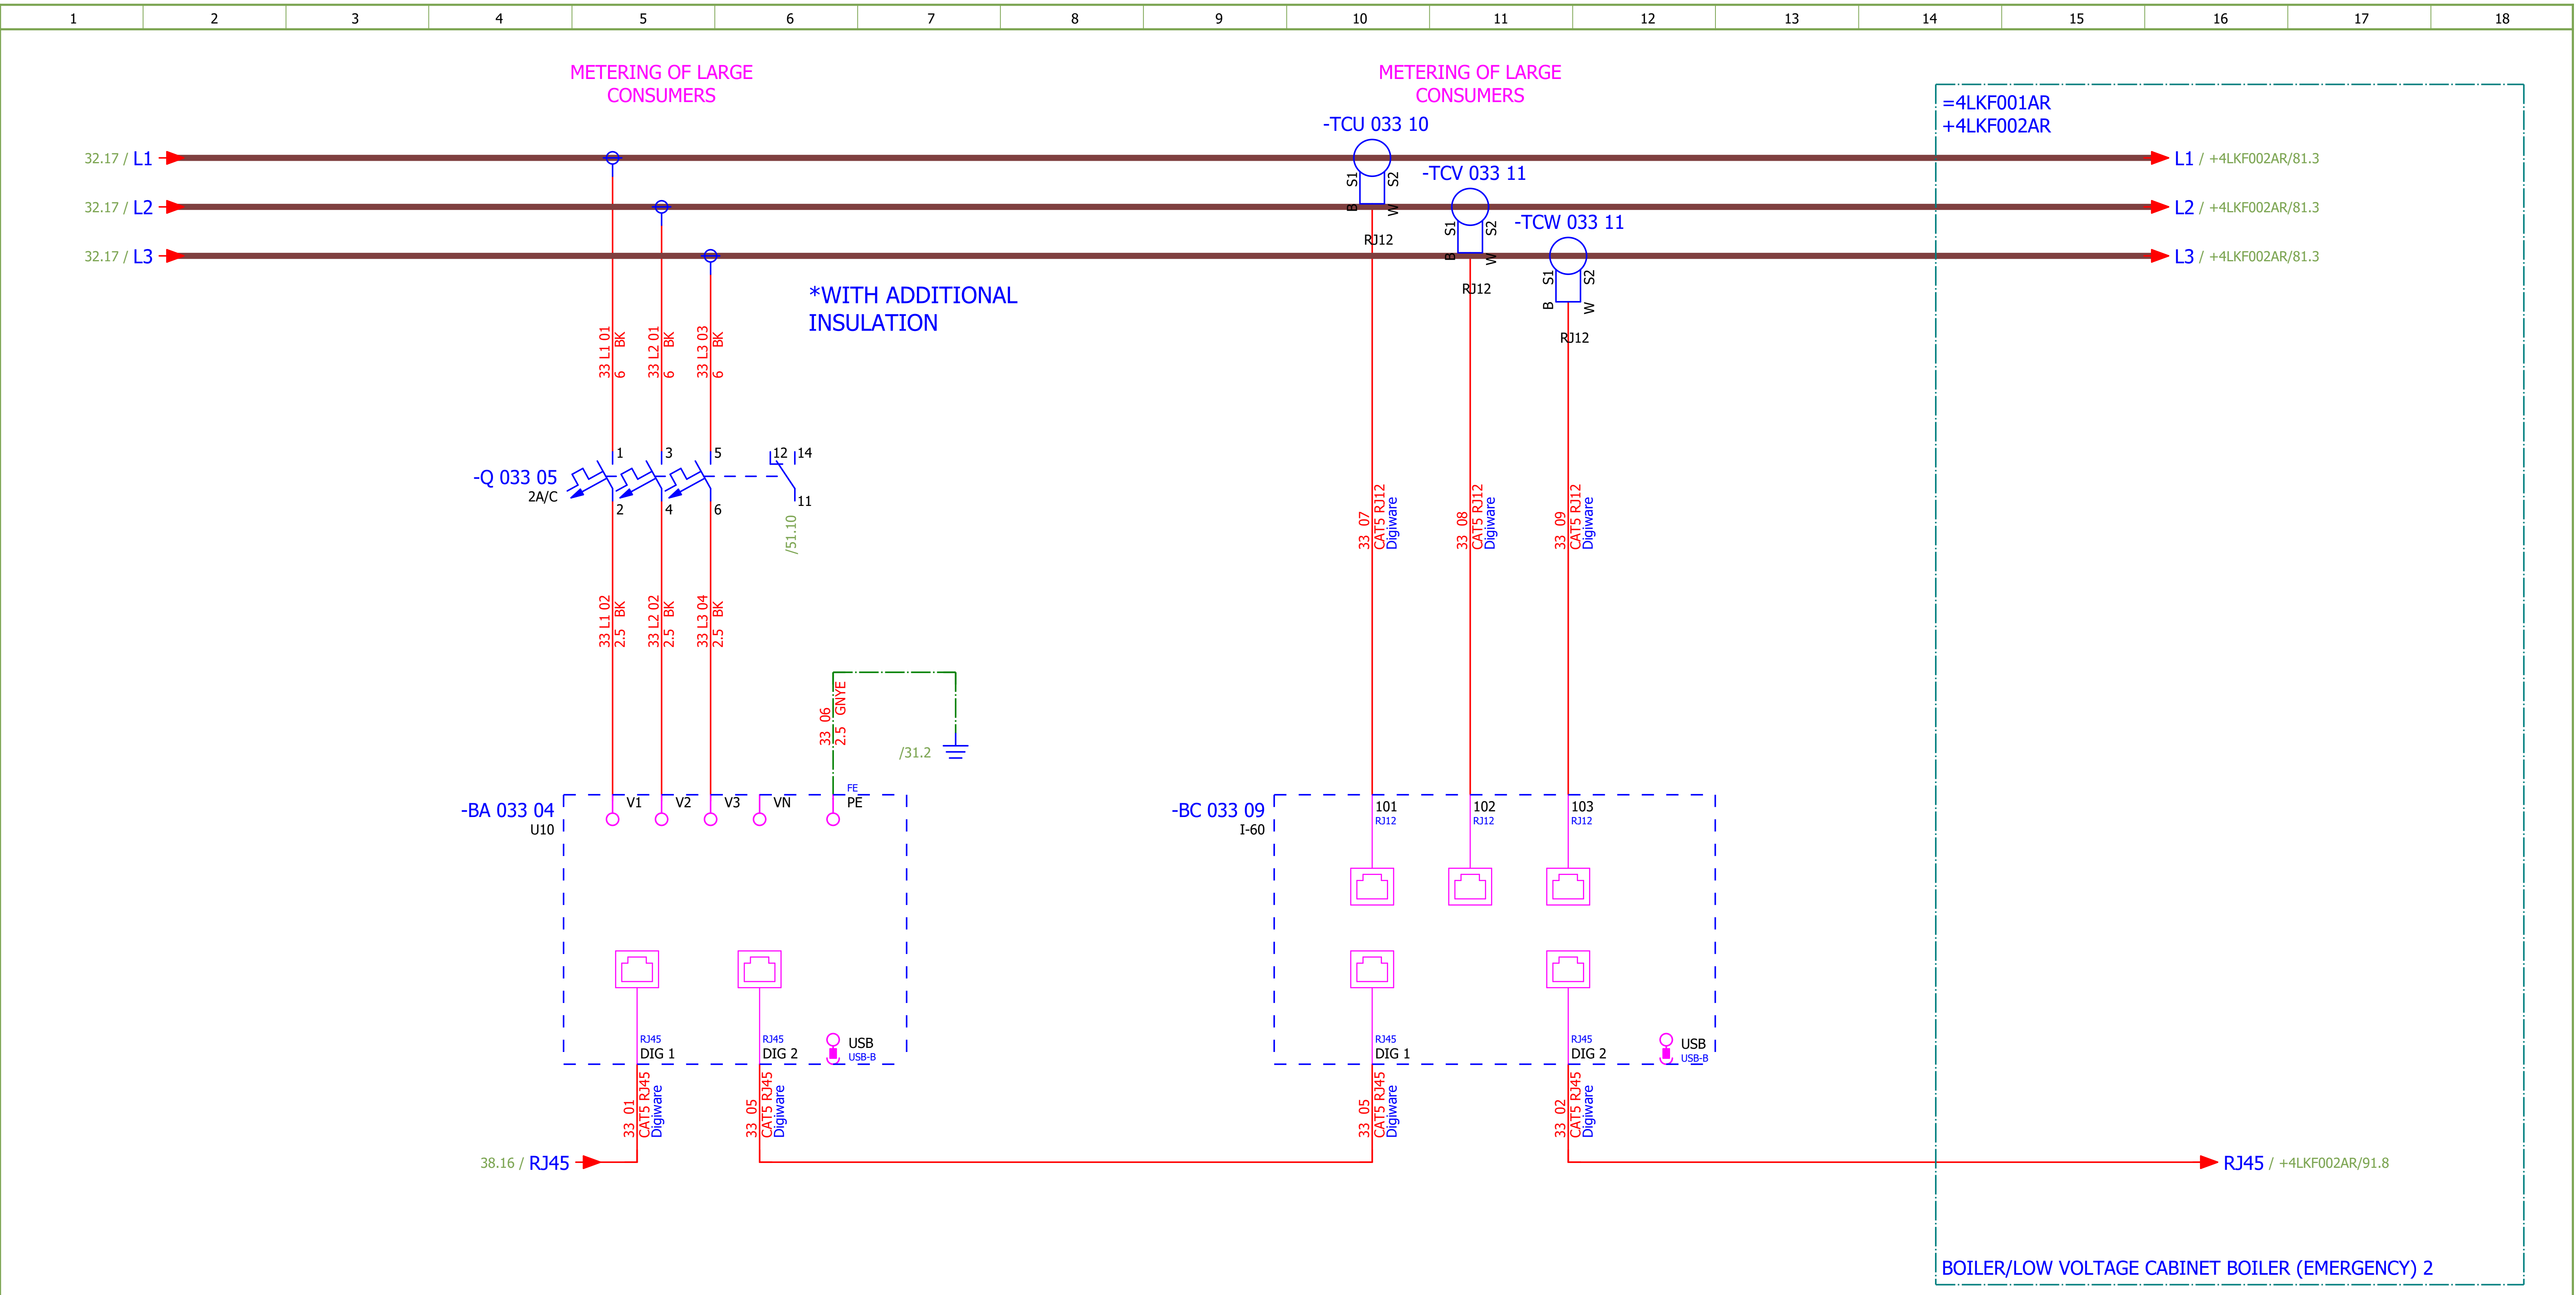

NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date:	17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 1	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870
Drawn:	Luka Božičević						Revision: F
Approved:	Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: 400VAC INCOMING SUPPLY	Drawing designation: BRC-4-ATEP0-1870-F	=4LKF001AR	#D Sheet: 33
Format:	A3					+4LKF001AR	Next: 34

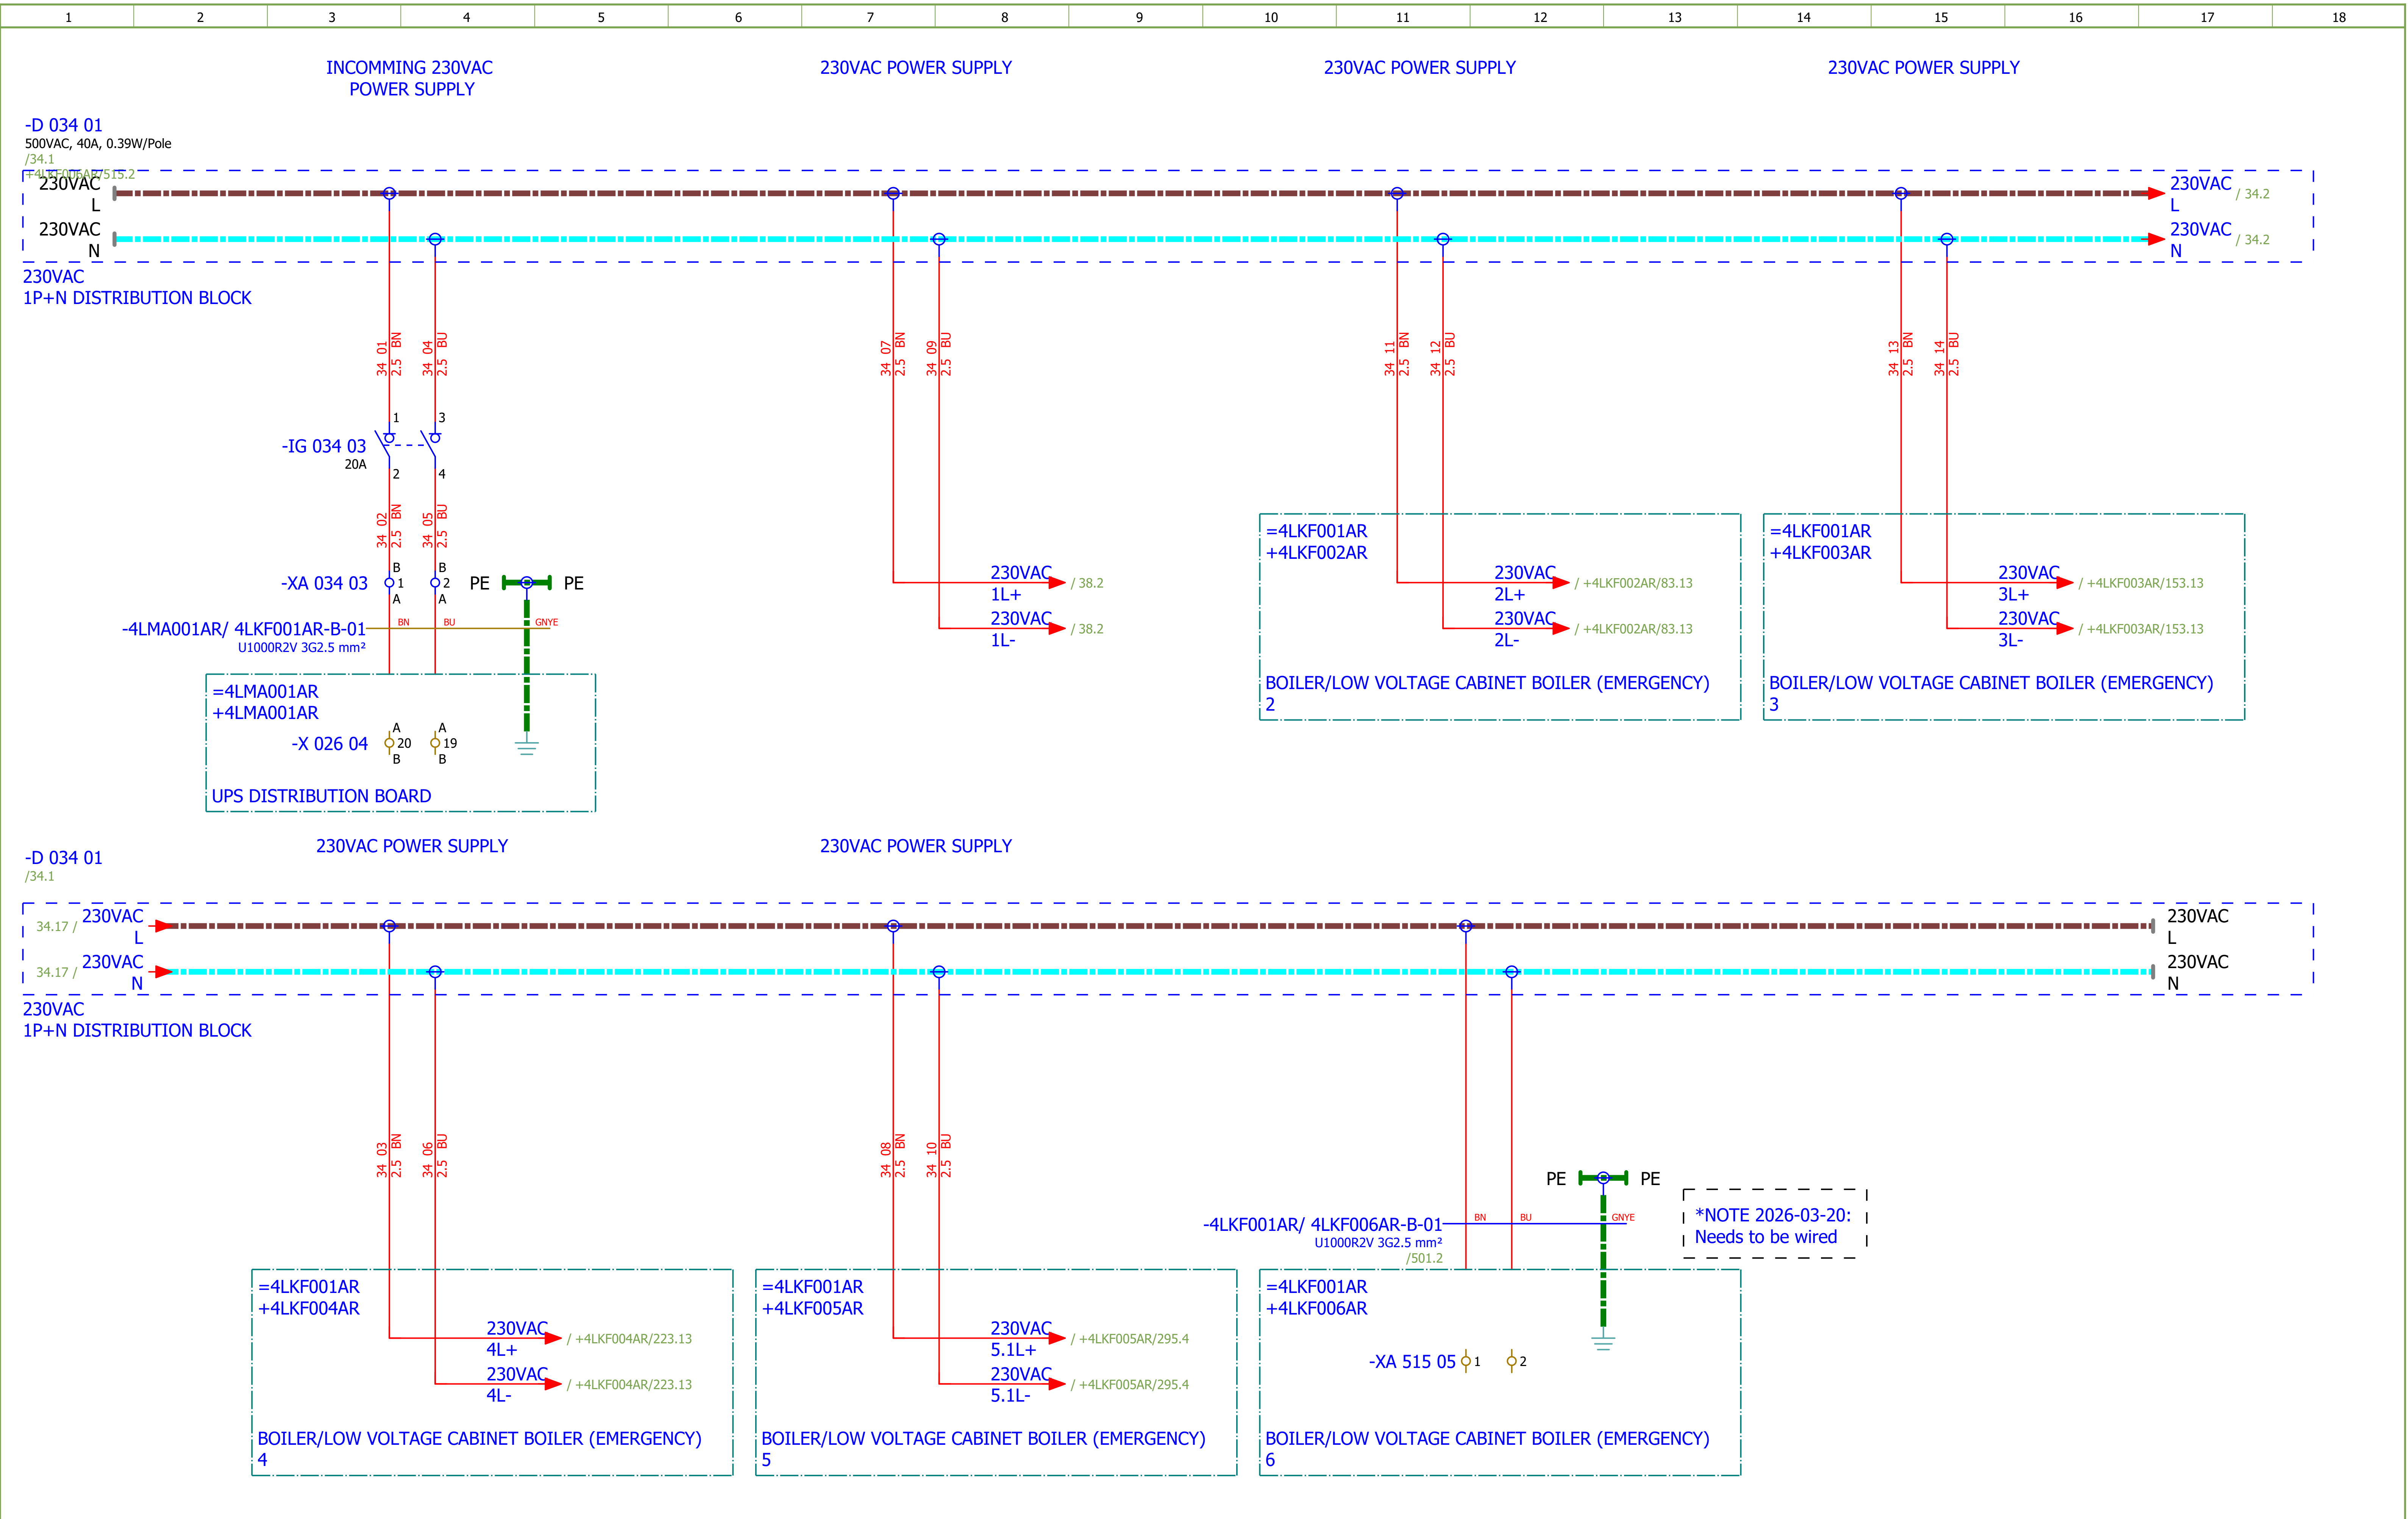

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 1	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Luka Božičević										
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	230VAC DISTRIBUTION	Drawing designation:	BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 34
Format:	A3									+4LKF001AR	Next: 35

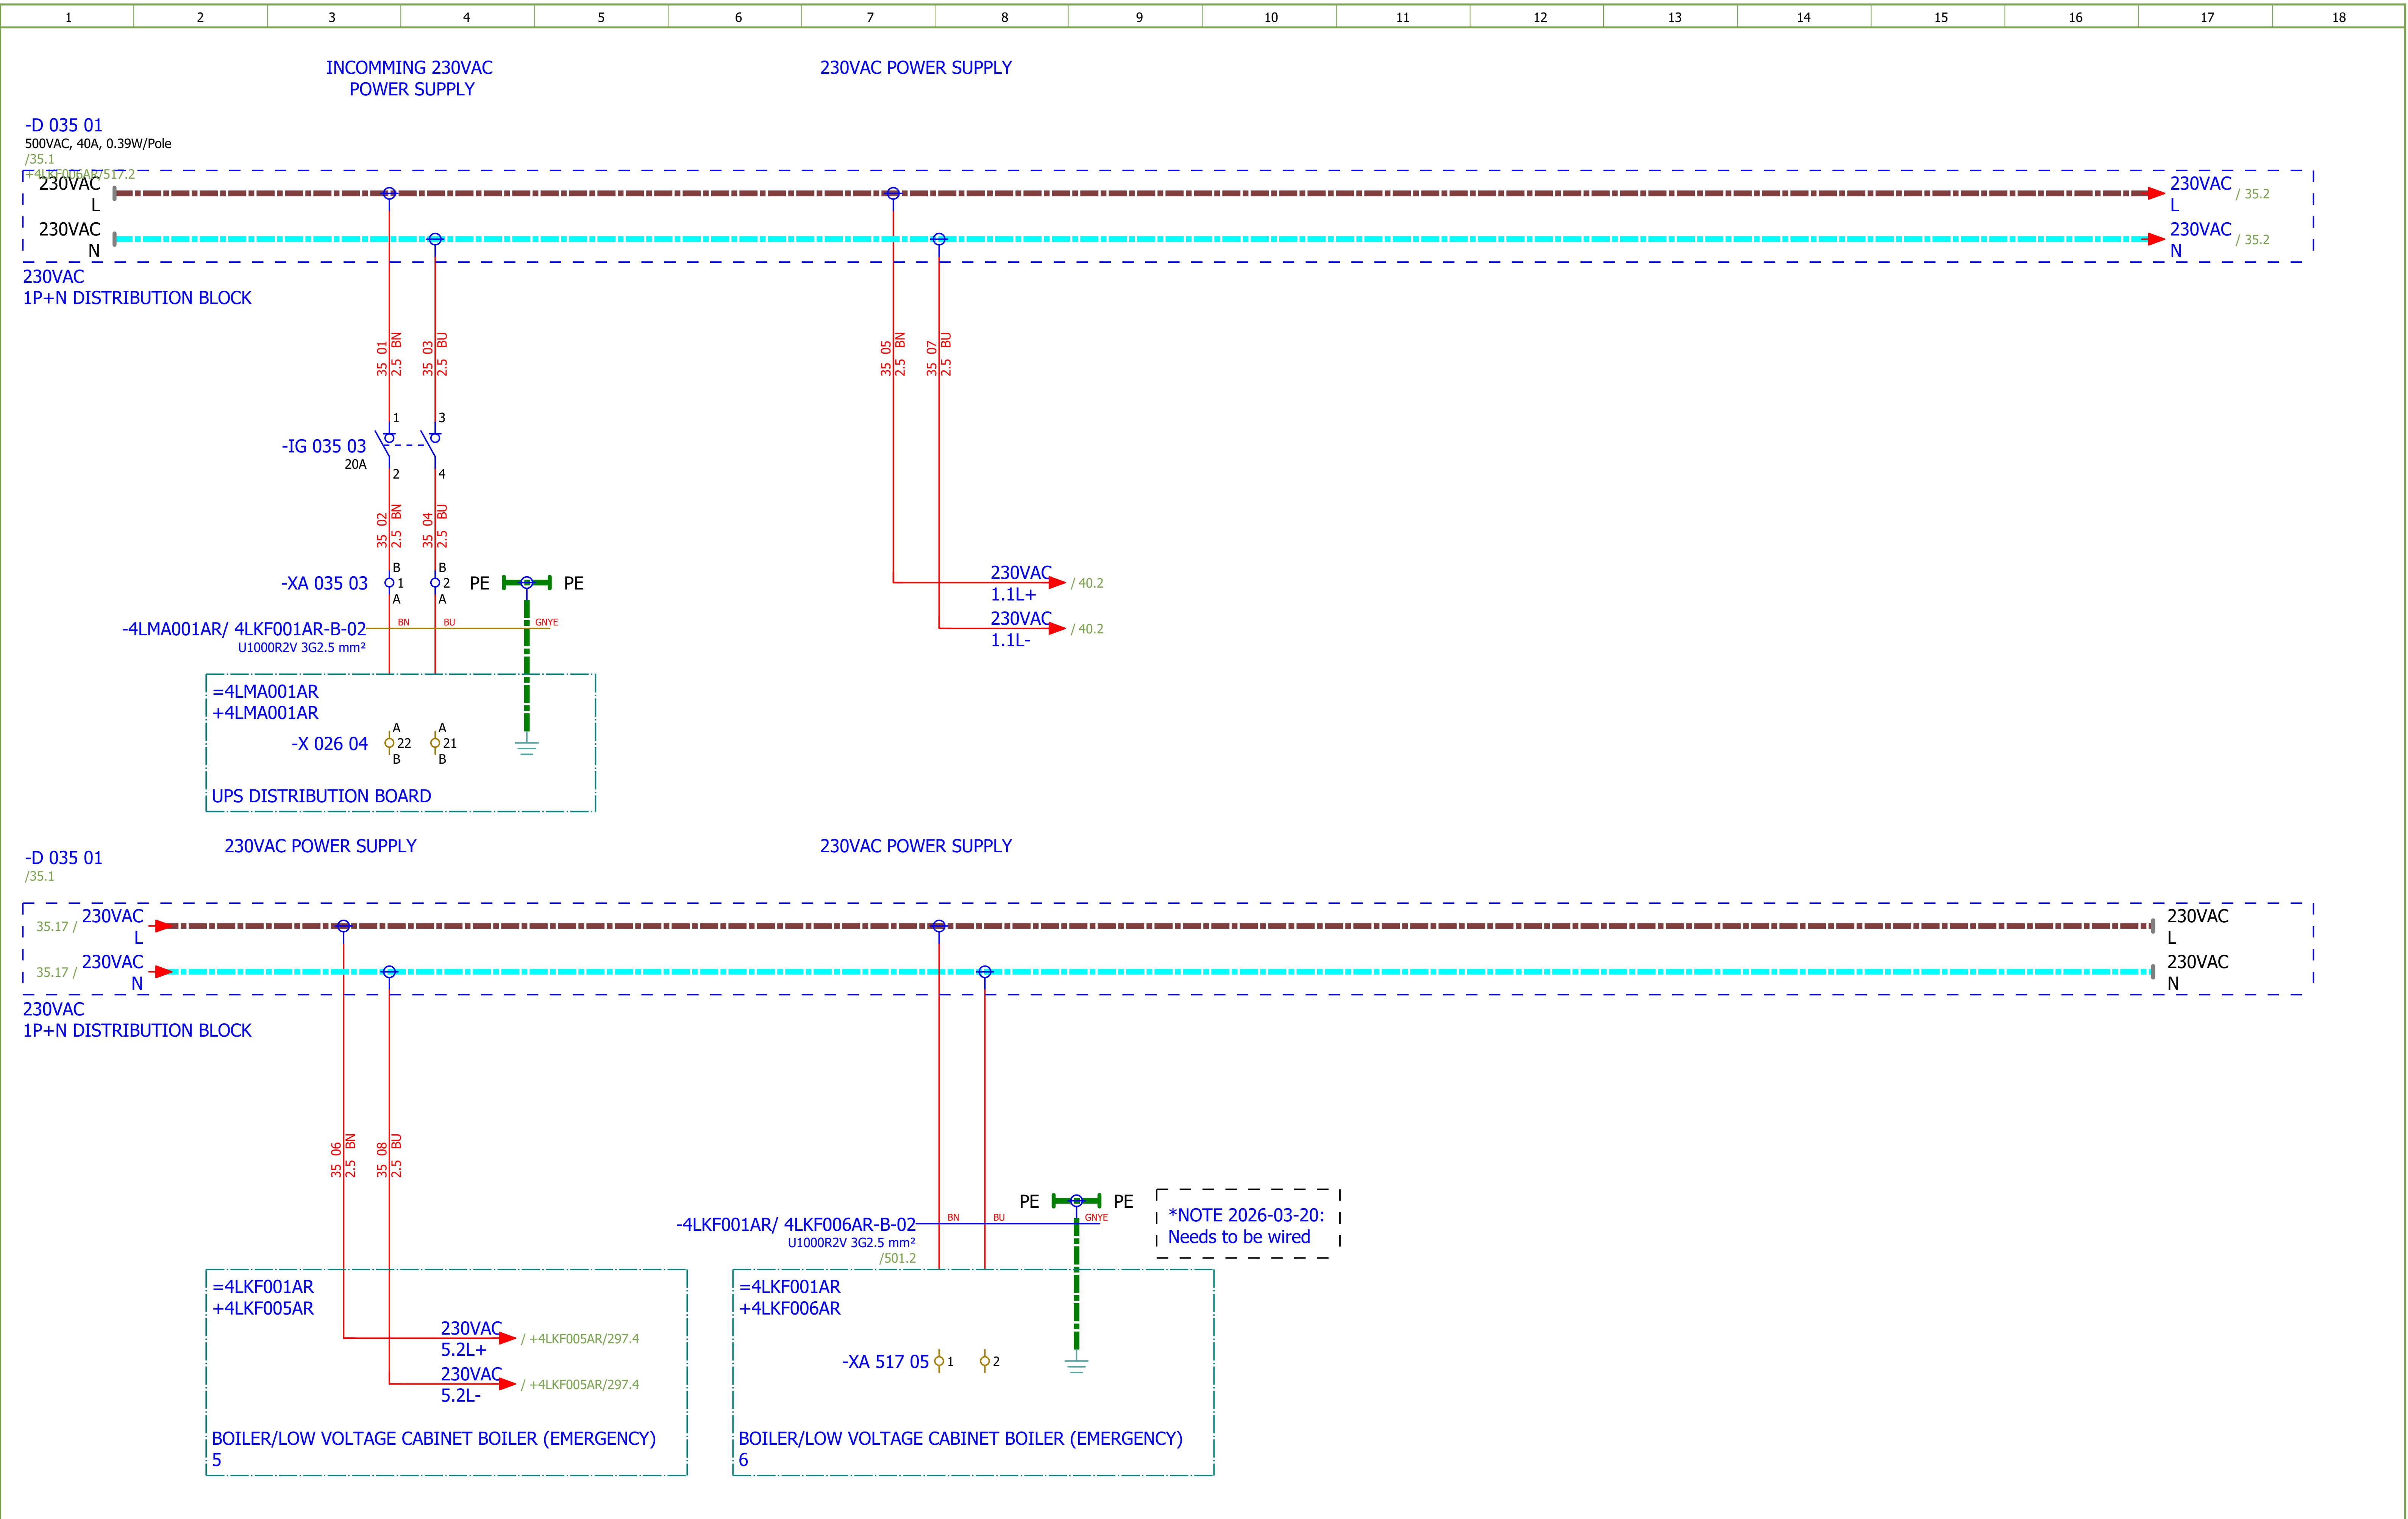

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 1	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Luka Božičević								#D
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: 230VAC DISTRIBUTION	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 35
Format:	A3							+4LKF001AR	Next: 36

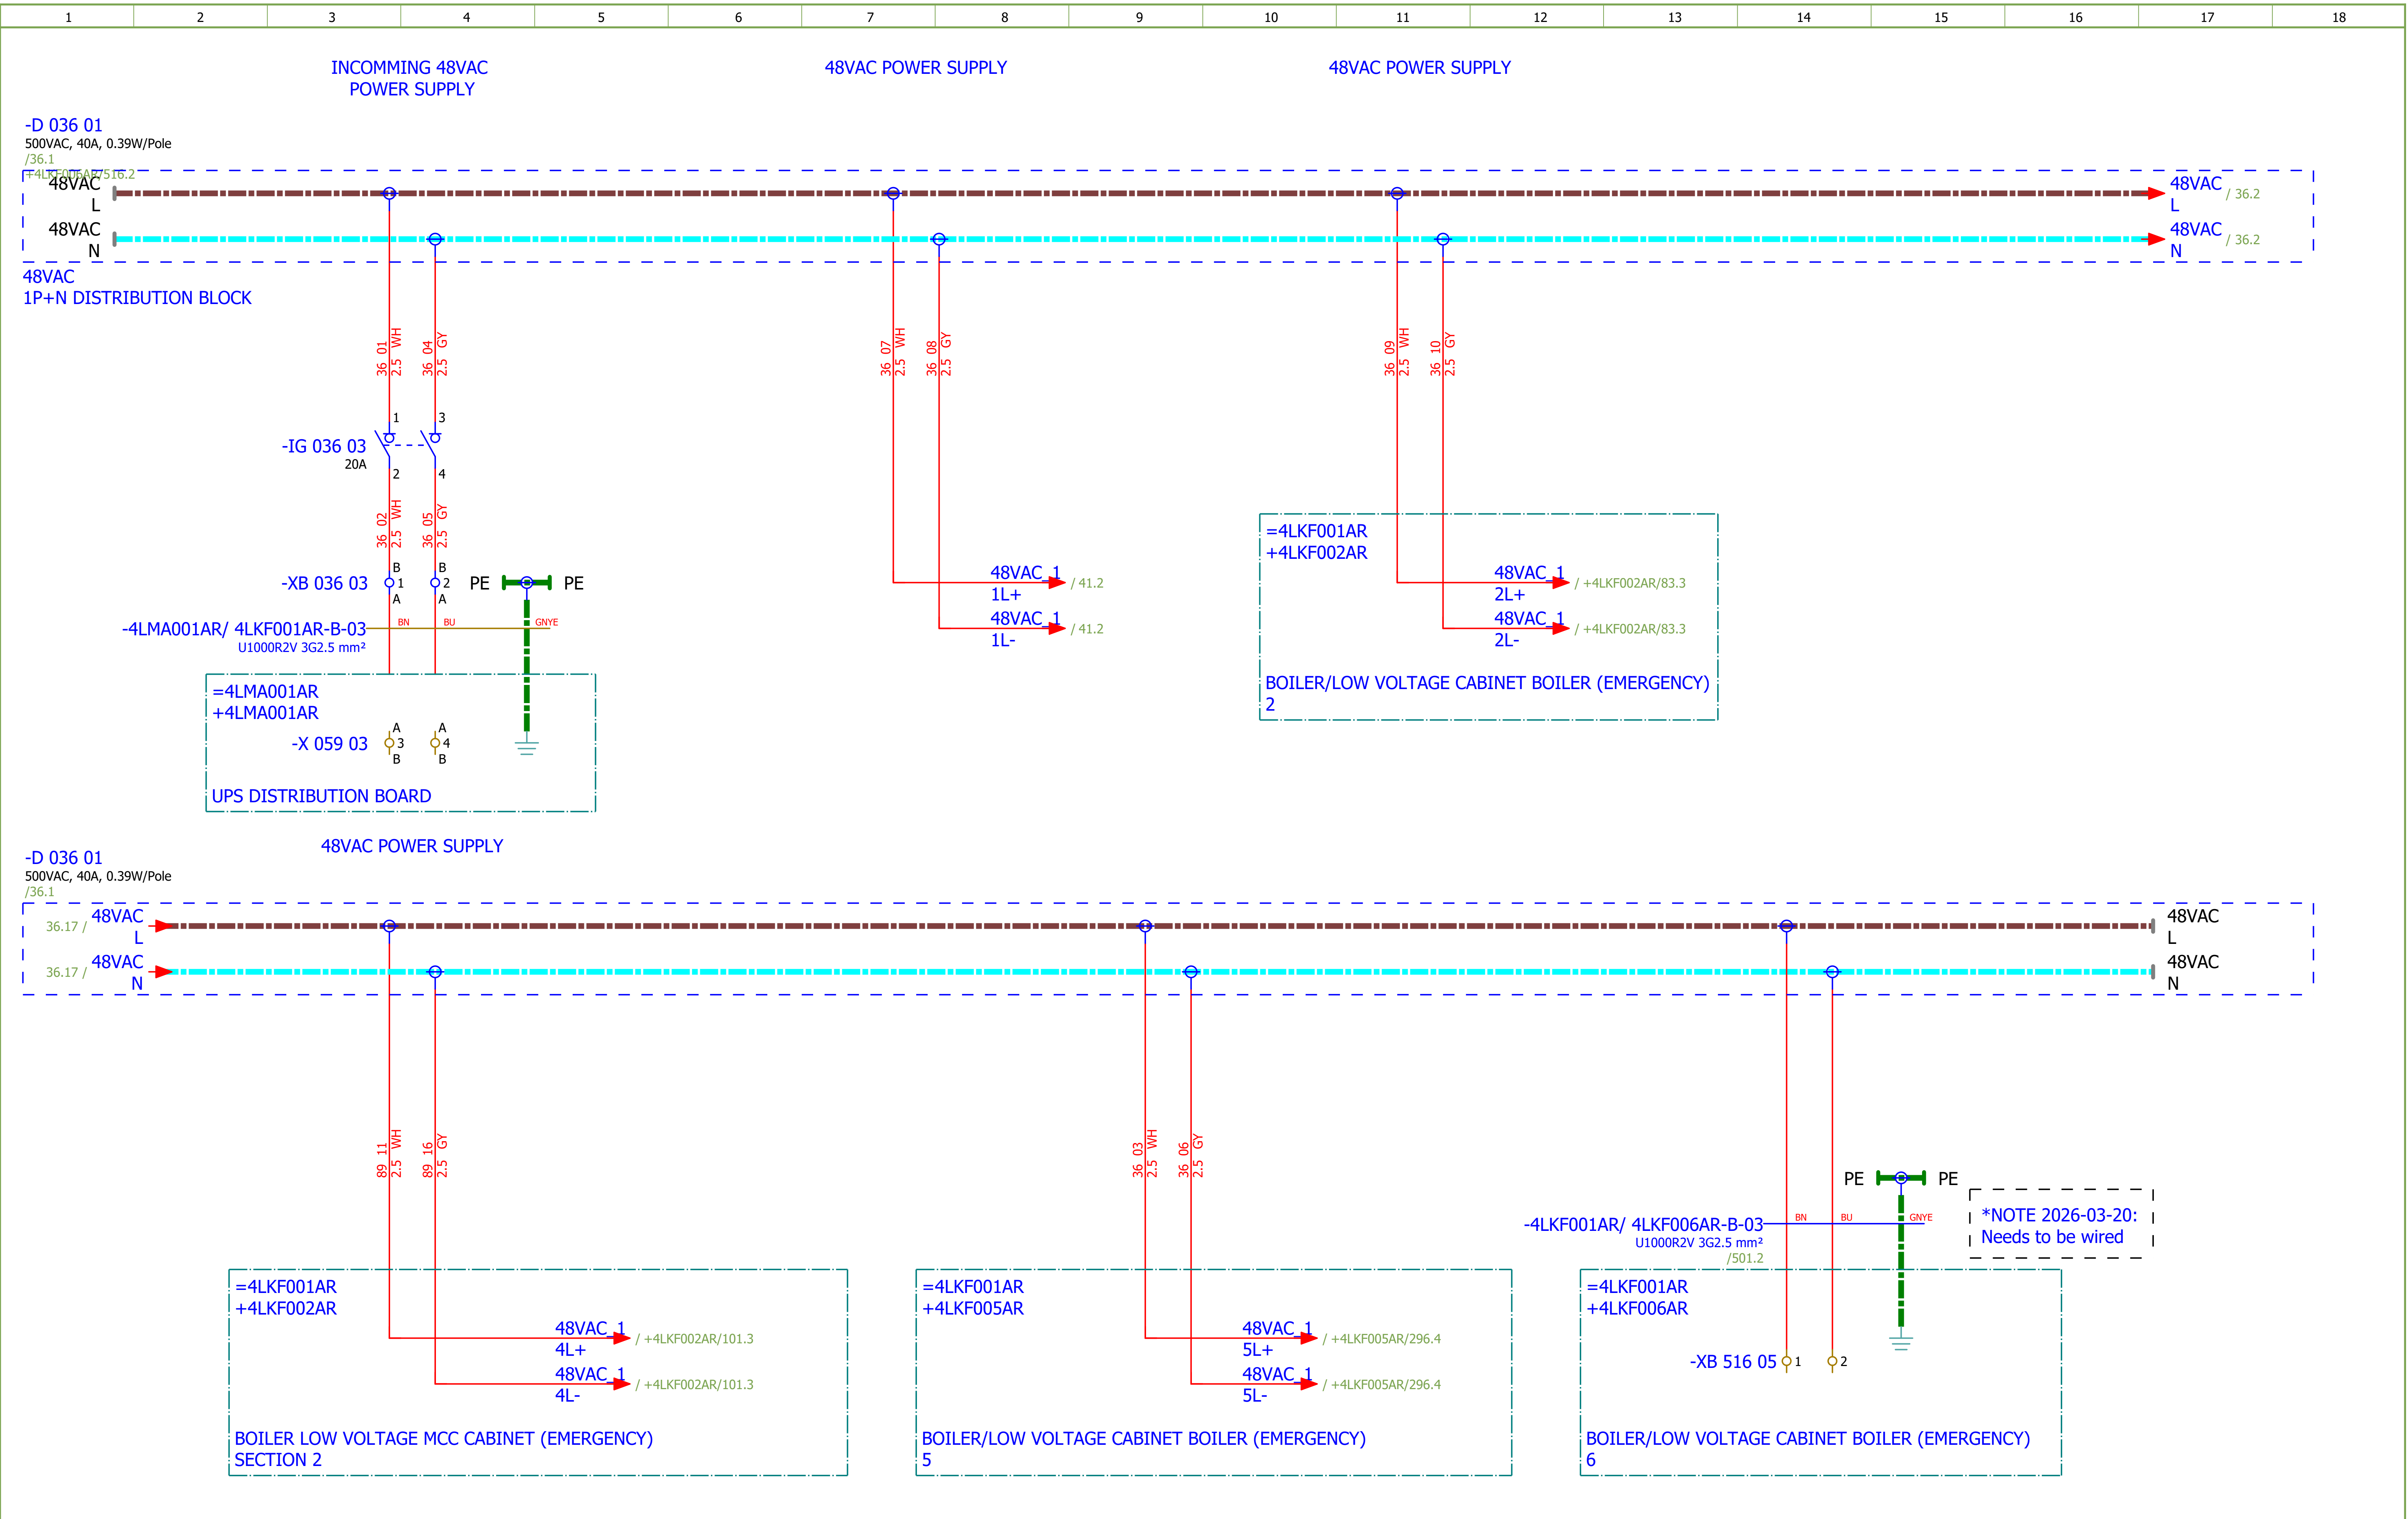

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 1	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: 48VAC DISTRIBUTION	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 36
Format:	A3								+4LKF001AR	Next: 37

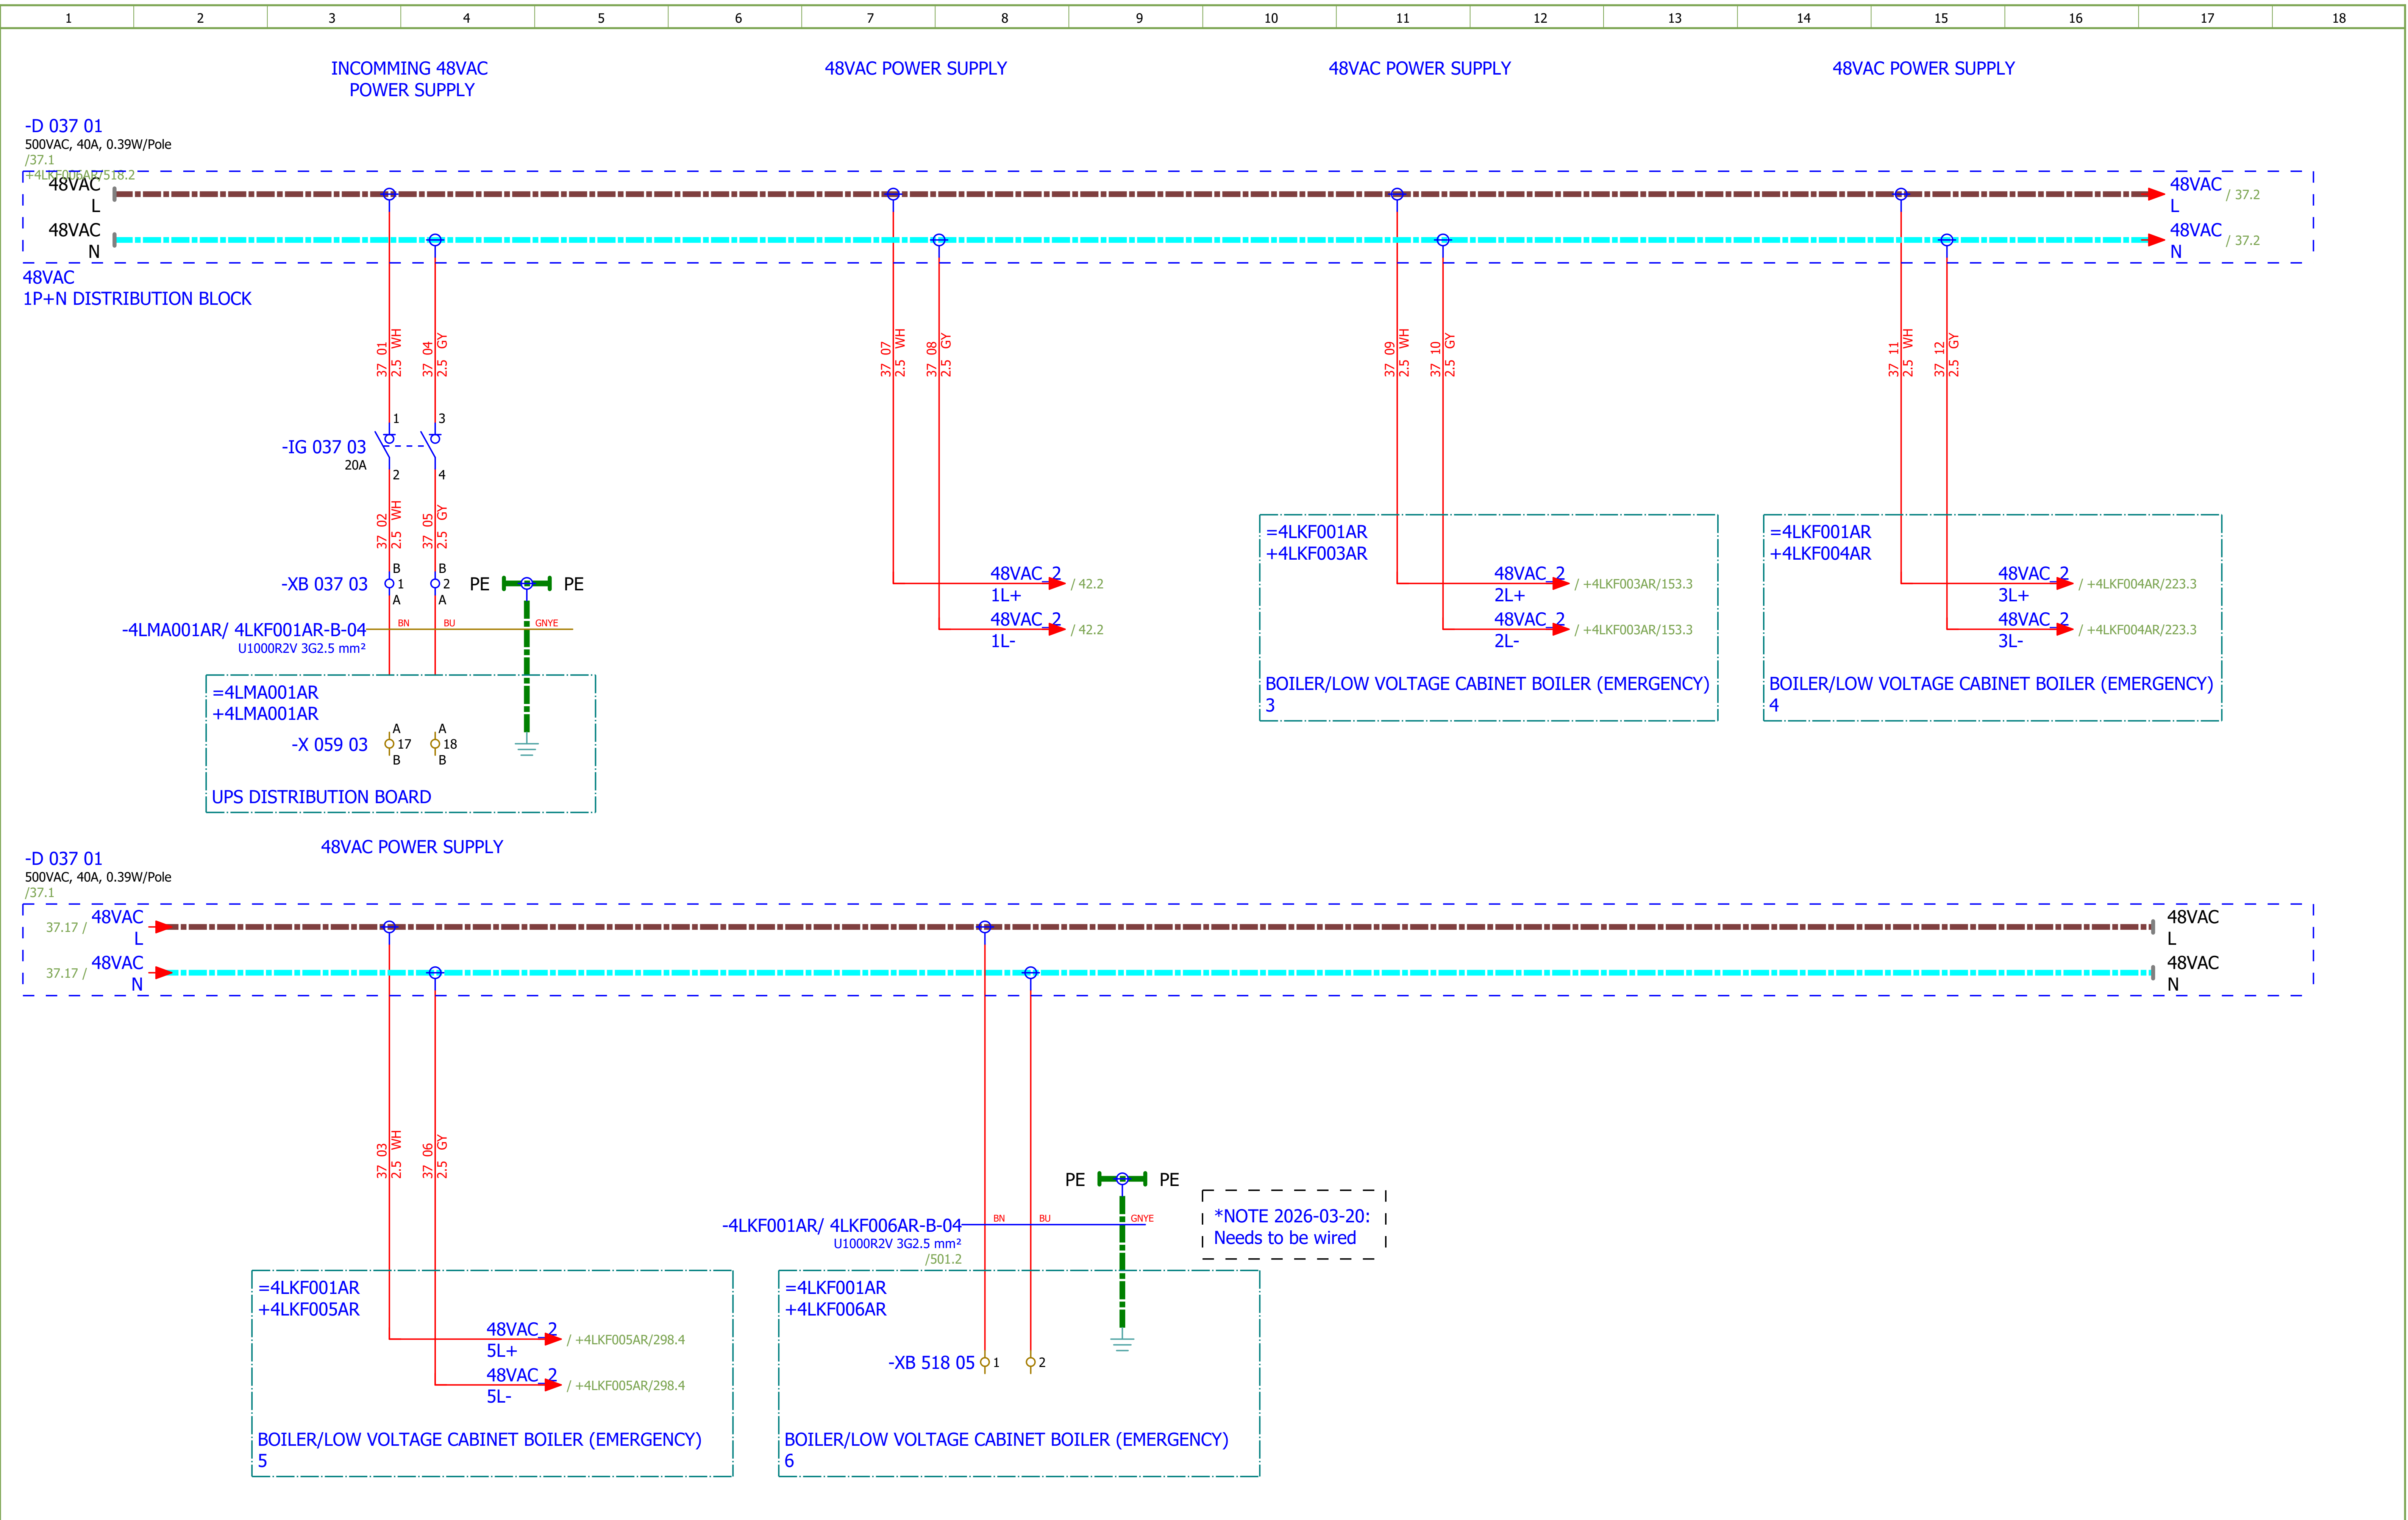

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 1	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: 48VAC DISTRIBUTION	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 37
Format:	A3								+4LKF001AR	Next: 38

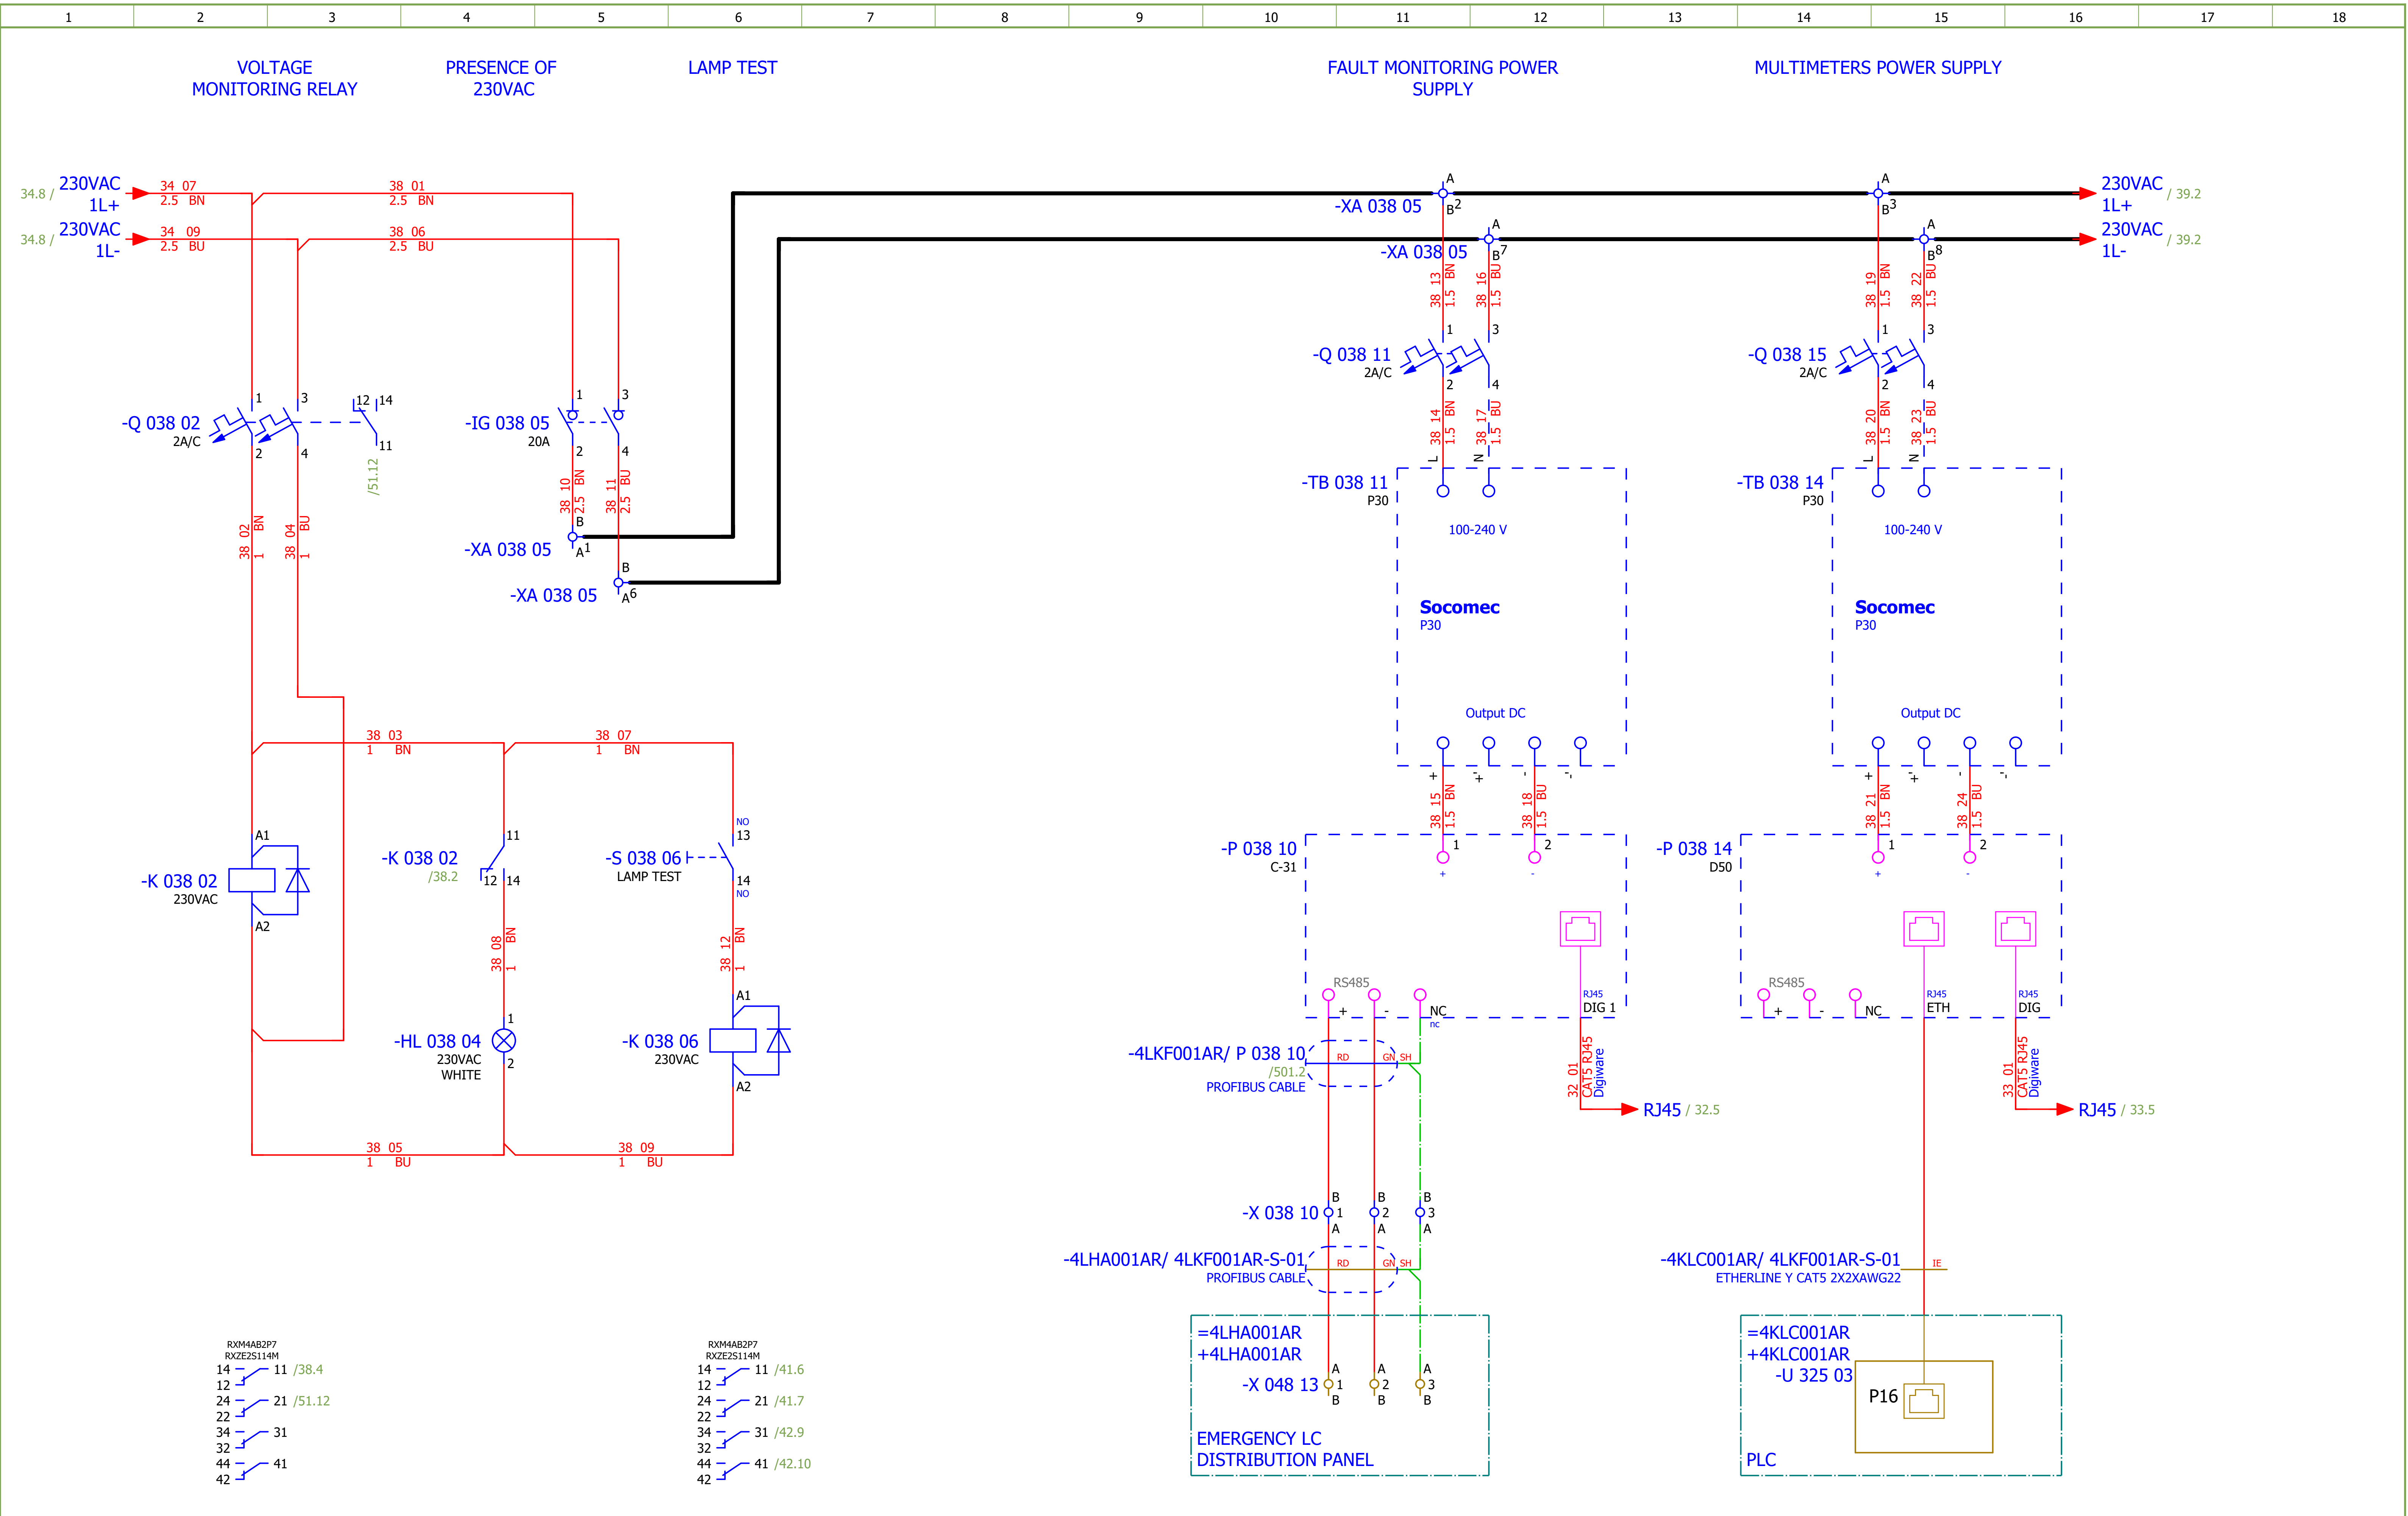

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 1	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Luka Božičević								#D
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: 230VAC DISTRIBUTION	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 38
Format:	A3							+4LKF001AR	Next: 39

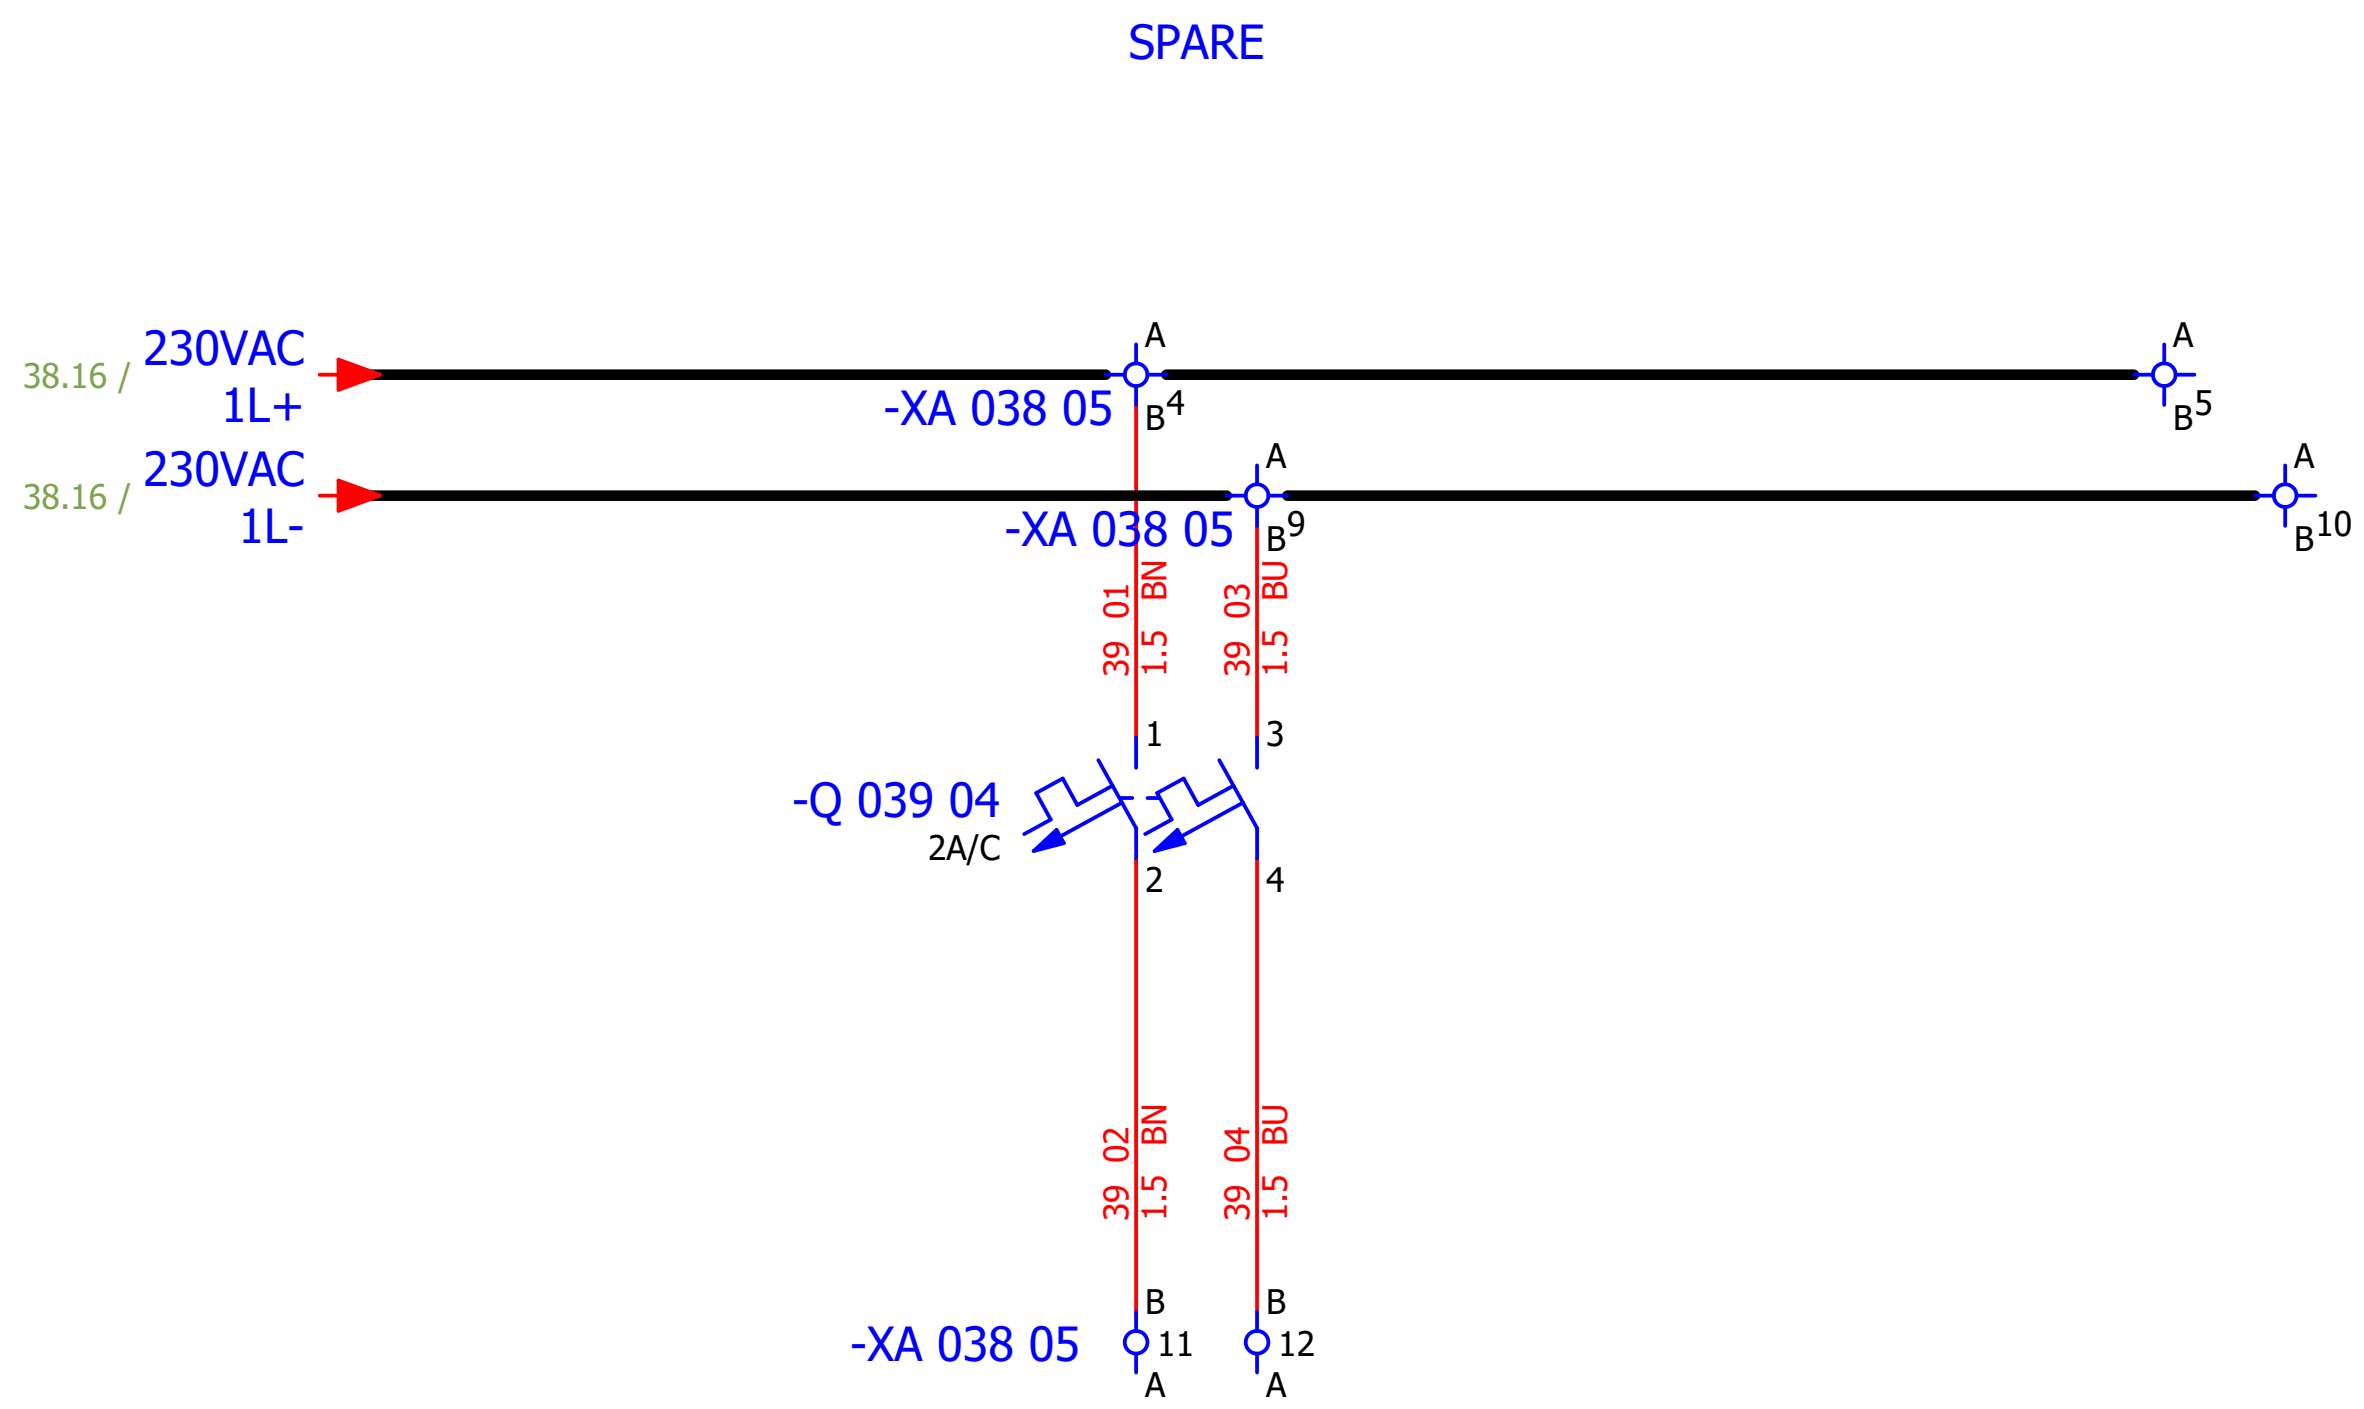
SPARE
38.16 /
230VAC
1L+
38.16 /
230VAC
1L-
-XA 038 05
-XA 038 05
39 01 1.5 BN
39 03 1.5 BU
-Q 039 04
2A/C
39 02 1.5 BN
39 04 1.5 BU
-XA 038 05

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

VOLTAGE MONITORING RELAY

PRESENCE OF 230VAC

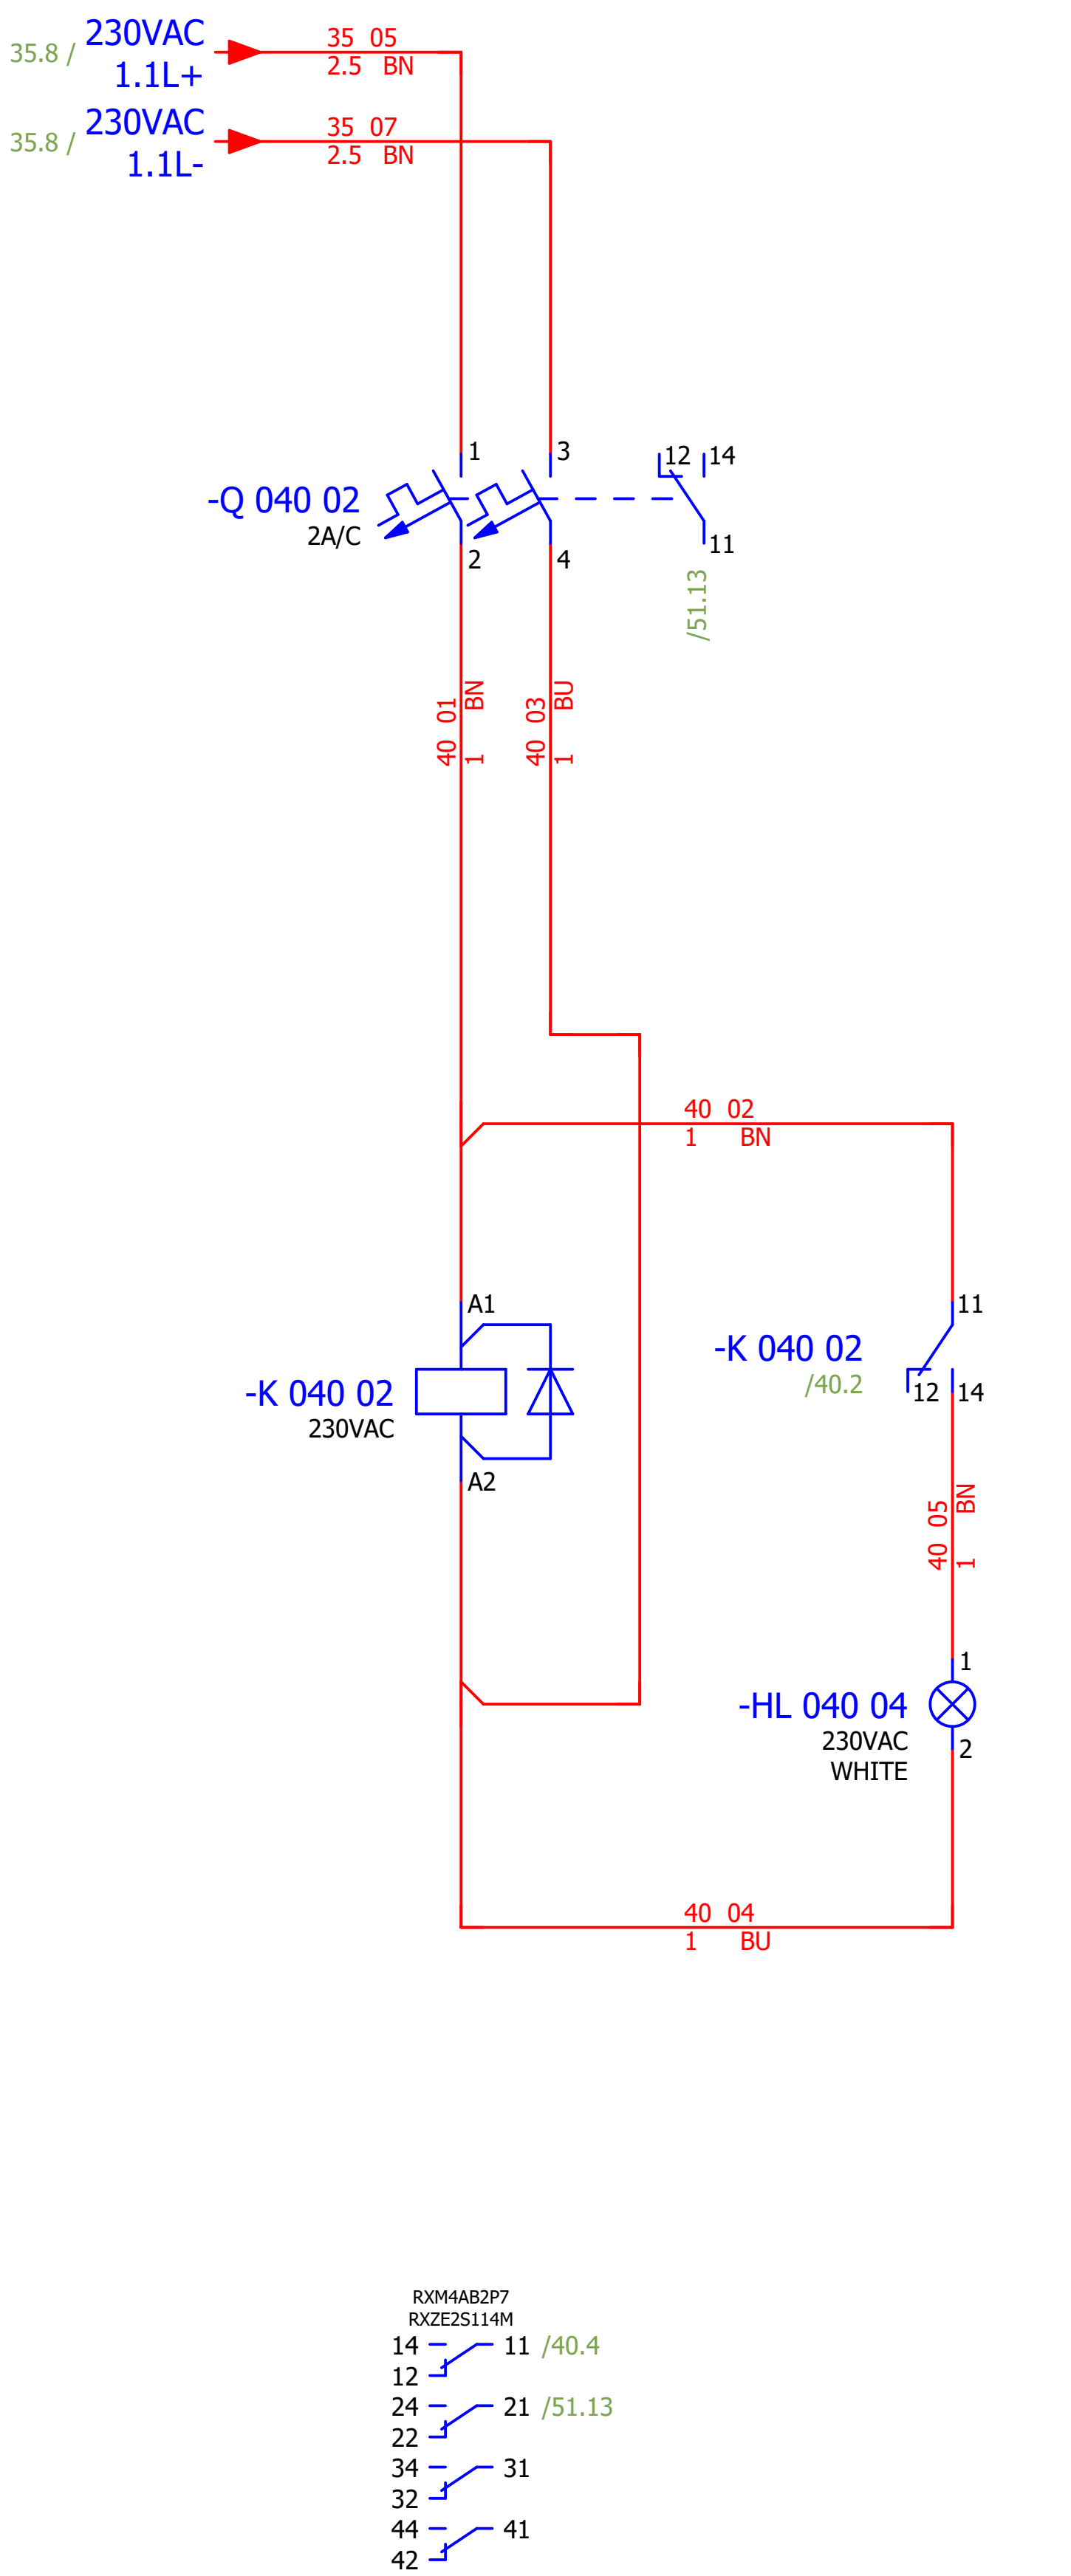

Date: 17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 1	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn: Luka Božičević							#D
Approved: Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: 230VAC DISTRIBUTION	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 40
Format: A3						+4LKF001AR	Next: 41

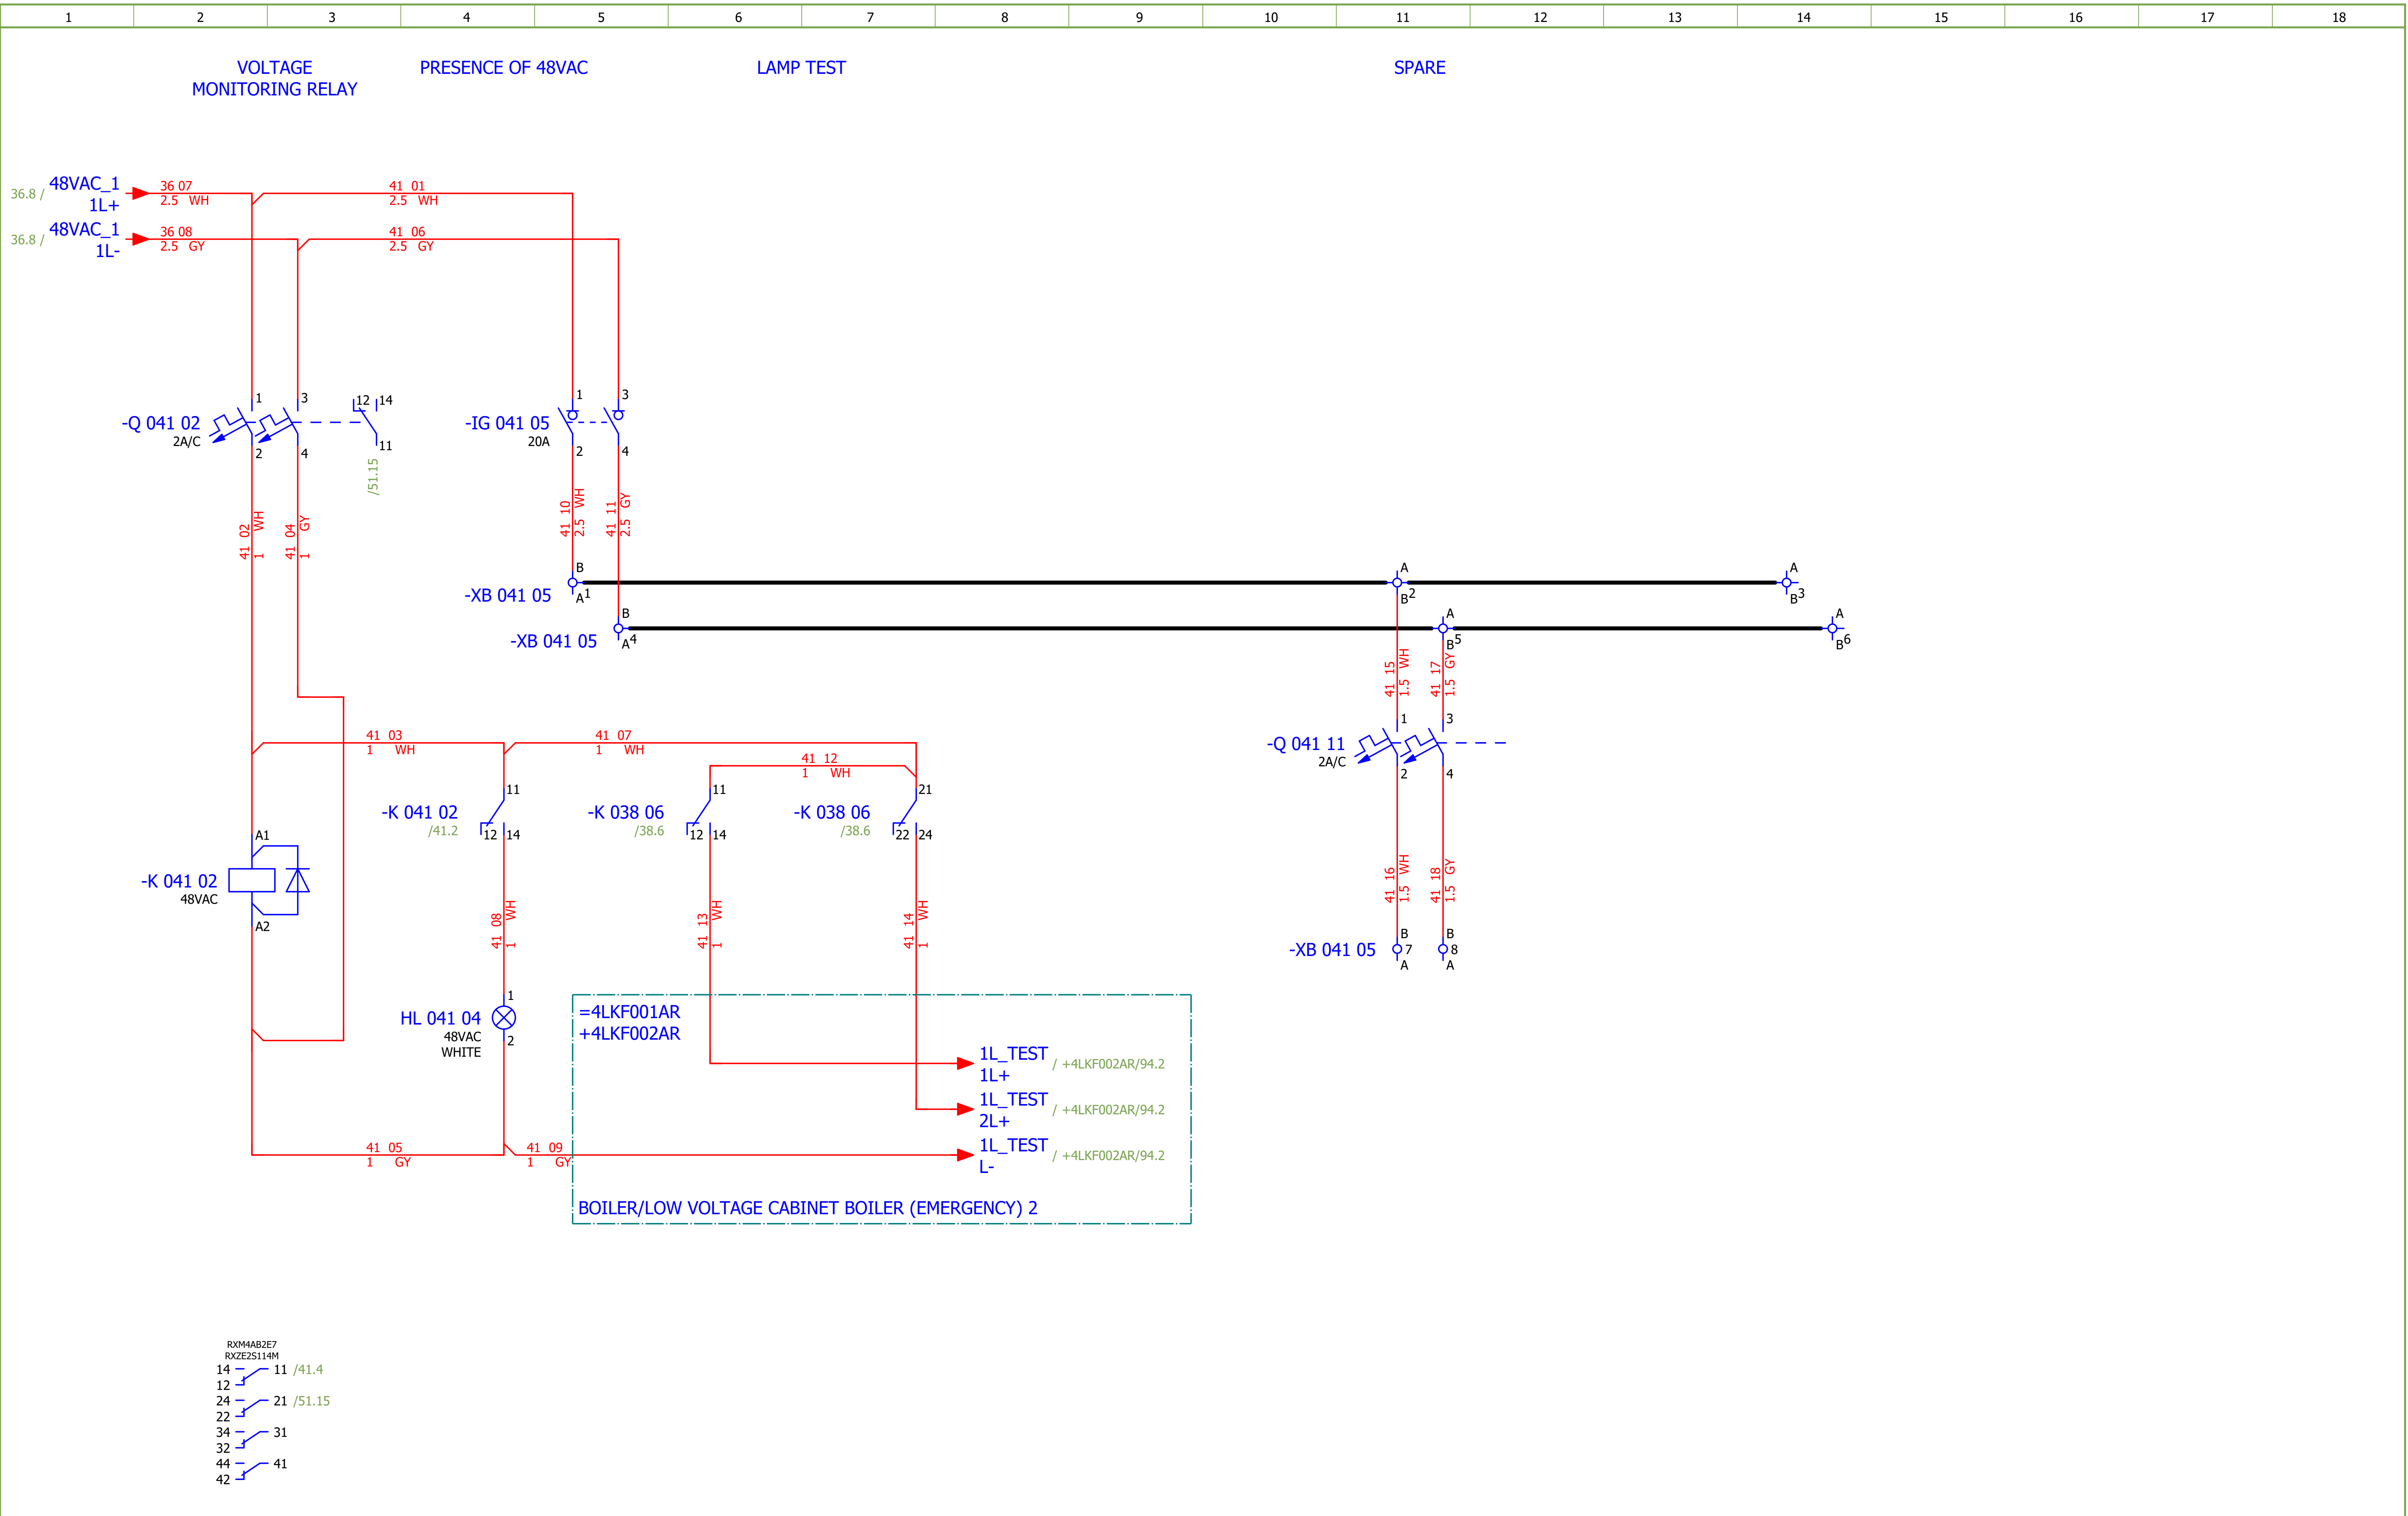

Date:	17.03.2026.
Drawn:	Luka Božičević
Approved:	Grga Kolić
Format:	A3
	SINTAKSA A Voith Company
Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia
Object:	RDF Albioma Les Bois Rouge Reunion - France
Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 1
Content:	48VAC DISTRIBUTION 1
Project:	BRC-4
Unit & Issuer:	ATEP0
Number:	1870
Revision:	F
	#D
Drawing designation:	BRC-4-ATEP0-1870-F
	=4LKF001AR
	+4LKF001AR
Sheet:	41
Next:	42

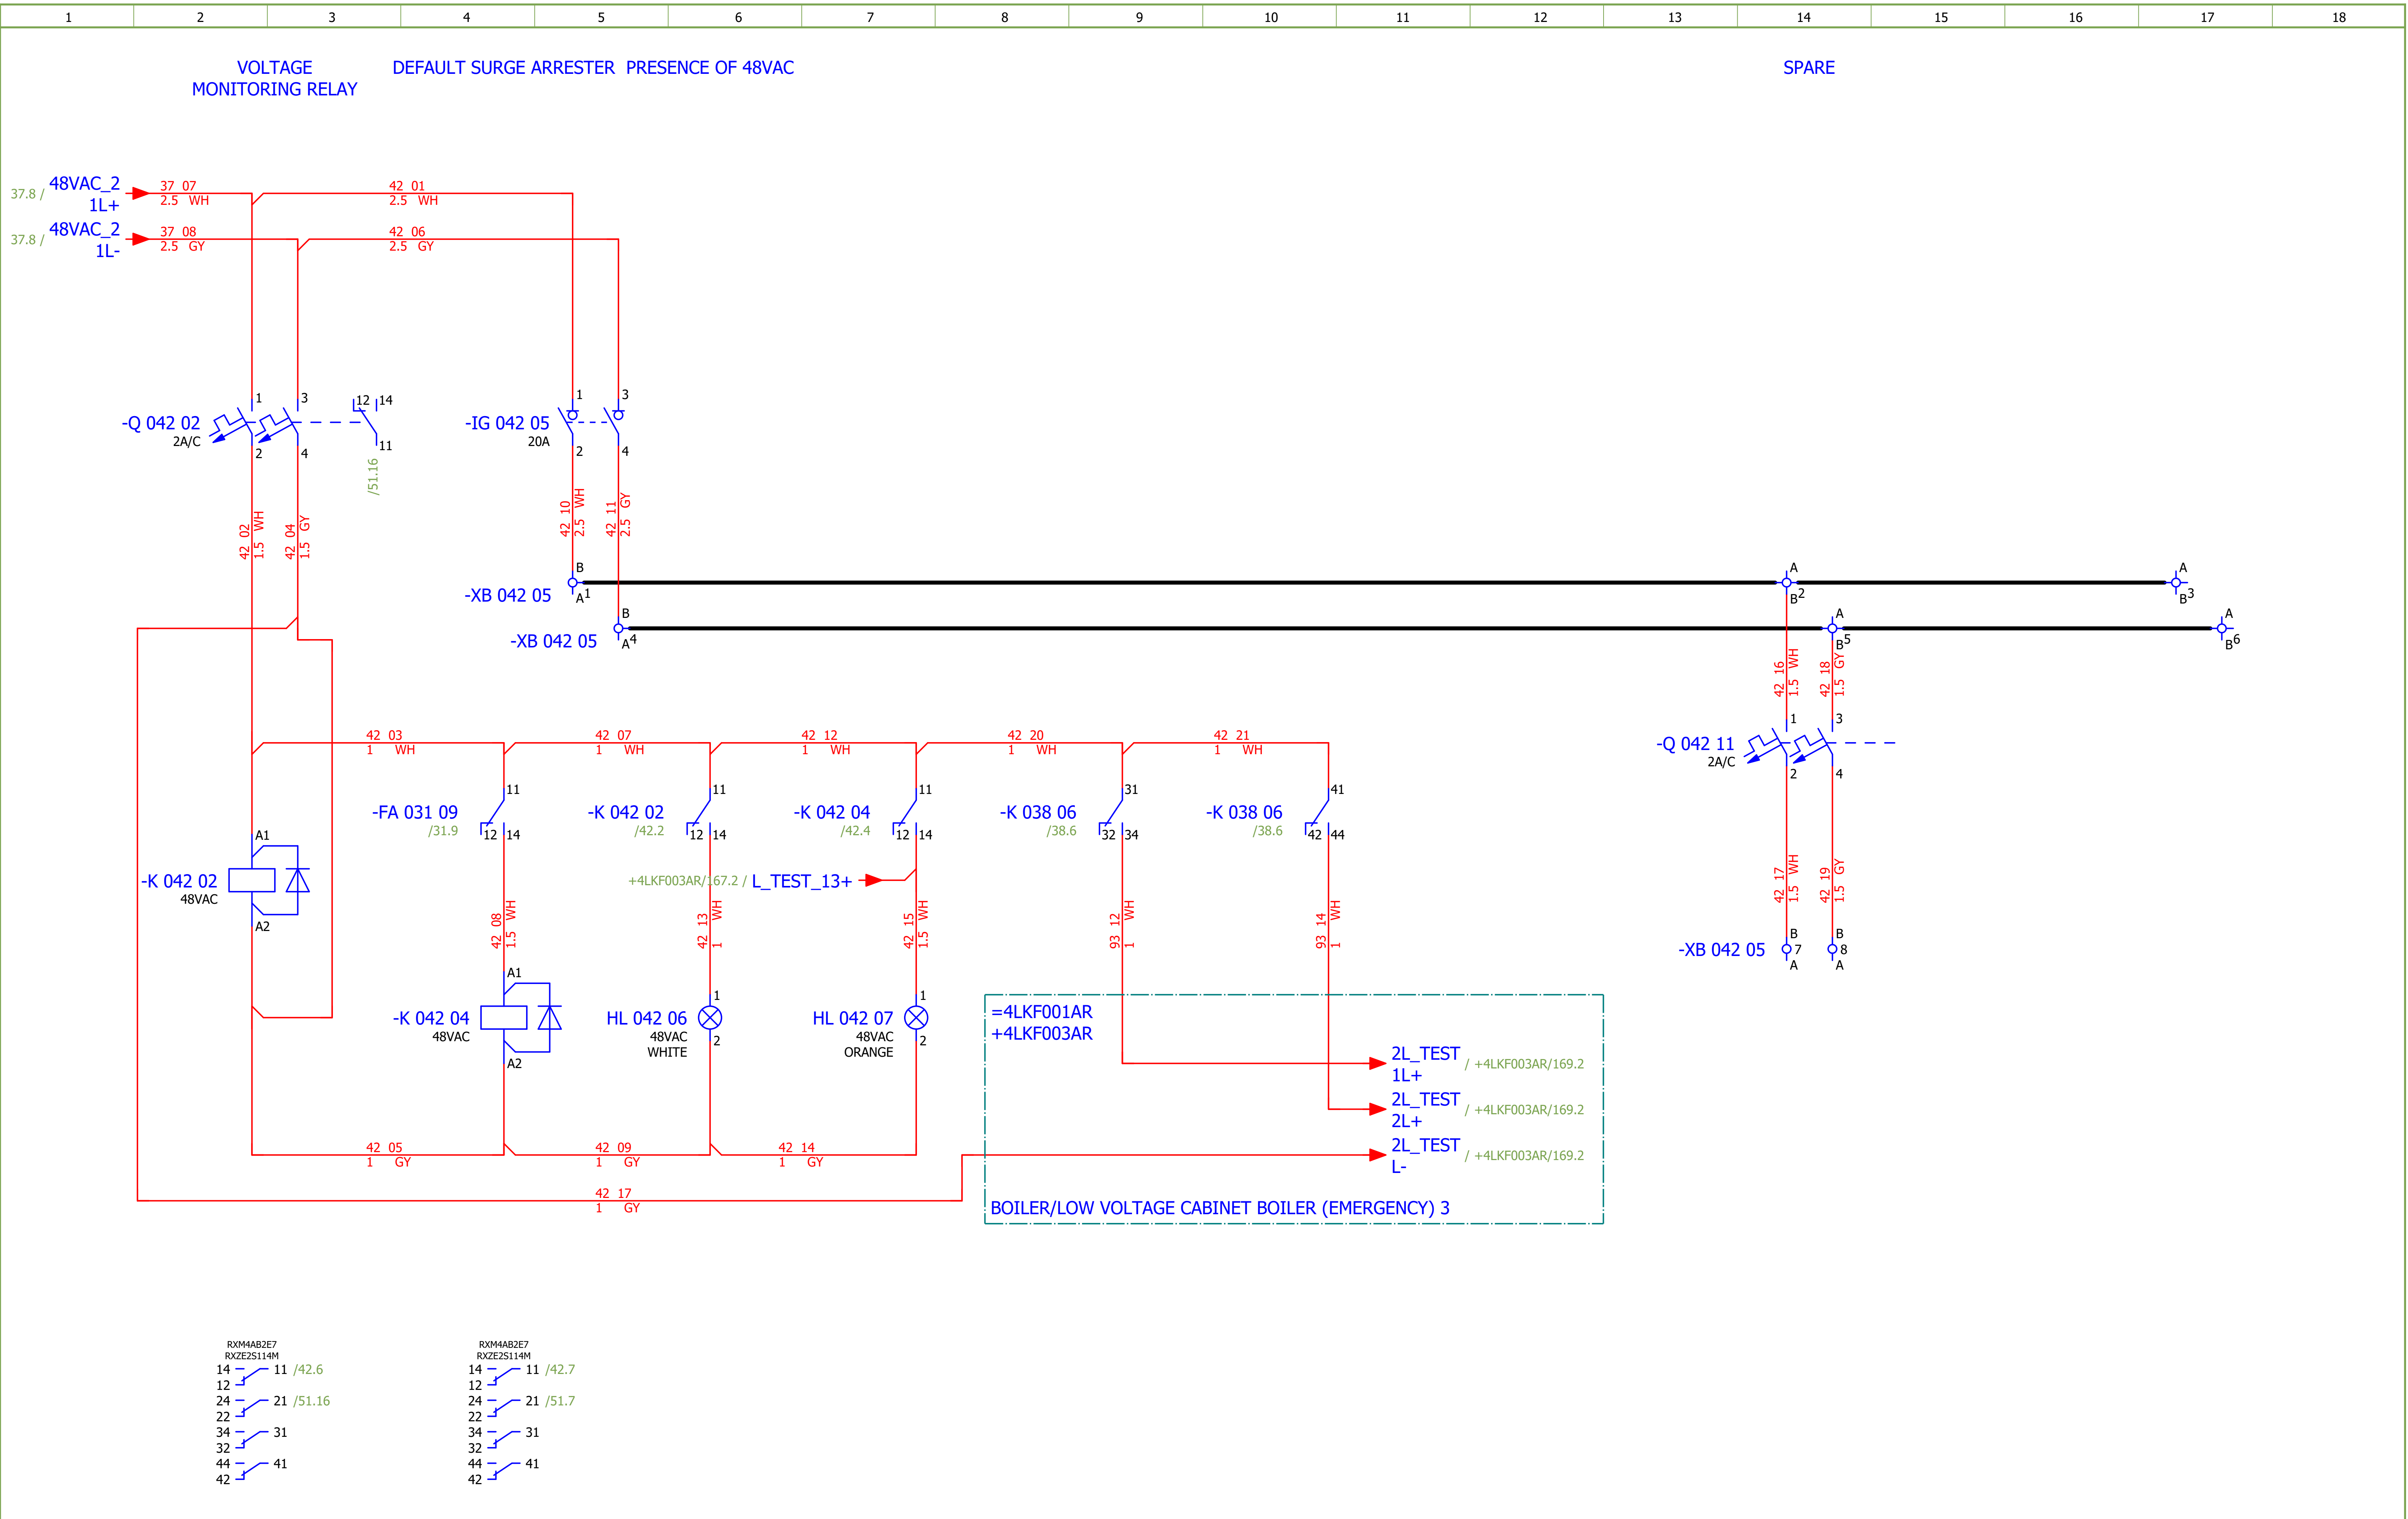

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 1	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Luka Božičević								#D
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: 48VAC DISTRIBUTION 2	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 42
Format:	A3							+4LKF001AR	Next: 51

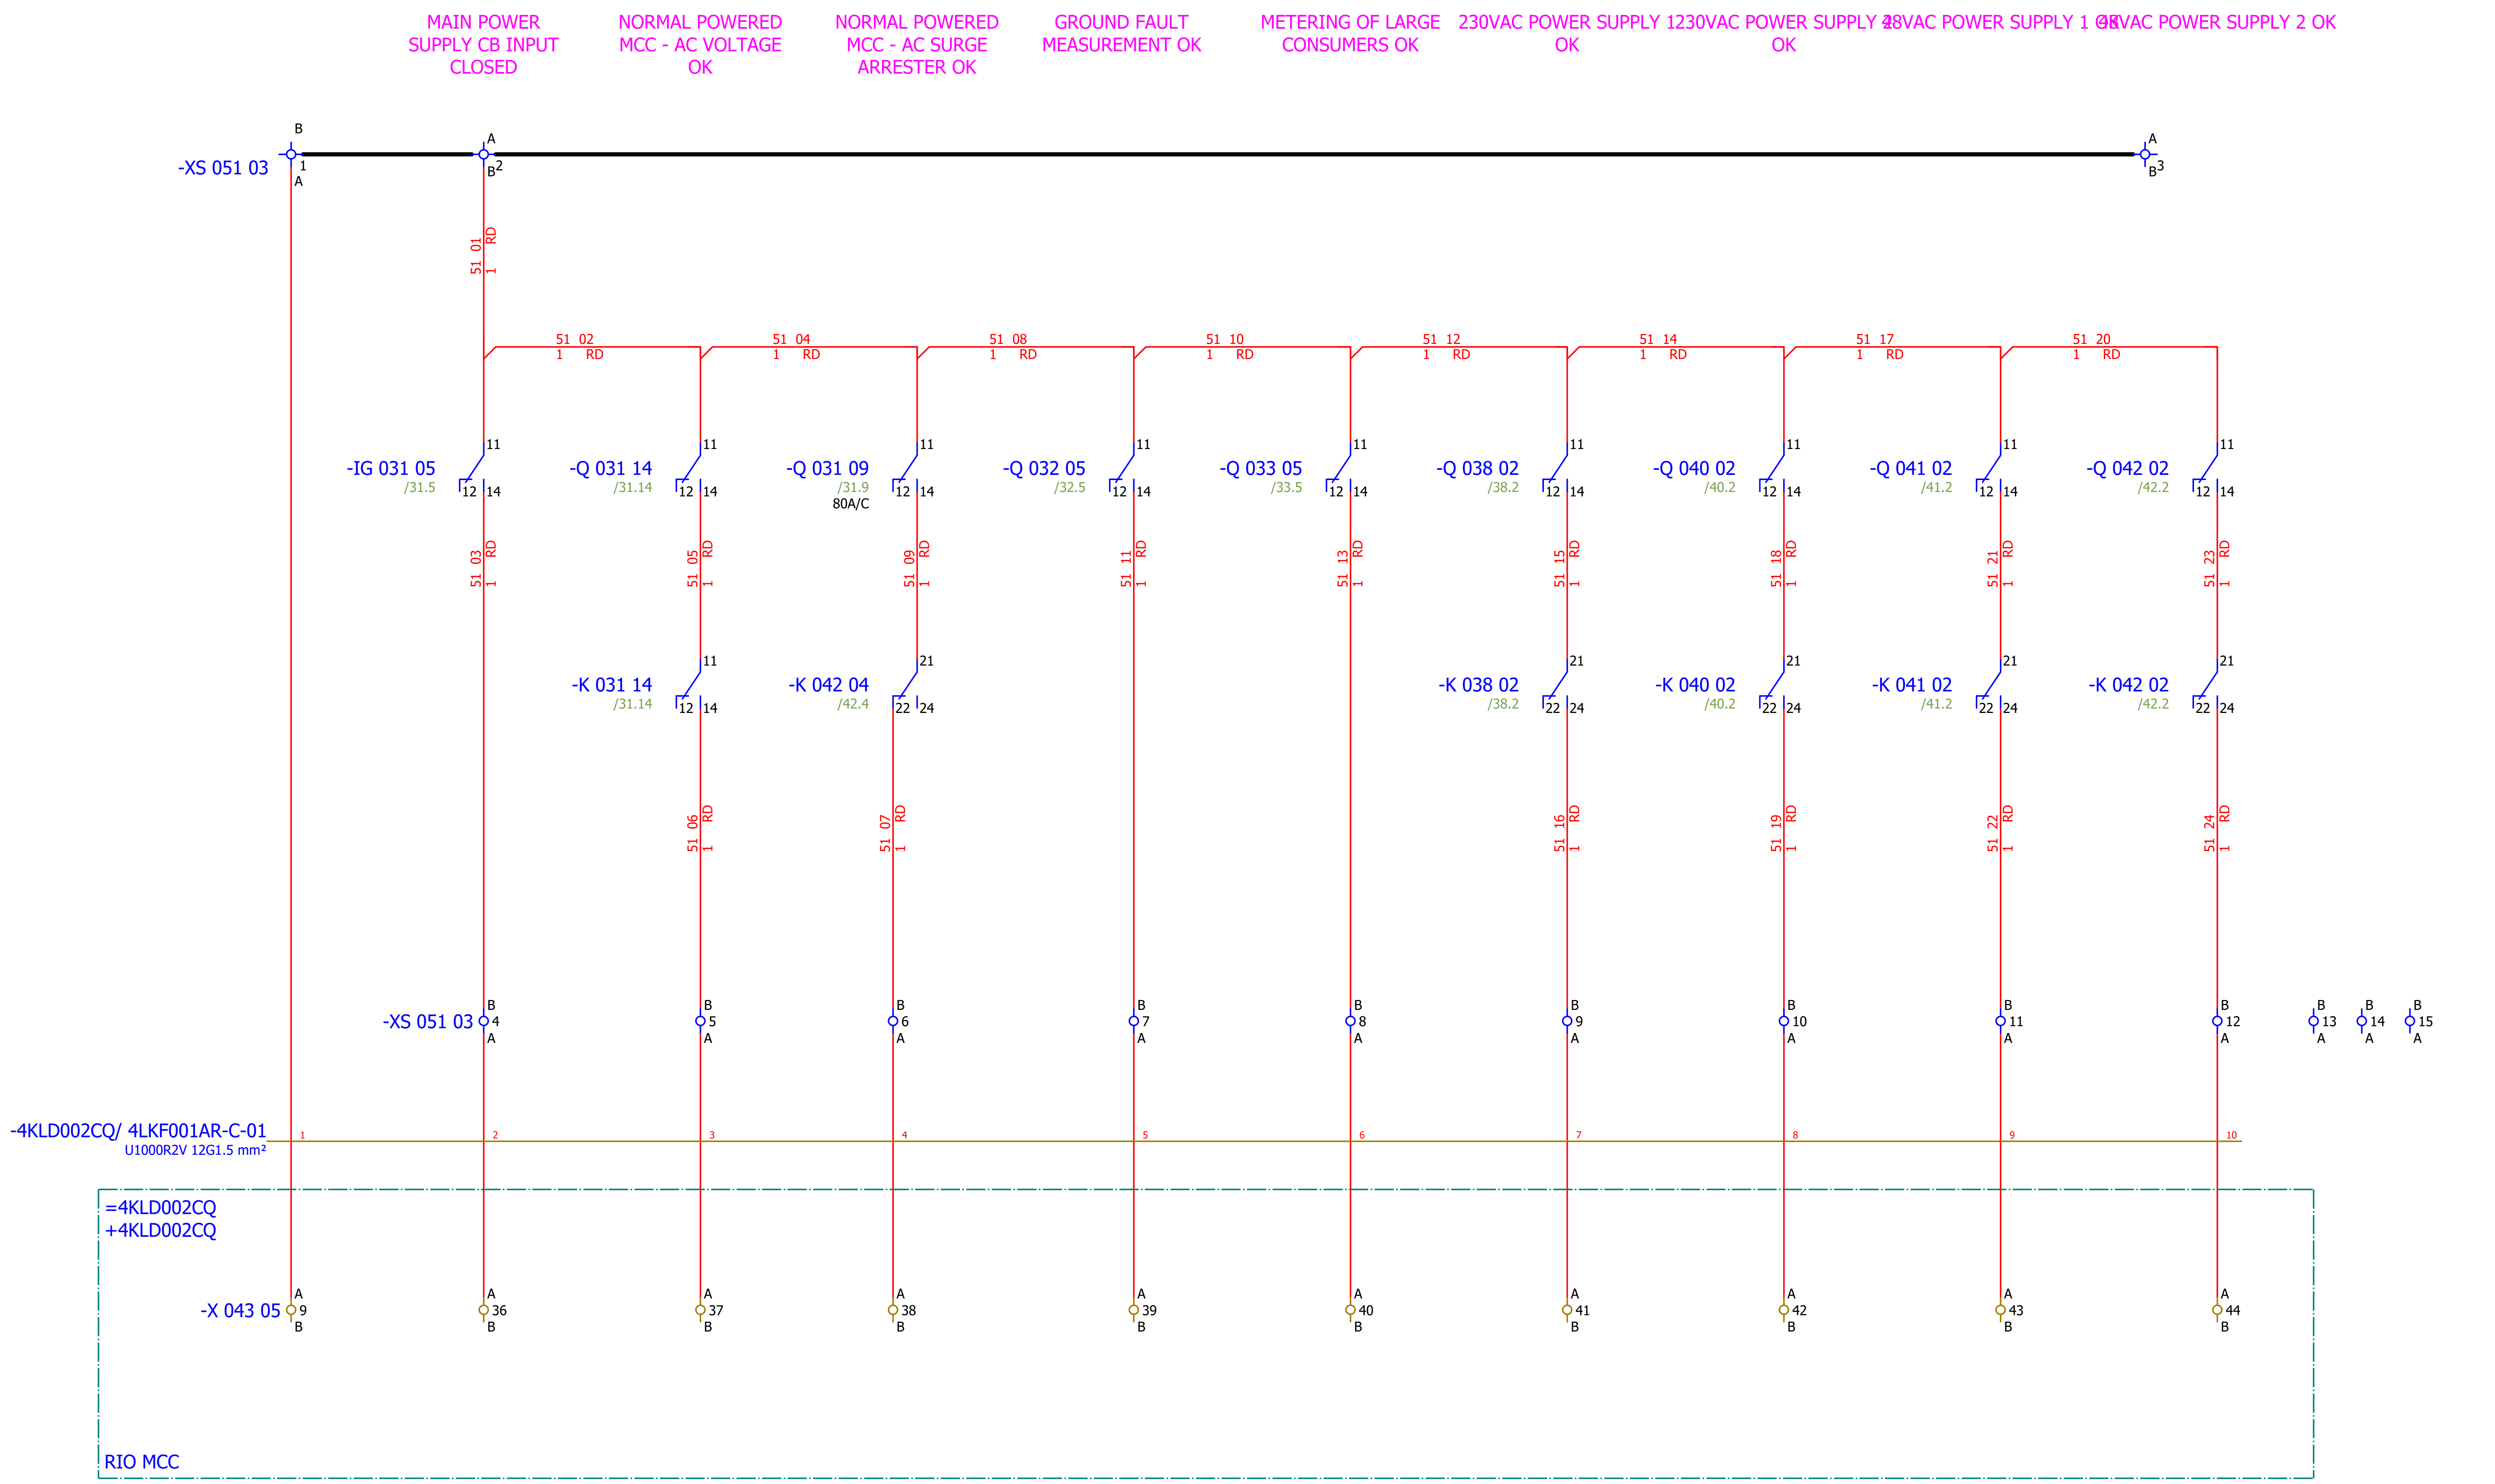

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 1	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Luka Božičević								#QA
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SIGNALIZATION	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 51
Format:	A3							+4LKF001AR	Next: 55

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

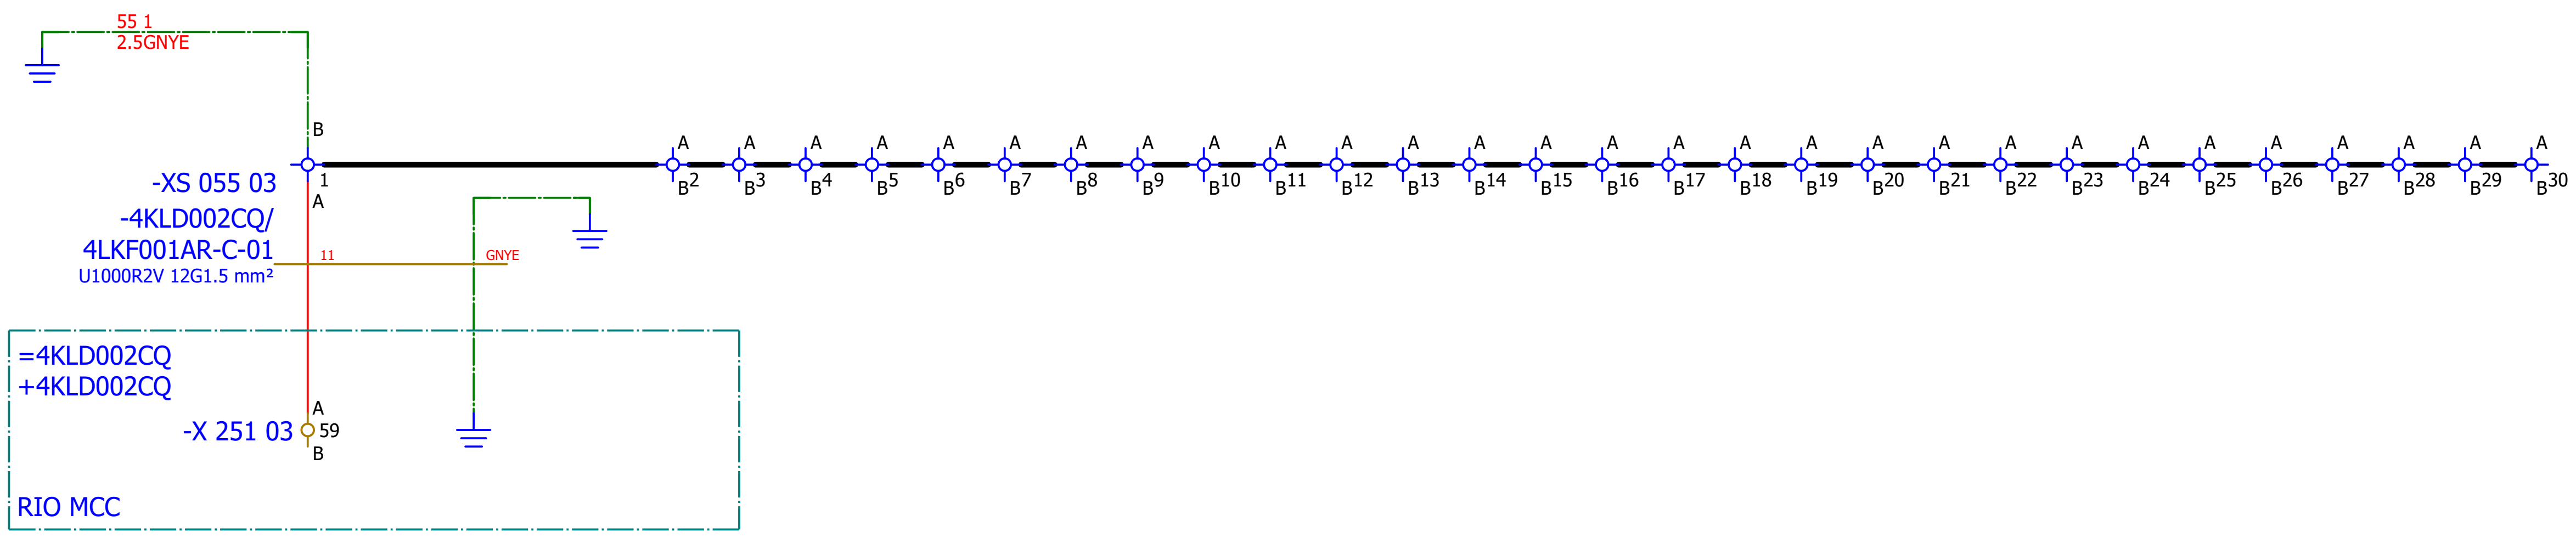

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 1	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#QB
Drawn:	Luka Božičević										
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	SPARE	Drawing designation:	BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 55
Format:	A3									+4LKF001AR	Next: 401

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Sorting number	Part number	Quantity	Manufacturer	Device	Device description	Device designation
1.	SOC.48290105	2	Socomec	DIRIS Digiware U-10 Voltage	50-300 VAC (Ph/N) - 87-520 VAC (Ph/Ph) - CAT III Frequency range 45-65 Hz Network type Single-phase/ Two-phase / Two-phase with neutral / Three-phase / Three-phase with neutral Input consumption ≤ 0,1 VA	-BA 032 04;-BA 033 04
2.	SOC.48290112	1	Socomec	Current module DIRIS Digiware I-60, 6 current inputs, Metering	Current module DIRIS Digiware I-60, 6 current inputs, Metering	-BC 033 09
3.	EFX.563720	4	nVent ERIFLEX	BD Two Pole Distribution Block, 40 A	BD Two Pole Distribution Block, 40 A	-D 034 01;-D 035 01;-D 036 01;-D 037 01
4.	SE.A9L40321	1	Schneider Electric	IPRD40r	IPRD40r modular surge arrester - 3P - IT - 460V - with remote transfert	-FA 031 09
5.	SE.XB5EV57L4	1	Schneider Electric	3 phases voltage indicator pilot light with 3 white LED, 400 VAC	Pilot light 3 phases voltage, indicator with 3 LED, white, 400 V AC	-HL 031 16
6.	SE.XB4BVM1	2	Schneider Electric	White pilot light	metal, 22mm, universal LED, plain lens, Color: White 230VAC	-HL 038 04;-HL 040 04
7.	SE.ZBZ32	5	Schneider Electric	Harmony XB4	Legend holder, plastic	-HL 038 04;-HL 040 04;-HL 041 04;-HL 042 06;-HL 042 07
8.	SE.ZB4BVBG1	3	Schneider Electric	white light block with body/fixing collar integral LED 24...120VAC/DC		-HL 041 04;-HL 042 06;-HL 042 07
9.	SE.ZB4BV013	2	Schneider Electric	white pilot light head Ø22 plain lens for integral LED	Head for pilot light, Harmony XB4, metal, white, 22mm, universal LED, plain lens	-HL 041 04;-HL 042 06
10.	SE.ZB4BV053	1	Schneider Electric	Orange pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Orange	-HL 042 07
11.	SE.31110	1	Schneider Electric	Switch-disconnector Compact INS400 - 3 poles - 400A	Switch-disconnector Compact INS400 - 3 poles - 400A, Black handle	-IG 031 05
12.	SE.29450	1	Schneider Electric	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV	-IG 031 05
13.	SE.LV432594	2	Schneider Electric	Long terminal shield - 4 poles - <= 630A	Long terminal shield - 4 poles - <= 630A	-IG 031 05
14.	SE.A9S60220	7	Schneider Electric	Control switch iSW, 2P, 20A	Acti 9 iSW 2P 20 A at 415 V AC 50/60 Hz	-IG 034 03;-IG 035 03;-IG 036 03;-IG 037 03;-IG 038 05;-IG 041 05;-IG 042 05
15.	SE.RM17TU00	1	Schneider Electric	RM17-TU	multifunction control relay RM17-TU - range 183..528 V AC	-K 031 14
16.	SE.RXM4AB2P7	3	Schneider Electric	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED	-K 038 02;-K 038 06;-K 040 02
17.	SE.RXZE2S114M	6	Schneider Electric	Socket	For RXM2/RXM4 relays Screw connectors Separate contact 4 C/O	-K 038 02;-K 038 06;-K 040 02;-K 041 02;-K 042 02;-K 042 04
18.	SE.RXM041FU7	3	Schneider Electric	Protection module	RC circuit - 110..240 V AC - for RPZ/RXZ sockets	-K 038 02;-K 038 06;-K 040 02
19.	SE.RXM4AB2E7	3	Schneider Electric	Miniature Plug-in relay - Zelio RXM 4 C/O 48 V AC 6 A with LED	Miniature Plug-in relay - Zelio RXM 4 C/O 48 V AC 6 A with LED	-K 041 02;-K 042 02;-K 042 04
20.	SE.RXM041BN7	1	Schneider Electric	Protection diode	RC circuit - 24..60 V AC - for RPZ/RXZ sockets	-K 041 02
21.	SE.RXM021BN	2	Schneider Electric	Varistor - 24..60 V AC/DC - for RPZ/RXZ sockets	Varistor - 24..60 V AC/DC - for RPZ/RXZ sockets	-K 042 02;-K 042 04

Sorting number	Part number	Quantity	Manufacturer	Device	Device description	Device designation
22.	SOC.48290101	1	Socomec	ISOM DIGIWARE C-31 INTERFACE	Supply voltage DC [V] - 24..24 Voltage type (supply voltage) - DC Colour display - No Degree of protection (IP) - IP65 Operating temperature [°C] - 10..55 Rail mounting possible - Yes Wall mounting/direct mounting - Yes	-P 038 10
23.	SOC.48290204	1	Socomec	Multi-point remote display DIRIS Digiware D-50 RS485 & Ethernet	Multi-point remote display DIRIS Digiware D-50 RS485 & Ethernet	-P 038 14
24.	SE.18728	1	Schneider Electric	NG125 - circuit breaker - 3P - 40A - B curve - 36kA	NG125 - circuit breaker - NG125H - 3P - 40A - C curve - 36kA 36 kA Icu at 380...415 V AC 50/60 Hz conforming to EN/IEC 60947-2	-Q 031 09
25.	SE.19072	1	Schneider Electric	Auxiliary contact - 1 OC + 1 SD - 6 A - 220..240 V - for NG125	Auxiliary OC and fault contact, Acti9 NG125, 1 OC + 1 SD, 220VAC to 240VAC (max 6A), 415VAC (max 3A)	-Q 031 09
26.	SE.A9F74302	3	Schneider Electric	3-pole MCB	Nominal current: 2A Tripping curve: C Breaking capacity: 10kA	-Q 031 14;-Q 032 05;-Q 033 05
27.	SE.A9A26924	9	Schneider Electric	Auxiliary contact iOF, iC60	Auxiliary contact, Acti9, iOF, 1 OC, AC/DC	-Q 031 14;-Q 032 05;-Q 033 05;-Q 038 02;-Q 040 02;-Q 041 02;-Q 042 02;-Q 101 04;-Q 104 04
28.	SE.A9F74202	11	Schneider Electric	2-pole MCB, 2A/C	Nominal current: 2 A Tripping curve: C	-Q 038 02;-Q 038 11;-Q 038 15;-Q 039 04;-Q 040 02;-Q 041 02;-Q 041 11;-Q 042 02;-Q 042 11;-Q 101 04;-Q 104 04
29.	SE.XPSBAC34AP	5	Schneider Electric	Safety module	Harmony Safety Automation Estop or guard ,Harmony XPS, connected to supply terminals 48-240 V AC/DC , no inputs, screw	-RP 101 04;-RP 102 04;-RP 103 04;-RP 104 04;-RP 105 04
30.	SE.XB4BA21	1	Schneider Electric	Black flush complete pushbutton Ø22 spring return 1NO "unmarked"	Black flush complete pushbutton Ø22 spring return 1NO	-S 038 06
31.	SOC.47290603	2	Socomec	P30 AUX 24 VDC 30W	Power supply P30 100-240VAC / 24 VDC 30W for Digiware system	-TB 038 11;-TB 038 14
32.	SOC.48290573	3	Socomec	TF-40 / 100-400A sensor rogowski RJ12	Loop diameter: 40mm - Loop length: 126mm	-TCU 033 10;-TCV 033 11;-TCW 033 11
33.	PXC.3209510	100	Phoenix Contact	PT 2,5 - Feed-through terminal block	Feed-through terminal block, nom. voltage: 800 V, nominal current: 24 A, number of connections: 2, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm2, cross section: 0.14 mm2 - 4 mm2, mounting type: NS 35/7,5, NS 35/15, color: gray	-X 038 10;-X 101 04;-X 103 11;-X 104 04;-XA 034 03;-XA 035 03;-XA 038 05;-XB 036 03;-XB 037 03;-XB 041 05;-XB 042 05;-XS 051 03;-XS 055 03

Cable name: **4LKF001AR/ 4LKF006AR-B-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **3G2.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF001AR/34.7	=4LKF001AR+4LKF001AR-D 034 01	A6	**BN**	=4LKF001AR+4LKF006AR-XA 515 05	1:A	=4LKF001AR+4LKF006AR/515.5	
	=4LKF001AR+4LKF001AR/34.8	=4LKF001AR+4LKF001AR-D 034 01	B6	**BU**	=4LKF001AR+4LKF006AR-XA 515 05	2:A	=4LKF001AR+4LKF006AR/515.6	230 VAC AUXILIARY POWER SUPPLY
	=4LKF001AR+4LKF001AR/34.13	=4LKF001AR+4LKF001AR-PE		**GNYE**	=4LKF001AR+4LKF006AR-PE	1	=4LKF001AR+4LKF001AR/34.13	

Cable name: **4LKF001AR/ 4LKF006AR-B-02**

Cable type: **U1000R2V** No. of conn., diameter, length: **3G2.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF006AR/517.3	=4LKF001AR+4LKF001AR-D 035 01	A6	**BN**	=4LKF001AR+4LKF006AR-XA 517 05	1:A	=4LKF001AR+4LKF006AR/517.5	
	=4LKF001AR+4LKF006AR/517.3	=4LKF001AR+4LKF001AR-D 035 01	B6	**BU**	=4LKF001AR+4LKF006AR-XA 517 05	2:A	=4LKF001AR+4LKF006AR/517.6	230 VAC AUXILIARY POWER SUPPLY
	=4LKF001AR+4LKF001AR/35.9	=4LKF001AR+4LKF001AR-PE		**GNYE**	=4LKF001AR+4LKF006AR-PE	1	=4LKF001AR+4LKF001AR/35.9	

Cable name: **4LKF001AR/ 4LKF006AR-B-03**

Cable type: **U1000R2V** No. of conn., diameter, length: **3G2.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF001AR/36.14	=4LKF001AR+4LKF001AR-D 036 01	A5	**BN**	=4LKF001AR+4LKF006AR-XB 516 05	1	=4LKF001AR+4LKF001AR/36.14	48VAC POWER SUPPLY
	=4LKF001AR+4LKF001AR/36.14	=4LKF001AR+4LKF001AR-D 036 01	B5	**BU**	=4LKF001AR+4LKF006AR-XB 516 05	2	=4LKF001AR+4LKF001AR/36.14	=
	=4LKF001AR+4LKF001AR/36.15	=4LKF001AR+4LKF001AR-PE		**GNYE**	=4LKF001AR+4LKF006AR-PE	1	=4LKF001AR+4LKF001AR/36.15	

Cable name: **4LKF001AR/ 4LKF006AR-B-04**

Cable type: **U1000R2V** No. of conn., diameter, length: **3G2.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF001AR/37.8	=4LKF001AR+4LKF001AR-D 037 01	A6	**BN**	=4LKF001AR+4LKF006AR-XB 518 05	1	=4LKF001AR+4LKF001AR/37.8	48VAC POWER SUPPLY
	=4LKF001AR+4LKF001AR/37.8	=4LKF001AR+4LKF001AR-D 037 01	B6	**BU**	=4LKF001AR+4LKF006AR-XB 518 05	2	=4LKF001AR+4LKF001AR/37.8	=
	=4LKF001AR+4LKF001AR/37.9	=4LKF001AR+4LKF001AR-PE		**GNYE**	=4LKF001AR+4LKF006AR-PE	1	=4LKF001AR+4LKF001AR/37.9	

Cable name: **4LKF001AR/ P 038 10**

Cable type: **PROFIBUS CABLE** No. of conn., diameter, length: **/**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
RS485	=4LKF001AR+4LKF001AR/38.10	=4LKF001AR+4LKF001AR-P 038 10	+	**RD**	=4LKF001AR+4LKF001AR-X 038 10	1:B	=4LKF001AR+4LKF001AR/38.10	LAMP TEST
	=4LKF001AR+4LKF001AR/38.11	=4LKF001AR+4LKF001AR-P 038 10	-	**GN**	=4LKF001AR+4LKF001AR-X 038 10	2:B	=4LKF001AR+4LKF001AR/38.11	=

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF001AR-X 038 10

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Terminal	Wiring	Target designation
				'		1	RD	-P 038 10:+
				'		2	GN	-P 038 10:-
=4LHA001AR+4LHA001AR/48.14	=4LHA001AR+4LHA001AR-X 048 13:3:A		SH	'		3	SH	-P 038 10:NC
				'				

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF001AR-X 101 04

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
+4LKF002AR/101.4	=4LCA002HSS+4LCA002HSS-S303:11	4LKF001AR/ 4LCA002HSS-C-01 U1000R2V 5G1.5 mm²	BN 1.5 mm²	'	1	WH 1 mm²	-Q 101 04:2
+4LKF002AR/101.4	=4LCA002HSS+4LCA002HSS-S303:12	4LKF001AR/ 4LCA002HSS-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²	'	2	WH 1 mm²	-RP 101 04:A1
+4LKF002AR/101.5	=4LCA002HSS+4LCA002HSS-S303:21	4LKF001AR/ 4LCA002HSS-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²	'	3	GY 1 mm²	-Q 101 04:4
+4LKF002AR/101.5	=4LCA002HSS+4LCA002HSS-S303:22	4LKF001AR/ 4LCA002HSS-C-01 U1000R2V 5G1.5 mm²	BU 1.5 mm²	'	4	GY 1 mm²	-RP 101 04:A2

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF001AR-X 103 11

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Terminal	Wiring	Target designation
				'		1	WH 1 mm²	-RP 103 04:33
				'		2	WH 1 mm²	-RP 103 04:34
				'		3	WH 1 mm²	-RP 103 04:23
				'		4	WH 1 mm²	-RP 103 04:24
				'		5	WH 1 mm²	-RP 103 04:13
				'		6	WH 1 mm²	-RP 103 04:14
				'		7	WH 1 mm²	-RP 103 04:Y2
				'		8	WH 1 mm²	-RP 103 04:Y1

Terminal diagram

A SIDE

Strip
=4LKF001AR+4LKF001AR-X 104 04

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Strip	Wiring	Target designation
+4LKF002AR/104.4	=4LCA101HSS+4LCA101HSS-S303:11	4LKF001AR/ 4LCA101HSS-C-01 U1000R2V 3G1.5 mm²	BN 1.5 mm²	'	1	WH 1 mm²	-Q 104 04:2
+4LKF002AR/104.4	=4LCA102HSS+4LCA102HSS-S303:12	4LKF001AR/ 4LCA102HSS-C-01 U1000R2V 3G1.5 mm²	BN 1.5 mm²	'	2	WH 1 mm²	-RP 104 04:A1
+4LKF002AR/104.5	=4LCA101HSS+4LCA101HSS-S303:21	4LKF001AR/ 4LCA101HSS-C-01 U1000R2V 3G1.5 mm²	BU 1.5 mm²	'	3	GY 1 mm²	-Q 104 04:4
+4LKF002AR/104.5	=4LCA102HSS+4LCA102HSS-S303:22	4LKF001AR/ 4LCA102HSS-C-01 U1000R2V 3G1.5 mm²	BU 1.5 mm²	'	4	GY 1 mm²	-RP 104 04:A2

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF001AR-X?

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Wiring	Target designation

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF001AR-XA 034 03

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Terminal	Wiring	Target designation
				'		1	BN 2.5 mm²	-IG 034 03:2
				'		2	BU 2.5 mm²	-IG 034 03:4

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF001AR-XA 035 03

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Terminal	Wiring	Target designation
				'		1	BN 2.5 mm²	-IG 035 03:2
				'		2	BU 2.5 mm²	-IG 035 03:4

Terminal diagram

A SIDE

Strip
=4LKF001AR+4LKF001AR-XA 038 05

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1	BN 2.5 mm²	-IG 038 05:2
					2	BN 1.5 mm²	-Q 038 11:1
					3	BN 1.5 mm²	-Q 038 15:1
					4	BN 1.5 mm²	-Q 039 04:1
					5		
					6	BU 2.5 mm²	-IG 038 05:4
					7	BU 1.5 mm²	-Q 038 11:3
					8	BU 1.5 mm²	-Q 038 15:3
					9	BU 1.5 mm²	-Q 039 04:3
					10		
					11	BN 1.5 mm²	-Q 039 04:2
					12	BU 1.5 mm²	-Q 039 04:4

Terminal diagram

Strip

=4LKF001AR+4LKF001AR-XB 036 03

A SIDE								B SIDE
Placement	Target designation	Cable name and type	Conductor	Jumper			Wiring	Target designation
				'		1	WH 2.5 mm²	-IG 036 03:2
				'		2	GY 2.5 mm²	-IG 036 03:4

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF001AR-XB 037 03

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Terminal	Wiring	Target designation
				'		1	WH 2.5 mm²	-IG 037 03:2
				'		2	GY 2.5 mm²	-IG 037 03:4

Terminal diagram

Strip

=4LKF001AR+4LKF001AR-XB 041 05

A SIDE

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1	WH 2.5 mm²	-IG 041 05:2
					2	WH 1.5 mm²	-Q 041 11:1
					3		
					4	GY 2.5 mm²	-IG 041 05:4
					5	GY 1.5 mm²	-Q 041 11:3
					6		
					7	WH 1.5 mm²	-Q 041 11:2
					8	GY 1.5 mm²	-Q 041 11:4

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF001AR-XB 042 05

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1	WH 2.5 mm²	-IG 042 05:2
					2	WH 1.5 mm²	-Q 042 11:1
					3		
					4	GY 2.5 mm²	-IG 042 05:4
					5	GY 1.5 mm²	-Q 042 11:3
					6		
					7	WH 1.5 mm²	-Q 042 11:2
					8	GY 1.5 mm²	-Q 042 11:4

Terminal diagram

Strip

=4LKF001AR+4LKF001AR-XS 051 03

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1		
					2	RD 1 mm²	-IG 031 05:11
					3		
					4	RD 1 mm²	-IG 031 05:14
					5	RD 1 mm²	-K 031 14:14
					6	RD 1 mm²	-K 042 04:22
					7	RD 1 mm²	-Q 032 05:14
					8	RD 1 mm²	-Q 033 05:14
					9	RD 1 mm²	-K 038 02:24
					10	RD 1 mm²	-K 040 02:24
					11	RD 1 mm²	-K 041 02:24
					12	RD 1 mm²	-K 042 02:24
					13		
					14		
					15		

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF001AR-XS 055 03

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1	GNYE 2.5 mm²	-PE
					2		
					3		
					4		
					5		
					6		
					7		
					8		
					9		
					10		
					11		
					12		
					13		
					14		
					15		
					16		
					17		
					18		
					19		
					20		
					21		
					22		
					23		
					24		
					25		

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF001AR-XS 055 03

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					26		
					27		
					28		
					29		
					30		

Date:		SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 1	Project: BRC-4	Unit & Issuer:	Number:	Revision: #Y
Drawn:								
Approved:	Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: Terminal diagram =4LKF001AR+4LKF001AR-XS 055 03	Drawing designation:	=4LKF001AR	Sheet: 615
Format:	A3					+4LKF001AR	Next: +4LKF002AR/2

Table of contents

Table of contents

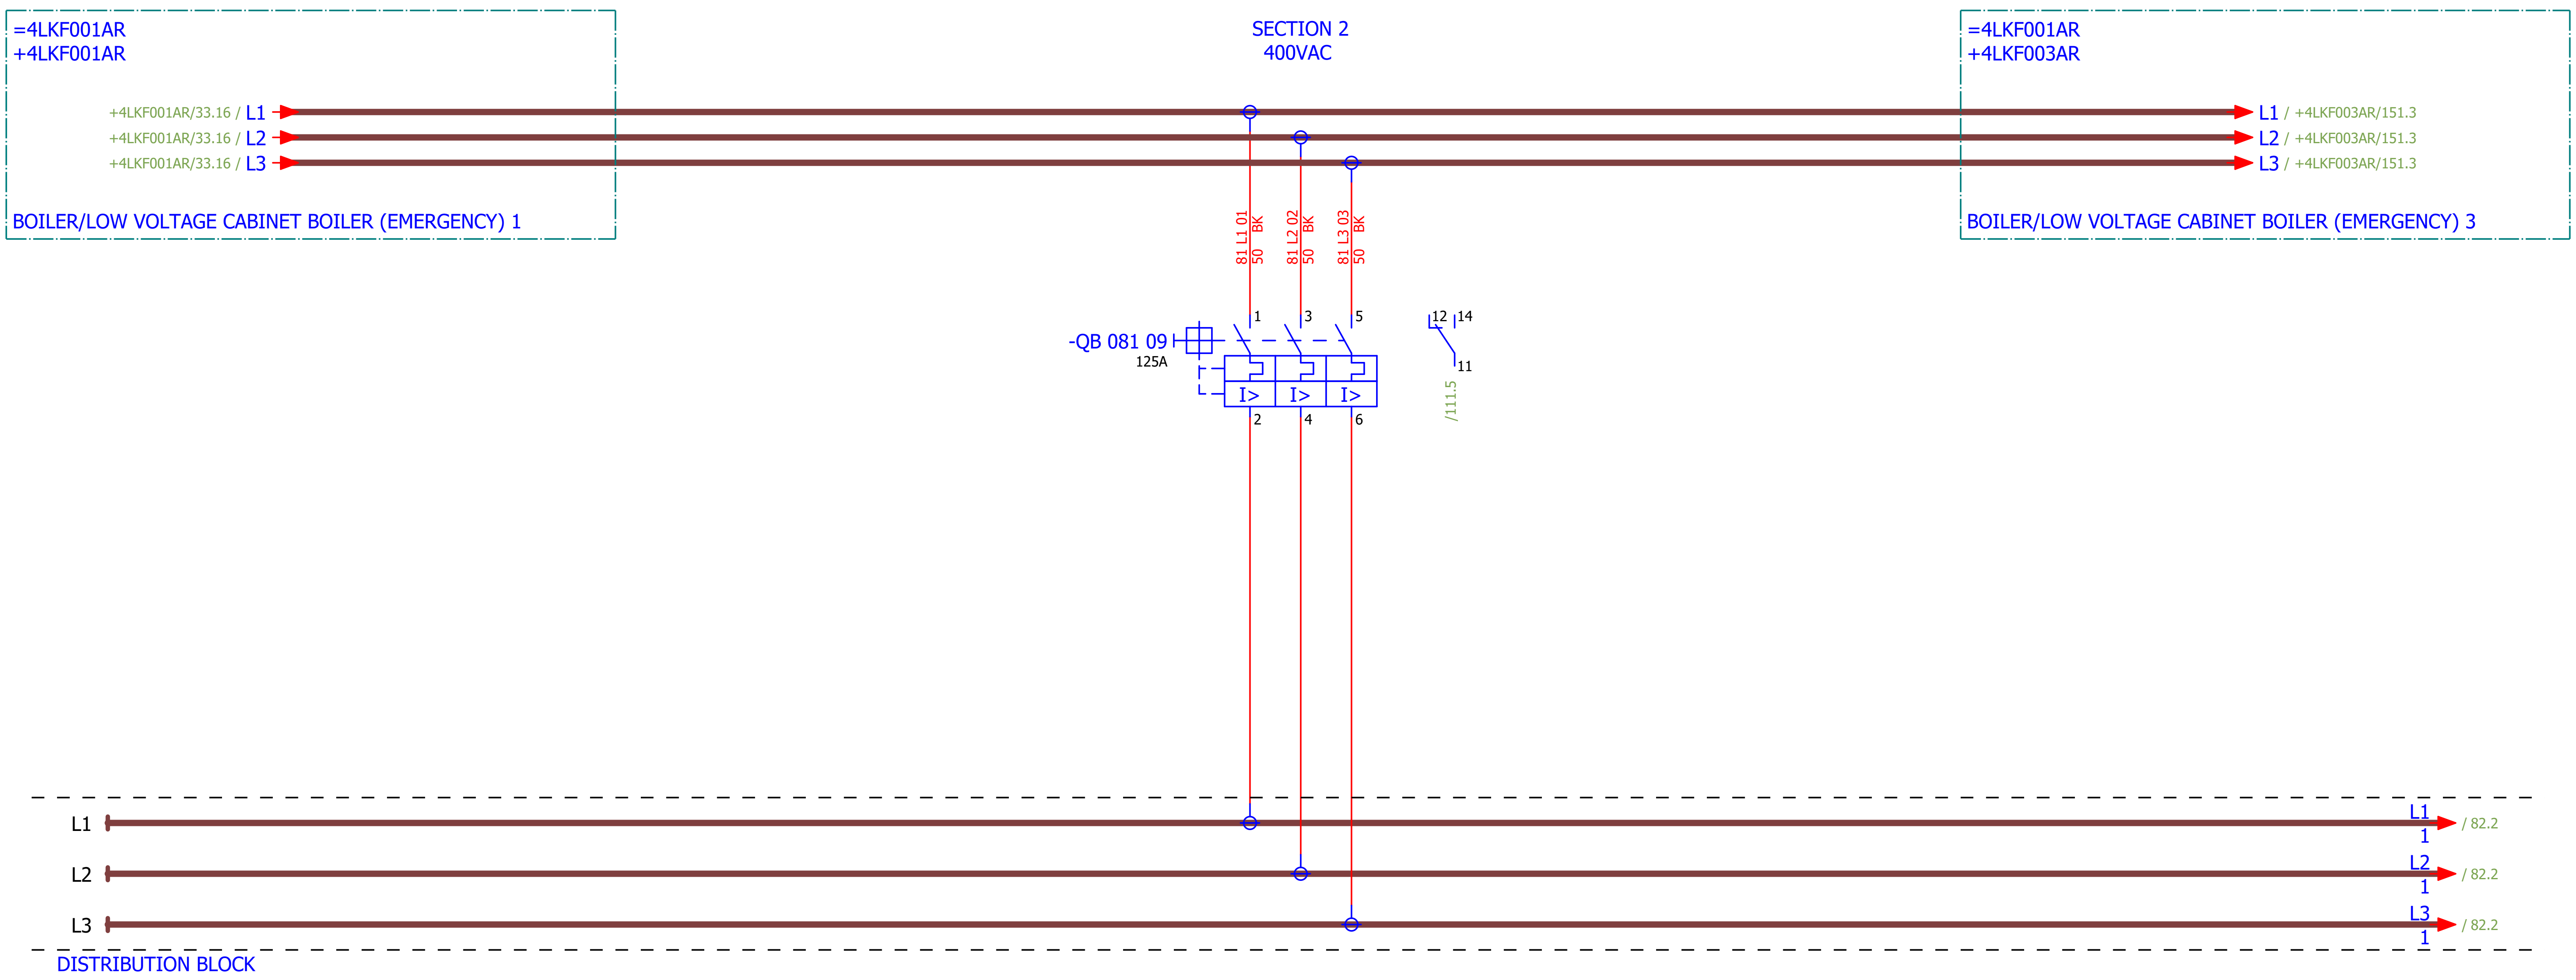

NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date: 17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2	Project: BRC-4 / Unit & Issuer: ATEP0 / Number: 1870 / Revision: F / #D
Drawn: Luka Božičević				
Approved: Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: 400VAC DISTRIBUTION	Drawing designation: BRC-4-ATEP0-1870-F / =4LKF001AR / +4LKF002AR / Sheet: 81 / Next: 82
Format: A3				

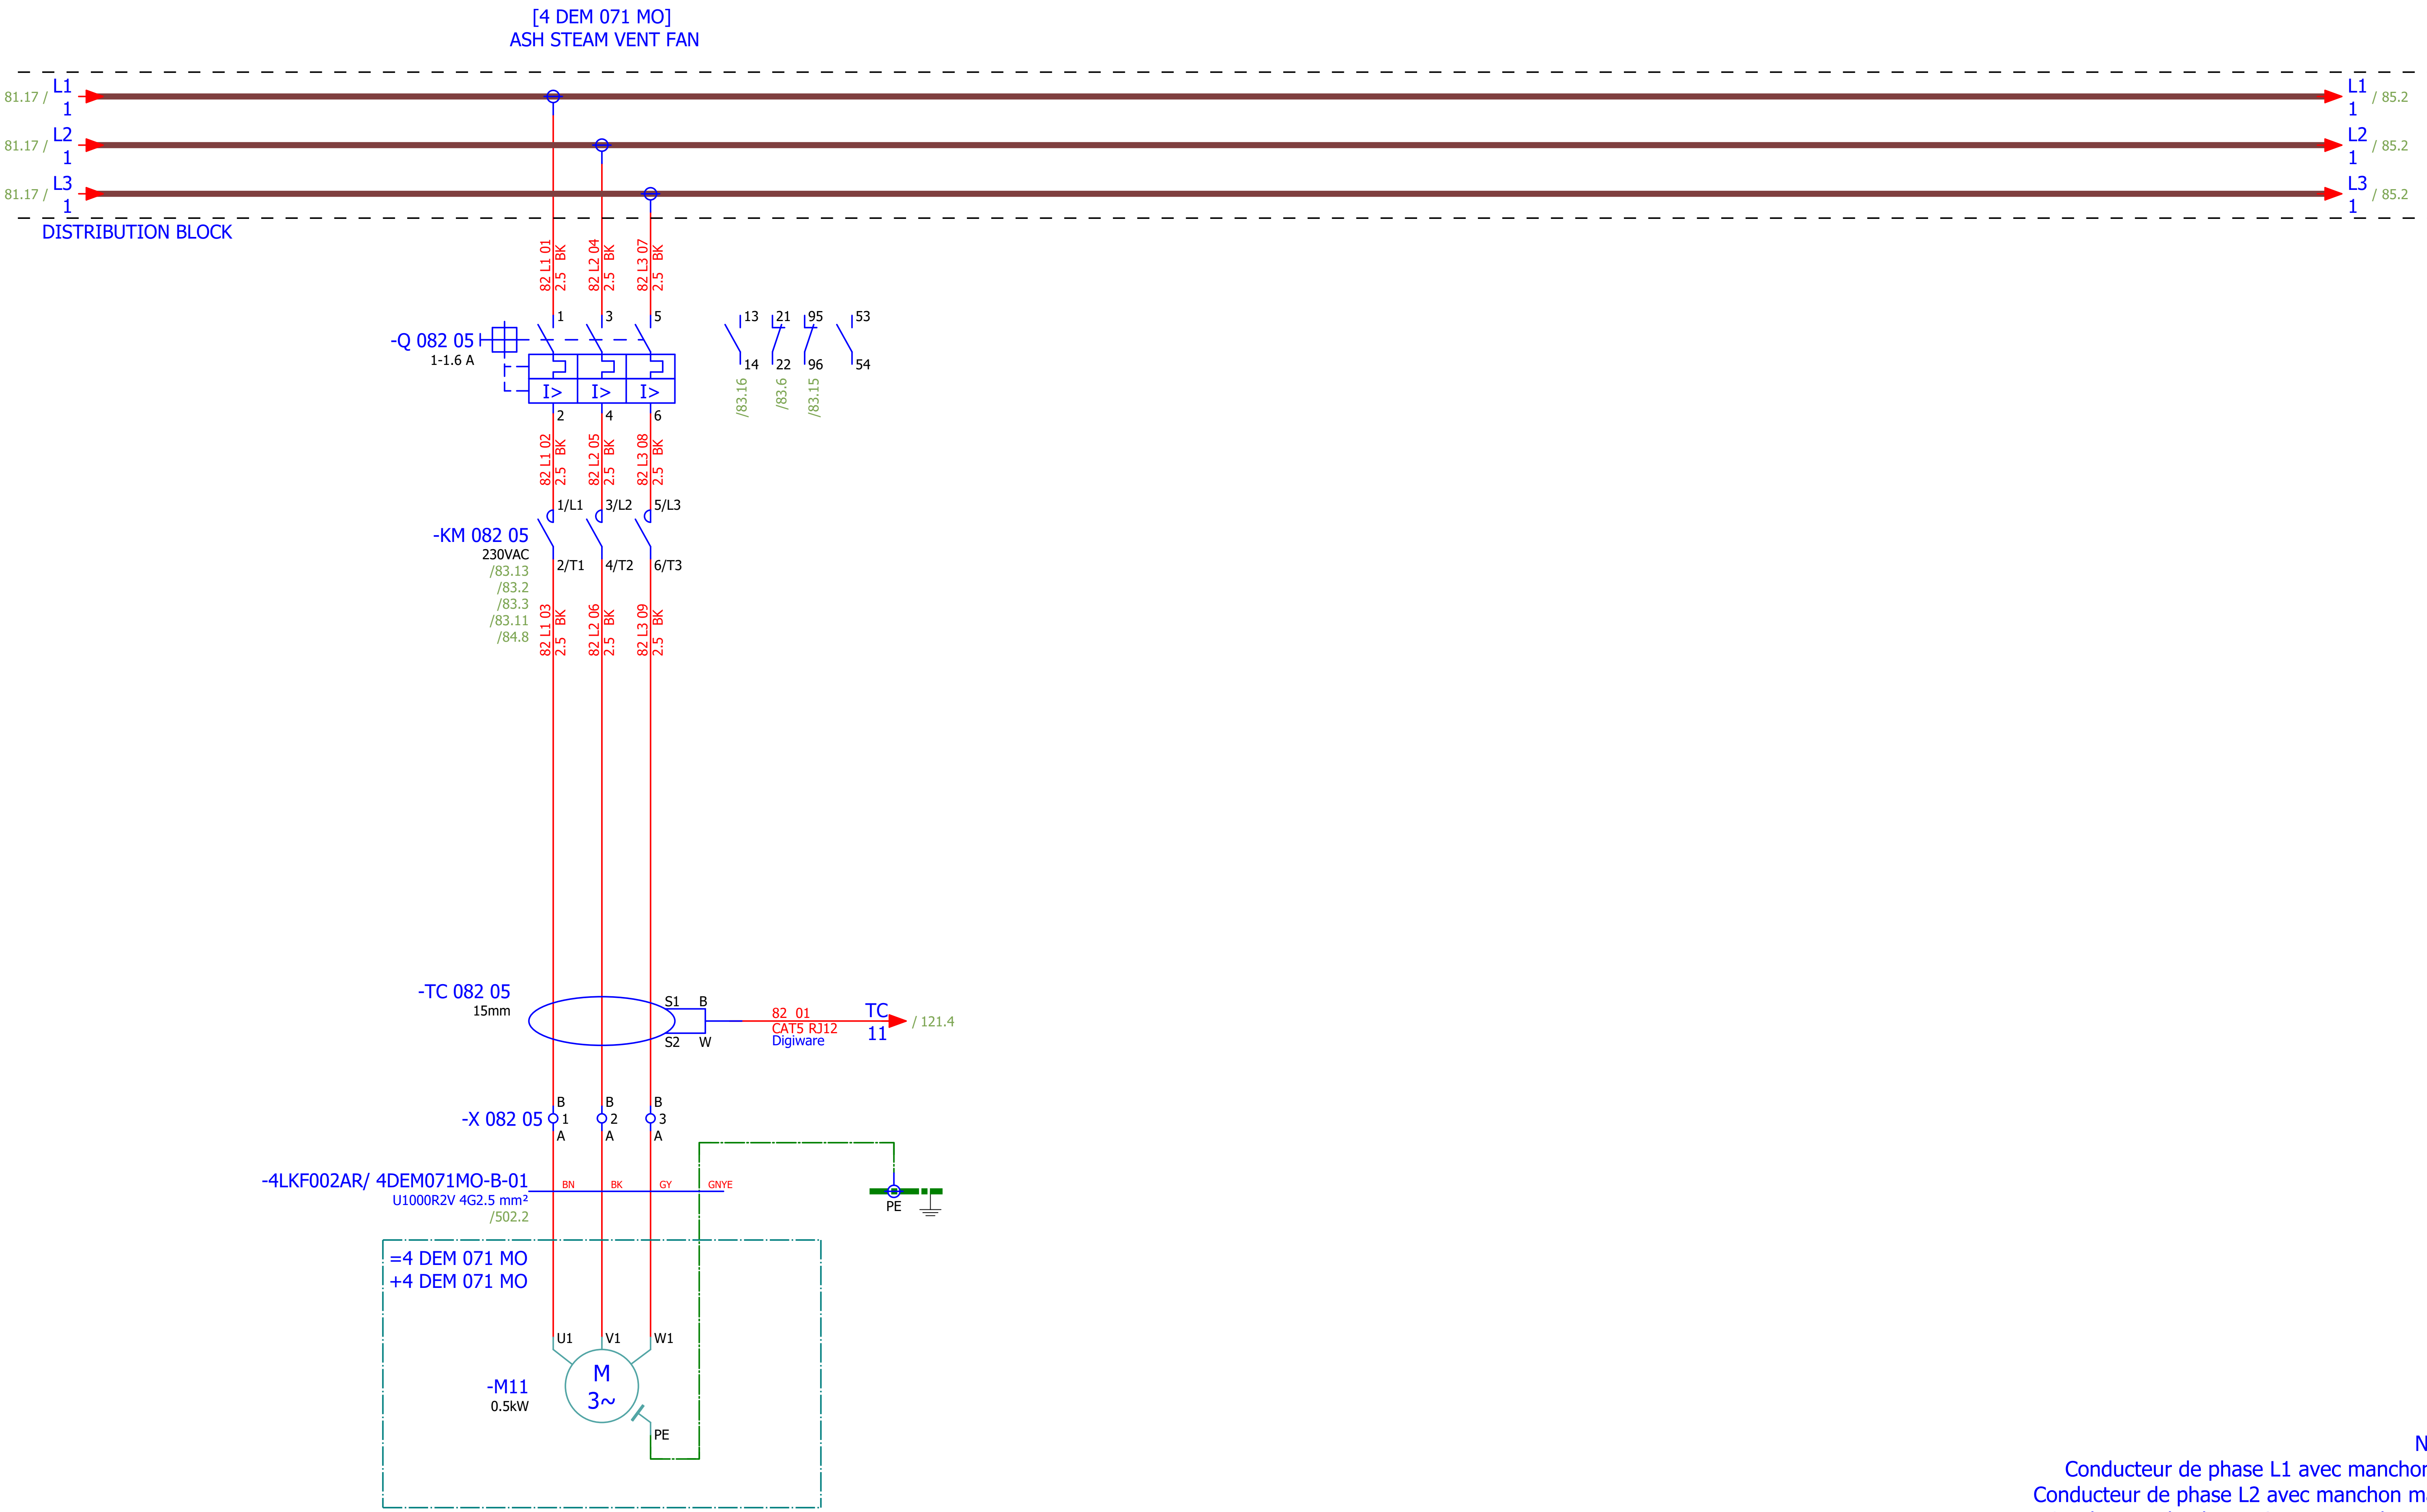

NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date: 17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2	Project: BRC-4
Drawn: Luka Božičević				Unit & Issuer: ATEP0
Approved: Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: ASH STEAM VENT FAN	Number: 1870
Format: A3				Revision: F
			Drawing designation: BRC-4-ATEP0-1870-F	#D
			=4LKF001AR	Sheet: 82
			+4LKF002AR	Next: 83

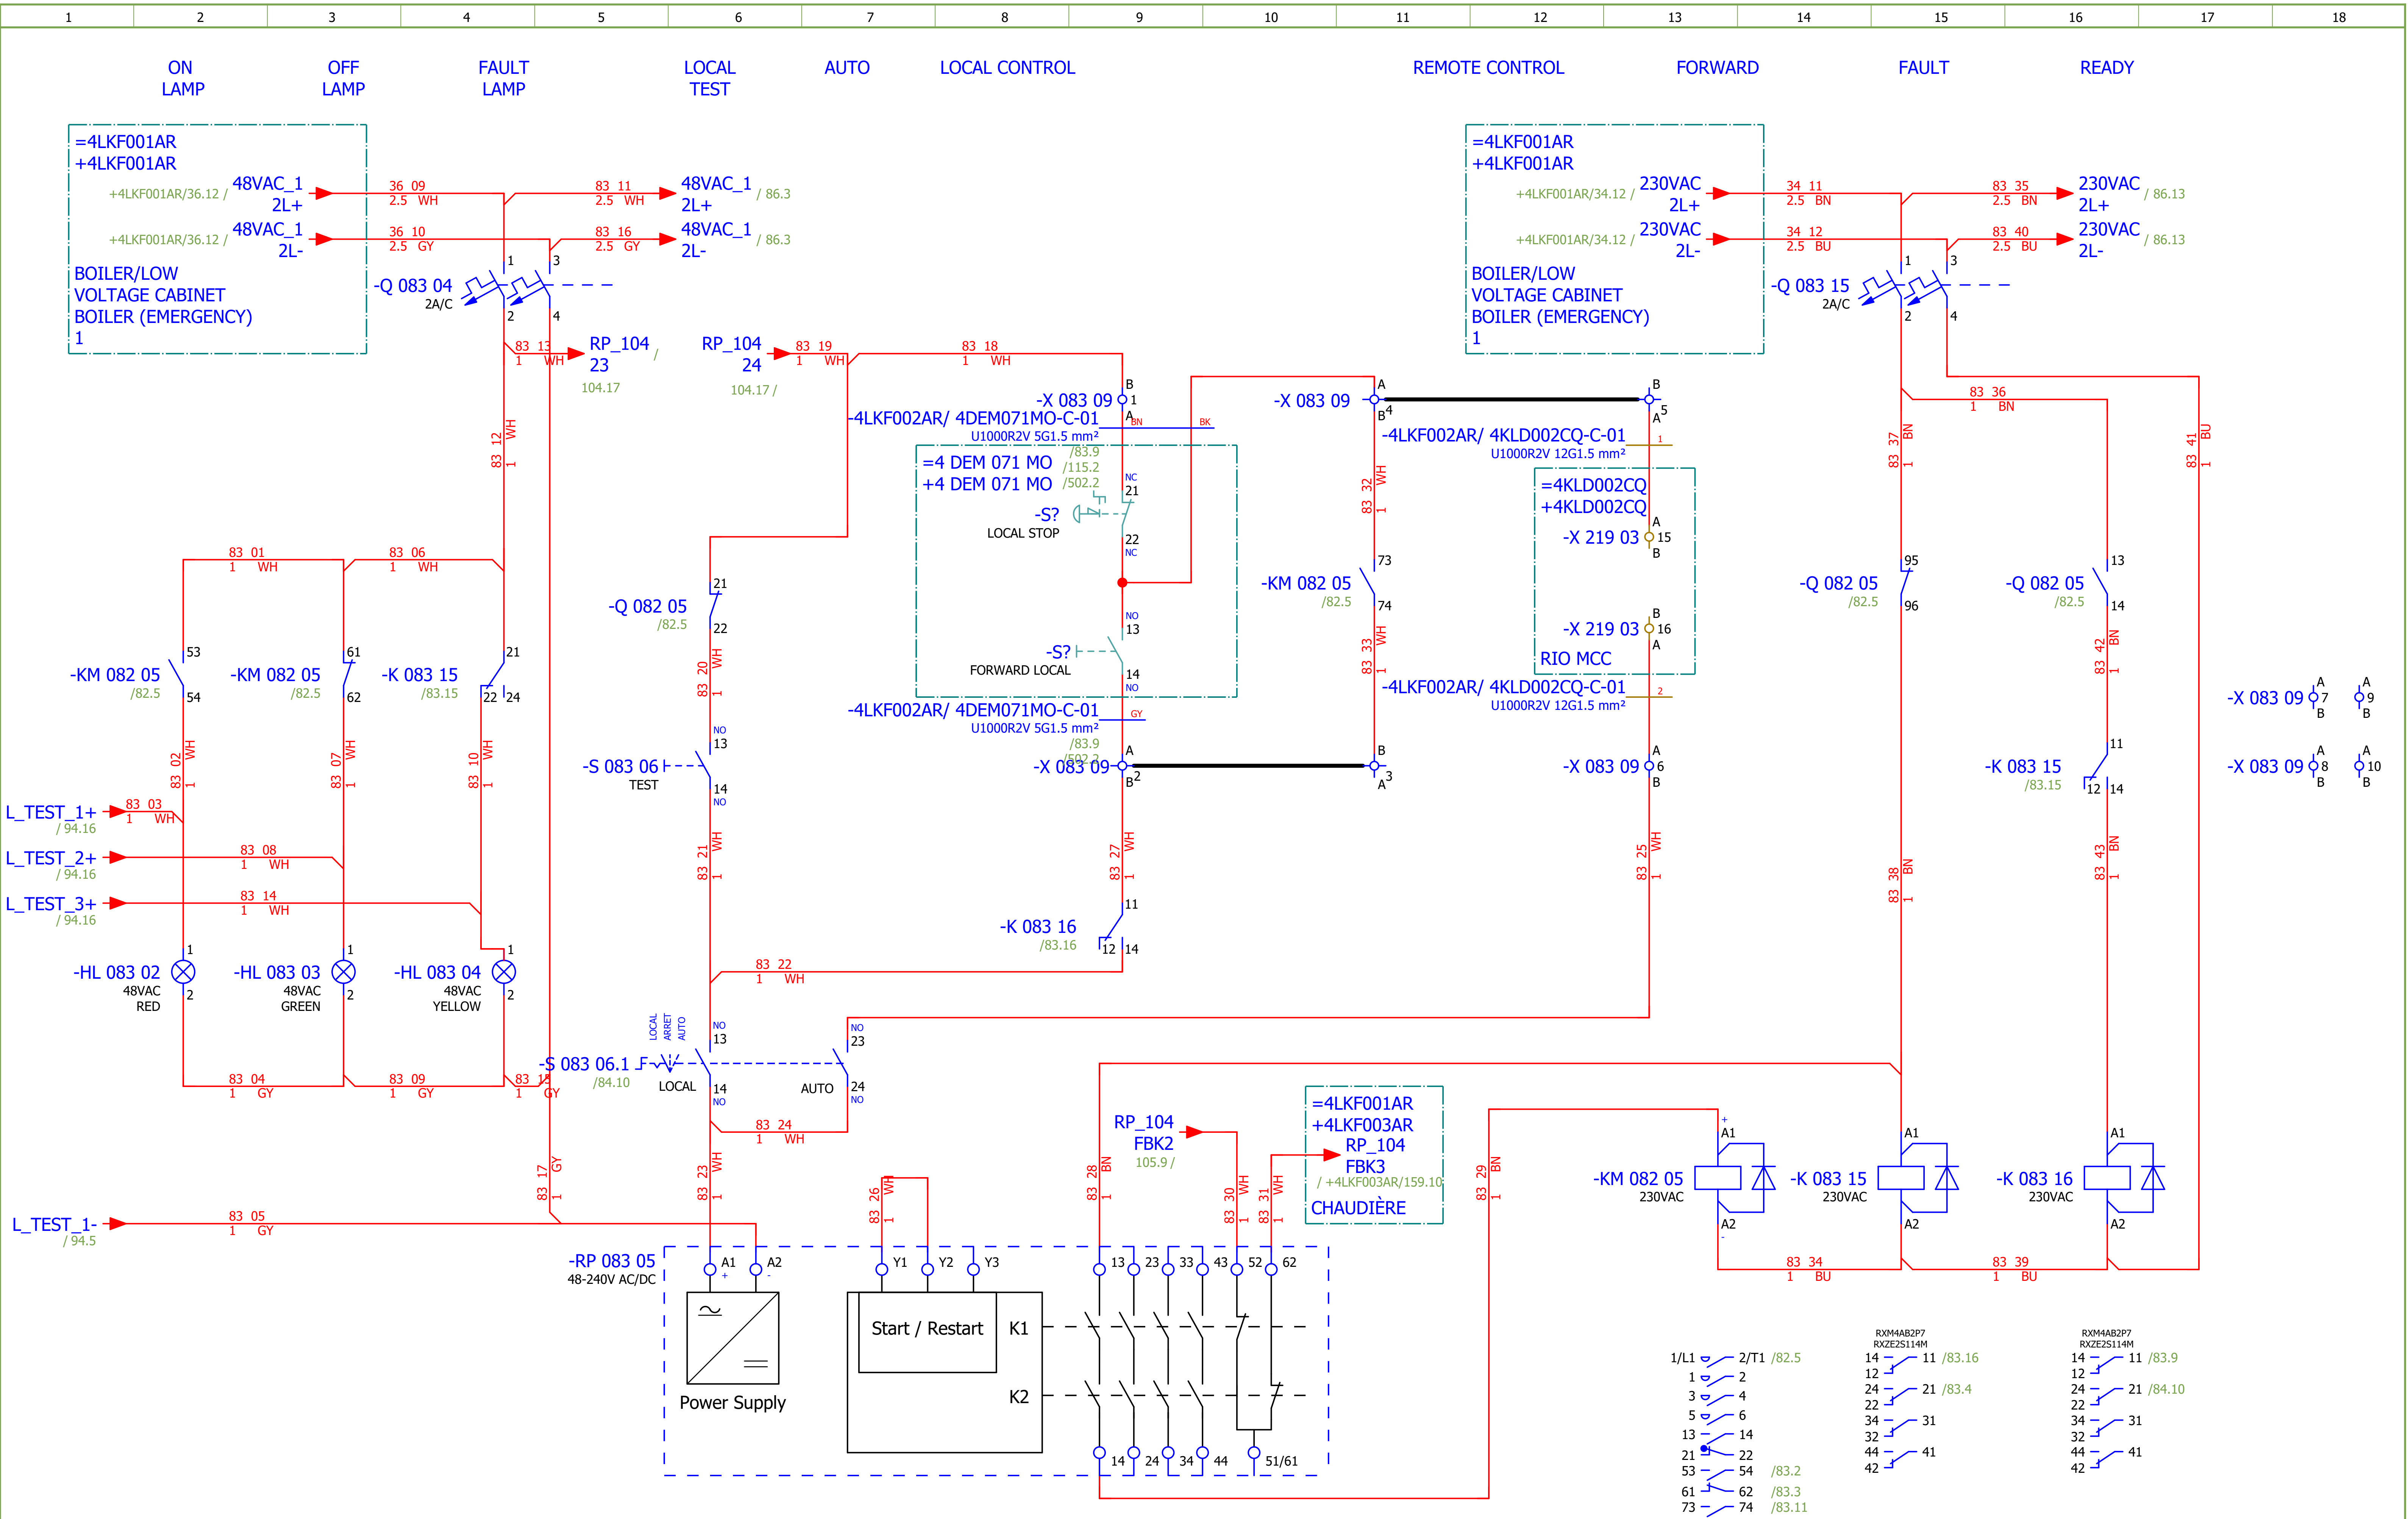

Date:	17.03.2026.	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia
Drawn:	Luka Božičević	Object:	RDF Albioma Les Bois Rouge Reunion - France
Approved:	Grga Kolić	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2
Format:	A3	Content:	ASH STEAM VENT FAN - CONTROL

SINTAKSA A Voith Company

Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 83
			+4LKF002AR	Next: 84

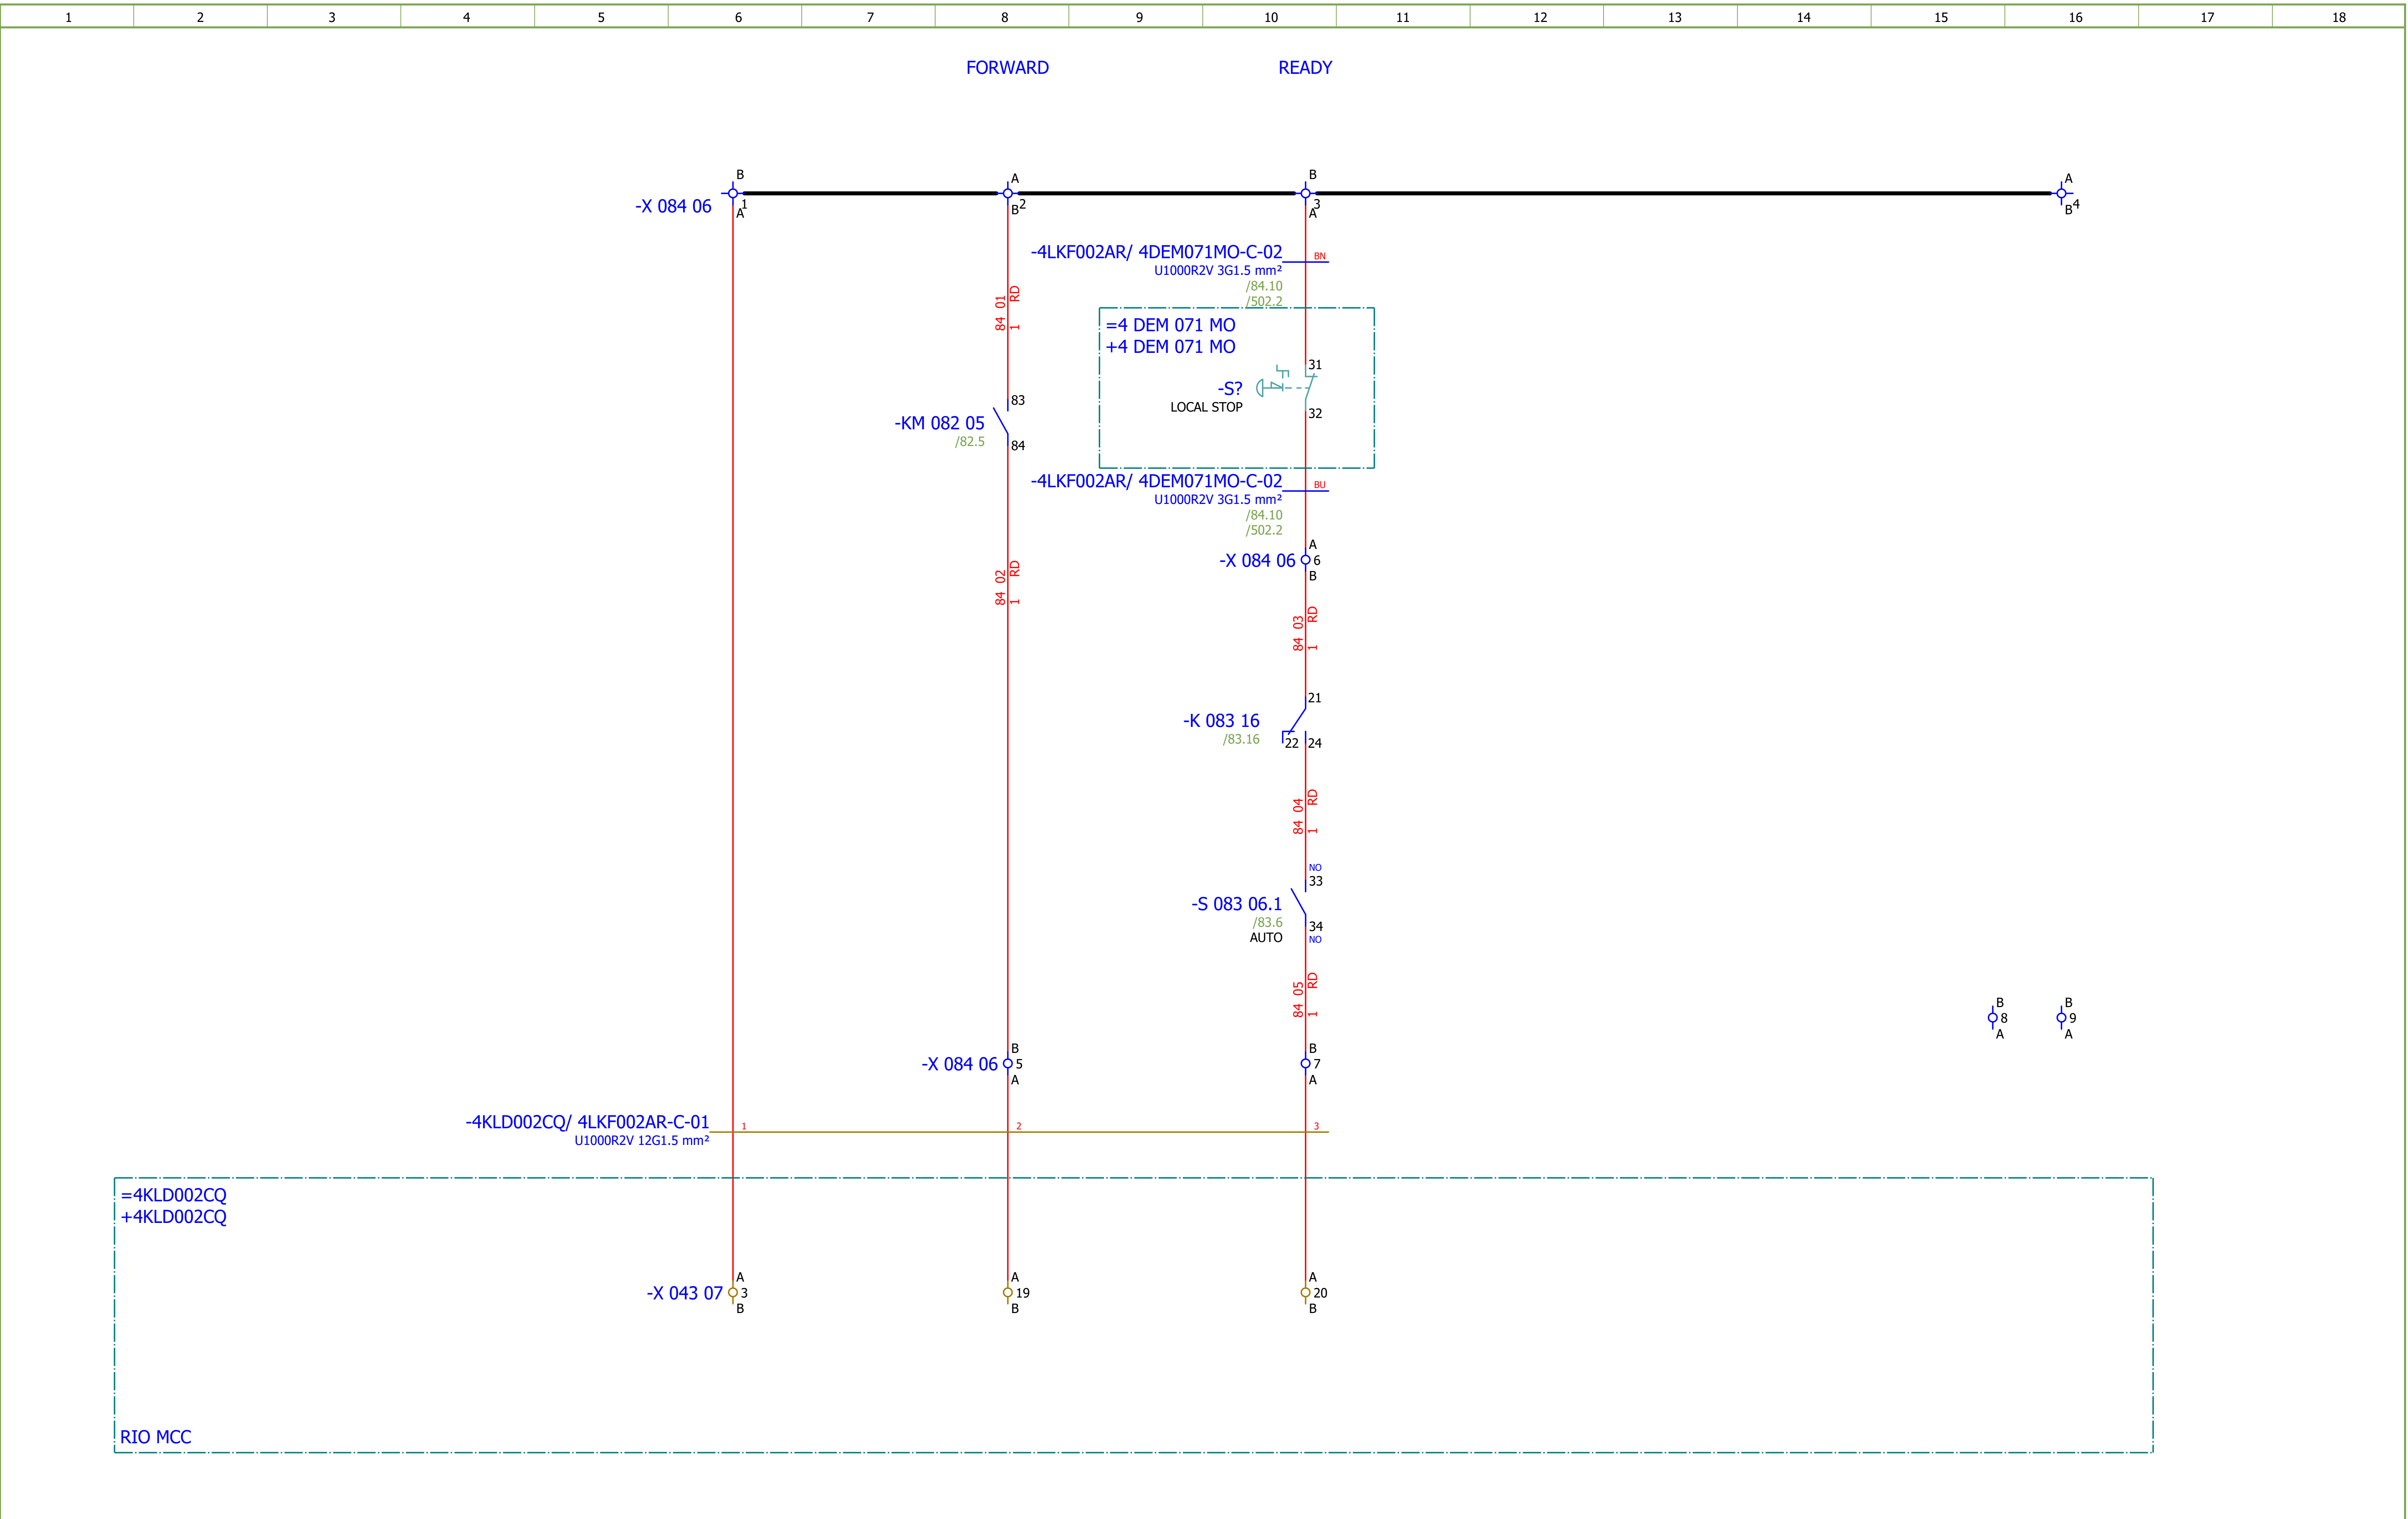

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Luka Božičević								#D
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: ASH STEAM VENT FAN - SIGNALISATION	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 84
Format:	A3							+4LKF002AR	Next: 85

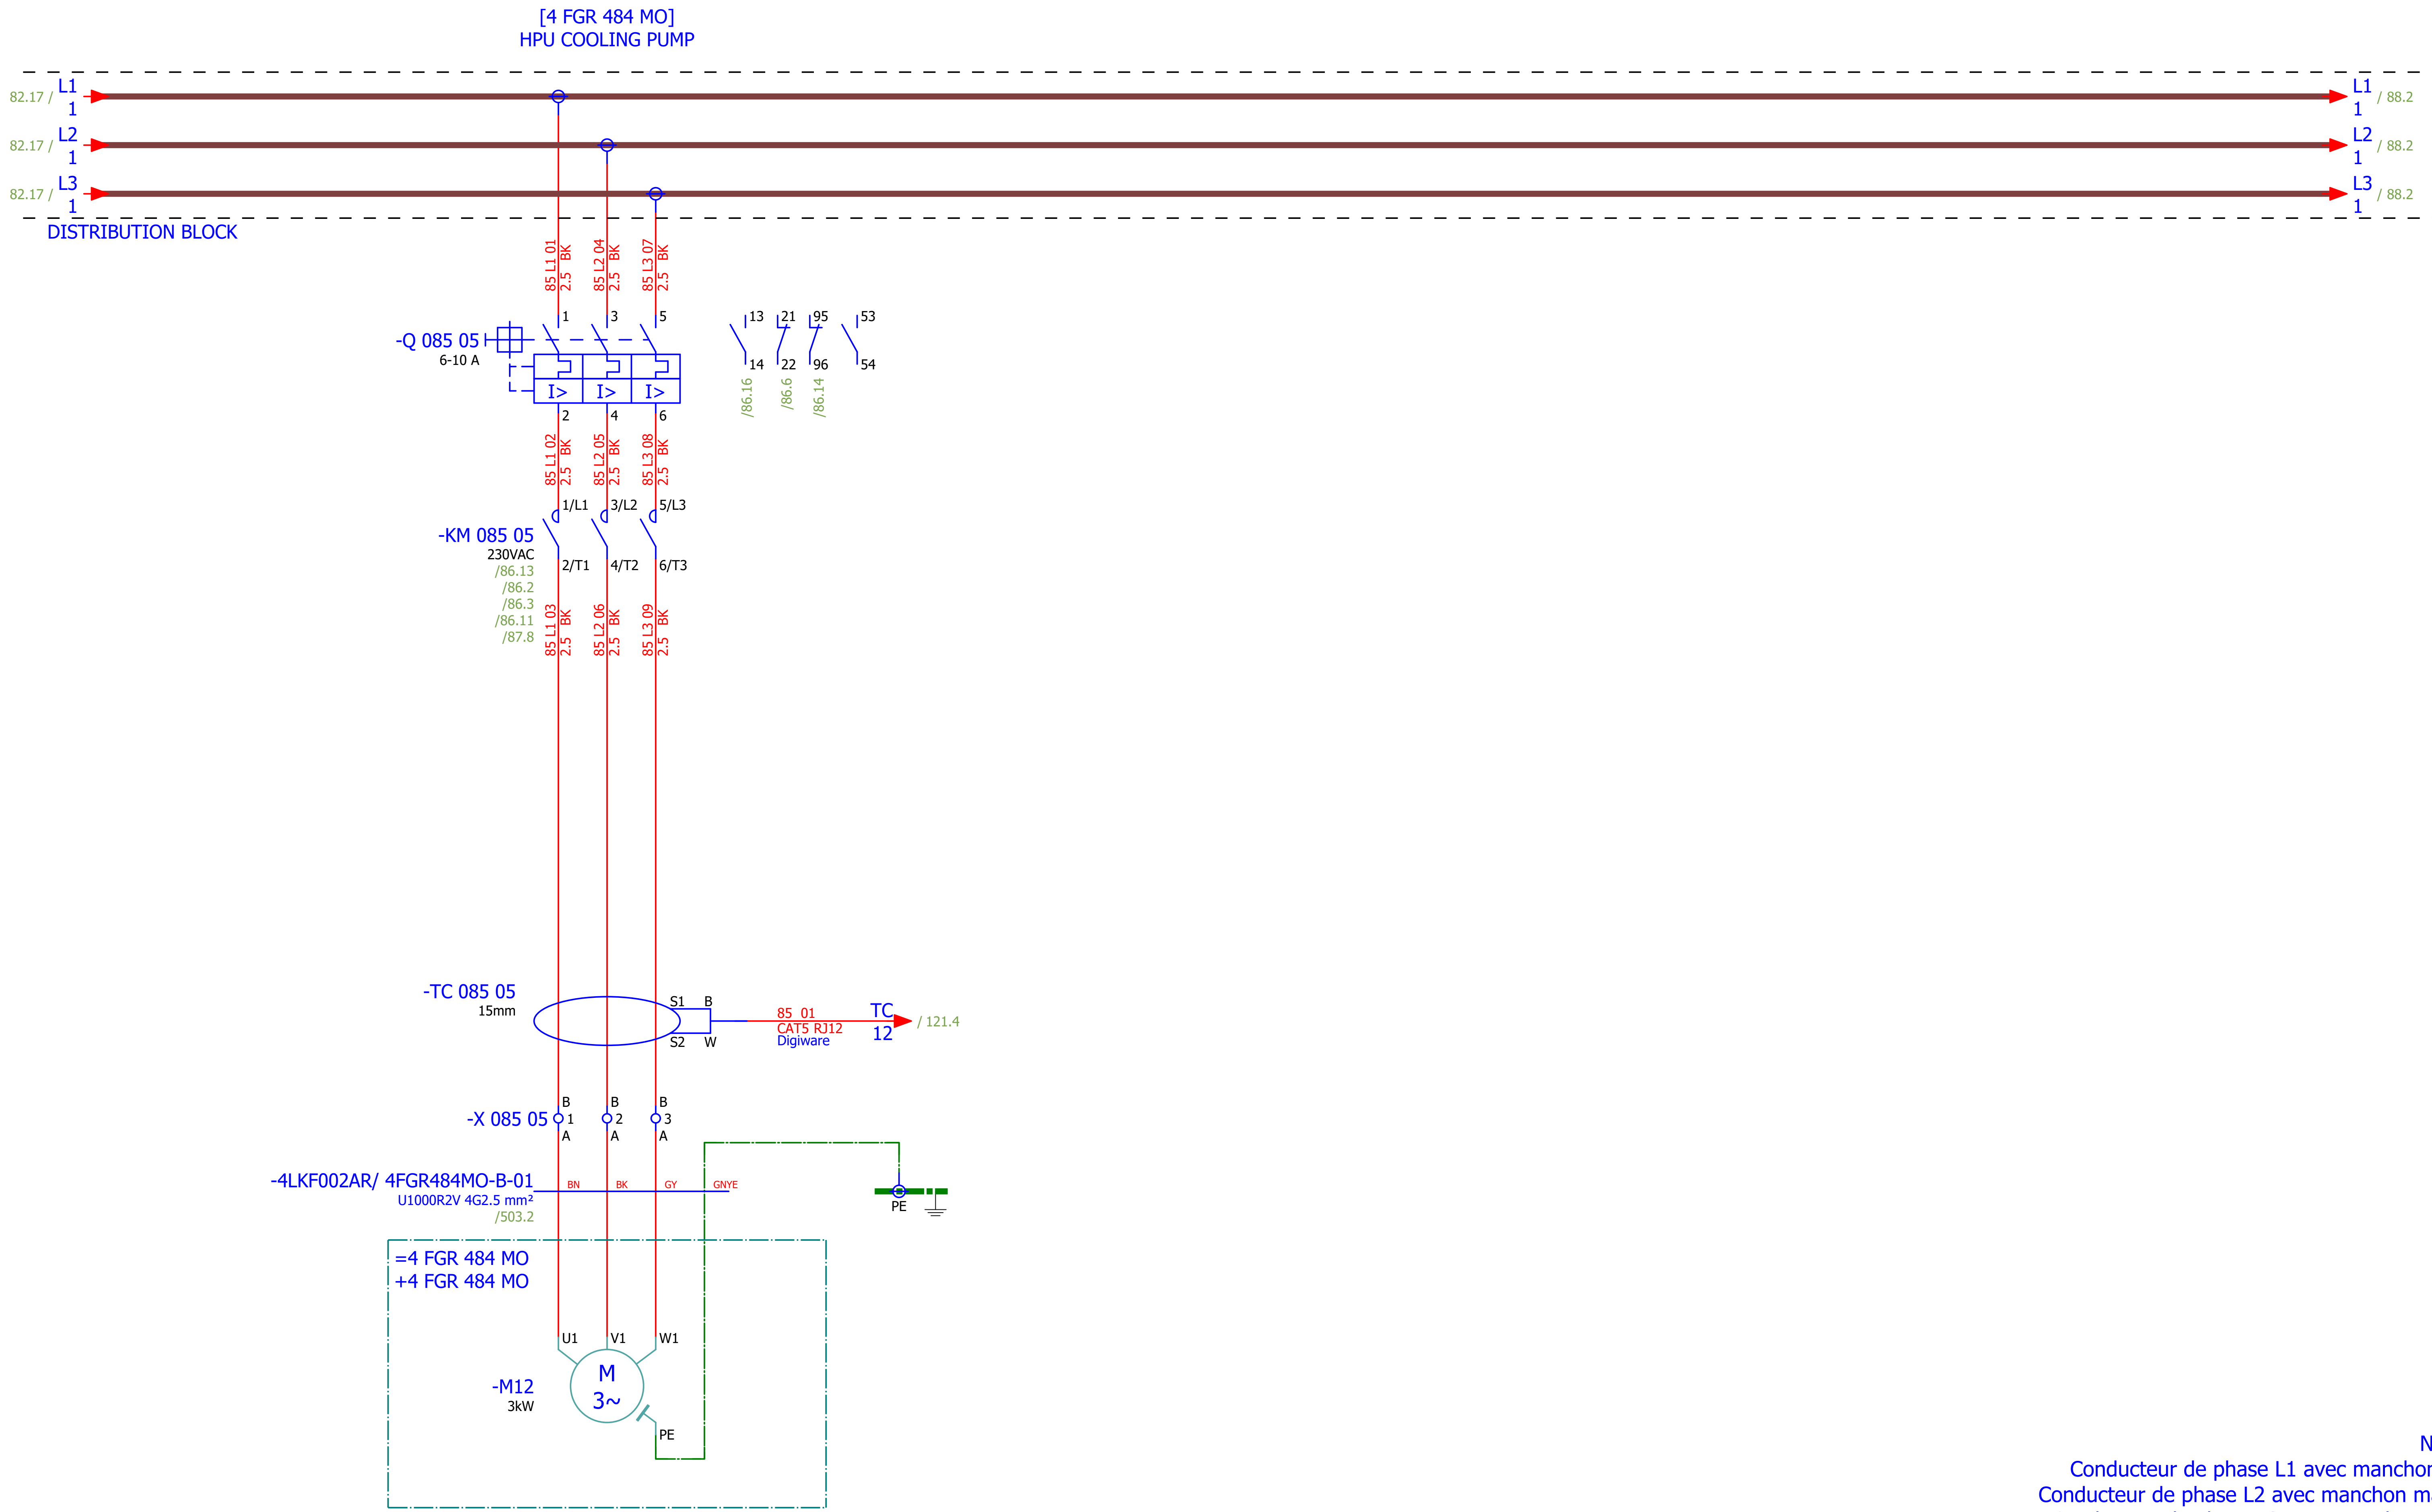

NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2	Project: BRC-4	Unit & Issuer: ATEP0
Drawn:	Luka Božičević					Number: 1870	Revision: F
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: HPU COOLING PUMP	Drawing designation: BRC-4-ATEP0-1870-F	#D
Format:	A3					=4LKF001AR +4LKF002AR	Sheet: 85 Next: 86

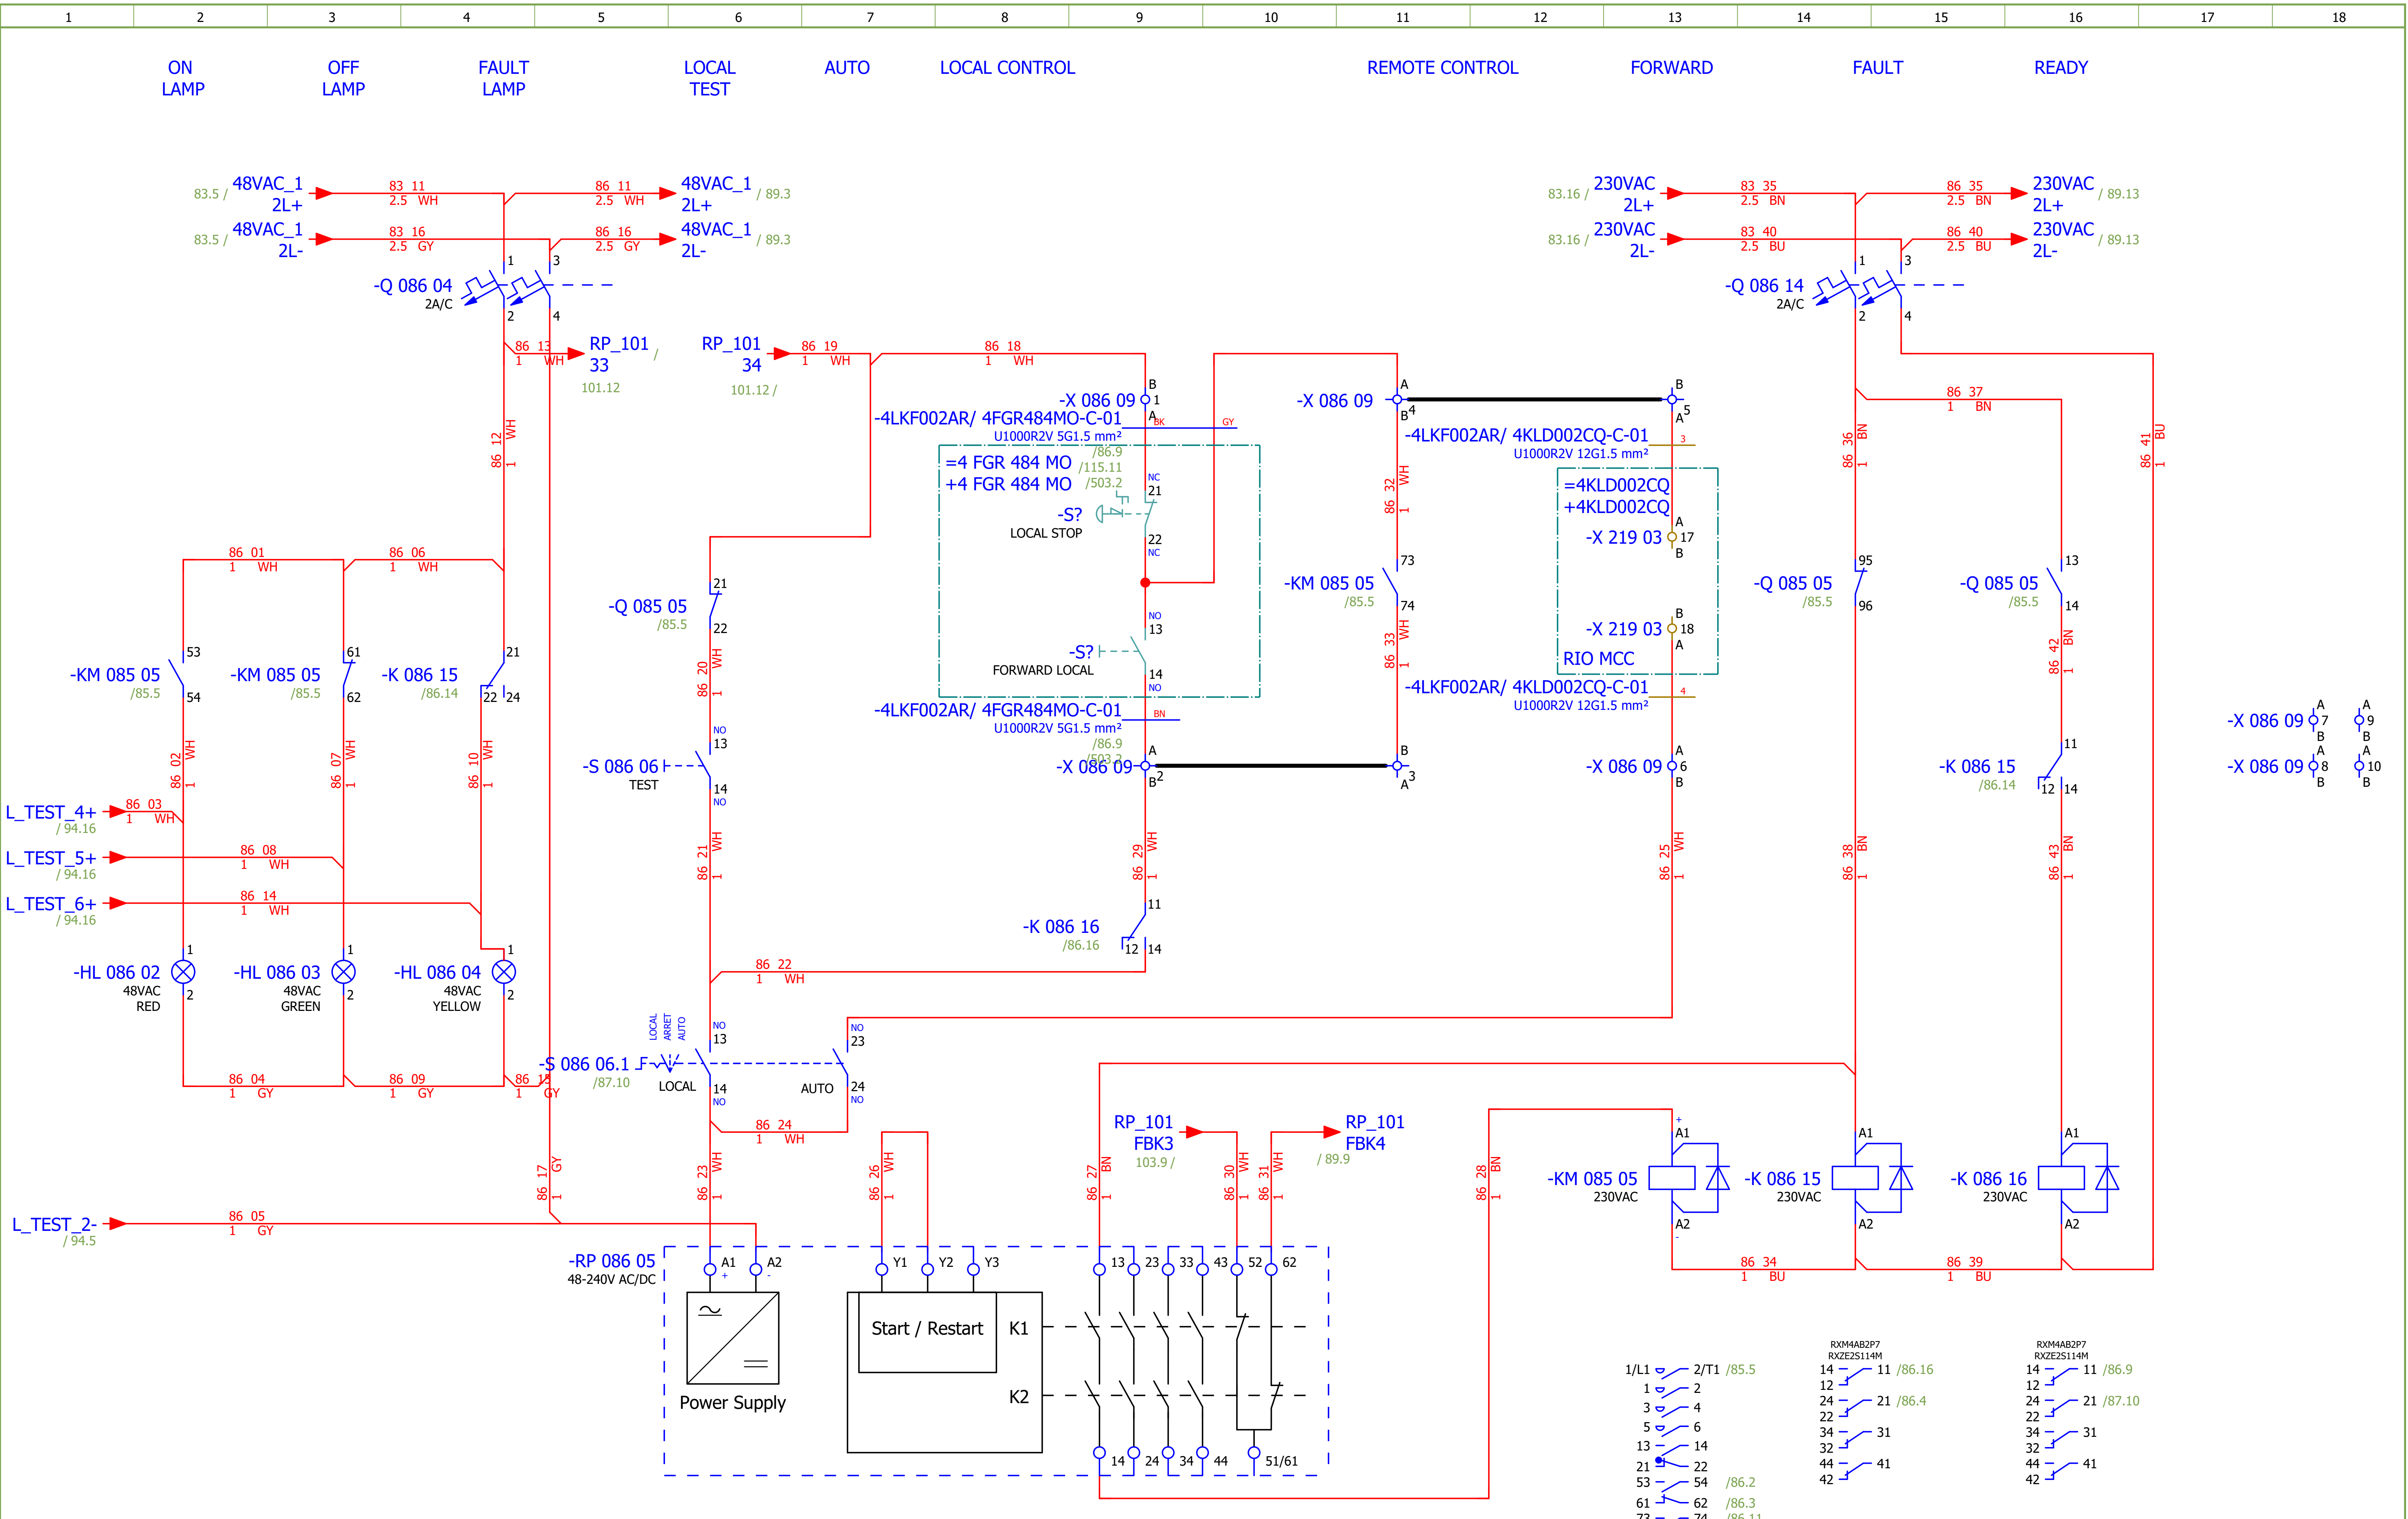

Date:	17.03.2026.	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2
Drawn:	Luka Božičević			Project:	BRC-4
Approved:	Grga Kolić	Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	HPU COOLING PUMP - CONTROL
Format:	A3			Drawing designation:	BRC-4-ATEP0-1870-F

Unit & Issuer:	ATEP0	Number:	1870
Revision:	F		#D
=4LKF001AR		Sheet:	86
+4LKF002AR		Next:	87

SINTAKSA
A Voith Company

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

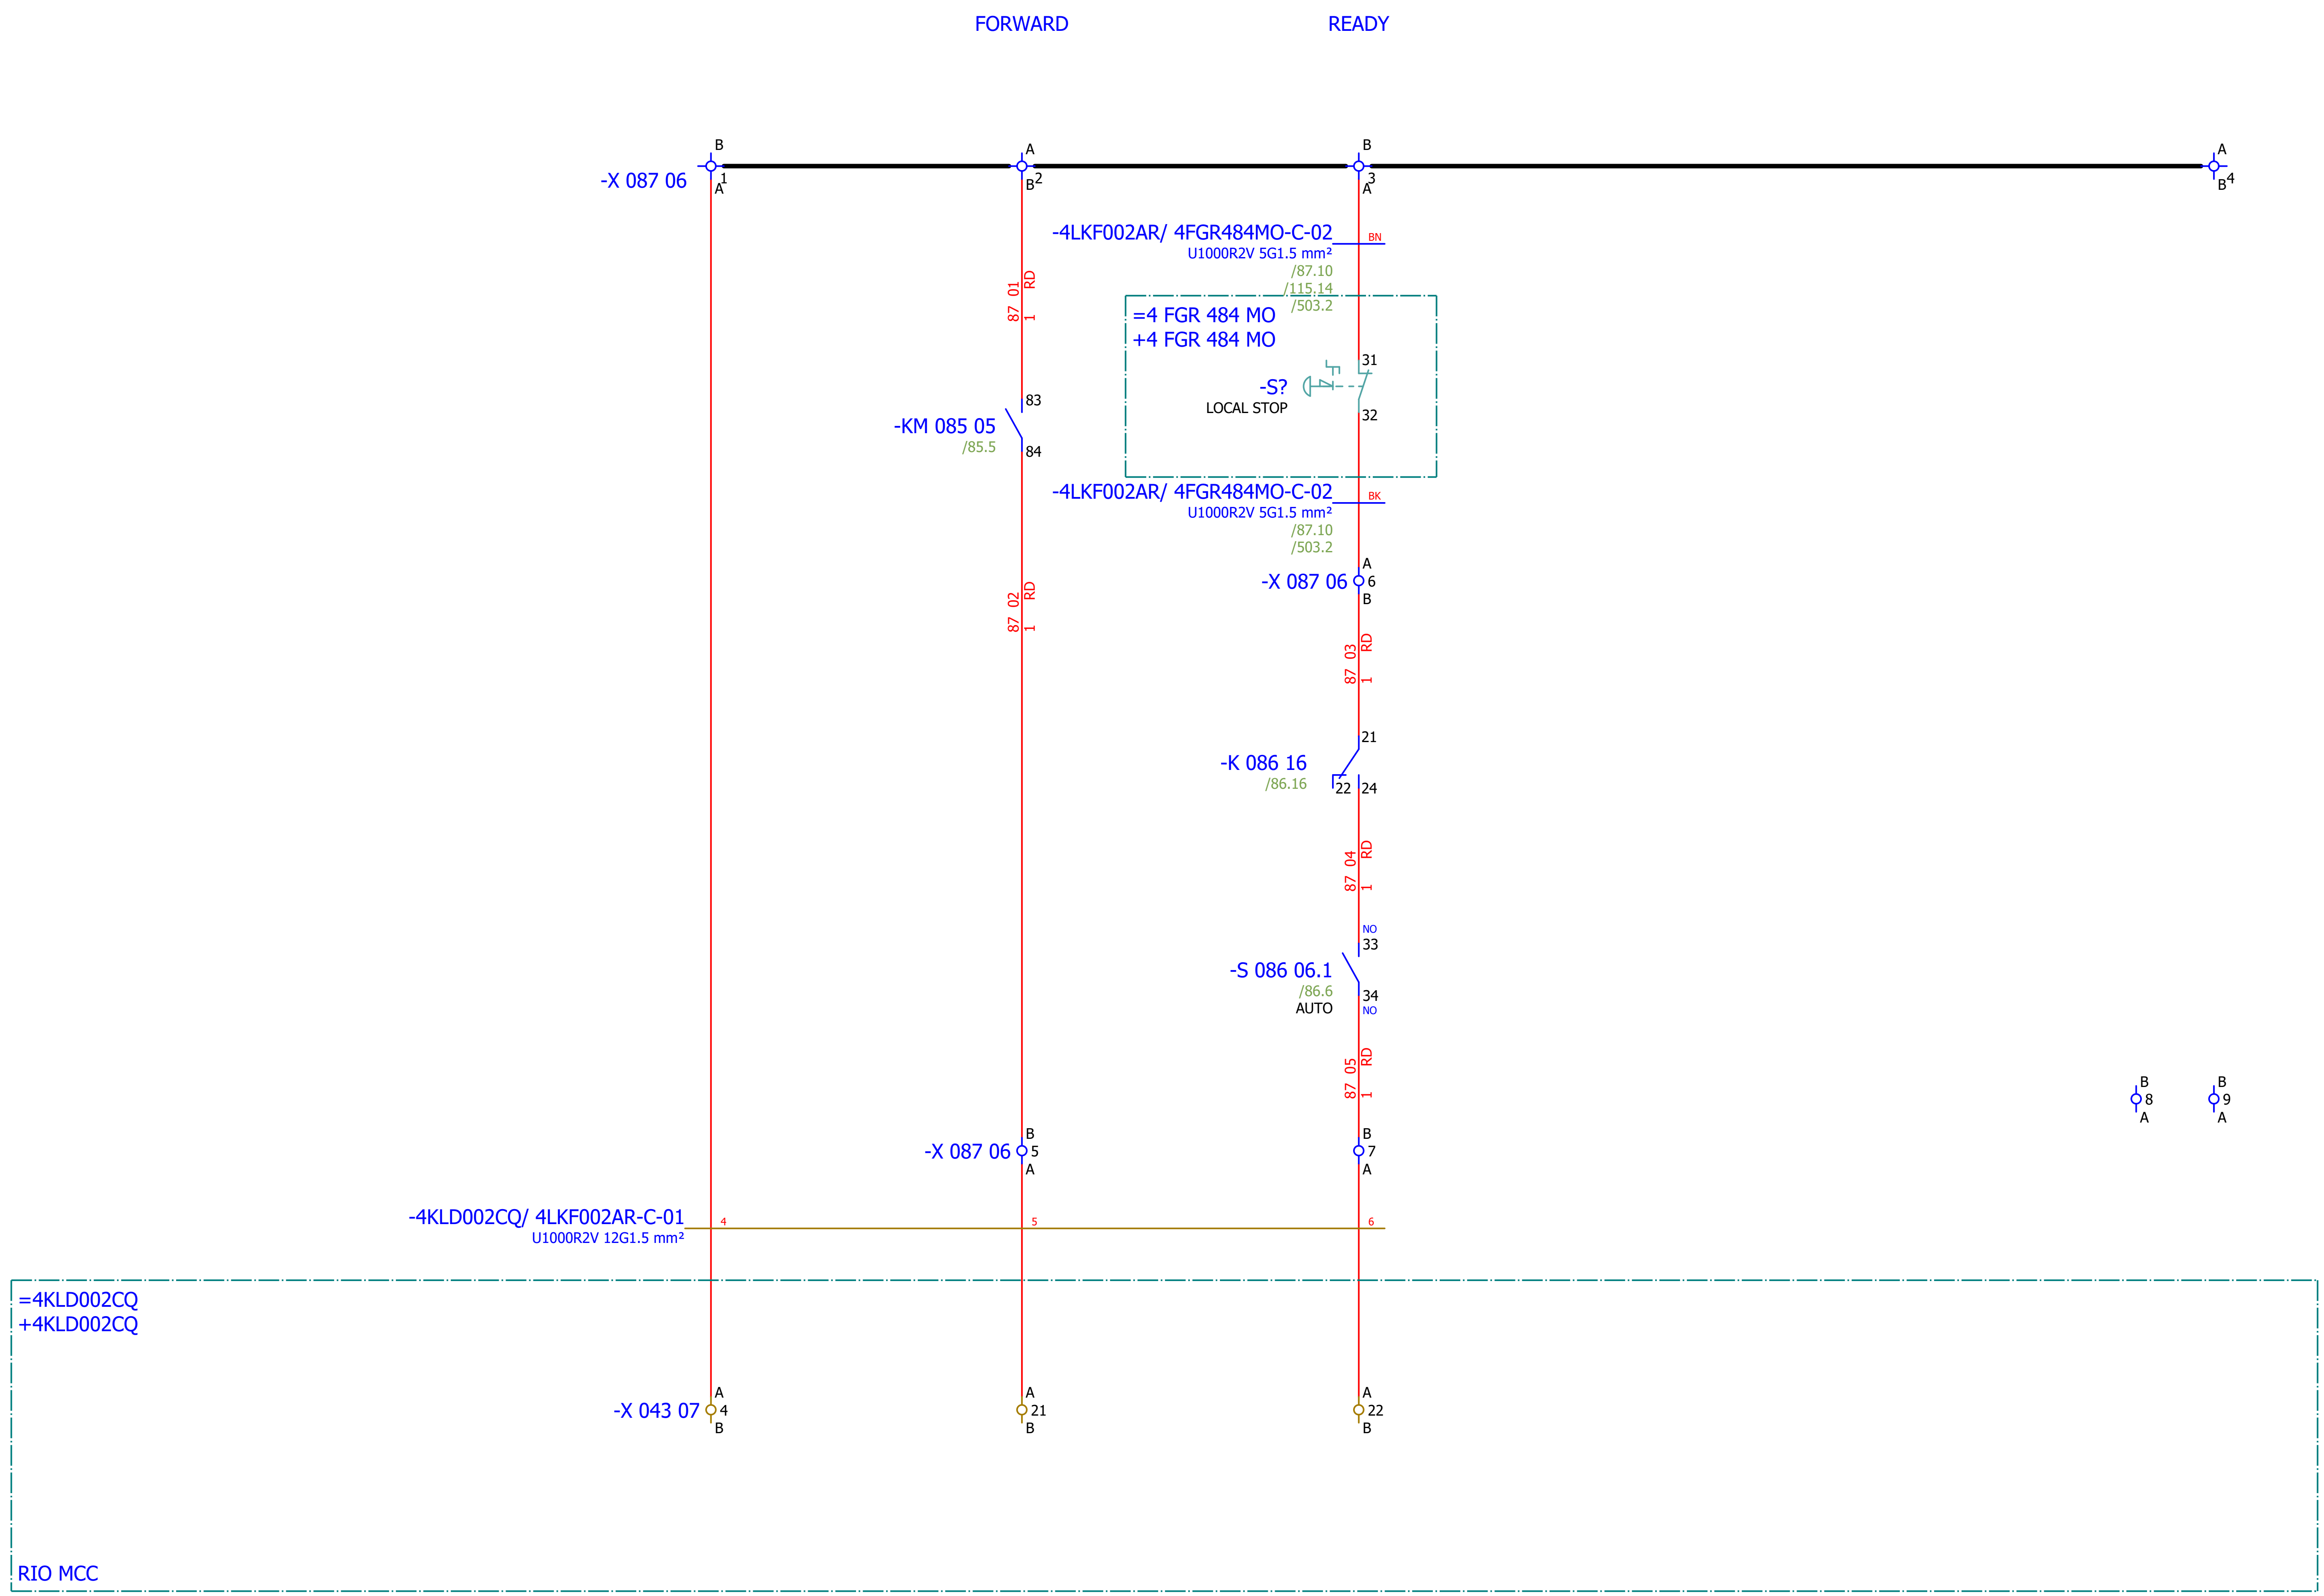

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: HPU COOLING PUMP - SIGNALIZATION	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 87
Format:	A3								+4LKF002AR	Next: 88

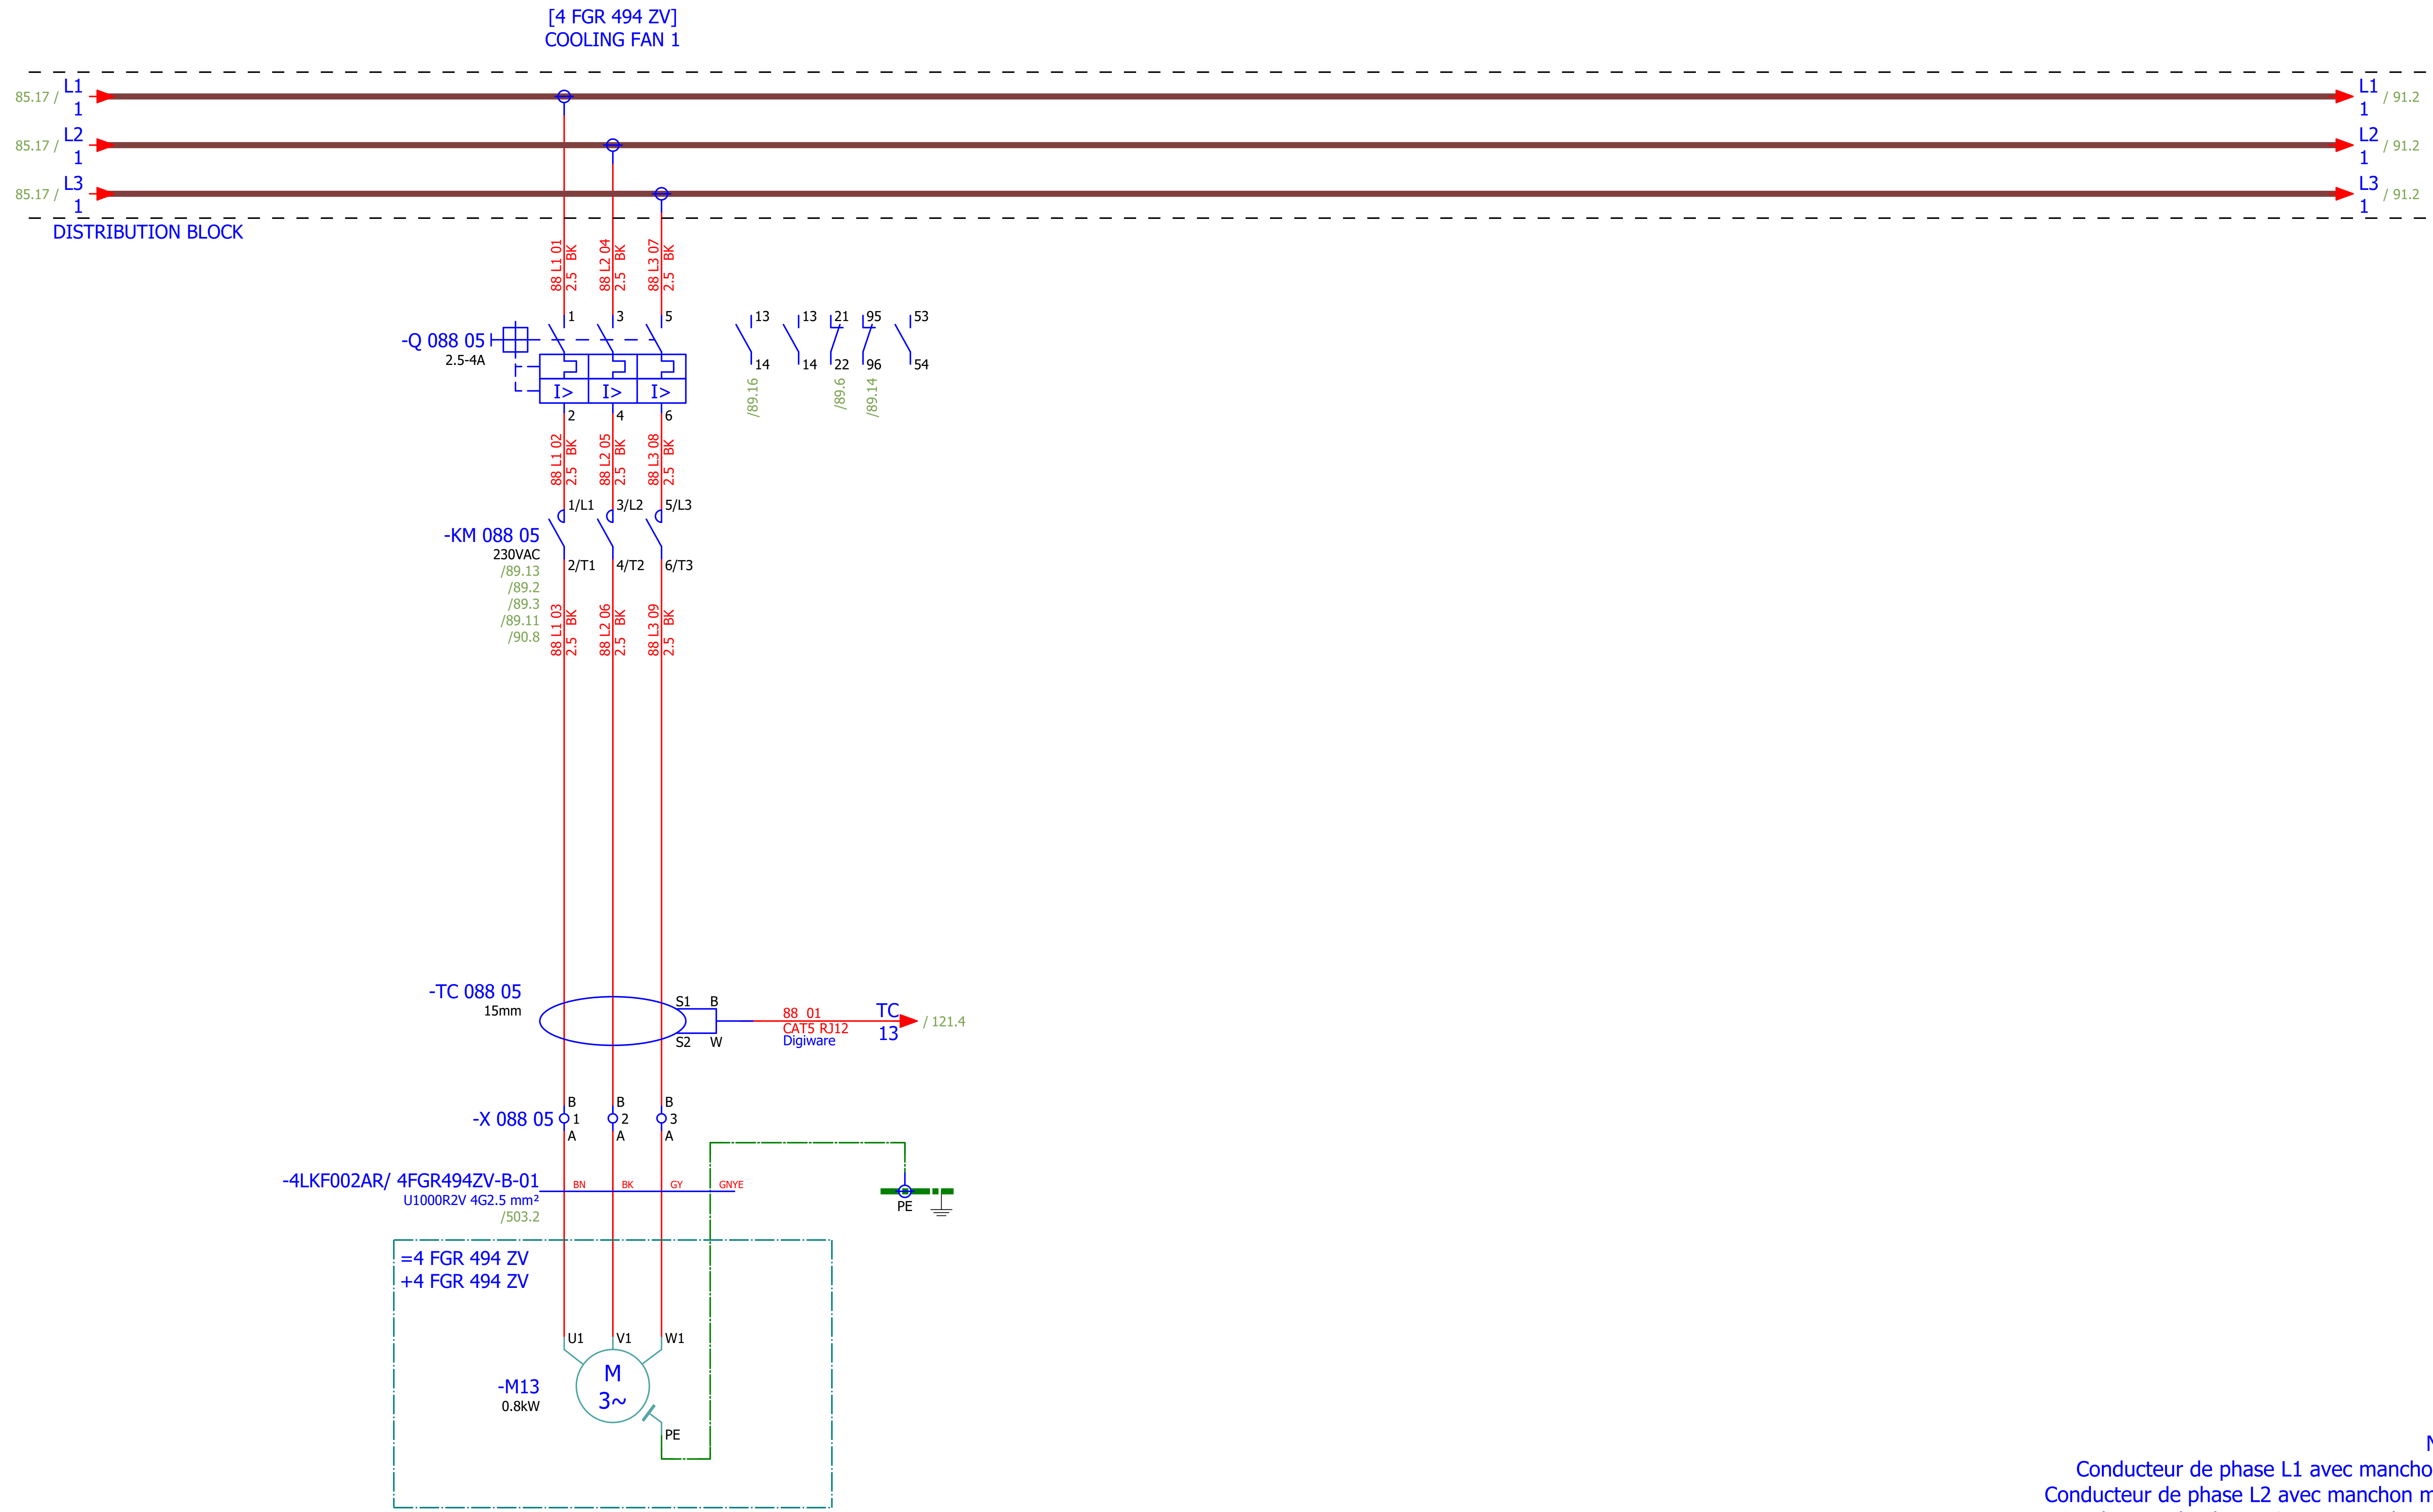

NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Luka Božičević								#D
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING FAN 1	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 88
Format:	A3							+4LKF002AR	Next: 89

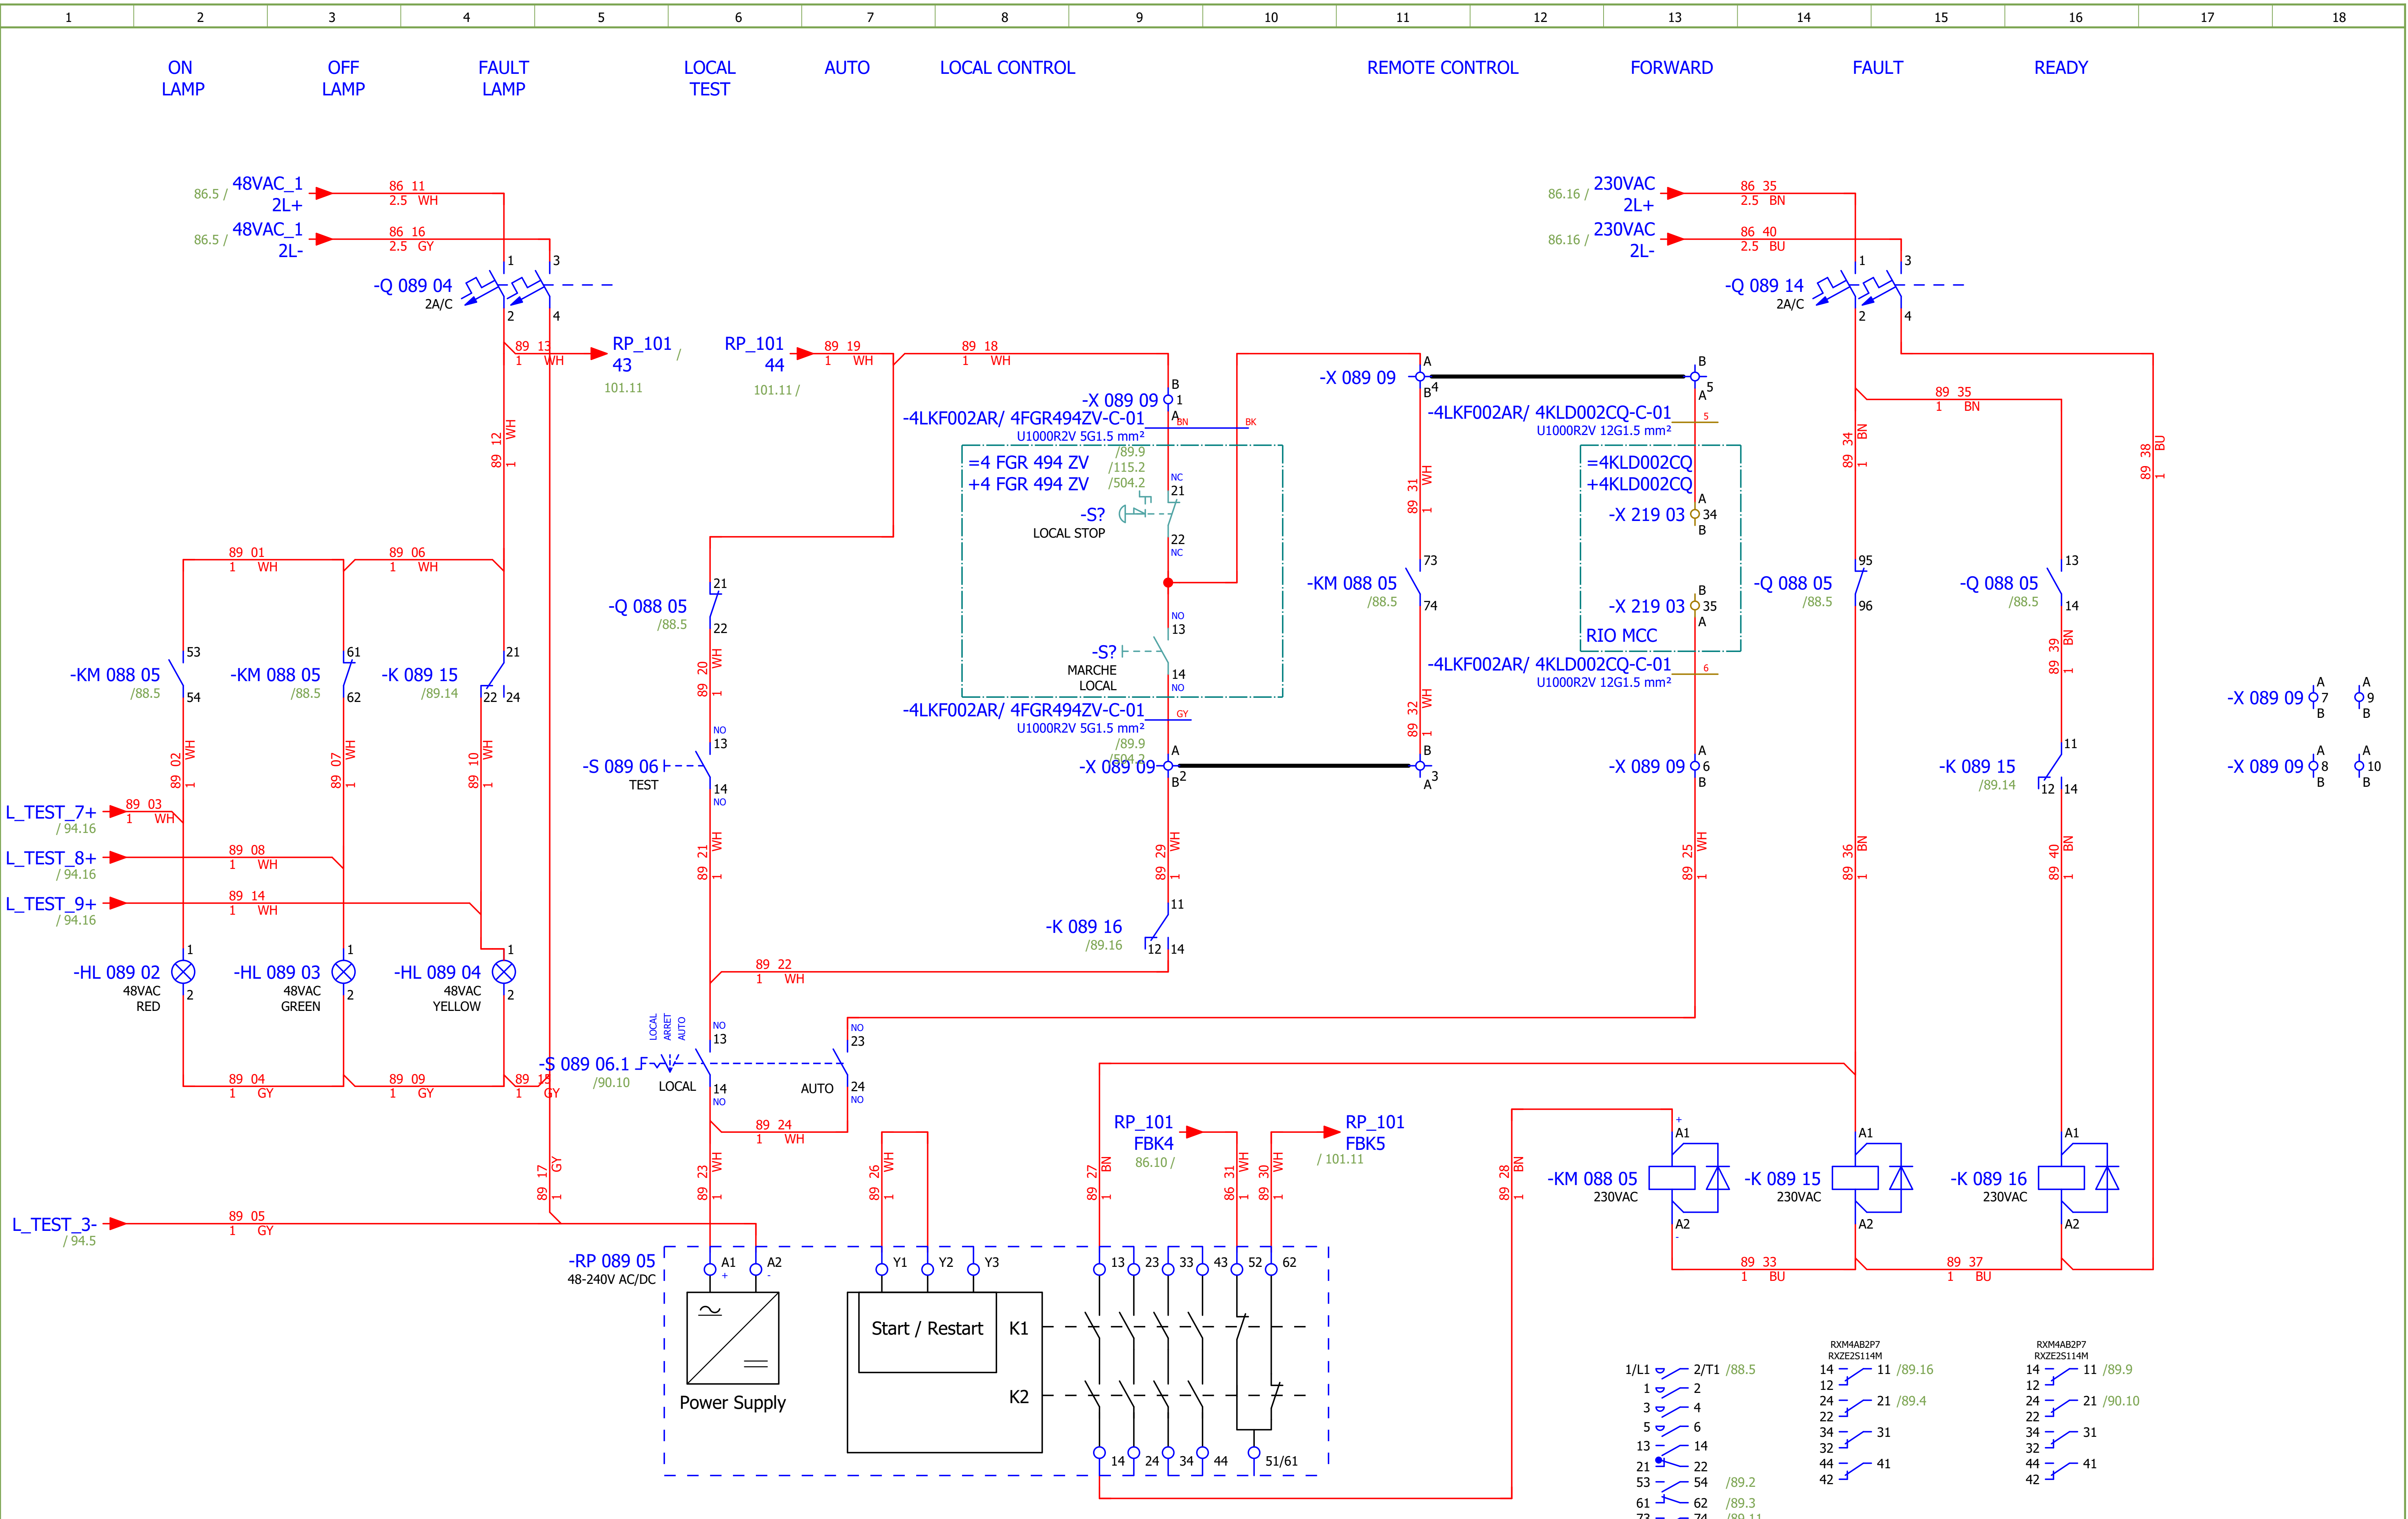

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2	
Drawn:	Luka Božičević				Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	COOLING FAN 1 - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F
Format:	A3						

Revision:	F
#D	
=4LKF001AR	Sheet: 89
+4LKF002AR	Next: 90

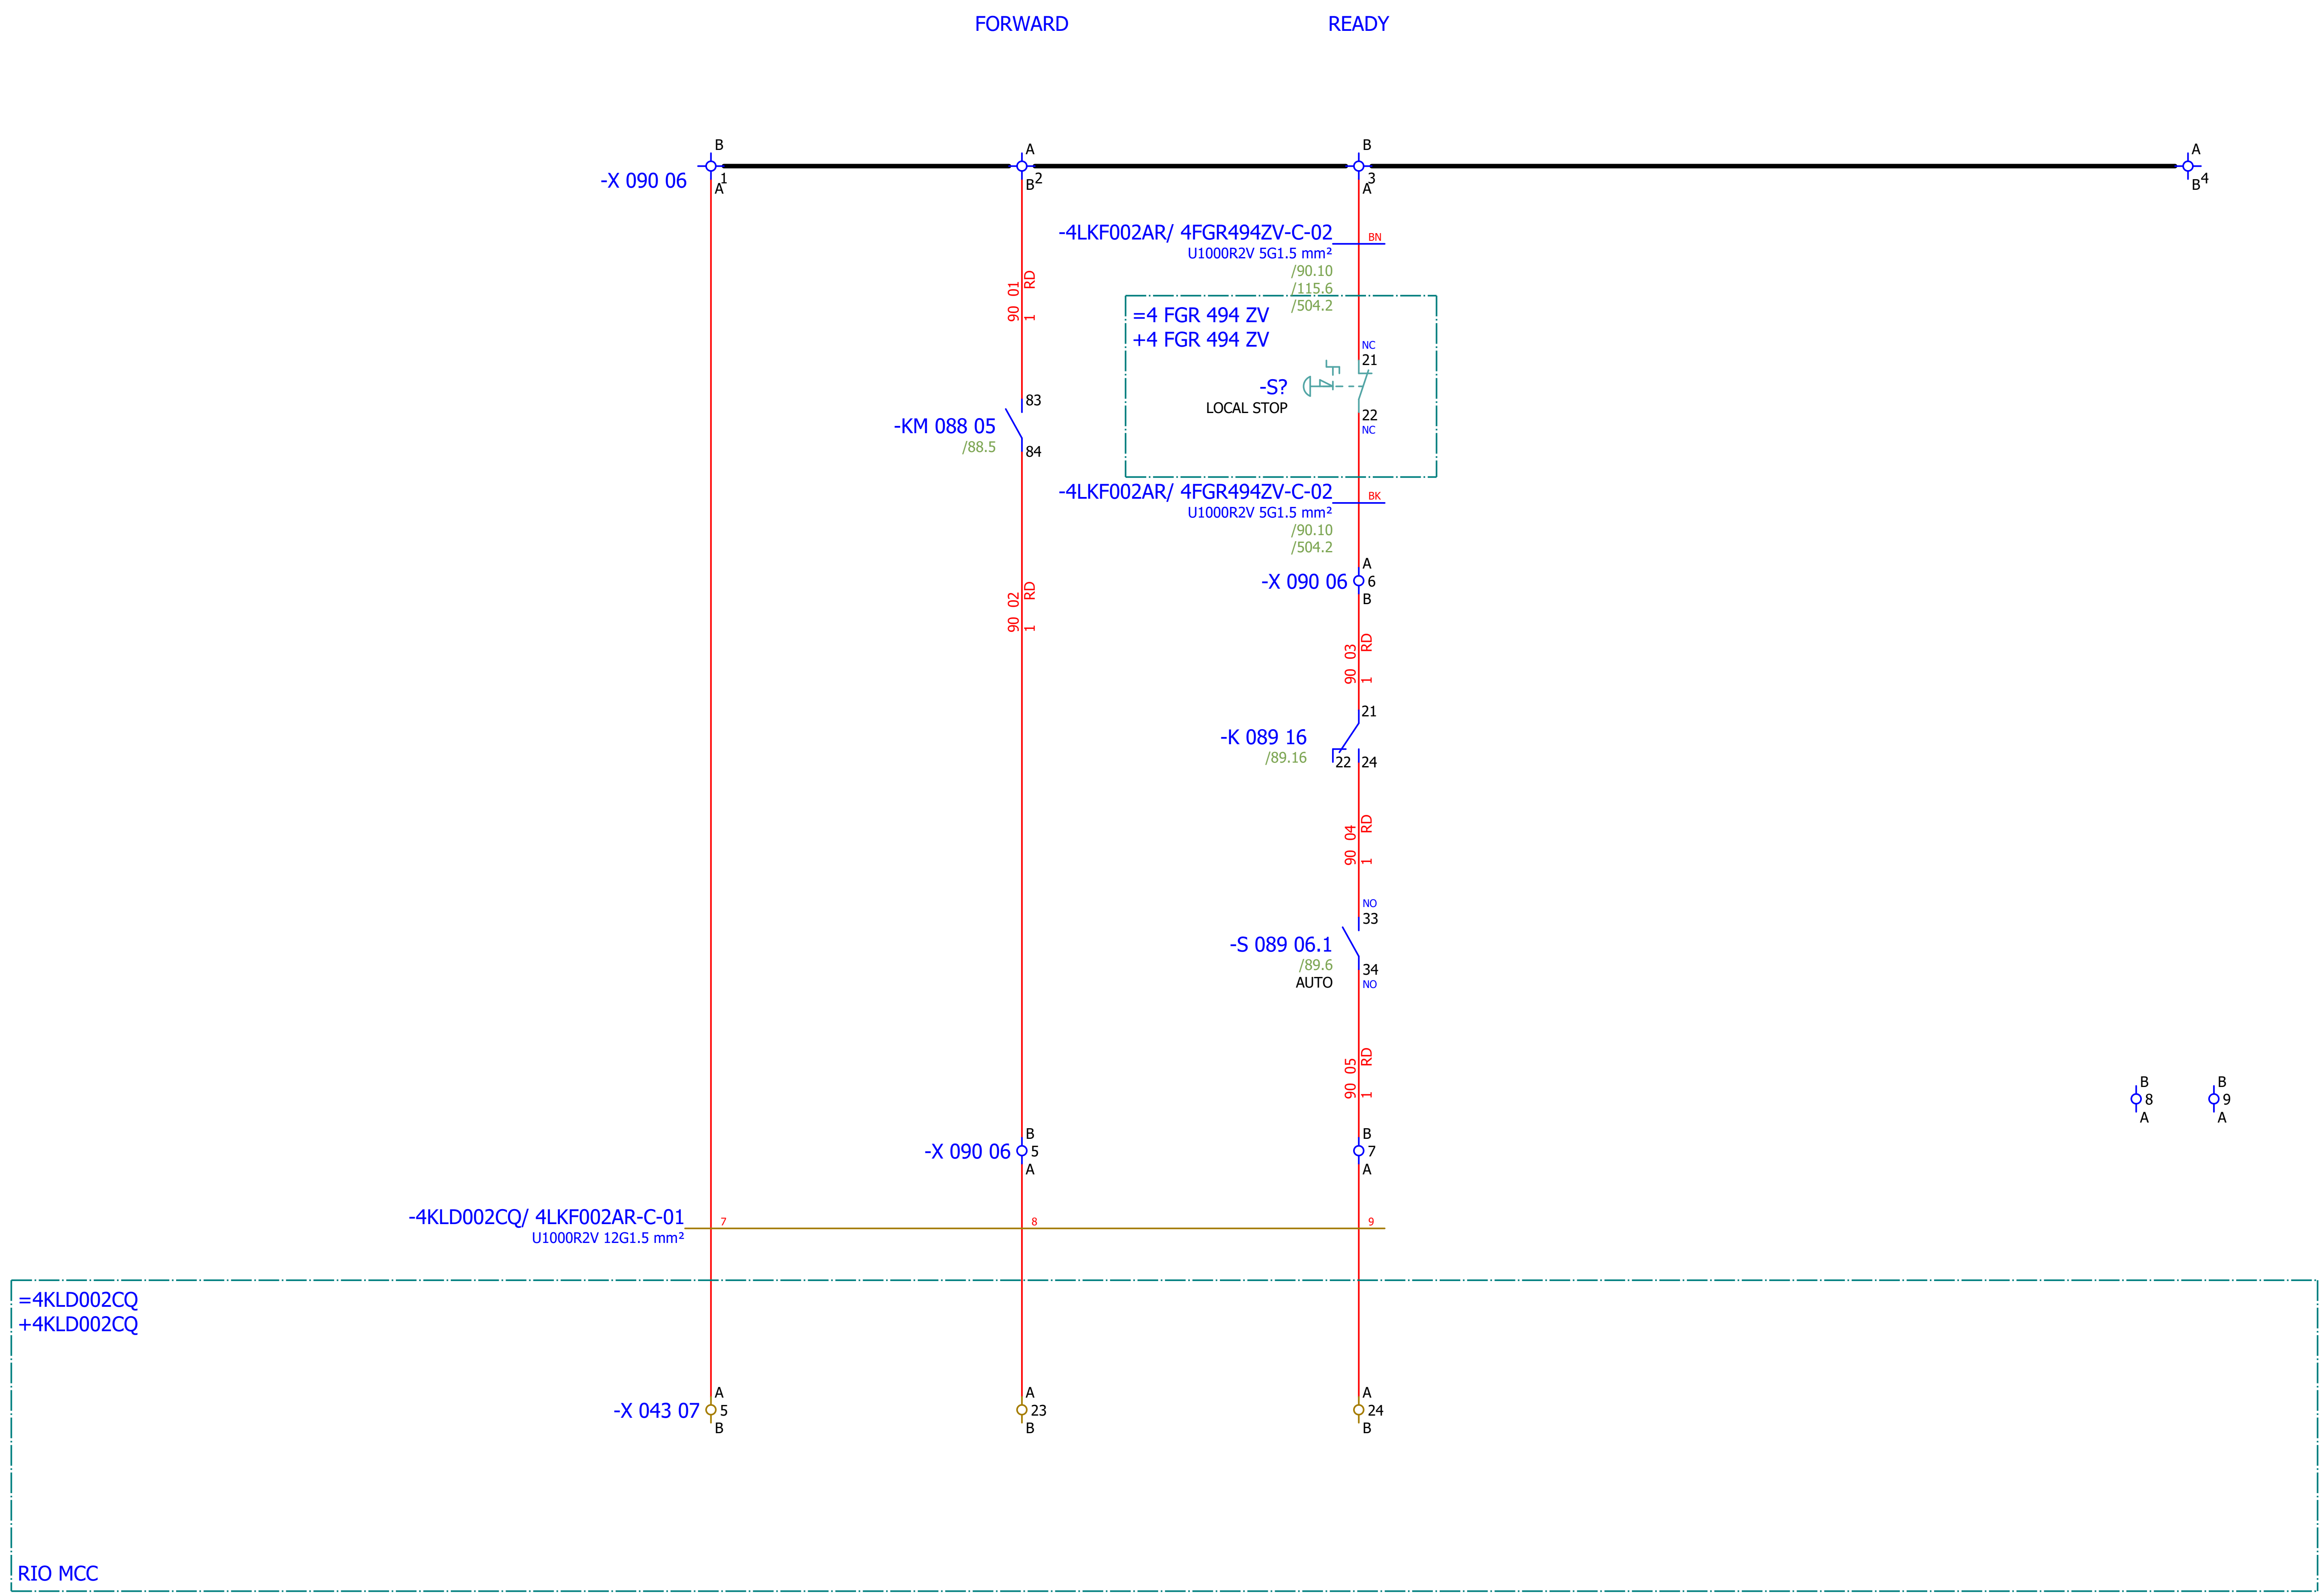

Date: 17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn: Luka Božičević							#D
Approved: Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING FAN 1 - SIGNALISATION	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 90
Format: A3						+4LKF002AR	Next: 91

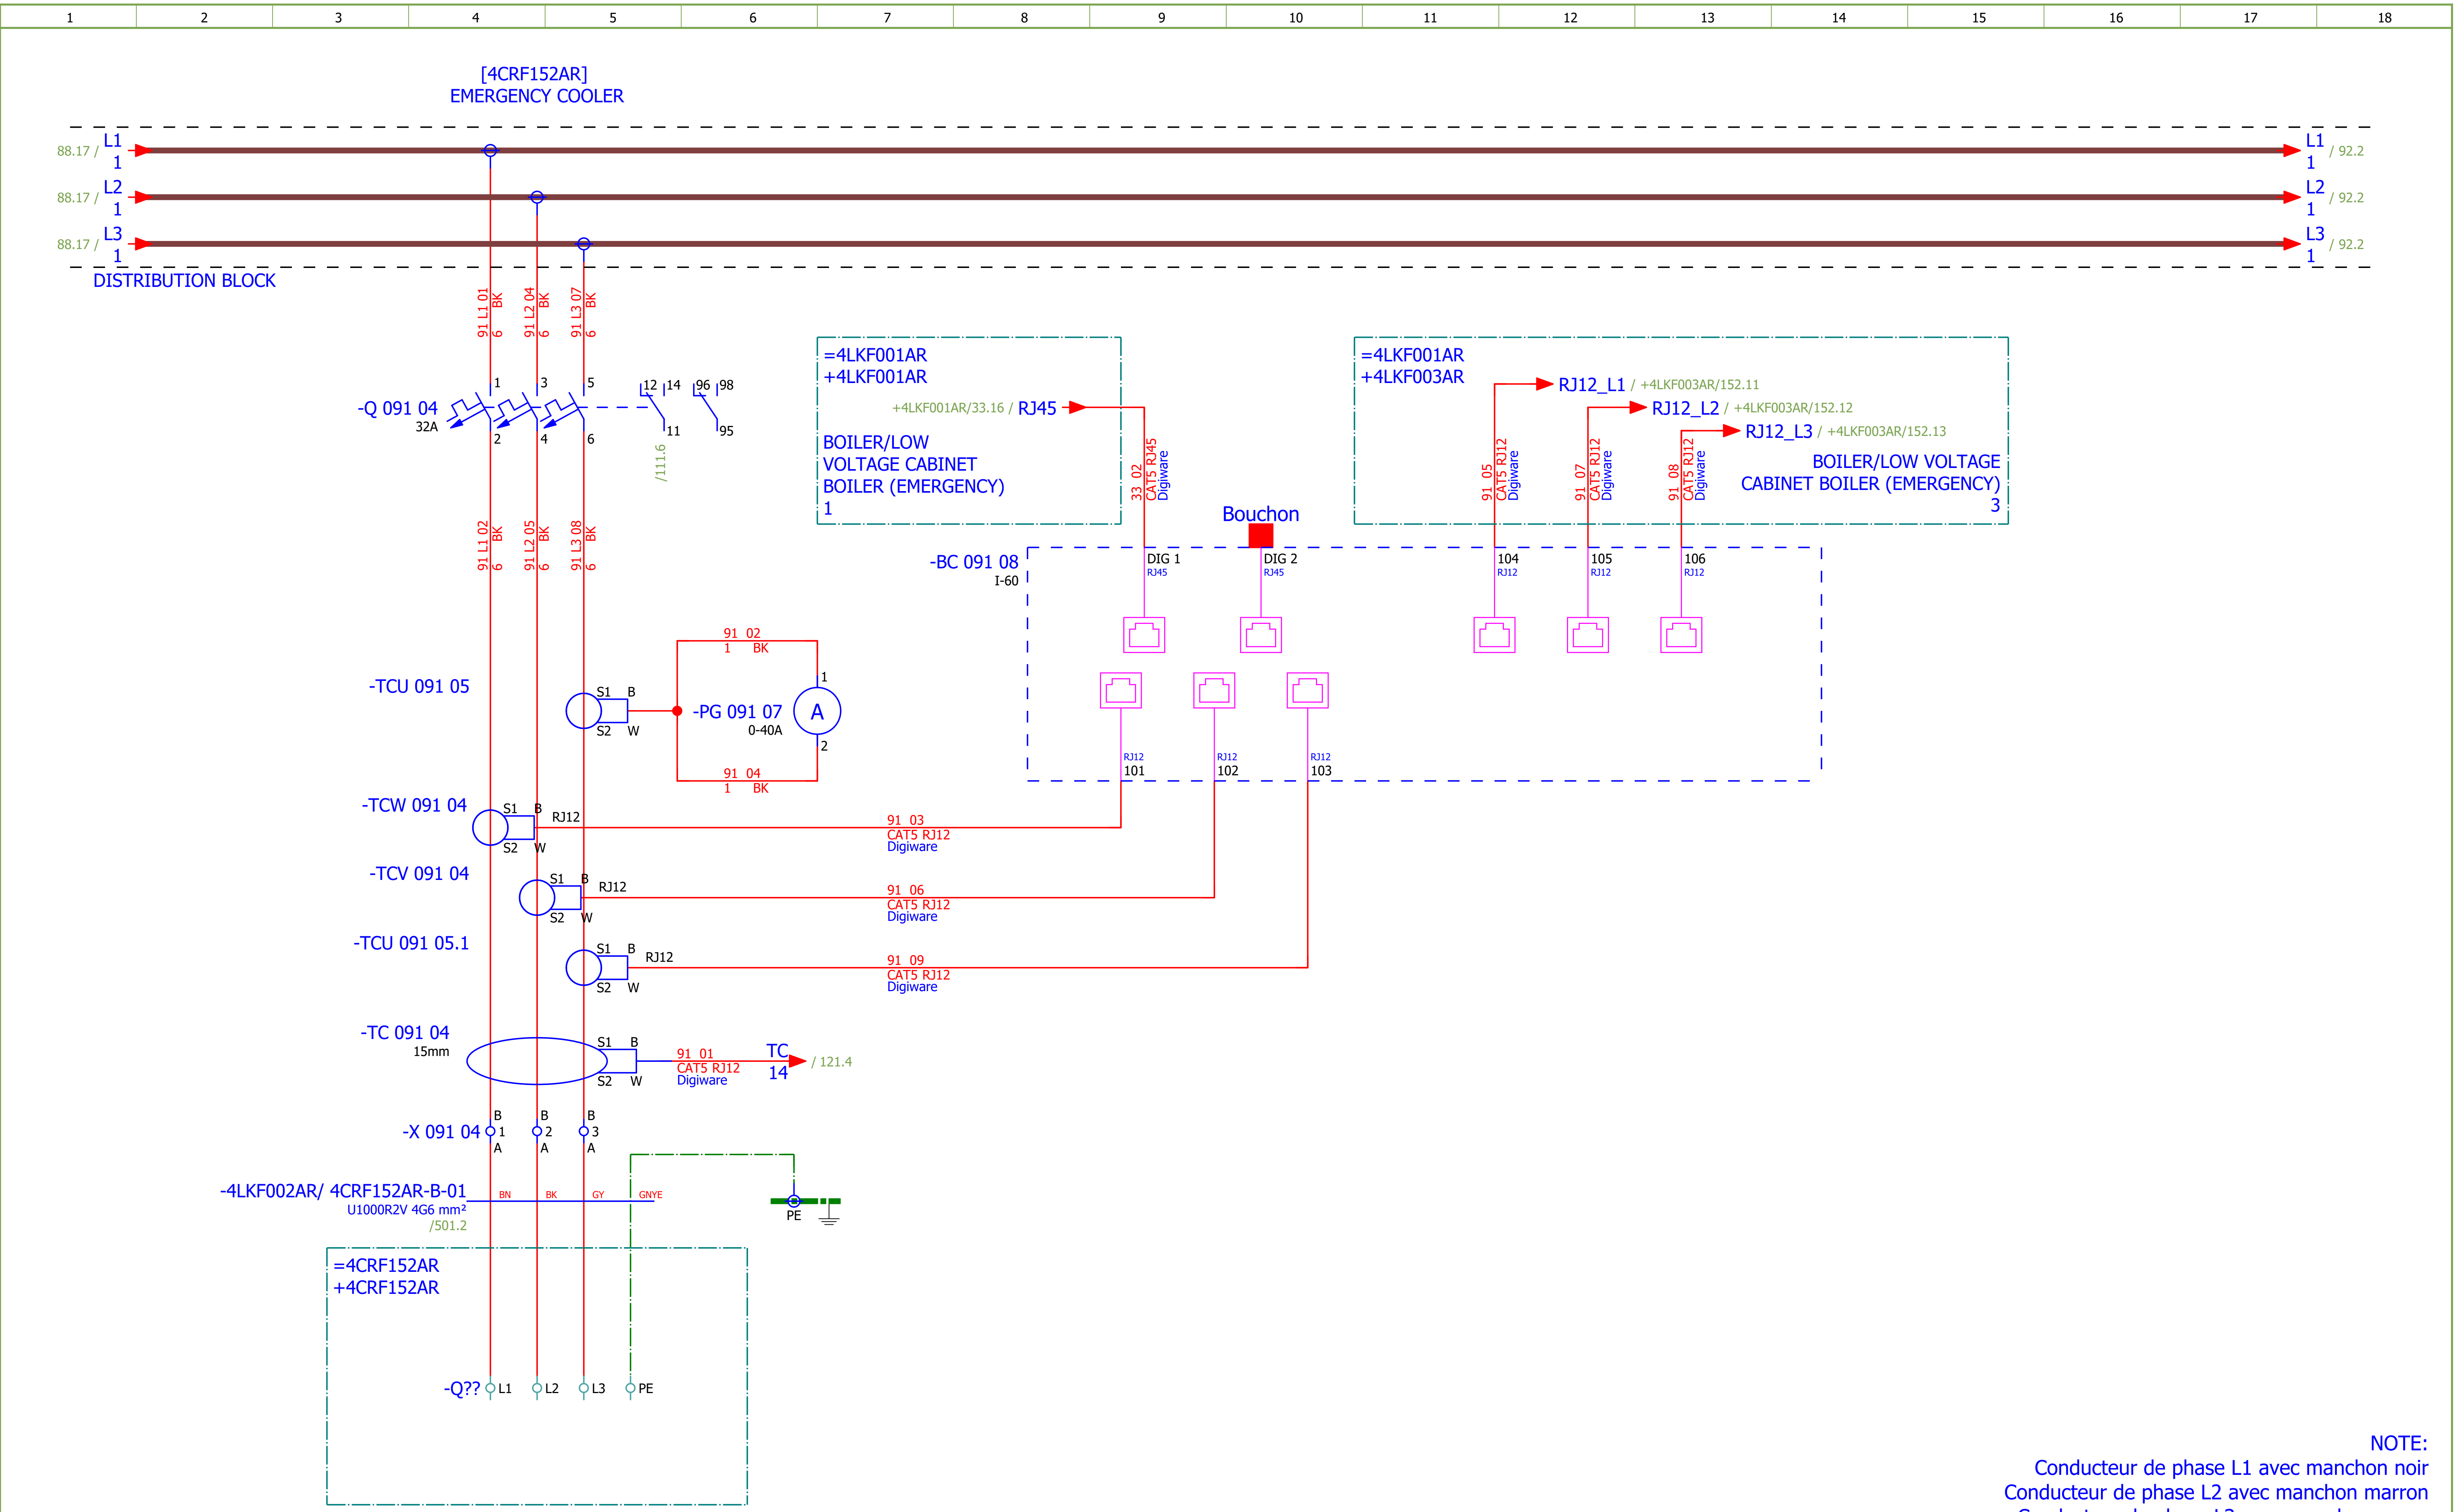

NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: EMERGENCY COOLER	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 91
Format:	A3								+4LKF002AR	Next: 92

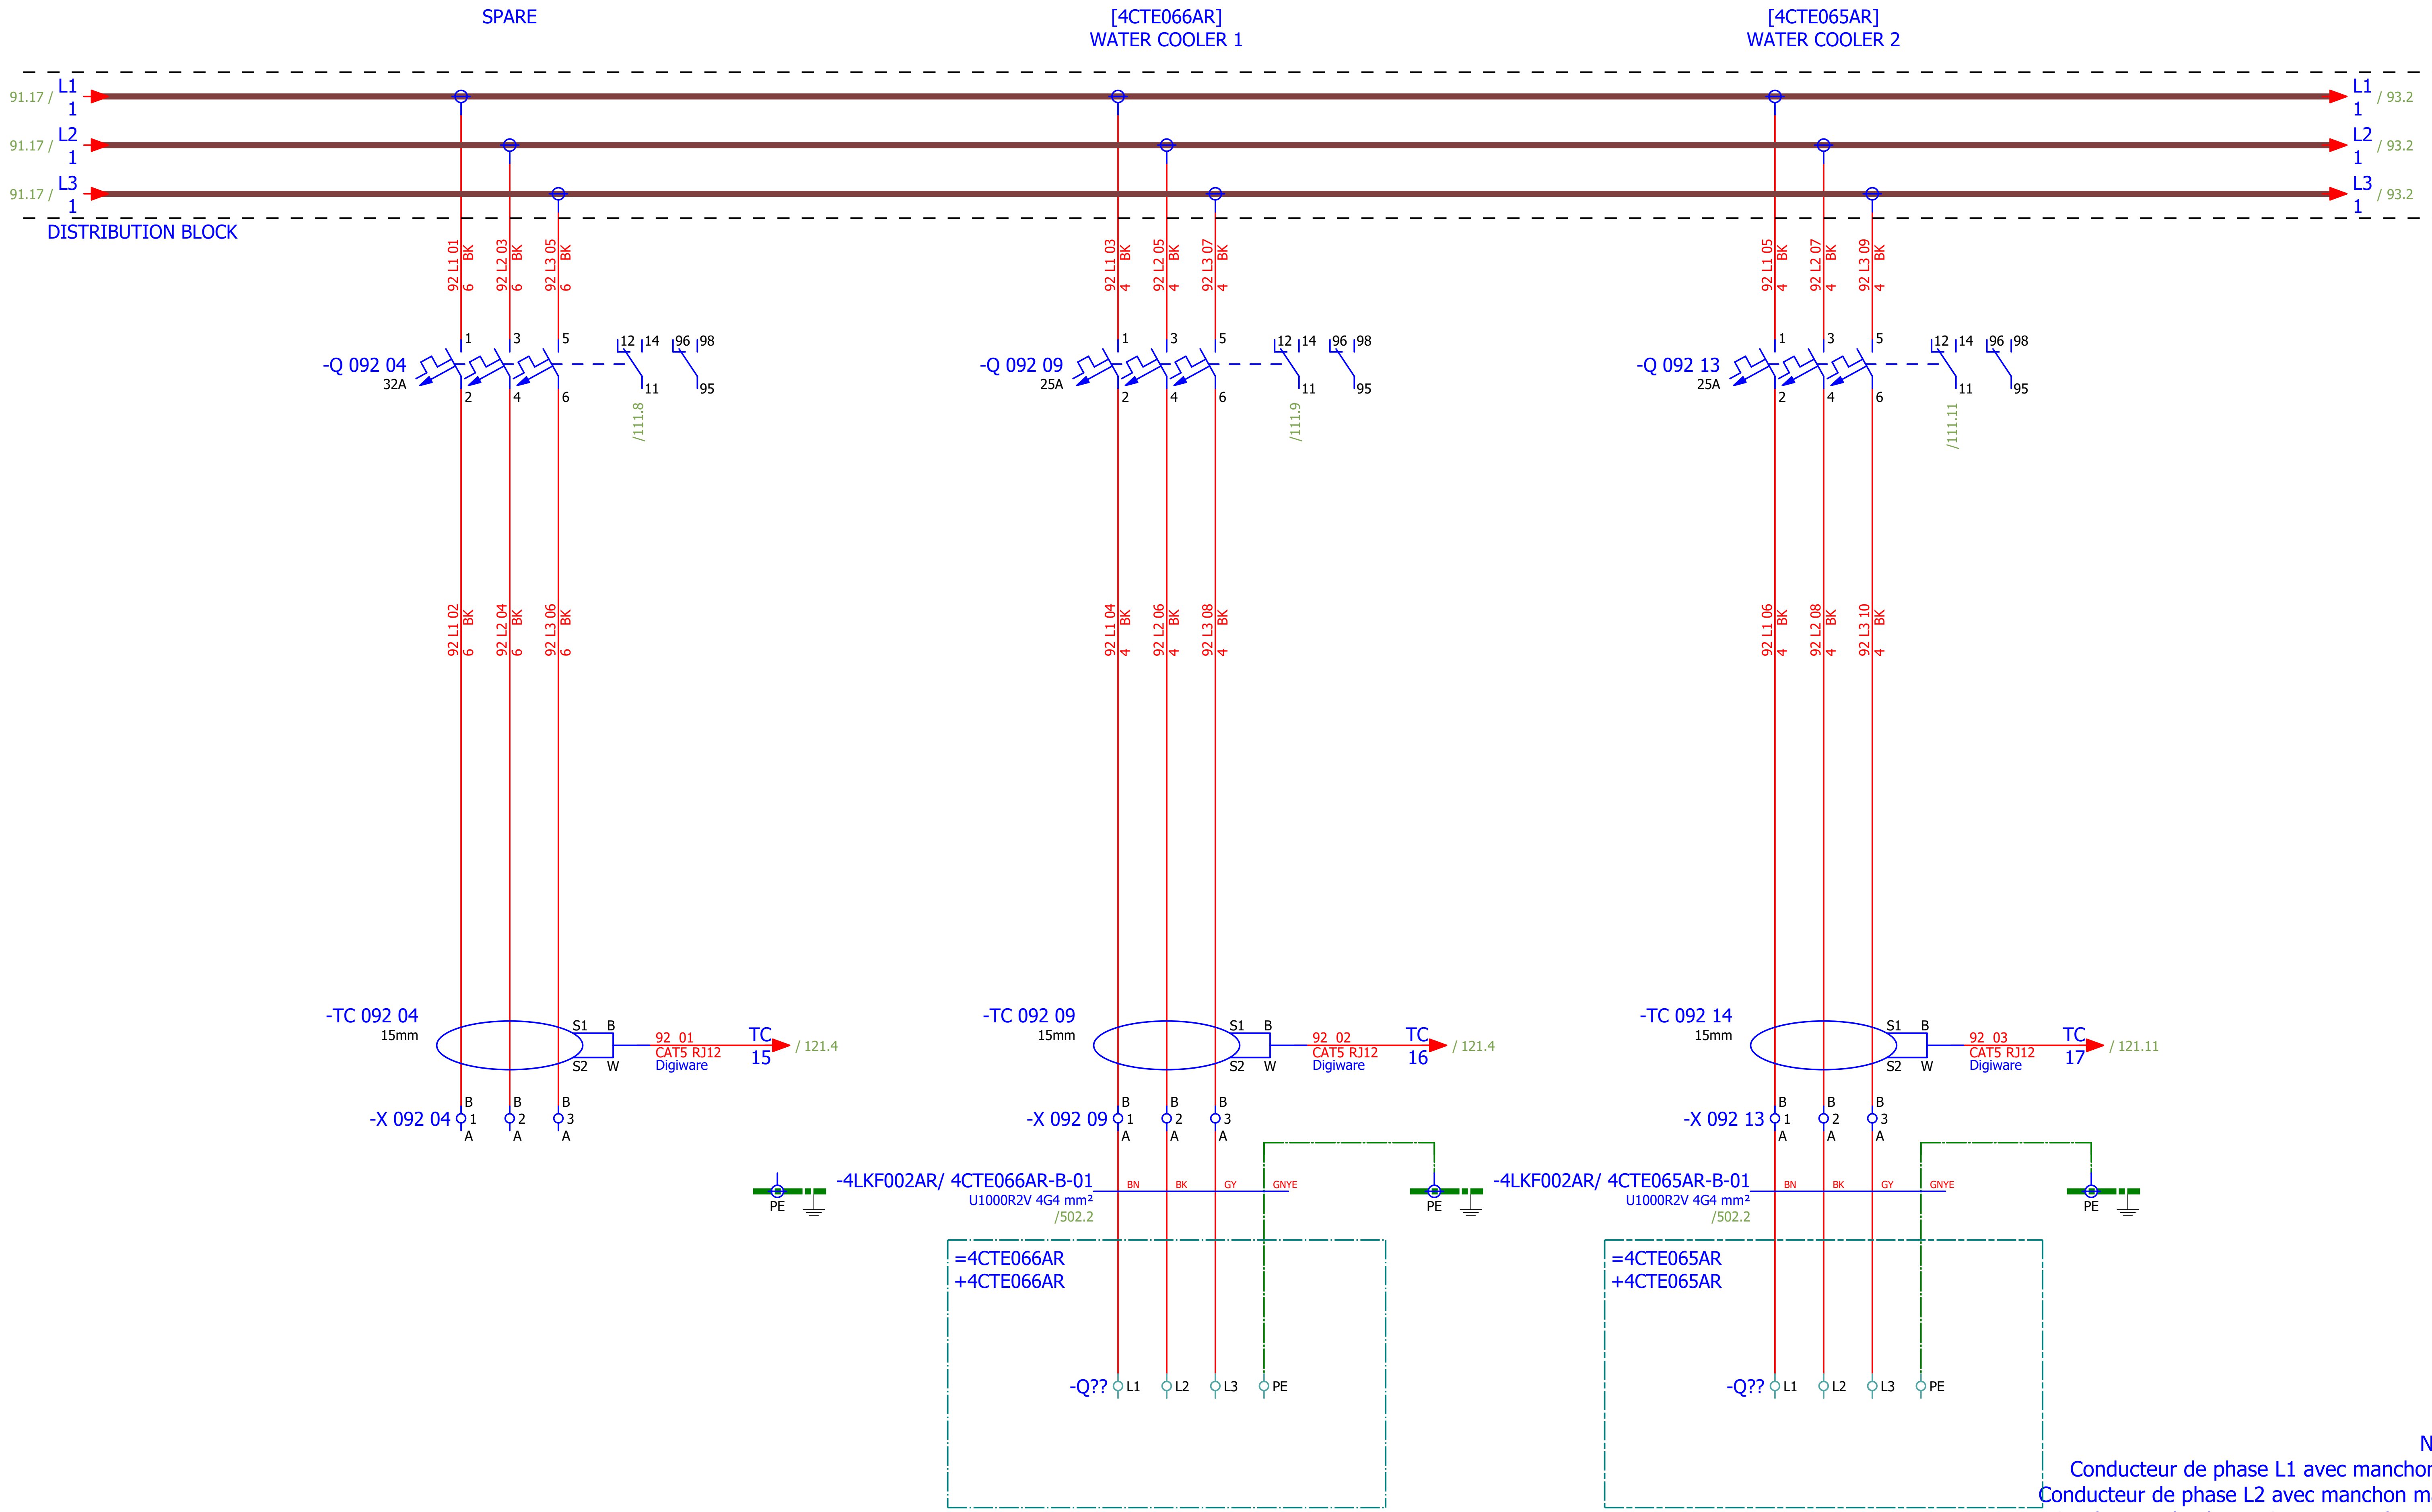

NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: EXPANSION TANK SYSTEM, WATER COOLER 1 & WATER COOLER 2	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 92
Format:	A3								+4LKF002AR	Next: 93

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

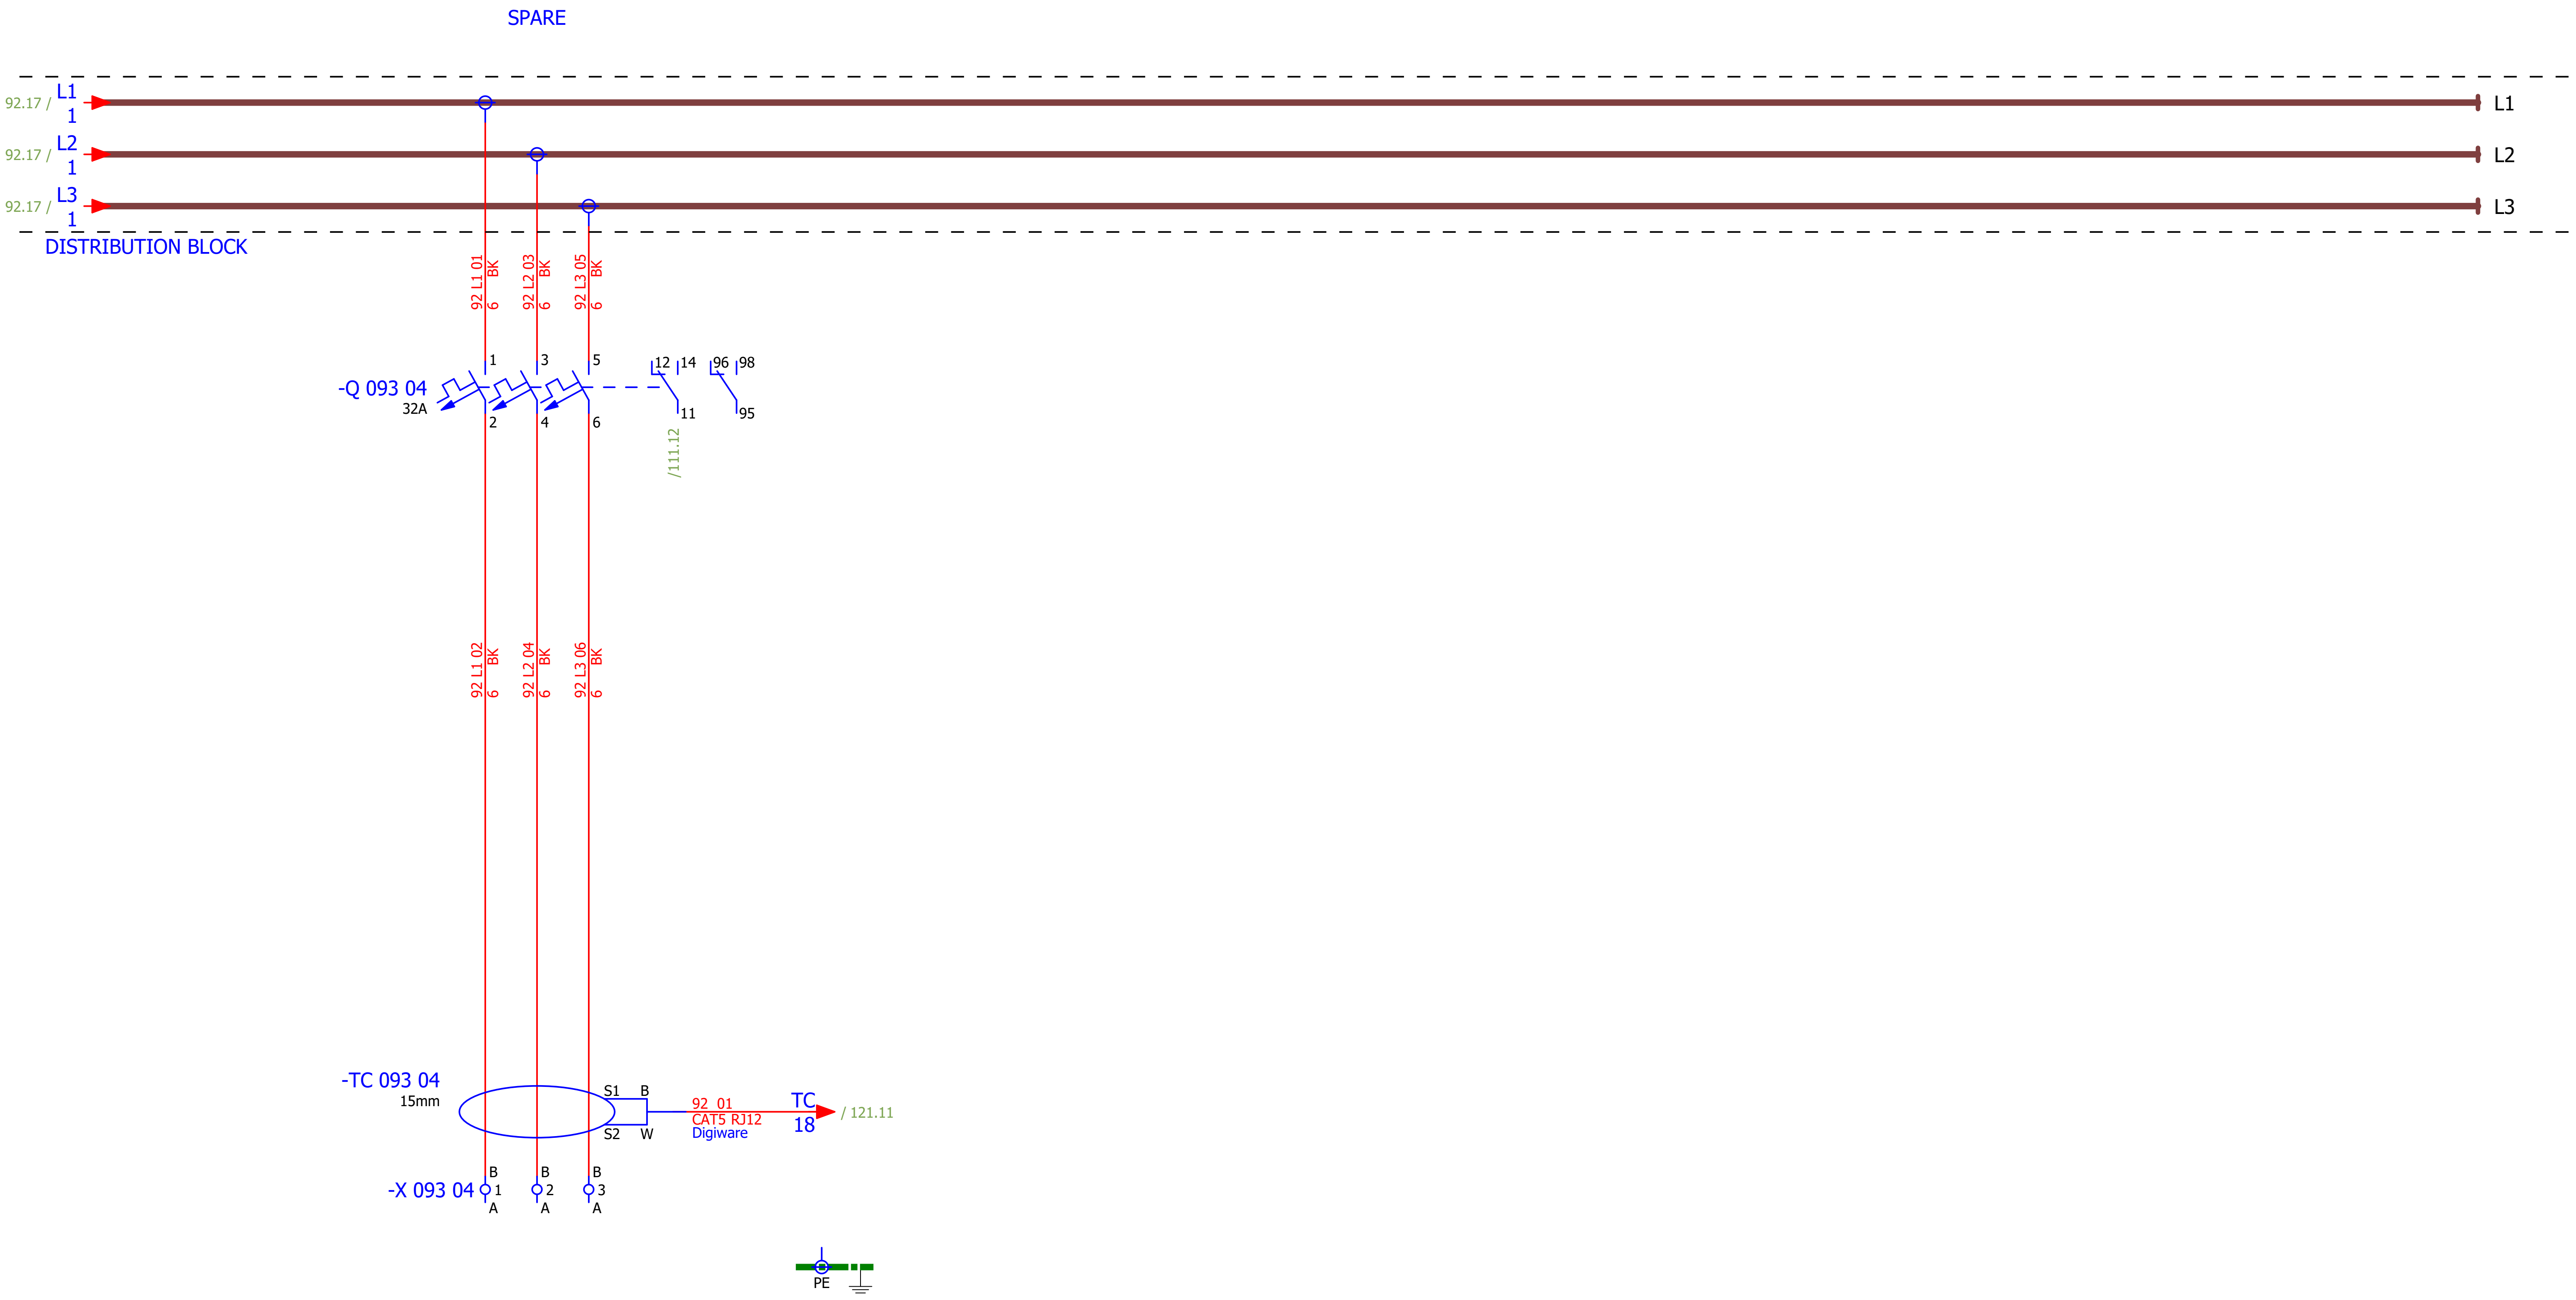

NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: GRATE EXPANSION TANK SYSTEM	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 93
Format:	A3								+4LKF002AR	Next: 94

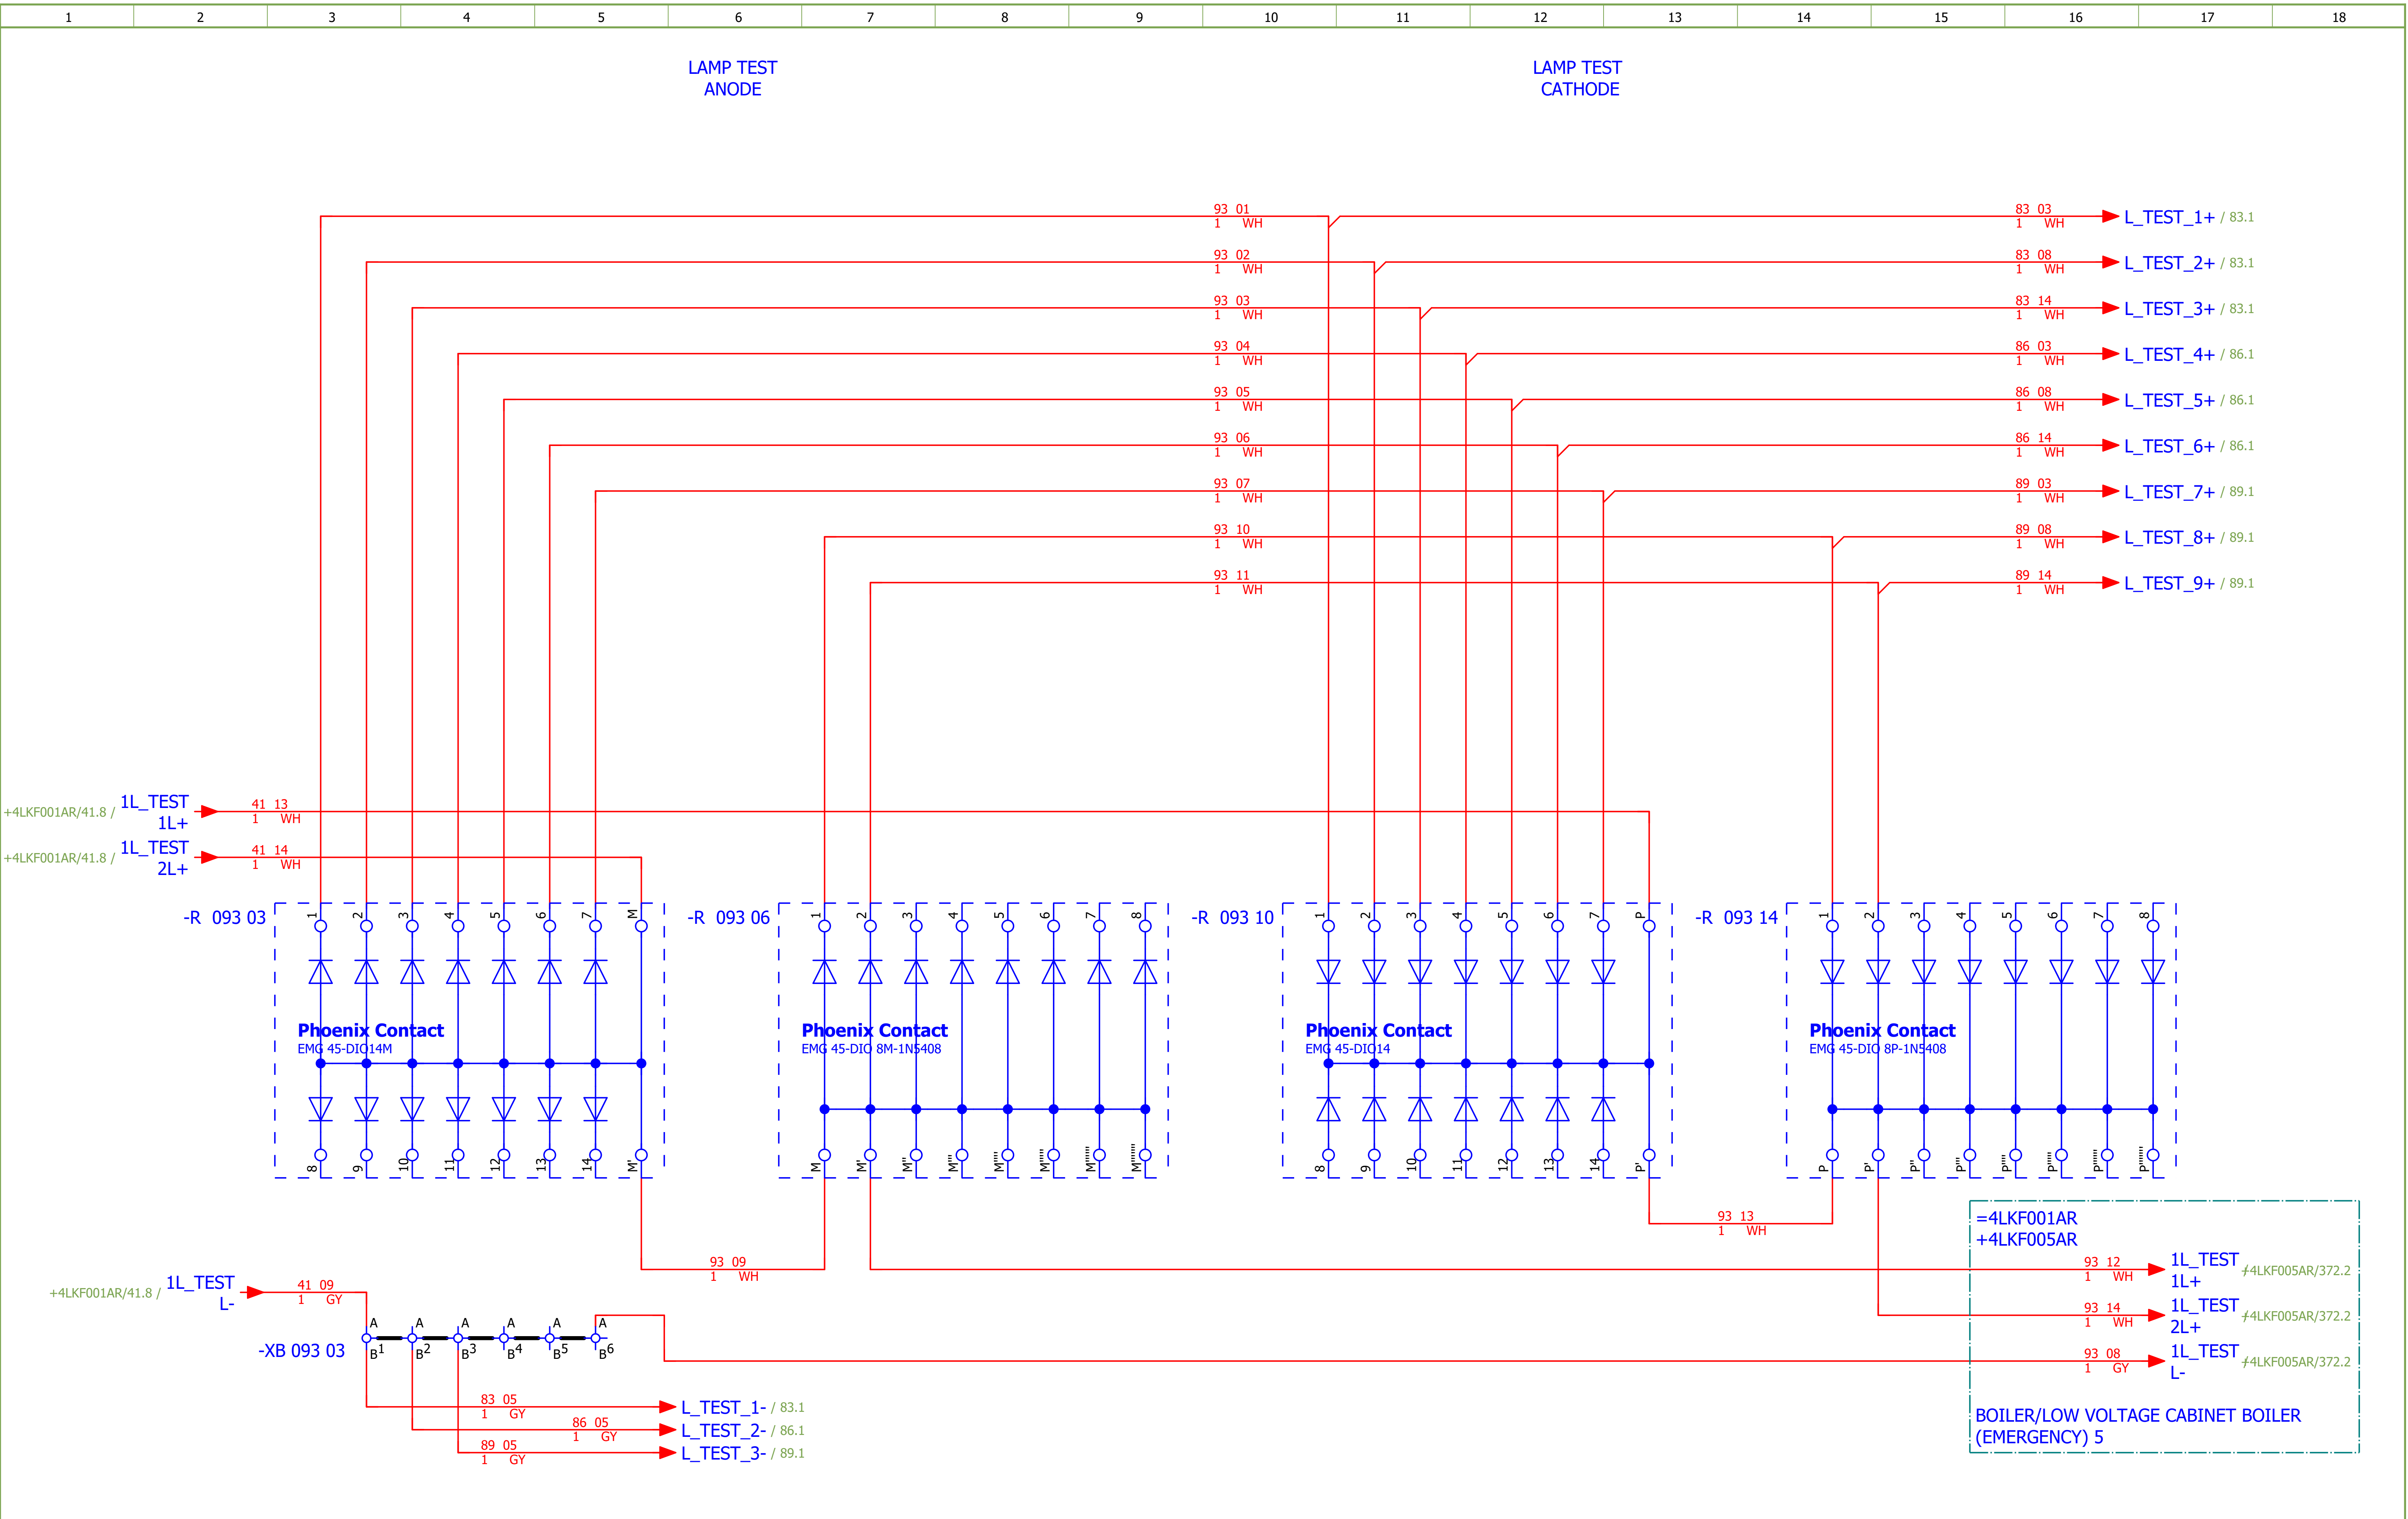

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: LAMP TEST	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 94
Format:	A3								+4LKF002AR	Next: 101

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

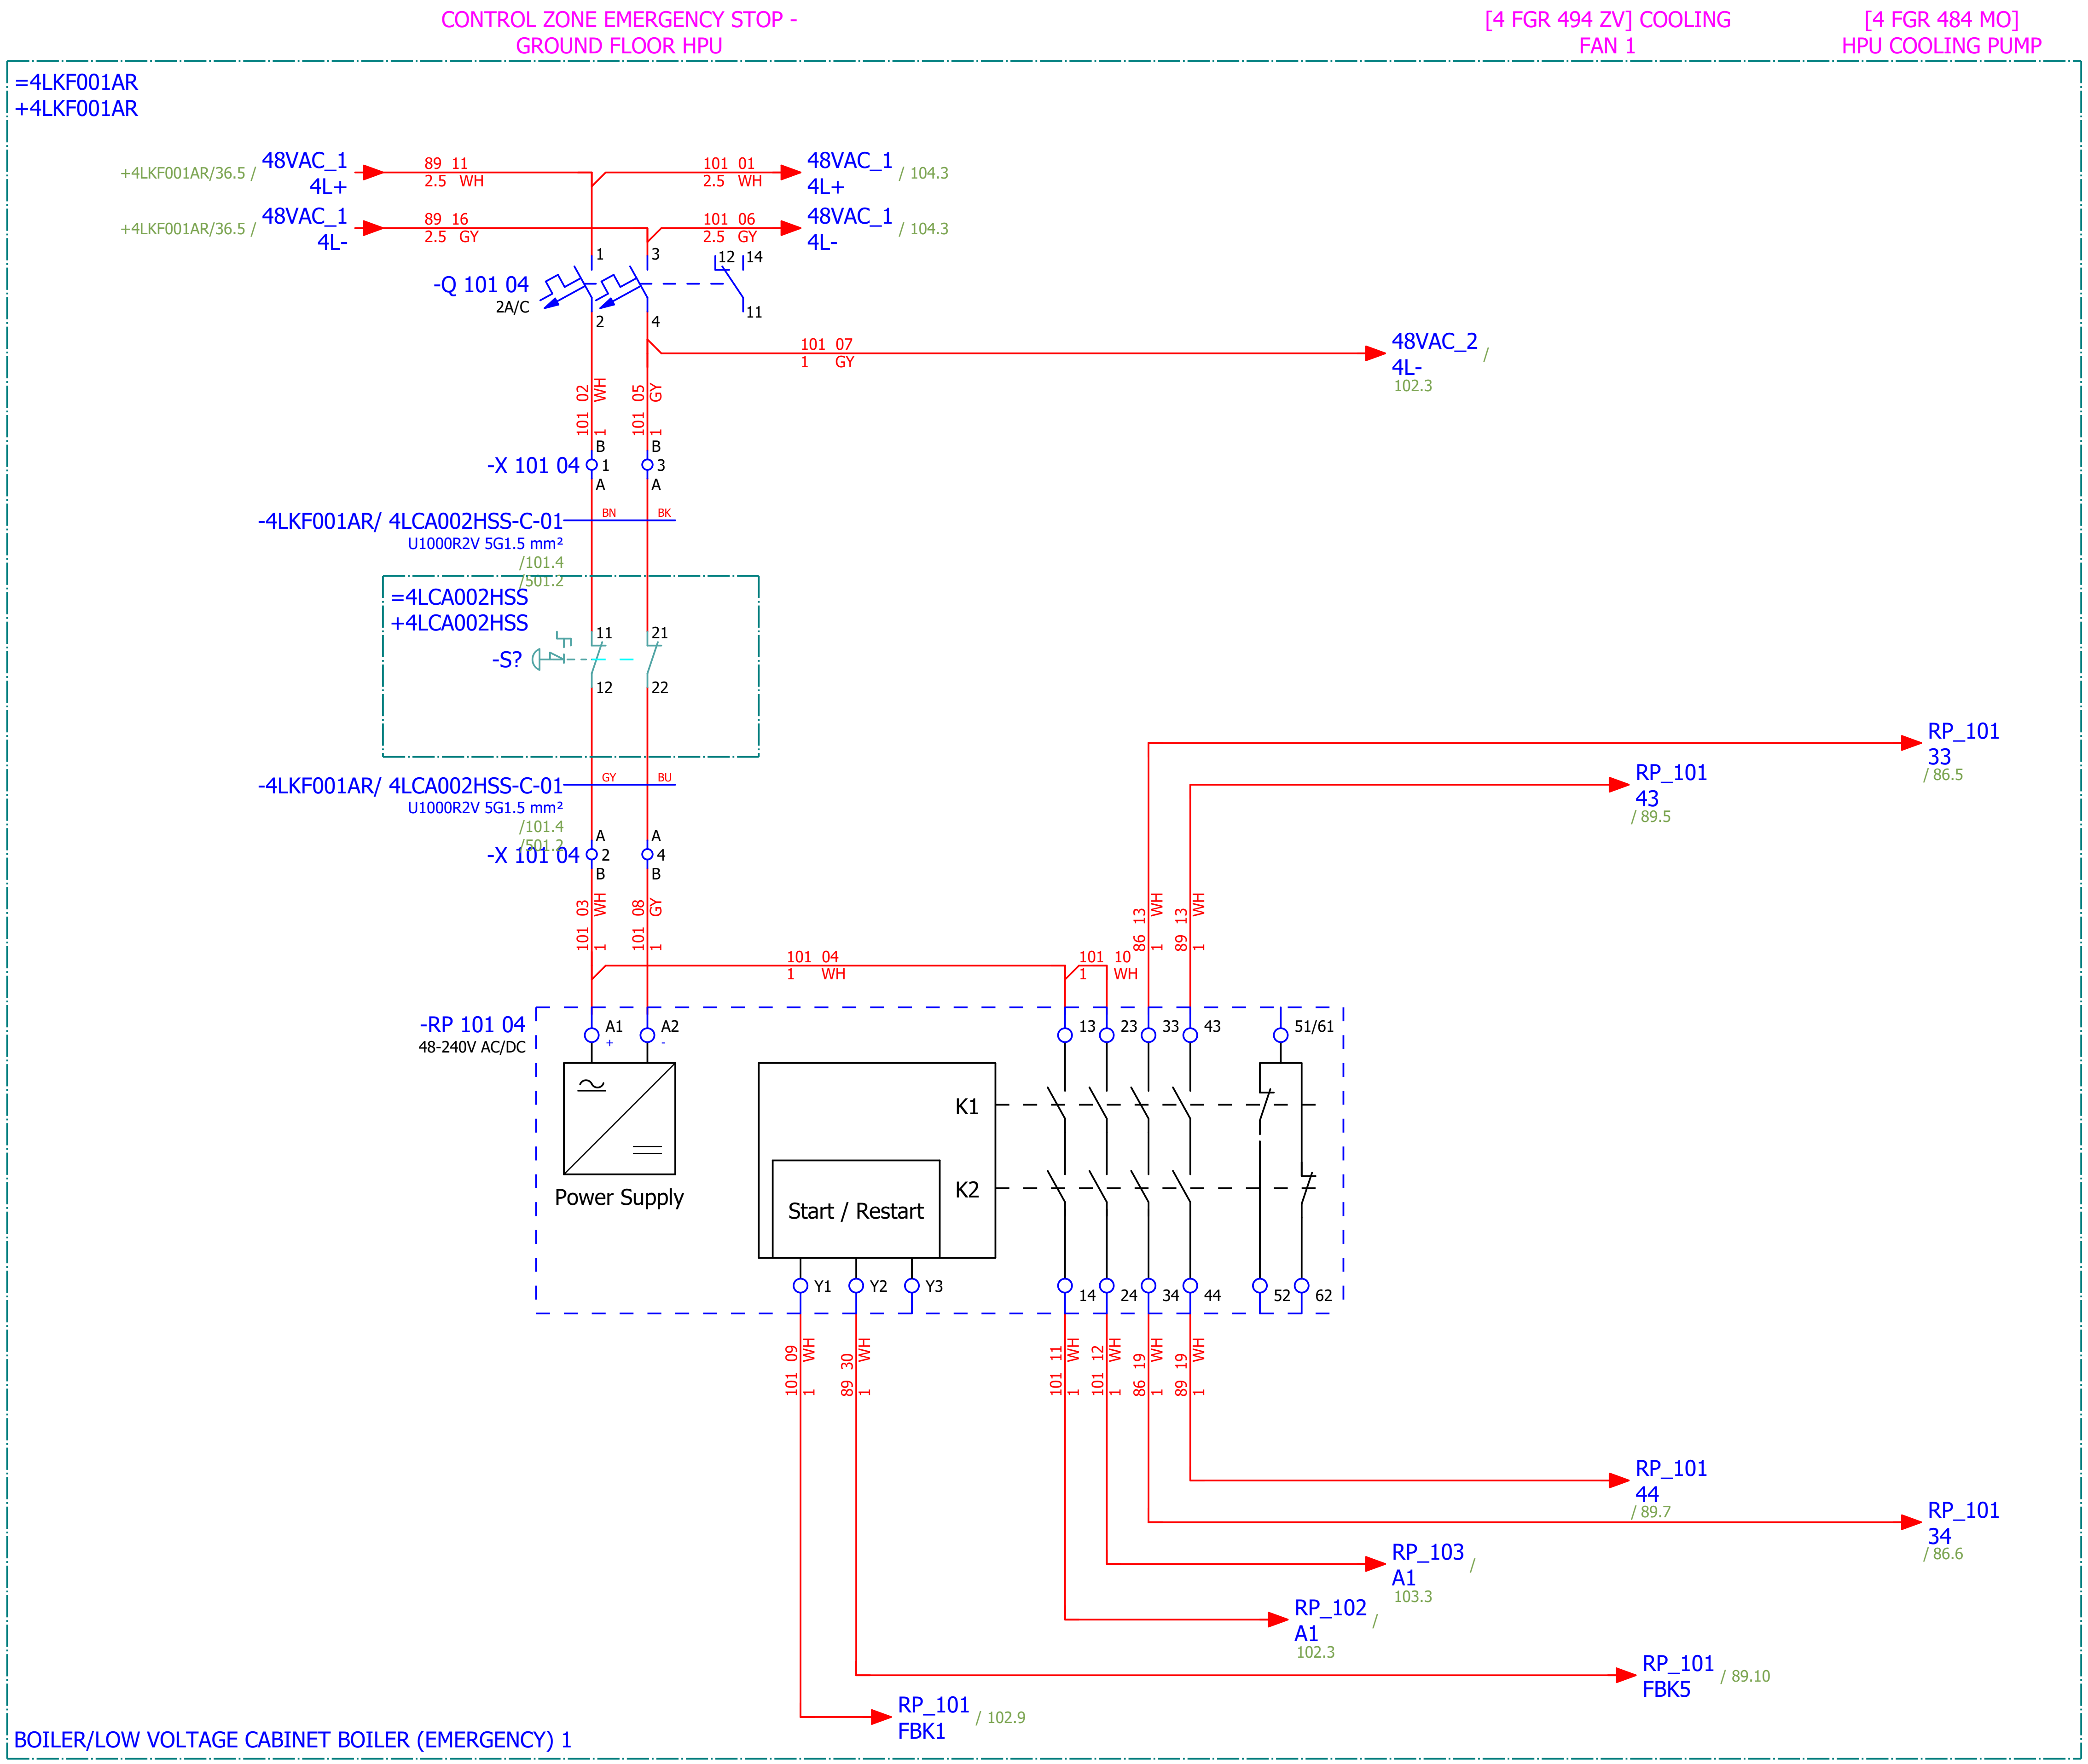

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#NA
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: EMERGENCY SHUTDOWN - GROUND FLOOR HPU	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 101
Format:	A3								+4LKF002AR	Next: 102

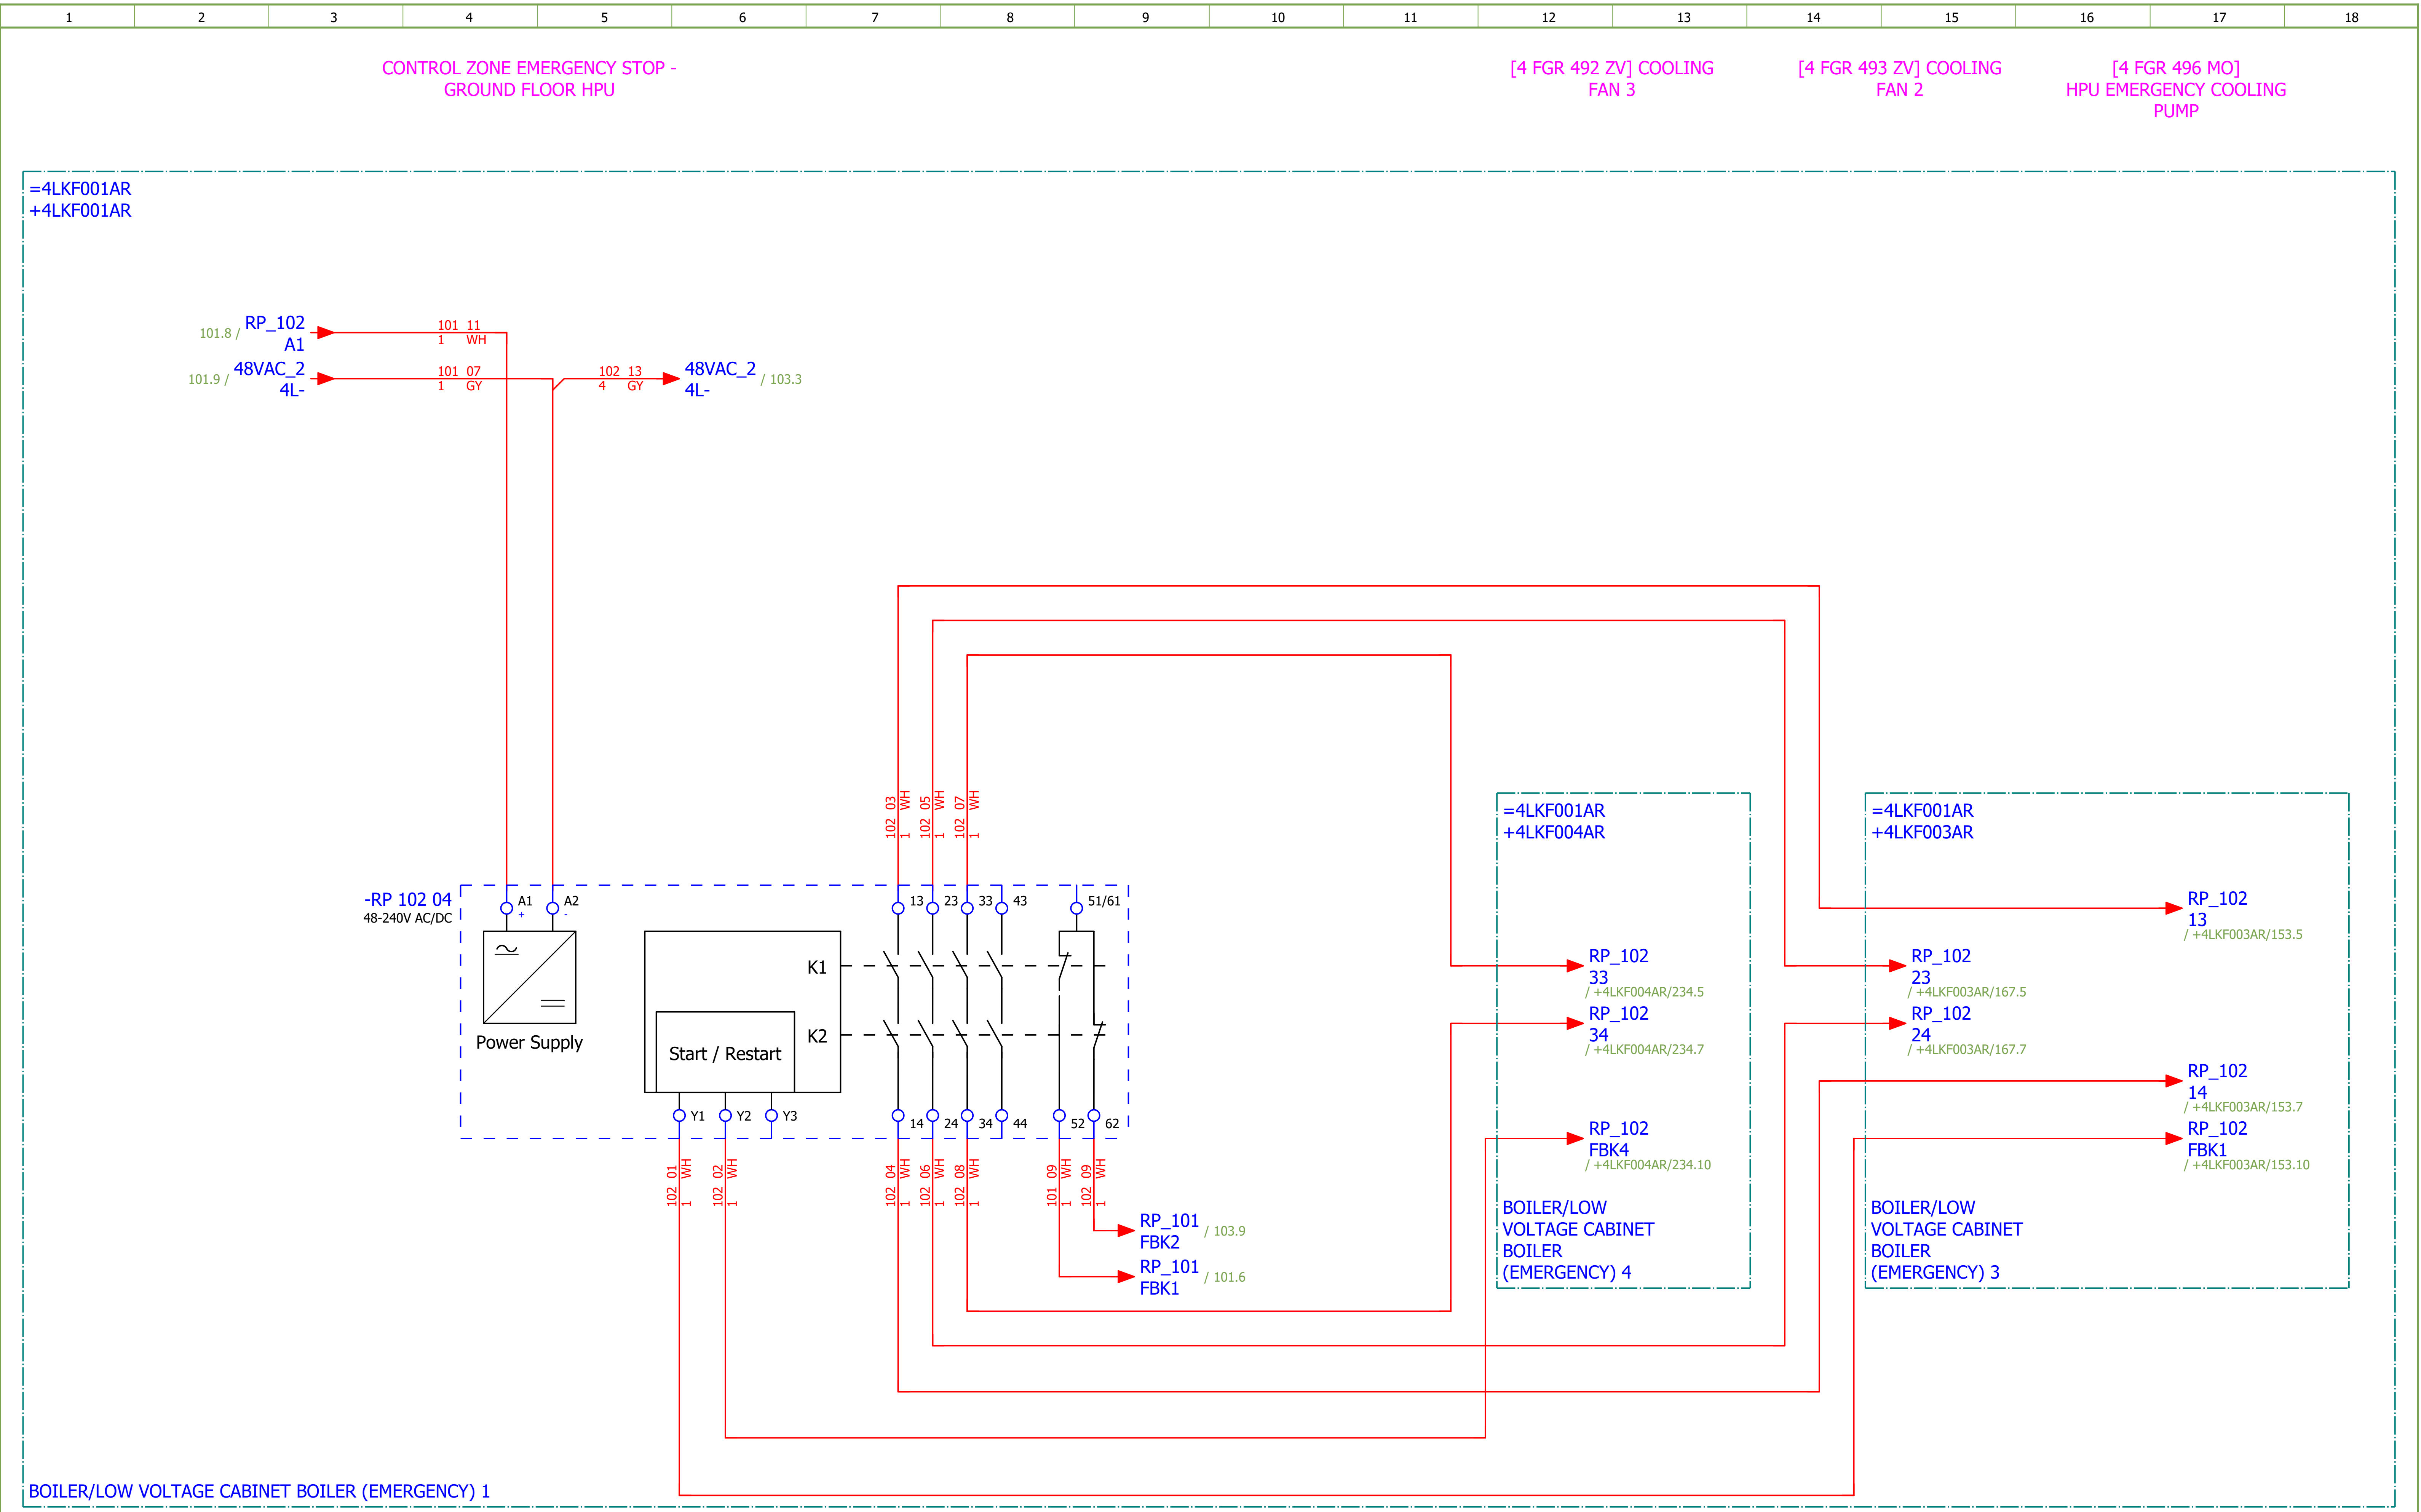

Date: 17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2	Project: BRC-4 · Unit & Issuer: ATEP0 · Number: 1870 · Revision: F · #NA
Drawn: Luka Božičević				
Approved: Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: EMERGENCY SHUTDOWN - GROUND FLOOR HPU	Drawing designation: BRC-4-ATEP0-1870-F · =4LKF001AR · Sheet: 102
Format: A3				+4LKF002AR · Next: 103

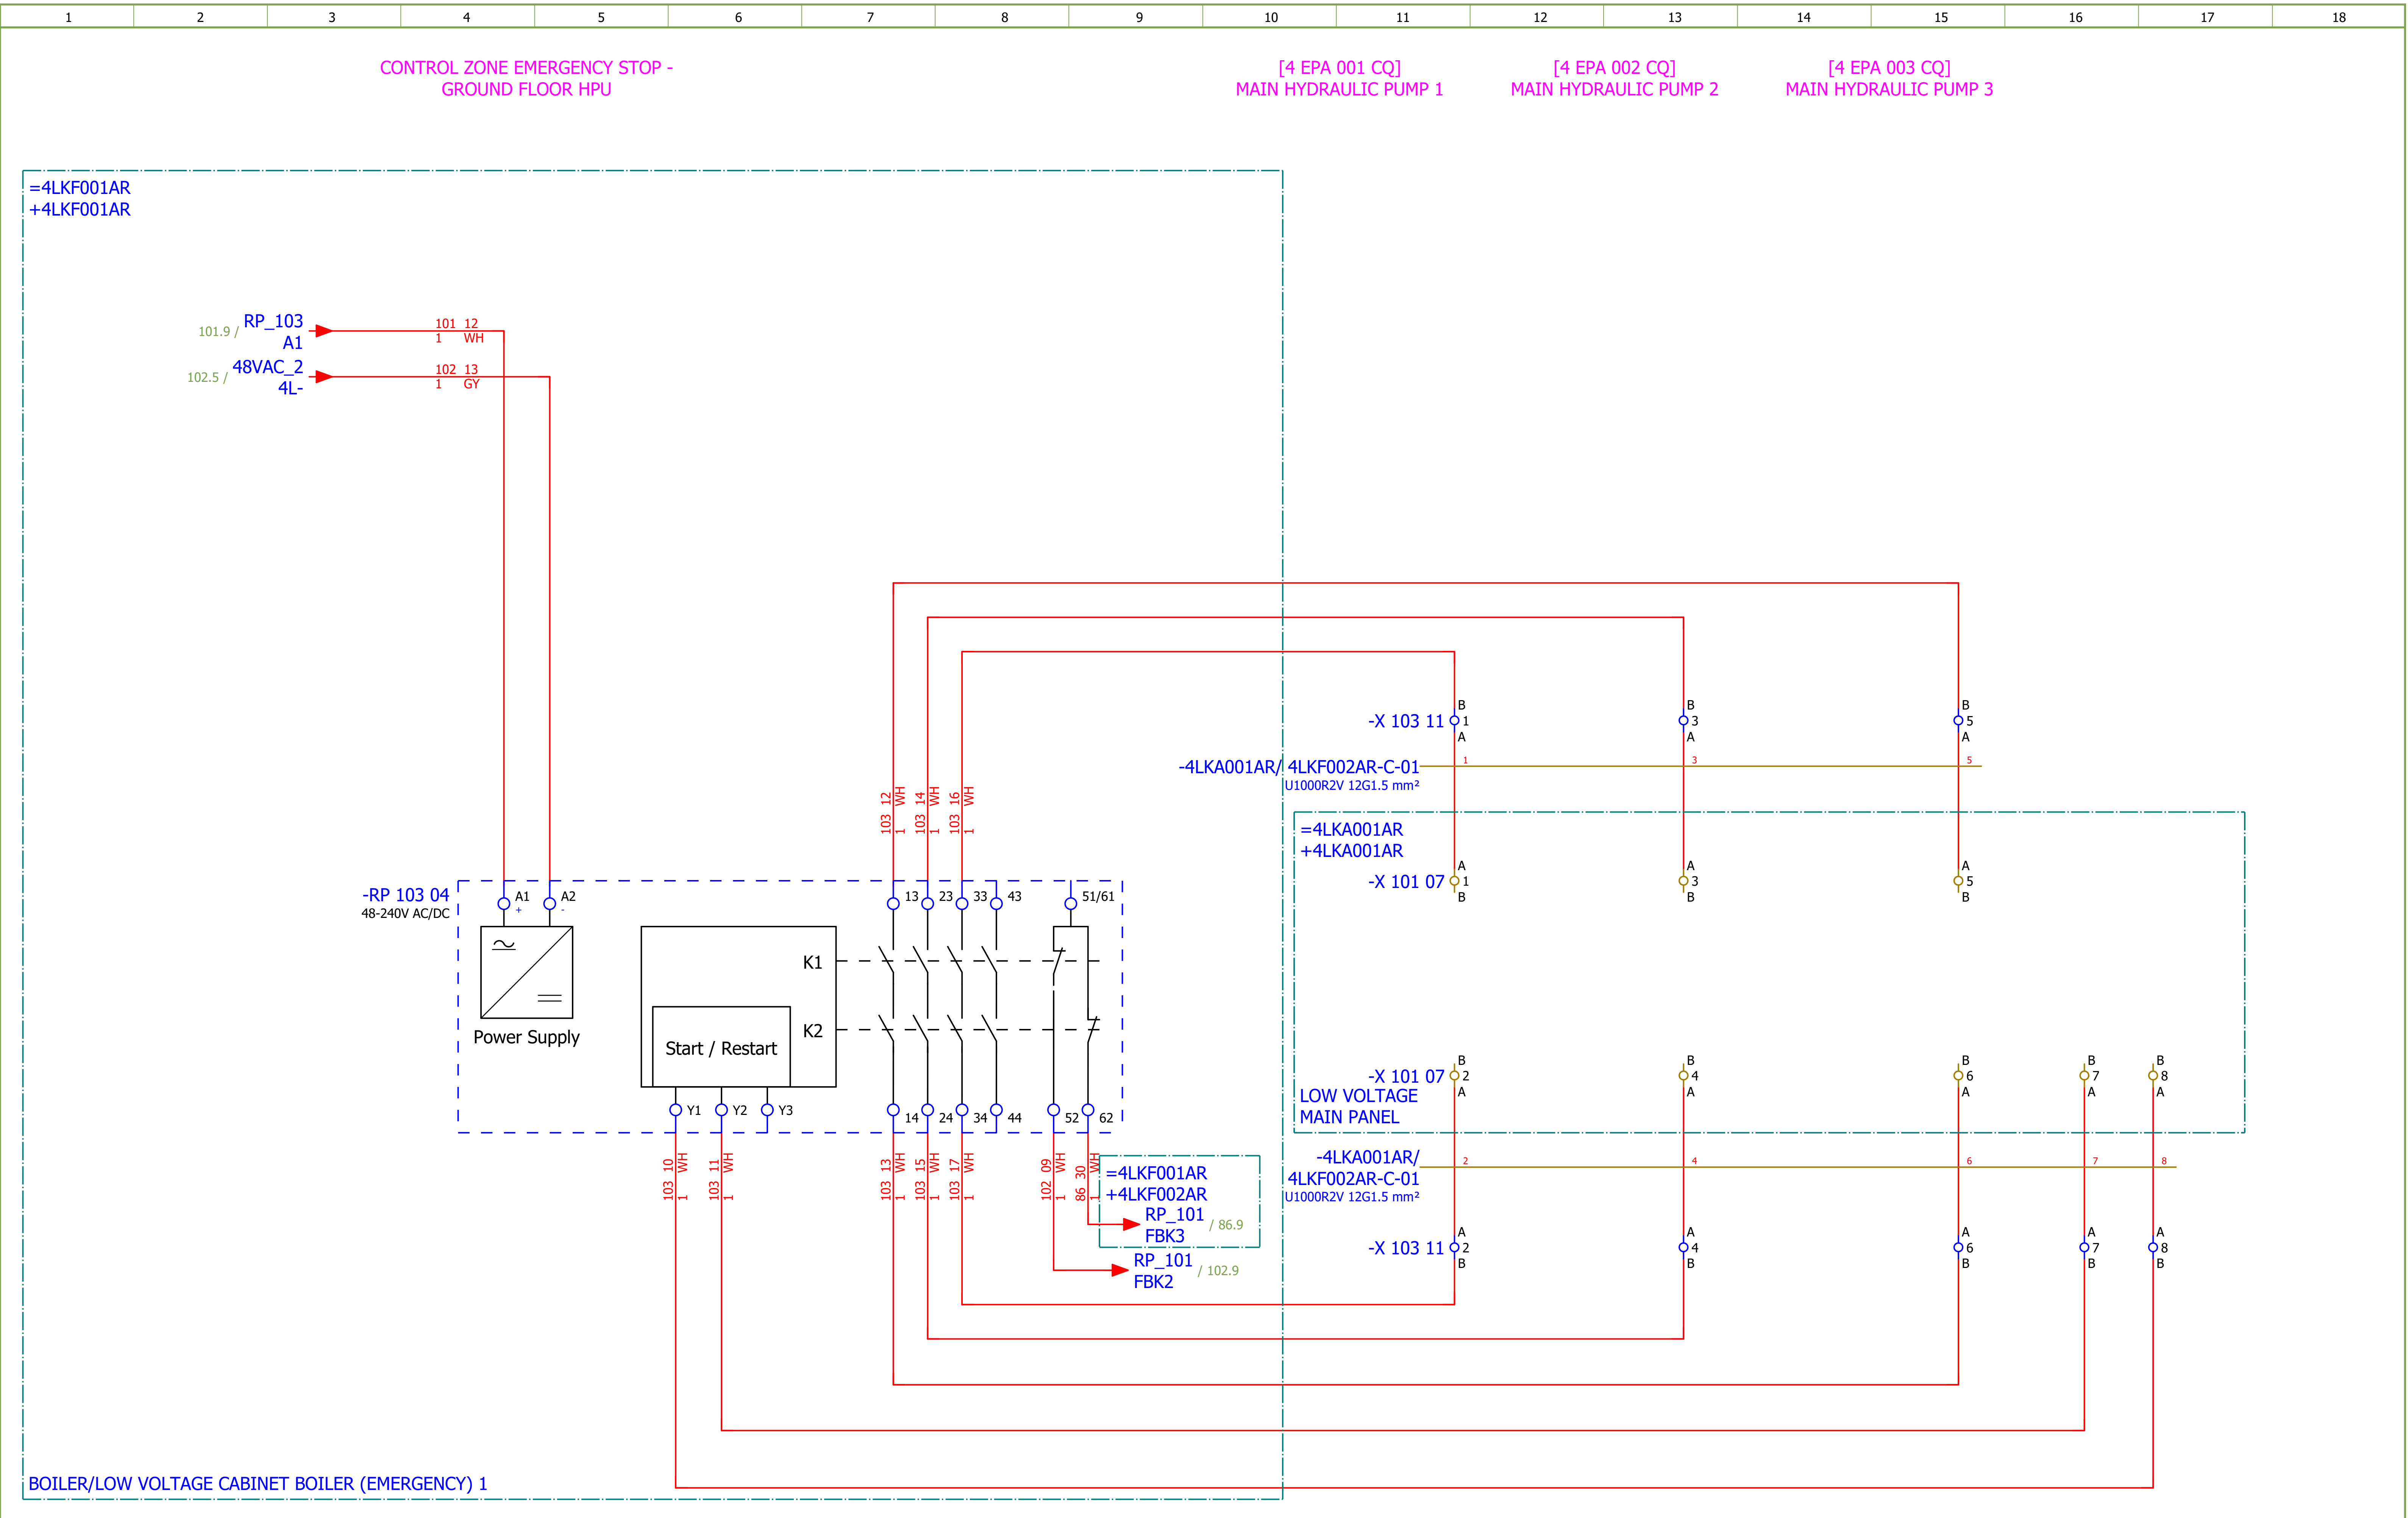

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#NA
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: EMERGENCY SHUTDOWN - GROUND FLOOR HPU	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 103
Format:	A3								+4LKF002AR	Next: 104

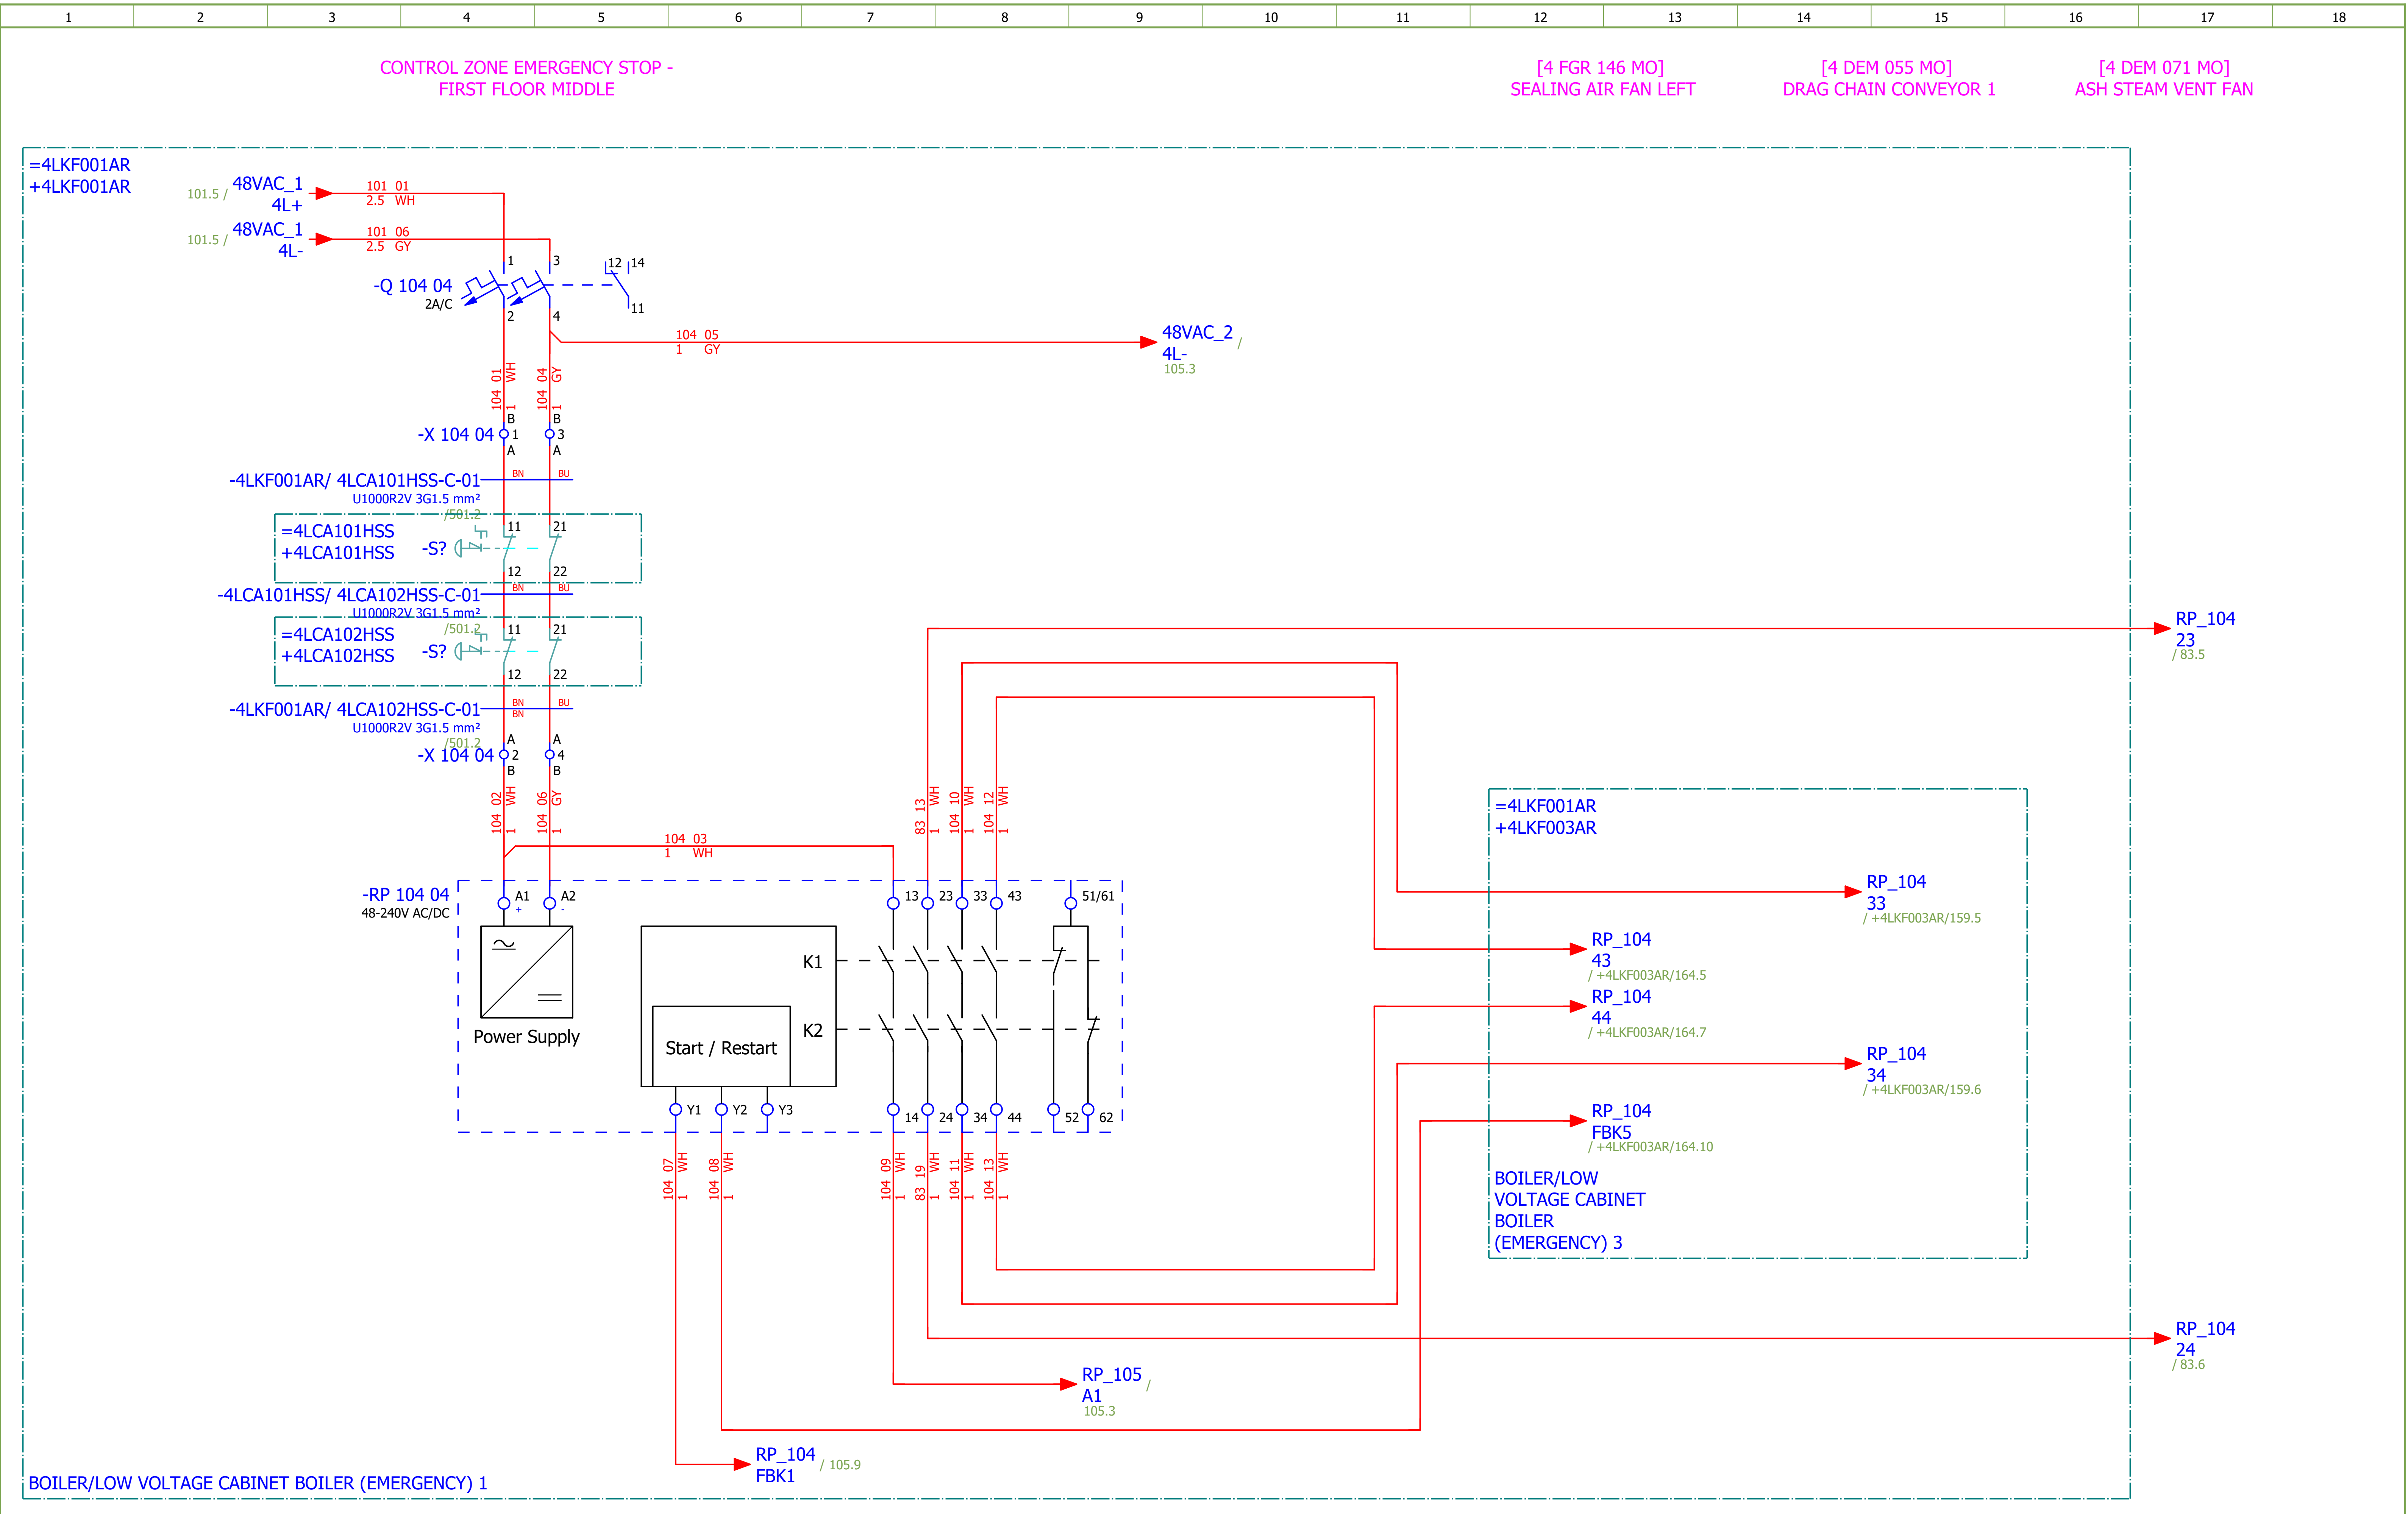

Date: 17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2	Project: BRC-4 / Unit & Issuer: ATEP0 / Number: 1870 / Revision: F / #NA
Drawn: Luka Božičević				
Approved: Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: EMERGENCY SHUTDOWN - FIRST FLOOR MIDDLE	Drawing designation: BRC-4-ATEP0-1870-F / =4LKF001AR / +4LKF002AR / Sheet: 104 / Next: 105
Format: A3				

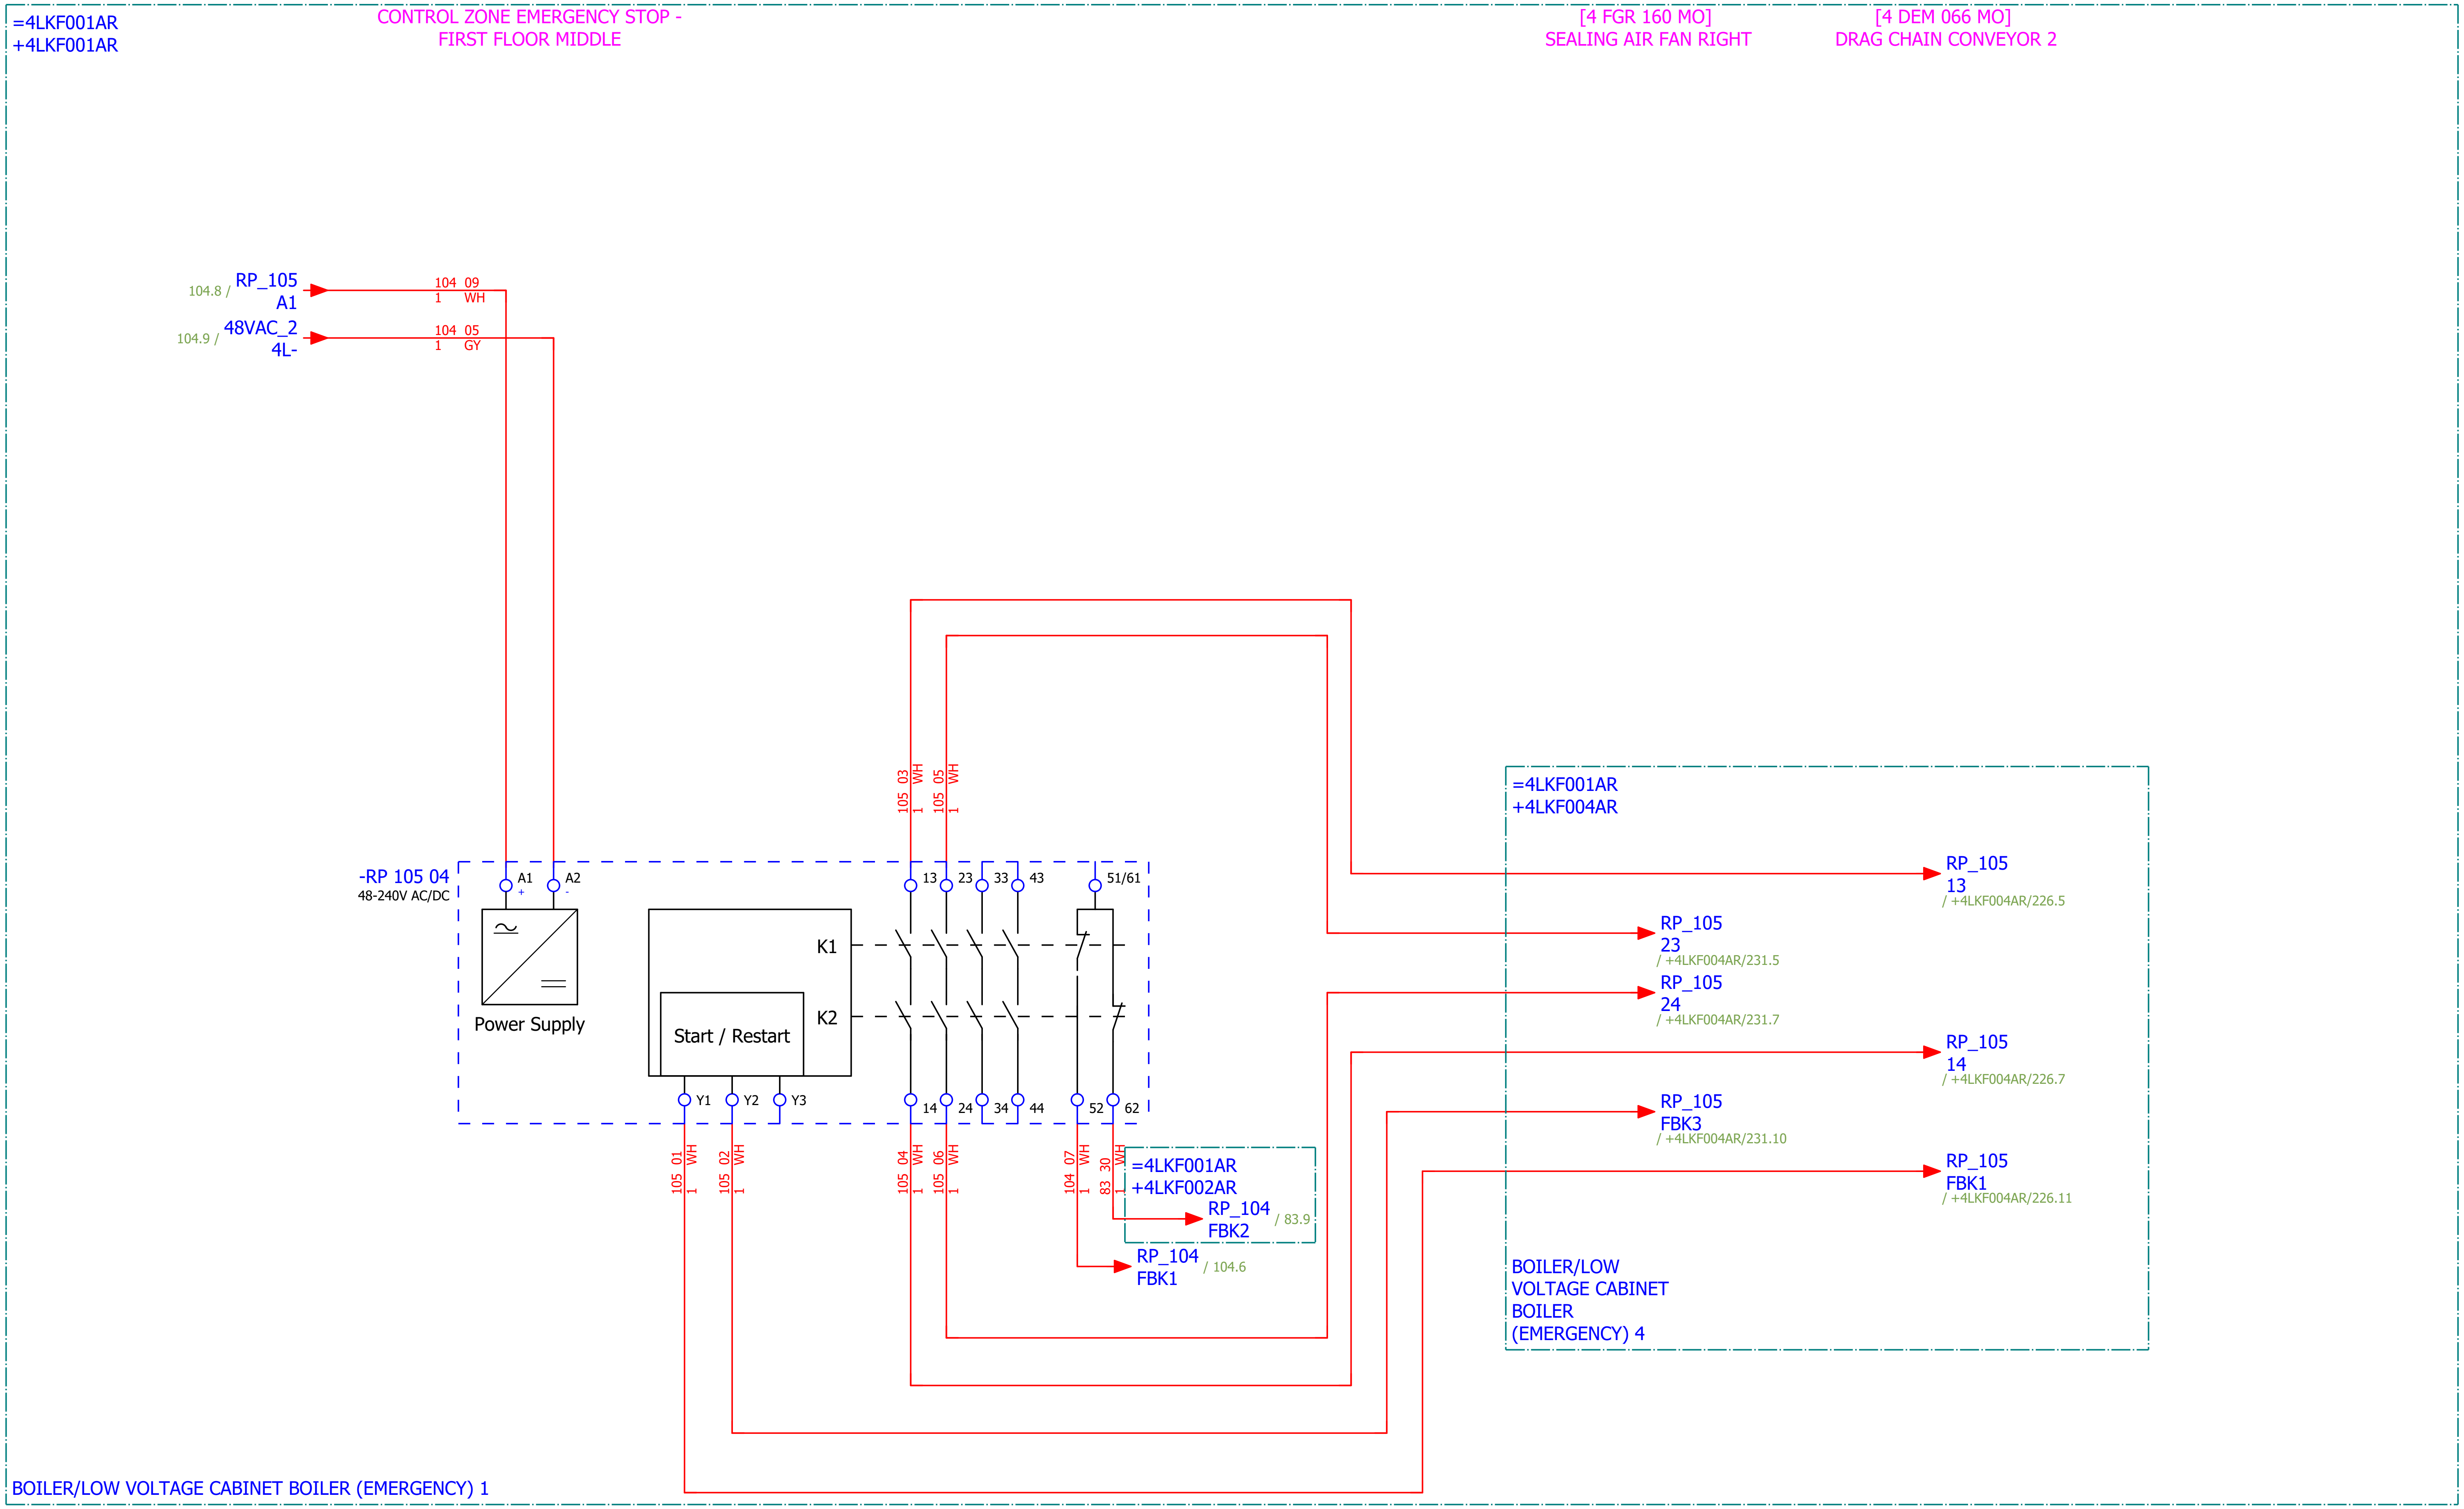

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Luka Božičević								#NA
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: EMERGENCY SHUTDOWN - FIRST FLOOR MIDDLE	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 105
Format:	A3							+4LKF002AR	Next: 106

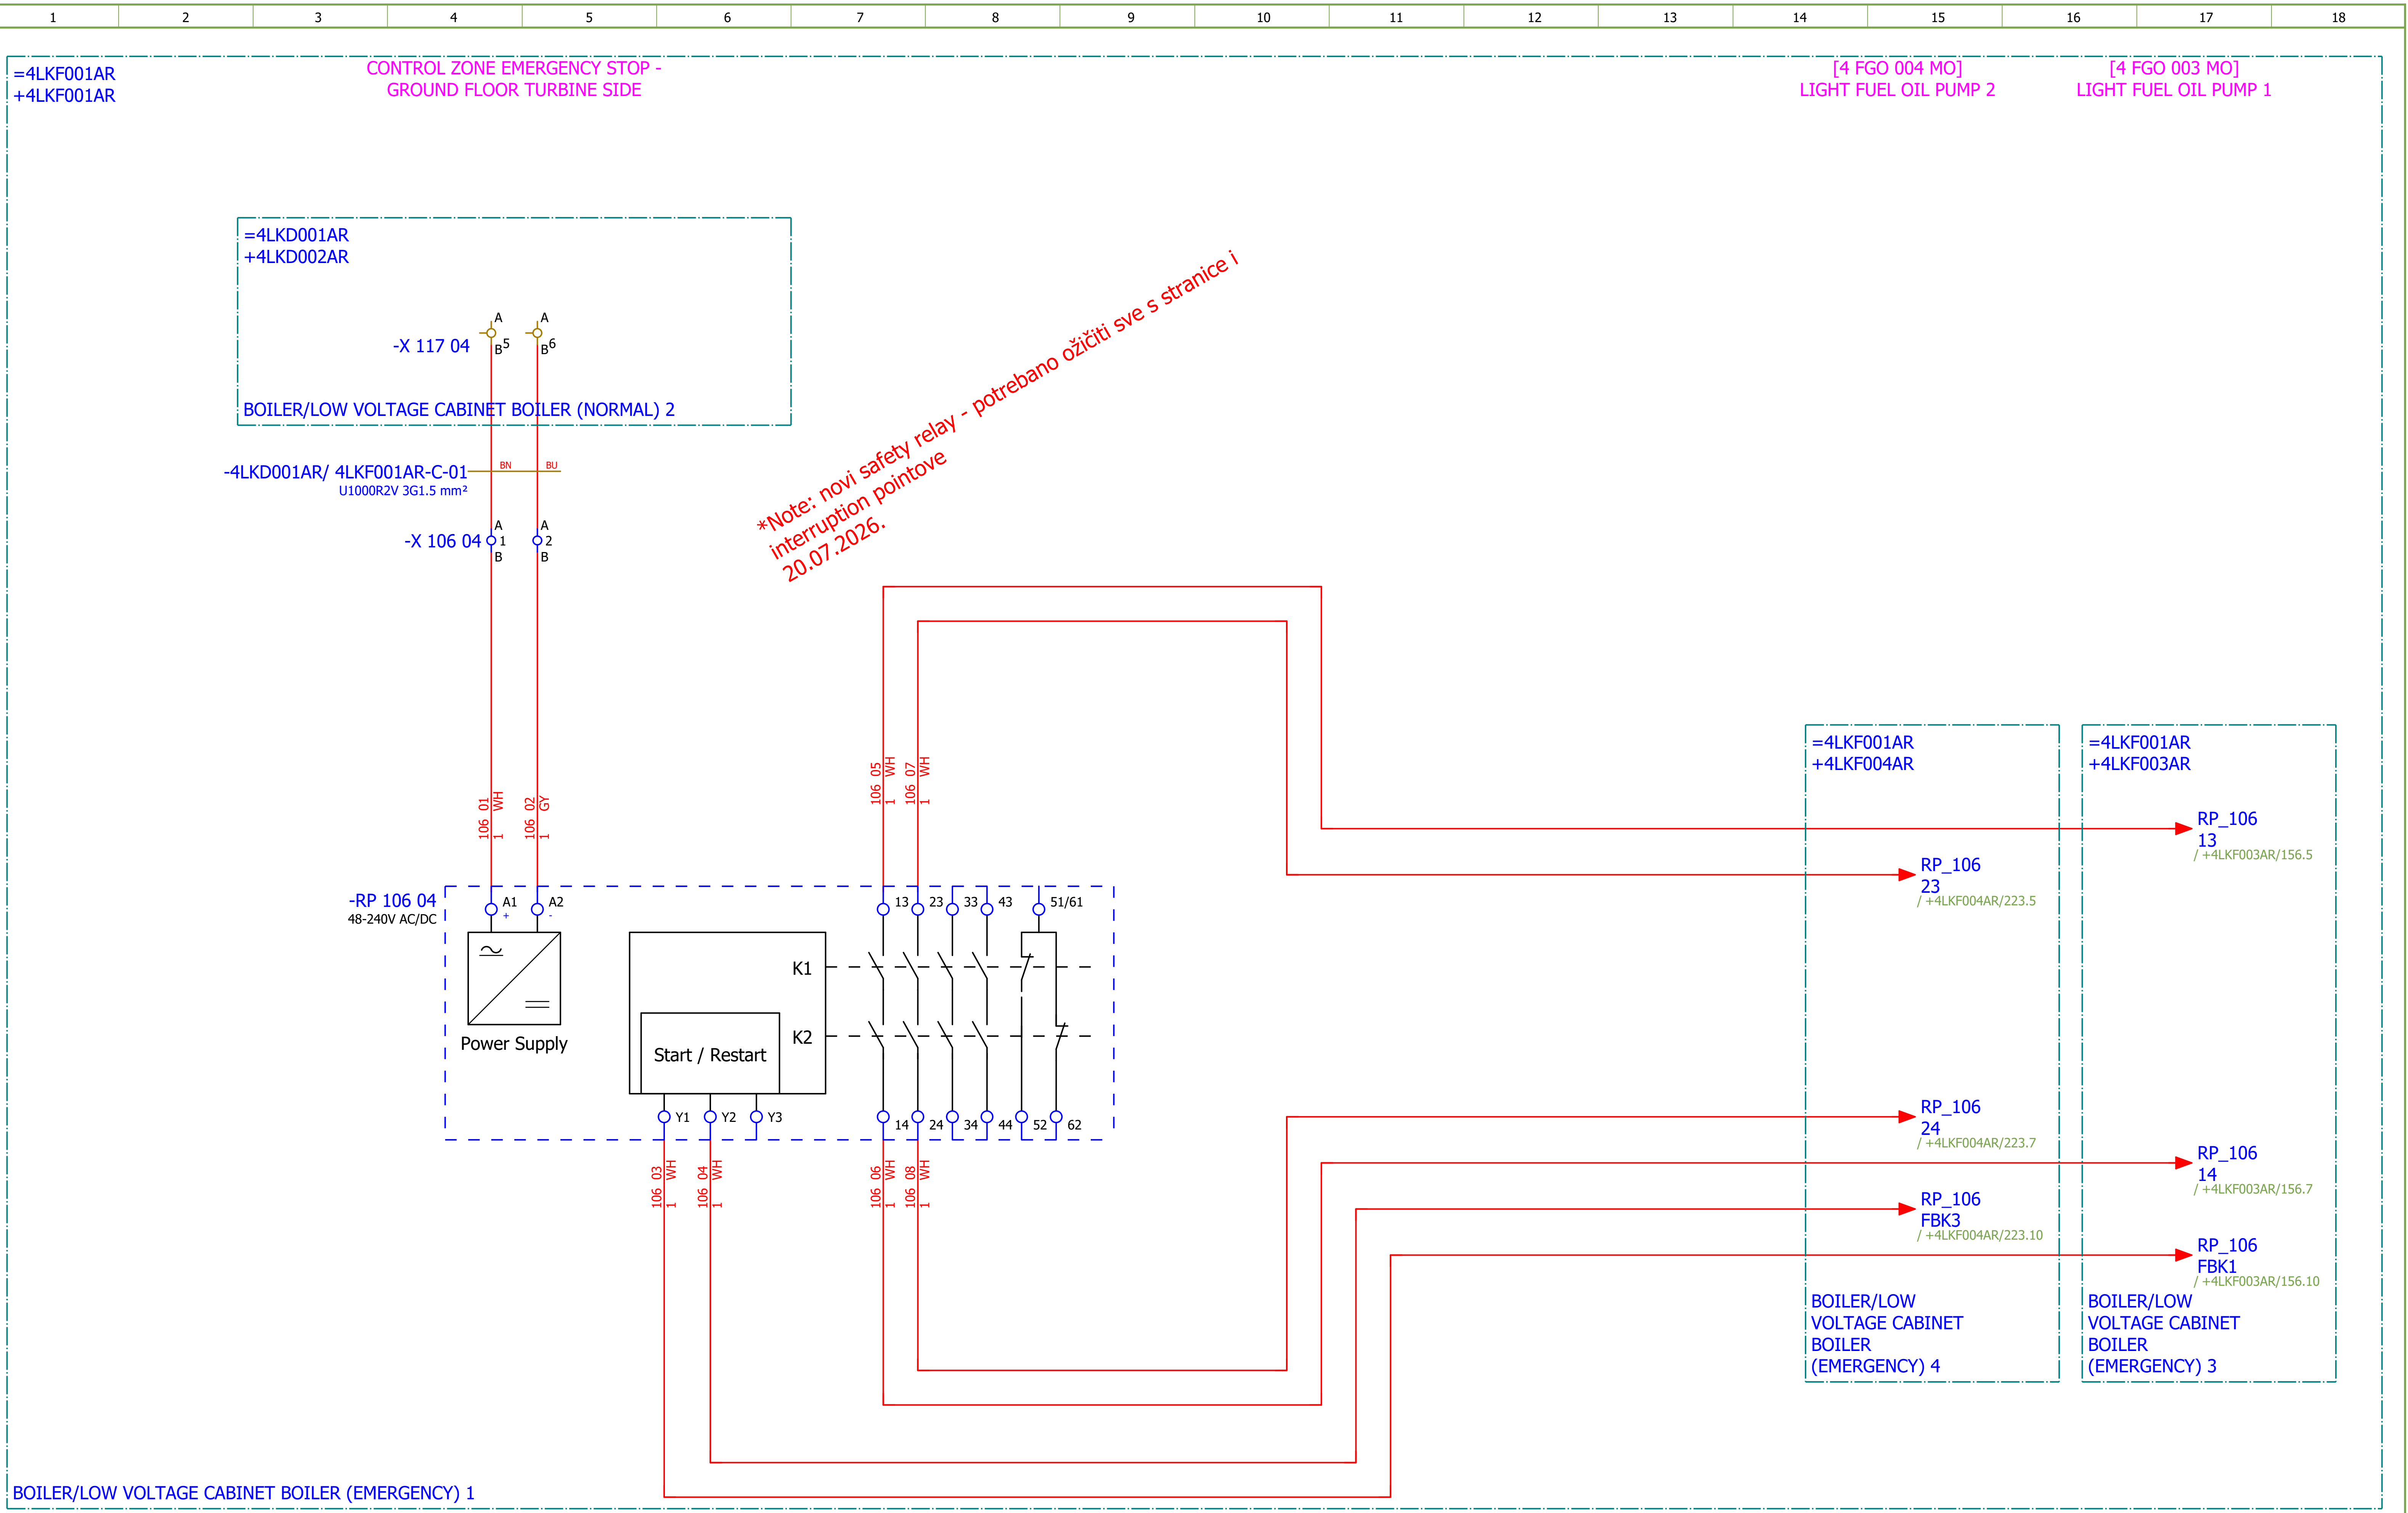

Date:	17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: G	#NA
Drawn:	Luka Božičević								
Approved:	Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: EMERGENCY SHUTDOWN - GROUND FLOOR TURBINE SIDE	Drawing designation: BRC-4-ATEP0-1874-G			=4LKF001AR	Sheet: 106
Format:	A3							+4LKF002AR	Next: 111

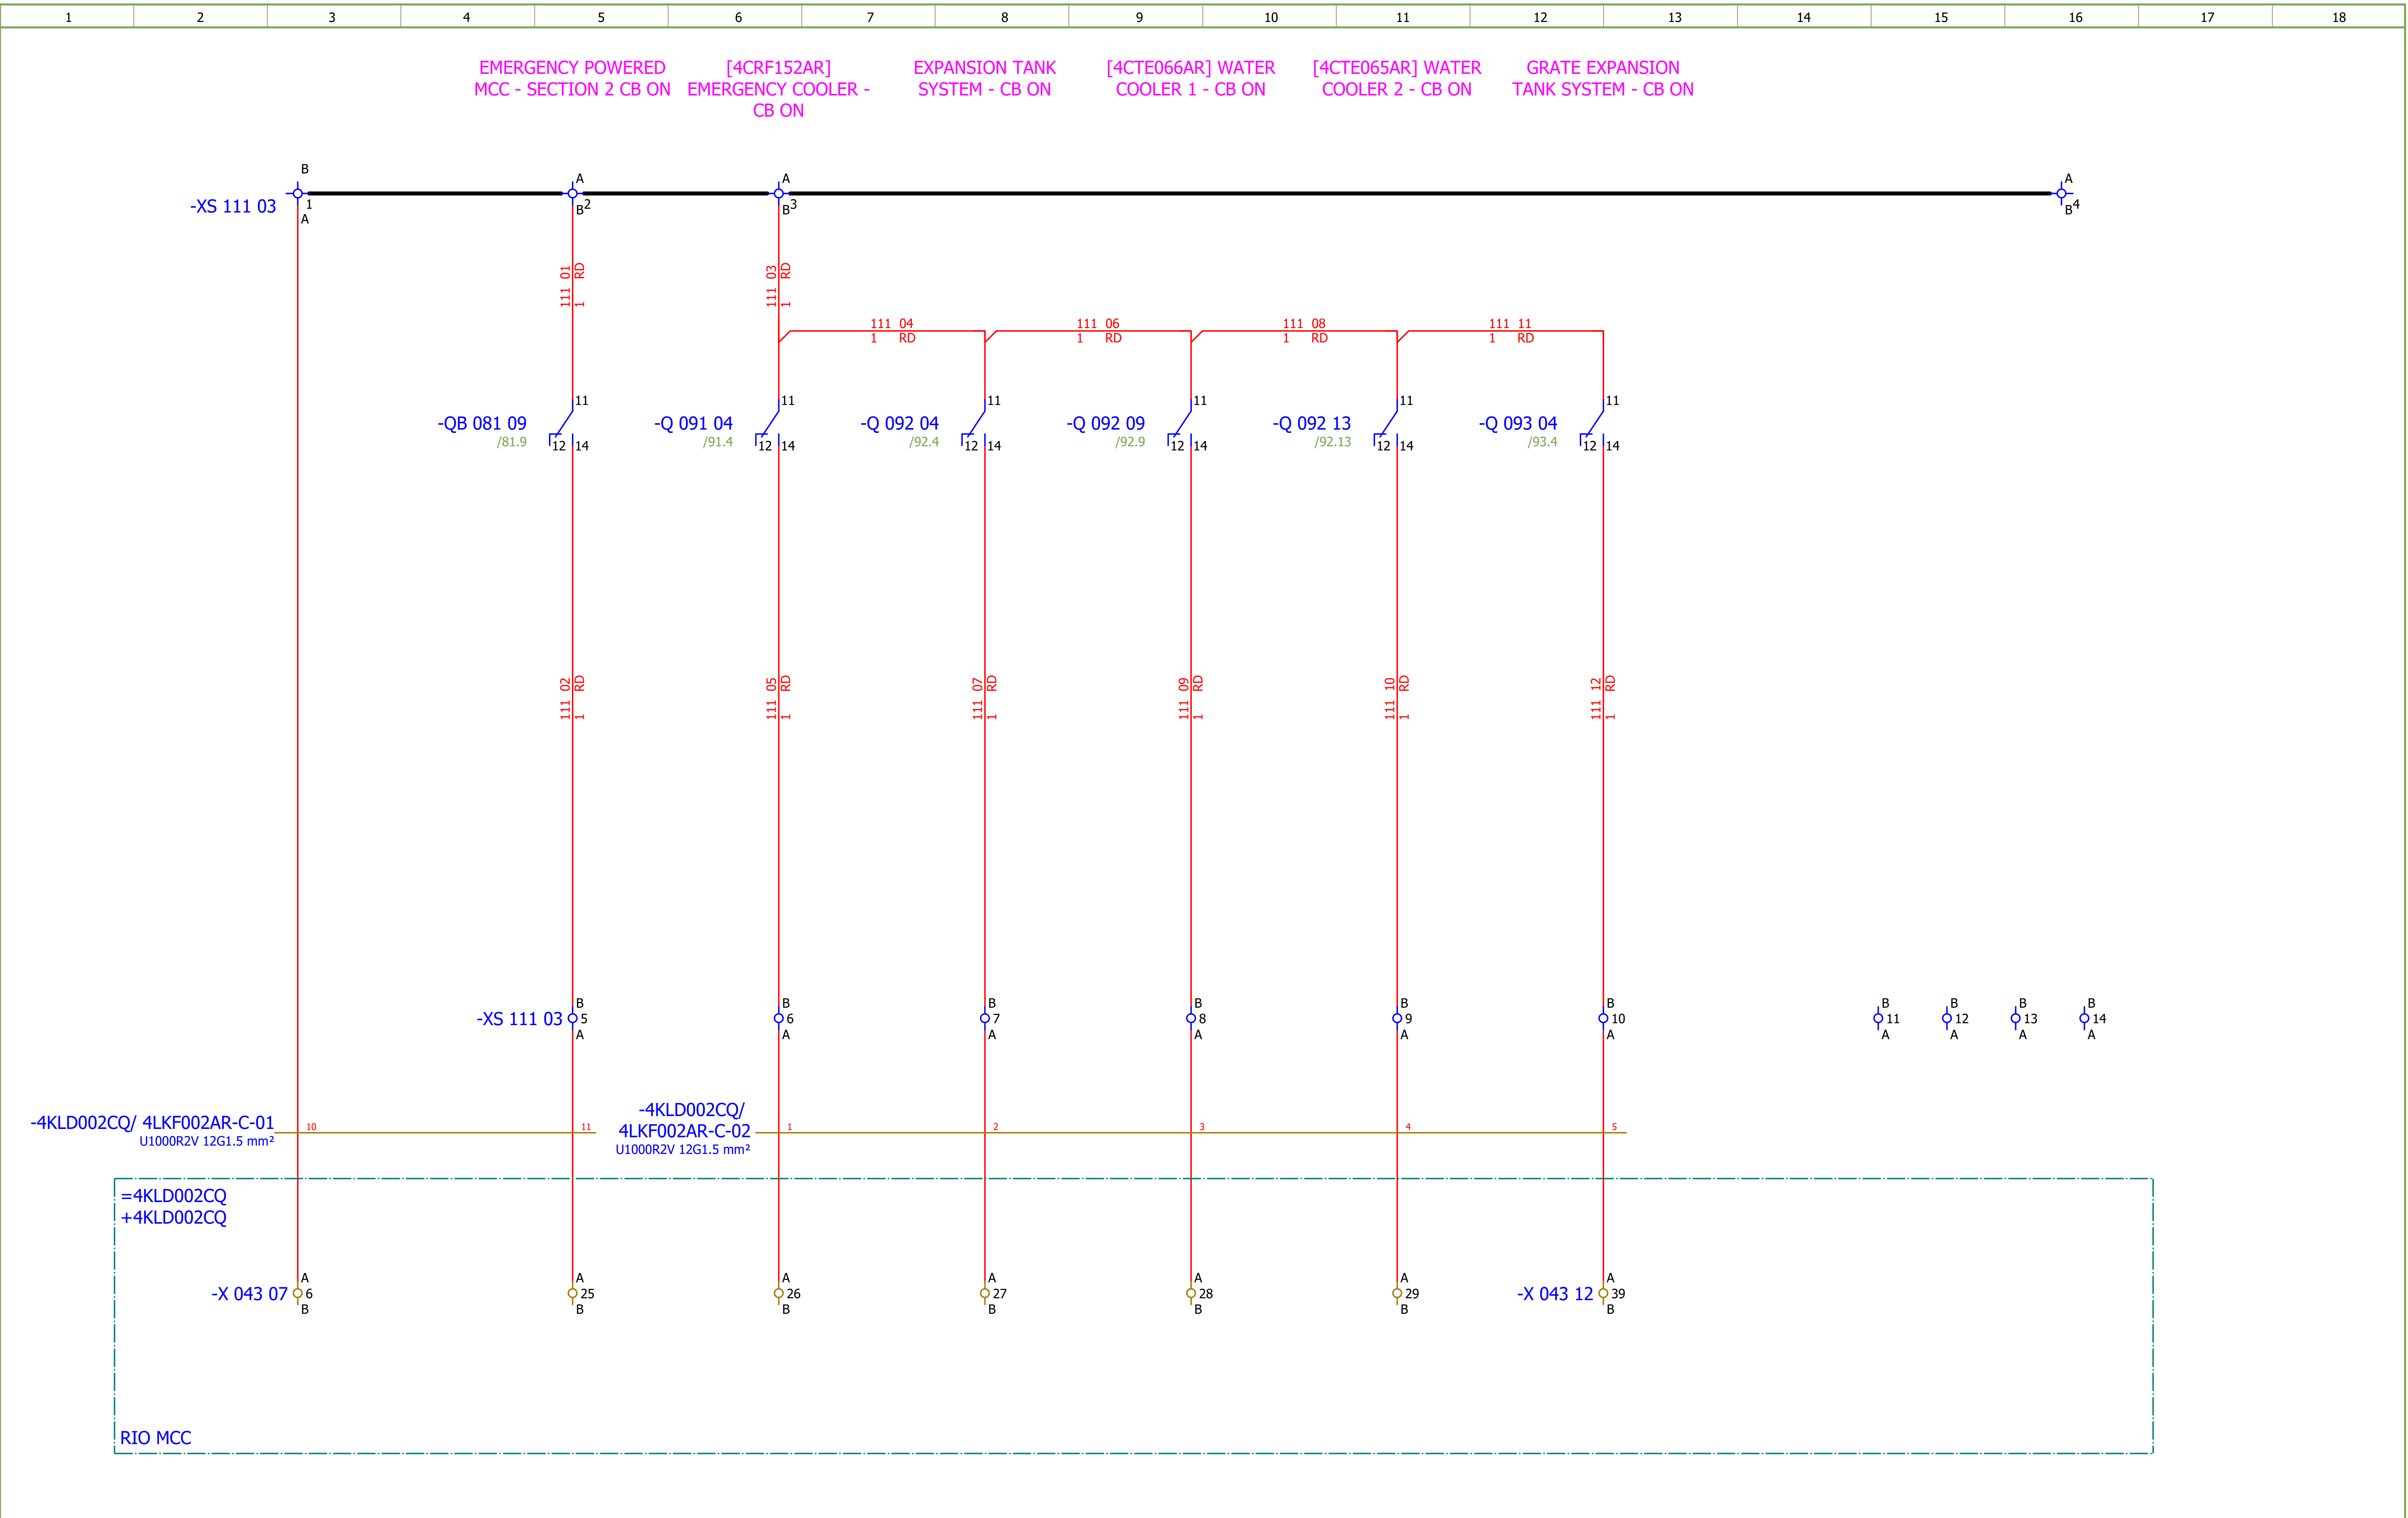

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#QA
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SIGNALIZATION	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 111
Format:	A3								+4LKF002AR	Next: 115

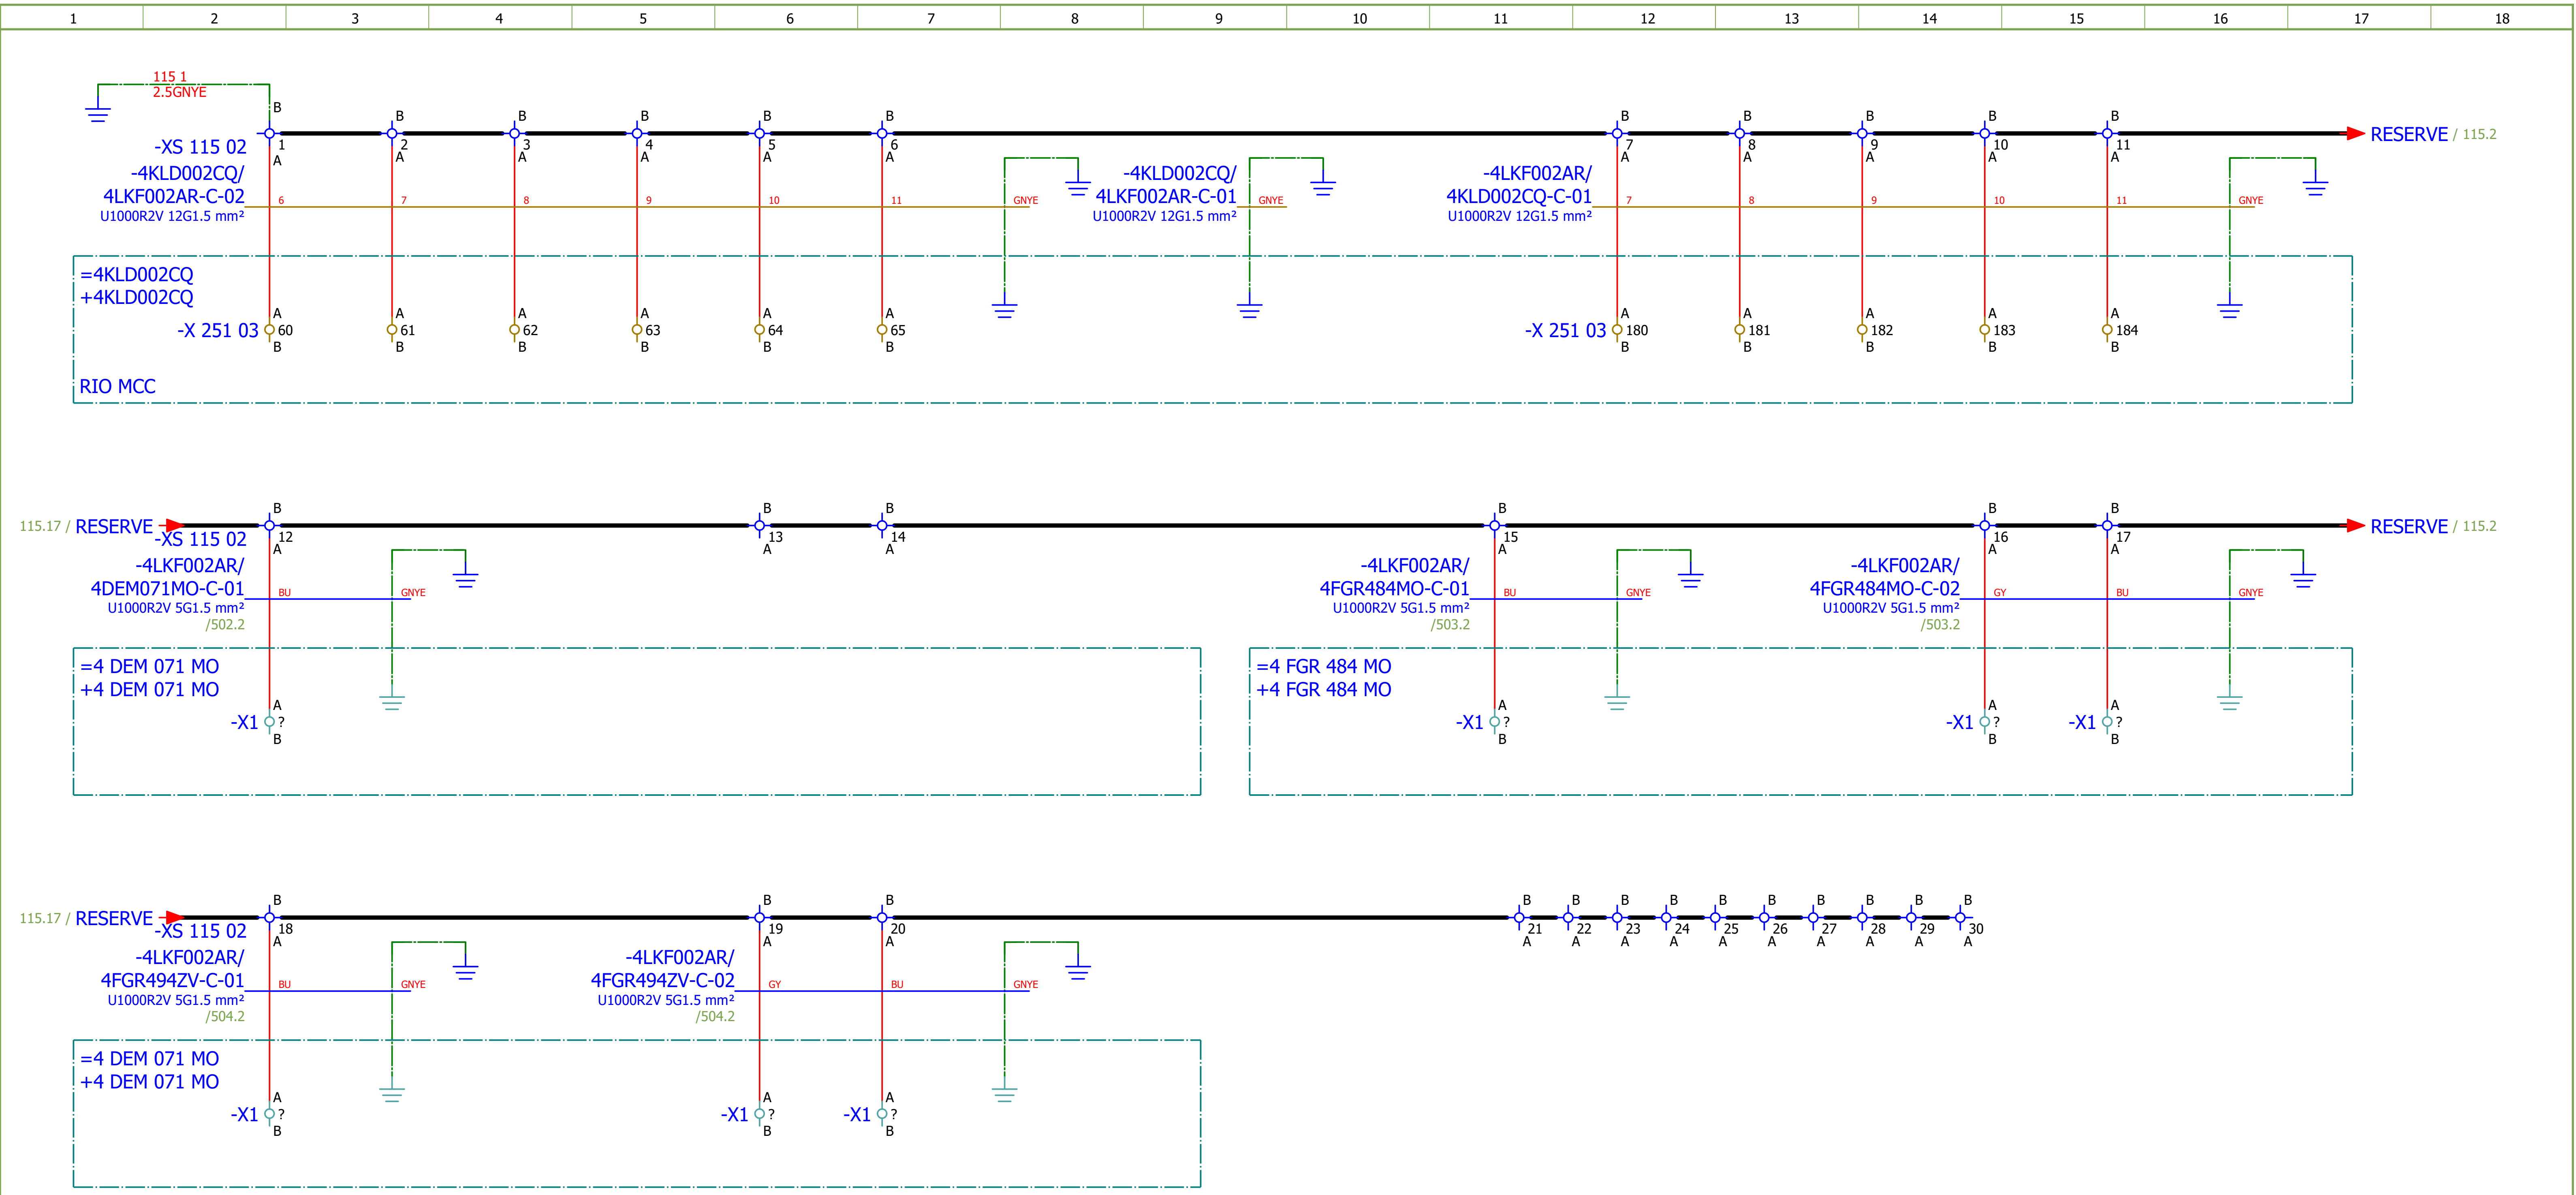

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	
Drawn:	Luka Božičević									#QB
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 115
Format:	A3								+4LKF002AR	Next: 121

MEASUREMENT

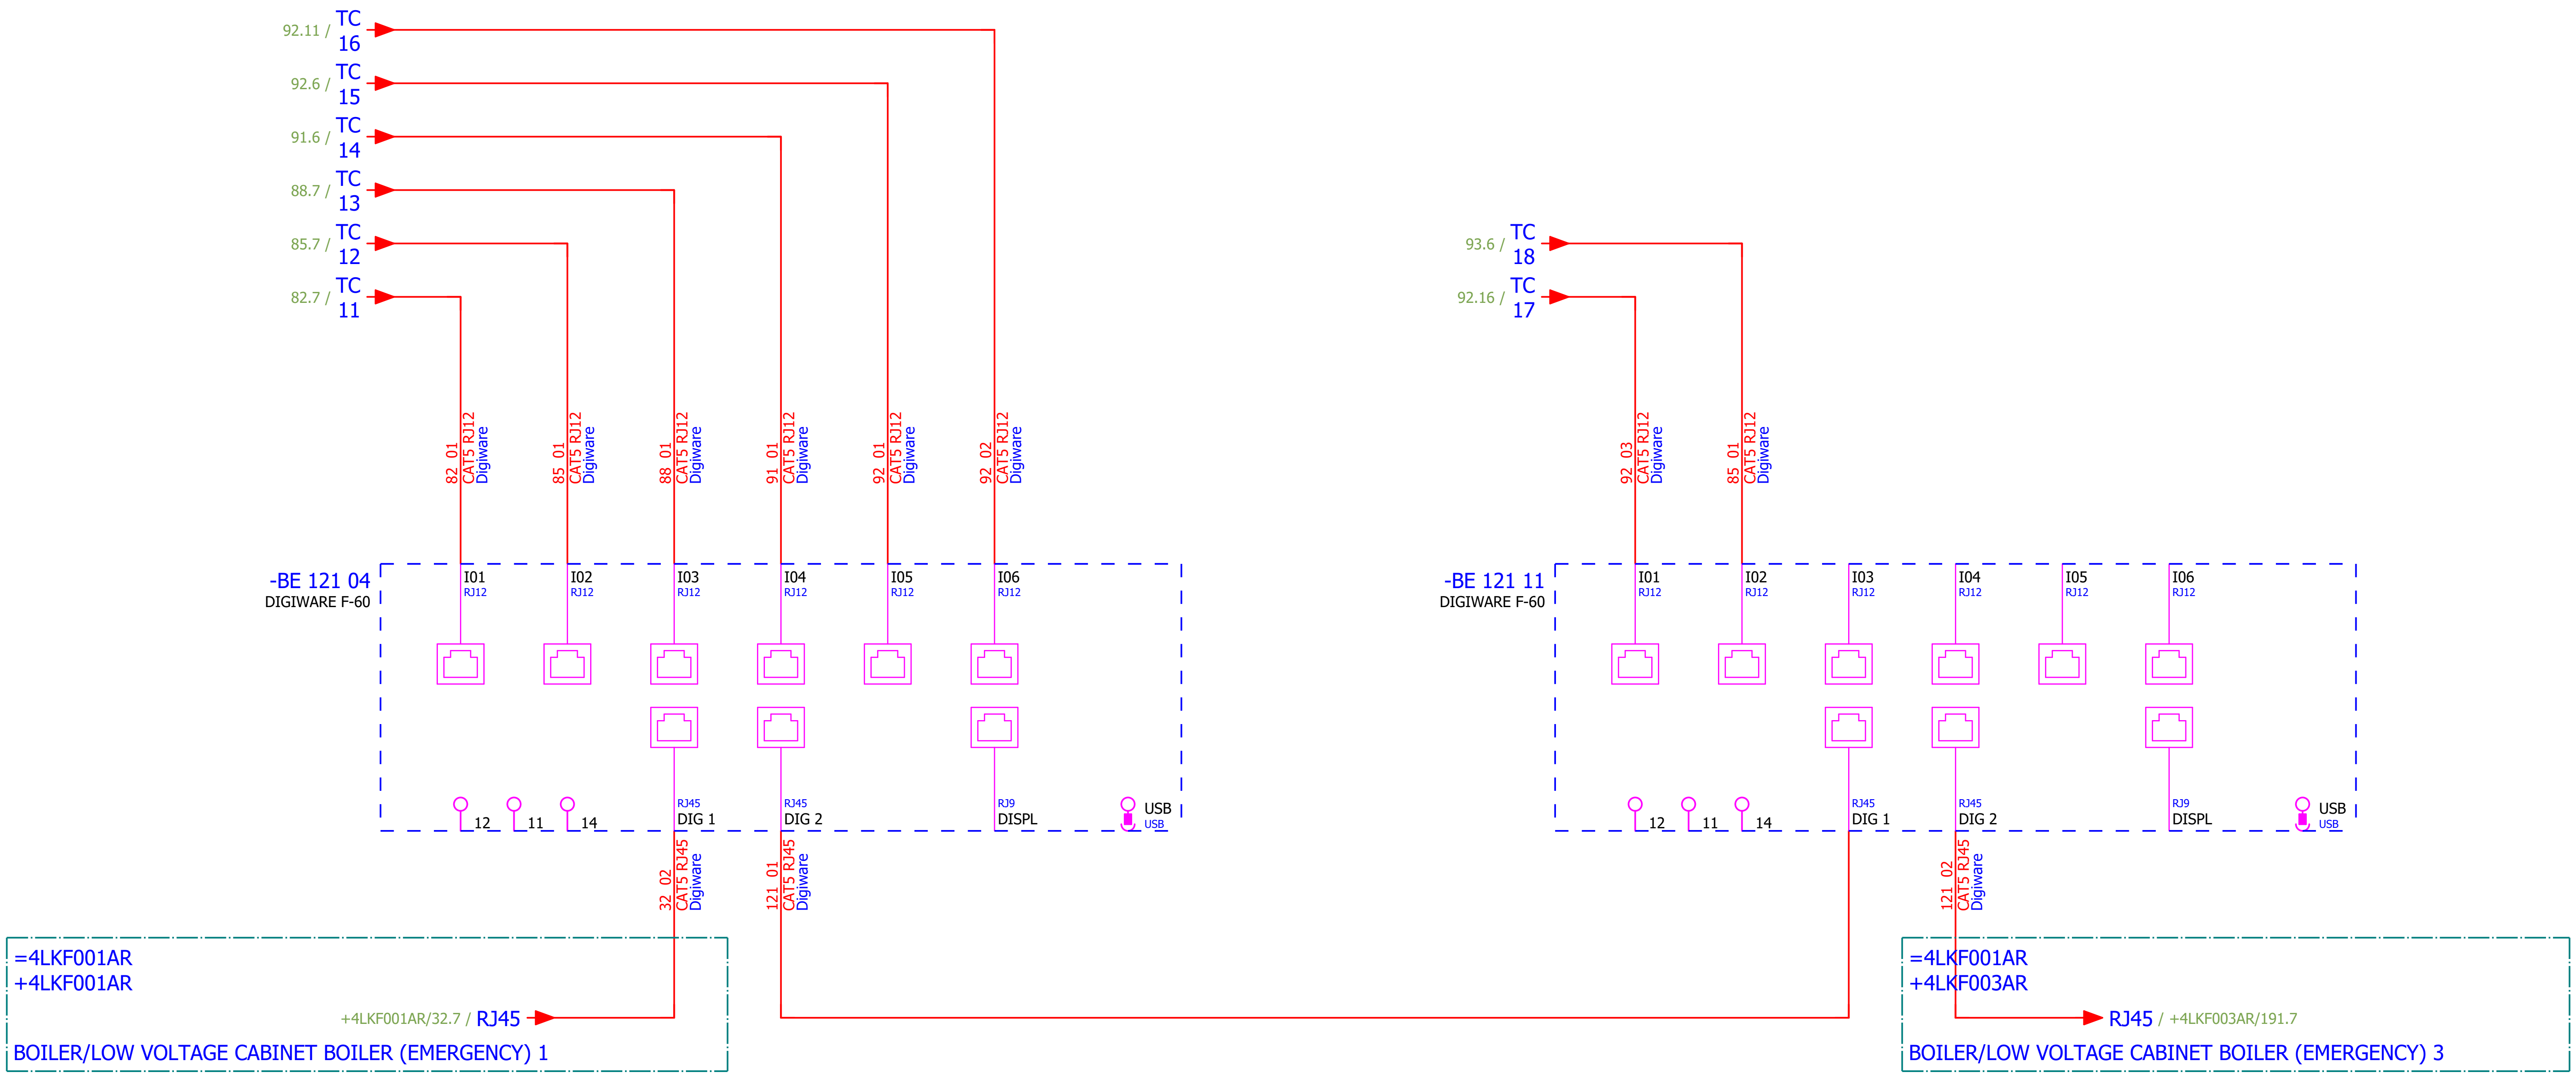

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870
Drawn:	Luka Božičević							Revision: F
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COMMUNICATION	Drawing designation: BRC-4-ATEP0-1870-F	=4LKF001AR	#V
Format:	A3						+4LKF002AR	Sheet: 121 Next: 401

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Sorting number	Part number	Quantity	Manufacturer	Device	Device description	Device designation
1.	SOC.48290112	1	Socomec	Current module DIRIS Digiware I-60, 6 current inputs, Metering	Current module DIRIS Digiware I-60, 6 current inputs, Metering	-BC 091 08
2.	SOC.47290126	2	Socomec	Module location default ISOM DIGIWARE F-60	Network type - Power distribution, Control circuits, Medical Rated voltage - 24 VDC Type - Insulation Fault Locator Indication - Digital	-BE 121 04;-BE 121 11
3.	SE.ZB4BVBG1	9	Schneider Electric	white light block with body/fixing collar integral LED 24...120VAC/DC		-HL 083 02...-HL 083 04;-HL 086 02...-HL 086 04;-HL 089 02...-HL 089 04
4.	SE.ZB4BV043	3	Schneider Electric	Red pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Red	-HL 083 02;-HL 086 02;-HL 089 02
5.	SE.ZBZ32	9	Schneider Electric	Harmony XB4	Legend holder, plastic	-HL 083 02...-HL 083 04;-HL 086 02...-HL 086 04;-HL 089 02...-HL 089 04
6.	SE.ZB4BV033	3	Schneider Electric	Green pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Green	-HL 083 03;-HL 086 03;-HL 089 03
7.	SE.ZB4BV053	3	Schneider Electric	Orange pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Orange	-HL 083 04;-HL 086 04;-HL 089 04
8.	SE.RXM4AB2P7	6	Schneider Electric	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED	-K 083 15;-K 083 16;-K 086 15;-K 086 16;-K 089 15;-K 089 16
9.	SE.RXZE2S114M	6	Schneider Electric	Socket	For RXM2/RXM4 relays Screw connectors Separate contact 4 C/O	-K 083 15;-K 083 16;-K 086 15;-K 086 16;-K 089 15;-K 089 16
10.	SE.RXM041FU7	6	Schneider Electric	Protection module	RC circuit - 110..240 V AC - for RPZ/RXZ sockets	-K 083 15;-K 083 16;-K 086 15;-K 086 16;-K 089 15;-K 089 16
11.	SE.LC1D12P7	3	Schneider Electric	Contactor TeSys LC1-D - 3P - AC-3 440V 12 A, Coil 230 V AC	Contactor TeSys LC1-D - 3P - AC-3 440V 18 A, Coil 230 V AC	-KM 082 05;-KM 085 05;-KM 088 05
12.	SE.LADN31	3	Schneider Electric	Auxiliary contact block TeSys - 3 NO + 1 NC,screw-clamps terminals	Auxiliary contact block TeSys - 3 NO + 1 NC,screw-clamps terminals	-KM 082 05;-KM 085 05;-KM 088 05
13.	SE.LAD4RCU	3	Schneider Electric	RC Transient Suppressor 110 TO 250 VAC	RC Transient Suppressor 110 TO 250 VAC	-KM 082 05;-KM 085 05;-KM 088 05
14.	SOC.192A1204	1	Socomec	Ammeter 0-40A	Scale: 0-40A (AC) Dimensions: 48x48mm	-PG 091 07
15.	SE.GV2P06	1	Schneider Electric	Motor circuit breaker	3-pole 1-1.6 A Thermal-magnetic	-Q 082 05
16.	SE.GVAE11	3	Schneider Electric	Auxiliary contact block	1NO+1NC Front mounting For GV2	-Q 082 05;-Q 085 05;-Q 088 05
17.	SE.GVAD0110	3	Schneider Electric	TeSys GV AD0110 - auxiliary contact - 1 NO + 1 NC (fault)		-Q 082 05;-Q 085 05;-Q 088 05
18.	SE.A9F74202	6	Schneider Electric	2-pole MCB, 2A/C	Nominal current: 2 A Tripping curve: C	-Q 083 04;-Q 083 15;-Q 086 04;-Q 086 14;-Q 089 04;-Q 089 14
19.	SE.GV2P14	1	Schneider Electric	Motor circuit breaker	3-pole 6-10 A Thermal-magnetic	-Q 085 05
20.	SE.GV2P08	1	Schneider Electric	3-pole transformator protection circuit breaker		-Q 088 05

Sorting number	Part number	Quantity	Manufacturer	Device	Device description	Device designation
21.	SE.18727	3	Schneider Electric	Miniature circuit breaker NG125H 32A 3P C	Range: Acti9 Poles description: 3P [In] rated current: 32 A at 40 °C Network type: DC, AC Trip unit technology: Thermal-magnetic Curve code: C Breaking capacity: 36 kA Icu at 380...415 V AC 50/60 Hz conforming to EN/IEC 60947-2	-Q 091 04;-Q 092 04;-Q 093 04
22.	SE.19072	5	Schneider Electric	Auxiliary contact - 1 OC + 1 SD - 6 A - 220..240 V - for NG125	Auxiliary OC and fault contact, Acti9 NG125, 1 OC + 1 SD, 220VAC to 240VAC (max 6A), 415VAC (max 3A)	-Q 091 04;-Q 092 04;-Q 092 09;-Q 092 13;-Q 093 04
23.	SE.18726	2	Schneider Electric	Miniature circuit breaker NG125H 25A 3P C	Range: Acti9 Poles description: 3P [In] rated current: 25 A at 40 °C Network type: DC, AC Trip unit technology: Thermal-magnetic Curve code: C Breaking capacity: 36 kA Icu at 380...415 V AC 50/60 Hz conforming to EN/IEC 60947-2	-Q 092 09;-Q 092 13
24.	SE.C16F3TM125	1	Schneider Electric	Circuit breaker, ComPacT NSX160B	Circuit breaker ComPacT NSX160B, 36kA at 415VAC, TMD trip unit 125A, 3 poles 3d	-QB 081 09
25.	SE.29450	1	Schneider Electric	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV	-QB 081 09
26.	SE.LV429337T	1	Schneider Electric	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40	-QB 081 09
27.	SE.LVS04033	1	Schneider Electric	LINERGY DP	LINERGY DP 3P D.BLK/COMPACT 250A 27HOLES	-QB 081 09
28.	SE.LV429517	1	Schneider Electric	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250	-QB 081 09
29.	PXC.2950129	1	Phoenix Contact	Component for protective circuit	Diode module, with 14 diodes, common anode, diode type 1N 4007	-R 093 03
30.	PXC.2954882	1	Phoenix Contact	Diode block	Diode module, with eight diodes, common anode, diode type 1N 5408	-R 093 06
31.	PXC.2950116	1	Phoenix Contact	Component for protective circuit	Diode module, with 14 diodes, common cathode, diode type 1N 4007	-R 093 10
32.	PXC.2954879	1	Phoenix Contact	Component for protective circuit	Diode module, with eight diodes, common cathode, diode type 1N 5408	-R 093 14
33.	SE.XPSBAC34AP	3	Schneider Electric	Safety module	Harmony Safety Automation Estop or guard ,Harmony XPS, connected to supply terminals 48-240 V AC/DC , no inputs, screw	-RP 083 05;-RP 086 05;-RP 089 05
34.	SE.XB4BA21	3	Schneider Electric	Black flush complete pushbutton Ø22 spring return 1NO "unmarked"	Black flush complete pushbutton Ø22 spring return 1NO	-S 083 06;-S 086 06;-S 089 06
35.	SE.XB4BD33	3	Schneider Electric	Selector switch, BLACK, 1-0-2, 2NO	Metal Black Ø22 3 positions 2 NO	-S 083 06.1;-S 086 06.1;-S 089 06.1
36.	SE.ZBE101	3	Schneider Electric	Single contact block NO	Harmony XB4 Silver alloy 1 NO	-S 083 06.1;-S 086 06.1;-S 089 06.1
37.	SOC.47506030	8	Socomec	TORES LOCATION SENSOR DELTA IP-30 (30mm)	Fault locating differential transformer IP-30 Maximal diameter of cable: 30mm	-TC 082 05;-TC 085 05;-TC 088 05;-TC 091 04;-TC 092 04;-TC 092 09;-TC 092 14;-TC 093 04
38.	SOC.47290590	8	Socomec	ISOM T-15	Connection adaptor ISOM T-15 to ISOM Digiware F-60 modules	-TC 082 05;-TC 085 05;-TC 088 05;-TC 091 04;-TC 092 04;-TC 092 09;-TC 092 14;-TC 093 04

Sorting number	Part number	Quantity	Manufacturer	Device	Device description	Device designation
39.	SOC.192T2106	1	Socomec	Bar or cable-through CT TCB 17-20 60A/5A Class 1 1VA	Accuracy class: 0.2s — 0.5 or 1. Dielectric quality: 3 kV — 50 Hz - 1 min. Operating frequency: 50 — 60 Hz. Permanent overload: 1.2 In. Insulation class: E (120 °C).	-TCU 091 05
40.	SOC.48290501	3	Socomec	Solid current sensor TE-18 18mm 25-63A	Solid current sensor TE-18 18mm 25-63A Dimensions max de passage de cable: D:8,6mm	-TCU 091 05.1;-TCV 091 04;-TCW 091 04
41.	PXC.3209510	110	Phoenix Contact	PT 2,5 - Feed-through terminal block	Feed-through terminal block, nom. voltage: 800 V, nominal current: 24 A, number of connections: 2, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm2, cross section: 0.14 mm2 - 4 mm2, mounting type: NS 35/7,5, NS 35/15, color: gray	-X 082 05;-X 083 09;-X 084 06;-X 085 05;-X 086 09;-X 087 06;-X 088 05;-X 089 09;-X 090 06;-XB 093 03;-XS 111 03;-XS 115 02
42.	PXC.3044131	9	Phoenix Contact	UT 6 - Feed-through terminal block	Feed-through terminal block nom. voltage: 1000 V nominal current: 41 A number of connections: 2 connection method: Screw connection Rated cross section: 6 mm2 cross section: 0.2 mm2 - 10 mm2 mounting type: NS 35/7,5, NS 35/15 color: gray	-X 091 04;-X 092 04;-X 093 04
43.	PXC.3211757	6	Phoenix Contact	PT 4 - Feed-through terminal block	Feed-through terminal block, nom. voltage: 800 V, nominal current: 32 A, number of connections: 2, connection method: Push-in connection, Rated cross section: 4 mm², cross section: 0.2 mm² - 6 mm², mounting type: NS 35/7,5, NS 35/15, color: gray	-X 092 09;-X 092 13

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Cable name: **4LCA101HSS/ 4LCA102HSS-C-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **3G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF002AR/104.4	=4LCA101HSS+4LCA101HSS-S303	12	**BN**	=4LCA102HSS+4LCA102HSS-S303	11	=4LKF001AR+4LKF002AR/104.4	
	=4LKF001AR+4LKF002AR/104.5	=4LCA101HSS+4LCA101HSS-S303	22	**BU**	=4LCA102HSS+4LCA102HSS-S303	21	=4LKF001AR+4LKF002AR/104.5	
				GNYE				

Cable name: **4LKF001AR/ 4LCA002HSS-C-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF002AR/101.4	=4LKF001AR+4LKF001AR-X 101 04	1:A	**BN**	=4LCA002HSS+4LCA002HSS-S303	11	=4LKF001AR+4LKF002AR/101.4	
CONTROL ZONE EMERGENCY STOP - GROUND FLOOR HPU	=4LKF001AR+4LKF002AR/101.5	=4LKF001AR+4LKF001AR-X 101 04	3:A	**BK**	=4LCA002HSS+4LCA002HSS-S303	21	=4LKF001AR+4LKF002AR/101.5	
	=4LKF001AR+4LKF002AR/101.4	=4LKF001AR+4LKF001AR-X 101 04	2:A	**GY**	=4LCA002HSS+4LCA002HSS-S303	12	=4LKF001AR+4LKF002AR/101.4	
CONTROL ZONE EMERGENCY STOP - GROUND FLOOR HPU	=4LKF001AR+4LKF002AR/101.5	=4LKF001AR+4LKF001AR-X 101 04	4:A	**BU**	=4LCA002HSS+4LCA002HSS-S303	22	=4LKF001AR+4LKF002AR/101.5	
				GNYE				

Cable name: **4LKF001AR/ 4LCA101HSS-C-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **3G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF002AR/104.4	=4LKF001AR+4LKF001AR-X 104 04	1:A	**BN**	=4LCA101HSS+4LCA101HSS-S303	11	=4LKF001AR+4LKF002AR/104.4	
CONTROL ZONE EMERGENCY STOP - FIRST FLOOR MIDDLE	=4LKF001AR+4LKF002AR/104.5	=4LKF001AR+4LKF001AR-X 104 04	3:A	**BU**	=4LCA101HSS+4LCA101HSS-S303	21	=4LKF001AR+4LKF002AR/104.5	
				GNYE				

Cable name: **4LKF001AR/ 4LCA102HSS-C-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **3G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF002AR/104.4	=4LKF001AR+4LKF001AR-X 104 04	2:A	**BN**	=4LCA102HSS+4LCA102HSS-S303	12	=4LKF001AR+4LKF002AR/104.4	
CONTROL ZONE EMERGENCY STOP - FIRST FLOOR MIDDLE	=4LKF001AR+4LKF002AR/104.5	=4LKF001AR+4LKF001AR-X 104 04	4:A	**BU**	=4LCA102HSS+4LCA102HSS-S303	22	=4LKF001AR+4LKF002AR/104.5	
				GNYE				

Cable name: **4LKF002AR/ 4CRF152AR-B-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **4G6 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF002AR/91.4	=4LKF001AR+4LKF002AR-X 091 04	1:A	**BN**	=4CRF152AR+4CRF152AR-Q??	L1	=4LKF001AR+4LKF002AR/91.4	
[4CRF152AR] EMERGENCY COOLER	=4LKF001AR+4LKF002AR/91.4	=4LKF001AR+4LKF002AR-X 091 04	2:A	**BK**	=4CRF152AR+4CRF152AR-Q??	L2	=4LKF001AR+4LKF002AR/91.4	[4CRF152AR] EMERGENCY COOLER
=	=4LKF001AR+4LKF002AR/91.5	=4LKF001AR+4LKF002AR-X 091 04	3:A	**GY**	=4CRF152AR+4CRF152AR-Q??	L3	=4LKF001AR+4LKF002AR/91.5	=
				GNYE				
	=4LKF001AR+4LKF002AR/91.6	=4LKF001AR+4LKF002AR-PE		**GNYE**	=4CRF152AR+4CRF152AR-Q??	PE	=4LKF001AR+4LKF002AR/91.5	[4CRF152AR] EMERGENCY COOLER

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Cable name: **4LKF002AR/ 4CTE065AR-B-01**
Cable type: **U1000R2V** No. of conn., diameter, length: **4G4 mm² /**
Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
[4CTE066AR] WATER COOLER 1	=4LKF001AR+4LKF002AR/92.13	=4LKF001AR+4LKF002AR-X 092 13	1:A	**BN**	=4CTE065AR+4CTE065AR-Q??	L1	=4LKF001AR+4LKF002AR/92.13	[4CTE066AR] WATER COOLER 1
[4CTE065AR] WATER COOLER 2	=4LKF001AR+4LKF002AR/92.14	=4LKF001AR+4LKF002AR-X 092 13	2:A	**BK**	=4CTE065AR+4CTE065AR-Q??	L2	=4LKF001AR+4LKF002AR/92.14	[4CTE065AR] WATER COOLER 2
=	=4LKF001AR+4LKF002AR/92.14	=4LKF001AR+4LKF002AR-X 092 13	3:A	**GY**	=4CTE065AR+4CTE065AR-Q??	L3	=4LKF001AR+4LKF002AR/92.14	=
	=4LKF001AR+4LKF002AR/92.16	=4LKF001AR+4LKF002AR-PE		**GNYE**	=4CTE065AR+4CTE065AR-Q??	PE	=4LKF001AR+4LKF002AR/92.14	=

Cable name: **4LKF002AR/ 4CTE066AR-B-01**
Cable type: **U1000R2V** No. of conn., diameter, length: **4G4 mm² /**
Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
[4CTE111CR] EXPANSION TANK SYSTEM Njemu ne treba 3f napajanje Kabel bio 4G6 Iz UPS-a 1f	=4LKF001AR+4LKF002AR/92.9	=4LKF001AR+4LKF002AR-X 092 09	1:A	**BN**	=4CTE066AR+4CTE066AR-Q??	L1	=4LKF001AR+4LKF002AR/92.9	[4CTE111CR] EXPANSION TANK SYSTEM Njemu ne treba 3f napajanje Kabel bio 4G6 Iz UPS-a 1f
[4CTE066AR] WATER COOLER 1	=4LKF001AR+4LKF002AR/92.9	=4LKF001AR+4LKF002AR-X 092 09	2:A	**BK**	=4CTE066AR+4CTE066AR-Q??	L2	=4LKF001AR+4LKF002AR/92.9	[4CTE066AR] WATER COOLER 1
=	=4LKF001AR+4LKF002AR/92.9	=4LKF001AR+4LKF002AR-X 092 09	3:A	**GY**	=4CTE066AR+4CTE066AR-Q??	L3	=4LKF001AR+4LKF002AR/92.9	=
	=4LKF001AR+4LKF002AR/92.11	=4LKF001AR+4LKF002AR-PE		**GNYE**	=4CTE066AR+4CTE066AR-Q??	PE	=4LKF001AR+4LKF002AR/92.10	=

Cable name: **4LKF002AR/ 4DEM071MO-B-01**
Cable type: **U1000R2V** No. of conn., diameter, length: **4G2.5 mm² /**
Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF002AR/82.5	=4LKF001AR+4LKF002AR-X 082 05	1:A	**BN**	=4 DEM 071 MO+4 DEM 071 MO-M11	U1	=4LKF001AR+4LKF002AR/82.5	
[4 DEM 071 MO] ASH STEAM VENT FAN	=4LKF001AR+4LKF002AR/82.5	=4LKF001AR+4LKF002AR-X 082 05	2:A	**BK**	=4 DEM 071 MO+4 DEM 071 MO-M11	V1	=4LKF001AR+4LKF002AR/82.5	
=	=4LKF001AR+4LKF002AR/82.5	=4LKF001AR+4LKF002AR-X 082 05	3:A	**GY**	=4 DEM 071 MO+4 DEM 071 MO-M11	W1	=4LKF001AR+4LKF002AR/82.5	
	=4LKF001AR+4LKF002AR/82.7	=4LKF001AR+4LKF002AR-PE		**GNYE**	=4 DEM 071 MO+4 DEM 071 MO-M11	PE	=4LKF001AR+4LKF002AR/82.5	

Cable name: **4LKF002AR/ 4DEM071MO-C-01**
Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**
Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
LOCAL CONTROL	=4LKF001AR+4LKF002AR/83.9	=4LKF001AR+4LKF002AR-X 083 09	1:A	**BN**	=4 DEM 071 MO+4 DEM 071 MO-S?	21	=4LKF001AR+4LKF002AR/83.9	LOCAL STOP
=	=4LKF001AR+4LKF002AR/83.11	=4LKF001AR+4LKF002AR-X 083 09	4:A	**BK**	=4 DEM 071 MO+4 DEM 071 MO-S?	13	=4LKF001AR+4LKF002AR/83.9	FORWARD LOCAL
=	=4LKF001AR+4LKF002AR/83.9	=4LKF001AR+4LKF002AR-X 083 09	2:A	**GY**	=4 DEM 071 MO+4 DEM 071 MO-S?	14	=4LKF001AR+4LKF002AR/83.9	=
	=4LKF001AR+4LKF002AR/115.2	=4LKF001AR+4LKF002AR-XS 115 02	12:A	**BU**	=4 DEM 071 MO+4 DEM 071 MO-X1	?:A	=4LKF001AR+4LKF002AR/115.2	
	=4LKF001AR+4LKF002AR/115.4	=4LKF001AR+4LKF002AR-PE		**GNYE**	=4 DEM 071 MO+4 DEM 071 MO-PE		=4LKF001AR+4LKF002AR/115.3	

Cable name: **4LKF002AR/ 4DEM071MO-C-02**
Cable type: **U1000R2V** No. of conn., diameter, length: **3G1.5 mm² /**
Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
READY	=4LKF001AR+4LKF002AR/84.10	=4LKF001AR+4LKF002AR-X 084 06	3:A	**BN**	=4 DEM 071 MO+4 DEM 071 MO-S?	31	=4LKF001AR+4LKF002AR/84.10	LOCAL STOP
=	=4LKF001AR+4LKF002AR/84.10	=4LKF001AR+4LKF002AR-X 084 06	6:A	**BU**	=4 DEM 071 MO+4 DEM 071 MO-S?	32	=4LKF001AR+4LKF002AR/84.10	=
				GNYE				

Cable name: **4LKF002AR/ 4FGR484MO-B-01**
Cable type: **U1000R2V** No. of conn., diameter, length: **4G2.5 mm² /**
Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF002AR/85.5	=4LKF001AR+4LKF002AR-X 085 05	1:A	**BN**	=4 FGR 484 MO+4 FGR 484 MO-M12	U1	=4LKF001AR+4LKF002AR/85.5	
[4 FGR 484 MO] HPU COOLING PUMP	=4LKF001AR+4LKF002AR/85.5	=4LKF001AR+4LKF002AR-X 085 05	2:A	**BK**	=4 FGR 484 MO+4 FGR 484 MO-M12	V1	=4LKF001AR+4LKF002AR/85.5	
=	=4LKF001AR+4LKF002AR/85.5	=4LKF001AR+4LKF002AR-X 085 05	3:A	**GY**	=4 FGR 484 MO+4 FGR 484 MO-M12	W1	=4LKF001AR+4LKF002AR/85.5	
	=4LKF001AR+4LKF002AR/85.7	=4LKF001AR+4LKF002AR-PE		**GNYE**	=4 FGR 484 MO+4 FGR 484 MO-M12	PE	=4LKF001AR+4LKF002AR/85.5	

Cable name: **4LKF002AR/ 4FGR484MO-C-01**
Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**
Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
LOCAL CONTROL	=4LKF001AR+4LKF002AR/86.9	=4LKF001AR+4LKF002AR-X 086 09	2:A	**BN**	=4 FGR 484 MO+4 FGR 484 MO-S?	14	=4LKF001AR+4LKF002AR/86.9	FORWARD LOCAL
=	=4LKF001AR+4LKF002AR/86.9	=4LKF001AR+4LKF002AR-X 086 09	1:A	**BK**	=4 FGR 484 MO+4 FGR 484 MO-S?	21	=4LKF001AR+4LKF002AR/86.9	LOCAL STOP
=	=4LKF001AR+4LKF002AR/86.11	=4LKF001AR+4LKF002AR-X 086 09	4:A	**GY**	=4 FGR 484 MO+4 FGR 484 MO-S?	13	=4LKF001AR+4LKF002AR/86.9	FORWARD LOCAL
	=4LKF001AR+4LKF002AR/115.11	=4LKF001AR+4LKF002AR-XS 115 02	15:A	**BU**	=4 FGR 484 MO+4 FGR 484 MO-X1	?:A	=4LKF001AR+4LKF002AR/115.11	
	=4LKF001AR+4LKF002AR/115.12	=4LKF001AR+4LKF002AR-PE		**GNYE**	=4 FGR 484 MO+4 FGR 484 MO-PE		=4LKF001AR+4LKF002AR/115.12	

Cable name: **4LKF002AR/ 4FGR484MO-C-02**
Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**
Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
READY	=4LKF001AR+4LKF002AR/87.10	=4LKF001AR+4LKF002AR-X 087 06	3:A	**BN**	=4 FGR 484 MO+4 FGR 484 MO-S?	31	=4LKF001AR+4LKF002AR/87.10	LOCAL STOP
=	=4LKF001AR+4LKF002AR/87.10	=4LKF001AR+4LKF002AR-X 087 06	6:A	**BK**	=4 FGR 484 MO+4 FGR 484 MO-S?	32	=4LKF001AR+4LKF002AR/87.10	=
	=4LKF001AR+4LKF002AR/115.14	=4LKF001AR+4LKF002AR-XS 115 02	16:A	**GY**	=4 FGR 484 MO+4 FGR 484 MO-X1	?:A	=4LKF001AR+4LKF002AR/115.14	
	=4LKF001AR+4LKF002AR/115.15	=4LKF001AR+4LKF002AR-XS 115 02	17:A	**BU**	=4 FGR 484 MO+4 FGR 484 MO-X1	?:A	=4LKF001AR+4LKF002AR/115.15	
	=4LKF001AR+4LKF002AR/115.17	=4LKF001AR+4LKF002AR-PE		**GNYE**	=4 FGR 484 MO+4 FGR 484 MO-PE		=4LKF001AR+4LKF002AR/115.16	

Cable name: **4LKF002AR/ 4FGR494ZV-B-01**
Cable type: **U1000R2V** No. of conn., diameter, length: **4G2.5 mm² /**
Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF002AR/88.5	=4LKF001AR+4LKF002AR-X 088 05	1:A	**BN**	=4 FGR 494 ZV+4 FGR 494 ZV-M13	U1	=4LKF001AR+4LKF002AR/88.5	
[4 FGR 494 ZV] COOLING FAN 1	=4LKF001AR+4LKF002AR/88.5	=4LKF001AR+4LKF002AR-X 088 05	2:A	**BK**	=4 FGR 494 ZV+4 FGR 494 ZV-M13	V1	=4LKF001AR+4LKF002AR/88.5	
=	=4LKF001AR+4LKF002AR/88.5	=4LKF001AR+4LKF002AR-X 088 05	3:A	**GY**	=4 FGR 494 ZV+4 FGR 494 ZV-M13	W1	=4LKF001AR+4LKF002AR/88.5	
	=4LKF001AR+4LKF002AR/88.7	=4LKF001AR+4LKF002AR-PE		**GNYE**	=4 FGR 494 ZV+4 FGR 494 ZV-M13	PE	=4LKF001AR+4LKF002AR/88.5	

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Cable name: **4LKF002AR/ 4FGR494ZV-C-01**

Cable type: **U1000R2V**

No. of conn., diameter, length: **5G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
LOCAL CONTROL	=4LKF001AR+4LKF002AR/89.9	=4LKF001AR+4LKF002AR-X 089 09	1:A	**BN**	=4 FGR 494 ZV+4 FGR 494 ZV-S?	21	=4LKF001AR+4LKF002AR/89.9	LOCAL STOP
=	=4LKF001AR+4LKF002AR/89.11	=4LKF001AR+4LKF002AR-X 089 09	4:A	**BK**	=4 FGR 494 ZV+4 FGR 494 ZV-S?	13	=4LKF001AR+4LKF002AR/89.9	MARCHE LOCAL
=	=4LKF001AR+4LKF002AR/89.9	=4LKF001AR+4LKF002AR-X 089 09	2:A	**GY**	=4 FGR 494 ZV+4 FGR 494 ZV-S?	14	=4LKF001AR+4LKF002AR/89.9	=
	=4LKF001AR+4LKF002AR/115.2	=4LKF001AR+4LKF002AR-XS 115 02	18:A	**BU**	=4 DEM 071 MO+4 DEM 071 MO-X1	?:A	=4LKF001AR+4LKF002AR/115.2	
	=4LKF001AR+4LKF002AR/115.4	=4LKF001AR+4LKF002AR-PE		**GNYE**	=4 DEM 071 MO+4 DEM 071 MO-PE		=4LKF001AR+4LKF002AR/115.3	

Cable name: **4LKF002AR/ 4FGR494ZV-C-02**

Cable type: **U1000R2V**

No. of conn., diameter, length: **5G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
READY	=4LKF001AR+4LKF002AR/90.10	=4LKF001AR+4LKF002AR-X 090 06	3:A	**BN**	=4 FGR 494 ZV+4 FGR 494 ZV-S?	21	=4LKF001AR+4LKF002AR/90.10	LOCAL STOP
=	=4LKF001AR+4LKF002AR/90.10	=4LKF001AR+4LKF002AR-X 090 06	6:A	**BK**	=4 FGR 494 ZV+4 FGR 494 ZV-S?	22	=4LKF001AR+4LKF002AR/90.10	=
	=4LKF001AR+4LKF002AR/115.6	=4LKF001AR+4LKF002AR-XS 115 02	19:A	**GY**	=4 DEM 071 MO+4 DEM 071 MO-X1	?:A	=4LKF001AR+4LKF002AR/115.6	
	=4LKF001AR+4LKF002AR/115.7	=4LKF001AR+4LKF002AR-XS 115 02	20:A	**BU**	=4 DEM 071 MO+4 DEM 071 MO-X1	?:A	=4LKF001AR+4LKF002AR/115.7	
	=4LKF001AR+4LKF002AR/115.8	=4LKF001AR+4LKF002AR-PE		**GNYE**	=4 DEM 071 MO+4 DEM 071 MO-PE		=4LKF001AR+4LKF002AR/115.8	

Terminal diagram

Strip

A SIDE =4LKF001AR+4LKF002AR-X 082 05 B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Terminal	Wiring	Target designation
/82.5	=4 DEM 071 MO+4 DEM 071 MO-M11:U1	4LKF002AR/ 4DEM071MO-B-01 U1000R2V 4G2.5 mm²	BN 2.5 mm²	'		1	BK 2.5 mm²	-KM 082 05:2/T1
/82.5	=4 DEM 071 MO+4 DEM 071 MO-M11:V1	4LKF002AR/ 4DEM071MO-B-01 U1000R2V 4G2.5 mm²	BK 2.5 mm²	'		2	BK 2.5 mm²	-KM 082 05:4/T2
/82.5	=4 DEM 071 MO+4 DEM 071 MO-M11:W1	4LKF002AR/ 4DEM071MO-B-01 U1000R2V 4G2.5 mm²	GY 2.5 mm²	'		3	BK 2.5 mm²	-KM 082 05:6/T3

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF002AR-X 083 09

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/83.9	=4 DEM 071 MO+4 DEM 071 MO-S?:21	4LKF002AR/ 4DEM071MO-C-01 U1000R2V 5G1.5 mm²	BN 1.5 mm²		1	WH 1 mm²	-Q 082 05:21
/83.9	=4 DEM 071 MO+4 DEM 071 MO-S?:14	4LKF002AR/ 4DEM071MO-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²		2	WH 1 mm²	-K 083 16:11
					3	WH 1 mm²	-KM 082 05:74
/83.9	=4 DEM 071 MO+4 DEM 071 MO-S?:13	4LKF002AR/ 4DEM071MO-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²		4	WH 1 mm²	-KM 082 05:73
					5		
					6	WH 1 mm²	-S 083 06.1:23
					7		
					8		
					9		
					10		

Terminal diagram

Strip

=4LKF001AR+4LKF002AR-X 084 06

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1		
					2	RD 1 mm²	-KM 082 05:83
/84.10	=4 DEM 071 MO+4 DEM 071 MO-S?:31	4LKF002AR/ 4DEM071MO-C-02 U1000R2V 5G1.5 mm²	BN 1.5 mm²		3		
					4		
					5	RD 1 mm²	-KM 082 05:84
/84.10	=4 DEM 071 MO+4 DEM 071 MO-S?:32	4LKF002AR/ 4DEM071MO-C-02 U1000R2V 5G1.5 mm²	BK 1.5 mm²		6	RD 1 mm²	-K 083 16:21
					7	RD 1 mm²	-S 083 06.1:34

Terminal diagram

A SIDE

Strip
=4LKF001AR+4LKF002AR-X 085 05

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/85.5	=4 FGR 484 MO+4 FGR 484 MO-M12:U1	4LKF002AR/ 4FGR484MO-B-01 U1000R2V 4G2.5 mm²	BN 2.5 mm²	'	1	BK 2.5 mm²	-KM 085 05:2/T1
/85.5	=4 FGR 484 MO+4 FGR 484 MO-M12:V1	4LKF002AR/ 4FGR484MO-B-01 U1000R2V 4G2.5 mm²	BK 2.5 mm²	'	2	BK 2.5 mm²	-KM 085 05:4/T2
/85.5	=4 FGR 484 MO+4 FGR 484 MO-M12:W1	4LKF002AR/ 4FGR484MO-B-01 U1000R2V 4G2.5 mm²	GY 2.5 mm²	'	3	BK 2.5 mm²	-KM 085 05:6/T3

Terminal diagram

Strip

=4LKF001AR+4LKF002AR-X 086 09

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/86.9	=4 FGR 484 MO+4 FGR 484 MO-S?:21	4LKF002AR/ 4FGR484MO-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²		1	WH 1 mm²	-Q 085 05:21
/86.9	=4 FGR 484 MO+4 FGR 484 MO-S?:14	4LKF002AR/ 4FGR484MO-C-01 U1000R2V 5G1.5 mm²	BN 1.5 mm²		2	WH 1 mm²	-K 086 16:11
					3	WH 1 mm²	-KM 085 05:74
/86.9	=4 FGR 484 MO+4 FGR 484 MO-S?:13	4LKF002AR/ 4FGR484MO-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²		4	WH 1 mm²	-KM 085 05:73
					5		
					6	WH 1 mm²	-S 086 06.1:23
					7		
					8		
					9		
					10		

Terminal diagram

Strip

=4LKF001AR+4LKF002AR-X 087 06

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1		
					2	RD 1 mm²	-KM 085 05:83
/87.10	=4 FGR 484 MO+4 FGR 484 MO-S?:31	4LKF002AR/ 4FGR484MO-C-02 U1000R2V 5G1.5 mm²	BN 1.5 mm²		3		
					4		
					5	RD 1 mm²	-KM 085 05:84
/87.10	=4 FGR 484 MO+4 FGR 484 MO-S?:32	4LKF002AR/ 4FGR484MO-C-02 U1000R2V 5G1.5 mm²	BK 1.5 mm²		6	RD 1 mm²	-K 086 16:21
					7	RD 1 mm²	-S 086 06.1:34

Terminal diagram

Strip

=4LKF001AR+4LKF002AR-X 088 05

A SIDE

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/88.5	=4 FGR 494 ZV+4 FGR 494 ZV-M13:U1	4LKF002AR/ 4FGR494ZV-B-01 U1000R2V 4G2.5 mm²	BN 2.5 mm²	'	1	BK 2.5 mm²	-KM 088 05:2/T1
/88.5	=4 FGR 494 ZV+4 FGR 494 ZV-M13:V1	4LKF002AR/ 4FGR494ZV-B-01 U1000R2V 4G2.5 mm²	BK 2.5 mm²	'	2	BK 2.5 mm²	-KM 088 05:4/T2
/88.5	=4 FGR 494 ZV+4 FGR 494 ZV-M13:W1	4LKF002AR/ 4FGR494ZV-B-01 U1000R2V 4G2.5 mm²	GY 2.5 mm²	'	3	BK 2.5 mm²	-KM 088 05:6/T3

Terminal diagram

Strip
=4LKF001AR+4LKF002AR-X 089 09

A SIDE — B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/89.9	=4 FGR 494 ZV+4 FGR 494 ZV-S?:21	4LKF002AR/ 4FGR494ZV-C-01 U1000R2V 5G1.5 mm²	BN 1.5 mm²		1	WH 1 mm²	-Q 088 05:21
/89.9	=4 FGR 494 ZV+4 FGR 494 ZV-S?:14	4LKF002AR/ 4FGR494ZV-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²		2	WH 1 mm²	-K 089 16:11
					3	WH 1 mm²	-KM 088 05:74
/89.9	=4 FGR 494 ZV+4 FGR 494 ZV-S?:13	4LKF002AR/ 4FGR494ZV-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²		4	WH 1 mm²	-KM 088 05:73
					5		
					6	WH 1 mm²	-S 089 06.1:23
					7		
					8		
					9		
					10		

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF002AR-X 090 06

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1		
					2	RD 1 mm²	-KM 088 05:83
/90.10	=4 FGR 494 ZV+4 FGR 494 ZV-S?:21	4LKF002AR/ 4FGR494ZV-C-02 U1000R2V 5G1.5 mm²	BN 1.5 mm²		3		
					4		
					5	RD 1 mm²	-KM 088 05:84
/90.10	=4 FGR 494 ZV+4 FGR 494 ZV-S?:22	4LKF002AR/ 4FGR494ZV-C-02 U1000R2V 5G1.5 mm²	BK 1.5 mm²		6	RD 1 mm²	-K 089 16:21
					7	RD 1 mm²	-S 089 06.1:34

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF002AR-X 091 04

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Wiring	Target designation
/91.4	=4CRF152AR+4CRF152AR-Q??:L1	4LKF002AR/ 4CRF152AR-B-01 U1000R2V 4G6 mm²	BN 6 mm²	'	1	BK 6 mm²	-Q 091 04:2
/91.4	=4CRF152AR+4CRF152AR-Q??:L2	4LKF002AR/ 4CRF152AR-B-01 U1000R2V 4G6 mm²	BK 6 mm²	'	2	BK 6 mm²	-Q 091 04:4
/91.5	=4CRF152AR+4CRF152AR-Q??:L3	4LKF002AR/ 4CRF152AR-B-01 U1000R2V 4G6 mm²	GY 6 mm²	'	3	BK 6 mm²	-Q 091 04:6

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF002AR-X 092 04

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/92.4	=4CTE111CR+4CTE111CR-Q??:L1	4LKF002AR/ 4CTE111CR-B-01 U1000R2V 4G6 mm²	BN 6 mm²	'	1	BK 6 mm²	-Q 092 04:2
/92.4	=4CTE111CR+4CTE111CR-Q??:L2	4LKF002AR/ 4CTE111CR-B-01 U1000R2V 4G6 mm²	BK 6 mm²	'	2	BK 6 mm²	-Q 092 04:4
/92.5	=4CTE111CR+4CTE111CR-Q??:L3	4LKF002AR/ 4CTE111CR-B-01 U1000R2V 4G6 mm²	GY 6 mm²	'	3	BK 6 mm²	-Q 092 04:6

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF002AR-X 092 09

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/92.9	=4CTE066AR+4CTE066AR-Q??:L1	4LKF002AR/ 4CTE066AR-B-01 U1000R2V 4G4 mm²	BN 4 mm²	'	1	BK 4 mm²	-Q 092 09:2
/92.9	=4CTE066AR+4CTE066AR-Q??:L2	4LKF002AR/ 4CTE066AR-B-01 U1000R2V 4G4 mm²	BK 4 mm²	'	2	BK 4 mm²	-Q 092 09:4
/92.9	=4CTE066AR+4CTE066AR-Q??:L3	4LKF002AR/ 4CTE066AR-B-01 U1000R2V 4G4 mm²	GY 4 mm²	'	3	BK 4 mm²	-Q 092 09:6

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF002AR-X 092 13

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/92.13	=4CTE065AR+4CTE065AR-Q??:L1	4LKF002AR/ 4CTE065AR-B-01 U1000R2V 4G4 mm²	BN 4 mm²	'	1	BK 4 mm²	-Q 092 13:2
/92.14	=4CTE065AR+4CTE065AR-Q??:L2	4LKF002AR/ 4CTE065AR-B-01 U1000R2V 4G4 mm²	BK 4 mm²	'	2	BK 4 mm²	-Q 092 13:4
/92.14	=4CTE065AR+4CTE065AR-Q??:L3	4LKF002AR/ 4CTE065AR-B-01 U1000R2V 4G4 mm²	GY 4 mm²	'	3	BK 4 mm²	-Q 092 13:6

Terminal diagram

Strip

A SIDE =4LKF001AR+4LKF002AR-X 093 04 B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/93.4	=4CTE???AR+4CTE???AR-Q??:L1	4LKF002AR/ 4CTE???CR-B-01 U1000R2V 4G6 mm²	BN 6 mm²	'	1	BK 6 mm²	-Q 093 04:2
/93.4	=4CTE???AR+4CTE???AR-Q??:L2	4LKF002AR/ 4CTE???CR-B-01 U1000R2V 4G6 mm²	BK 6 mm²	'	2	BK 6 mm²	-Q 093 04:4
/93.5	=4CTE???AR+4CTE???AR-Q??:L3	4LKF002AR/ 4CTE???CR-B-01 U1000R2V 4G6 mm²	GY 6 mm²	'	3	BK 6 mm²	-Q 093 04:6

Terminal diagram

A SIDE

Strip
=4LKF001AR+4LKF002AR-XB 093 03

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
+4LKF001AR/41.4	+4LKF001AR-HL 041 04:2		GY 1 mm²		1	GY 1 mm²	-RP 083 05:A2
					2	GY 1 mm²	-RP 086 05:A2
					3	GY 1 mm²	-RP 089 05:A2
					4		
					5		
+4LKF005AR/372.3	+4LKF005AR-XB 372 03:1:A		GY 1 mm²		6		

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF002AR-XS 111 03

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1		
					2	RD 1 mm²	-QB 081 09:11
					3	RD 1 mm²	-Q 091 04:11
					4		
					5	RD 1 mm²	-QB 081 09:14
					6	RD 1 mm²	-Q 091 04:14
					7	RD 1 mm²	-Q 092 04:14
					8	RD 1 mm²	-Q 092 09:14
					9	RD 1 mm²	-Q 092 13:14
					10	RD 1 mm²	-Q 093 04:14
					11		
					12		
					13		
					14		

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF002AR-XS 115 02

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1	GNYE 2.5 mm²	-PE1
					2		
					3		
					4		
					5		
					6		
					7		
					8		
					9		
					10		
					11		
/115.2	=4 DEM 071 MO+4 DEM 071 MO-X1:?:A	4LKF002AR/ 4DEM071MO-C-01 U1000R2V 5G1.5 mm²	BU 1.5 mm²		12		
/115.6	=4 DEM 071 MO+4 DEM 071 MO-X1:?:A	4LKF002AR/ 4DEM071MO-C-02 U1000R2V 5G1.5 mm²	GY 1.5 mm²		13		
/115.7	=4 DEM 071 MO+4 DEM 071 MO-X1:?:A	4LKF002AR/ 4DEM071MO-C-02 U1000R2V 5G1.5 mm²	BU 1.5 mm²		14		
/115.11	=4 FGR 484 MO+4 FGR 484 MO-X1:?:A	4LKF002AR/ 4FGR484MO-C-01 U1000R2V 5G1.5 mm²	BU 1.5 mm²		15		
/115.14	=4 FGR 484 MO+4 FGR 484 MO-X1:?:A	4LKF002AR/ 4FGR484MO-C-02 U1000R2V 5G1.5 mm²	GY 1.5 mm²		16		
/115.15	=4 FGR 484 MO+4 FGR 484 MO-X1:?:A	4LKF002AR/ 4FGR484MO-C-02 U1000R2V 5G1.5 mm²	BU 1.5 mm²		17		
/115.2	=4 DEM 071 MO+4 DEM 071 MO-X1:?:A	4LKF002AR/ 4FGR494ZV-C-01 U1000R2V 5G1.5 mm²	BU 1.5 mm²		18		
/115.6	=4 DEM 071 MO+4 DEM 071 MO-X1:?:A	4LKF002AR/ 4FGR494ZV-C-02 U1000R2V 5G1.5 mm²	GY 1.5 mm²		19		
/115.7	=4 DEM 071 MO+4 DEM 071 MO-X1:?:A	4LKF002AR/ 4FGR494ZV-C-02 U1000R2V 5G1.5 mm²	BU 1.5 mm²		20		
					21		
					22		
					23		
					24		
					25		

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF002AR-XS 115 02

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Wiring	Target designation
					26		
					27		
					28		
					29		
					30		

Date:		Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 2
Drawn:					
Approved:	Grga Kolić	Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	Terminal diagram =4LKF001AR+4LKF002AR-XS 115 02
Format:	A3				

SINTAKSA A Voith Company

Project:	Unit & Issuer:	Number:	Revision:	
BRC-4				#Y
Drawing designation:			=4LKF001AR	Sheet: 618
			+4LKF002AR	Next: +4LKF003AR/2

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Table of contents

Table of contents

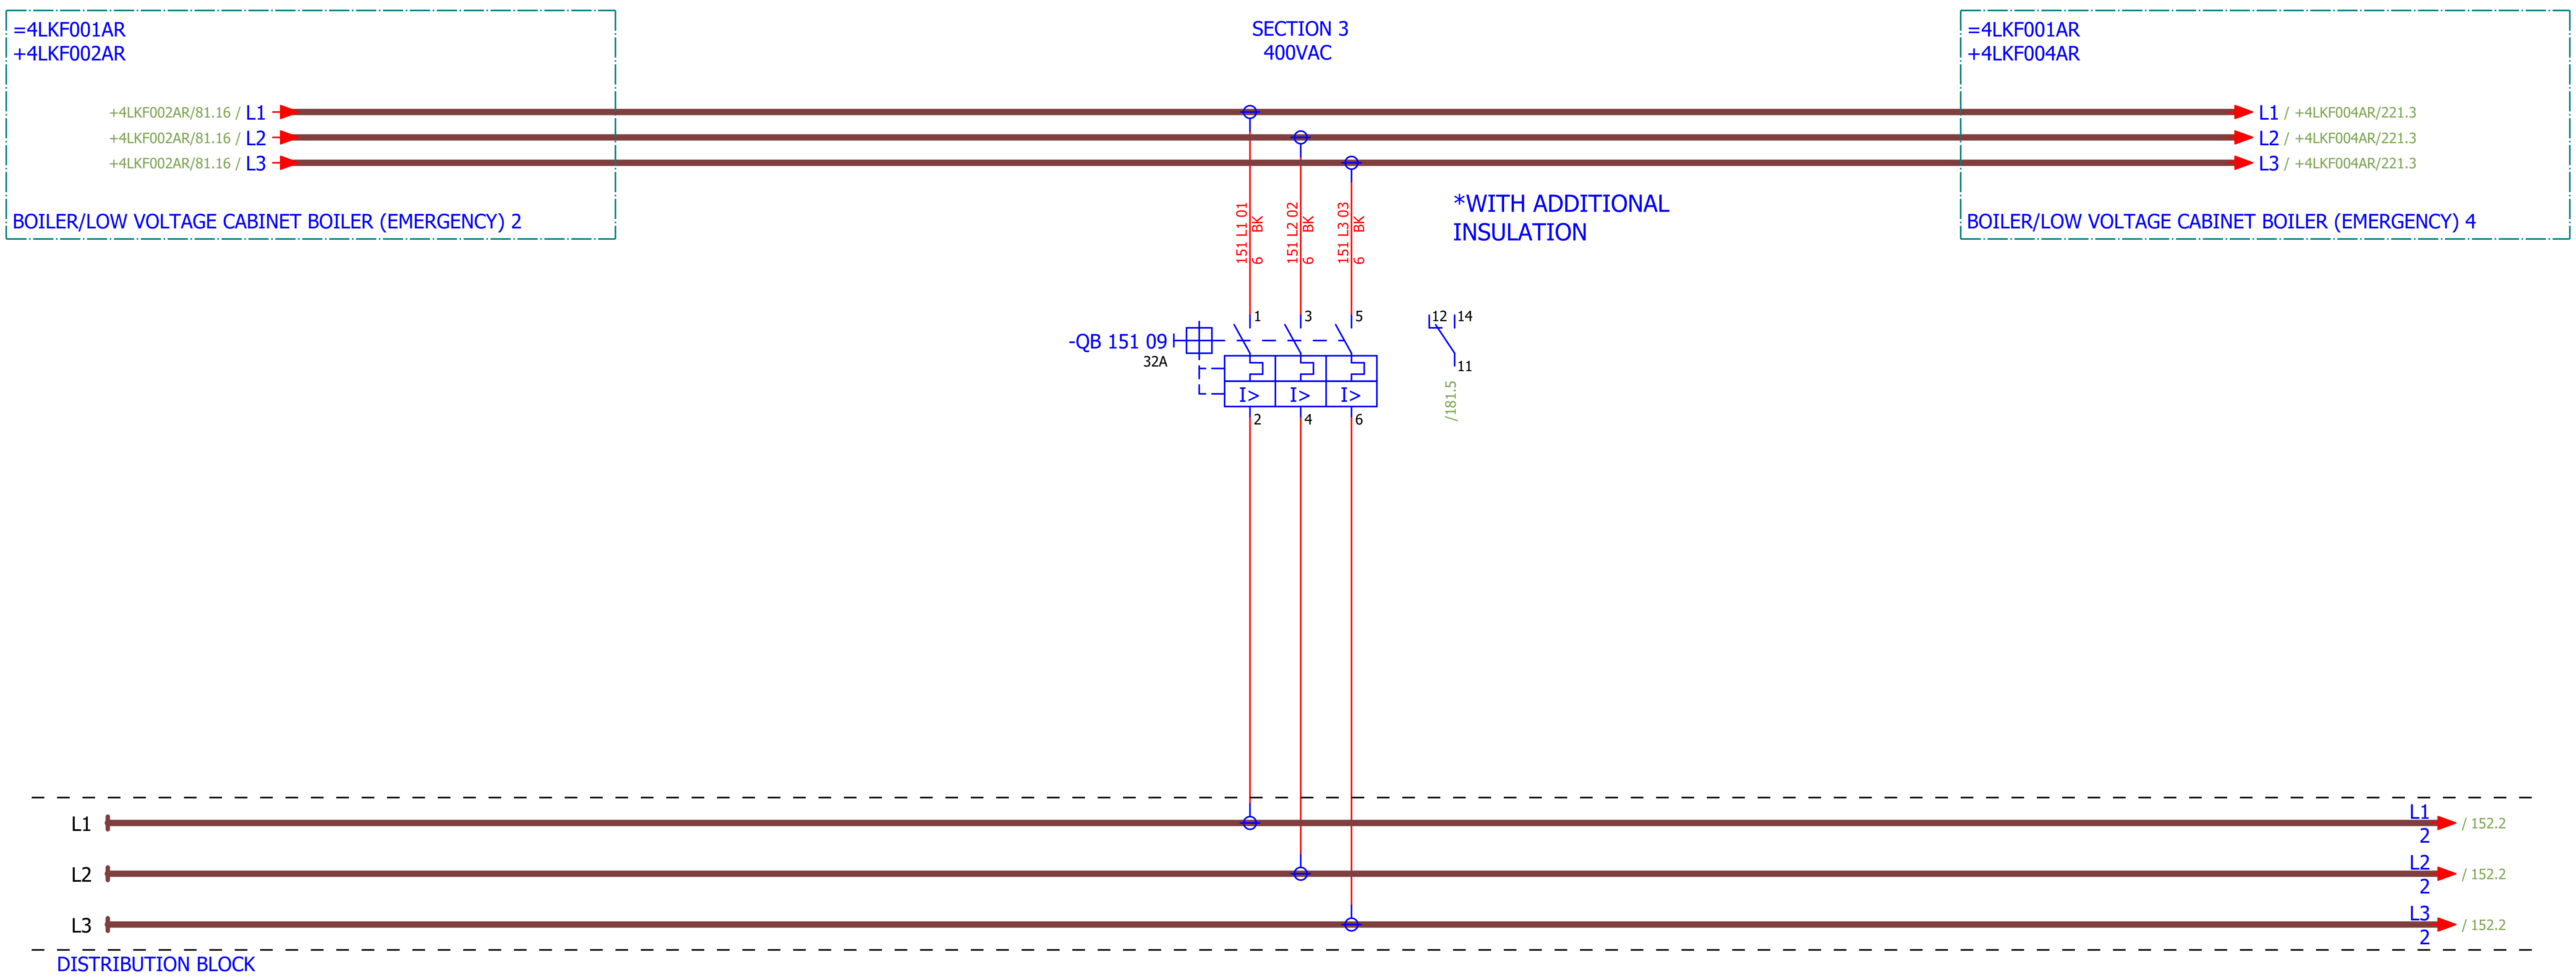

NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: 400VAC DISTRIBUTION	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 151
Format:	A3								+4LKF003AR	Next: 152

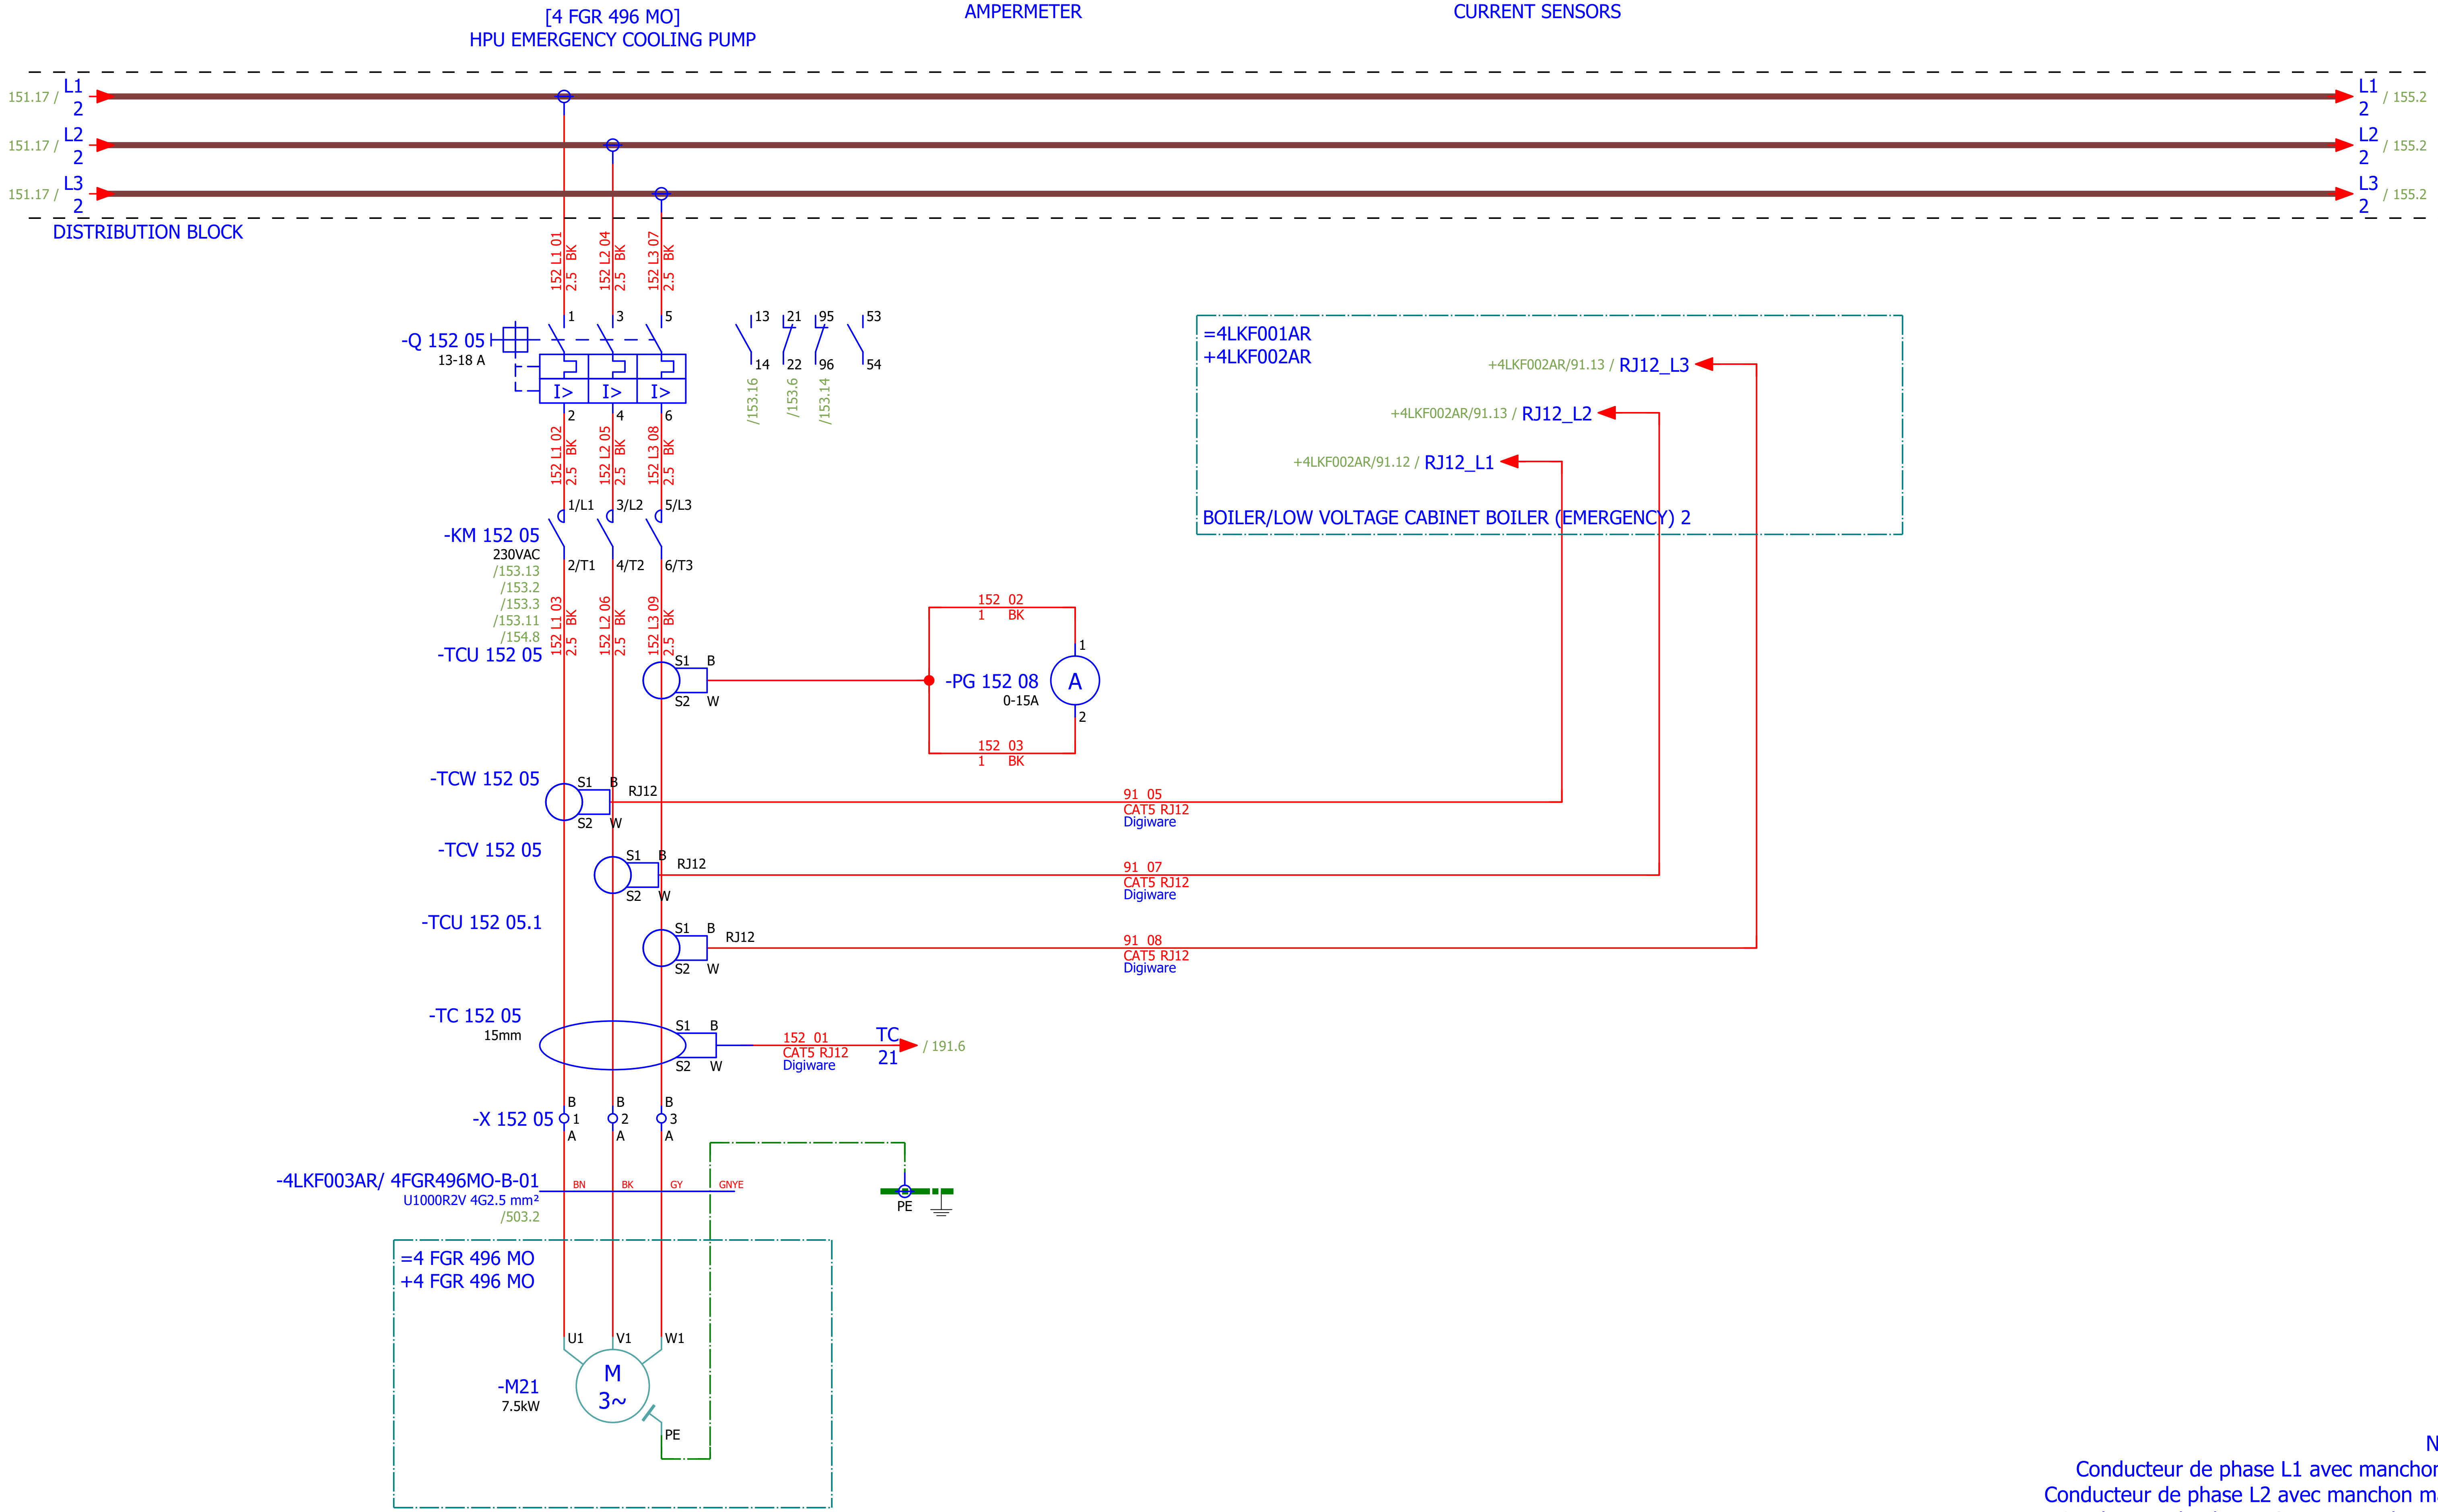

NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Luka Božičević										
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	HPU EMERGENCY COOLING PUMP	Drawing designation:	BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 152
Format:	A3									+4LKF003AR	Next: 153

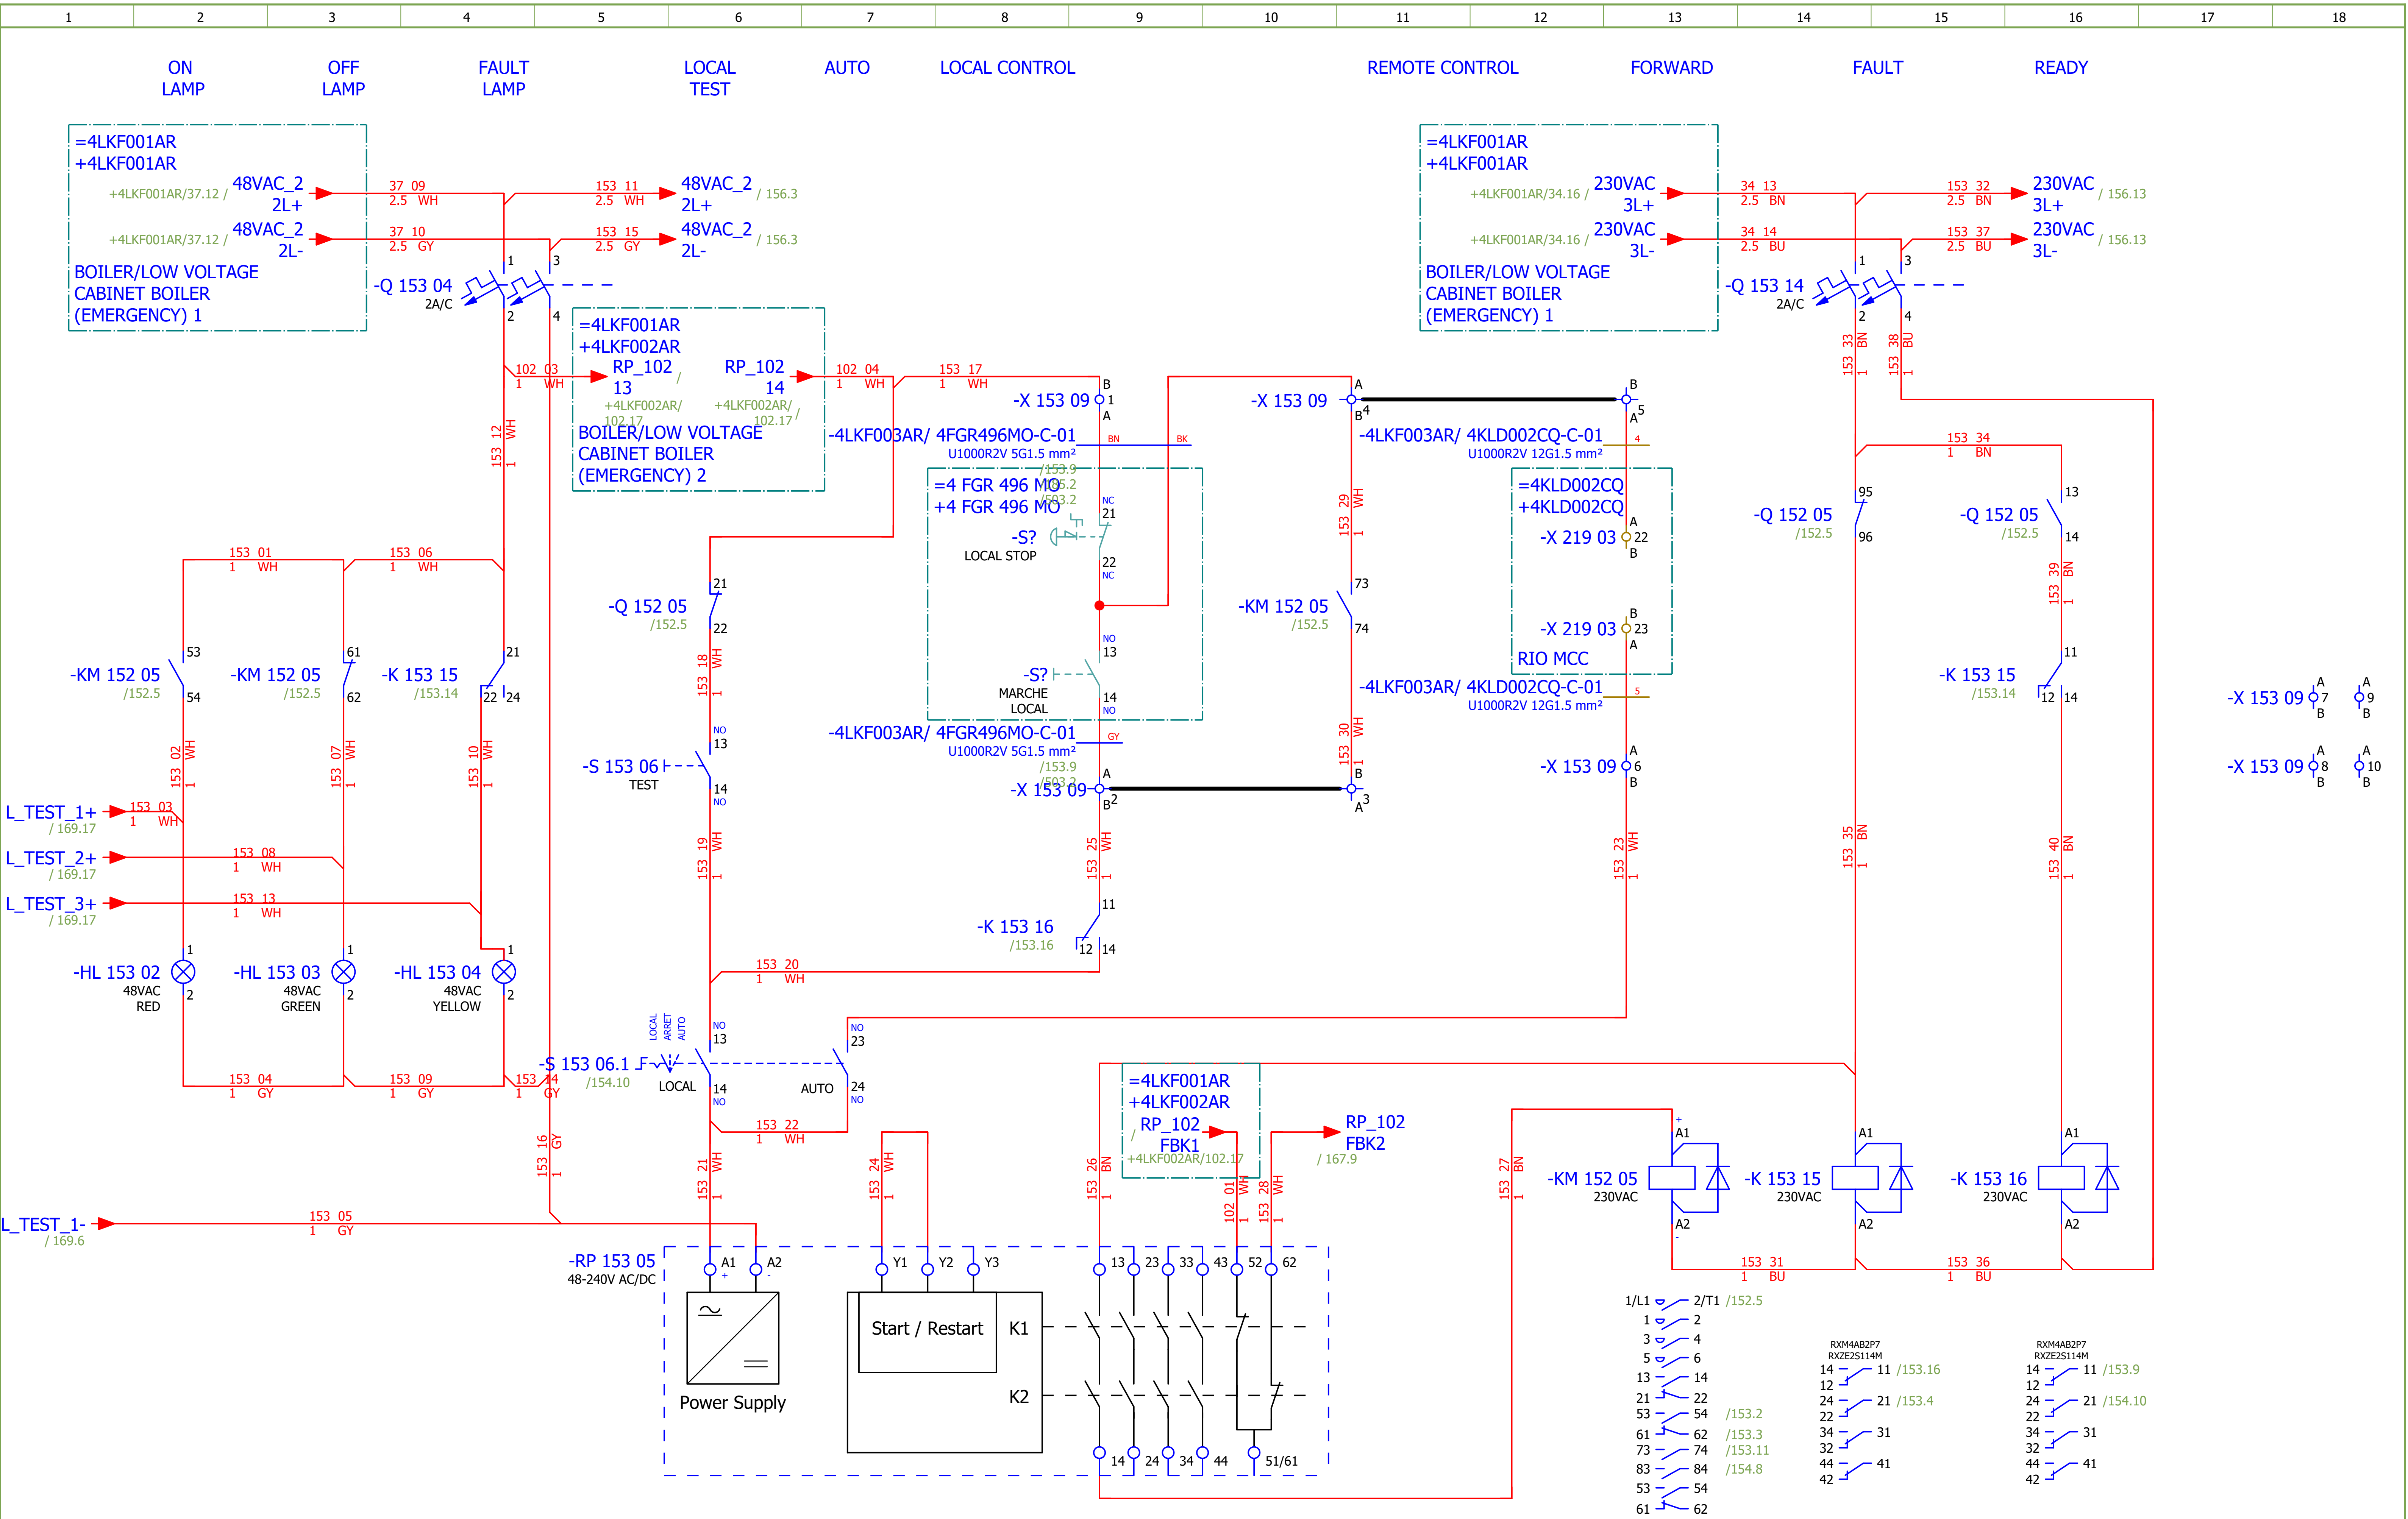

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870
Drawn:	Luka Božičević							Revision: F
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: HPU EMERGENCY COOLING PUMP - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F	=4LKF001AR	Sheet: 153
Format:	A3						+4LKF003AR	Next: 154

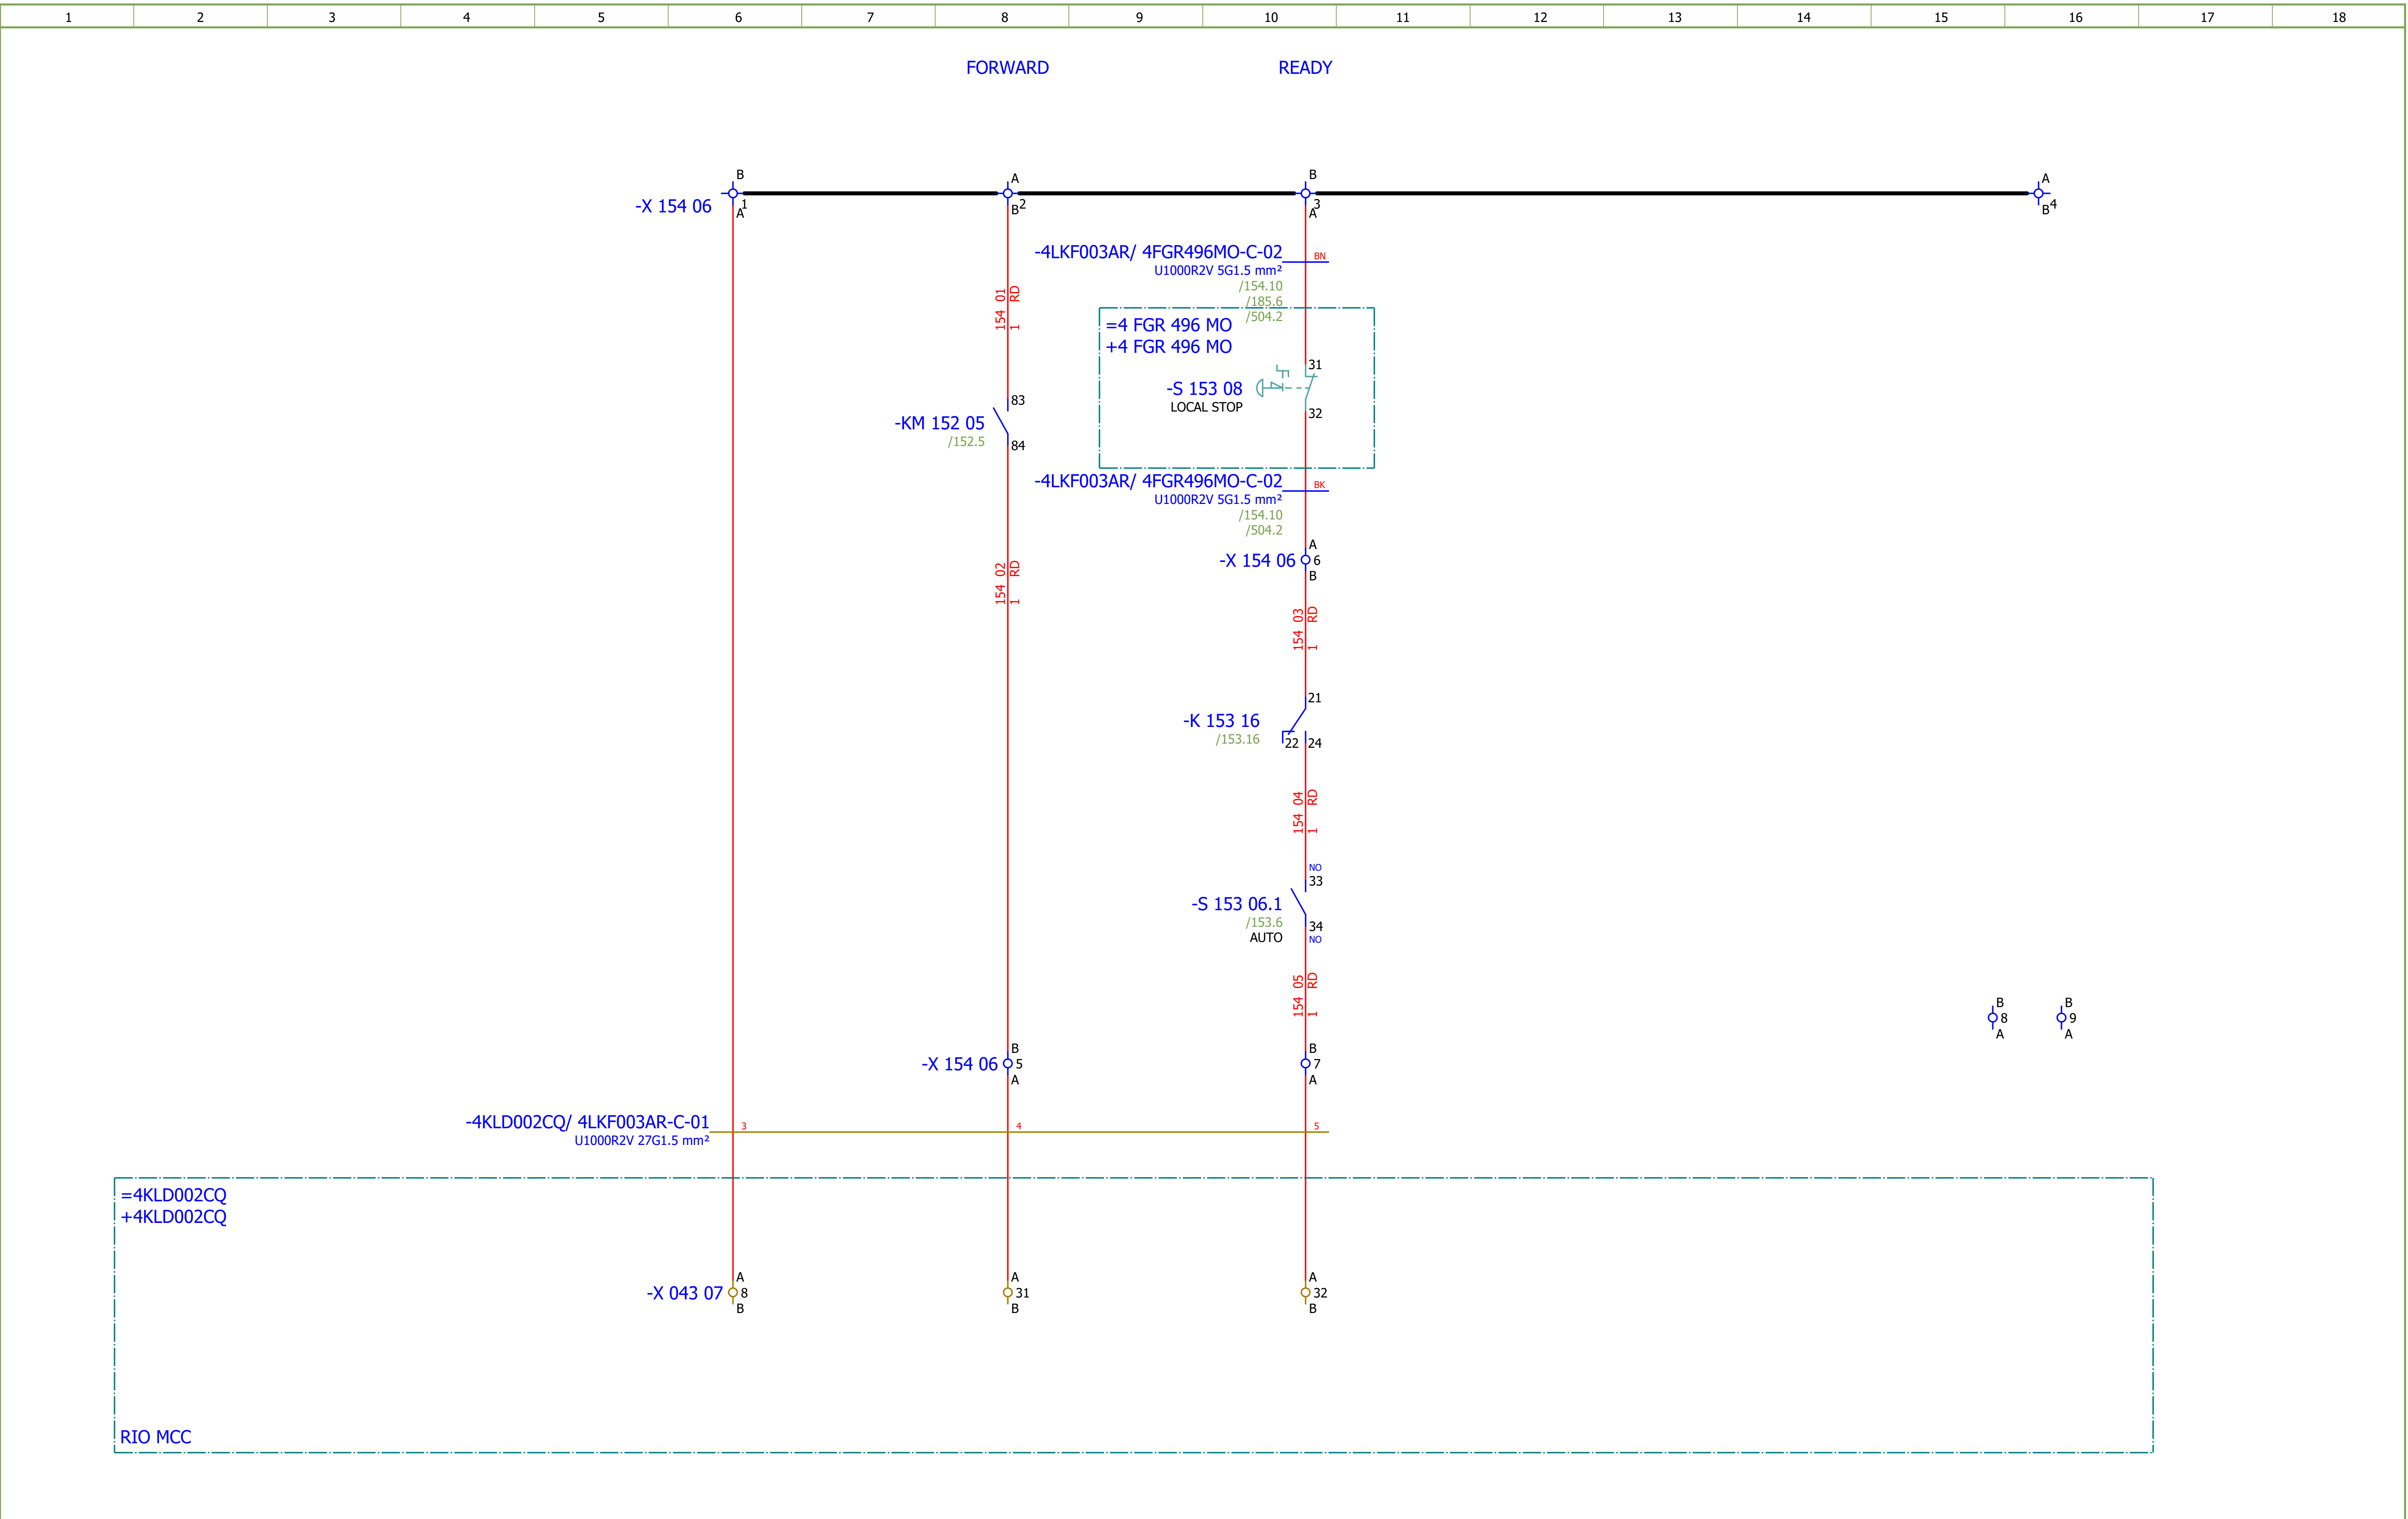

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	
Drawn:	Luka Božičević										#D
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	HPU EMERGENCY COOLING PUMP - SINGALIZATION	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 154
Format:	A3									+4LKF003AR	Next: 155

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

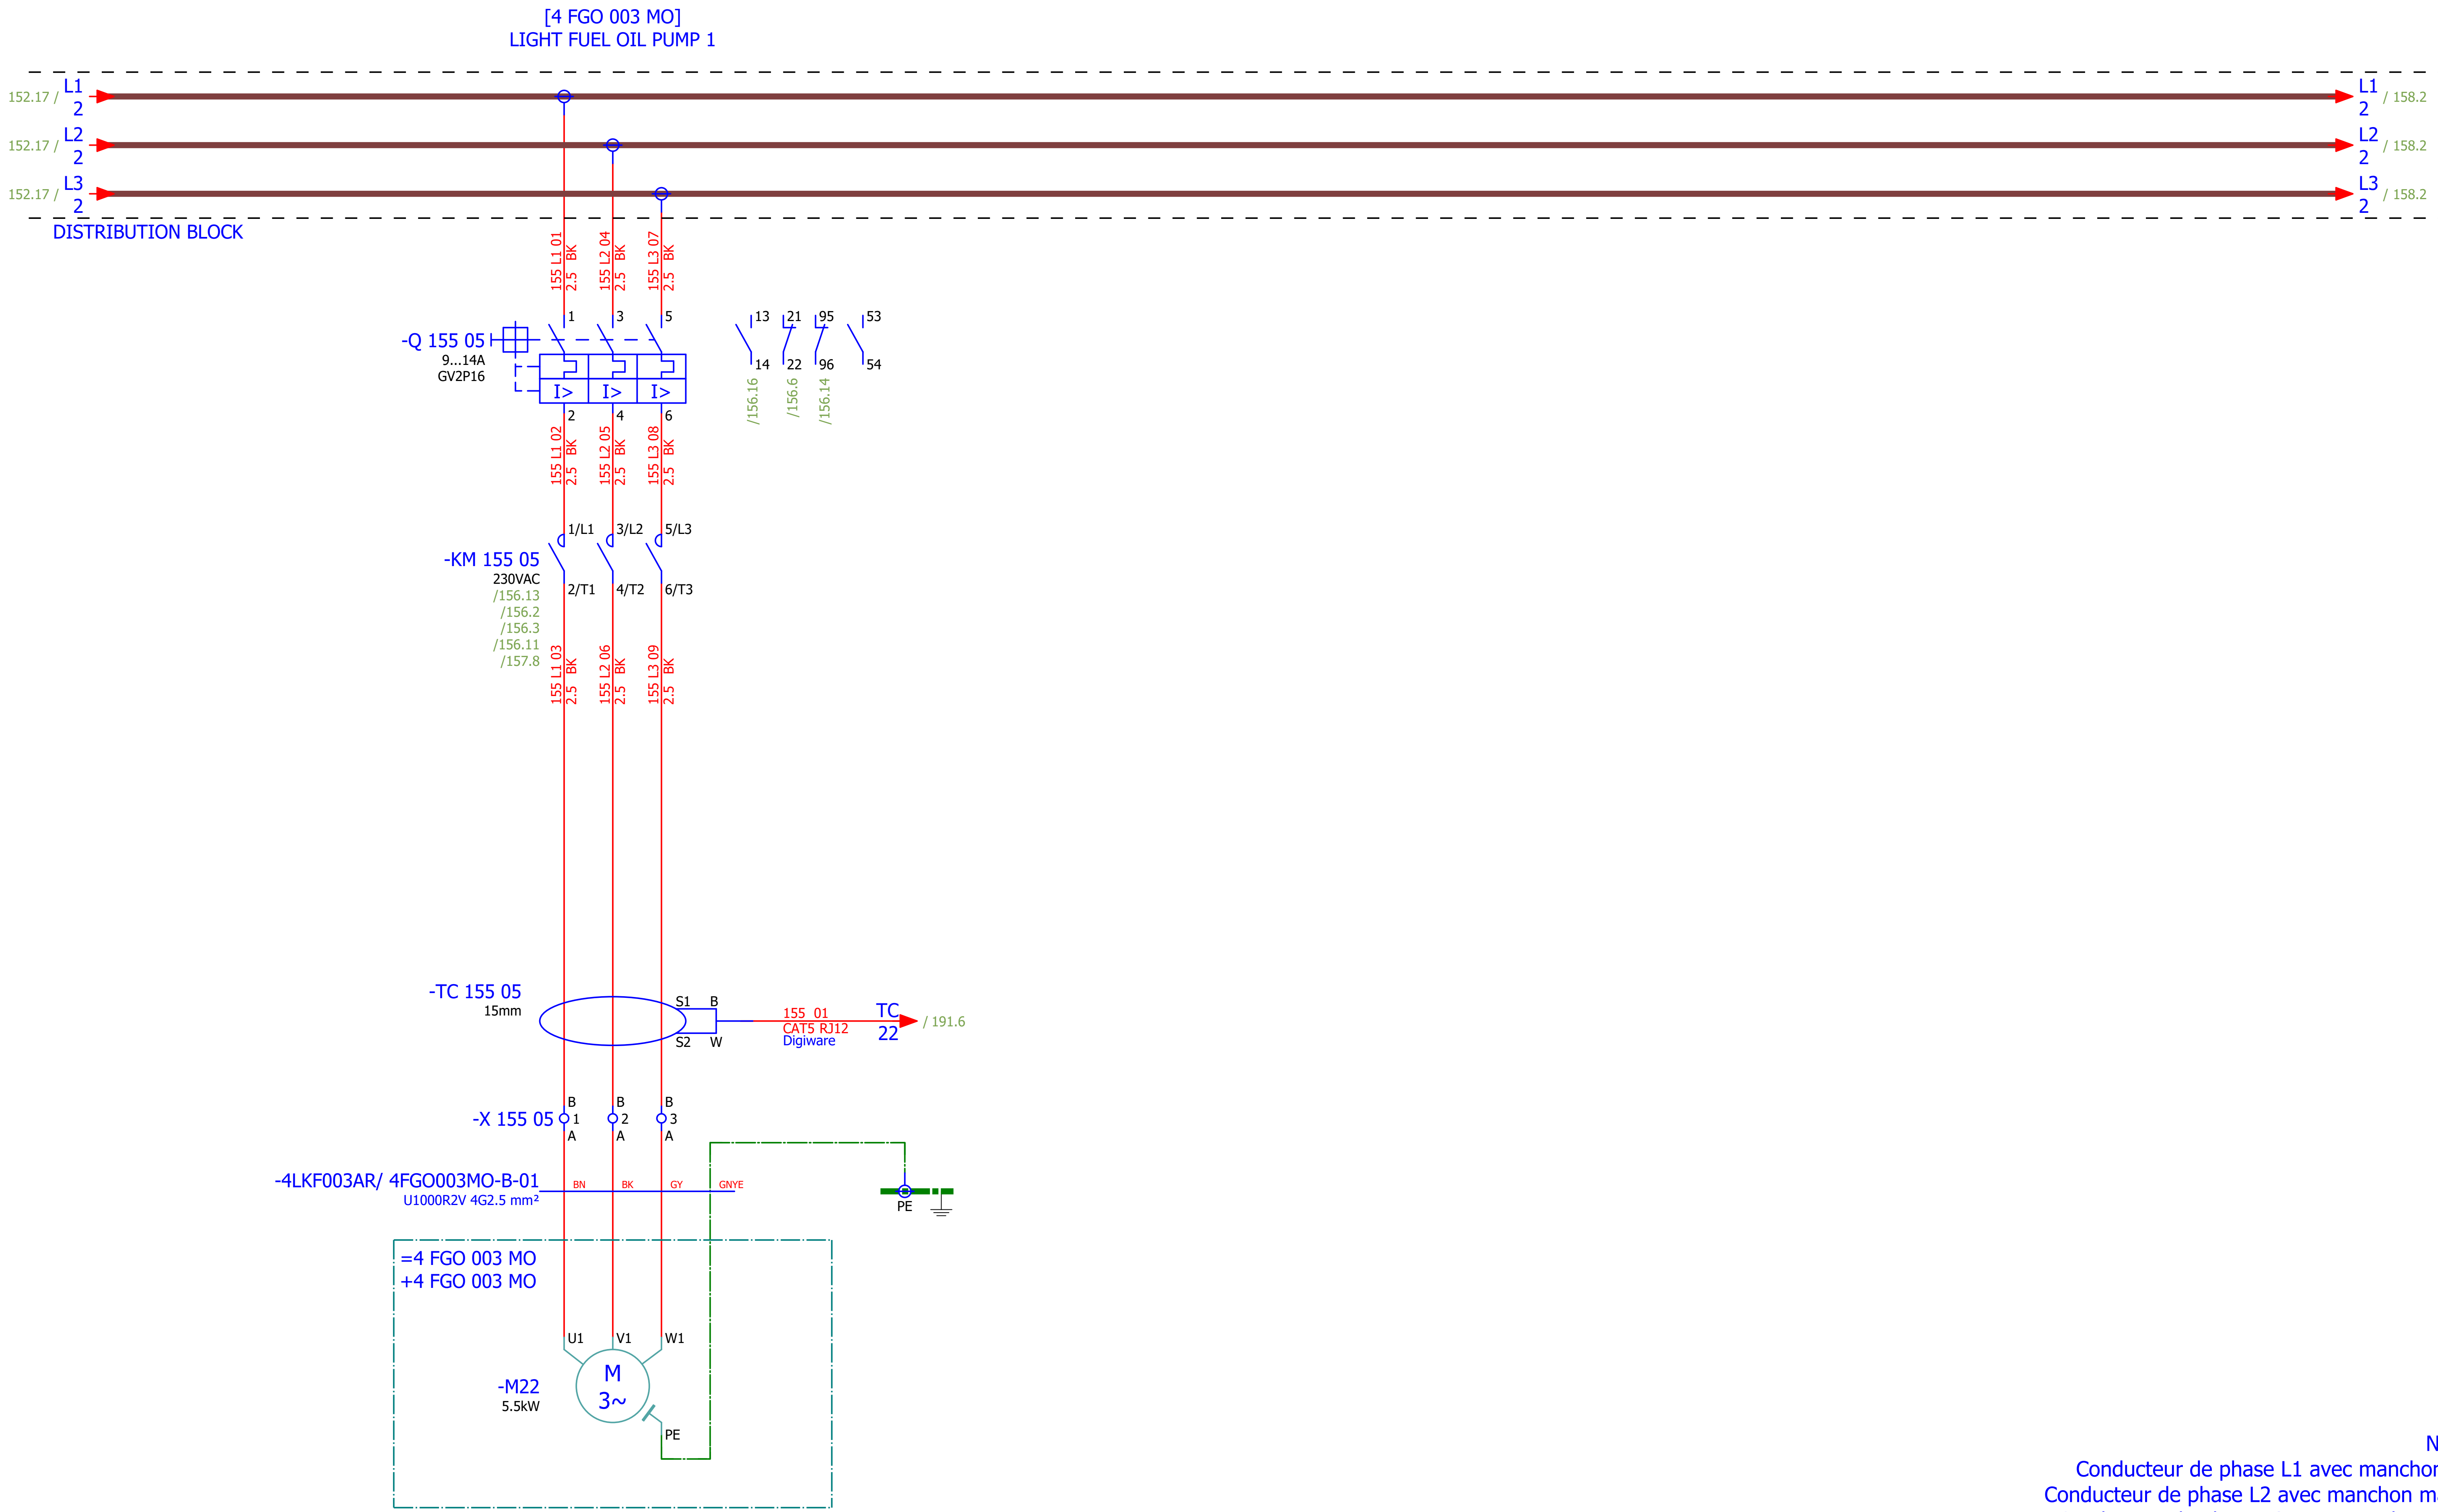

NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Luka Božičević								#D
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: LIGHT FUEL OIL PUMP 1	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 155
Format:	A3							+4LKF003AR	Next: 156

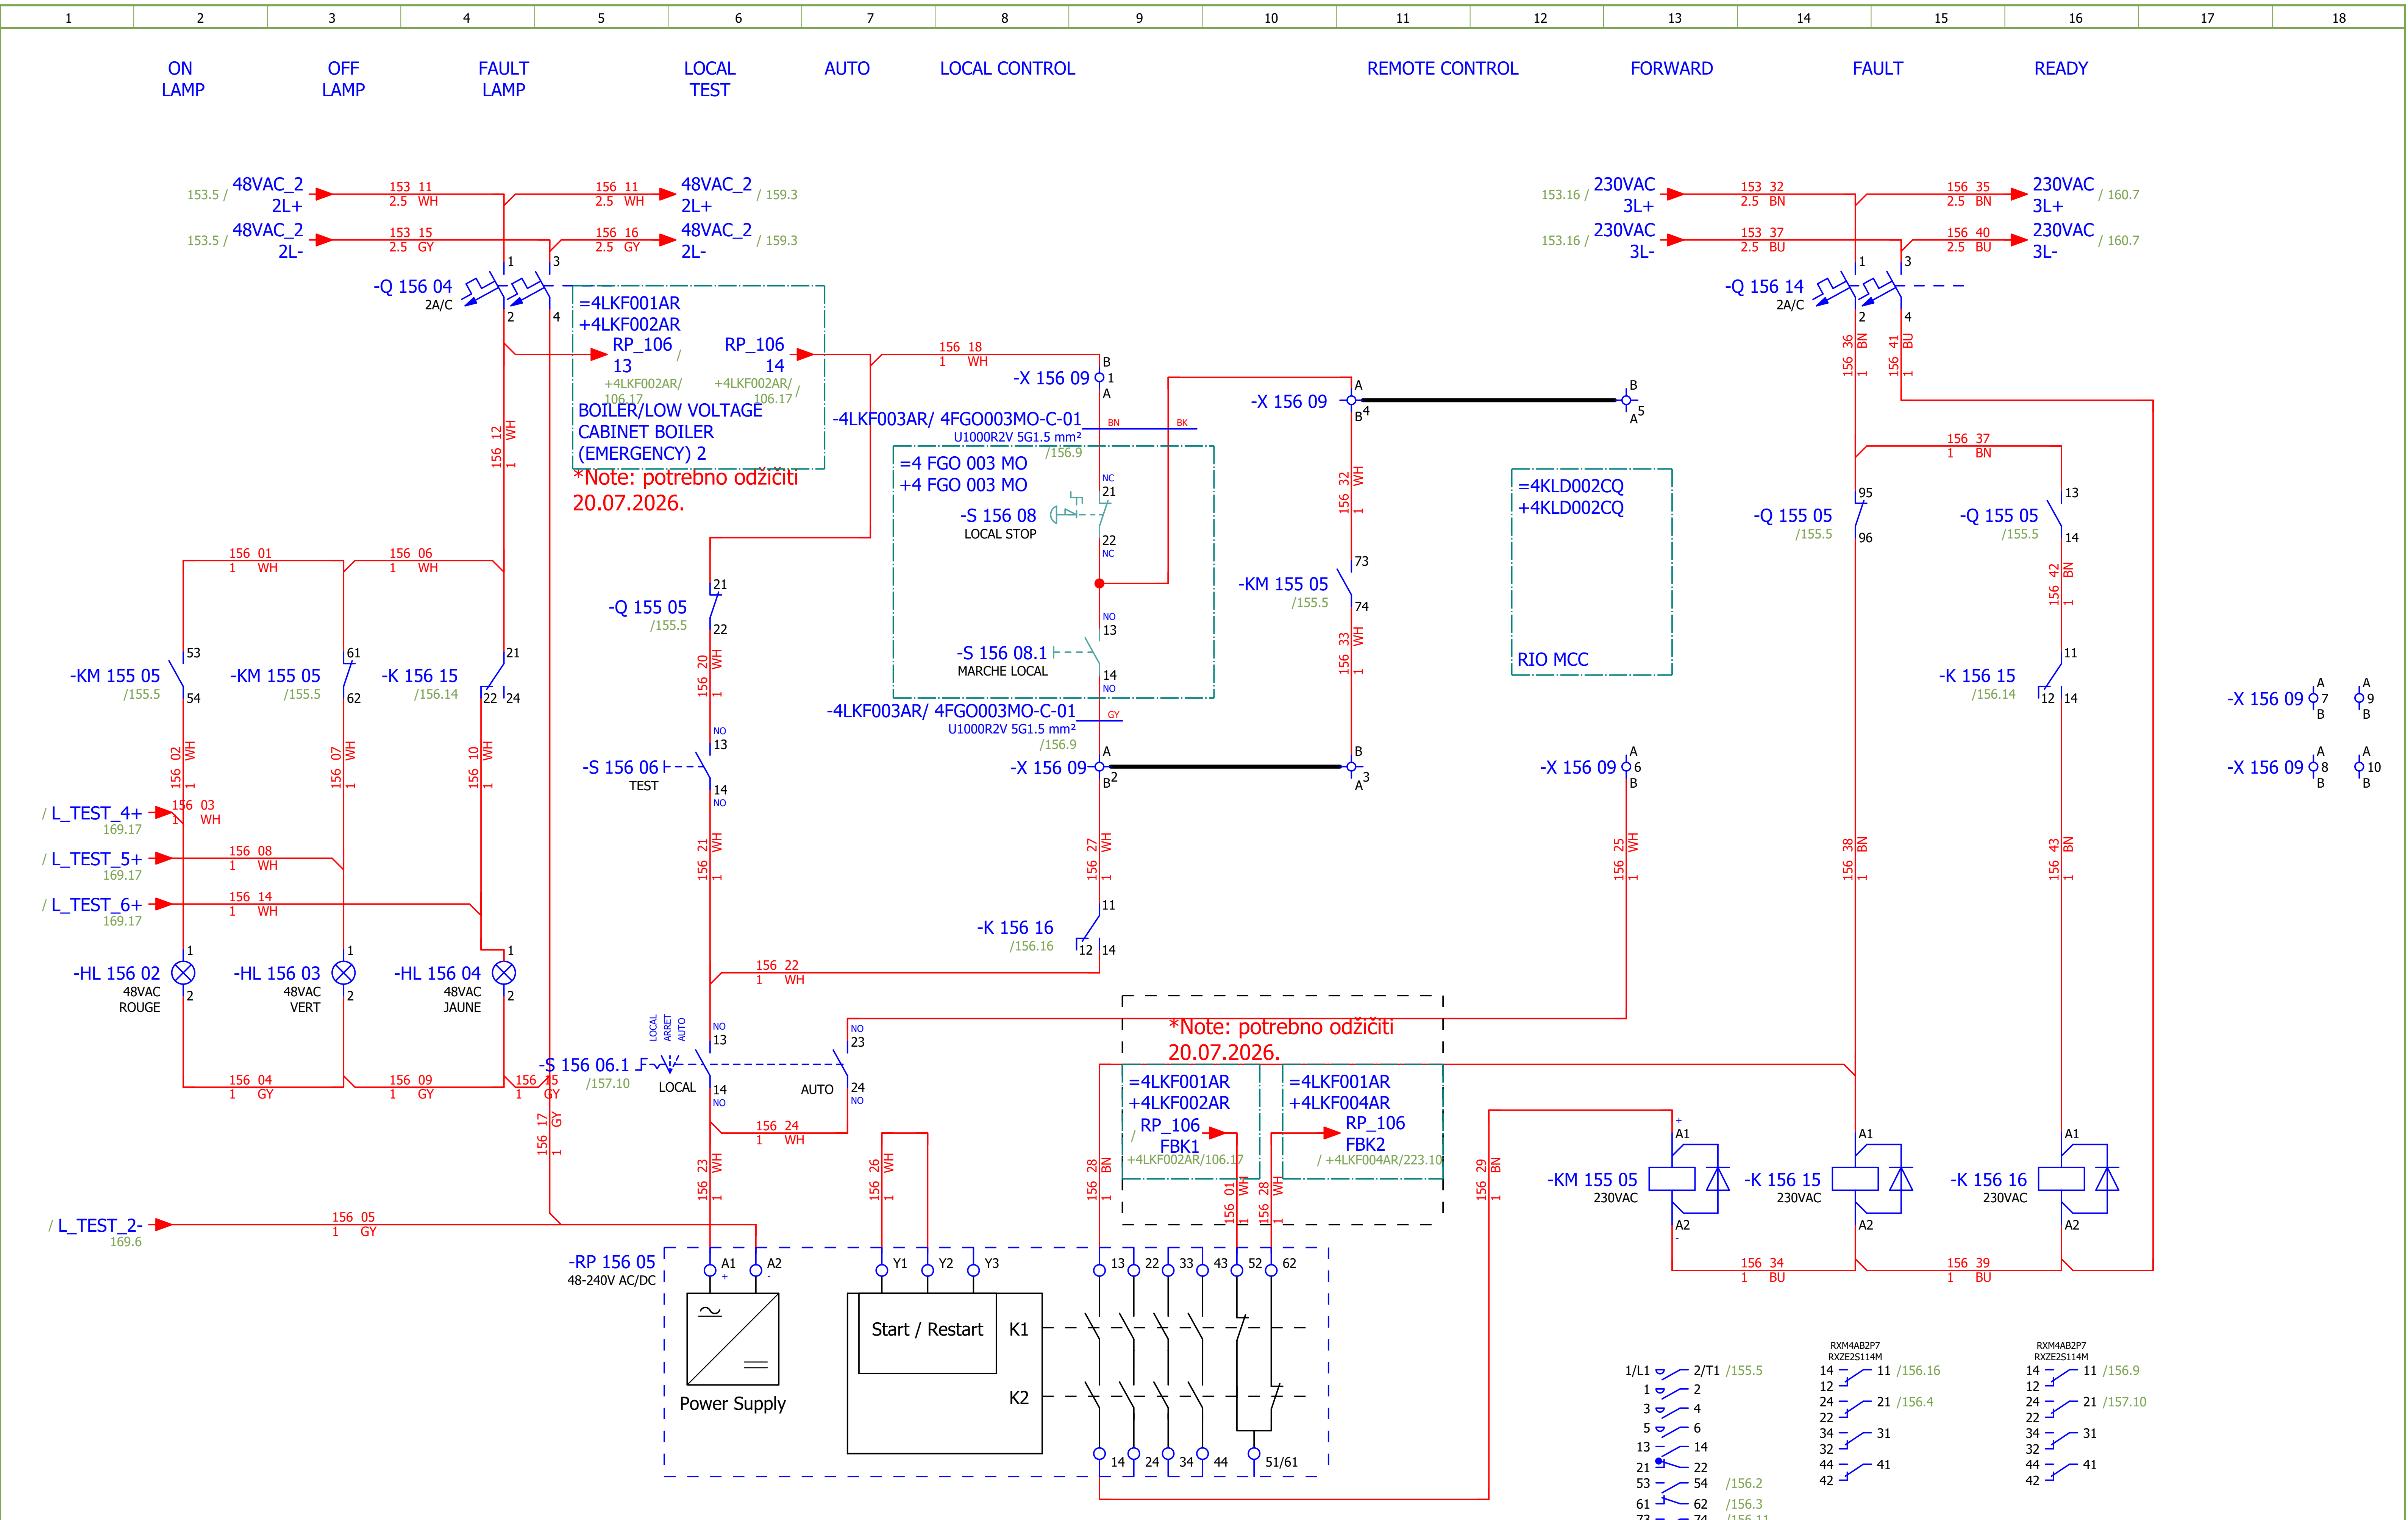

Date: 17.03.2026.	Client: ANDRITZ TEP d.o.o., Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4
Drawn: Luka Božičević			Unit & Issuer: ATEP0
Approved: Grga Kolić	Object: RDF Albioma Les Bois Rouge, Reunion - France	Content: LIGHT FUEL OIL PUMP 1 - CONTROL	Number: 1870
Format: A3		Drawing designation: BRC-4-ATEP0-1870-F	Revision: F

SINTAKSA A Voith Company

#D

=4LKF001AR +4LKF003AR

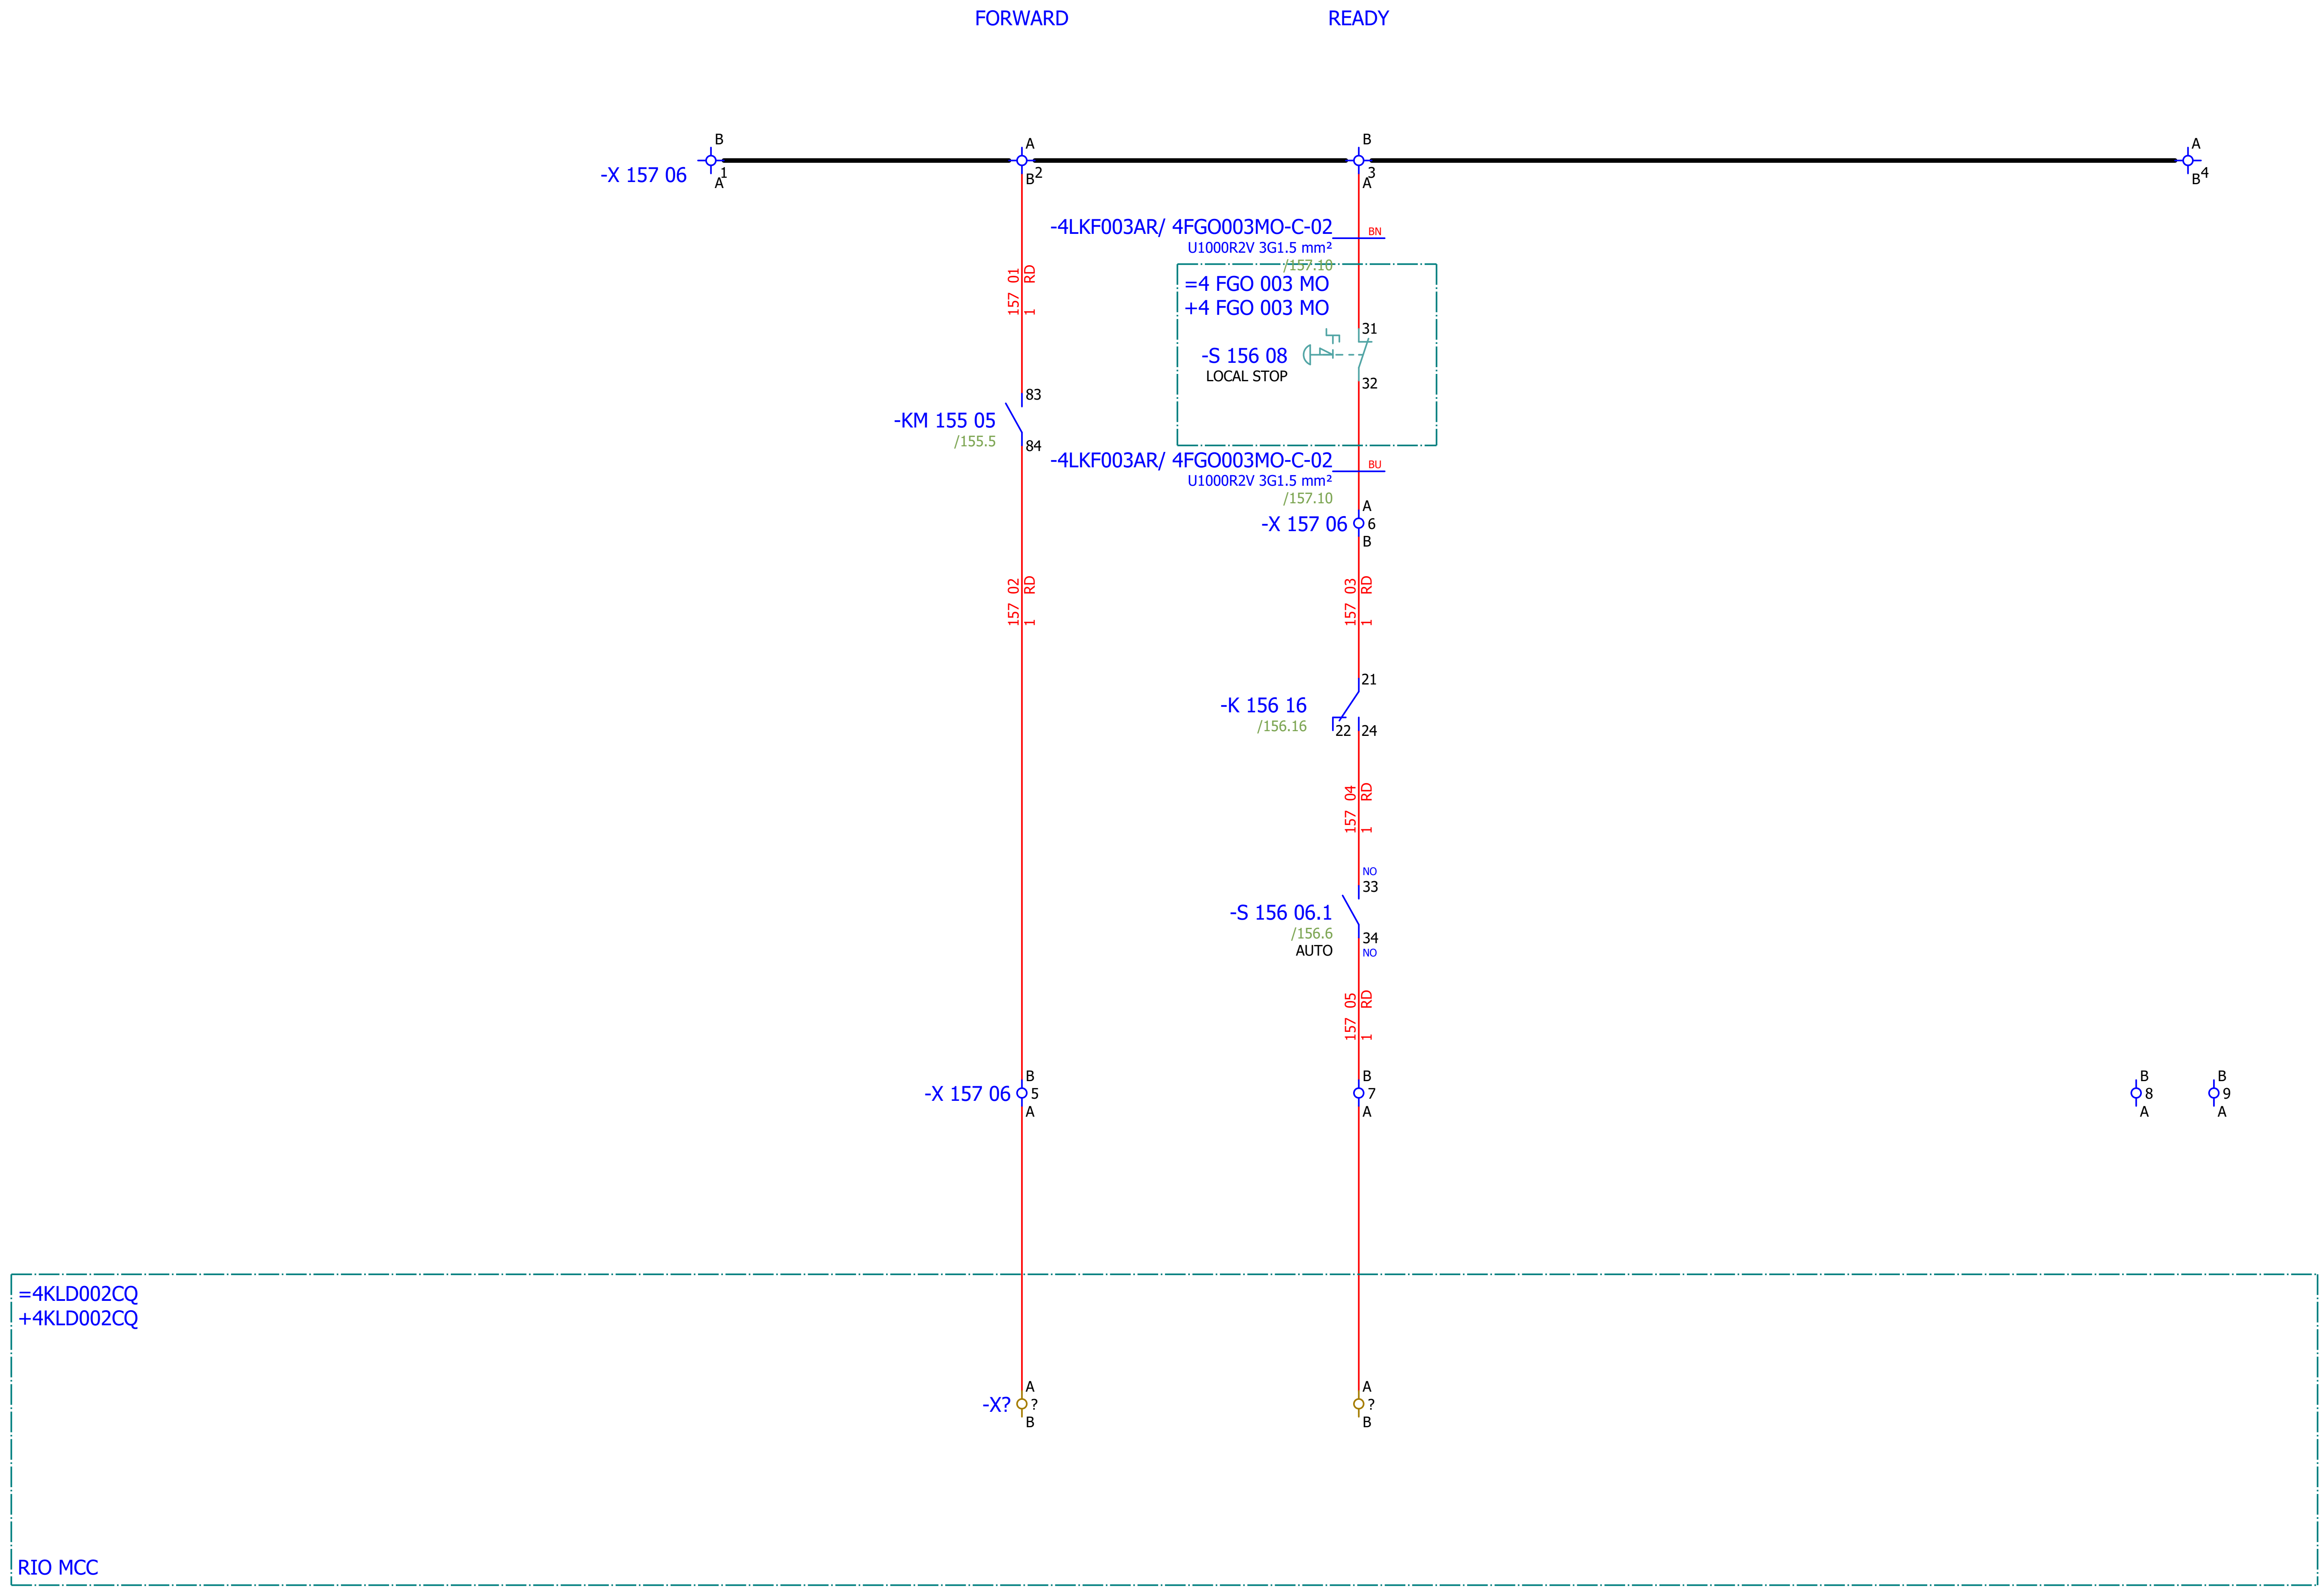

Date: 17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn: Luka Božičević								
Approved: Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: LIGHT FUEL OIL PUMP 1 - SIGNALIZATION	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 157
Format: A3							+4LKF003AR	Next: 158

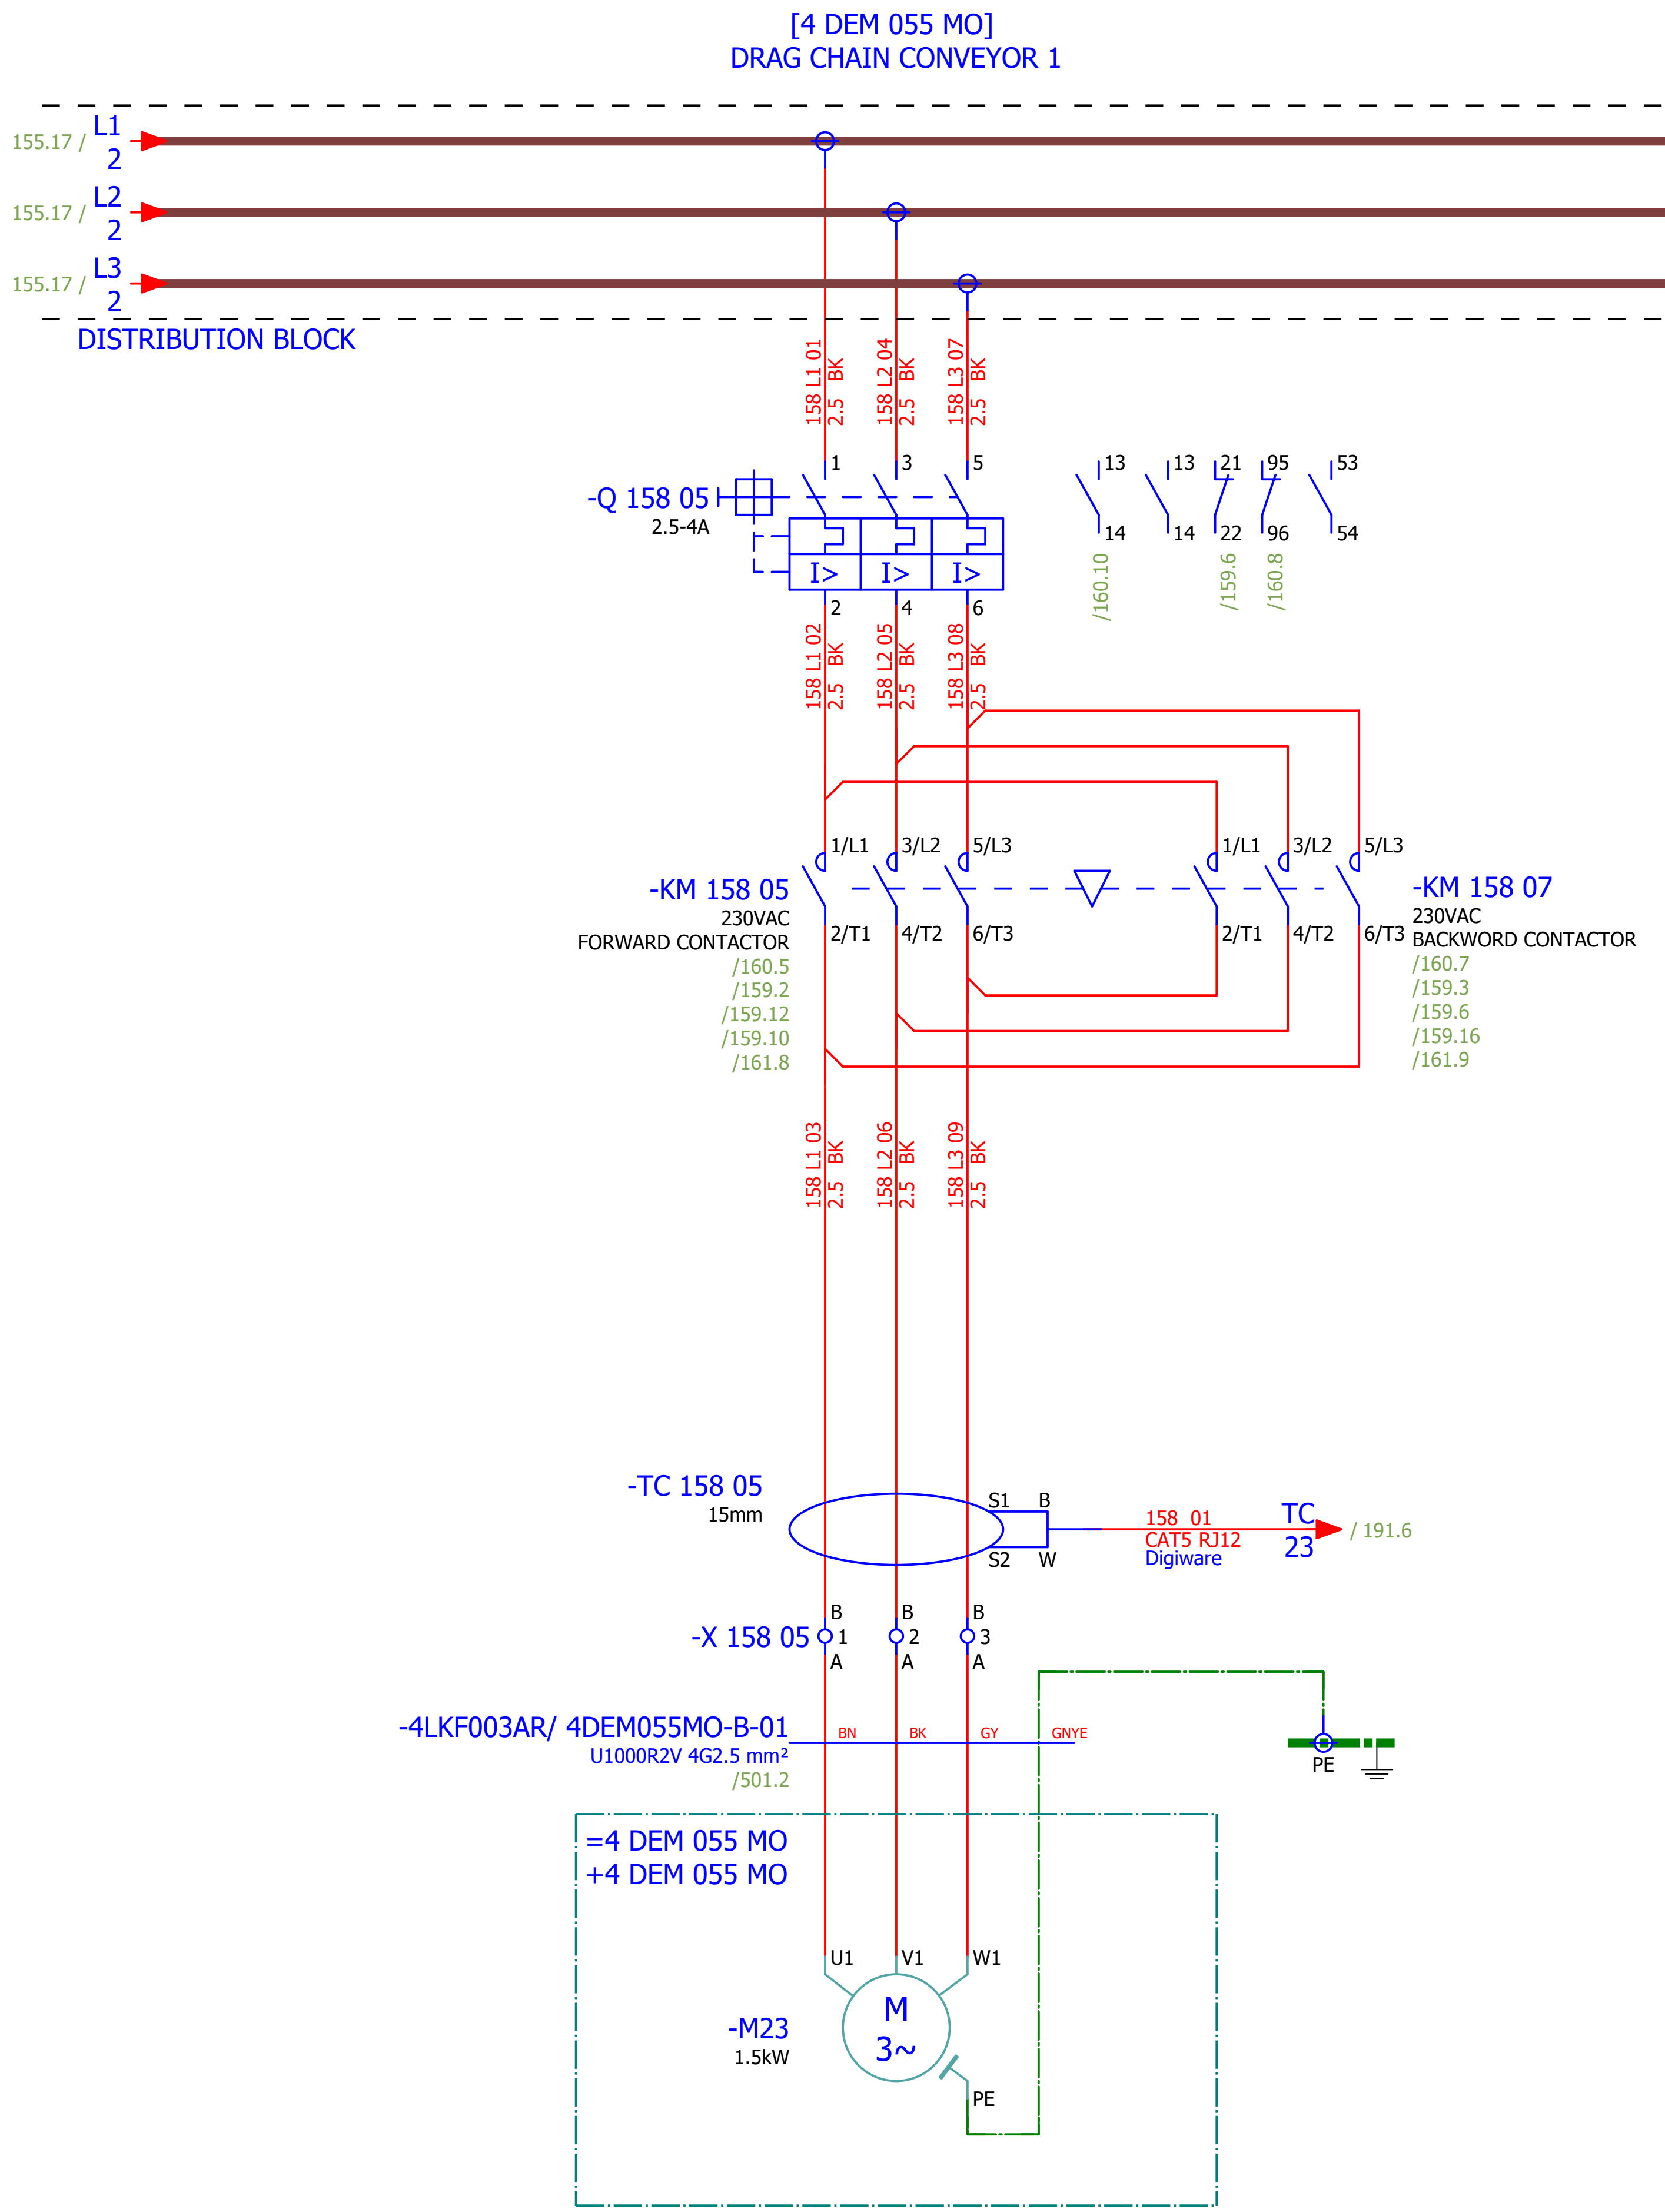

NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date:	17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Luka Božičević								
Approved:	Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: DRAG CHAIN CONVEYOR 1	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 158
Format:	A3							+4LKF003AR	Next: 159

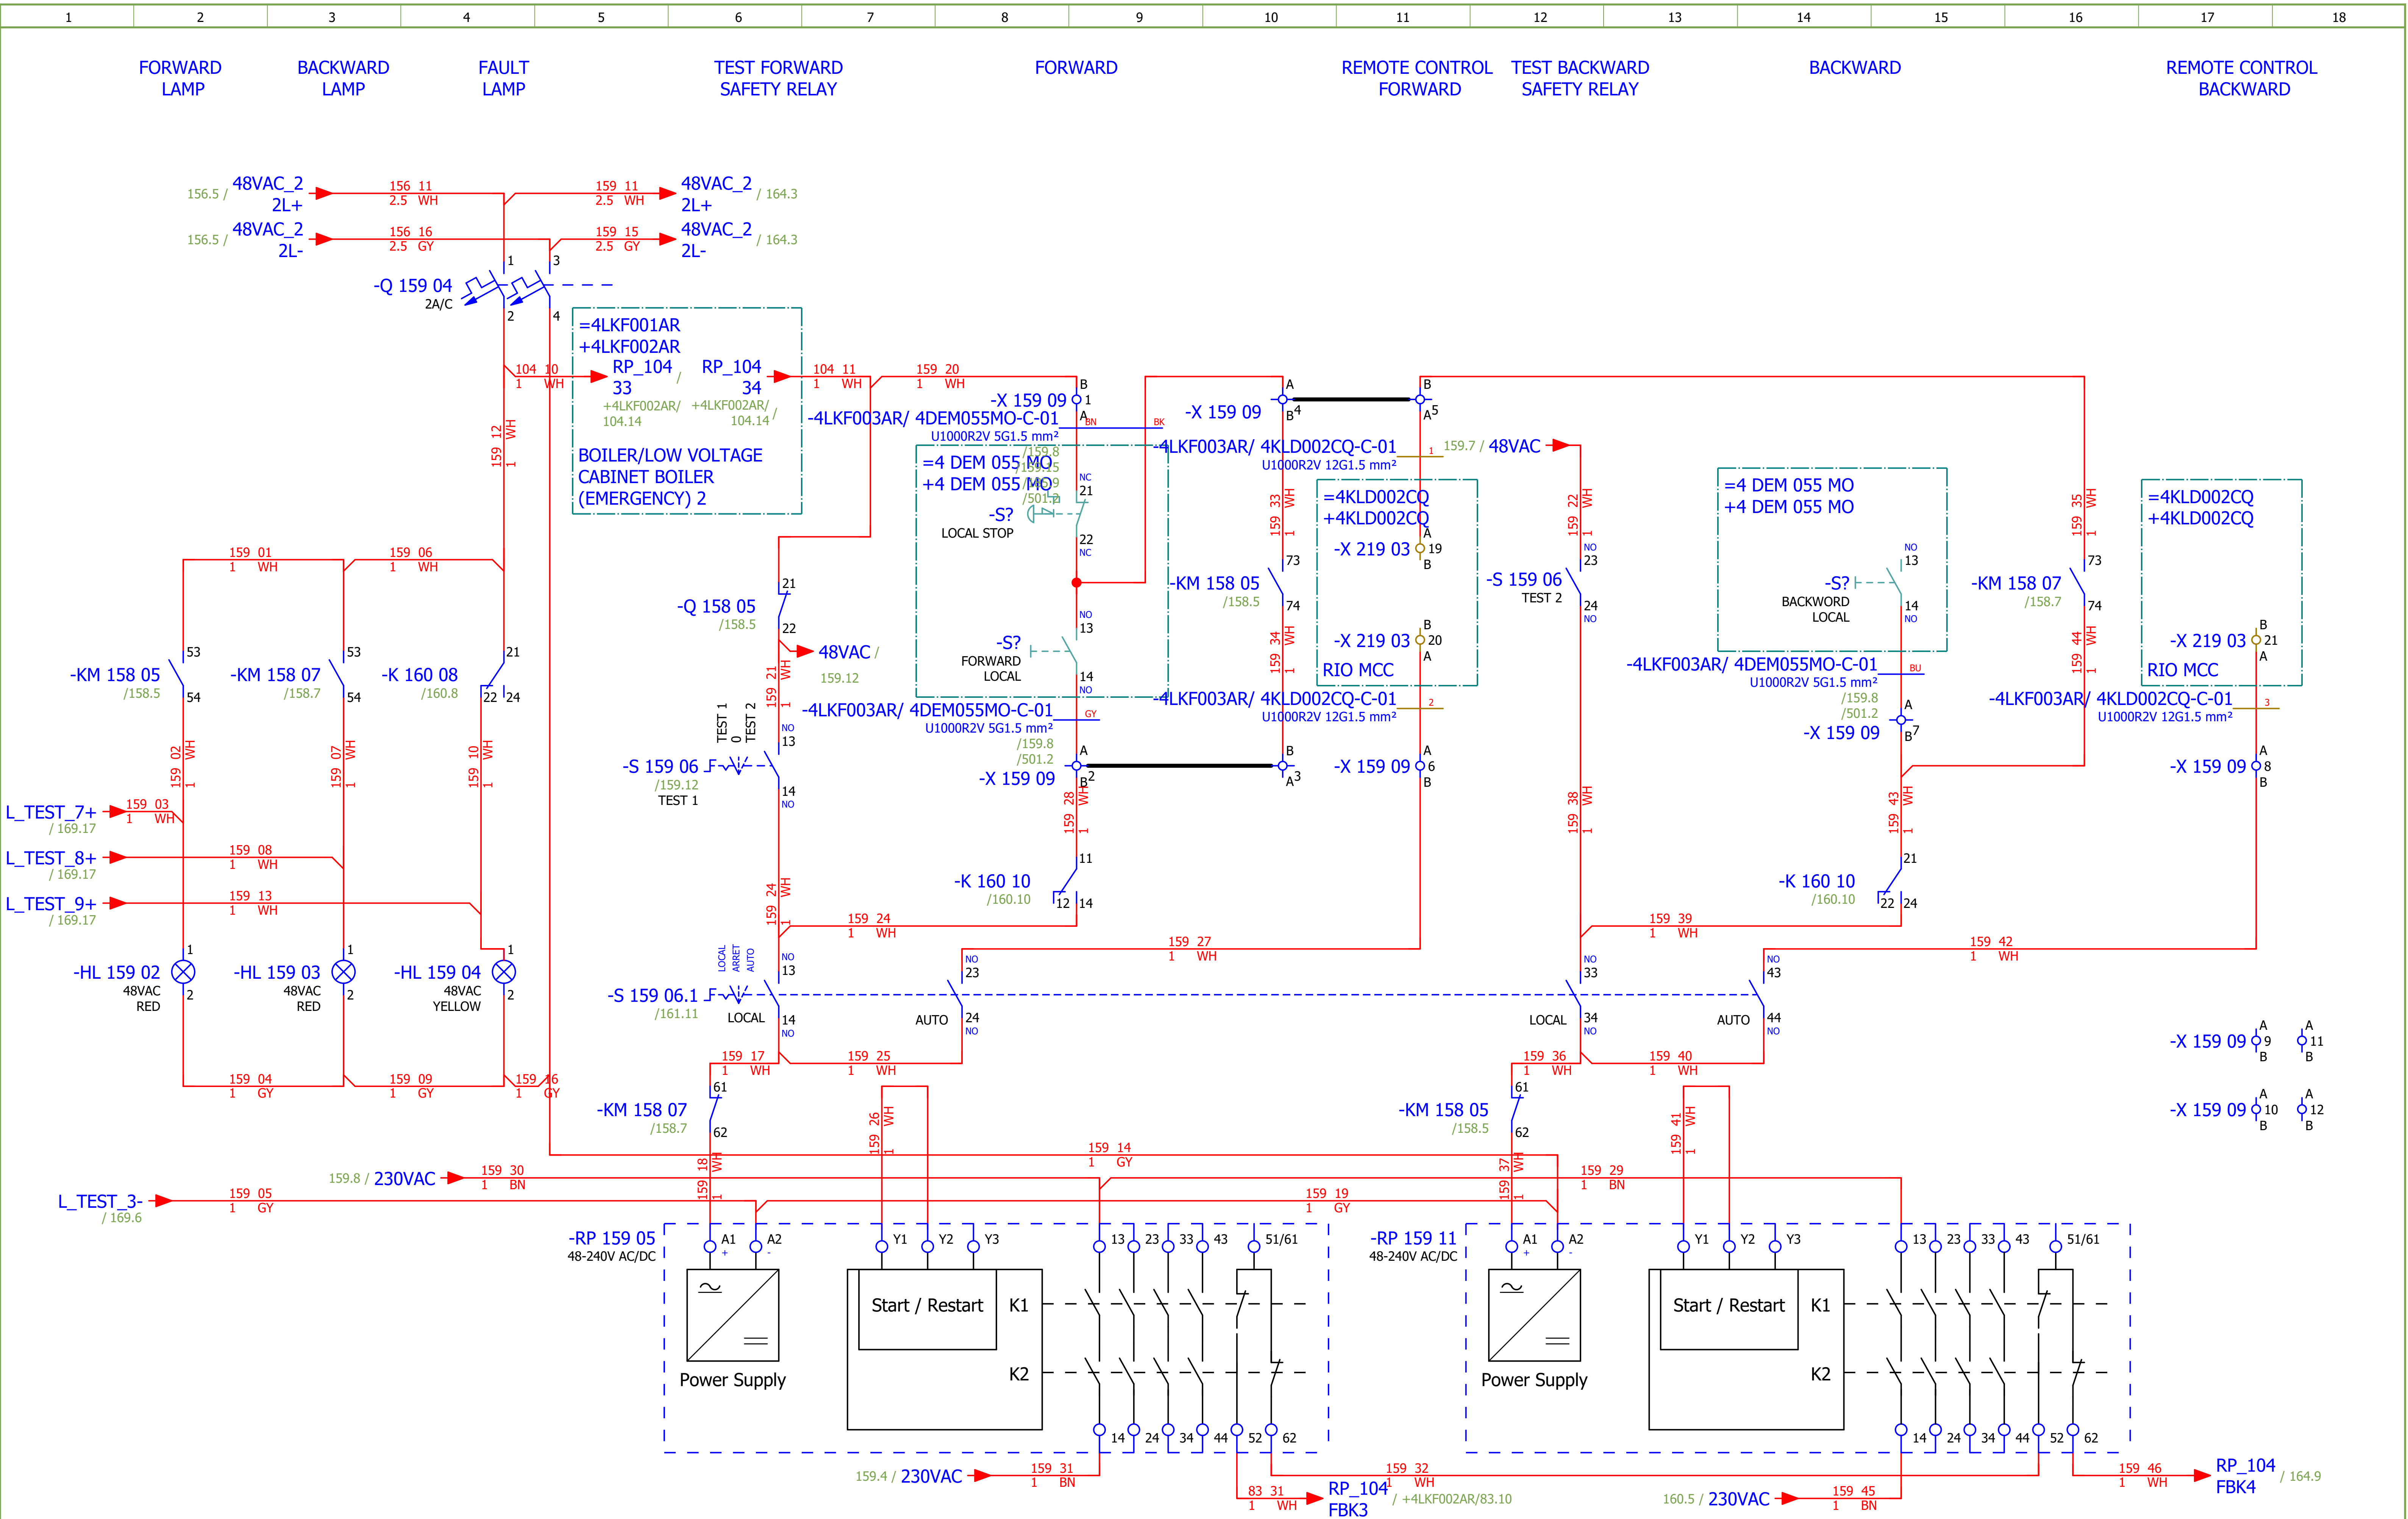

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: DRAG CHAIN CONVEYOR 1 - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 159
Format:	A3								+4LKF003AR	Next: 160

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

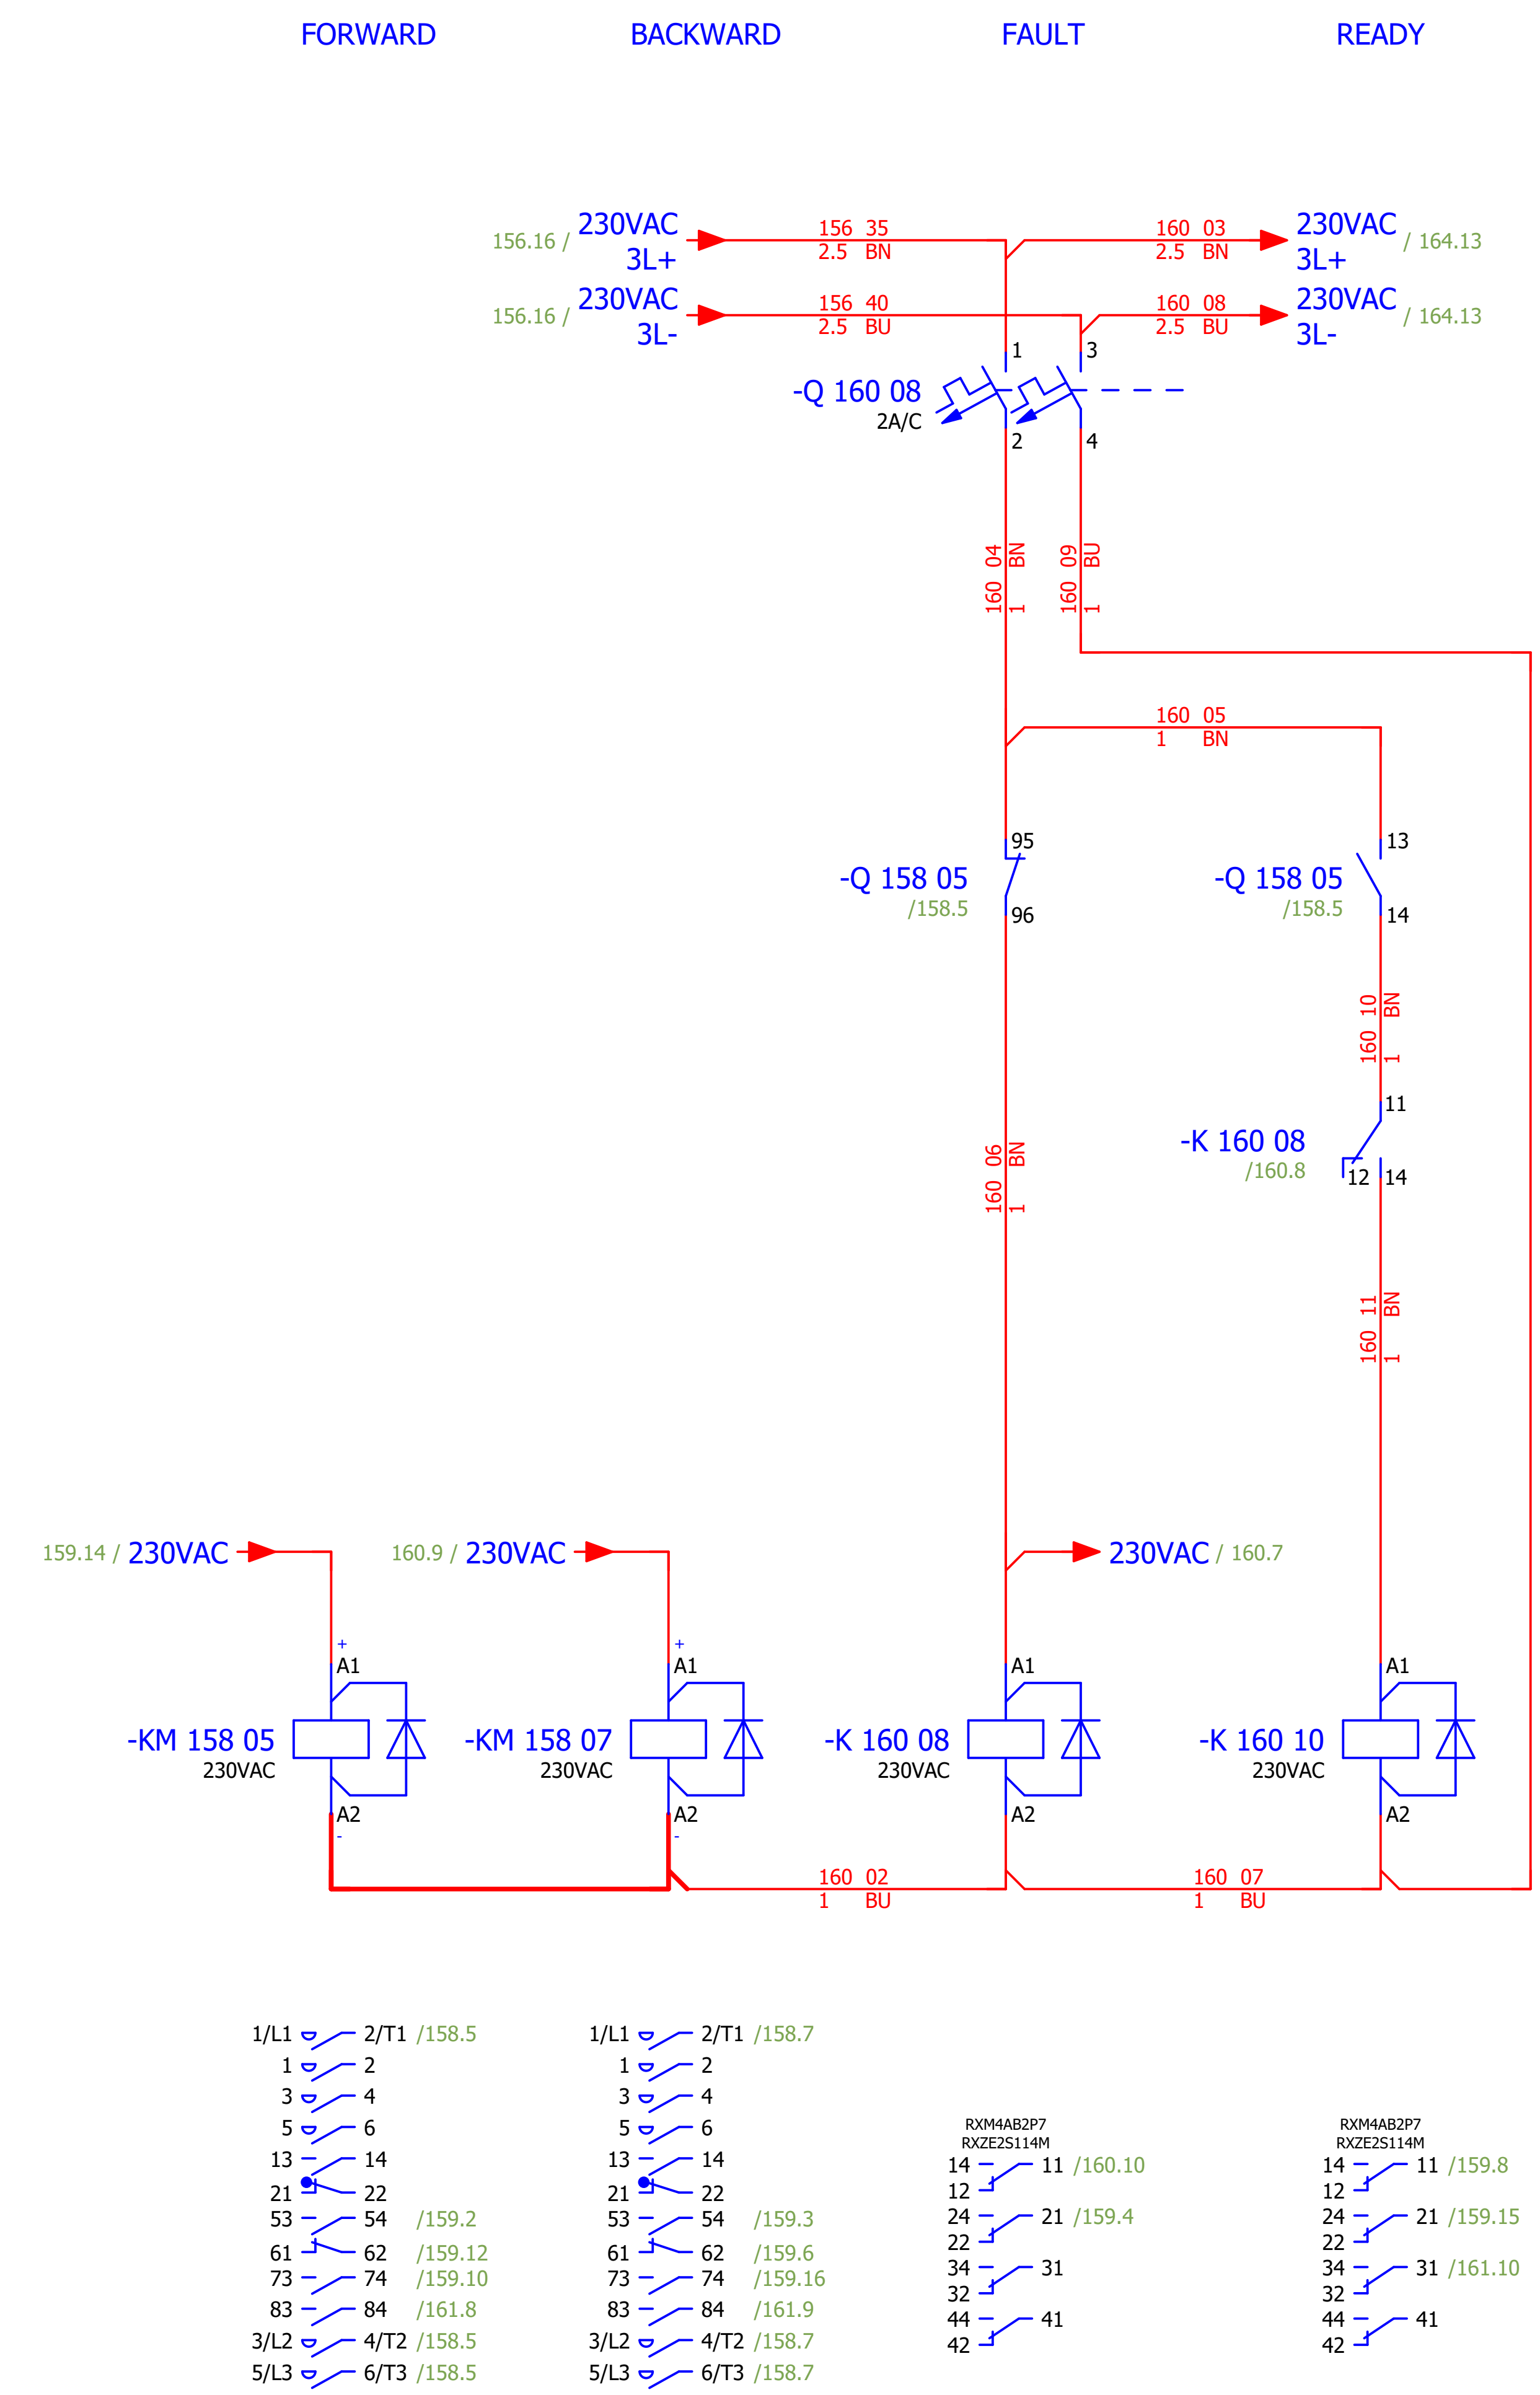

Date: 17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870
Drawn: Luka Božičević							Revision: F
Approved: Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: DRAG CHAIN CONVEYOR 1 - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F	=4LKF001AR	#D Sheet: 160
Format: A3						+4LKF003AR	Next: 161

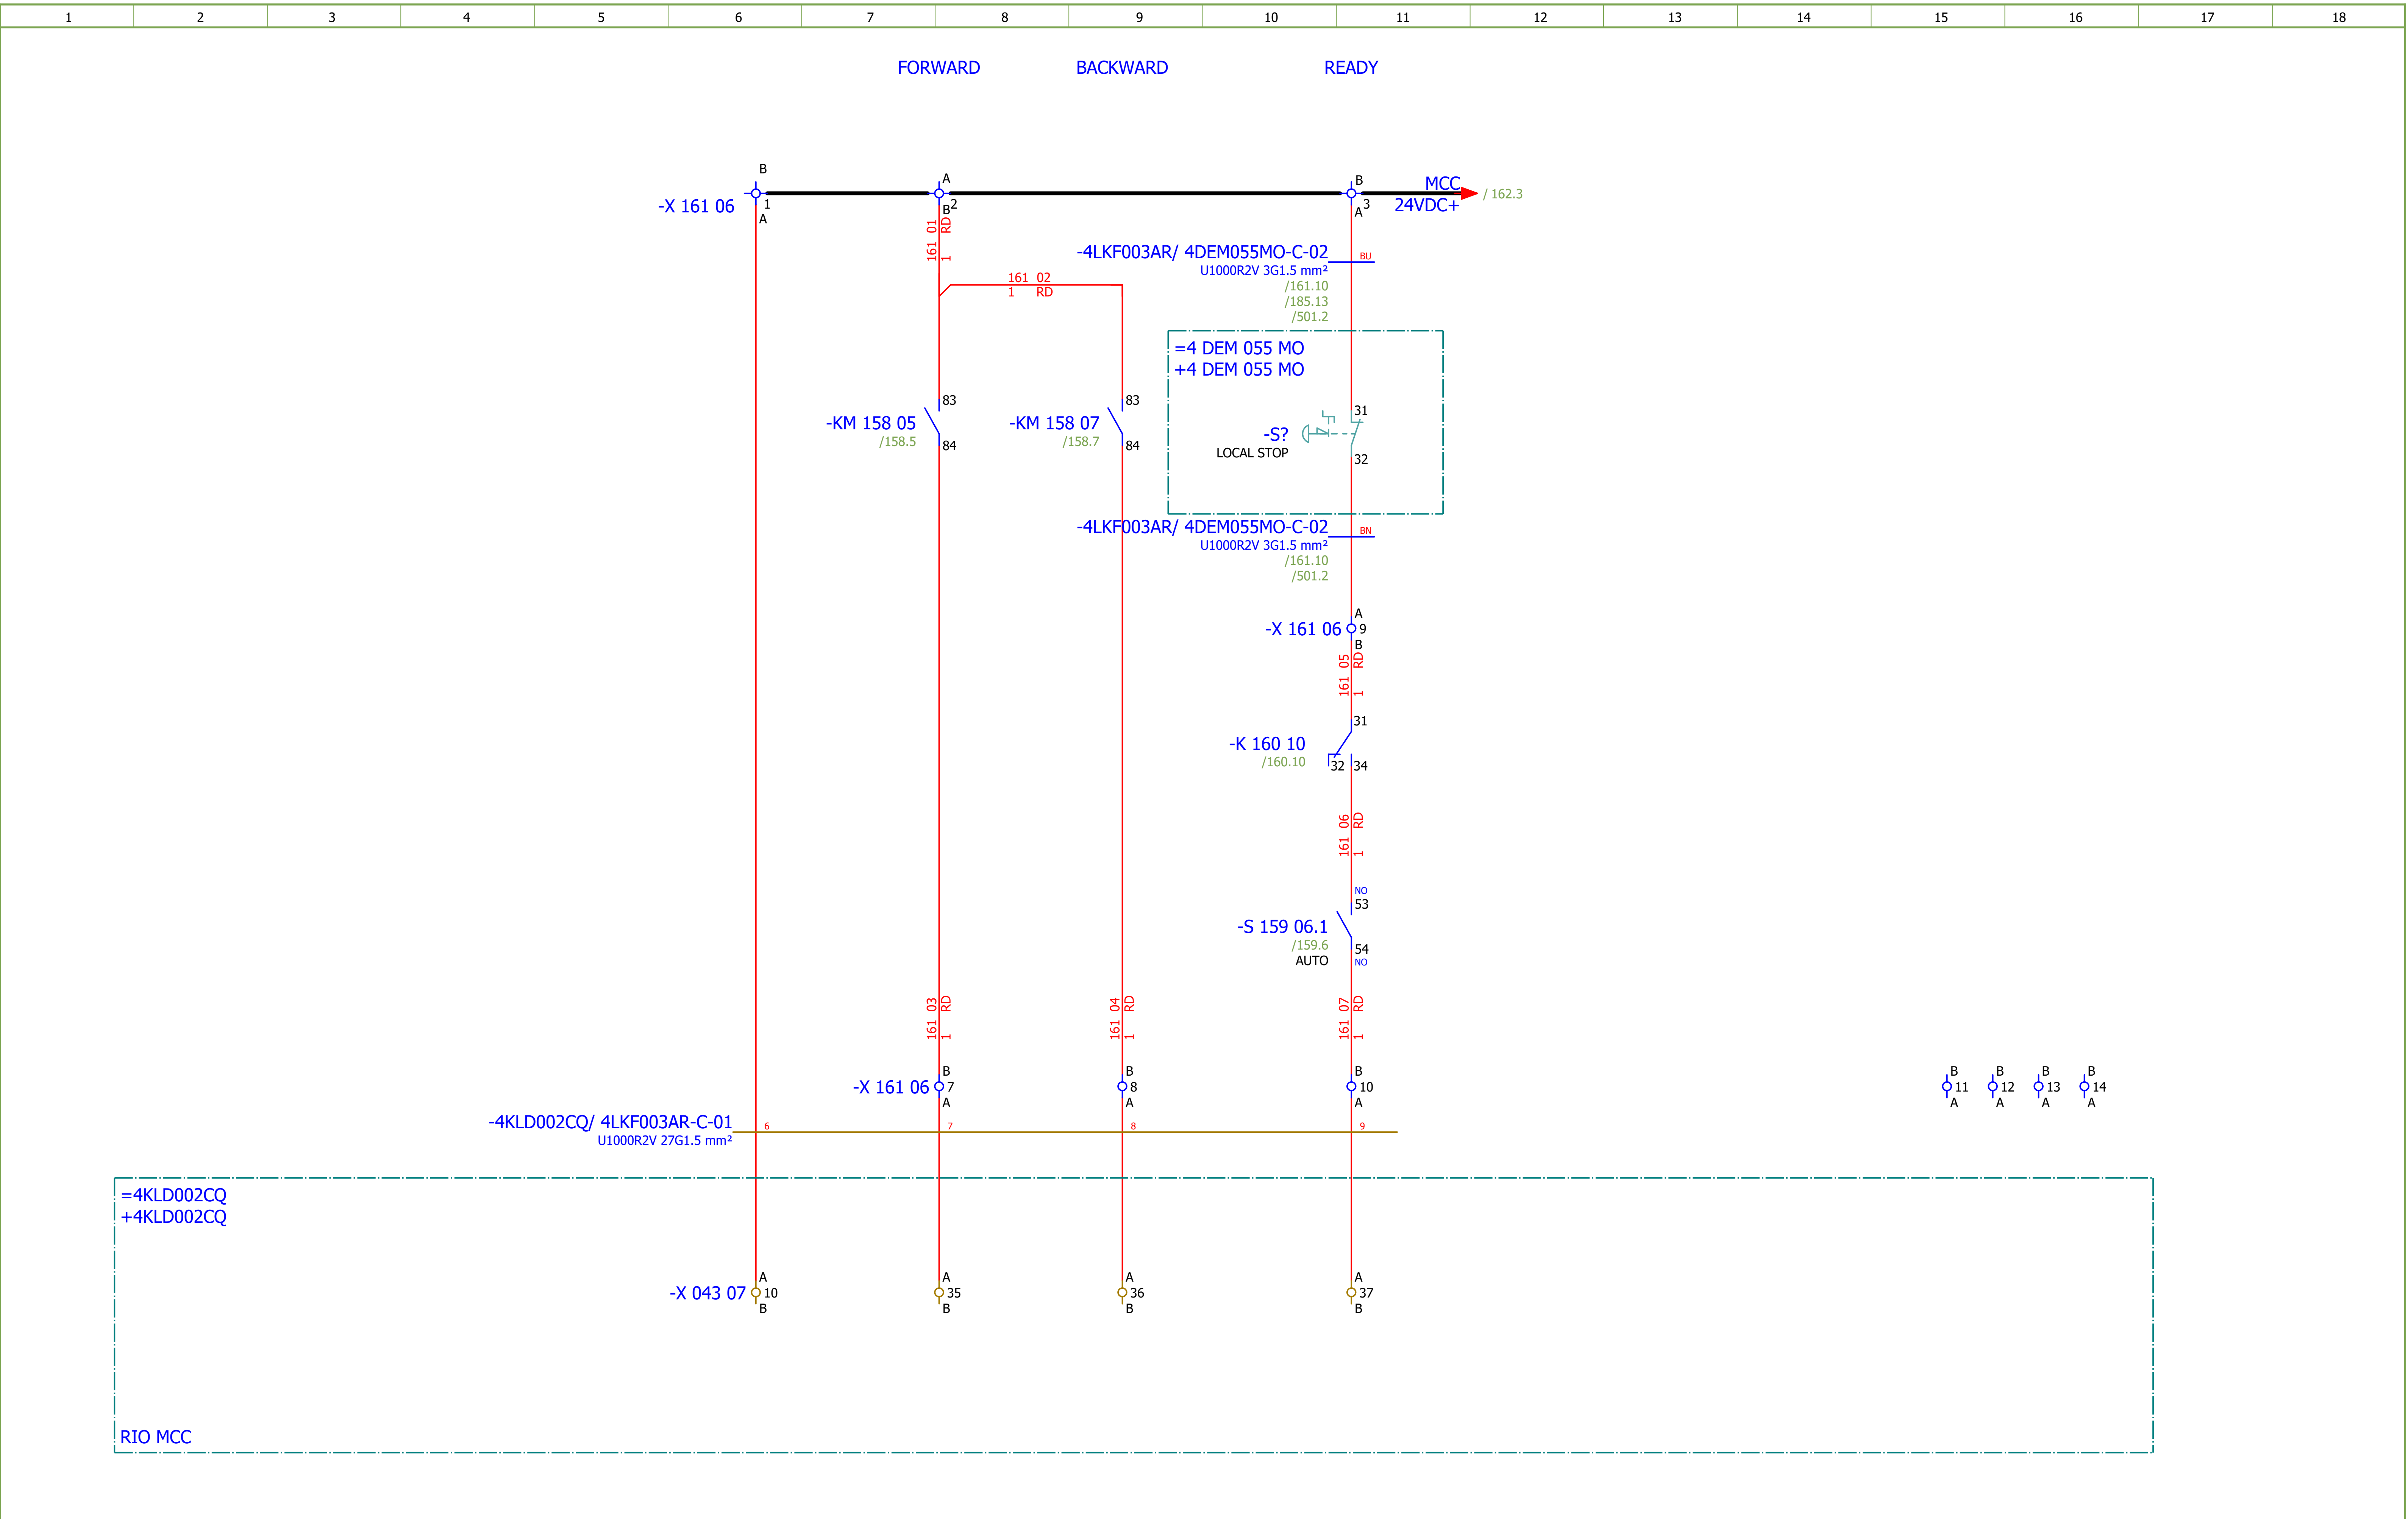

Date: 17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn: Luka Božičević							#D
Approved: Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: DRAG CHAIN CONVEYOR 1 - SIGNALIZATION	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 161
Format: A3						+4LKF003AR	Next: 162

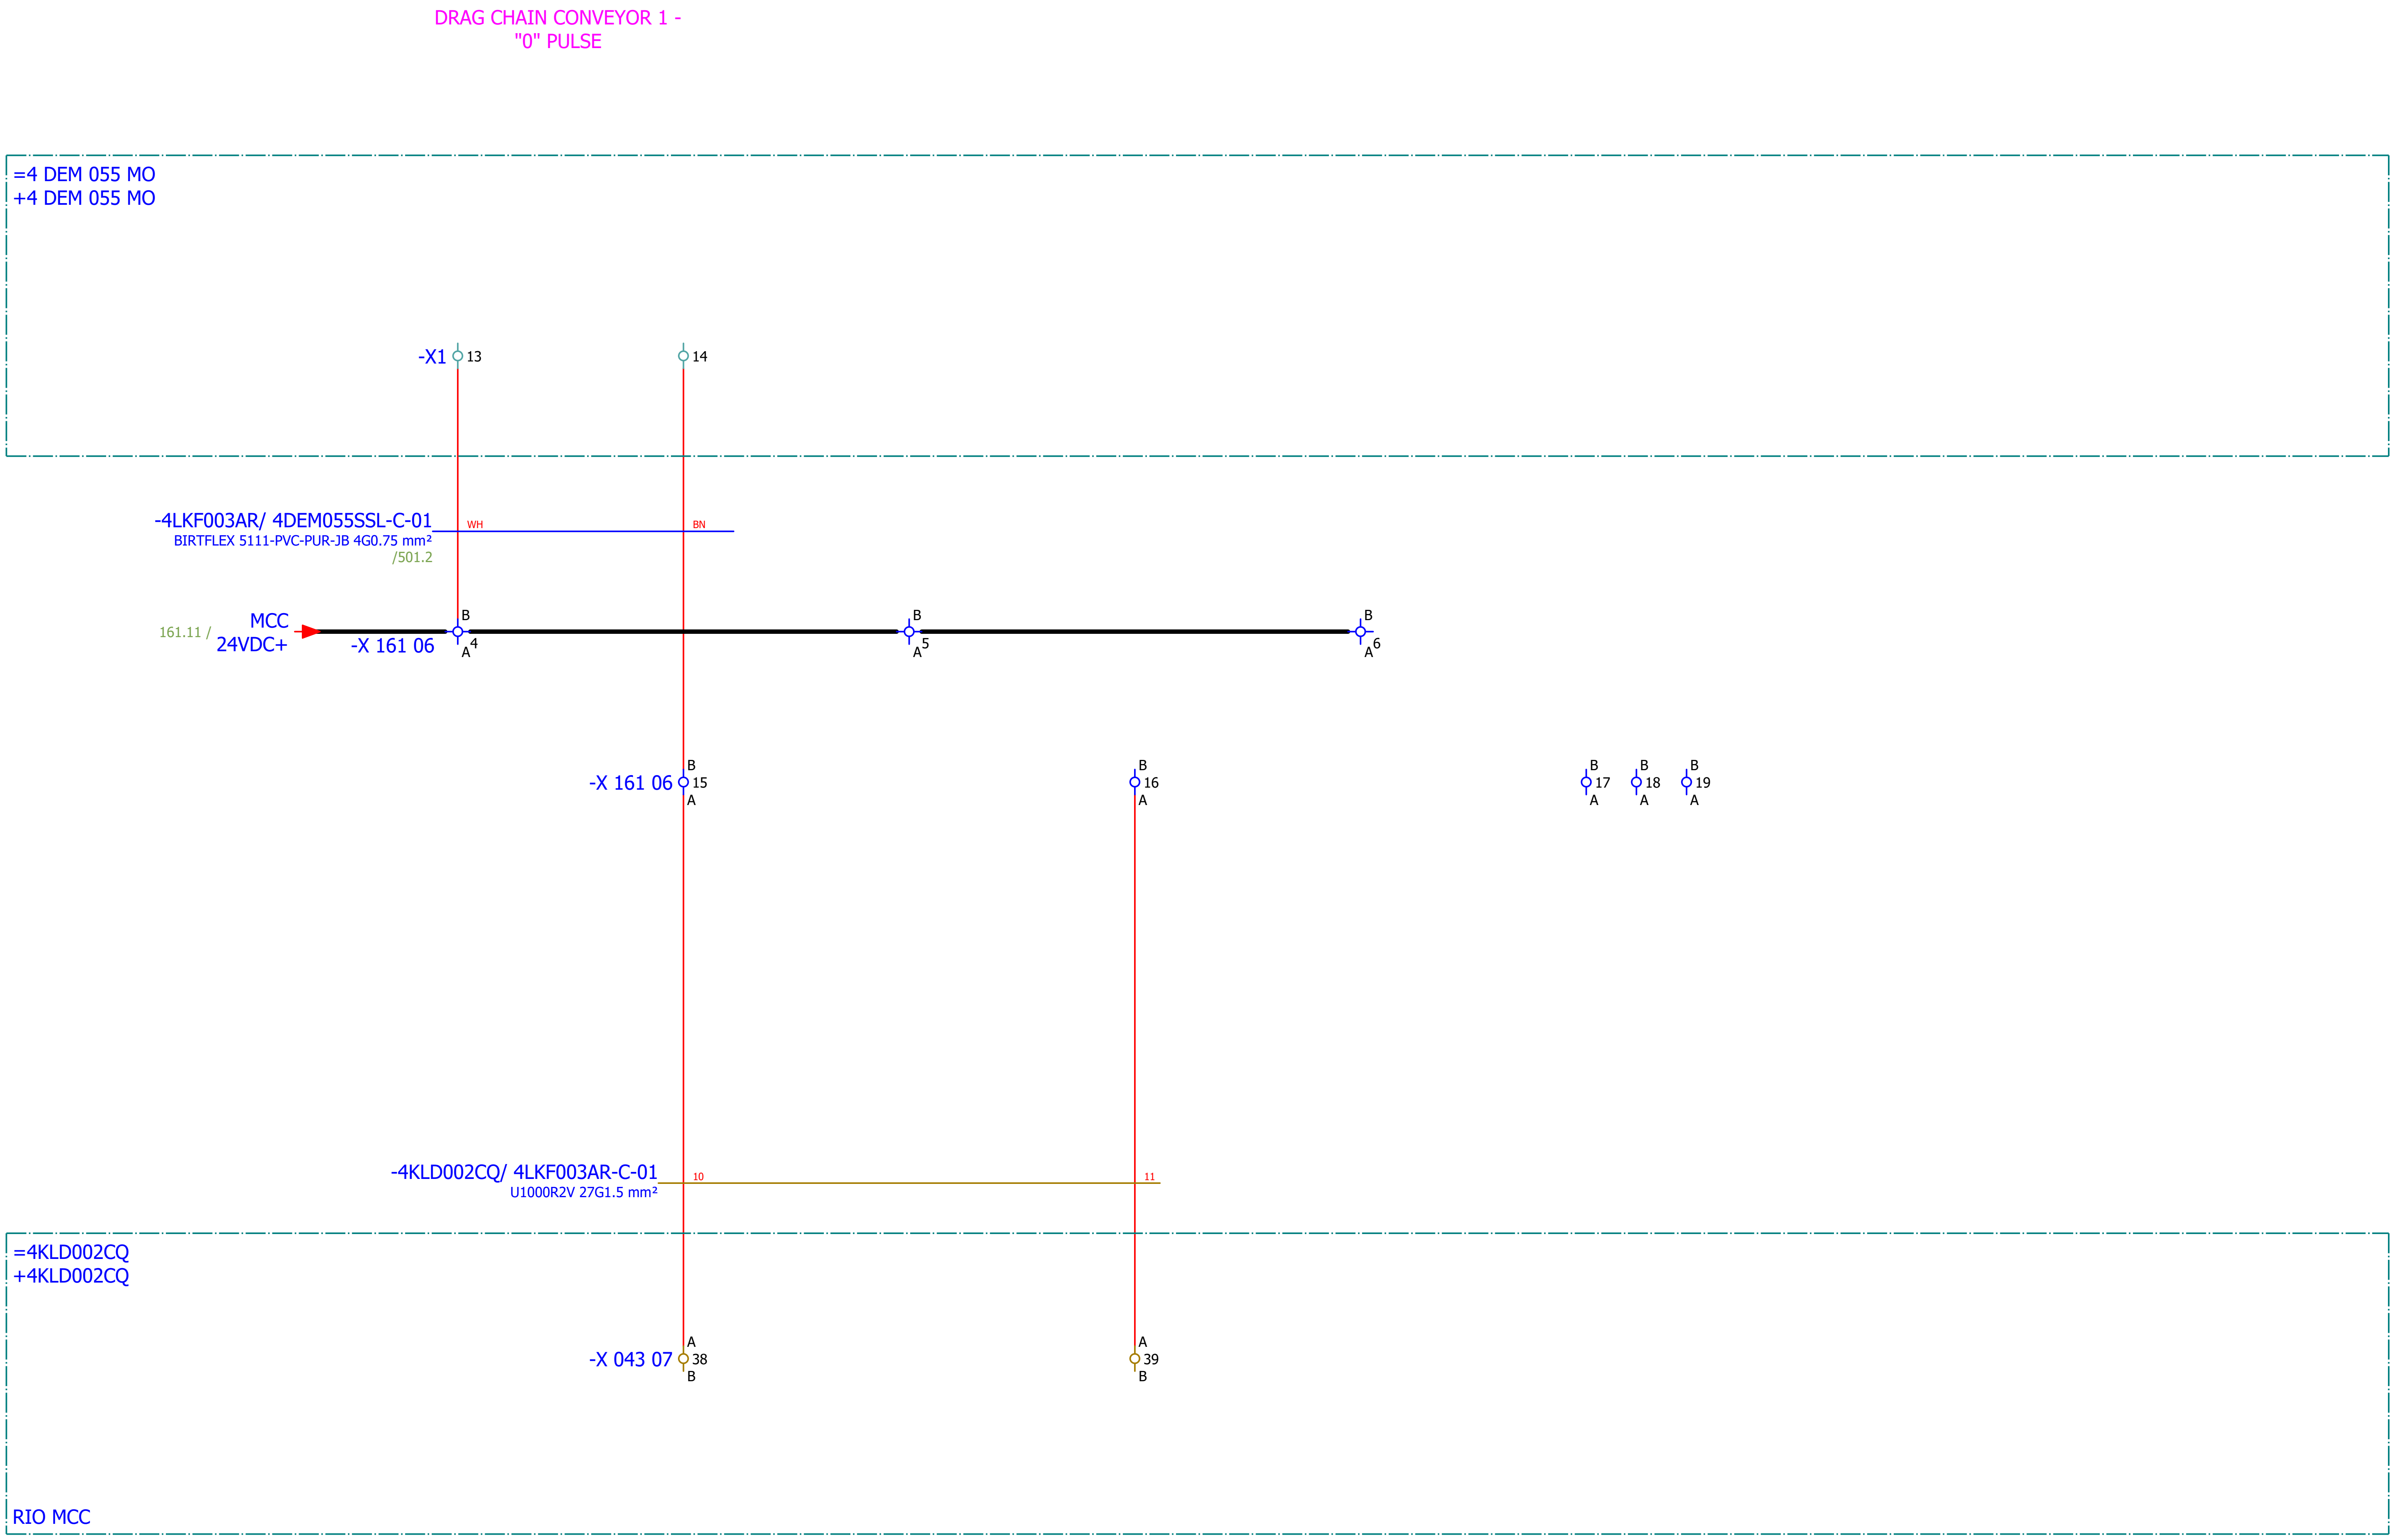

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Luka Božičević								#D
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: DRAG CHAIN CONVEYOR 1 - SIGNALIZATION	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 162
Format:	A3							+4LKF003AR	Next: 163

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

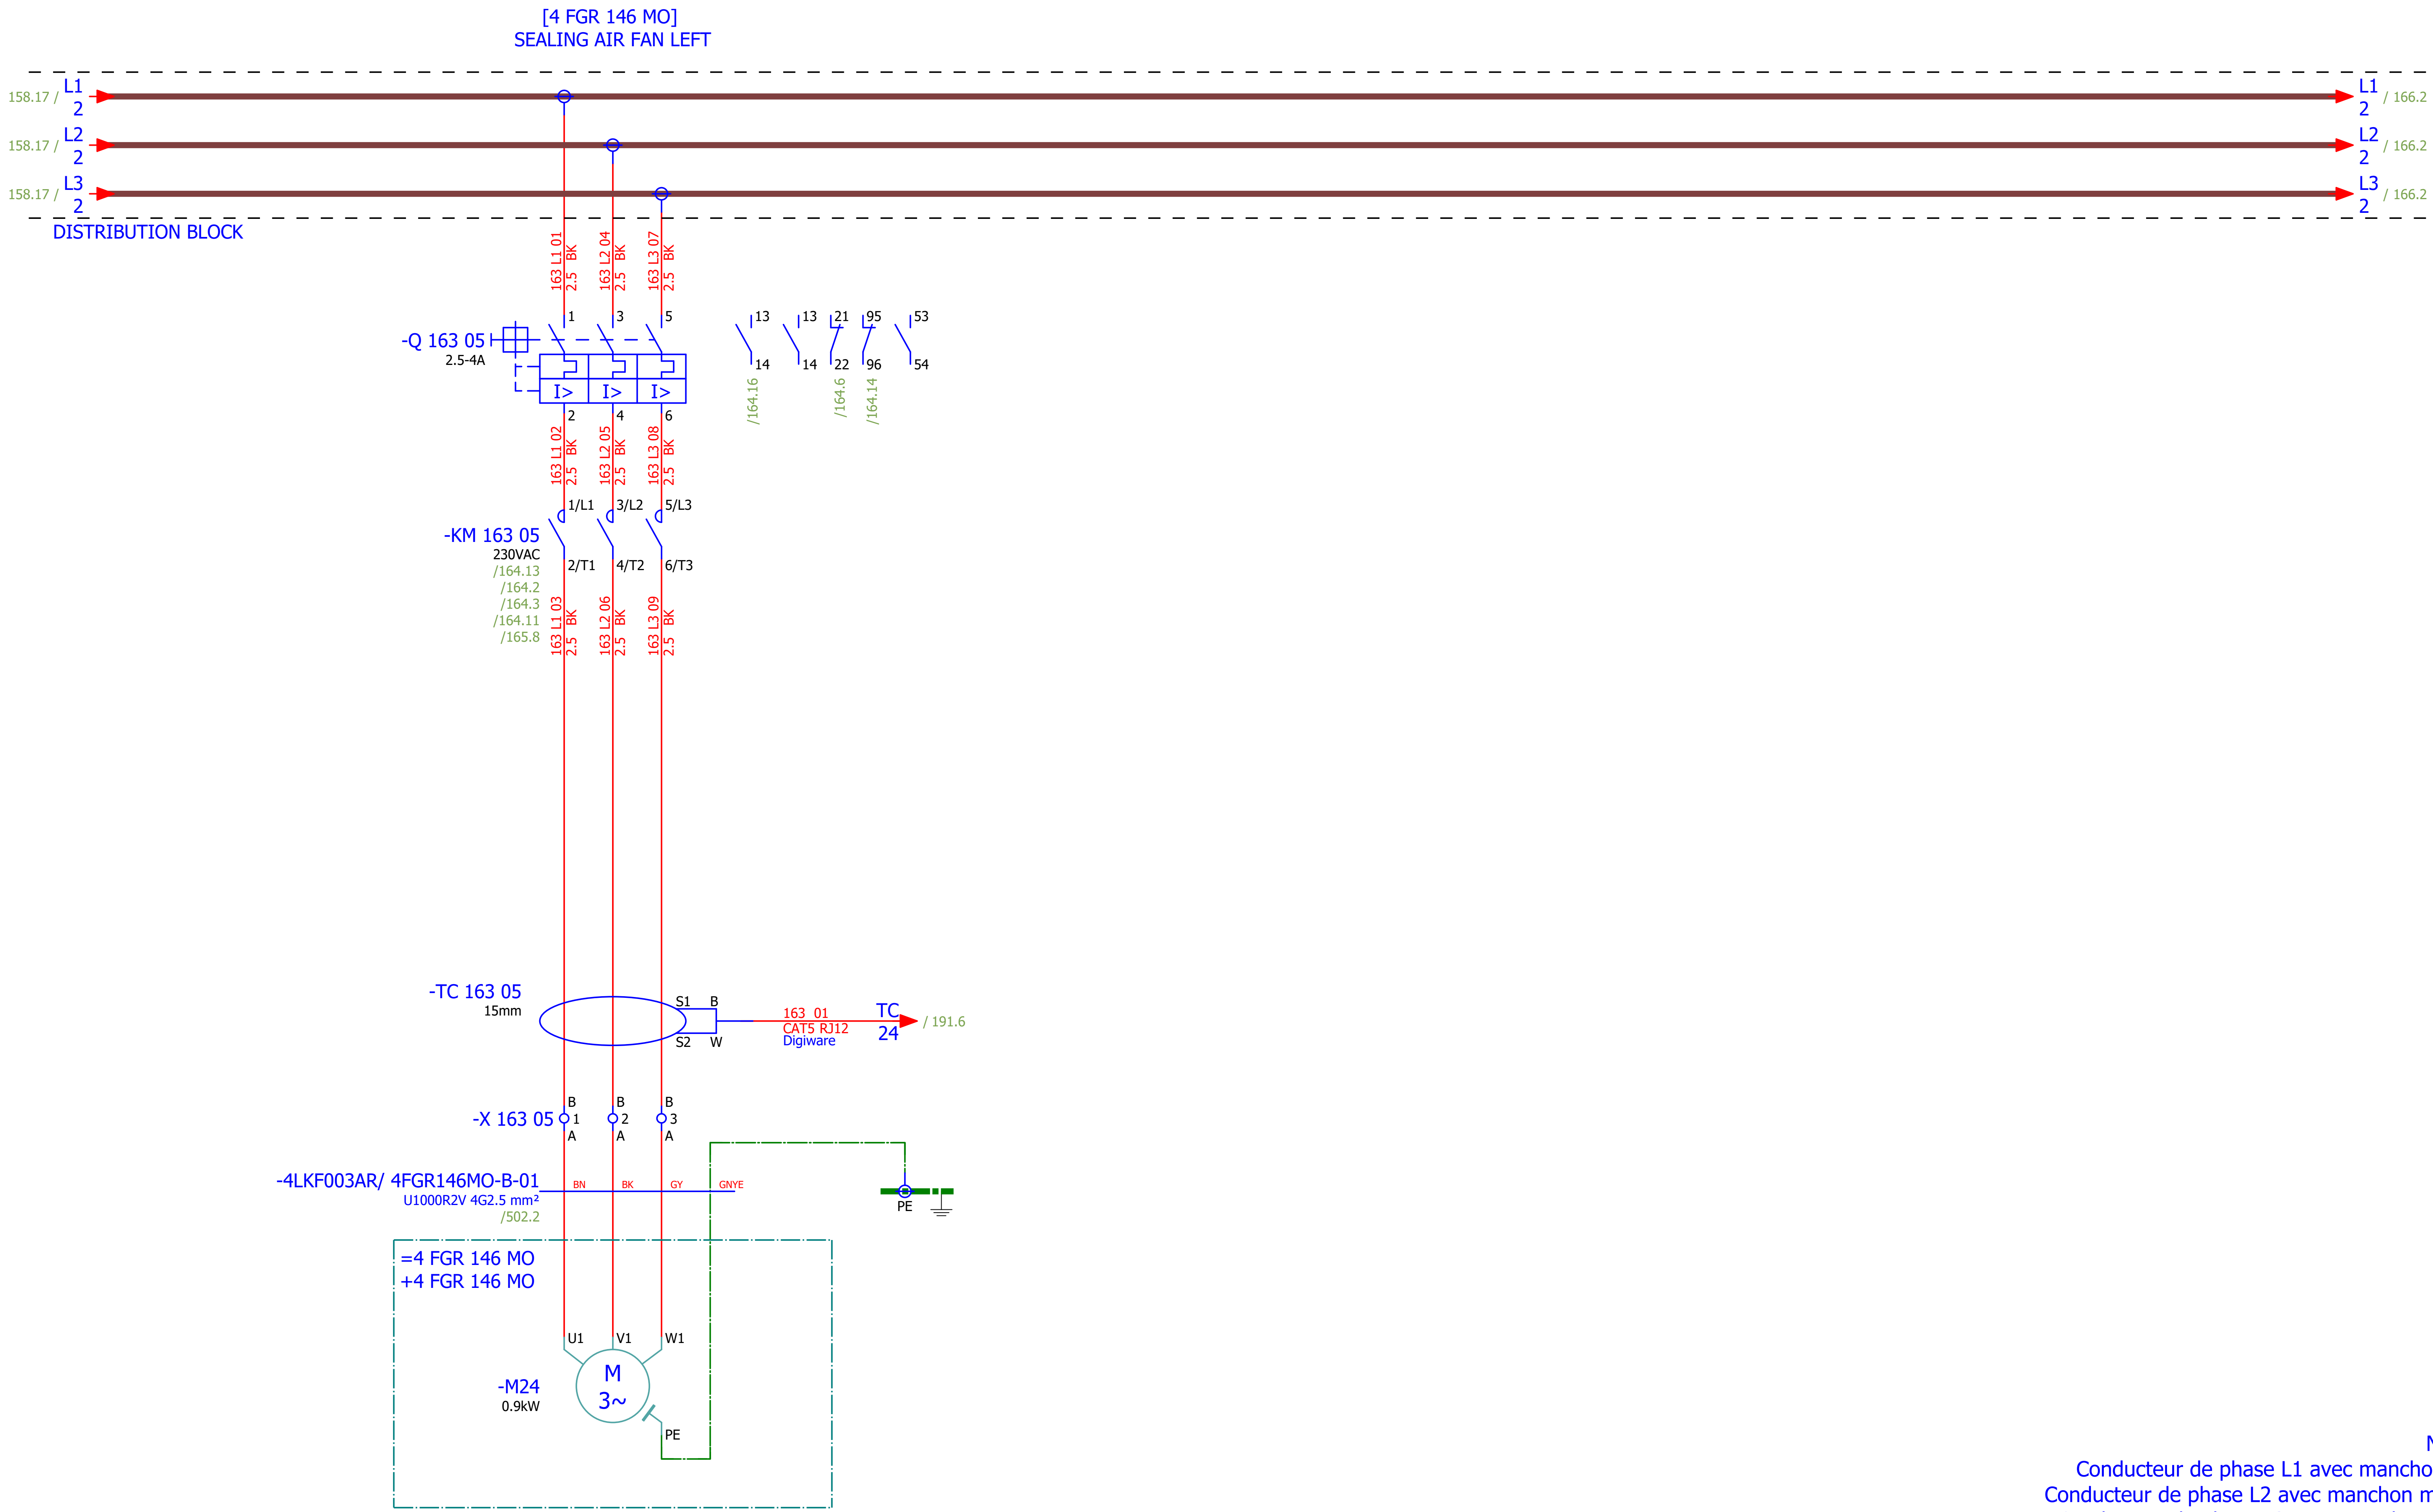

NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D	
Drawn:	Luka Božičević										
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SEALING AIR FAN LEFT	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet:	163
Format:	A3								+4LKF003AR	Next:	164

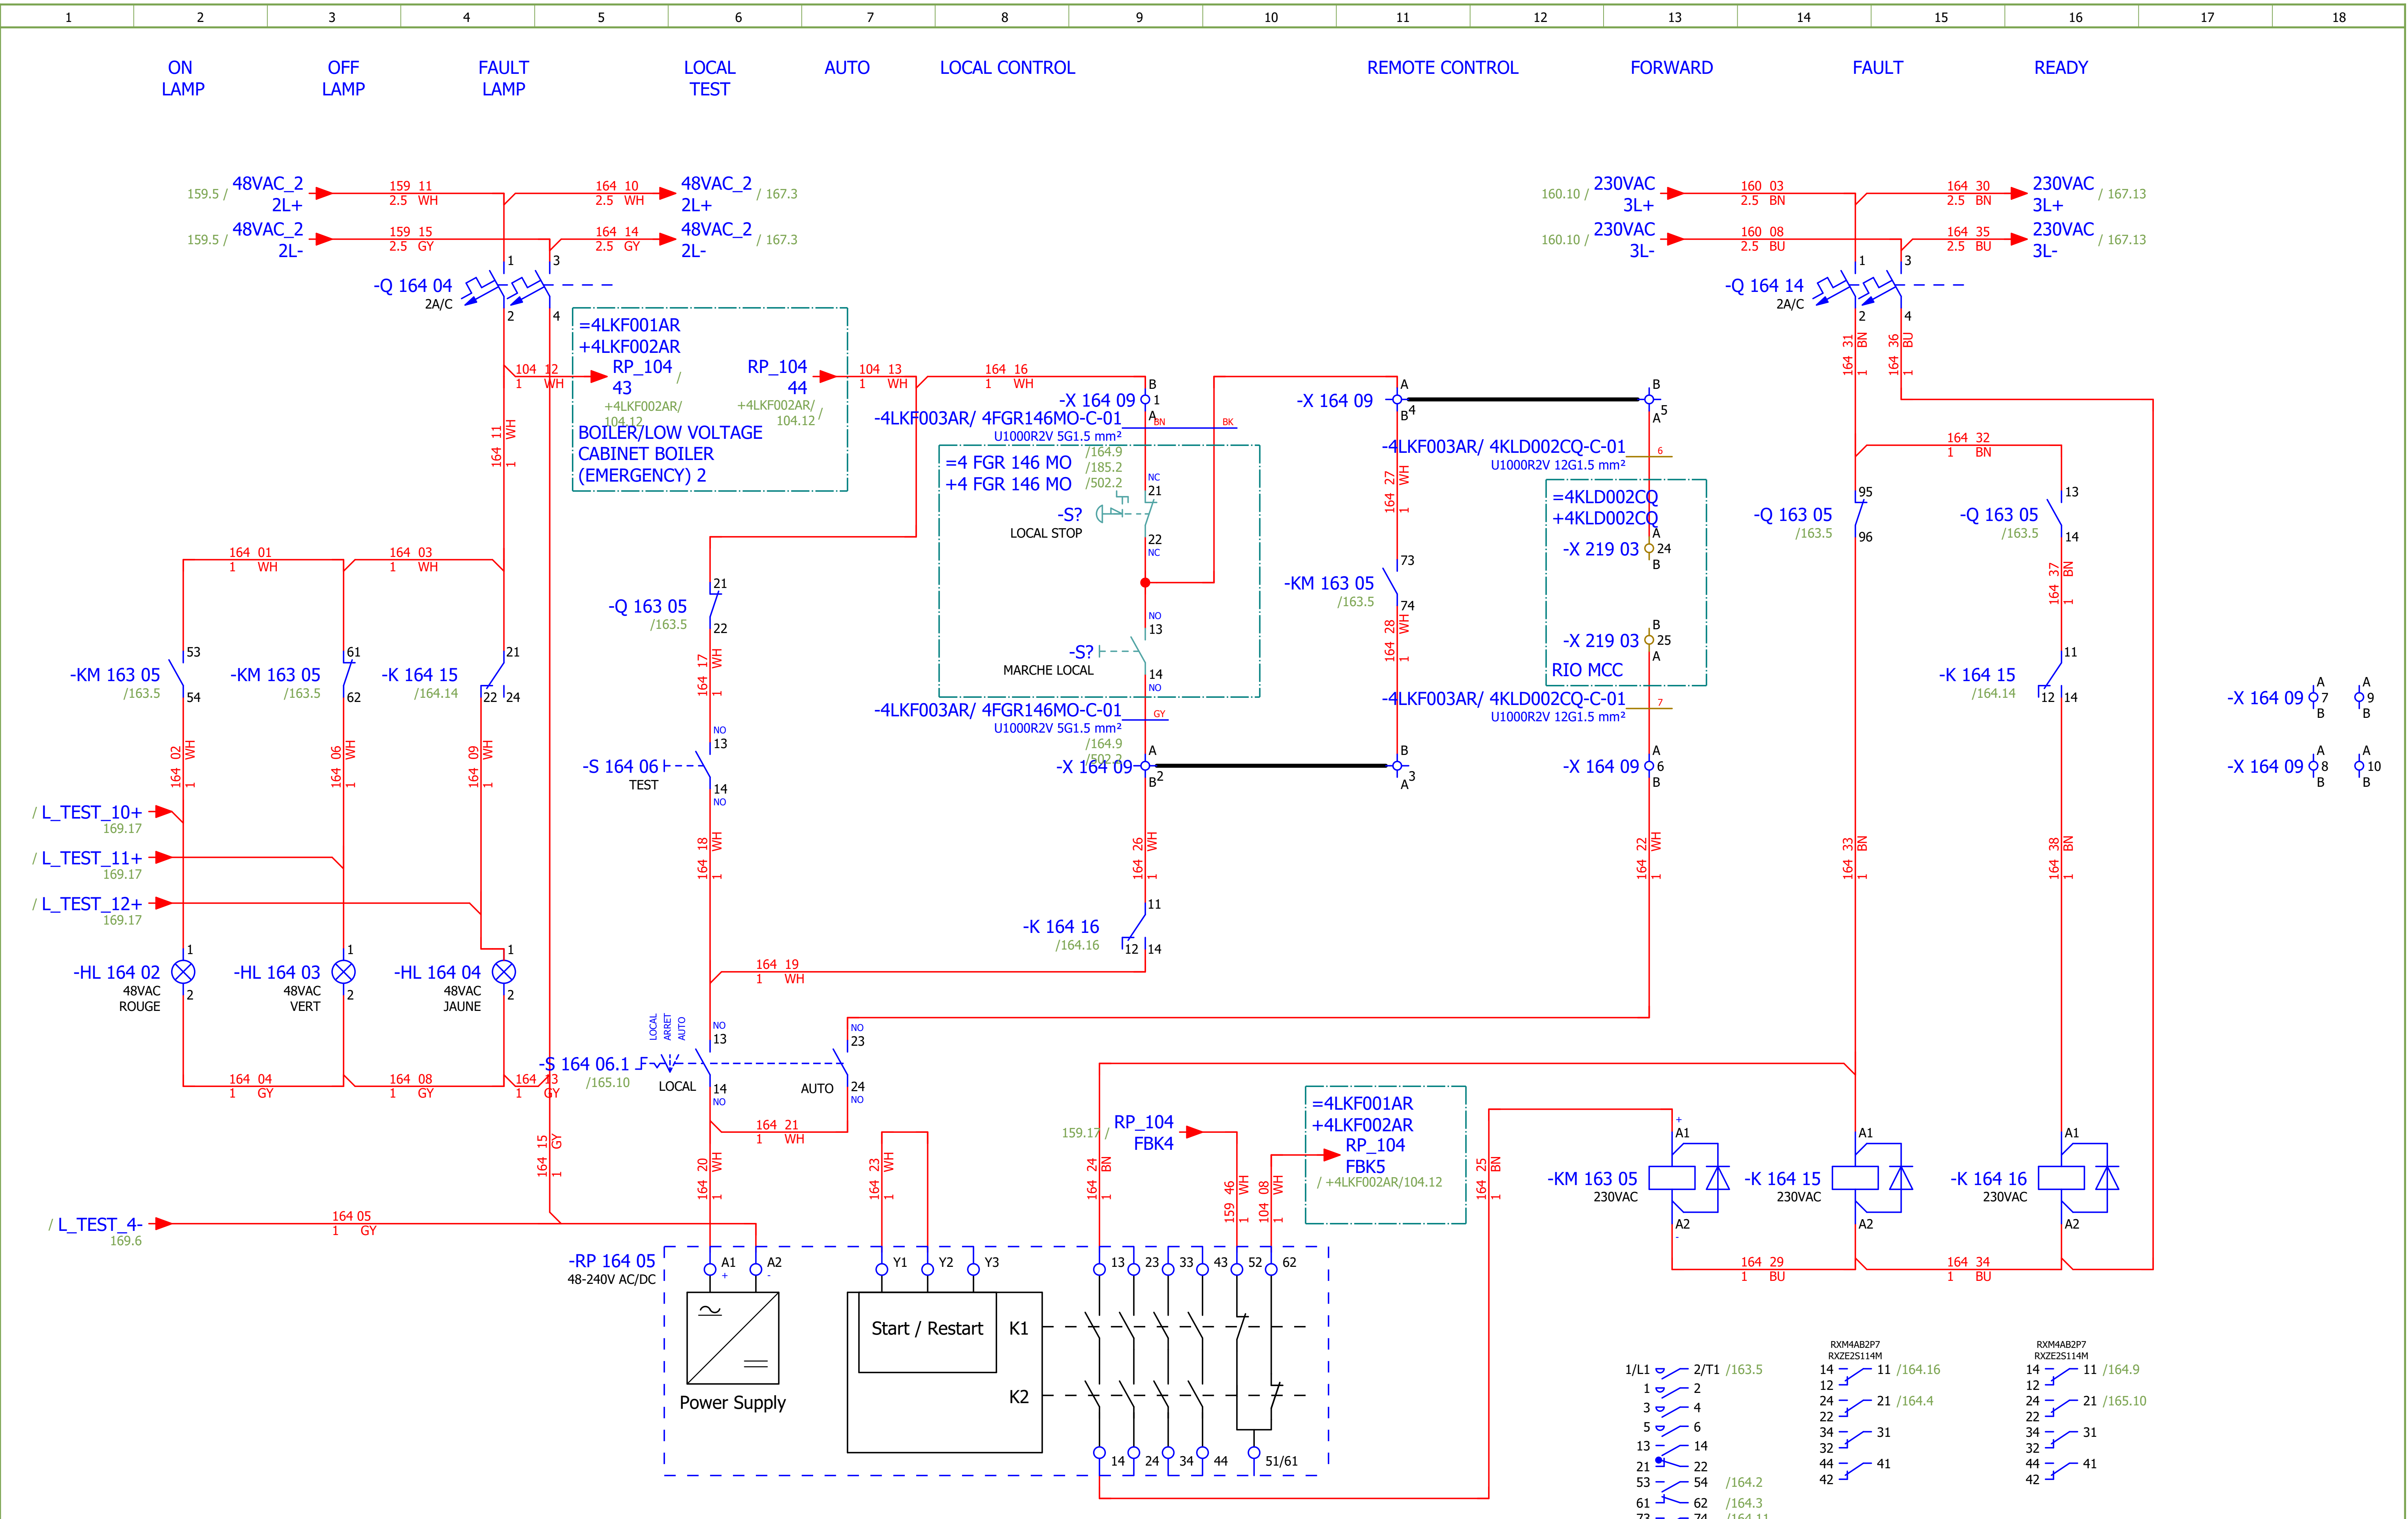

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3
Drawn:	Luka Božičević					
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	SEALING AIR FAN LEFT - CONTROL
Format:	A3					

Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870
Drawing designation:	BRC-4-ATEP0-1870-F	Revision:	F	#D	
=4LKF001AR		Sheet:	164		
+4LKF003AR		Next:	165		

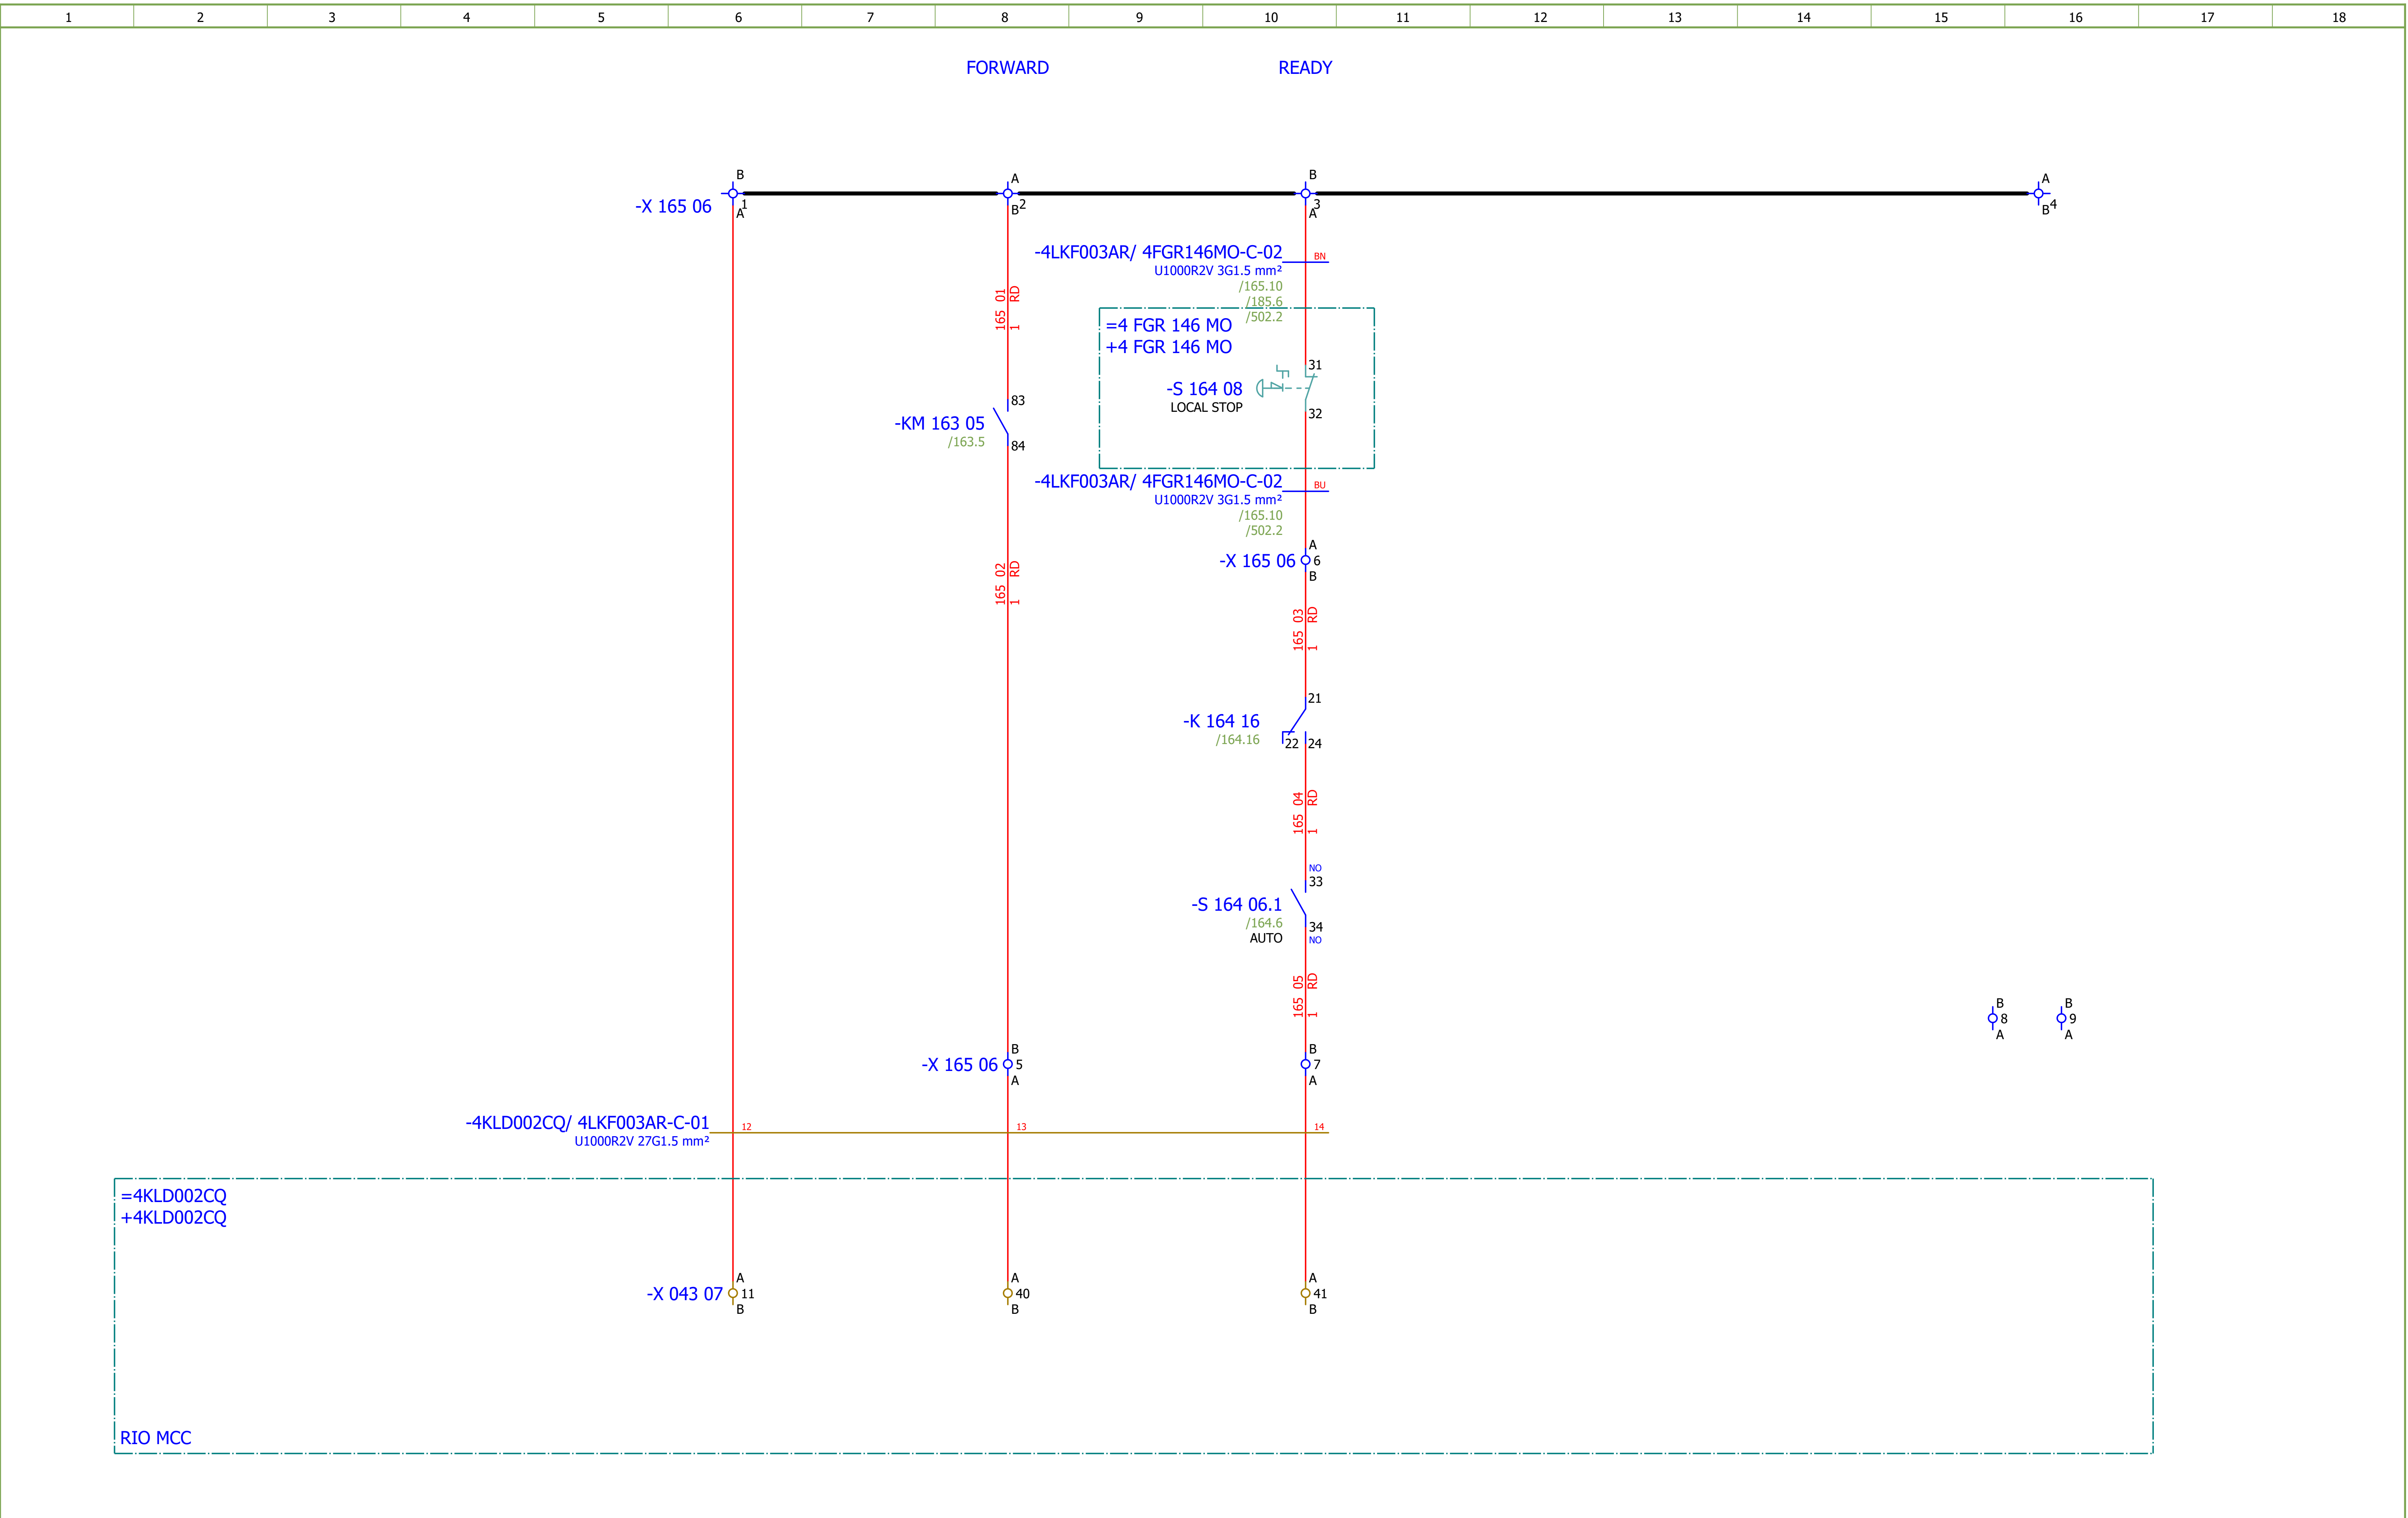

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Luka Božičević								#D
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SEALING AIR FAN LEFT - SIGNALIZATION	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR / Sheet: 165
Format:	A3								+4LKF003AR / Next: 166

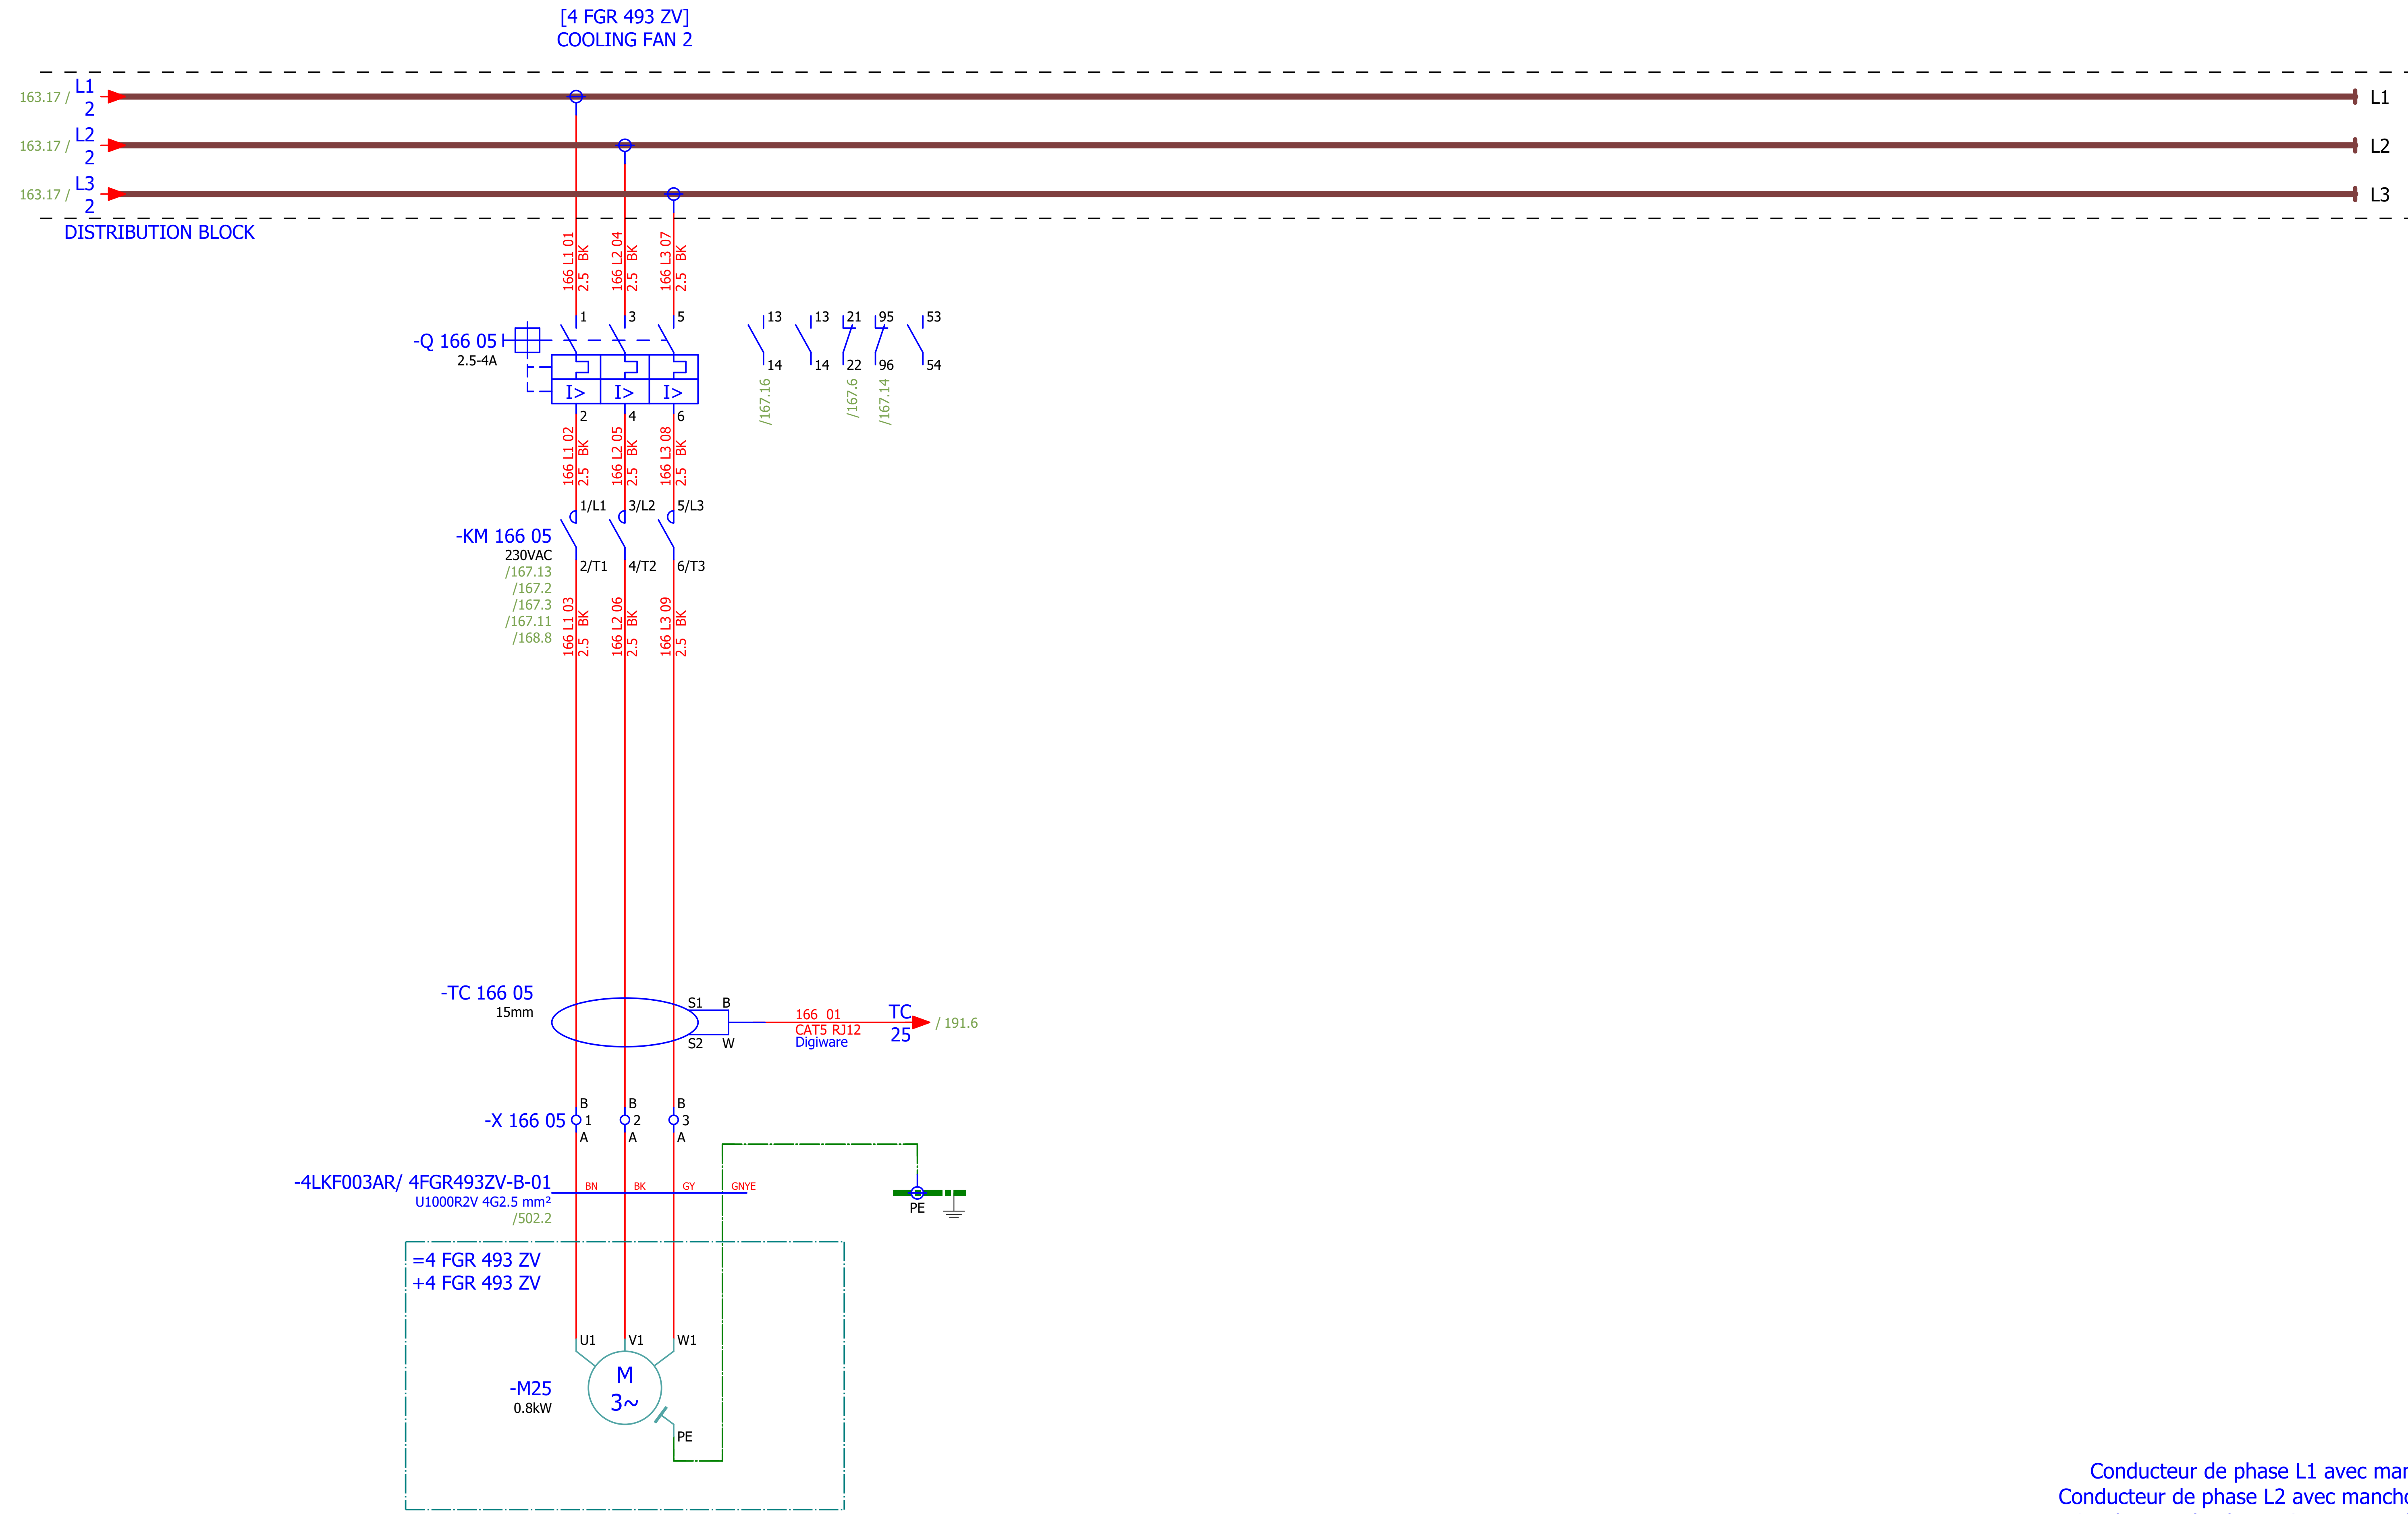

NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date:	17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Luka Božičević								
Approved:	Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING FAN 2	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 166
Format:	A3							+4LKF003AR	Next: 167

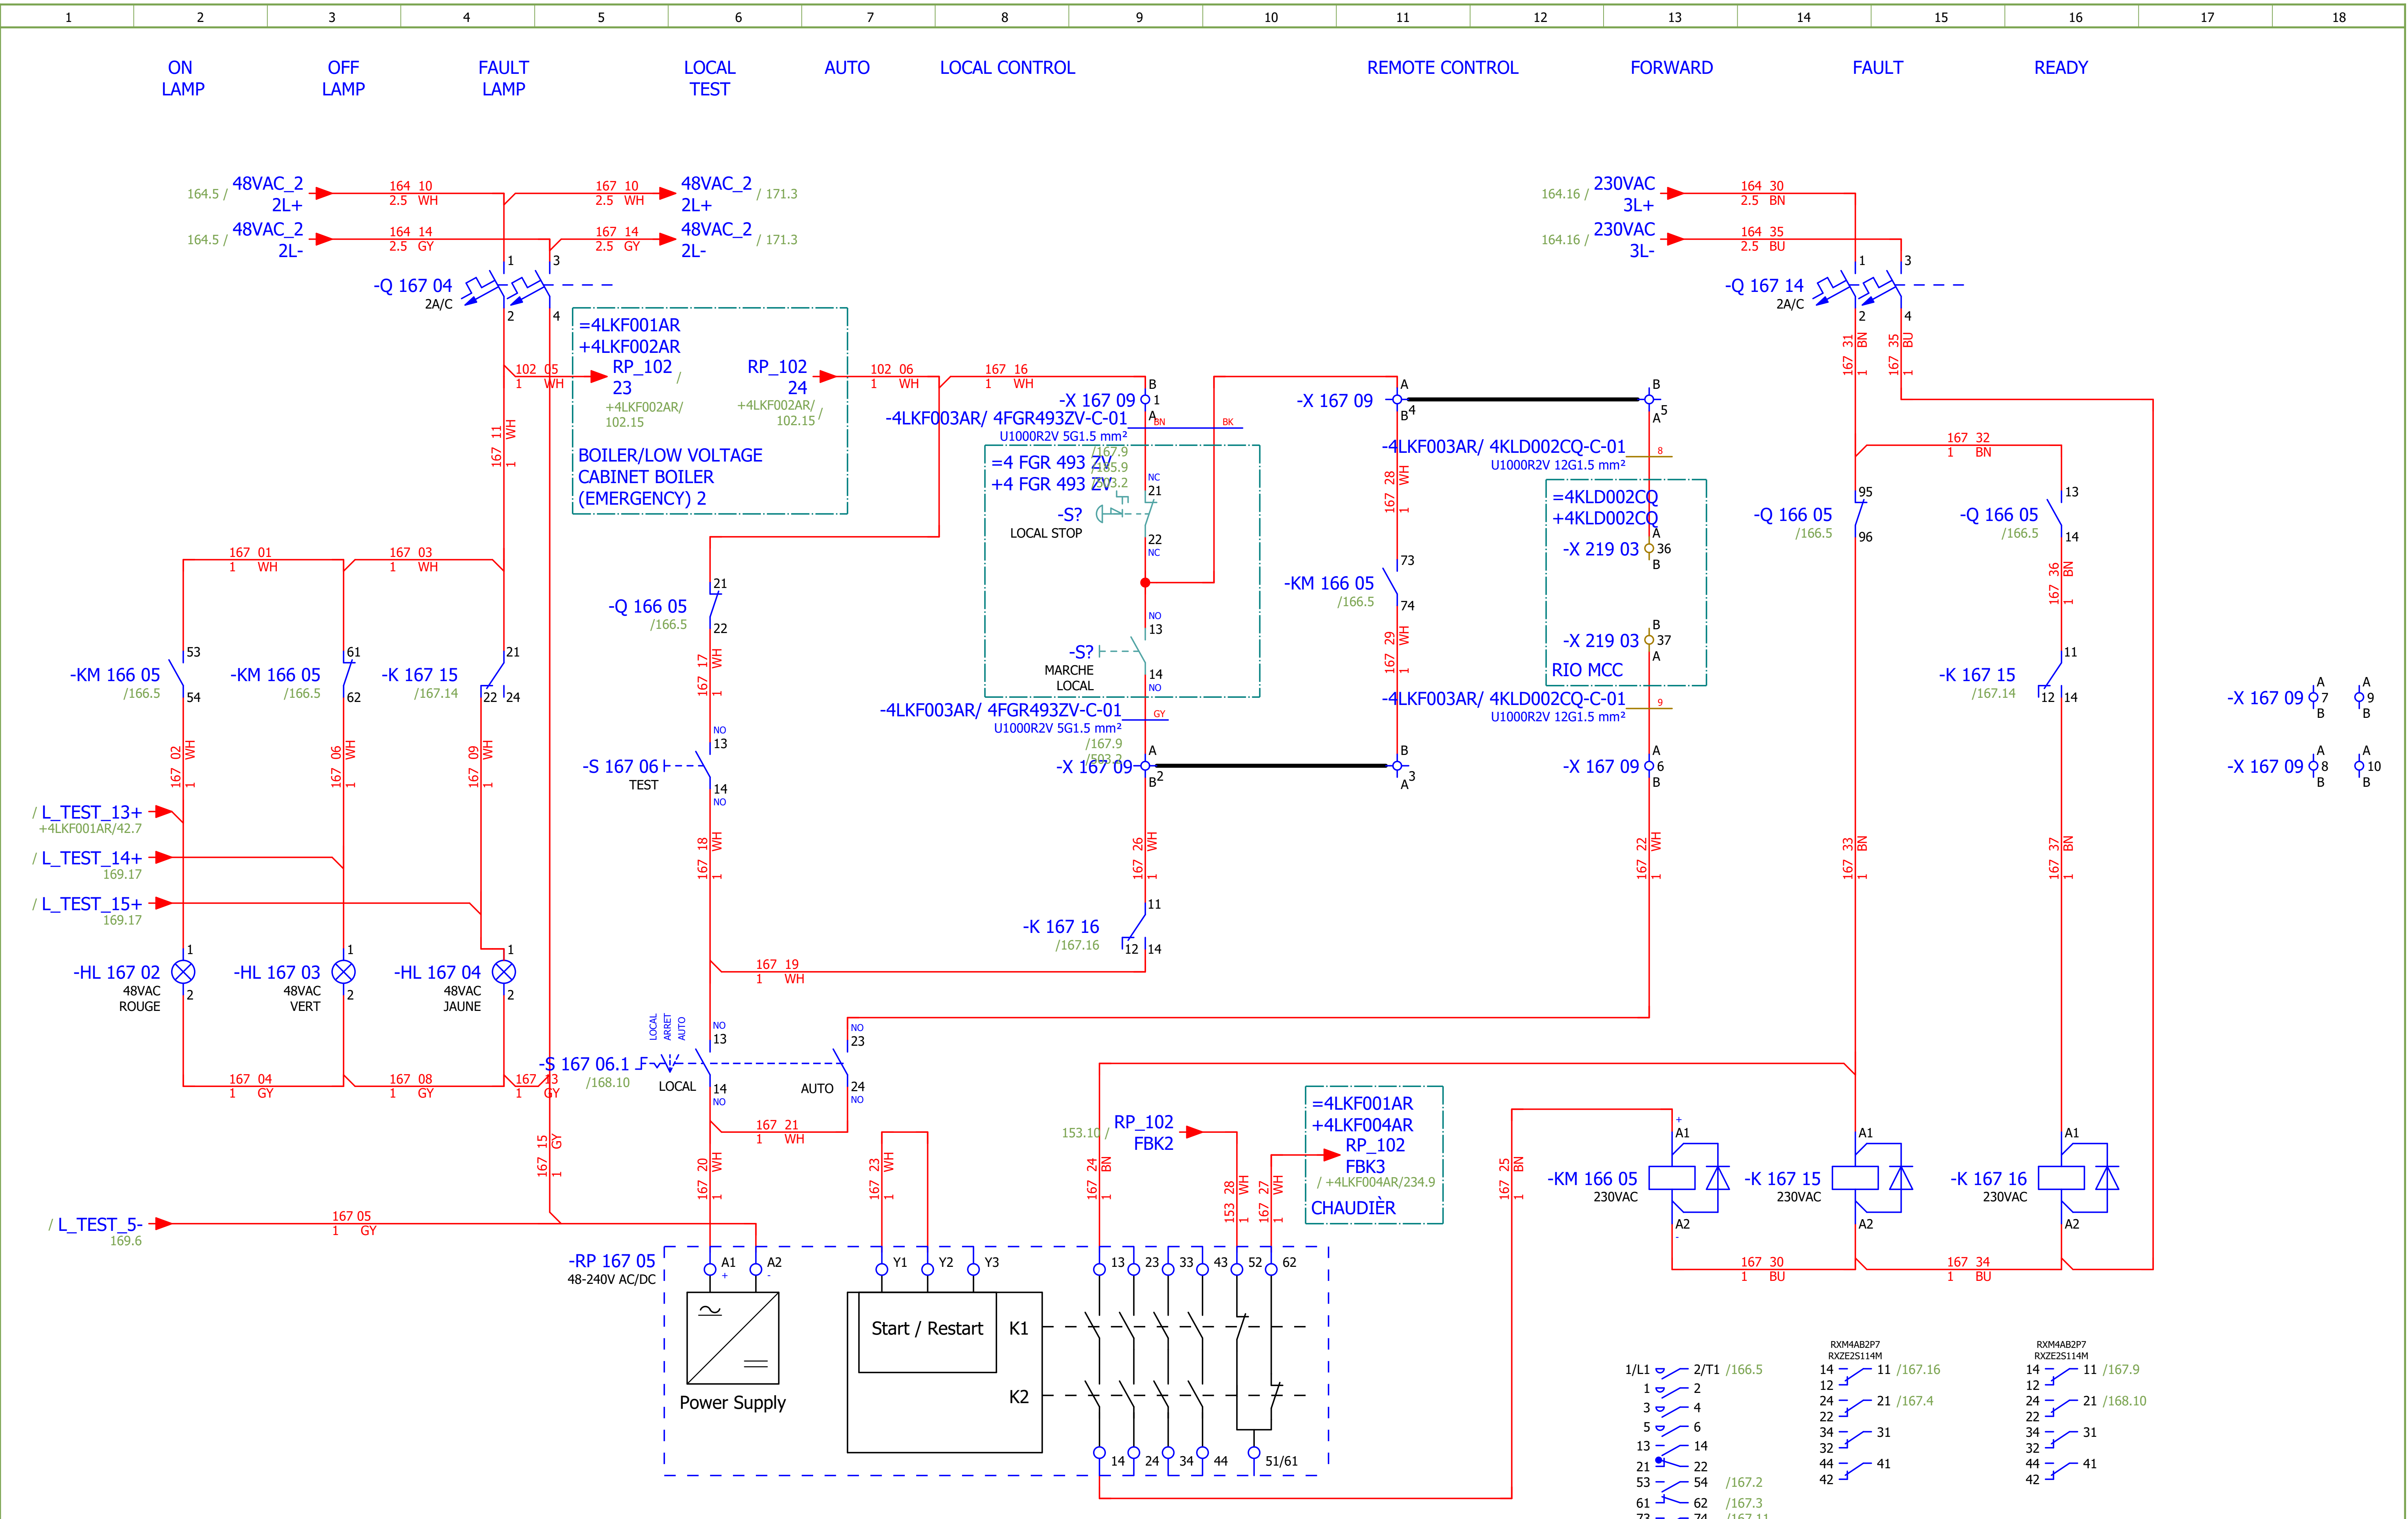

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer: ATEP0
Drawn:	Luka Božičević						
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING FAN 2 - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F	
Format:	A3						

Number: 1870	Revision: F	#D
=4LKF001AR	Sheet:	167
+4LKF003AR	Next:	168

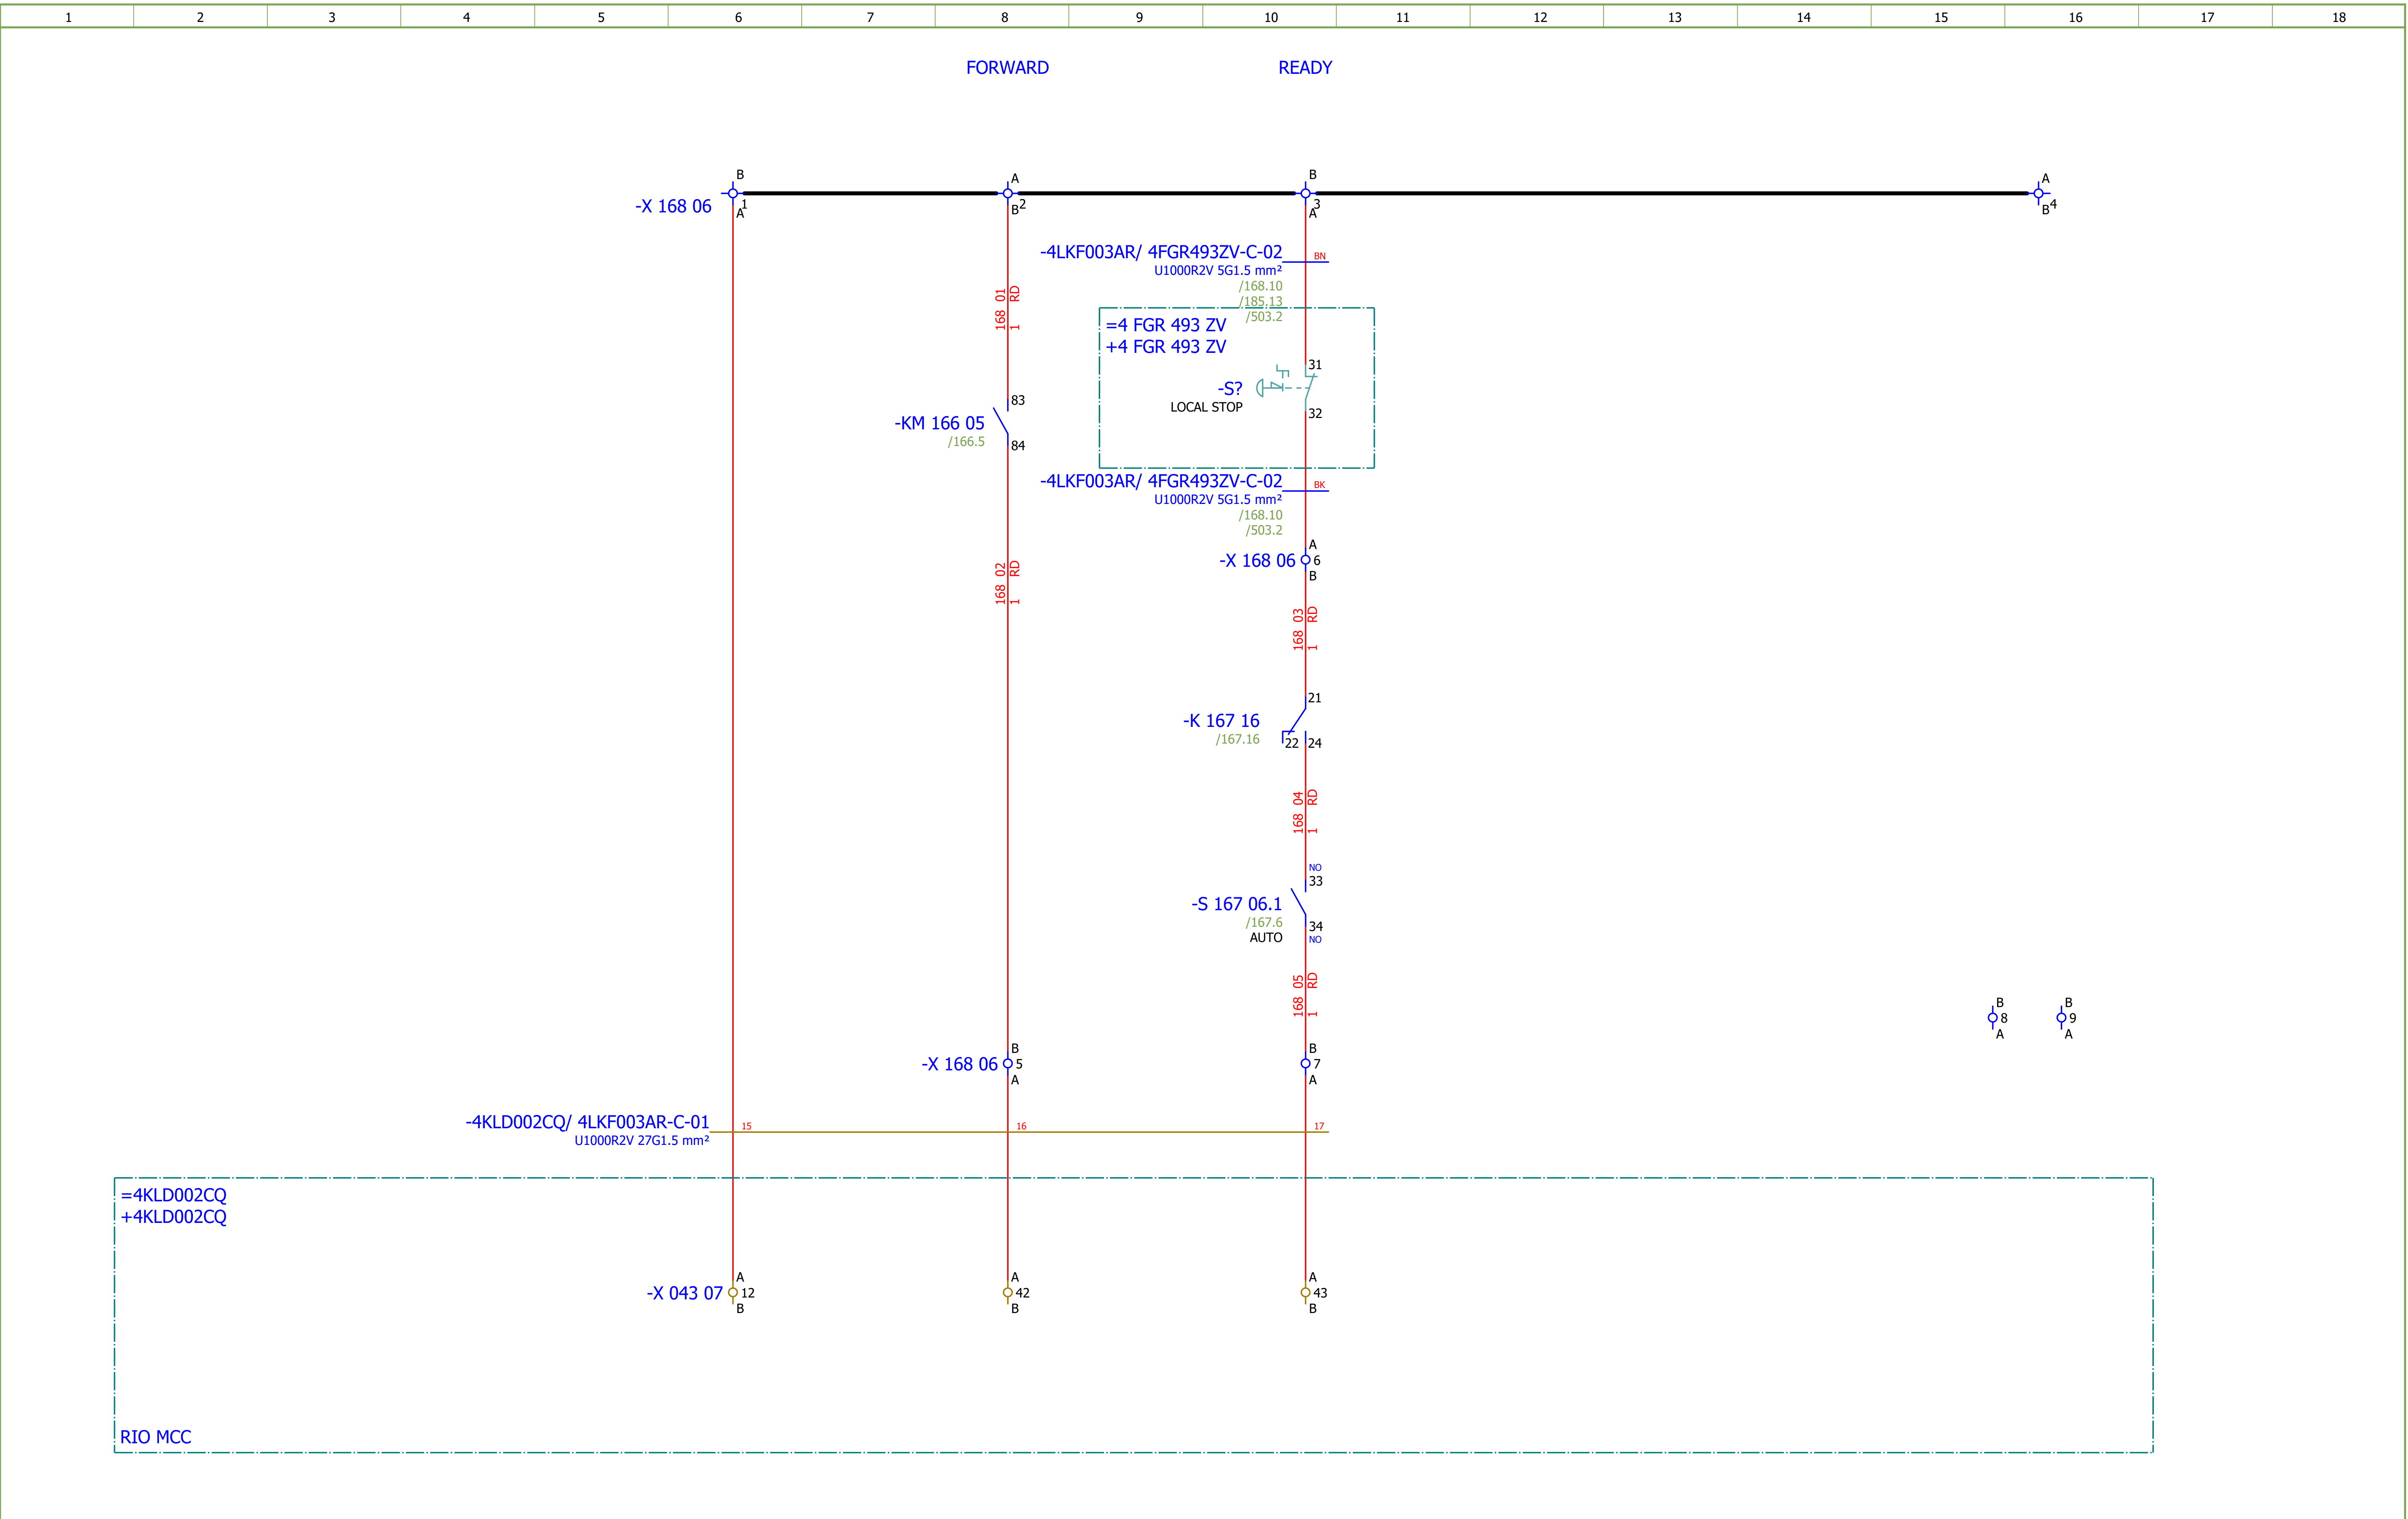

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Luka Božičević								#D
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING FAN 2 - SIGNALISATION	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 168
Format:	A3							+4LKF003AR	Next: 169

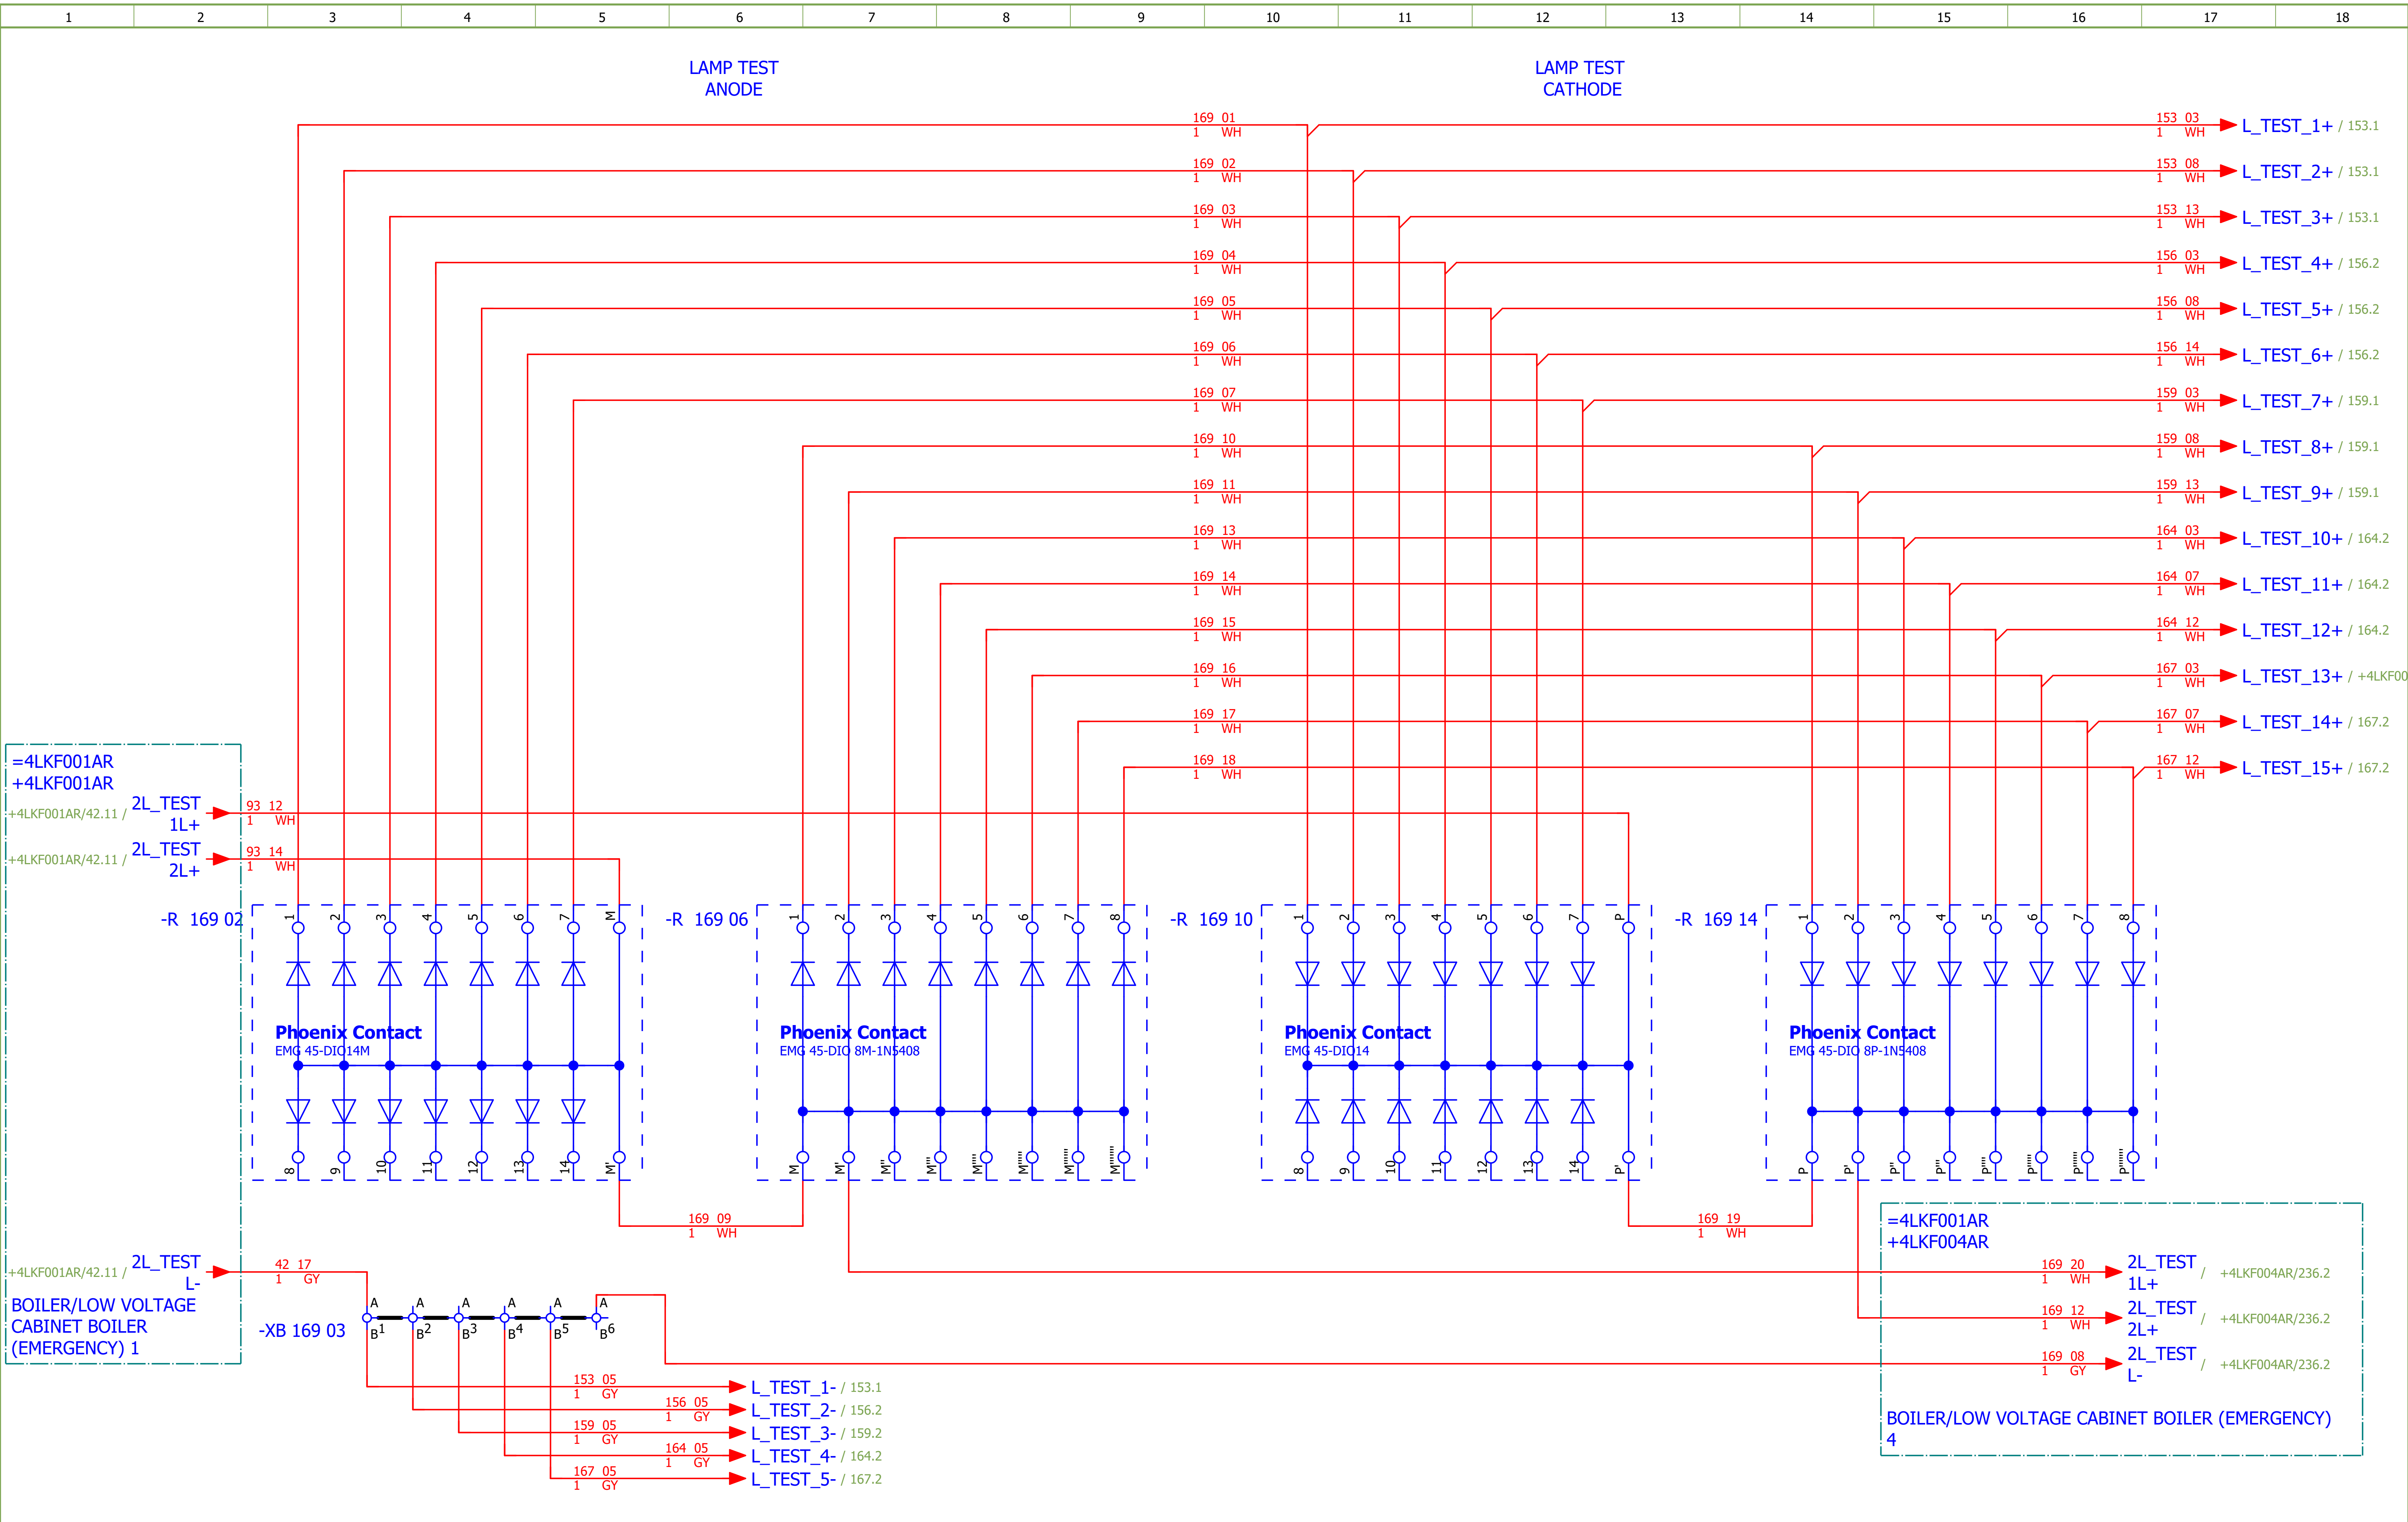

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Luka Božičević										
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	LAMP TEST	Drawing designation:	BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 169
Format:	A3									+4LKF003AR	Next: 171

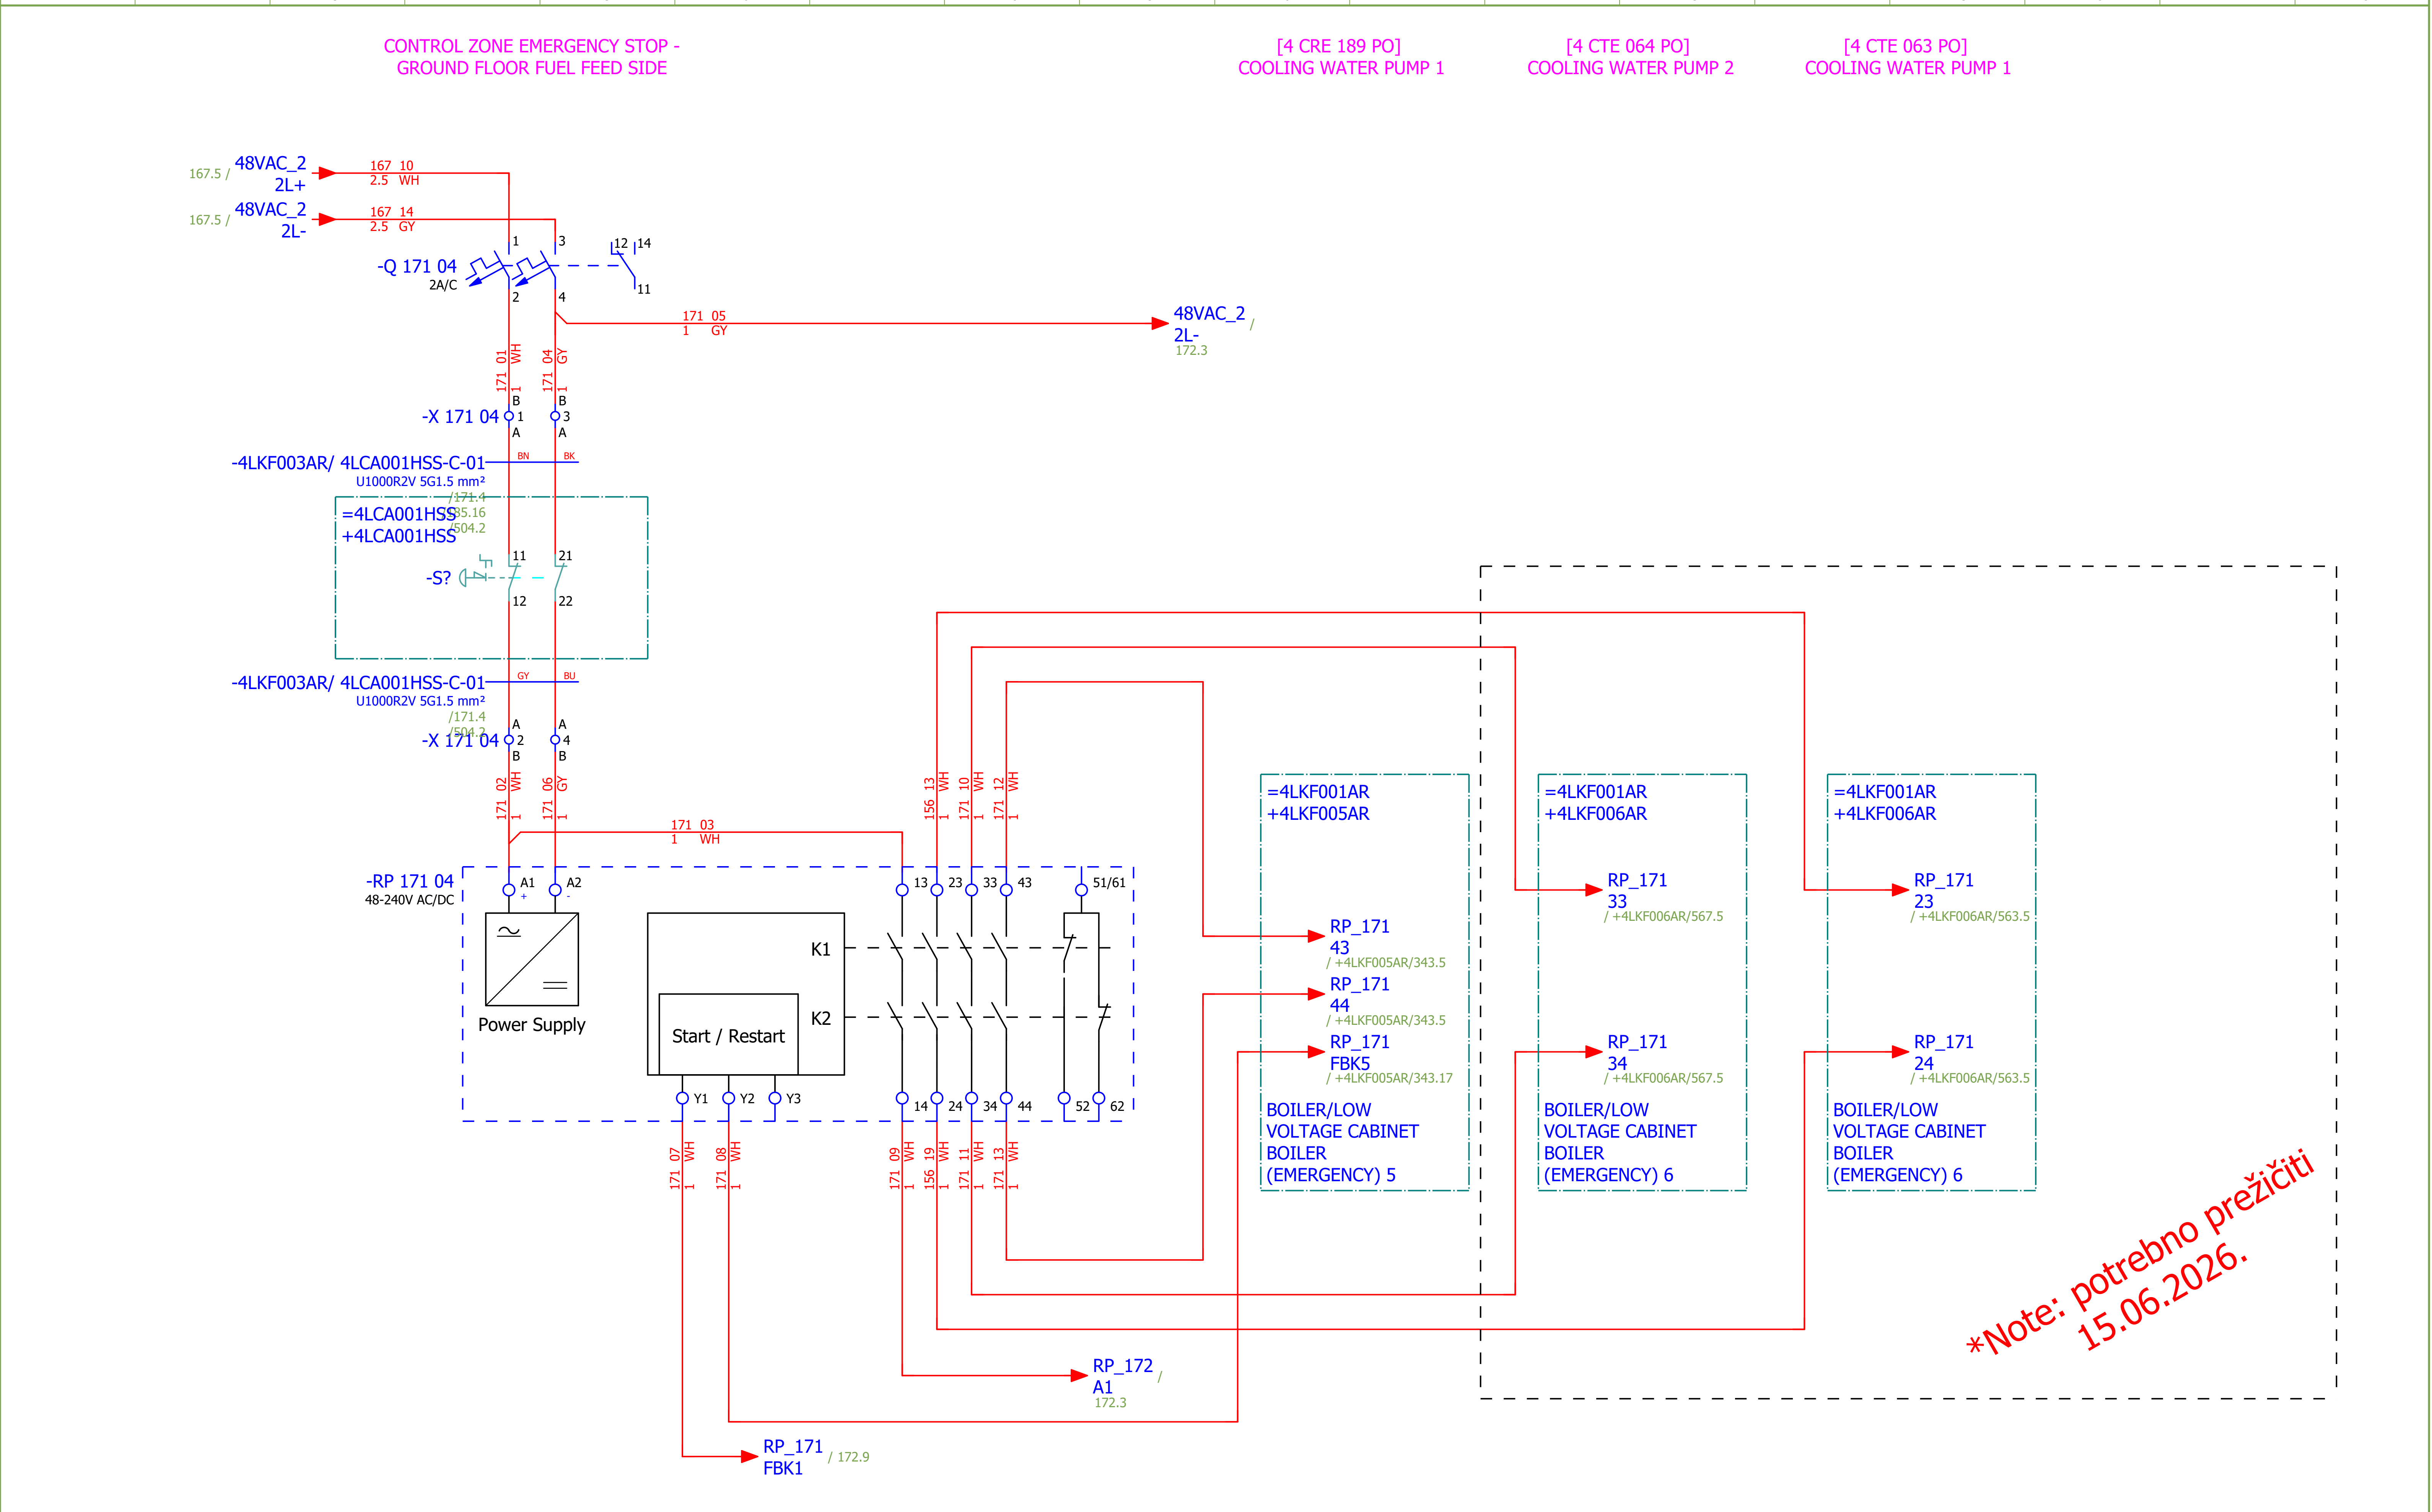

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Luka Božičević								#NA
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: EMERGENCY SHUTDOWN - GROUND FLOOR FUEL FEED SIDE	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 171
Format:	A3							+4LKF003AR	Next: 172

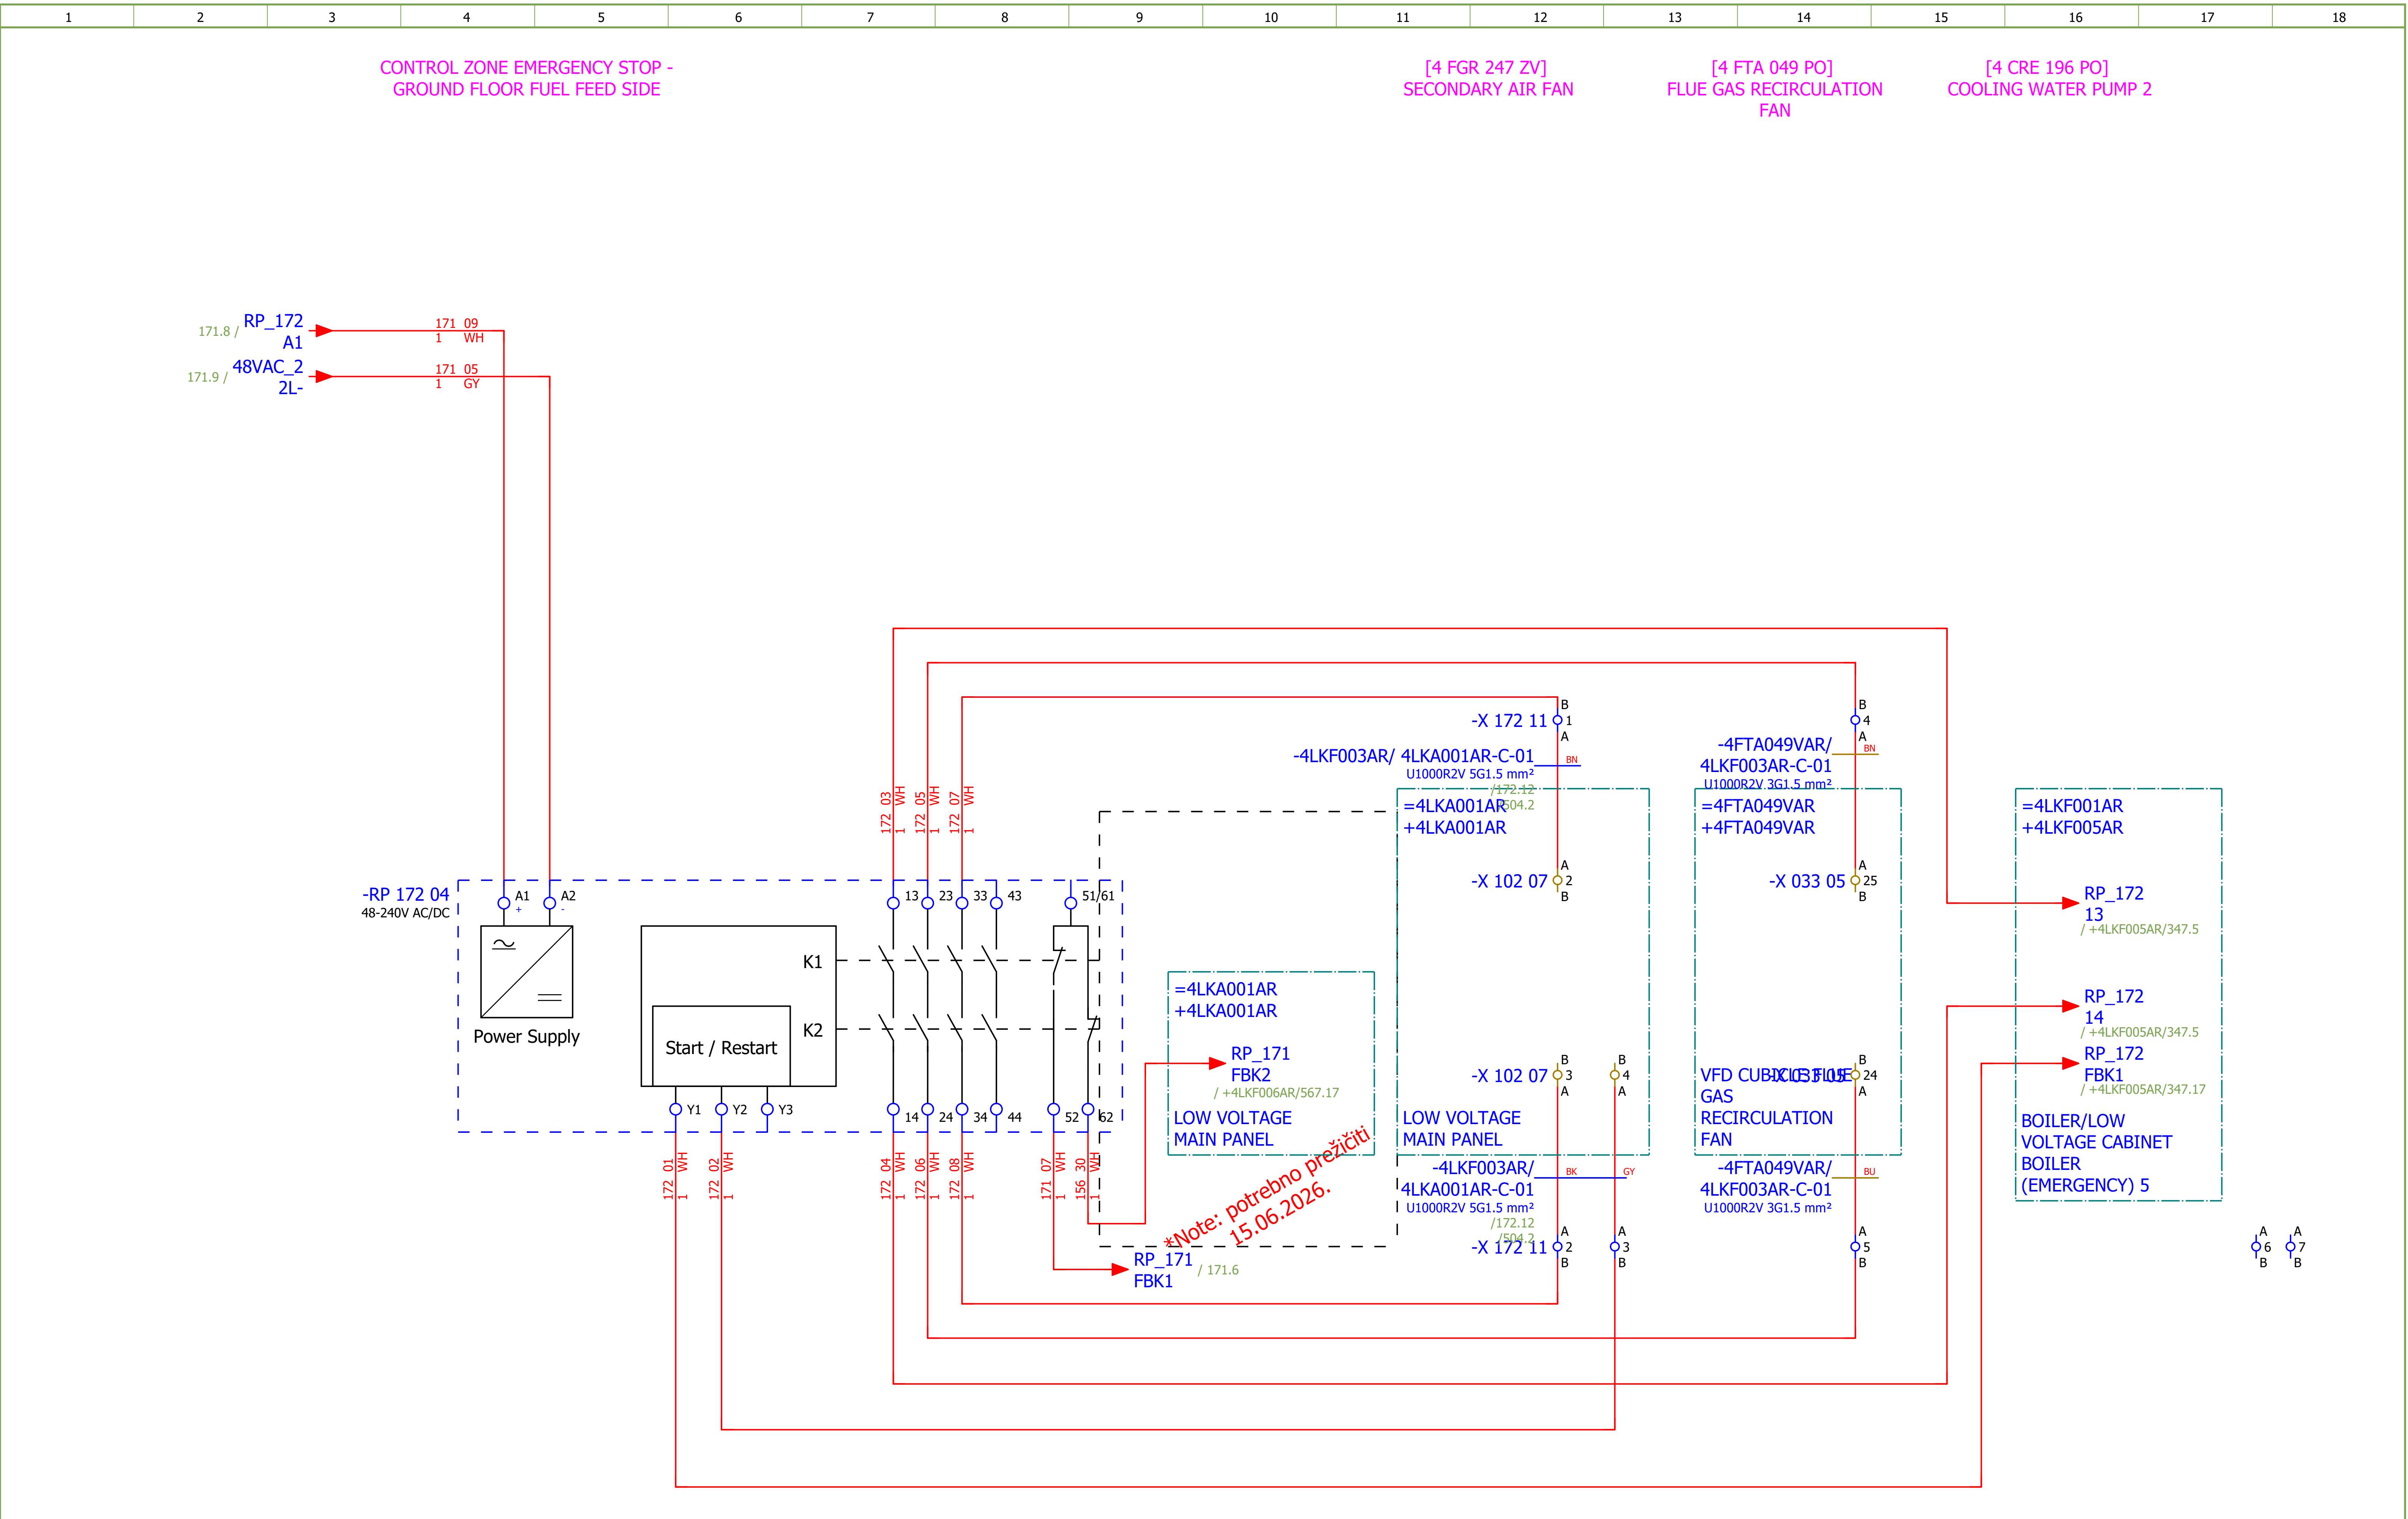

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#NA
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: EMERGENCY SHUTDOWN - GROUND FLOOR FUEL FEED SIDE	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 172
Format:	A3								+4LKF003AR	Next: 181

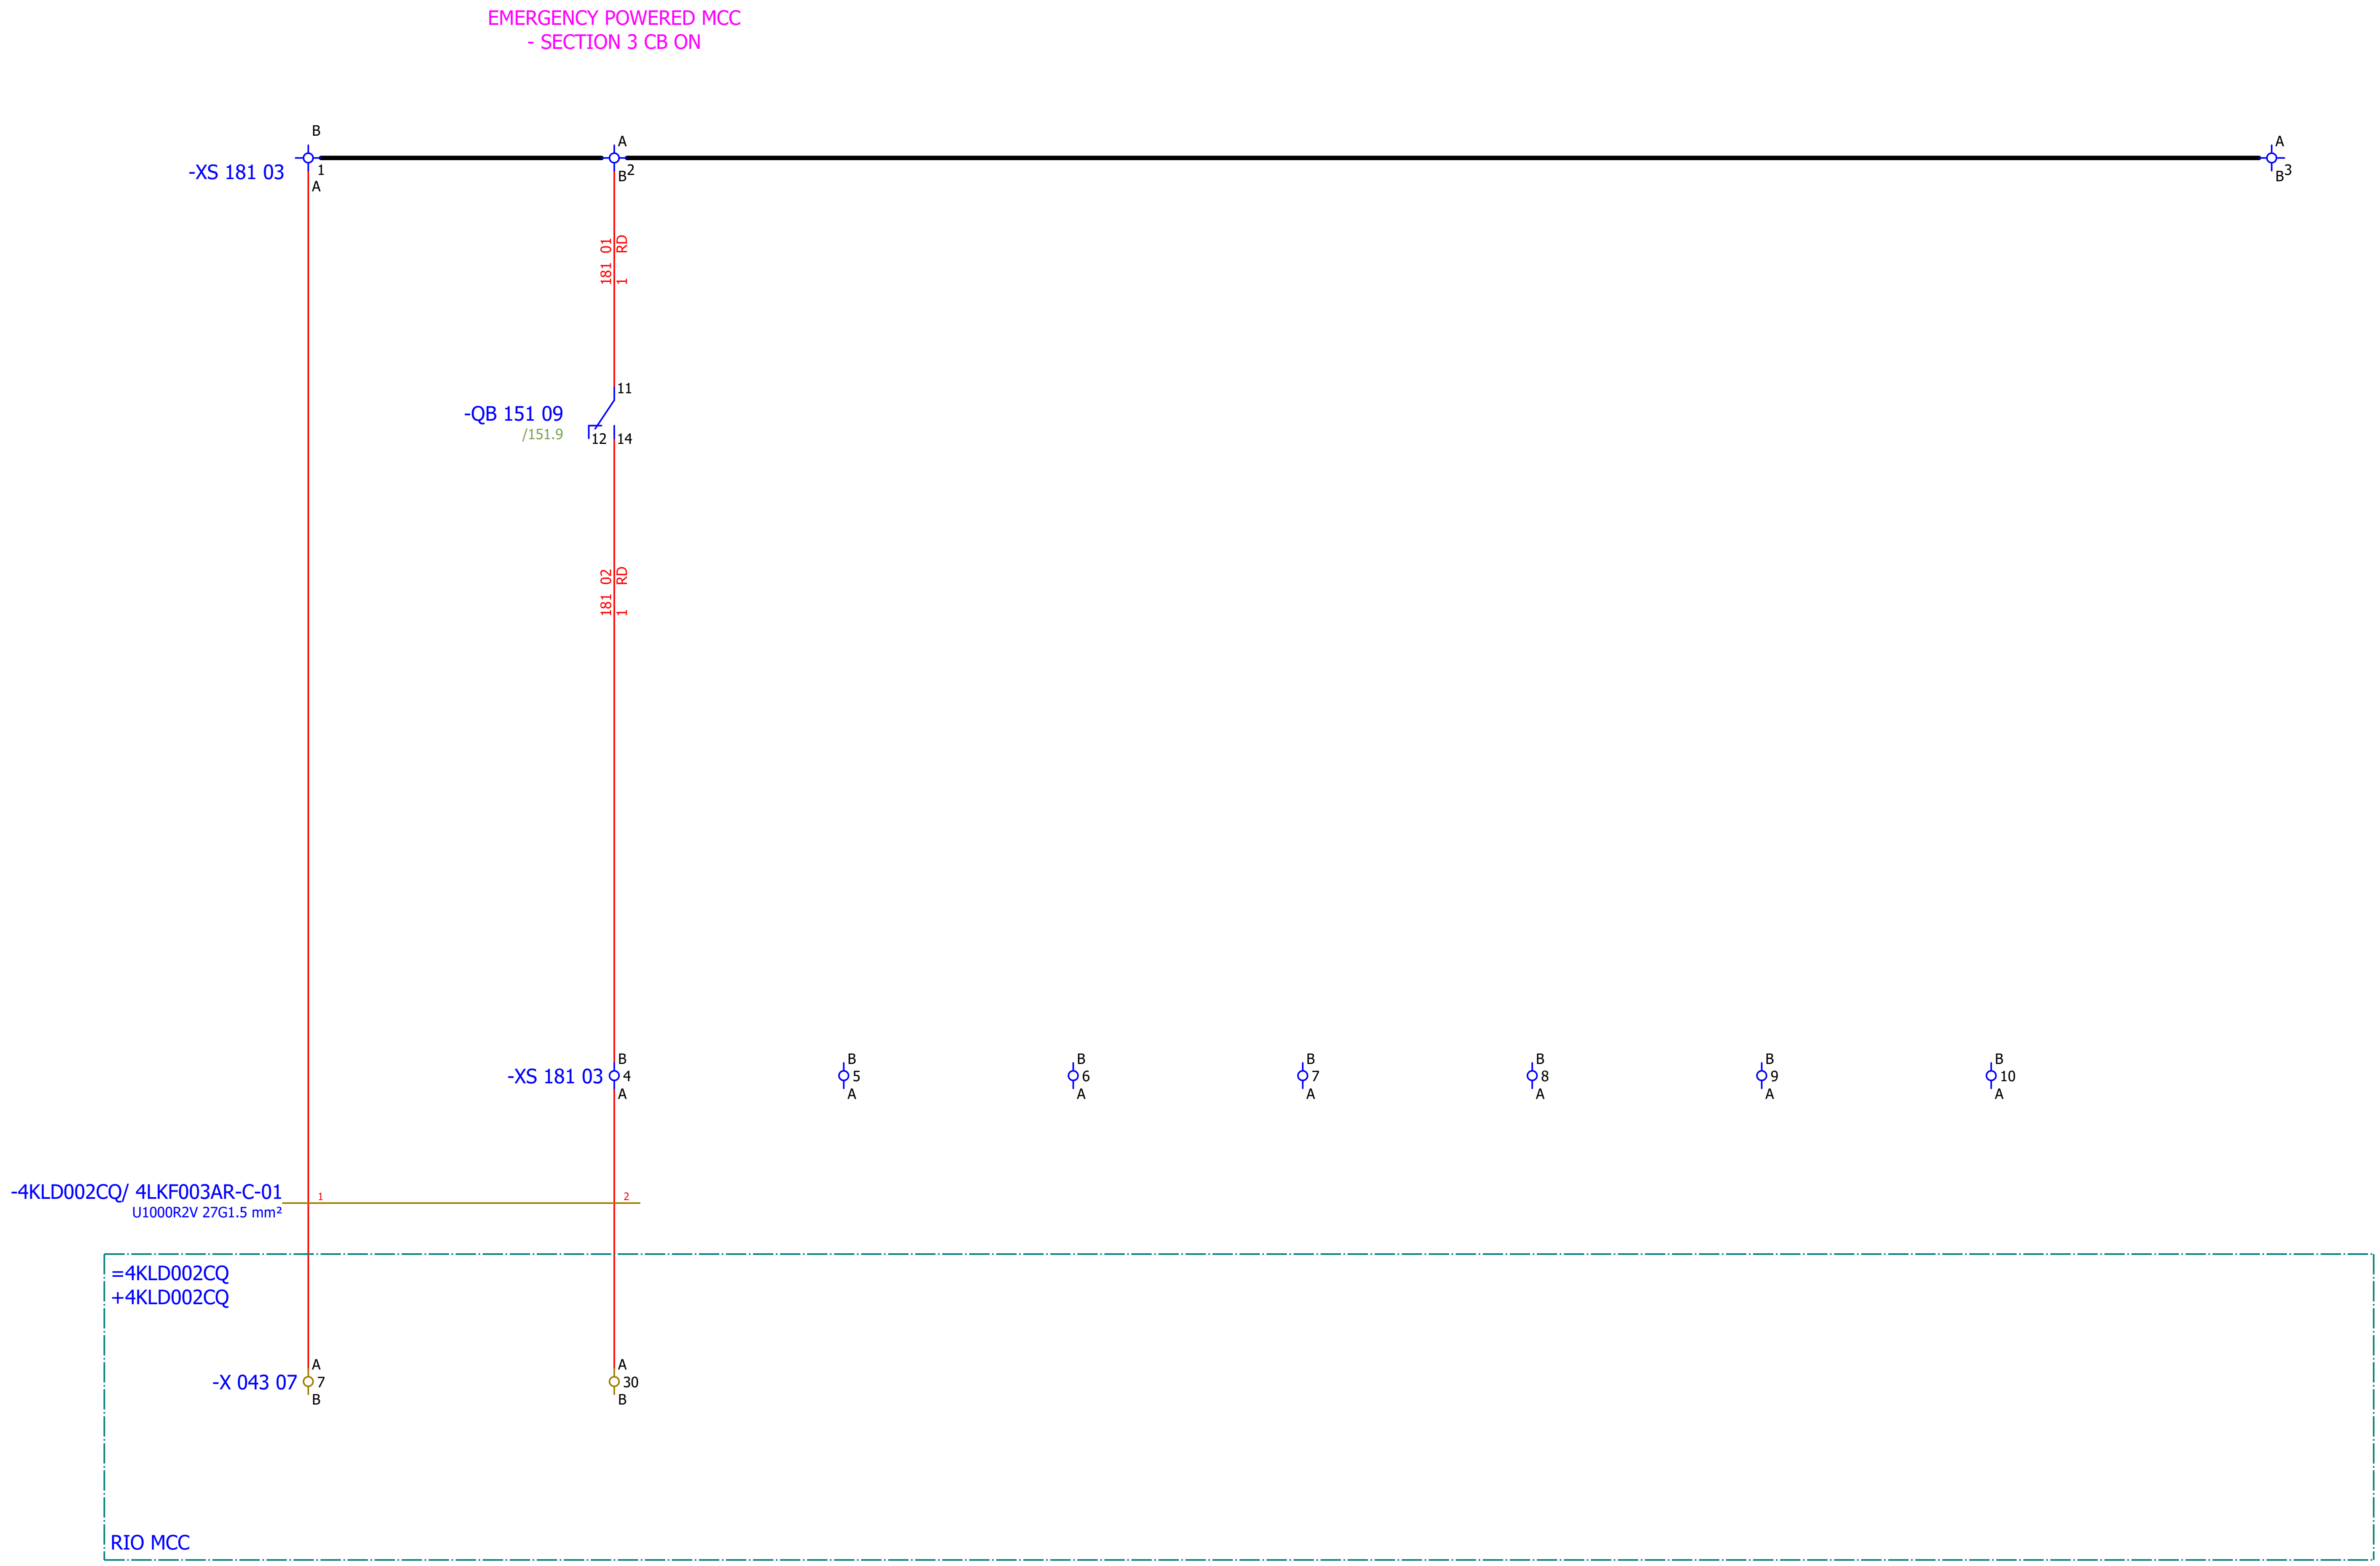

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Luka Božičević								#QA
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SIGNALIZATION	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 181
Format:	A3							+4LKF003AR	Next: 185

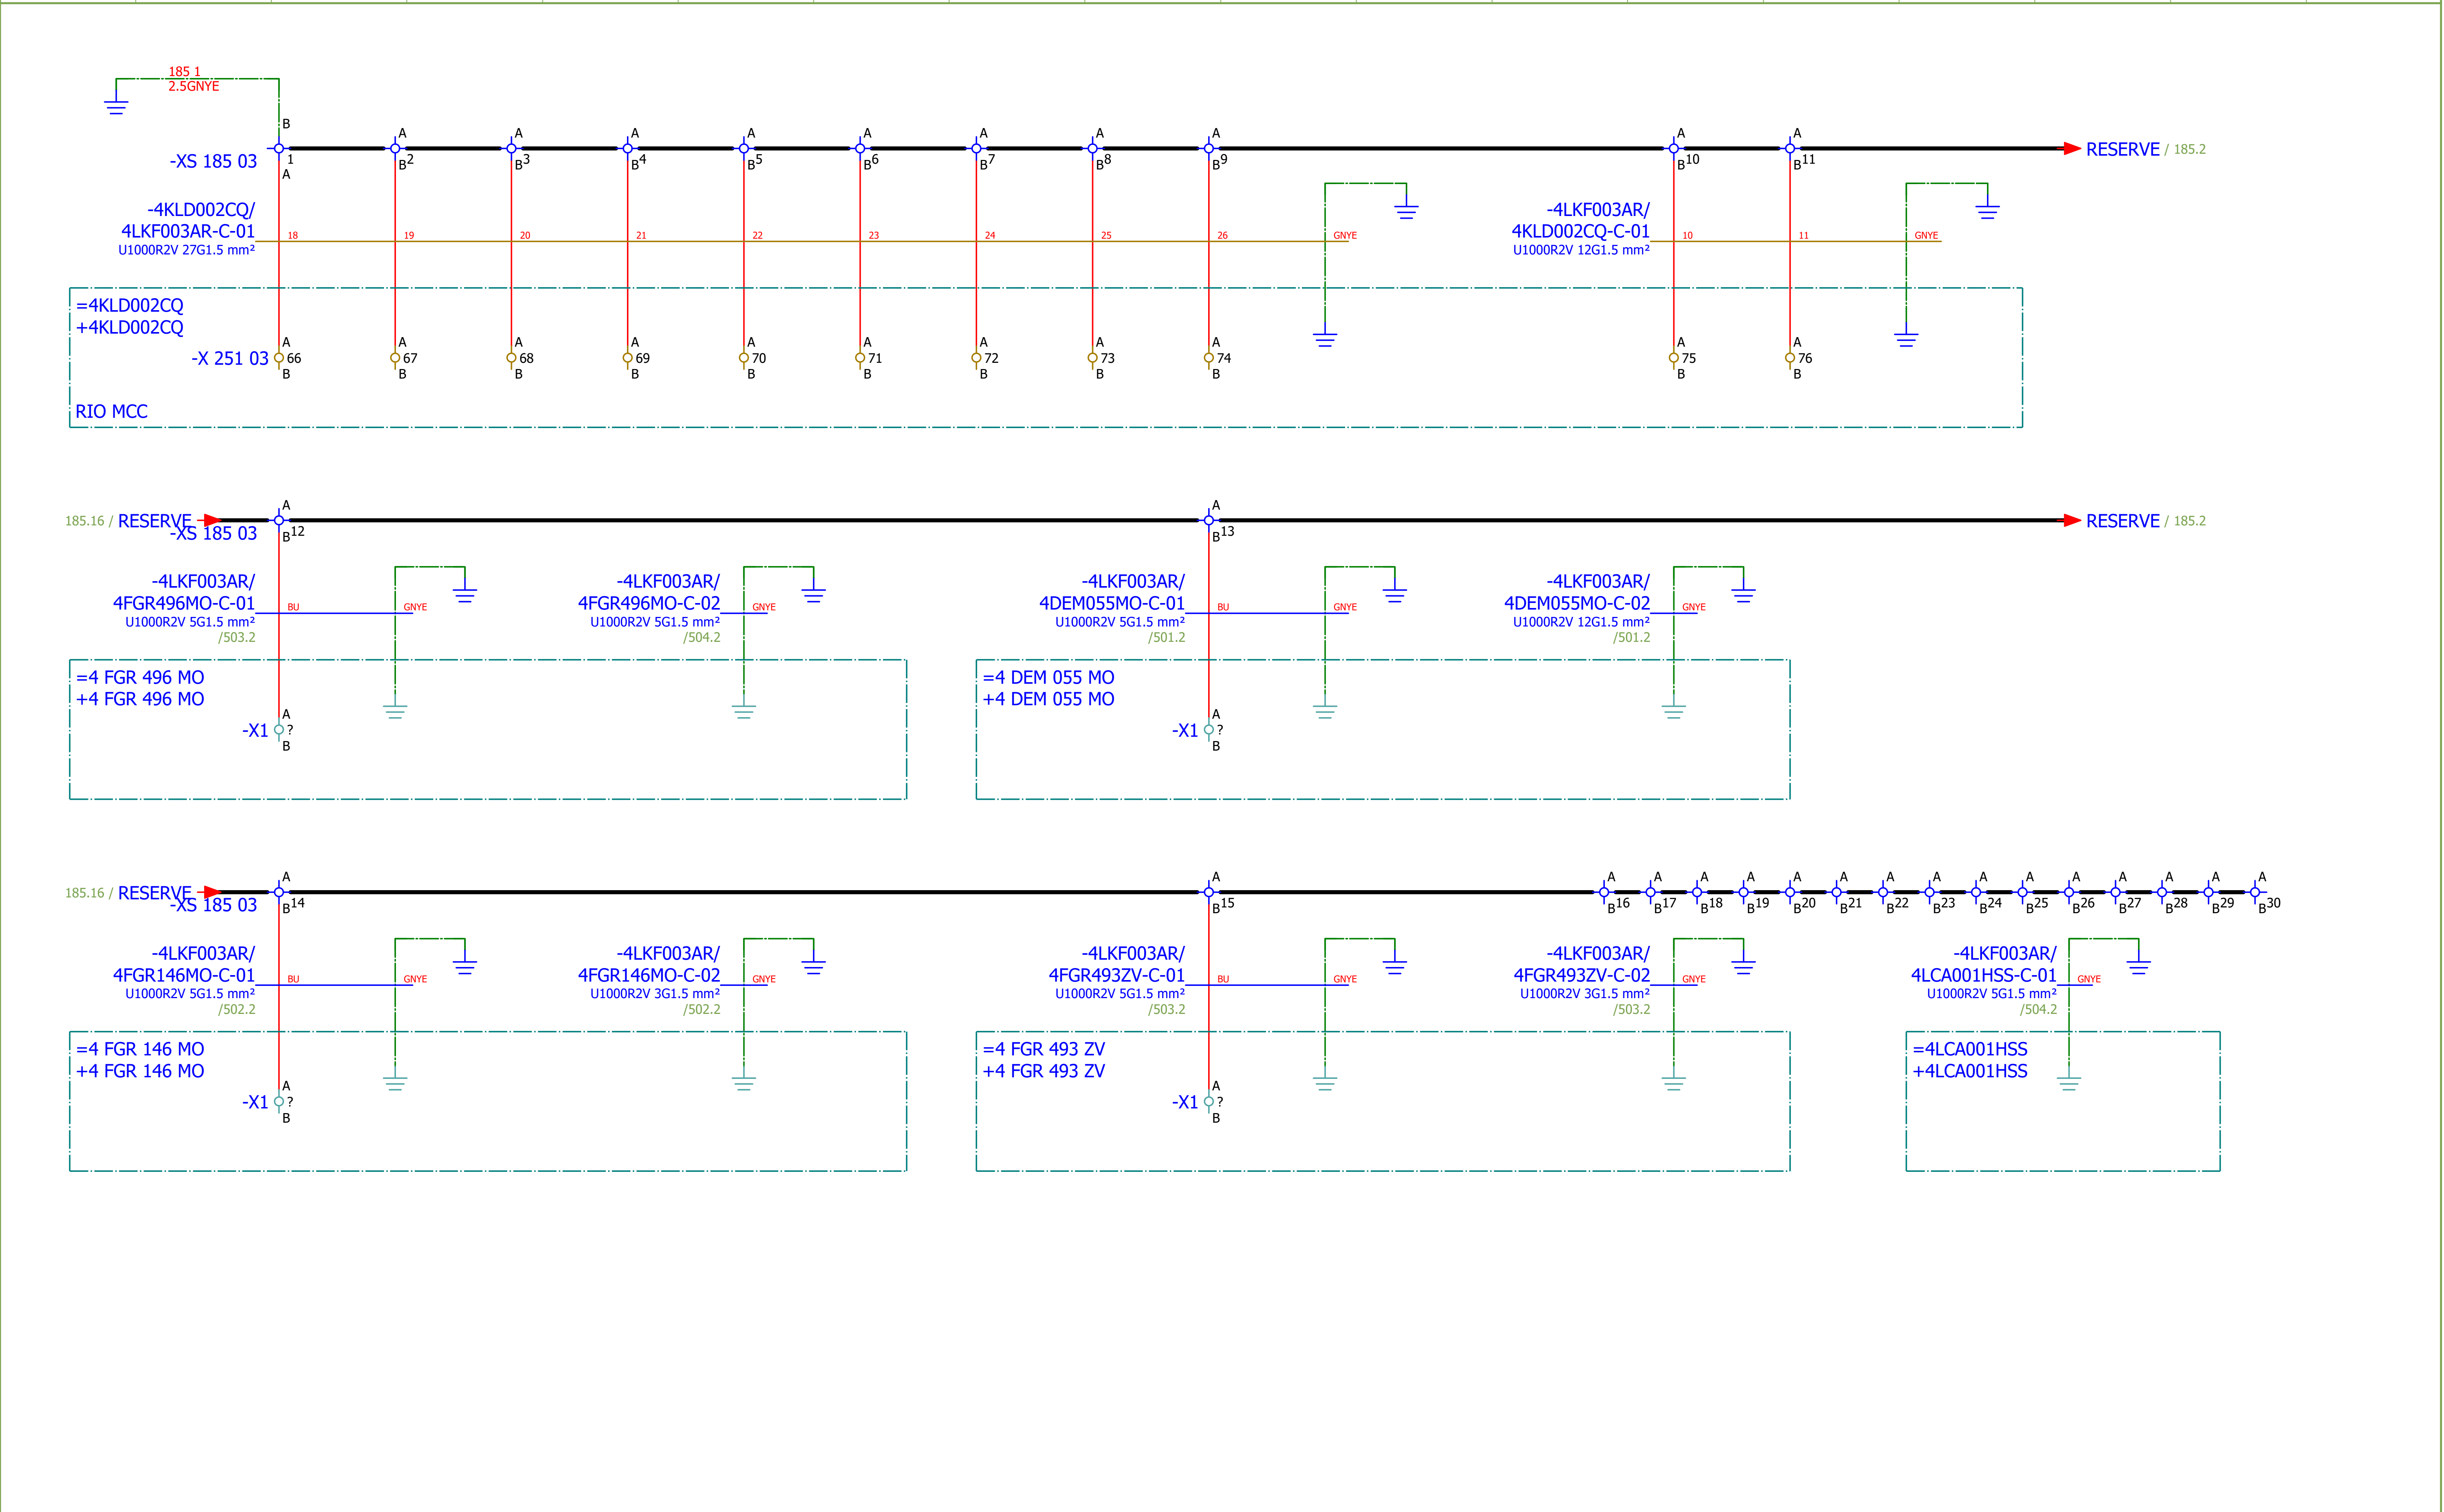

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#QB
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 185
Format:	A3								+4LKF003AR	Next: 191

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

MEASUREMENT

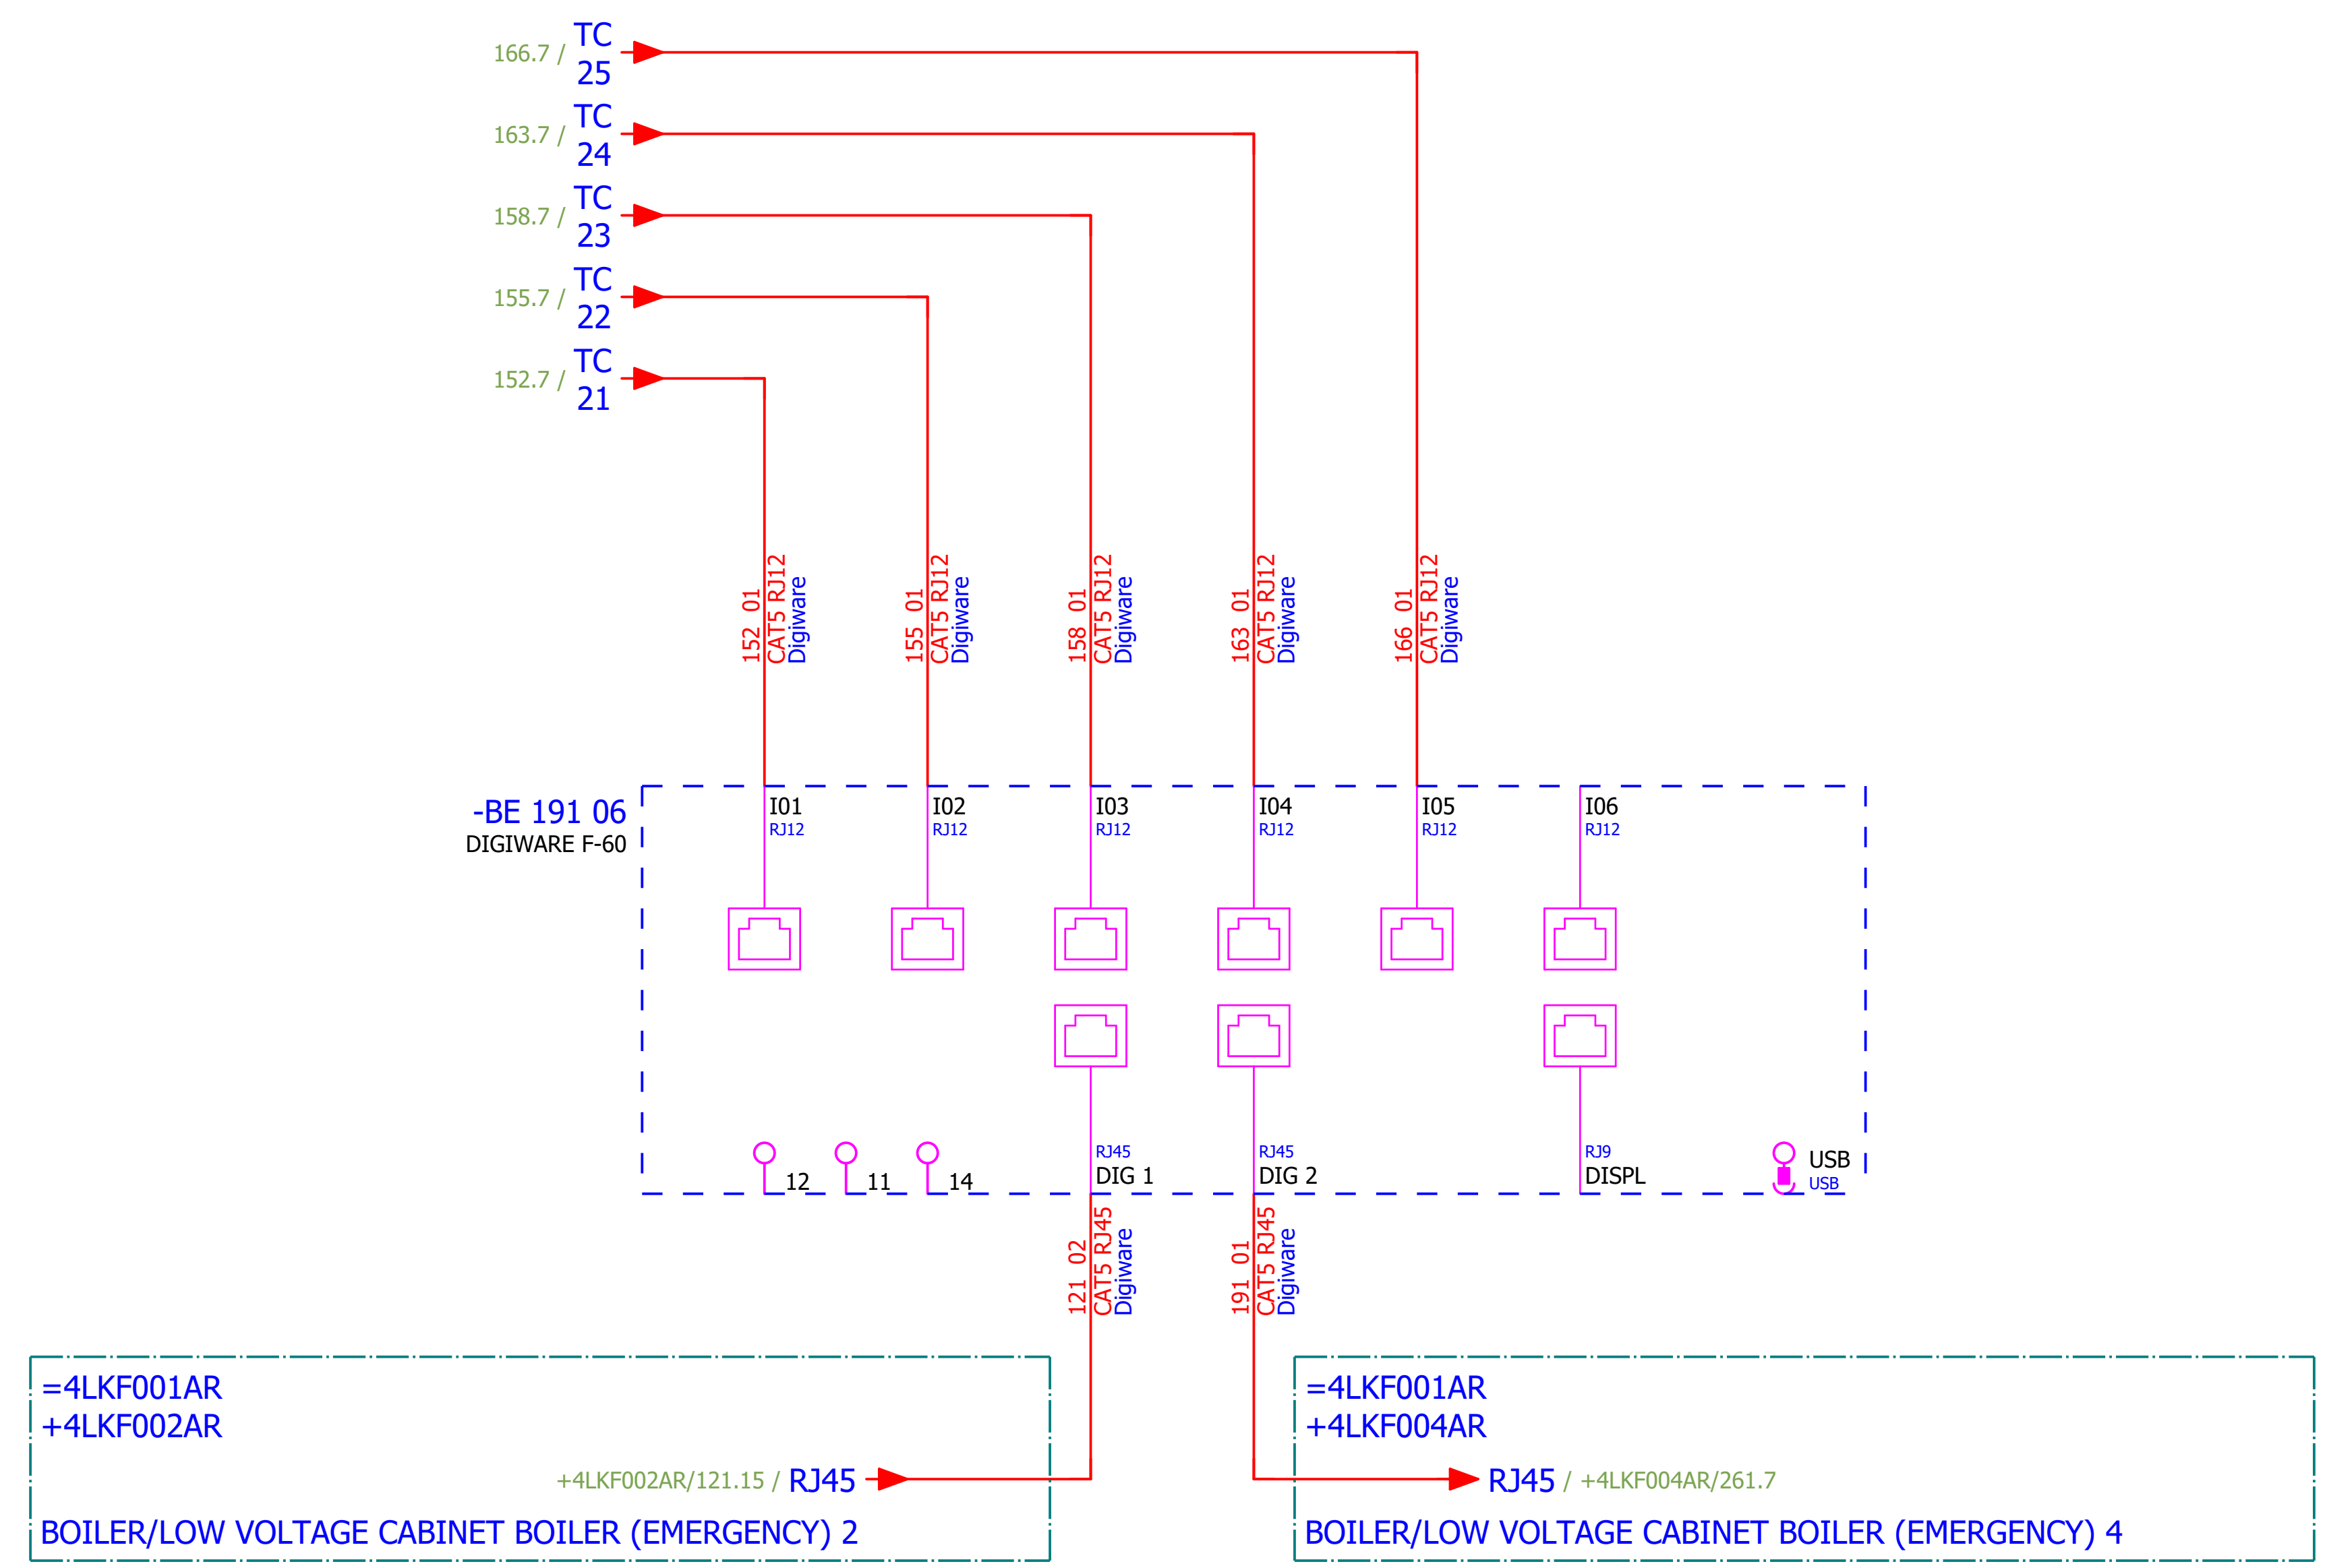

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#V
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COMMUNICATION	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 191
Format:	A3								+4LKF003AR	Next: 401

Sorting number	Part number	Quantity	Manufacturer	Device	Device description	Device designation
1.	SOC.47290126	1	Socomec	Module location default ISOM DIGIWARE F-60	Network type - Power distribution, Control circuits, Medical Rated voltage - 24 VDC Type - Insulation Fault Locator Indication - Digital	-BE 191 06
2.	SE.ZB4BVBG1	15	Schneider Electric	white light block with body/fixing collar integral LED 24...120VAC/DC		-HL 153 02...-HL 153 04;-HL 156 02...-HL 156 04;-HL 159 02...-HL 159 04;-HL 164 02...-HL 164 04;-HL 167 02...-HL 167 04
3.	SE.ZB4BV043	6	Schneider Electric	Red pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Red	-HL 153 02;-HL 156 02;-HL 159 02;-HL 159 03;-HL 164 02;-HL 167 02
4.	SE.ZBZ32	15	Schneider Electric	Harmony XB4	Legend holder, plastic	-HL 153 02...-HL 153 04;-HL 156 02...-HL 156 04;-HL 159 02...-HL 159 04;-HL 164 02...-HL 164 04;-HL 167 02...-HL 167 04
5.	SE.ZB4BV033	4	Schneider Electric	Green pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Green	-HL 153 03;-HL 156 03;-HL 164 03;-HL 167 03
6.	SE.ZB4BV053	5	Schneider Electric	Orange pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Orange	-HL 153 04;-HL 156 04;-HL 159 04;-HL 164 04;-HL 167 04
7.	SE.RXM4AB2P7	10	Schneider Electric	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED	-K 153 15;-K 153 16;-K 156 15;-K 156 16;-K 160 08;-K 160 10;-K 164 15;-K 164 16;-K 167 15;-K 167 16
8.	SE.RXZE2S114M	10	Schneider Electric	Socket	For RXM2/RXM4 relays Screw connectors Separate contact 4 C/O	-K 153 15;-K 153 16;-K 156 15;-K 156 16;-K 160 08;-K 160 10;-K 164 15;-K 164 16;-K 167 15;-K 167 16
9.	SE.RXM041FU7	10	Schneider Electric	Protection module	RC circuit - 110..240 V AC - for RPZ/RXZ sockets	-K 153 15;-K 153 16;-K 156 15;-K 156 16;-K 160 08;-K 160 10;-K 164 15;-K 164 16;-K 167 15;-K 167 16
10.	SE.LC1D18P7	1	Schneider Electric	Contactor TeSys LC1-D - 3P - AC-3 440V 18 A, Coil 230 V AC	Contactor TeSys LC1-D - 3P - AC-3 440V 18 A, Coil 230 V AC	-KM 152 05
11.	SE.LADN31	6	Schneider Electric	Auxiliary contact block TeSys - 3 NO + 1 NC,screw-clamps terminals	Auxiliary contact block TeSys - 3 NO + 1 NC,screw-clamps terminals	-KM 152 05;-KM 155 05;-KM 158 05;-KM 158 07;-KM 163 05;-KM 166 05
12.	SE.LAD4RCU	6	Schneider Electric	RC Transient Suppressor 110 TO 250 VAC	RC Transient Suppressor 110 TO 250 VAC	-KM 152 05;-KM 155 05;-KM 158 05;-KM 158 07;-KM 163 05;-KM 166 05
13.	SE.LC1D12P7	5	Schneider Electric	Contactor TeSys LC1-D - 3P - AC-3 440V 12 A, Coil 230 V AC	Contactor TeSys LC1-D - 3P - AC-3 440V 18 A, Coil 230 V AC	-KM 155 05;-KM 158 05;-KM 158 07;-KM 163 05;-KM 166 05
14.	SE.LAD9R1V	1	Schneider Electric	Reversing mechanical interlock kit	Tesys D, reversing mechanical interlock kit, with electrical interlocking, for LC1D09 to LC1D38	-KM 158 05
15.	SOC.192A1202	1	Socomec	Ammeter 0-15A	Scale: 0-15A (AC) Dimensions: 48x48mm	-PG 152 08
16.	SE.GV2P20	1	Schneider Electric	Motor circuit breaker	3-pole 13-18 A Thermal-magnetic	-Q 152 05
17.	SE.GVAE11	5	Schneider Electric	Auxiliary contact block	1NO+1NC Front mounting For GV2	-Q 152 05;-Q 155 05;-Q 158 05;-Q 163 05;-Q 166 05
18.	SE.GVAD0110	5	Schneider Electric	TeSys GV AD0110 - auxiliary contact - 1 NO + 1 NC (fault)		-Q 152 05;-Q 155 05;-Q 158 05;-Q 163 05;-Q 166 05
19.	SE.A9F74202	11	Schneider Electric	2-pole MCB, 2A/C	Nominal current: 2 A Tripping curve: C	-Q 153 04;-Q 153 14;-Q 156 04;-Q 156 14;-Q 159 04;-Q 160 08;-Q 164 04;-Q 164 14;-Q 167 04;-Q 167 14;-Q 171 04
20.	SE.GV2P16	1	Schneider Electric	Thermal Magnetic Motor Circuit Breaker TeSys GV2P - 3P - 9...14 A	Thermal Magnetic Motor Circuit Breaker TeSys GV2P - 3P - 9...14 A	-Q 155 05

Sorting number	Part number	Quantity	Manufacturer	Device	Device description	Device designation
21.	SE.GV2P08	3	Schneider Electric	3-pole transformator protection circuit breaker		-Q 158 05;-Q 163 05;-Q 166 05
22.	SE.A9A26924	1	Schneider Electric	Auxiliary contact iOF, iC60	Auxiliary contact, Acti9, iOF, 1 OC, AC/DC	-Q 171 04
23.	SE.C10F3TM032	1	Schneider Electric	Circuit breaker, ComPacT NSX100B	36kA/415VAC 3 poles TMD trip unit 32A	-QB 151 09
24.	SE.29450	1	Schneider Electric	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV	-QB 151 09
25.	SE.LV429337T	1	Schneider Electric	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40	-QB 151 09
26.	SE.LVS04033	1	Schneider Electric	LINERGY DP	LINERGY DP 3P D.BLK/COMPACT 250A 27HOLES	-QB 151 09
27.	SE.LV429517	1	Schneider Electric	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250	-QB 151 09
28.	PXC.2950129	1	Phoenix Contact	Component for protective circuit	Diode module, with 14 diodes, common anode, diode type 1N 4007	-R 169 02
29.	PXC.2954882	1	Phoenix Contact	Diode block	Diode module, with eight diodes, common anode, diode type 1N 5408	-R 169 06
30.	PXC.2950116	1	Phoenix Contact	Component for protective circuit	Diode module, with 14 diodes, common cathode, diode type 1N 4007	-R 169 10
31.	PXC.2954879	1	Phoenix Contact	Component for protective circuit	Diode module, with eight diodes, common cathode, diode type 1N 5408	-R 169 14
32.	SE.XPSBAC34AP	8	Schneider Electric	Safety module	Harmony Safety Automation Estop or guard ,Harmony XPS, connected to supply terminals 48-240 V AC/DC , no inputs, screw	-RP 153 05;-RP 156 05;-RP 159 05;-RP 159 11;-RP 16 4 05;-RP 167 05;-RP 171 04;-RP 172 04
33.	SE.XB4BA21	4	Schneider Electric	Black flush complete pushbutton Ø22 spring return 1NO "unmarked"	Black flush complete pushbutton Ø22 spring return 1NO	-S 153 06;-S 156 06;-S 164 06;-S 167 06
34.	SE.XB4BD33	6	Schneider Electric	Selector switch, BLACK, 1-0-2, 2NO	Metal Black Ø22 3 positions 2 NO	-S 153 06.1;-S 156 06.1;-S 159 06;-S 159 06.1;-S 164 06.1;-S 167 06.1
35.	SE.ZBE101	3	Schneider Electric	Single contact block NO	Harmony XB4 Silver alloy 1 NO	-S 159 06.1
36.	SOC.47506030	5	Socomec	TORES LOCATION SENSOR DELTA IP-30 (30mm)	Fault locating differential transformer IP-30 Maximal diameter of cable: 30mm	-TC 152 05;-TC 155 05;-TC 158 05;-TC 163 05;-TC 16 6 05
37.	SOC.47290590	5	Socomec	ISOM T-15	Connection adaptor ISOM T-15 to ISOM Digiware F-60 modules	-TC 152 05;-TC 155 05;-TC 158 05;-TC 163 05;-TC 16 6 05
38.	SOC.192T2106	1	Socomec	Bar or cable-through CT TCB 17-20 60A/5A Class 1 1VA	Accuracy class: 0.2s — 0.5 or 1. Dielectric quality: 3 kV — 50 Hz - 1 min. Operating frequency: 50 — 60 Hz. Permanent overload: 1.2 In. Insulation class: E (120 °C).	-TCU 152 05
39.	SOC.48290500	3	Socomec	Solid current sensor TE-18 18mm 5-20A	Maximum cable passage dimensions: D:8.6mm	-TCU 152 05.1;-TCV 152 05;-TCW 152 05
40.	PXC.3209510	173	Phoenix Contact	PT 2,5 - Feed-through terminal block	Feed-through terminal block, nom. voltage: 800 V, nominal current: 24 A, number of connections: 2, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm2, cross section: 0.14 mm2 - 4 mm2, mounting type: NS 35/7,5, NS 35/15, color: gray	-X 152 05;-X 153 09;-X 154 06;-X 155 05;-X 156 09;-X 157 06;-X 158 05;-X 159 09;-X 161 06;-X 163 05;-X 1 64 09;-X 165 06;-X 166 05;-X 167 09;-X 168 06;-X 171 04;-X 172 11;-XB 169 03;-XS 181 03;-XS 185 03

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Cable name: **4LKF003AR/ 4DEM055MO-B-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **4G2.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF003AR/158.5	=4LKF001AR+4LKF003AR-X 158 05	1:A	**BN**	=4 DEM 055 MO+4 DEM 055 MO-M23	U1	=4LKF001AR+4LKF003AR/158.5	
[4 DEM 055 MO] DRAG CHAIN CONVEYOR 1	=4LKF001AR+4LKF003AR/158.5	=4LKF001AR+4LKF003AR-X 158 05	2:A	**BK**	=4 DEM 055 MO+4 DEM 055 MO-M23	V1	=4LKF001AR+4LKF003AR/158.5	
=	=4LKF001AR+4LKF003AR/158.5	=4LKF001AR+4LKF003AR-X 158 05	3:A	**GY**	=4 DEM 055 MO+4 DEM 055 MO-M23	W1	=4LKF001AR+4LKF003AR/158.5	
	=4LKF001AR+4LKF003AR/158.7	=4LKF001AR+4LKF003AR-PE		**GNYE**	=4 DEM 055 MO+4 DEM 055 MO-M23	PE	=4LKF001AR+4LKF003AR/158.5	

Cable name: **4LKF003AR/ 4DEM055MO-C-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
FORWARD	=4LKF001AR+4LKF003AR/159.9	=4LKF001AR+4LKF003AR-X 159 09	1:A	**BN**	=4 DEM 055 MO+4 DEM 055 MO-S?	21	=4LKF001AR+4LKF003AR/159.9	LOCAL STOP
=	=4LKF001AR+4LKF003AR/159.10	=4LKF001AR+4LKF003AR-X 159 09	4:A	**BK**	=4 DEM 055 MO+4 DEM 055 MO-S?	22	=4LKF001AR+4LKF003AR/159.9	=
=	=4LKF001AR+4LKF003AR/159.9	=4LKF001AR+4LKF003AR-X 159 09	2:A	**GY**	=4 DEM 055 MO+4 DEM 055 MO-S?	14	=4LKF001AR+4LKF003AR/159.9	FORWARD LOCAL
BACKWARD	=4LKF001AR+4LKF003AR/159.15	=4LKF001AR+4LKF003AR-X 159 09	7:A	**BU**	=4 DEM 055 MO+4 DEM 055 MO-S?	14	=4LKF001AR+4LKF003AR/159.15	BACKWORD LOCAL
	=4LKF001AR+4LKF003AR/185.11	=4LKF001AR+4LKF003AR-PE		**GNYE**	=4 DEM 055 MO+4 DEM 055 MO-PE		=4LKF001AR+4LKF003AR/185.10	
	=4LKF001AR+4LKF003AR/185.9	=4LKF001AR+4LKF003AR-XS 185 03	13:B	**BU**	=4 DEM 055 MO+4 DEM 055 MO-X1	?:A	=4LKF001AR+4LKF003AR/185.9	

Cable name: **4LKF003AR/ 4DEM055MO-C-02**

Cable type: **U1000R2V** No. of conn., diameter, length: **3G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
READY	=4LKF001AR+4LKF003AR/161.11	=4LKF001AR+4LKF003AR-X 161 06	9:A	**BN**	=4 DEM 055 MO+4 DEM 055 MO-S?	32	=4LKF001AR+4LKF003AR/161.11	LOCAL STOP
=	=4LKF001AR+4LKF003AR/161.11	=4LKF001AR+4LKF003AR-X 161 06	3:A	**BU**	=4 DEM 055 MO+4 DEM 055 MO-S?	31	=4LKF001AR+4LKF003AR/161.11	=
	=4LKF001AR+4LKF003AR/185.13	=4LKF001AR+4LKF003AR-PE		**GNYE**	=4 DEM 055 MO+4 DEM 055 MO-PE		=4LKF001AR+4LKF003AR/185.13	

Cable name: **4LKF003AR/ 4DEM055SSL-C-01**

Cable type: **BIRTFLEX 5111-PVC-PUR-JB** No. of conn., diameter, length: **4G0.75 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
				BK				
DRAG CHAIN CONVEYOR 1 - "0" PULSE	=4LKF001AR+4LKF003AR/162.6	=4LKF001AR+4LKF003AR-X 161 06	15:B	**BN**	=4 DEM 055 MO+4 DEM 055 MO-X1	14	=4LKF001AR+4LKF003AR/162.6	DRAG CHAIN CONVEYOR 1 - "0" PULSE
				GY				
				GNYE				
	=4LKF001AR+4LKF003AR/162.4	=4LKF001AR+4LKF003AR-X 161 06	4:B	**WH**	=4 DEM 055 MO+4 DEM 055 MO-X1	13	=4LKF001AR+4LKF003AR/162.4	

Cable name: **4LKF003AR/ 4FGR146MO-B-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **4G2.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF003AR/163.5	=4LKF001AR+4LKF003AR-X 163 05	1:A	**BN**	=4 FGR 146 MO+4 FGR 146 MO-M24	U1	=4LKF001AR+4LKF003AR/163.5	
[4 FGR 146 MO] SEALING AIR FAN LEFT	=4LKF001AR+4LKF003AR/163.5	=4LKF001AR+4LKF003AR-X 163 05	2:A	**BK**	=4 FGR 146 MO+4 FGR 146 MO-M24	V1	=4LKF001AR+4LKF003AR/163.5	
=	=4LKF001AR+4LKF003AR/163.5	=4LKF001AR+4LKF003AR-X 163 05	3:A	**GY**	=4 FGR 146 MO+4 FGR 146 MO-M24	W1	=4LKF001AR+4LKF003AR/163.5	
	=4LKF001AR+4LKF003AR/163.7	=4LKF001AR+4LKF003AR-PE		**GNYE**	=4 FGR 146 MO+4 FGR 146 MO-M24	PE	=4LKF001AR+4LKF003AR/163.5	

Cable name: **4LKF003AR/ 4FGR146MO-C-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
LOCAL CONTROL	=4LKF001AR+4LKF003AR/164.9	=4LKF001AR+4LKF003AR-X 164 09	1:A	**BN**	=4 FGR 146 MO+4 FGR 146 MO-S?	21	=4LKF001AR+4LKF003AR/164.9	LOCAL STOP
=	=4LKF001AR+4LKF003AR/164.11	=4LKF001AR+4LKF003AR-X 164 09	4:A	**BK**	=4 FGR 146 MO+4 FGR 146 MO-S?	13	=4LKF001AR+4LKF003AR/164.9	MARCHE LOCAL
=	=4LKF001AR+4LKF003AR/164.9	=4LKF001AR+4LKF003AR-X 164 09	2:A	**GY**	=4 FGR 146 MO+4 FGR 146 MO-S?	14	=4LKF001AR+4LKF003AR/164.9	=
	=4LKF001AR+4LKF003AR/185.3	=4LKF001AR+4LKF003AR-XS 185 03	14:B	**BU**	=4 FGR 146 MO+4 FGR 146 MO-X1	?:A	=4LKF001AR+4LKF003AR/185.3	
	=4LKF001AR+4LKF003AR/185.4	=4LKF001AR+4LKF003AR-PE		**GNYE**	=4 FGR 146 MO+4 FGR 146 MO-PE		=4LKF001AR+4LKF003AR/185.3	

Cable name: **4LKF003AR/ 4FGR146MO-C-02**

Cable type: **U1000R2V** No. of conn., diameter, length: **3G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
READY	=4LKF001AR+4LKF003AR/165.10	=4LKF001AR+4LKF003AR-X 165 06	3:A	**BN**	=4 FGR 146 MO+4 FGR 146 MO-S 164 08	31	=4LKF001AR+4LKF003AR/165.10	LOCAL STOP
=	=4LKF001AR+4LKF003AR/165.10	=4LKF001AR+4LKF003AR-X 165 06	6:A	**BU**	=4 FGR 146 MO+4 FGR 146 MO-S 164 08	32	=4LKF001AR+4LKF003AR/165.10	=
	=4LKF001AR+4LKF003AR/185.7	=4LKF001AR+4LKF003AR-PE		**GNYE**	=4 FGR 146 MO+4 FGR 146 MO-PE		=4LKF001AR+4LKF003AR/185.6	

Cable name: **4LKF003AR/ 4FGR493ZV-B-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **4G2.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF003AR/166.5	=4LKF001AR+4LKF003AR-X 166 05	1:A	**BN**	=4 FGR 493 ZV+4 FGR 493 ZV-M25	U1	=4LKF001AR+4LKF003AR/166.5	
[4 FGR 493 ZV] COOLING FAN 2	=4LKF001AR+4LKF003AR/166.5	=4LKF001AR+4LKF003AR-X 166 05	2:A	**BK**	=4 FGR 493 ZV+4 FGR 493 ZV-M25	V1	=4LKF001AR+4LKF003AR/166.5	
=	=4LKF001AR+4LKF003AR/166.5	=4LKF001AR+4LKF003AR-X 166 05	3:A	**GY**	=4 FGR 493 ZV+4 FGR 493 ZV-M25	W1	=4LKF001AR+4LKF003AR/166.5	
	=4LKF001AR+4LKF003AR/166.7	=4LKF001AR+4LKF003AR-PE		**GNYE**	=4 FGR 493 ZV+4 FGR 493 ZV-M25	PE	=4LKF001AR+4LKF003AR/166.5	

Cable name: **4LKF003AR/ 4FGR493ZV-C-01**
Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**
Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
LOCAL CONTROL	=4LKF001AR+4LKF003AR/167.9	=4LKF001AR+4LKF003AR-X 167 09	1:A	**BN**	=4 FGR 493 ZV+4 FGR 493 ZV-S?	21	=4LKF001AR+4LKF003AR/167.9	LOCAL STOP
=	=4LKF001AR+4LKF003AR/167.11	=4LKF001AR+4LKF003AR-X 167 09	4:A	**BK**	=4 FGR 493 ZV+4 FGR 493 ZV-S?	13	=4LKF001AR+4LKF003AR/167.9	MARCHE LOCAL
=	=4LKF001AR+4LKF003AR/167.9	=4LKF001AR+4LKF003AR-X 167 09	2:A	**GY**	=4 FGR 493 ZV+4 FGR 493 ZV-S?	14	=4LKF001AR+4LKF003AR/167.9	=
	=4LKF001AR+4LKF003AR/185.9	=4LKF001AR+4LKF003AR-XS 185 03	15:B	**BU**	=4 FGR 493 ZV+4 FGR 493 ZV-X1	?:A	=4LKF001AR+4LKF003AR/185.9	
	=4LKF001AR+4LKF003AR/185.11	=4LKF001AR+4LKF003AR-PE		**GNYE**	=4 FGR 493 ZV+4 FGR 493 ZV-PE		=4LKF001AR+4LKF003AR/185.10	

Cable name: **4LKF003AR/ 4FGR493ZV-C-02**
Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**
Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
READY	=4LKF001AR+4LKF003AR/168.10	=4LKF001AR+4LKF003AR-X 168 06	3:A	**BN**	=4 FGR 493 ZV+4 FGR 493 ZV-S?	31	=4LKF001AR+4LKF003AR/168.10	LOCAL STOP
=	=4LKF001AR+4LKF003AR/168.10	=4LKF001AR+4LKF003AR-X 168 06	6:A	**BK**	=4 FGR 493 ZV+4 FGR 493 ZV-S?	32	=4LKF001AR+4LKF003AR/168.10	=
				GY				
				BU				
	=4LKF001AR+4LKF003AR/185.13	=4LKF001AR+4LKF003AR-PE		**GNYE**	=4 FGR 493 ZV+4 FGR 493 ZV-PE		=4LKF001AR+4LKF003AR/185.13	

Cable name: **4LKF003AR/ 4FGR496MO-B-01**
Cable type: **U1000R2V** No. of conn., diameter, length: **4G2.5 mm² /**
Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF003AR/152.5	=4LKF001AR+4LKF003AR-X 152 05	1:A	**BN**	=4 FGR 496 MO+4 FGR 496 MO-M21	U1	=4LKF001AR+4LKF003AR/152.5	
[4 FGR 496 MO] HPU EMERGENCY COOLING PUMP	=4LKF001AR+4LKF003AR/152.5	=4LKF001AR+4LKF003AR-X 152 05	2:A	**BK**	=4 FGR 496 MO+4 FGR 496 MO-M21	V1	=4LKF001AR+4LKF003AR/152.5	
=	=4LKF001AR+4LKF003AR/152.5	=4LKF001AR+4LKF003AR-X 152 05	3:A	**GY**	=4 FGR 496 MO+4 FGR 496 MO-M21	W1	=4LKF001AR+4LKF003AR/152.5	
	=4LKF001AR+4LKF003AR/152.7	=4LKF001AR+4LKF003AR-PE		**GNYE**	=4 FGR 496 MO+4 FGR 496 MO-M21	PE	=4LKF001AR+4LKF003AR/152.5	

Cable name: **4LKF003AR/ 4FGR496MO-C-01**
Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**
Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
LOCAL CONTROL	=4LKF001AR+4LKF003AR/153.9	=4LKF001AR+4LKF003AR-X 153 09	1:A	**BN**	=4 FGR 496 MO+4 FGR 496 MO-S?	21	=4LKF001AR+4LKF003AR/153.9	LOCAL STOP
=	=4LKF001AR+4LKF003AR/153.11	=4LKF001AR+4LKF003AR-X 153 09	4:A	**BK**	=4 FGR 496 MO+4 FGR 496 MO-S?	13	=4LKF001AR+4LKF003AR/153.9	MARCHE LOCAL
=	=4LKF001AR+4LKF003AR/153.9	=4LKF001AR+4LKF003AR-X 153 09	2:A	**GY**	=4 FGR 496 MO+4 FGR 496 MO-S?	14	=4LKF001AR+4LKF003AR/153.9	=
	=4LKF001AR+4LKF003AR/185.3	=4LKF001AR+4LKF003AR-XS 185 03	12:B	**BU**	=4 FGR 496 MO+4 FGR 496 MO-X1	?:A	=4LKF001AR+4LKF003AR/185.3	
	=4LKF001AR+4LKF003AR/185.4	=4LKF001AR+4LKF003AR-PE		**GNYE**	=4 FGR 496 MO+4 FGR 496 MO-PE		=4LKF001AR+4LKF003AR/185.3	

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Cable name: **4LKF003AR/ 4FGR496MO-C-02**

Remark:

Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
READY	=4LKF001AR+4LKF003AR/154.10	=4LKF001AR+4LKF003AR-X 154 06	3:A	**BN**	=4 FGR 496 MO+4 FGR 496 MO-S 153 08	31	=4LKF001AR+4LKF003AR/154.10	LOCAL STOP
=	=4LKF001AR+4LKF003AR/154.10	=4LKF001AR+4LKF003AR-X 154 06	6:A	**BK**	=4 FGR 496 MO+4 FGR 496 MO-S 153 08	32	=4LKF001AR+4LKF003AR/154.10	=
				GY				
				BU				
				GNYE				
	=4LKF001AR+4LKF003AR/185.7	=4LKF001AR+4LKF003AR-PE		**GNYE**	=4 FGR 496 MO+4 FGR 496 MO-PE		=4LKF001AR+4LKF003AR/185.6	

Cable name: **4LKF003AR/ 4LCA001HSS-C-01**

Remark:

Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF003AR/171.4	=4LKF001AR+4LKF003AR-X 171 04	1:A	**BN**	=4LCA001HSS+4LCA001HSS-S303	11	=4LKF001AR+4LKF003AR/171.4	
CONTROL ZONE EMERGENCY STOP - GROUND FLOOR FUEL FEED SIDE	=4LKF001AR+4LKF003AR/171.5	=4LKF001AR+4LKF003AR-X 171 04	3:A	**BK**	=4LCA001HSS+4LCA001HSS-S303	21	=4LKF001AR+4LKF003AR/171.5	
	=4LKF001AR+4LKF003AR/171.4	=4LKF001AR+4LKF003AR-X 171 04	2:A	**GY**	=4LCA001HSS+4LCA001HSS-S303	12	=4LKF001AR+4LKF003AR/171.4	
CONTROL ZONE EMERGENCY STOP - GROUND FLOOR FUEL FEED SIDE	=4LKF001AR+4LKF003AR/171.5	=4LKF001AR+4LKF003AR-X 171 04	4:A	**BU**	=4LCA001HSS+4LCA001HSS-S303	22	=4LKF001AR+4LKF003AR/171.5	
	=4LKF001AR+4LKF003AR/185.16	=4LKF001AR+4LKF003AR-PE		**GNYE**	=4LCA001HSS+4LCA001HSS-PE		=4LKF001AR+4LKF003AR/185.16	

Cable name: **4LKF003AR/ 4LKA001AR-C-01**

Remark:

Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
CONTROL ZONE EMERGENCY STOP - GROUND FLOOR CLOSER TO FUEL SUPPLY	=4LKA001AR+4LKA001AR/102.10	=4LKA001AR+4LKA001AR-X 102 07	2:A	**BN**	=4LKF001AR+4LKF003AR-X 172 11	1:A	=4LKF001AR+4LKF003AR/172.12	[4 FGR 247 ZV] SECONDARY AIR FAN
=	=4LKA001AR+4LKA001AR/102.11	=4LKA001AR+4LKA001AR-X 102 07	3:A	**BK**	=4LKF001AR+4LKF003AR-X 172 11	2:A	=4LKF001AR+4LKF003AR/172.12	=
=	=4LKA001AR+4LKA001AR/102.12	=4LKA001AR+4LKA001AR-X 102 07	4:A	**GY**	=4LKF001AR+4LKF003AR-X 172 11	3:A	=4LKF001AR+4LKF003AR/172.13	=
NOTE_ZŠ_2026-05-18: PRIJAŠNJI NAZIV -X 121 07	=4LKA001AR+4LKA001AR/122.6	=4LKA001AR+4LKA001AR-X 122 03	2:A	**BU**	=4LKF001AR+4LKF001AR-X?	A	=4LKA001AR+4LKA001AR/122.6	NOTE_ZŠ_2026-05-18: PRIJAŠNJI NAZIV -X 121 07
	=4LKA001AR+4LKA001AR/122.7	=4LKA001AR+4LKA001AR-PE		**GNYE**	=4LKF001AR+4LKF001AR-PE		=4LKA001AR+4LKA001AR/122.7	

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF003AR-PE

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Terminal	Wiring	Target designation
				'		10		
				'		11		

Terminal diagram

Strip

=4LKF001AR+4LKF003AR-X 152 05

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/152.5	=4 FGR 496 MO+4 FGR 496 MO-M21:U1	4LKF003AR/ 4FGR496MO-B-01 U1000R2V 4G2.5 mm²	BN 2.5 mm²	'	1	BK 2.5 mm²	-KM 152 05:2/T1
/152.5	=4 FGR 496 MO+4 FGR 496 MO-M21:V1	4LKF003AR/ 4FGR496MO-B-01 U1000R2V 4G2.5 mm²	BK 2.5 mm²	'	2	BK 2.5 mm²	-KM 152 05:4/T2
/152.5	=4 FGR 496 MO+4 FGR 496 MO-M21:W1	4LKF003AR/ 4FGR496MO-B-01 U1000R2V 4G2.5 mm²	GY 2.5 mm²	'	3	BK 2.5 mm²	-KM 152 05:6/T3

Terminal diagram

Strip

=4LKF001AR+4LKF003AR-X 153 09

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/153.9	=4 FGR 496 MO+4 FGR 496 MO-S?:21	4LKF003AR/ 4FGR496MO-C-01 U1000R2V 5G1.5 mm²	BN 1.5 mm²		1	WH 1 mm²	-Q 152 05:21
/153.9	=4 FGR 496 MO+4 FGR 496 MO-S?:14	4LKF003AR/ 4FGR496MO-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²		2	WH 1 mm²	-K 153 16:11
					3	WH 1 mm²	-KM 152 05:74
/153.9	=4 FGR 496 MO+4 FGR 496 MO-S?:13	4LKF003AR/ 4FGR496MO-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²		4	WH 1 mm²	-KM 152 05:73
					5		
					6	WH 1 mm²	-S 153 06.1:23
					7		
					8		
					9		
					10		

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF003AR-X 154 06

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1		
					2	RD 1 mm²	-KM 152 05:83
/154.10	=4 FGR 496 MO+4 FGR 496 MO-S 153 08:31	4LKF003AR/ 4FGR496MO-C-02 U1000R2V 5G1.5 mm²	BN 1.5 mm²		3		
					4		
					5	RD 1 mm²	-KM 152 05:84
/154.10	=4 FGR 496 MO+4 FGR 496 MO-S 153 08:32	4LKF003AR/ 4FGR496MO-C-02 U1000R2V 5G1.5 mm²	BU 1.5 mm²		6	RD 1 mm²	-K 153 16:21
					7	RD 1 mm²	-S 153 06.1:34

Date:		SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer:	Number:	Revision: #Y
Drawn:								
Approved:	Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: Terminal diagram =4LKF001AR+4LKF003AR-X 154 06	Drawing designation:	=4LKF001AR	Sheet: 604
Format:	A3					+4LKF003AR	Next: 605

Terminal diagram

Strip

=4LKF001AR+4LKF003AR-X 155 05

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Terminal	Wiring	Target designation
				'		1	BK 2.5 mm²	-KM 155 05:2/T1
				'		2	BK 2.5 mm²	-KM 155 05:4/T2
				'		3	BK 2.5 mm²	-KM 155 05:6/T3

Terminal diagram

Strip

A SIDE — =4LKF001AR+4LKF003AR-X 156 09 — B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/156.9	=??+??-S 156 08:21				1	WH 1 mm²	-Q 155 05:21
/156.9	=??+??-S 156 08.1:14				2	WH 1 mm²	-K 156 16:11
					3	WH 1 mm²	-KM 155 05:74
/156.9	=??+??-S 156 08.1:13				4	WH 1 mm²	-KM 155 05:73
					5		
					6	WH 1 mm²	-S 156 06.1:23
					7		
					8		
					9		
					10		

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF003AR-X 157 06

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1		
					2	RD 1 mm²	-KM 155 05:83
/157.10	=??+??-S 156 08:31				3		
					4		
					5	RD 1 mm²	-KM 155 05:84
/157.10	=??+??-S 156 08:32				6	RD 1 mm²	-K 156 16:21
					7	RD 1 mm²	-S 156 06.1:34
					8		
					9		

Terminal diagram

Strip

=4LKF001AR+4LKF003AR-X 158 05

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/158.5	=4 DEM 055 MO+4 DEM 055 MO-M23:U1	4LKF003AR/ 4DEM055MO-B-01 U1000R2V 4G2.5 mm²	BN 2.5 mm²	'	1	BK 2.5 mm²	-KM 158 05:2/T1
/158.5	=4 DEM 055 MO+4 DEM 055 MO-M23:V1	4LKF003AR/ 4DEM055MO-B-01 U1000R2V 4G2.5 mm²	BK 2.5 mm²	'	2	BK 2.5 mm²	-KM 158 05:4/T2
/158.5	=4 DEM 055 MO+4 DEM 055 MO-M23:W1	4LKF003AR/ 4DEM055MO-B-01 U1000R2V 4G2.5 mm²	GY 2.5 mm²	'	3	BK 2.5 mm²	-KM 158 05:6/T3

Terminal diagram

Strip

A SIDE =4LKF001AR+4LKF003AR-X 159 09 B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/159.9	=4 DEM 055 MO+4 DEM 055 MO-S?:21	4LKF003AR/ 4DEM055MO-C-01 U1000R2V 5G1.5 mm²	BN 1.5 mm²		1	WH 1 mm²	-Q 158 05:21
/159.9	=4 DEM 055 MO+4 DEM 055 MO-S?:14	4LKF003AR/ 4DEM055MO-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²		2	WH 1 mm²	-K 160 10:11
					3	WH 1 mm²	-KM 158 05:74
/159.9	=4 DEM 055 MO+4 DEM 055 MO-S?:22	4LKF003AR/ 4DEM055MO-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²		4	WH 1 mm²	-KM 158 05:73
					5	WH 1 mm²	-KM 158 07:73
					6	WH 1 mm²	-S 159 06.1:23
/159.15	=4 DEM 055 MO+4 DEM 055 MO-S?:14	4LKF003AR/ 4DEM055MO-C-01 U1000R2V 5G1.5 mm²	BU 1.5 mm²		7	WH 1 mm²	-K 160 10:21
					8	WH 1 mm²	-S 159 06.1:43
					9		
					10		
					11		
					12		

Terminal diagram

A SIDE

Strip
=4LKF001AR+4LKF003AR-X 161 06

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1		
					2	RD 1 mm²	-KM 158 05:83
/161.11	=4 DEM 055 MO+4 DEM 055 MO-S?:31	4LKF003AR/ 4DEM055MO-C-02 U1000R2V 12G1.5 mm²	1 1.5 mm²		3		
					4	3 1.5 mm²	=4 DEM 055 MO+4 DEM 055
					5	5 1.5 mm²	=4 DEM 055 MO+4 DEM 055
					6		
					7	RD 1 mm²	-KM 158 05:84
					8	RD 1 mm²	-KM 158 07:84
/161.11	=4 DEM 055 MO+4 DEM 055 MO-S?:32	4LKF003AR/ 4DEM055MO-C-02 U1000R2V 12G1.5 mm²	2 1.5 mm²		9	RD 1 mm²	-K 160 10:31
					10	RD 1 mm²	-S 159 06.1:54
					11		
					12		
					13		
					14		
					15	4 1.5 mm²	=4 DEM 055 MO+4 DEM 055
					16	6 1.5 mm²	=4 DEM 055 MO+4 DEM 055
					17		
					18		
					19		

Terminal diagram

Strip

=4LKF001AR+4LKF003AR-X 163 05

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/163.5	=4 FGR 146 MO+4 FGR 146 MO-M24:U1	4LKF003AR/ 4FGR146MO-B-01 U1000R2V 4G2.5 mm²	BN 2.5 mm²	'	1	BK 2.5 mm²	-KM 163 05:2/T1
/163.5	=4 FGR 146 MO+4 FGR 146 MO-M24:V1	4LKF003AR/ 4FGR146MO-B-01 U1000R2V 4G2.5 mm²	BK 2.5 mm²	'	2	BK 2.5 mm²	-KM 163 05:4/T2
/163.5	=4 FGR 146 MO+4 FGR 146 MO-M24:W1	4LKF003AR/ 4FGR146MO-B-01 U1000R2V 4G2.5 mm²	GY 2.5 mm²	'	3	BK 2.5 mm²	-KM 163 05:6/T3

Terminal diagram

Strip

=4LKF001AR+4LKF003AR-X 164 09

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/164.9	=4 FGR 146 MO+4 FGR 146 MO-S?:21	4LKF003AR/ 4FGR146MO-C-01 U1000R2V 5G1.5 mm²	BN 1.5 mm²		1	WH 1 mm²	-Q 163 05:21
/164.9	=4 FGR 146 MO+4 FGR 146 MO-S?:14	4LKF003AR/ 4FGR146MO-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²		2	WH 1 mm²	-K 164 16:11
					3	WH 1 mm²	-KM 163 05:74
/164.9	=4 FGR 146 MO+4 FGR 146 MO-S?:13	4LKF003AR/ 4FGR146MO-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²		4	WH 1 mm²	-KM 163 05:73
					5		
					6	WH 1 mm²	-S 164 06.1:23
					7		
					8		
					9		
					10		

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF003AR-X 165 06

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1		
					2	RD 1 mm²	-KM 163 05:83
/165.10	=4 FGR 146 MO+4 FGR 146 MO-S 164 08:31	4LKF003AR/ 4FGR146MO-C-02 U1000R2V 5G1.5 mm²	BN 1.5 mm²		3		
					4		
					5	RD 1 mm²	-KM 163 05:84
/165.10	=4 FGR 146 MO+4 FGR 146 MO-S 164 08:32	4LKF003AR/ 4FGR146MO-C-02 U1000R2V 5G1.5 mm²	BK 1.5 mm²		6	RD 1 mm²	-K 164 16:21
					7	RD 1 mm²	-S 164 06.1:34

Terminal diagram

Strip

=4LKF001AR+4LKF003AR-X 166 05

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/166.5	=4 FGR 493 ZV+4 FGR 493 ZV-M25:U1	4LKF003AR/ 4FGR493ZV-B-01 U1000R2V 4G2.5 mm²	BN 2.5 mm²	'	1	BK 2.5 mm²	-KM 166 05:2/T1
/166.5	=4 FGR 493 ZV+4 FGR 493 ZV-M25:V1	4LKF003AR/ 4FGR493ZV-B-01 U1000R2V 4G2.5 mm²	BK 2.5 mm²	'	2	BK 2.5 mm²	-KM 166 05:4/T2
/166.5	=4 FGR 493 ZV+4 FGR 493 ZV-M25:W1	4LKF003AR/ 4FGR493ZV-B-01 U1000R2V 4G2.5 mm²	GY 2.5 mm²	'	3	BK 2.5 mm²	-KM 166 05:6/T3

Terminal diagram

A SIDE

Strip
=4LKF001AR+4LKF003AR-X 167 09

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/167.9	=4 FGR 493 ZV+4 FGR 493 ZV-S?:21	4LKF003AR/ 4FGR493ZV-C-01 U1000R2V 5G1.5 mm²	BN 1.5 mm²		1	WH 1 mm²	-Q 166 05:21
/167.9	=4 FGR 493 ZV+4 FGR 493 ZV-S?:14	4LKF003AR/ 4FGR493ZV-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²		2	WH 1 mm²	-K 167 16:11
					3	WH 1 mm²	-KM 166 05:74
/167.9	=4 FGR 493 ZV+4 FGR 493 ZV-S?:13	4LKF003AR/ 4FGR493ZV-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²		4	WH 1 mm²	-KM 166 05:73
					5		
					6	WH 1 mm²	-S 167 06.1:23
					7		
					8		
					9		
					10		

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF003AR-X 168 06

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1		
					2	RD 1 mm²	-KM 166 05:83
/168.10	=4 FGR 493 ZV+4 FGR 493 ZV-S?:31	4LKF003AR/ 4FGR493ZV-C-02 U1000R2V 5G1.5 mm²	BN 1.5 mm²		3		
					4		
					5	RD 1 mm²	-KM 166 05:84
/168.10	=4 FGR 493 ZV+4 FGR 493 ZV-S?:32	4LKF003AR/ 4FGR493ZV-C-02 U1000R2V 5G1.5 mm²	BK 1.5 mm²		6	RD 1 mm²	-K 167 16:21
					7	RD 1 mm²	-S 167 06.1:34

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Terminal diagram

A SIDE

Strip
=4LKF001AR+4LKF003AR-X 171 04

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/171.4	=4LCA001HSS+4LCA001HSS-S303:11	4LKF003AR/ 4LCA001HSS-C-01 U1000R2V 5G1.5 mm²	BN 1.5 mm²	'	1	WH 1 mm²	-Q 171 04:2
/171.4	=4LCA001HSS+4LCA001HSS-S303:12	4LKF003AR/ 4LCA001HSS-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²	'	2	WH 1 mm²	-RP 171 04:A1
/171.5	=4LCA001HSS+4LCA001HSS-S303:21	4LKF003AR/ 4LCA001HSS-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²	'	3	GY 1 mm²	-Q 171 04:4
/171.5	=4LCA001HSS+4LCA001HSS-S303:22	4LKF003AR/ 4LCA001HSS-C-01 U1000R2V 5G1.5 mm²	BU 1.5 mm²	'	4	GY 1 mm²	-RP 171 04:A2

Terminal diagram

A SIDE

Strip
=4LKF001AR+4LKF003AR-X 172 11

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
=4LKA001AR+4LKA001AR/102.10	=4LKA001AR+4LKA001AR-X 102 07:2:A	4LKF003AR/ 4LKA001AR-C-01 U1000R2V 5G1.5 mm²	BN 1.5 mm²	'	1	WH 1 mm²	-RP 172 04:33
=4LKA001AR+4LKA001AR/102.11	=4LKA001AR+4LKA001AR-X 102 07:3:A	4LKF003AR/ 4LKA001AR-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²	'	2	WH 1 mm²	-RP 172 04:34
=4LKA001AR+4LKA001AR/102.12	=4LKA001AR+4LKA001AR-X 102 07:4:A	4LKF003AR/ 4LKA001AR-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²	'	3	WH 1 mm²	-RP 172 04:Y2
				'	4	WH 1 mm²	-RP 172 04:23
				'	5	WH 1 mm²	-RP 172 04:24
				'	6		
				'	7		

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF003AR-X?

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Strip	Wiring	Target designation
				'		??		
				'		??		

Date:		SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer:	Number:	Revision:
Drawn:									#Y
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: Terminal diagram =4LKF001AR+4LKF003AR-X?	Drawing designation:		=4LKF001AR	Sheet: 619
Format:	A3							+4LKF003AR	Next: 620

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF003AR-XB 169 03

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
+4LKF001AR/42.2	+4LKF001AR-Q 042 02:4		GY 1.5 mm²	•	1	GY 1 mm²	-RP 153 05:A2
				•	2	GY 1 mm²	-RP 156 05:A2
				•	3	GY 1 mm²	-RP 159 05:A2
				•	4	GY 1 mm²	-RP 164 05:A2
				•	5	GY 1 mm²	-RP 167 05:A2
+4LKF004AR/236.3	+4LKF004AR-XB 236 03:1:A		GY 1 mm²	•	6		

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF003AR-XS 181 03

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1		
					2	RD 1 mm²	-QB 151 09:11
					3		
					4	RD 1 mm²	-QB 151 09:14
					5		
					6		
					7		
					8		
					9		
					10		

Date:		SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 3	Project: BRC-4	Unit & Issuer:	Number:	Revision: #Y
Drawn:									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: Terminal diagram =4LKF001AR+4LKF003AR-XS 181 03	Drawing designation:	=4LKF001AR	Sheet: 621
Format:	A3						+4LKF003AR	Next: 622

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF003AR-XS 185 03

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Wiring	Target designation
					1	GNYE 2.5 mm²	-PE1
					2		
					3		
					4		
					5		
					6		
					7		
					8		
					9		
					10		
					11		
					12	BU 1.5 mm²	=4 FGR 496 MO+4 FGR 496
					13	BU 1.5 mm²	=4 DEM 055 MO+4 DEM 055
					14	BU 1.5 mm²	=4 FGR 146 MO+4 FGR 146
					15	BU 1.5 mm²	=4 FGR 493 ZV+4 FGR 493
					16		
					17		
					18		
					19		
					20		
					21		
					22		
					23		
					24		
					25		

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Terminal diagram

Strip

=4LKF001AR+4LKF003AR-XS 185 03

A SIDE

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					26		
					27		
					28		
					29		
					30		

Table of contents

Table of contents

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

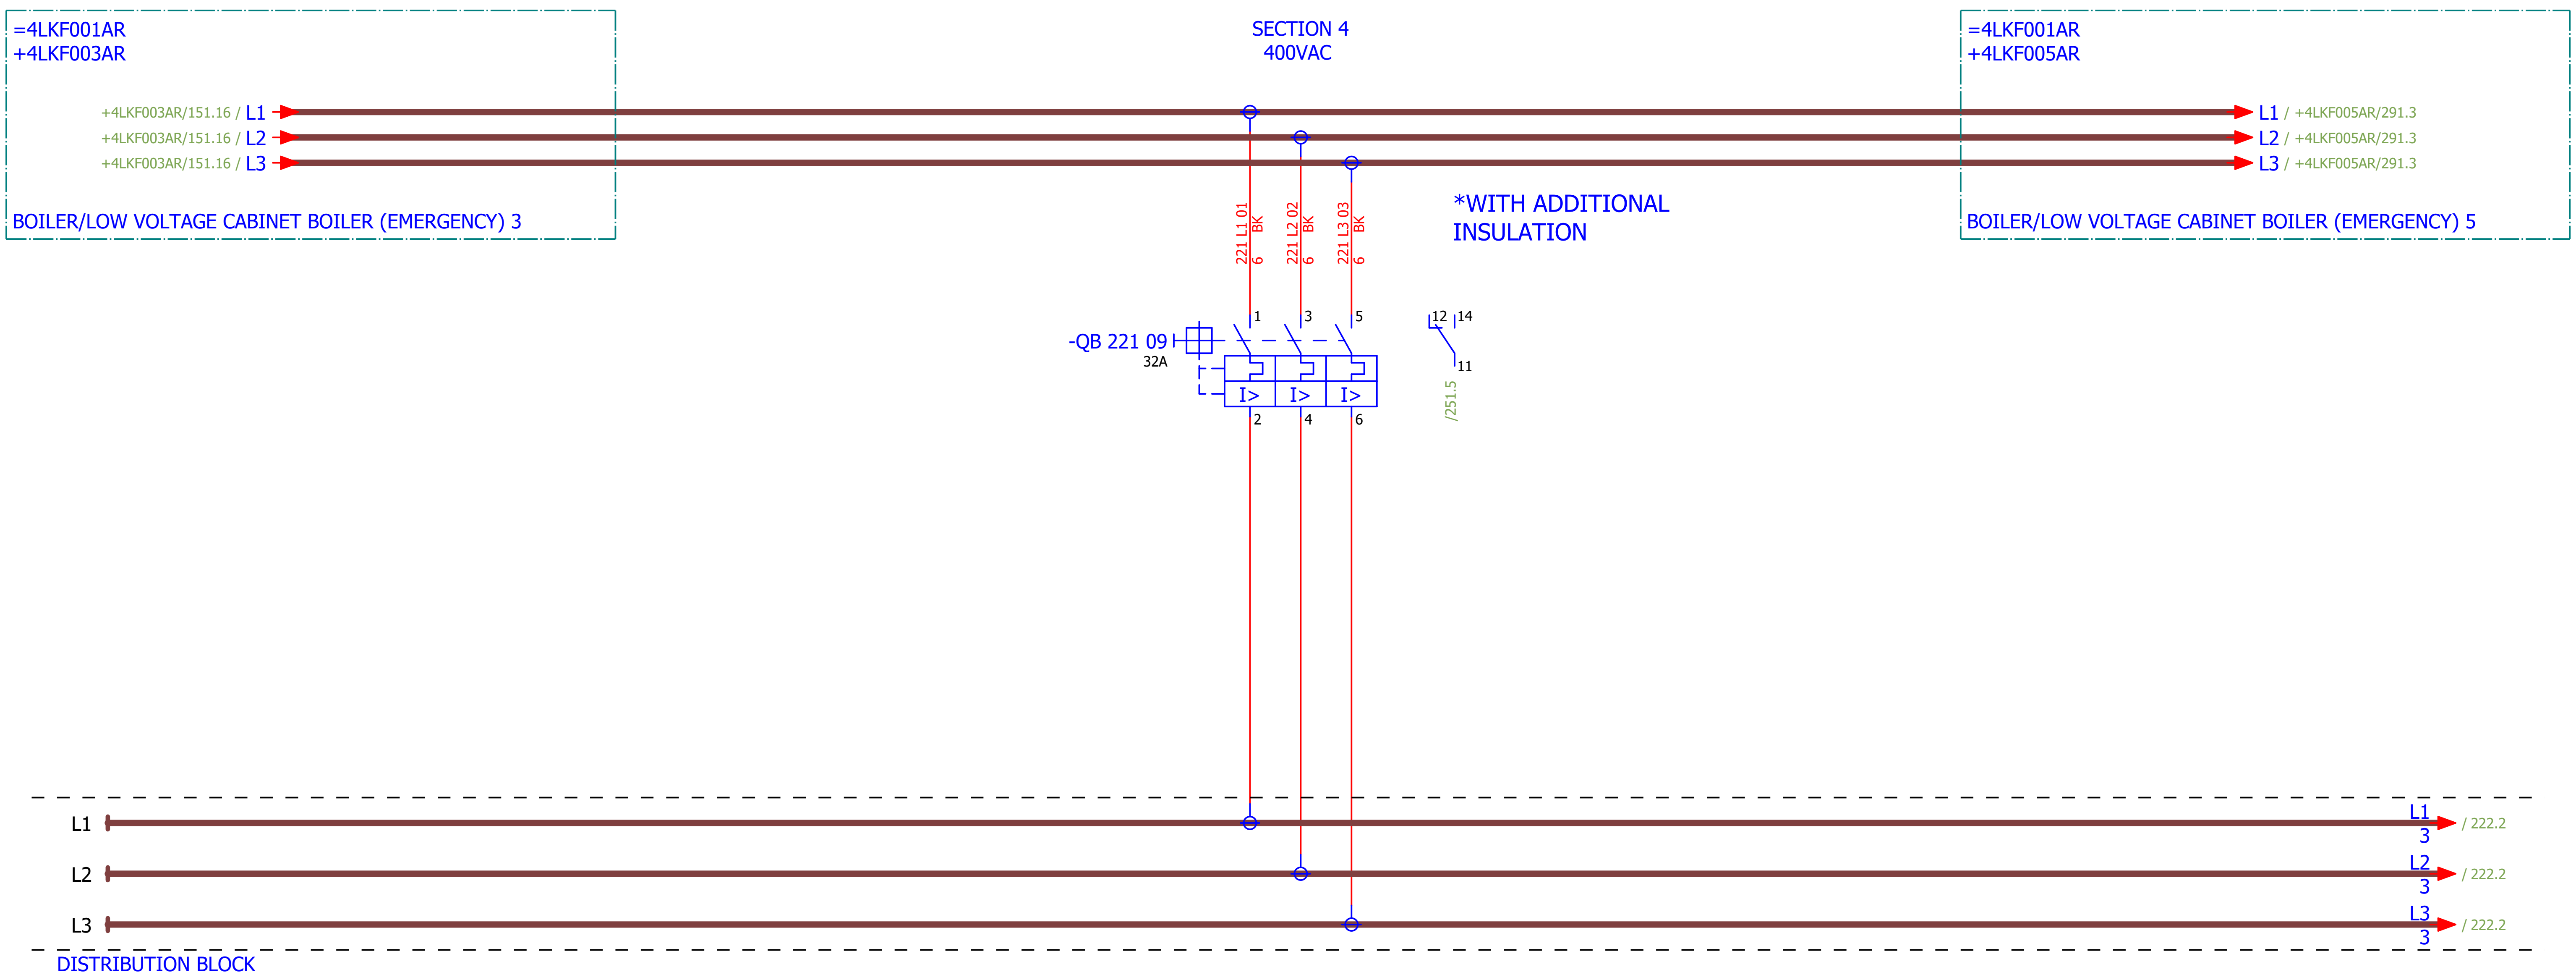

NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date: 17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 4	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870
Drawn: Luka Božičević						Revision: F
Approved: Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: 400VAC DISTRIBUTION	Drawing designation: BRC-4-ATEP0-1870-F	=4LKF001AR	#D
Format: A3					+4LKF004AR	Sheet: 221 / Next: 222

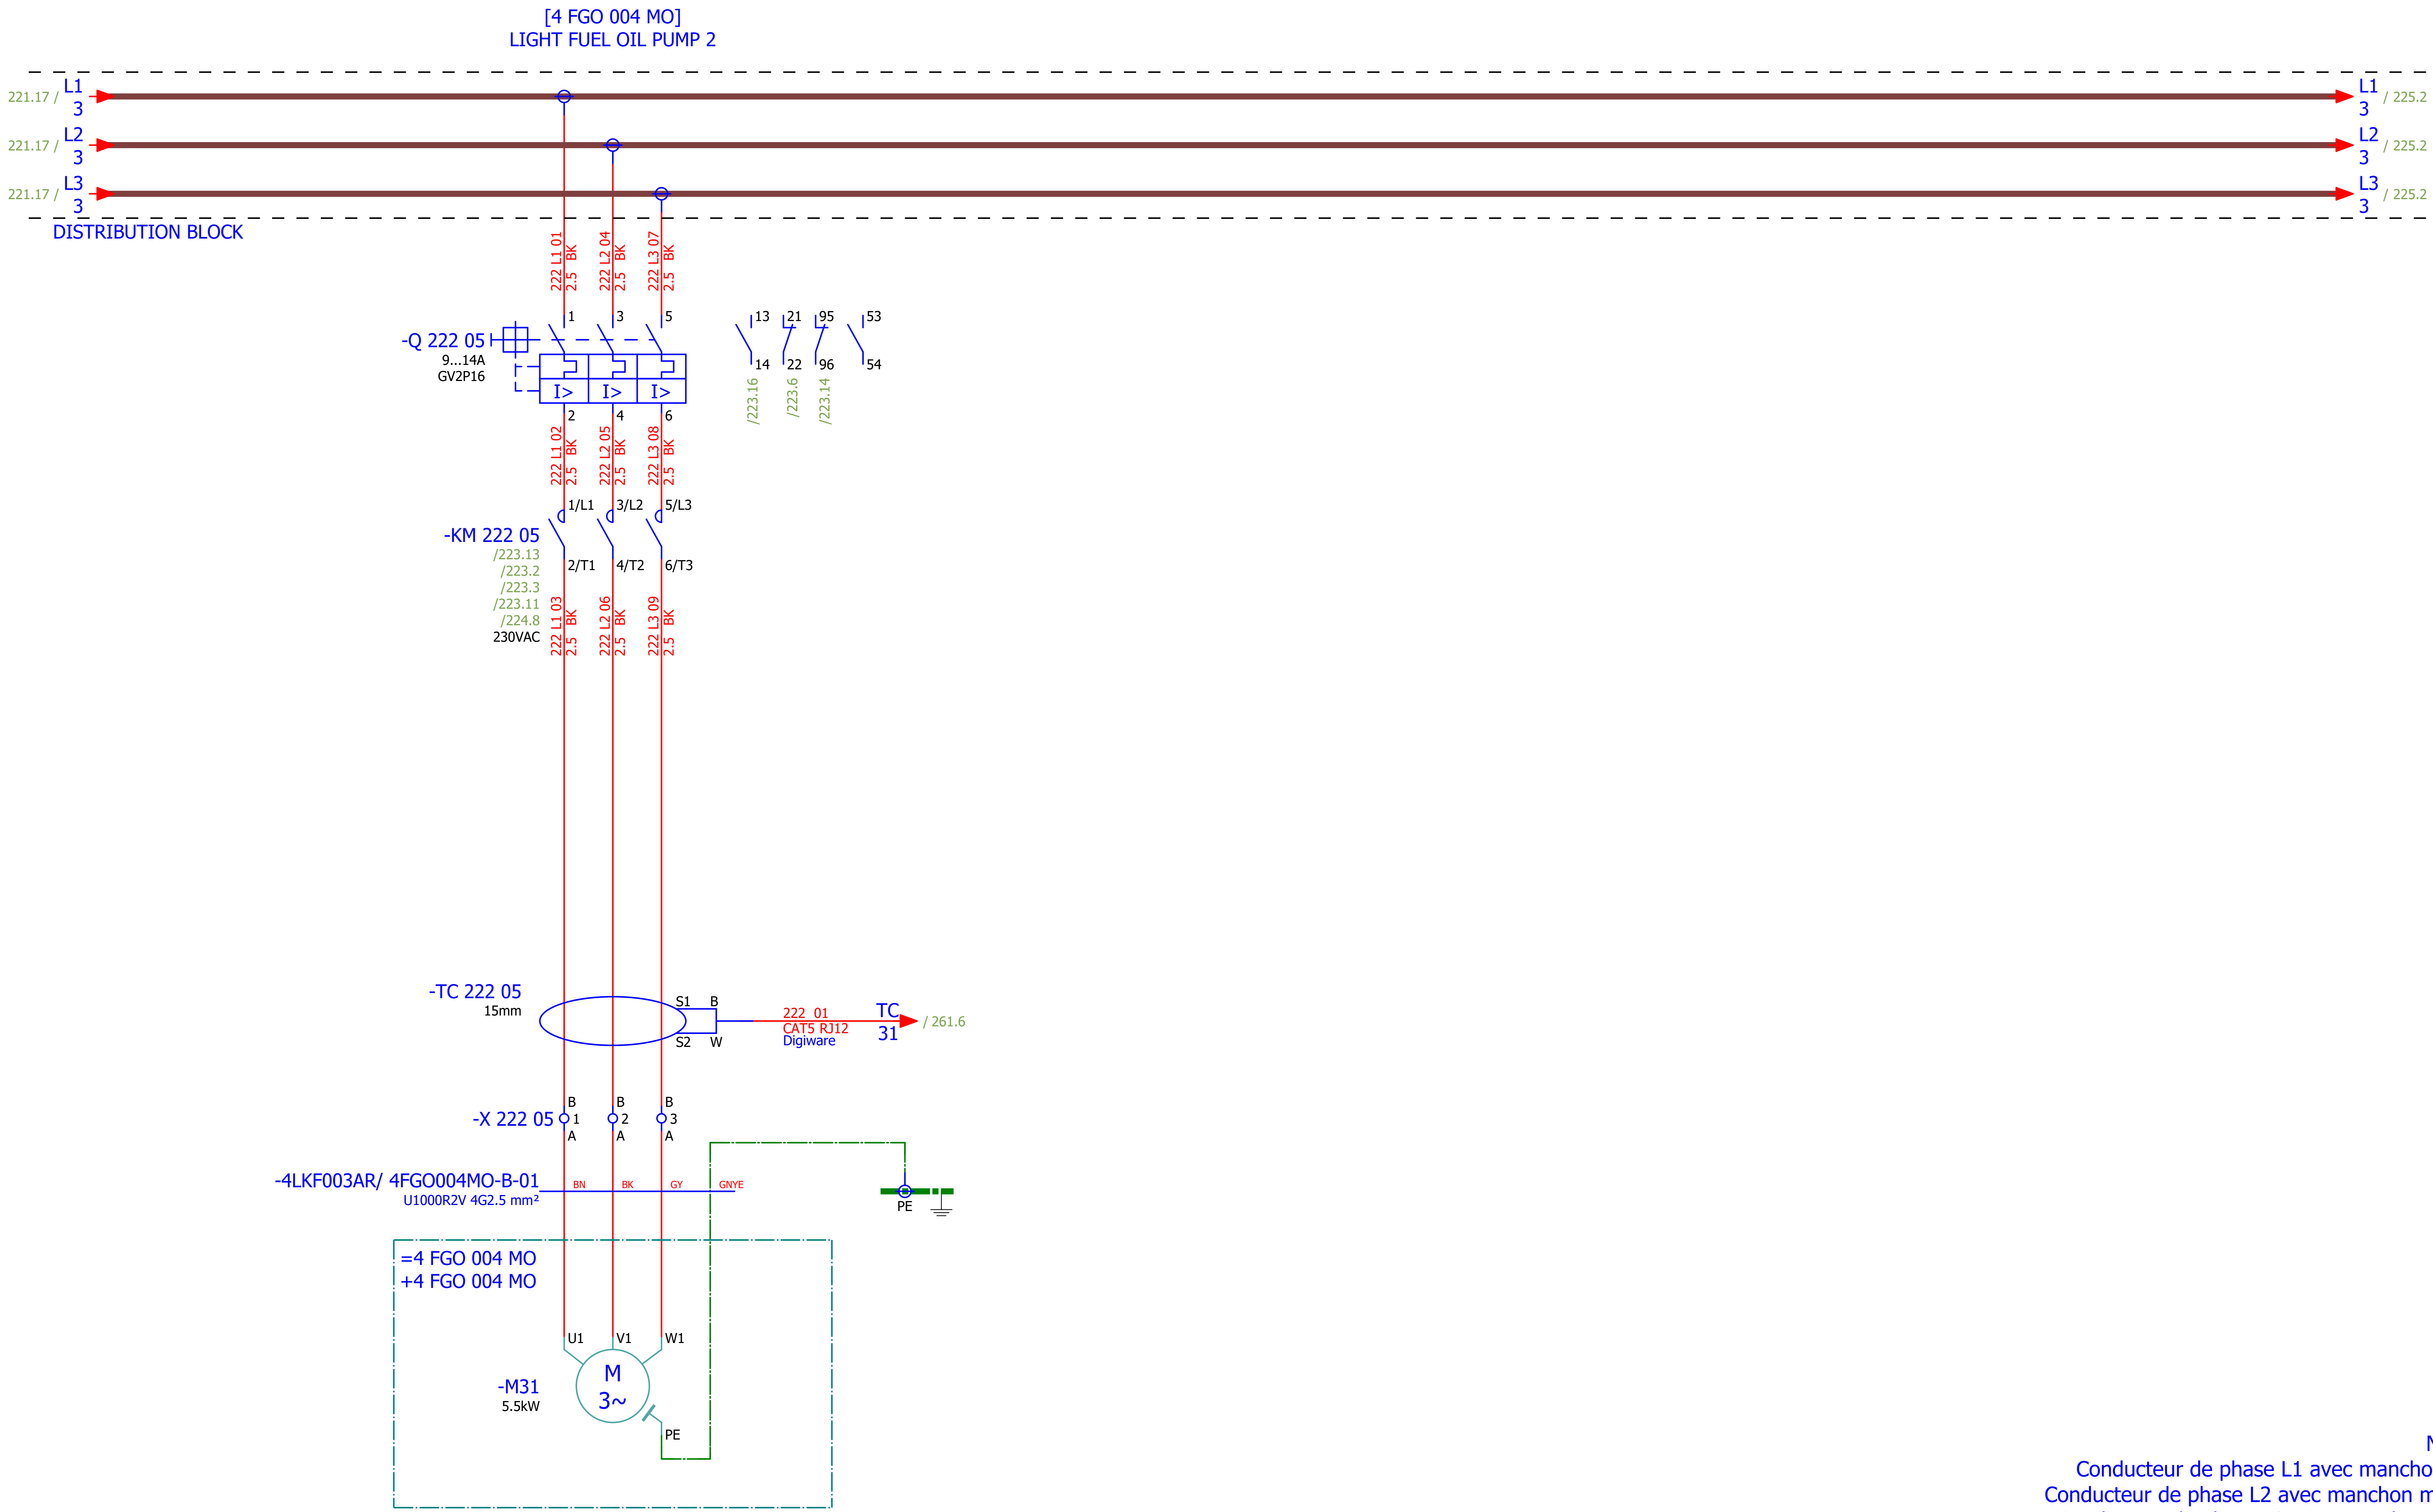

NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date:	17.03.2026.	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia
Drawn:	Luka Božičević	Object:	RDF Albioma Les Bois Rouge Reunion - France
Approved:	Grga Kolić	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 4
Format:	A3	Content:	LIGHT FUEL OIL PUMP 2
Project:	BRC-4	Unit & Issuer:	ATEP0
Number:	1870	Revision:	F
Drawing designation:	BRC-4-ATEP0-1870-F		#D
=4LKF001AR	+4LKF004AR	Sheet:	222
		Next:	223

SINTAKSA
A Voith Company

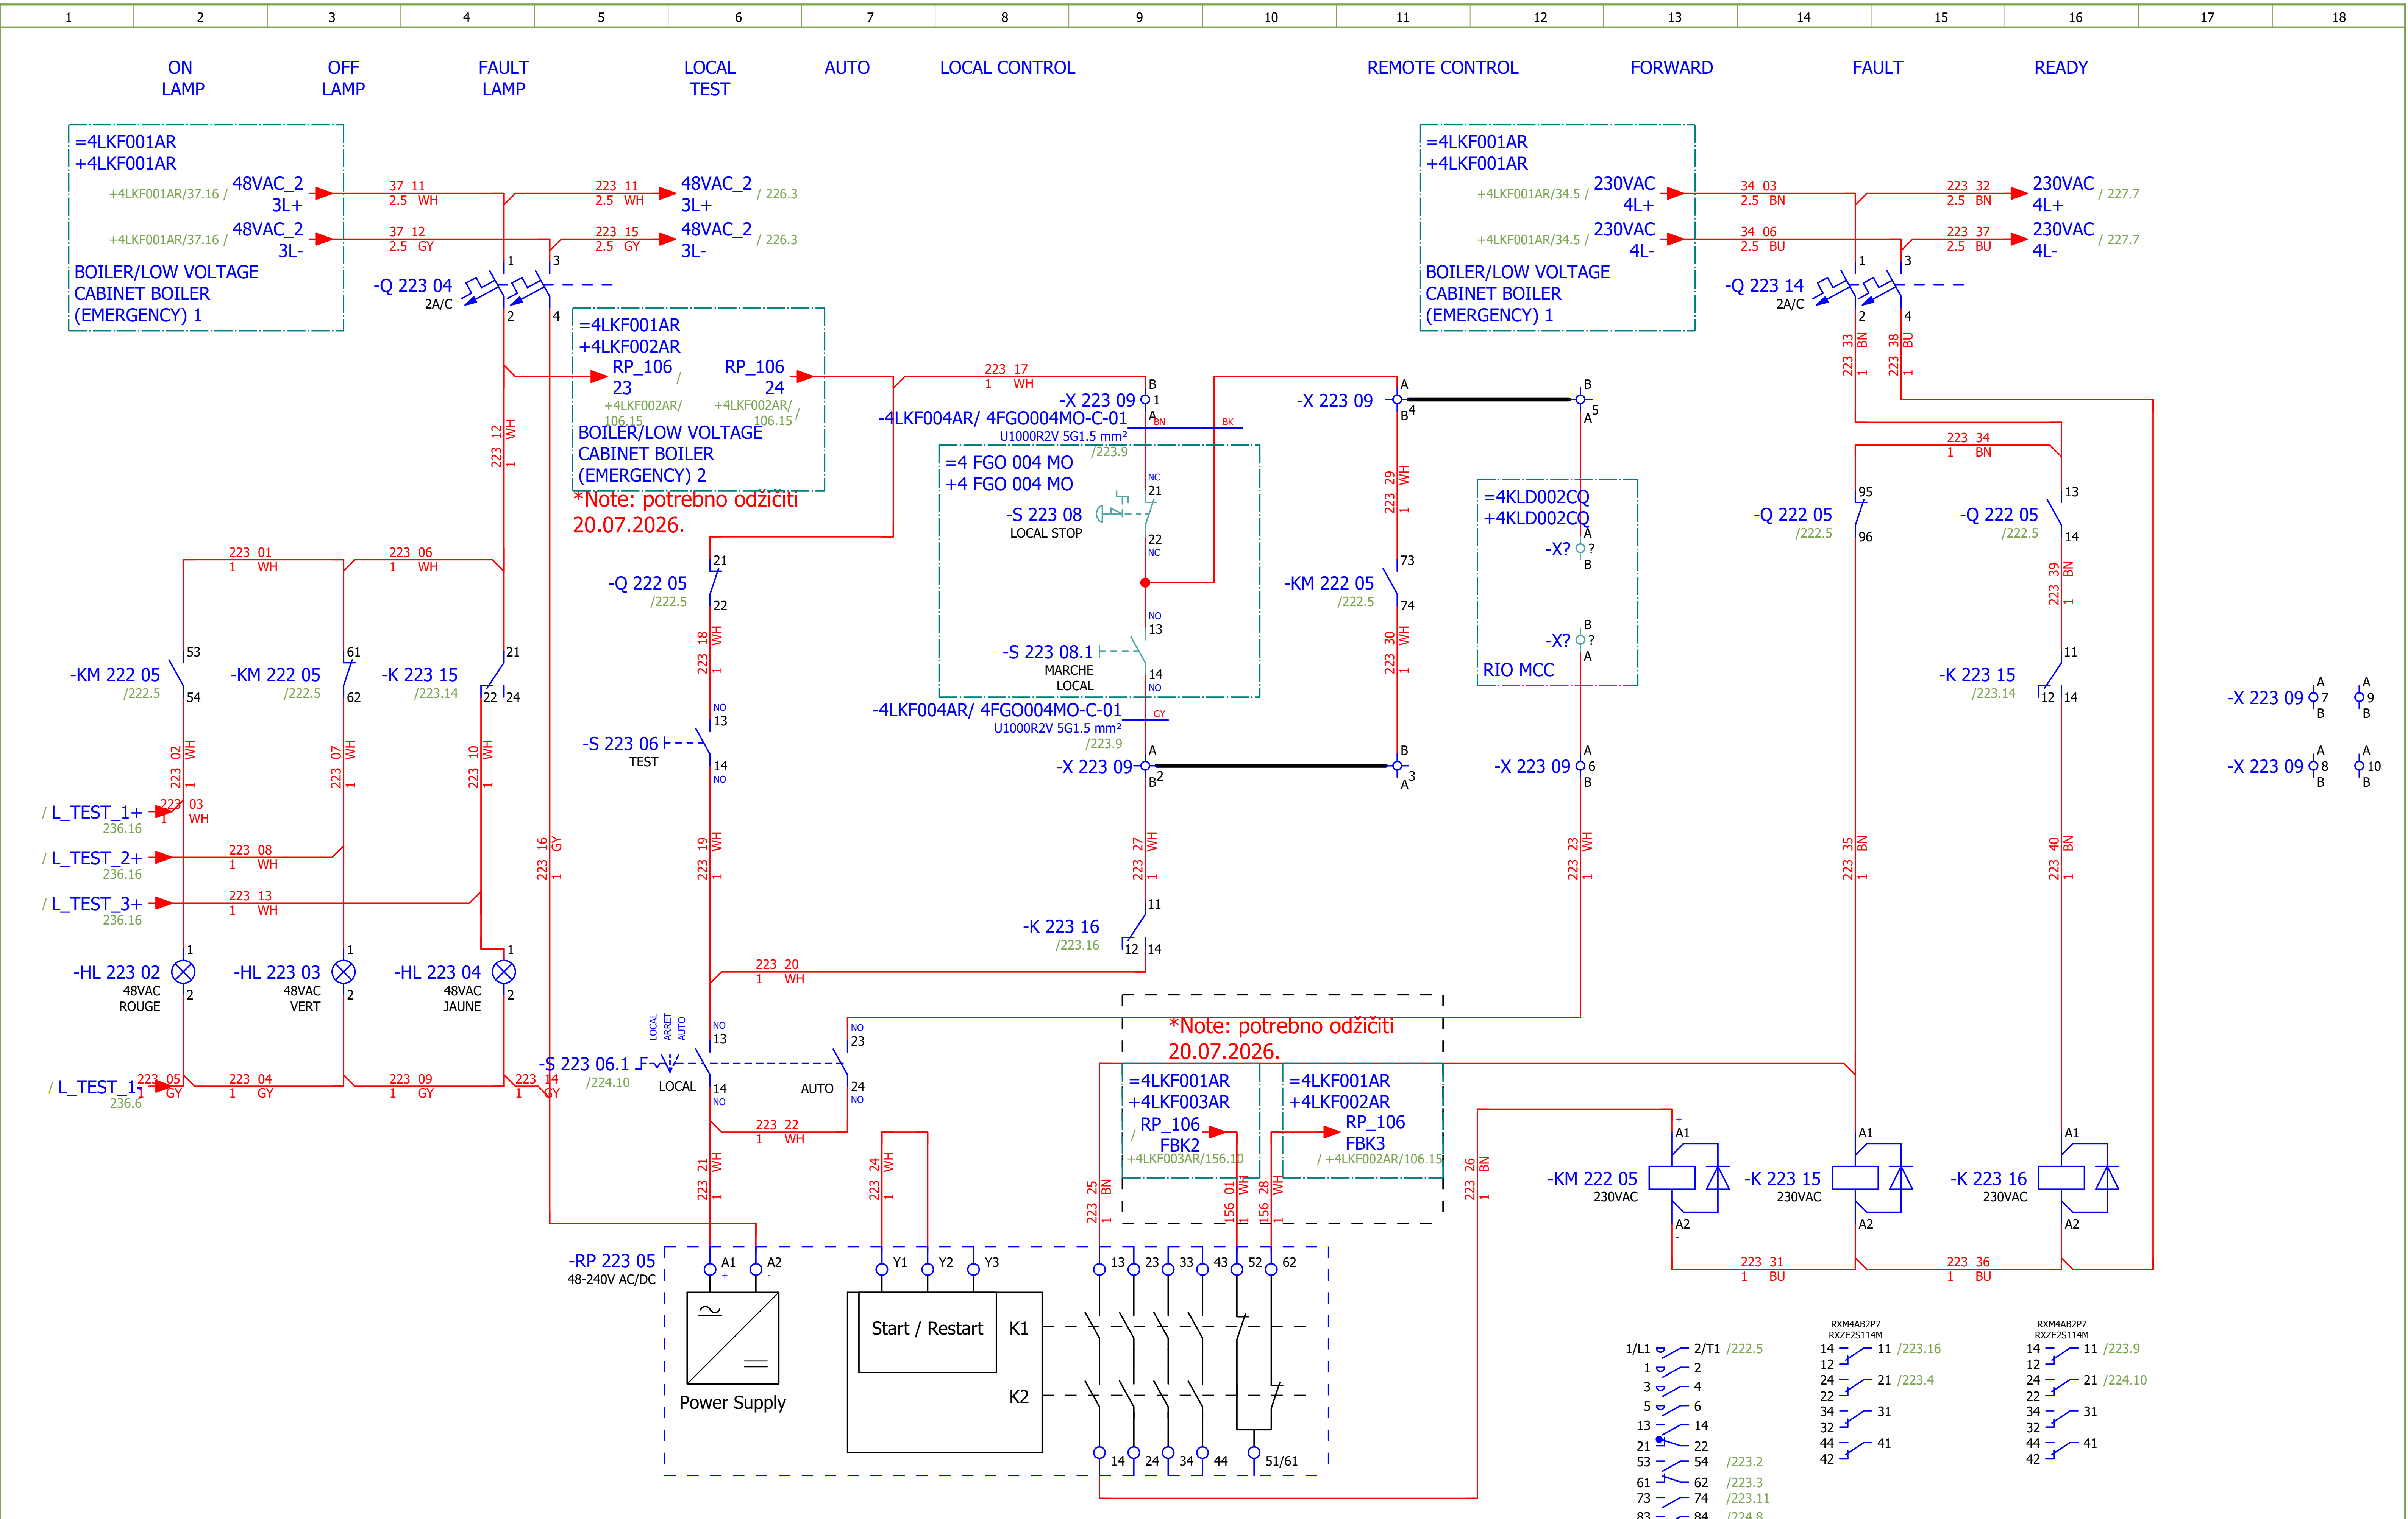

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 4	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Luka Božičević										
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	LIGHT FUEL OIL PUMP 2 - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 223
Format:	A3									+4LKF004AR	Next: 224

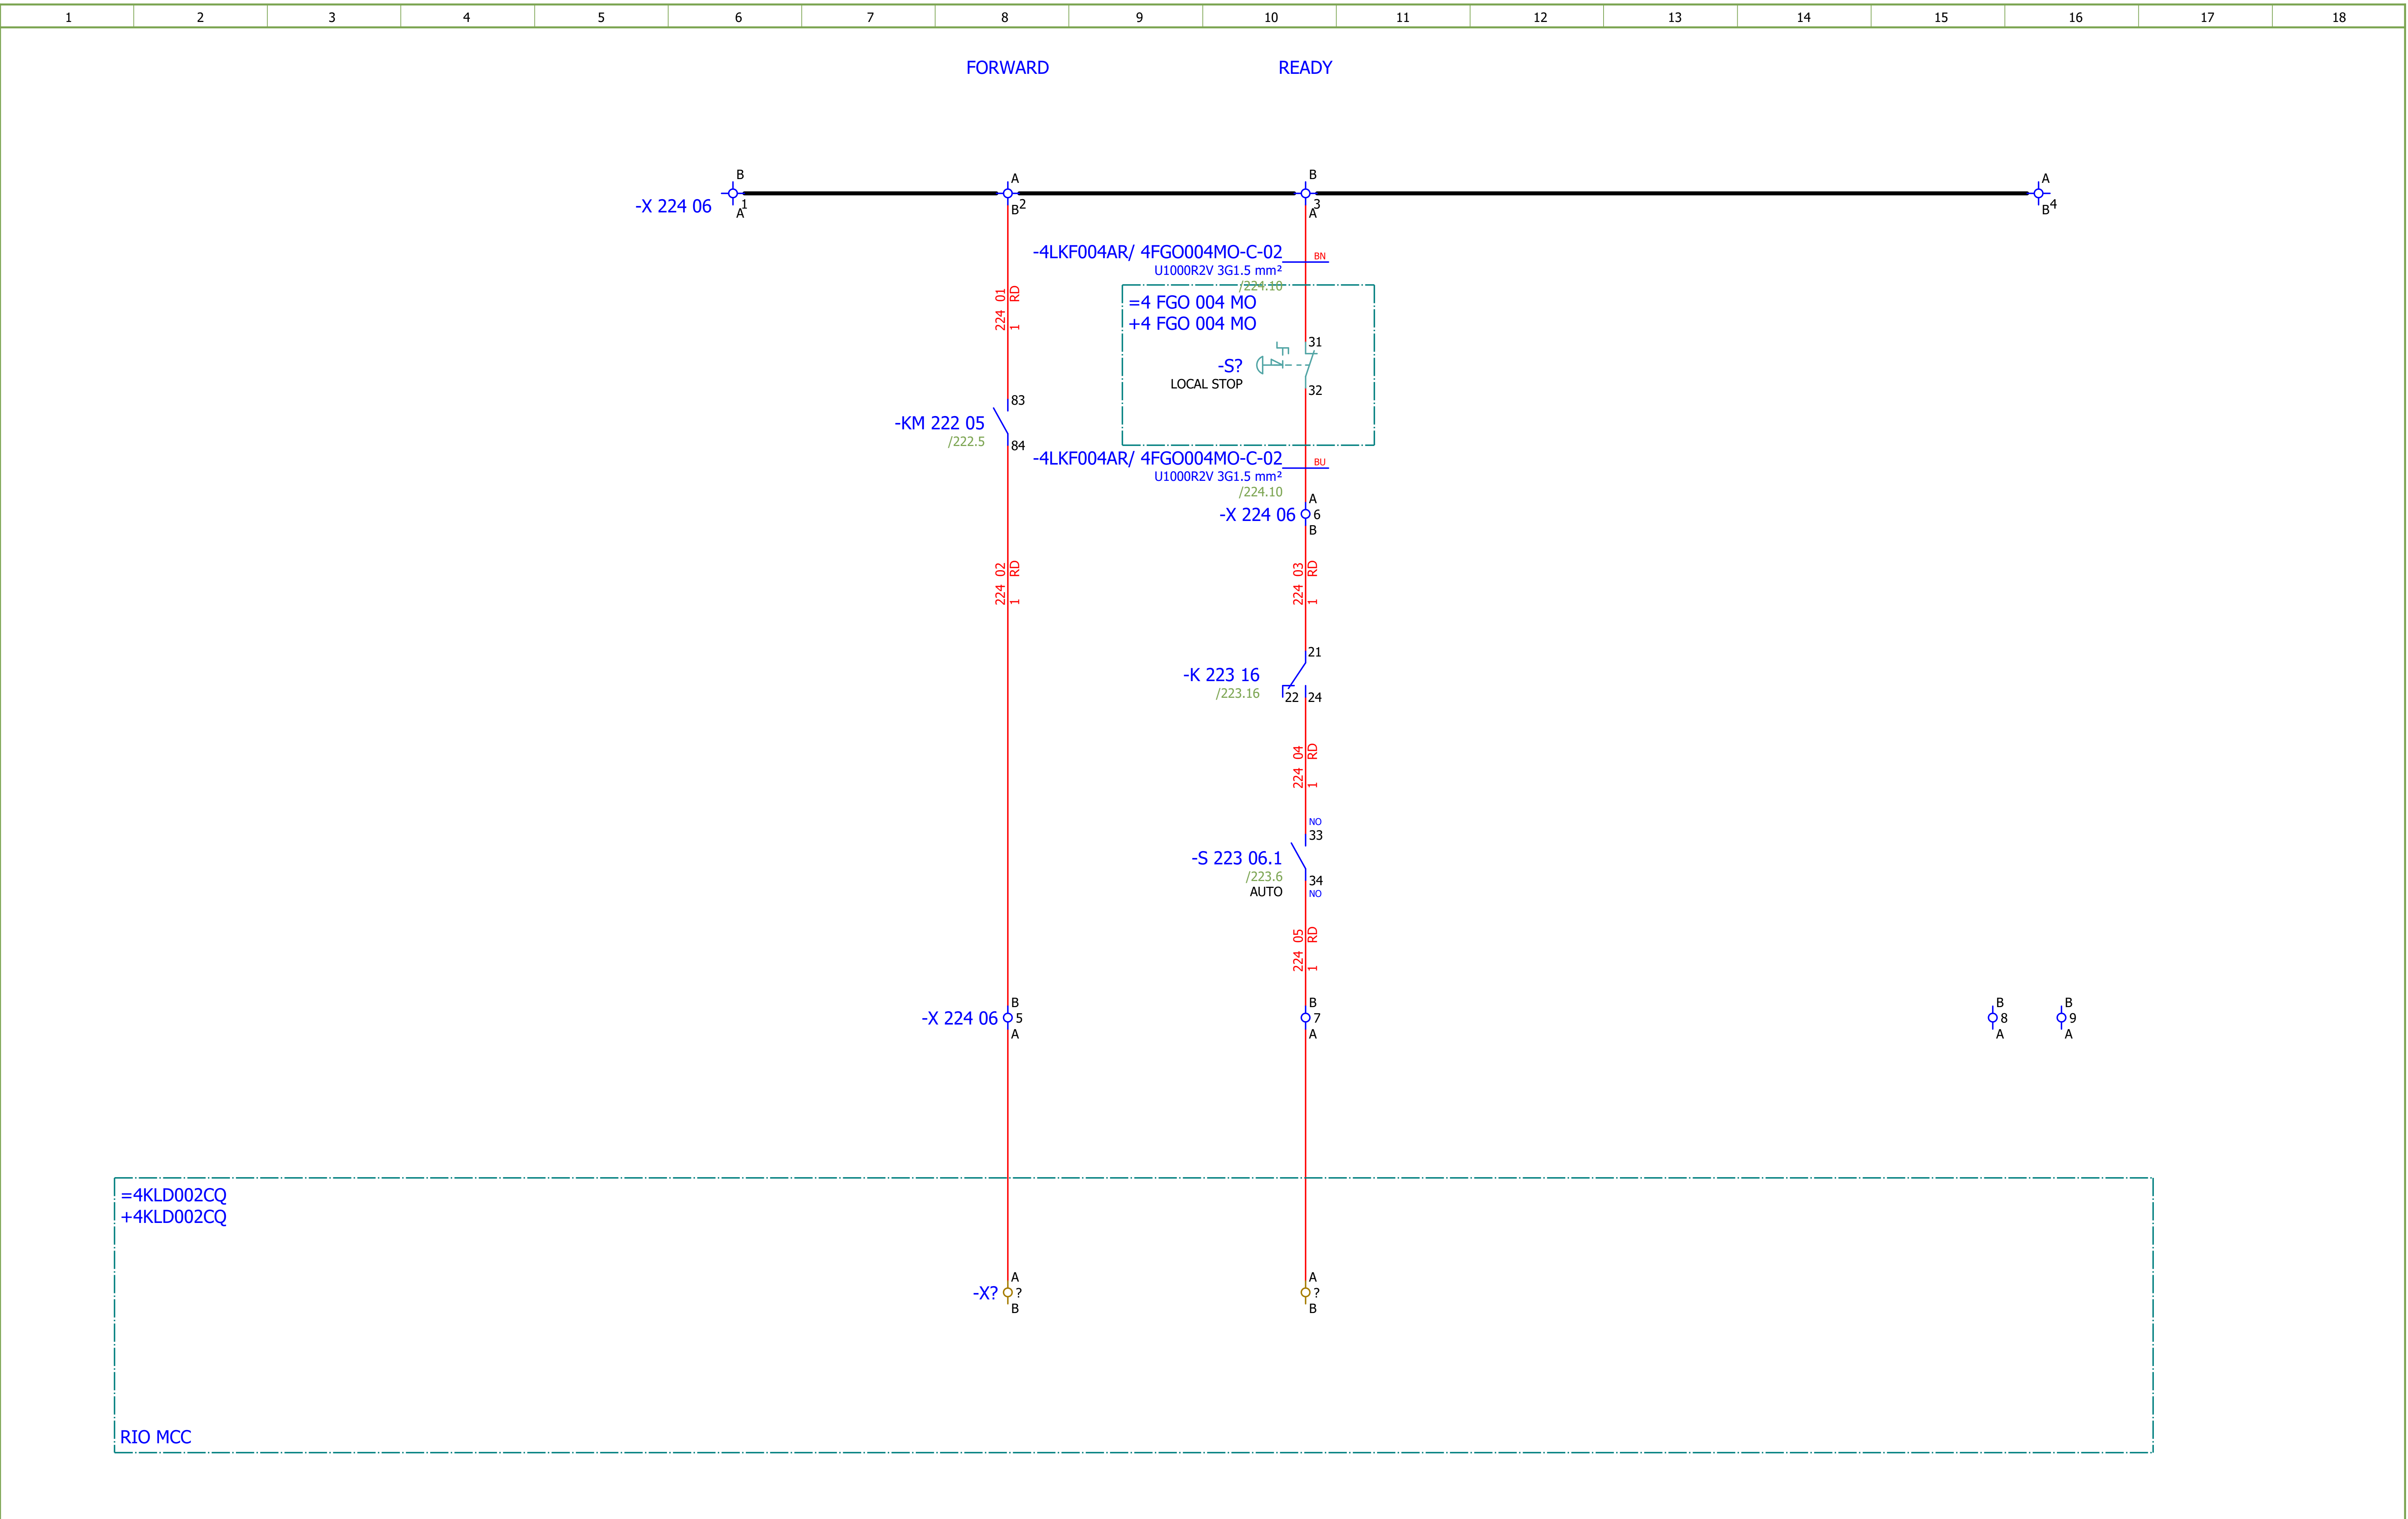

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 4	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Luka Božičević								#D
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: LIGHT FUEL OIL PUMP 2 - SIGNALIZATION	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 224
Format:	A3							+4LKF004AR	Next: 225

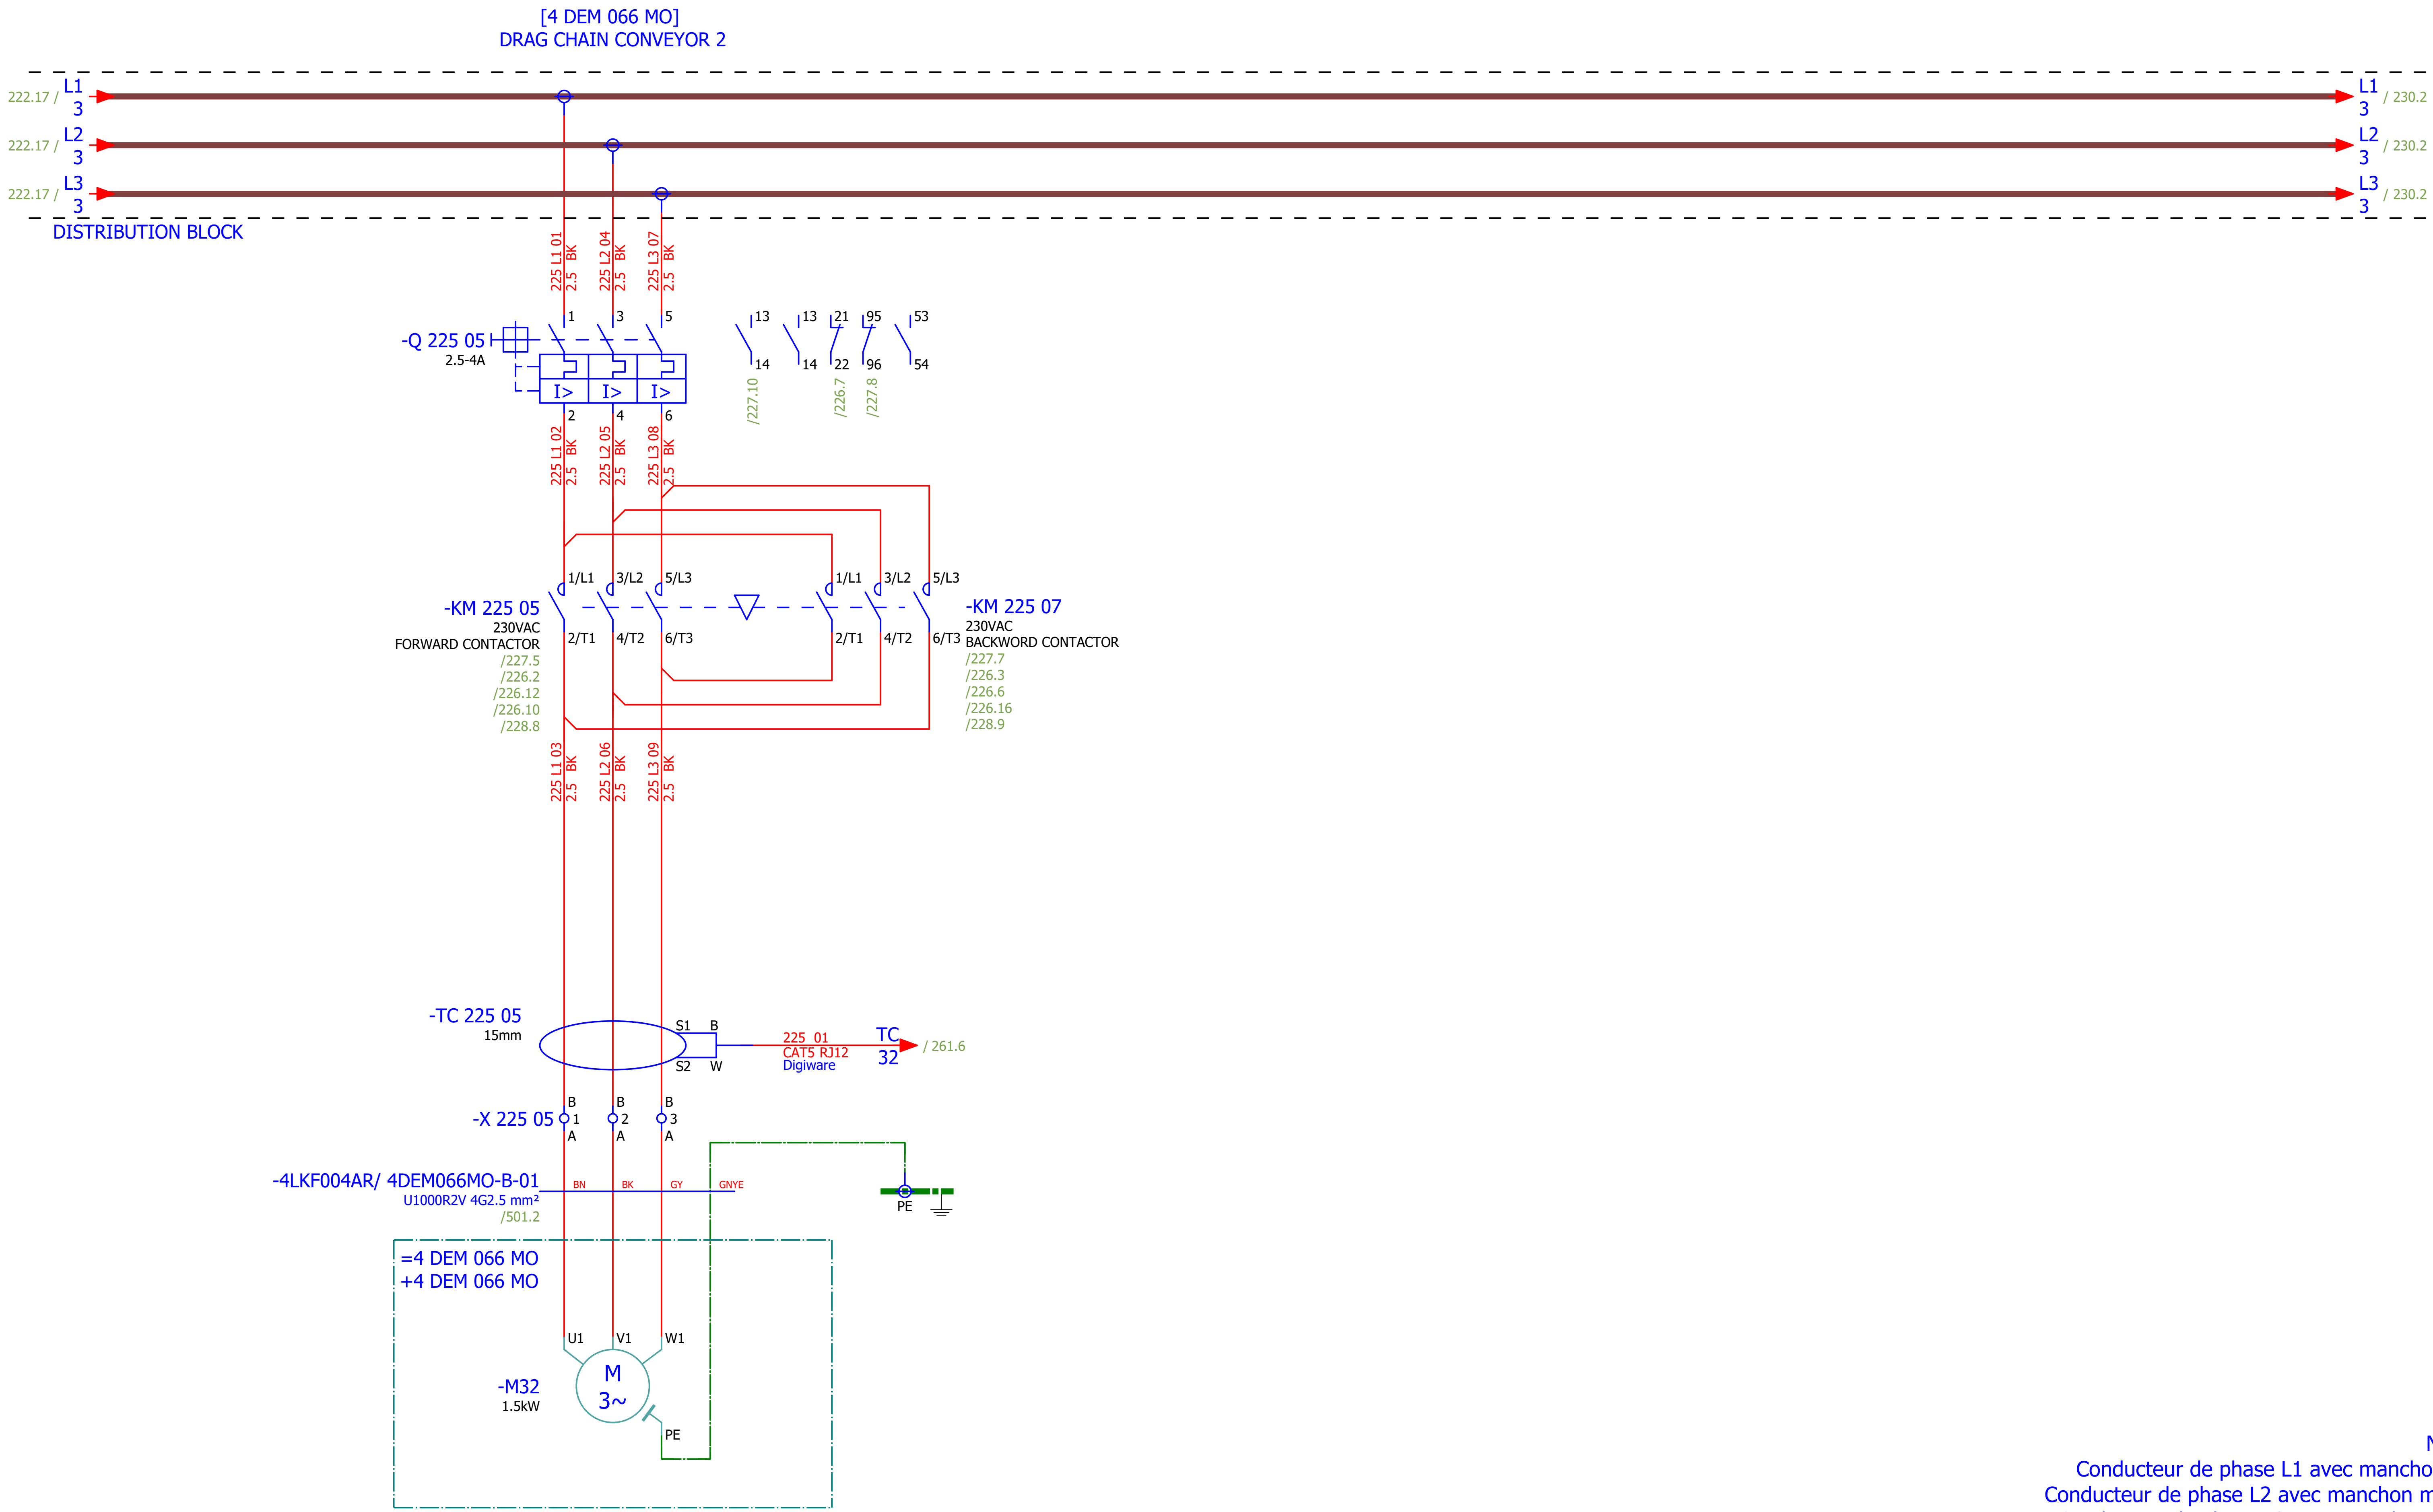

NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 4	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: DRAG CHAIN CONVEYOR 2	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 225
Format:	A3								+4LKF004AR	Next: 226

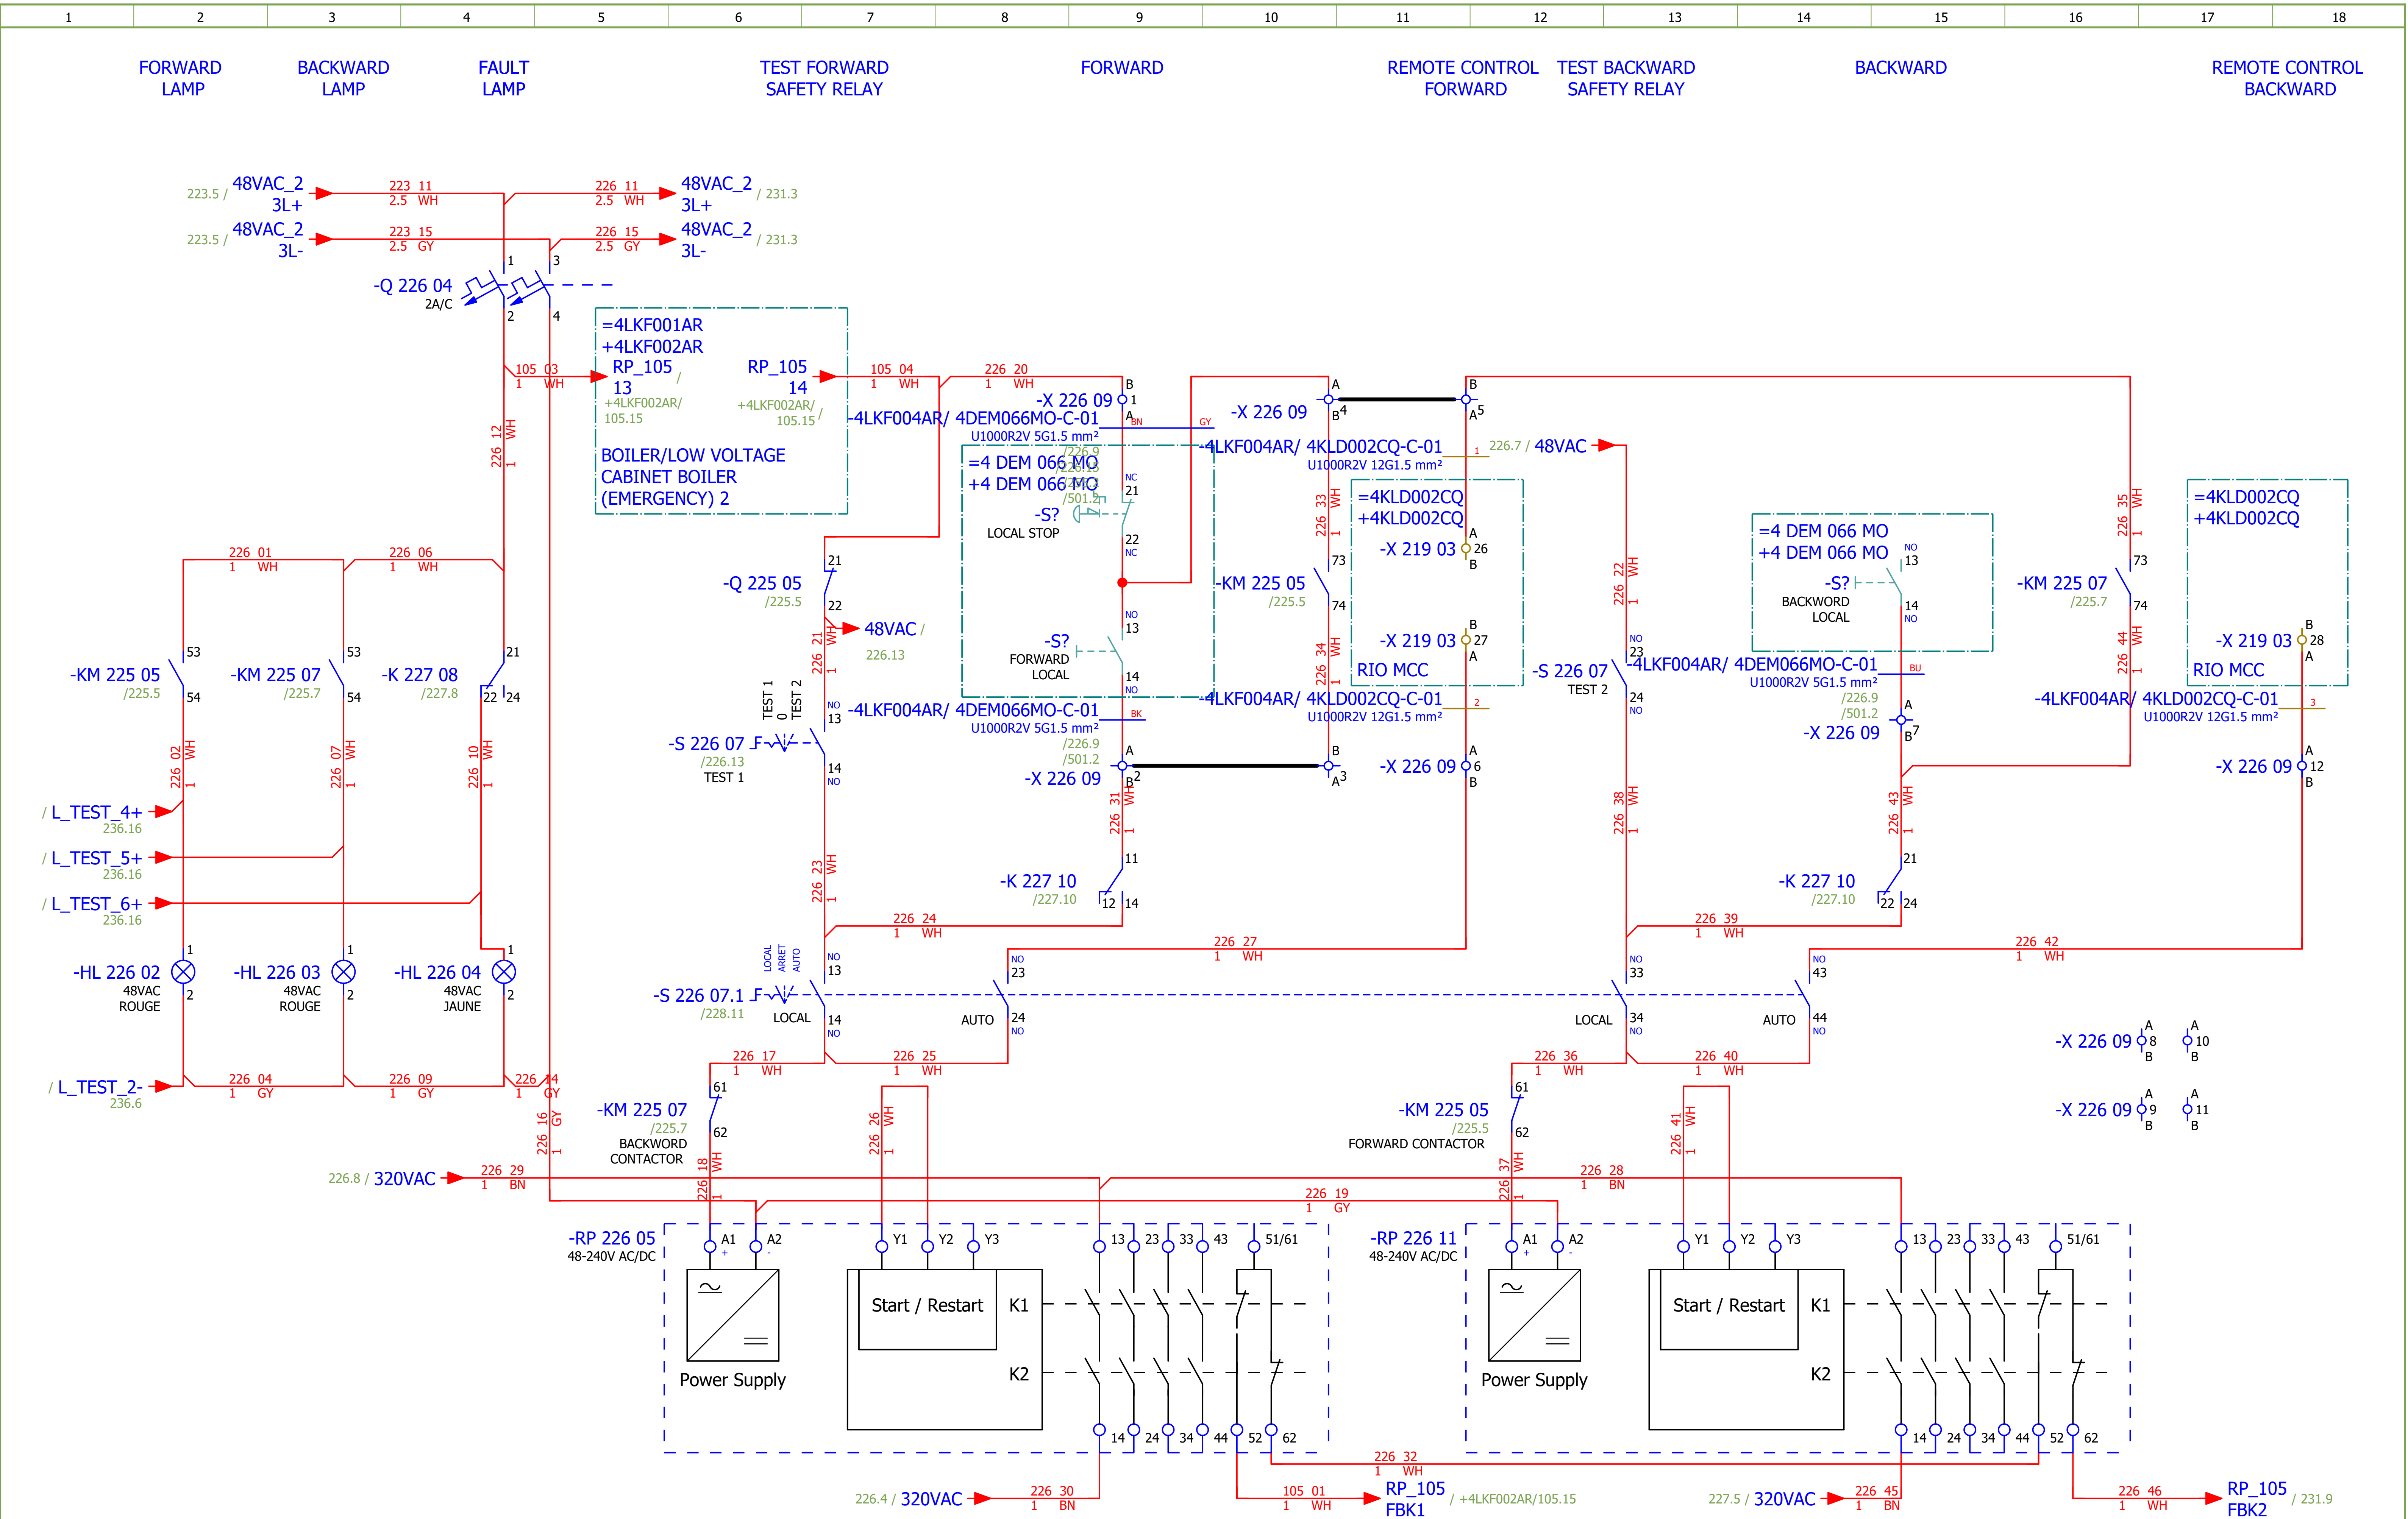

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 4	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870
Drawn:	Luka Božičević							
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: DRAG CHAIN CONVEYOR 2 - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F		
Format:	A3							

Revision: F	#D
=4LKF001AR	Sheet: 226
+4LKF004AR	Next: 227

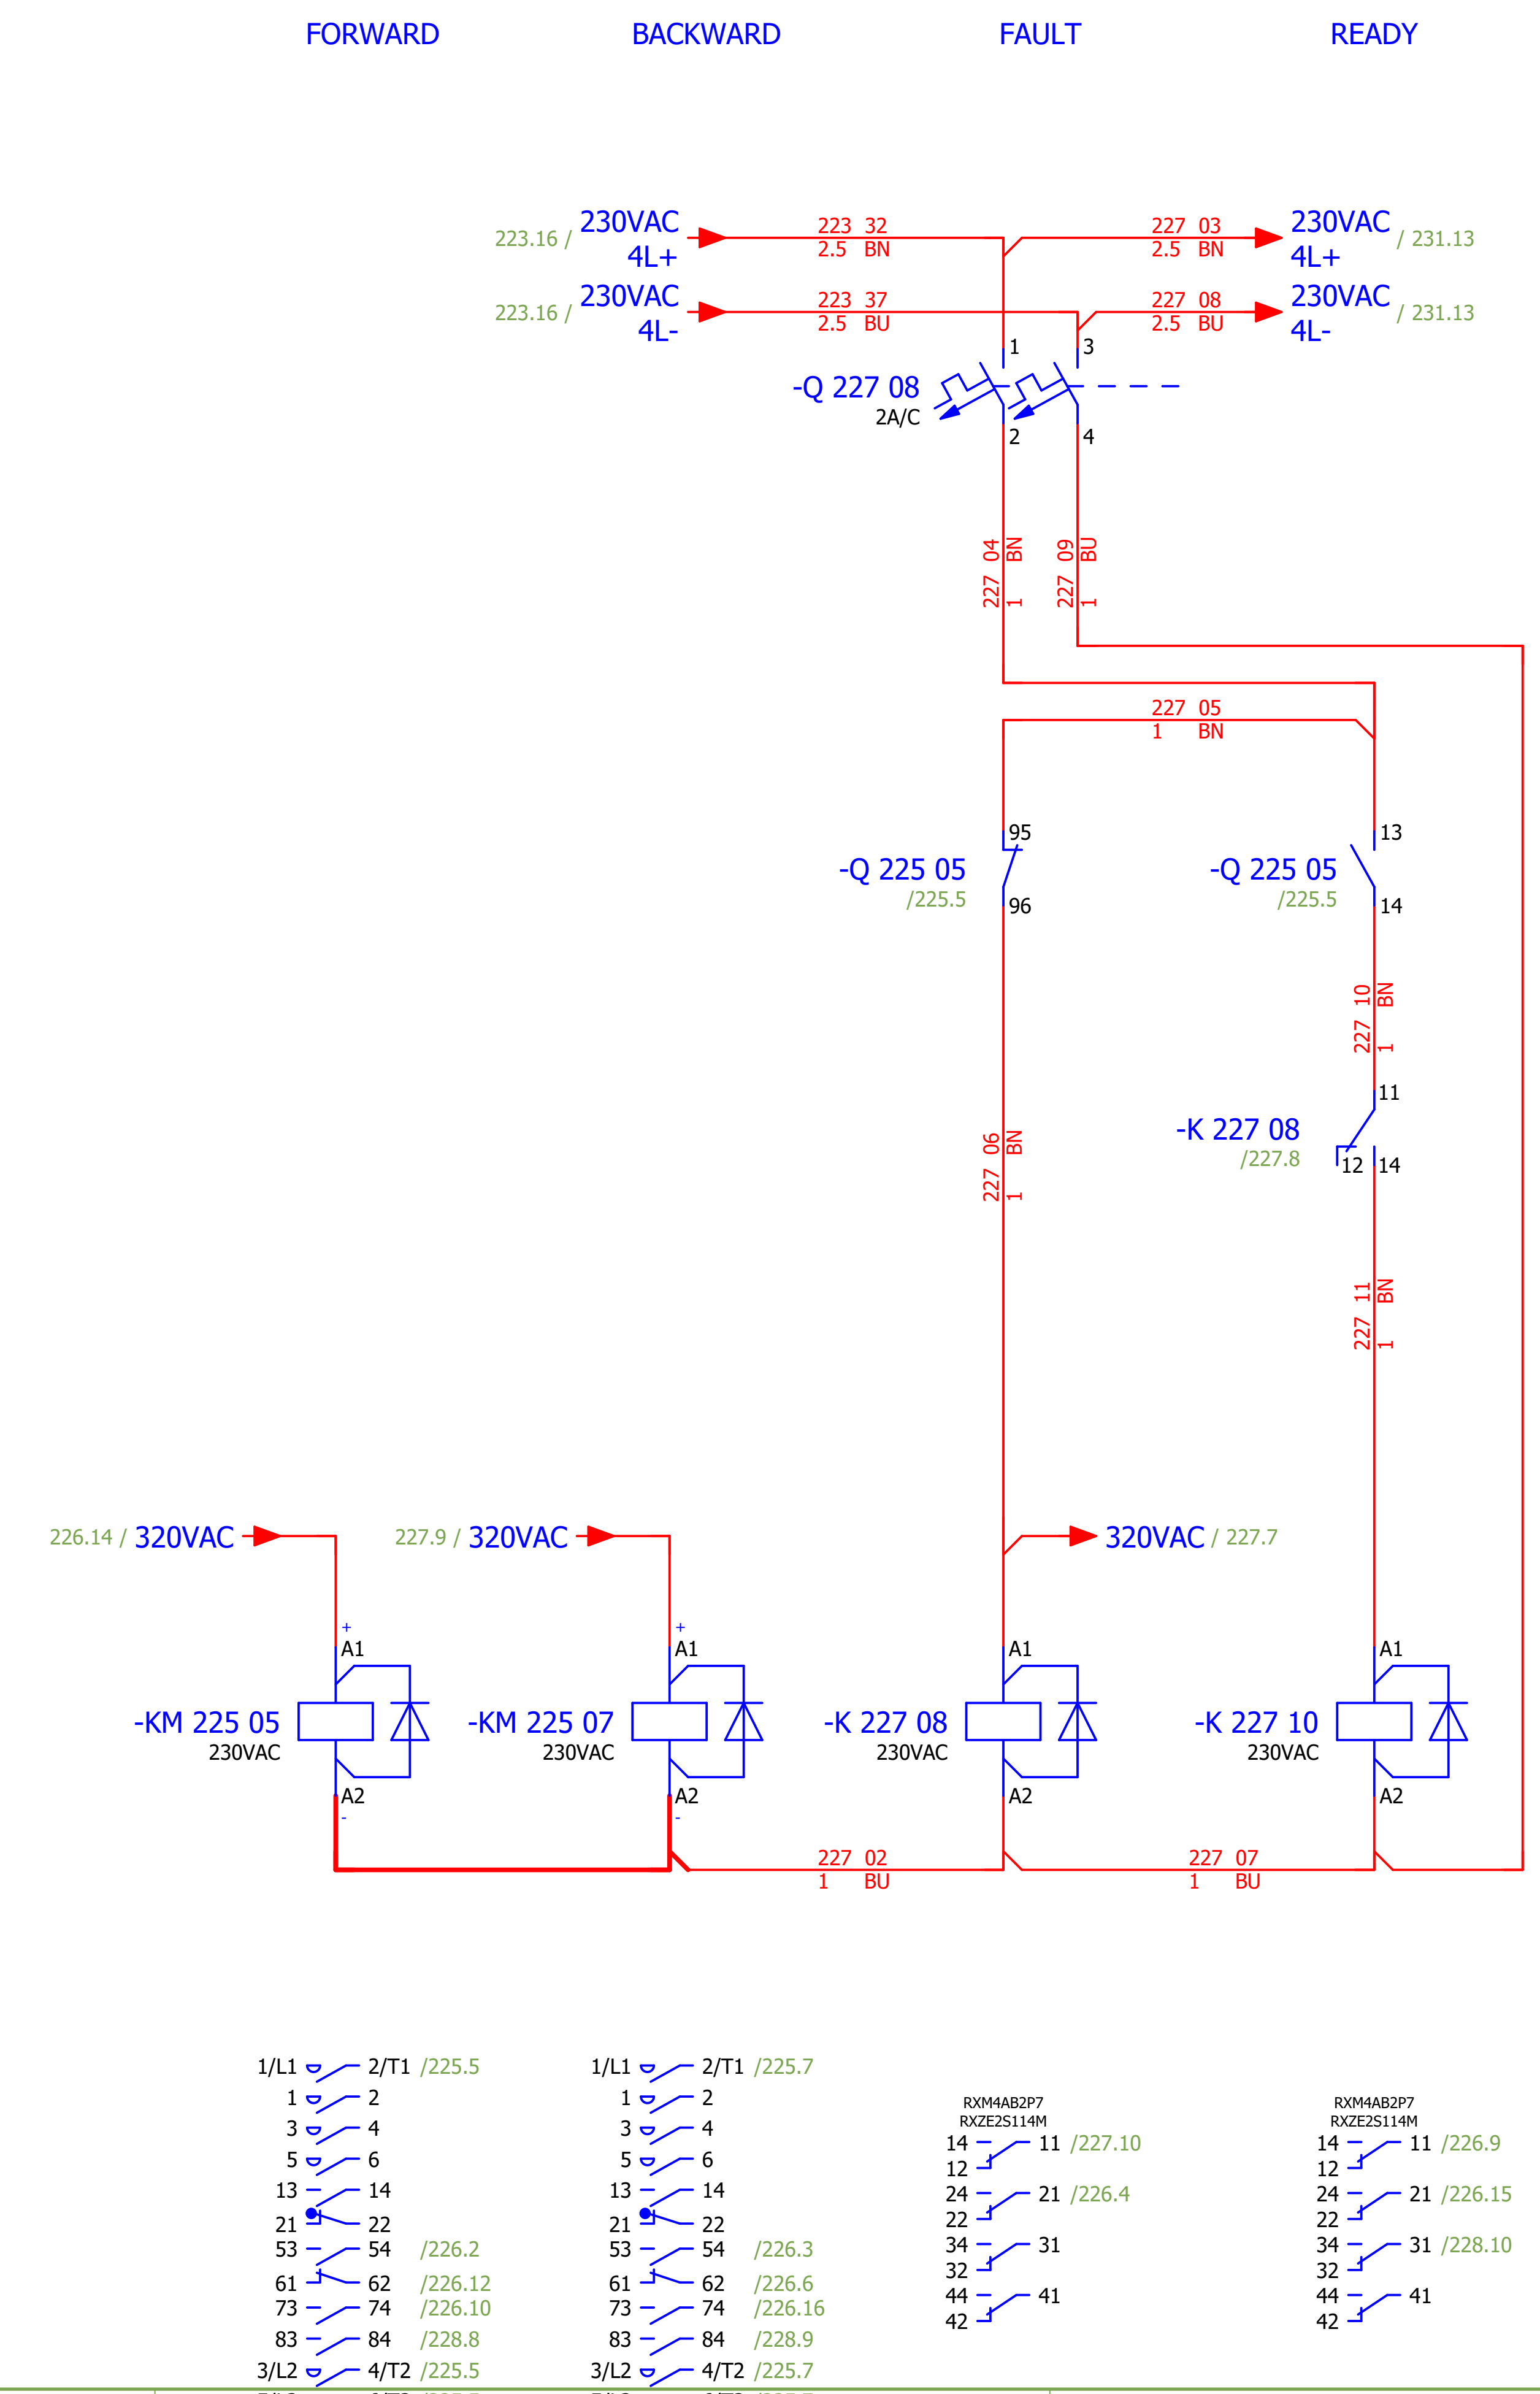

Date:	17.03.2026.	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 4	Project: BRC-4	Unit & Issuer: ATEP0
Drawn:	Luka Božičević			Number: 1870	Revision: F
Approved:	Grga Kolić	Object: RDF Albioma Les Bois Rouge Reunion - France	Content: DRAG CHAIN CONVEYOR 2 - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F	=4LKF001AR
Format:	A3			#D	+4LKF004AR

SINTAKSA
A Voith Company

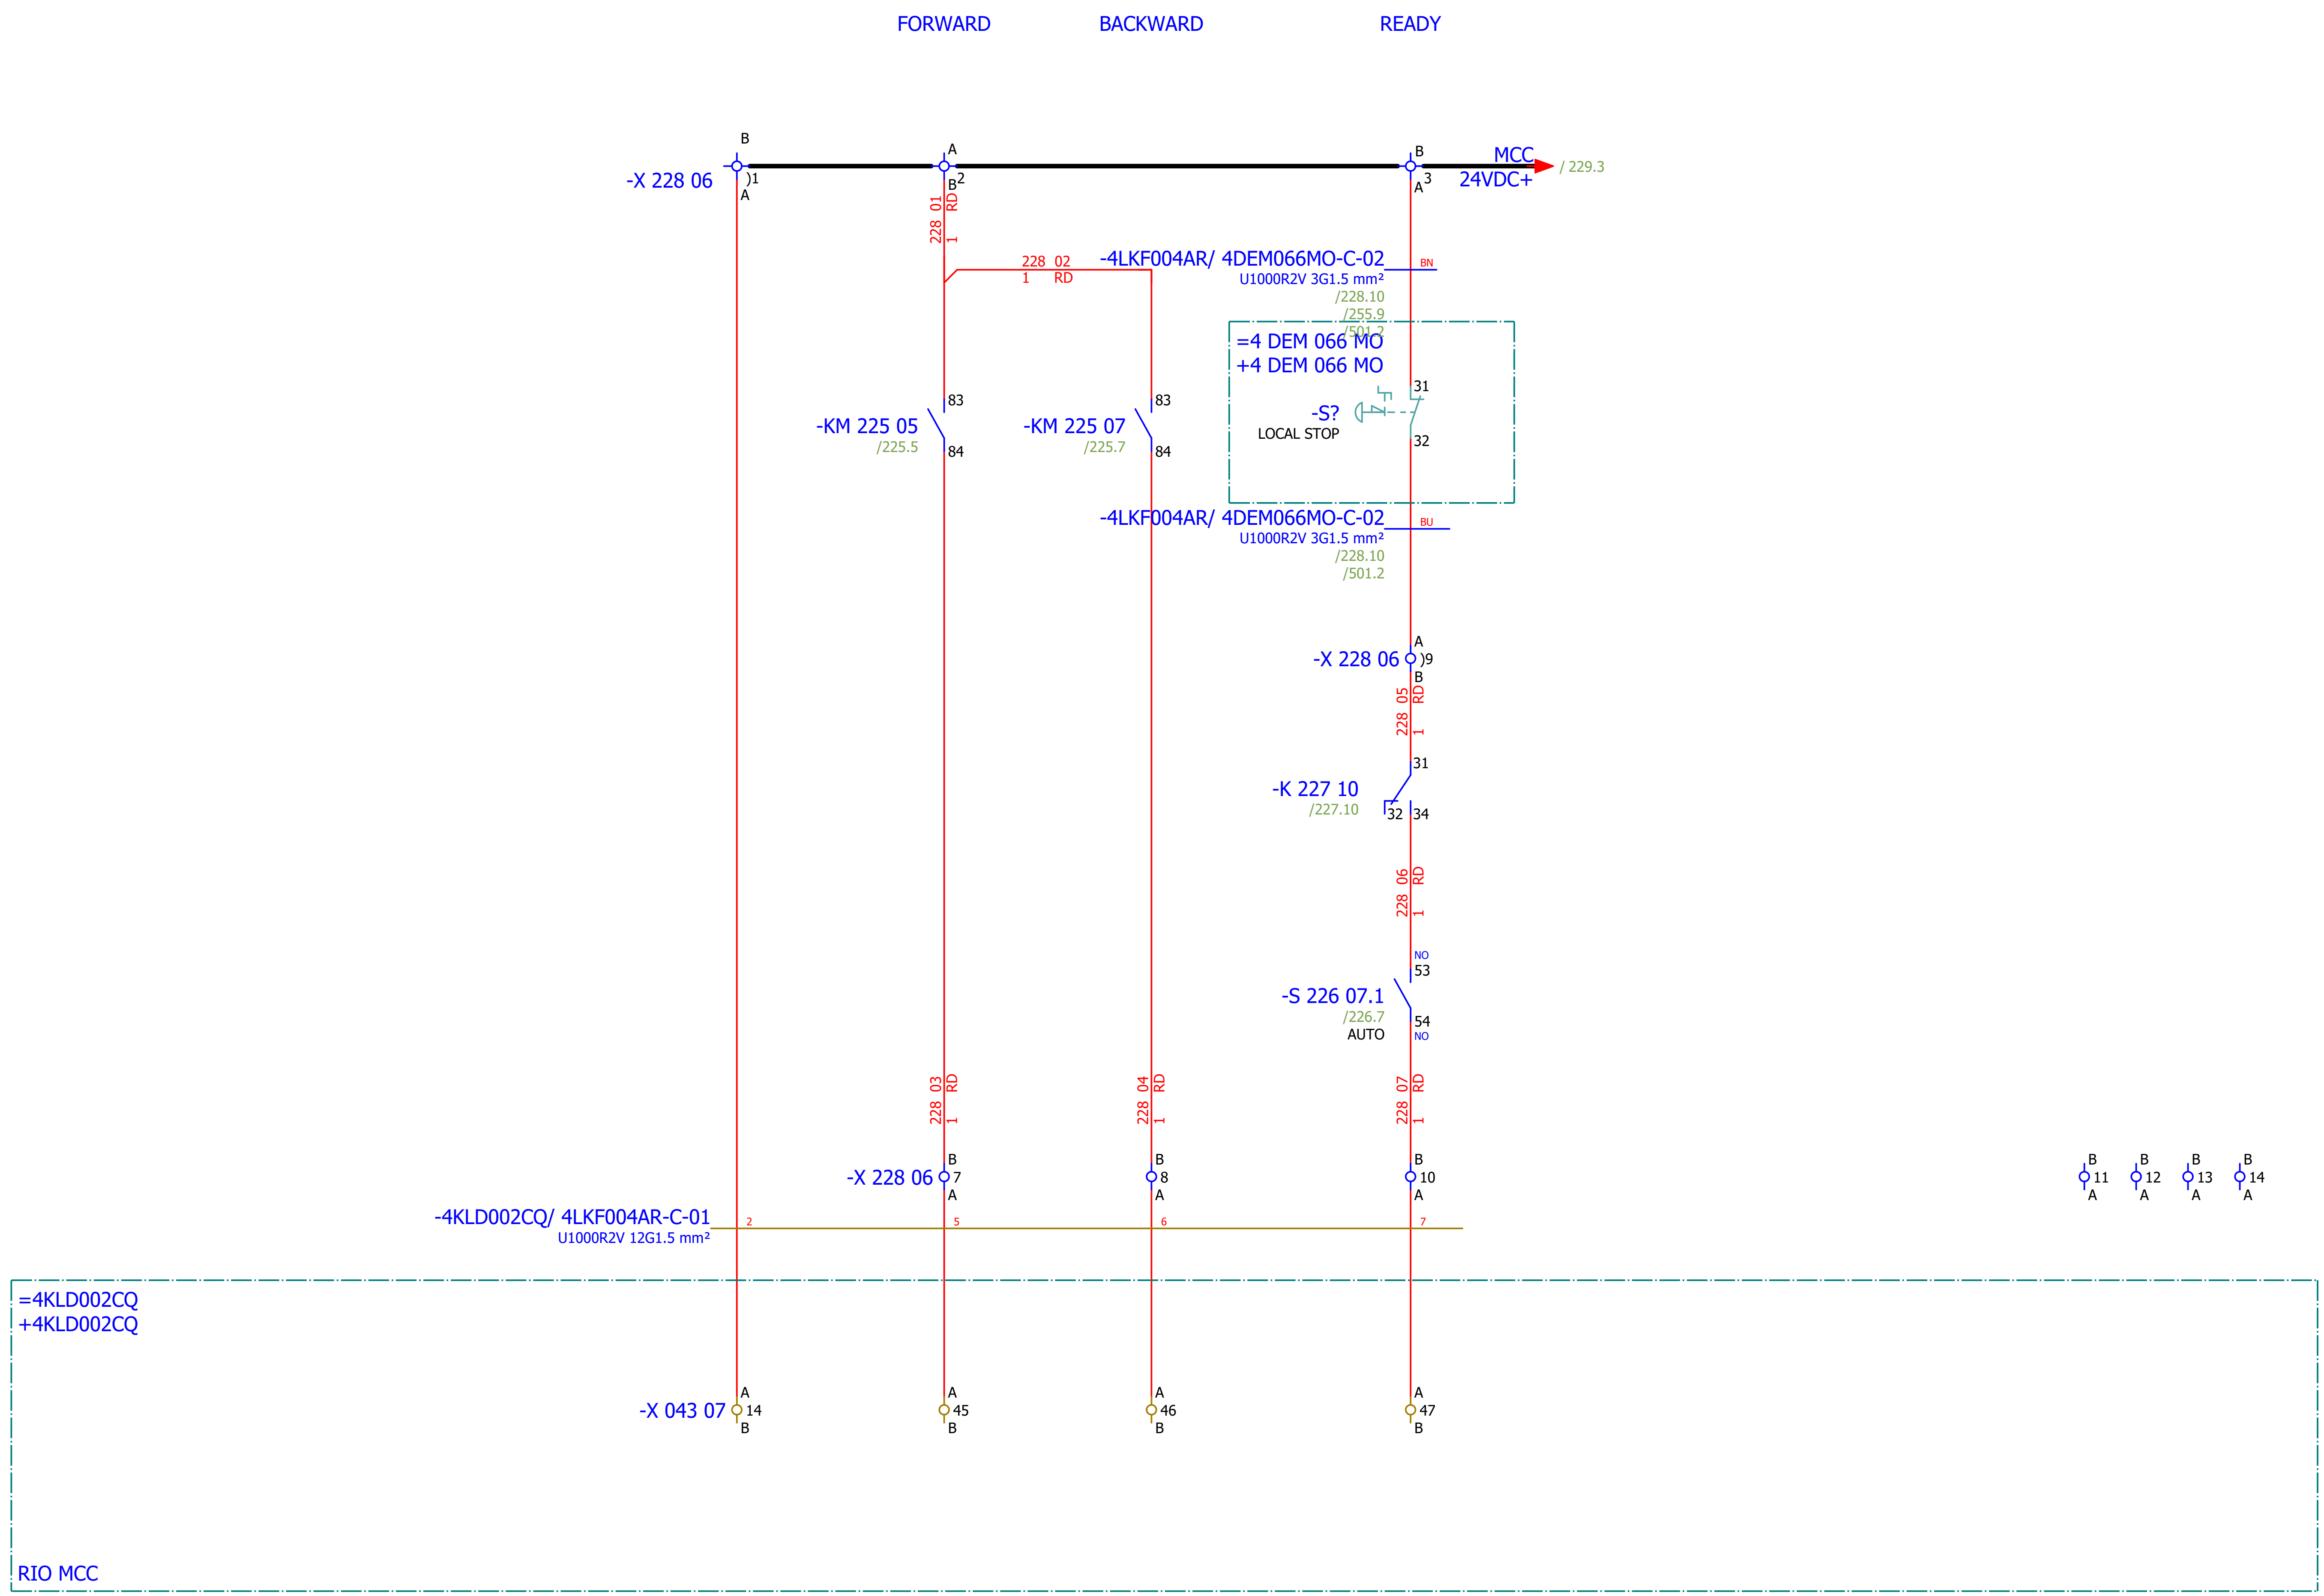

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 4	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Luka Božičević									#D
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	DRAG CHAIN CONVEYOR 2 - SIGNALIZATION	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 228
Format:	A3								+4LKF004AR	Next: 229

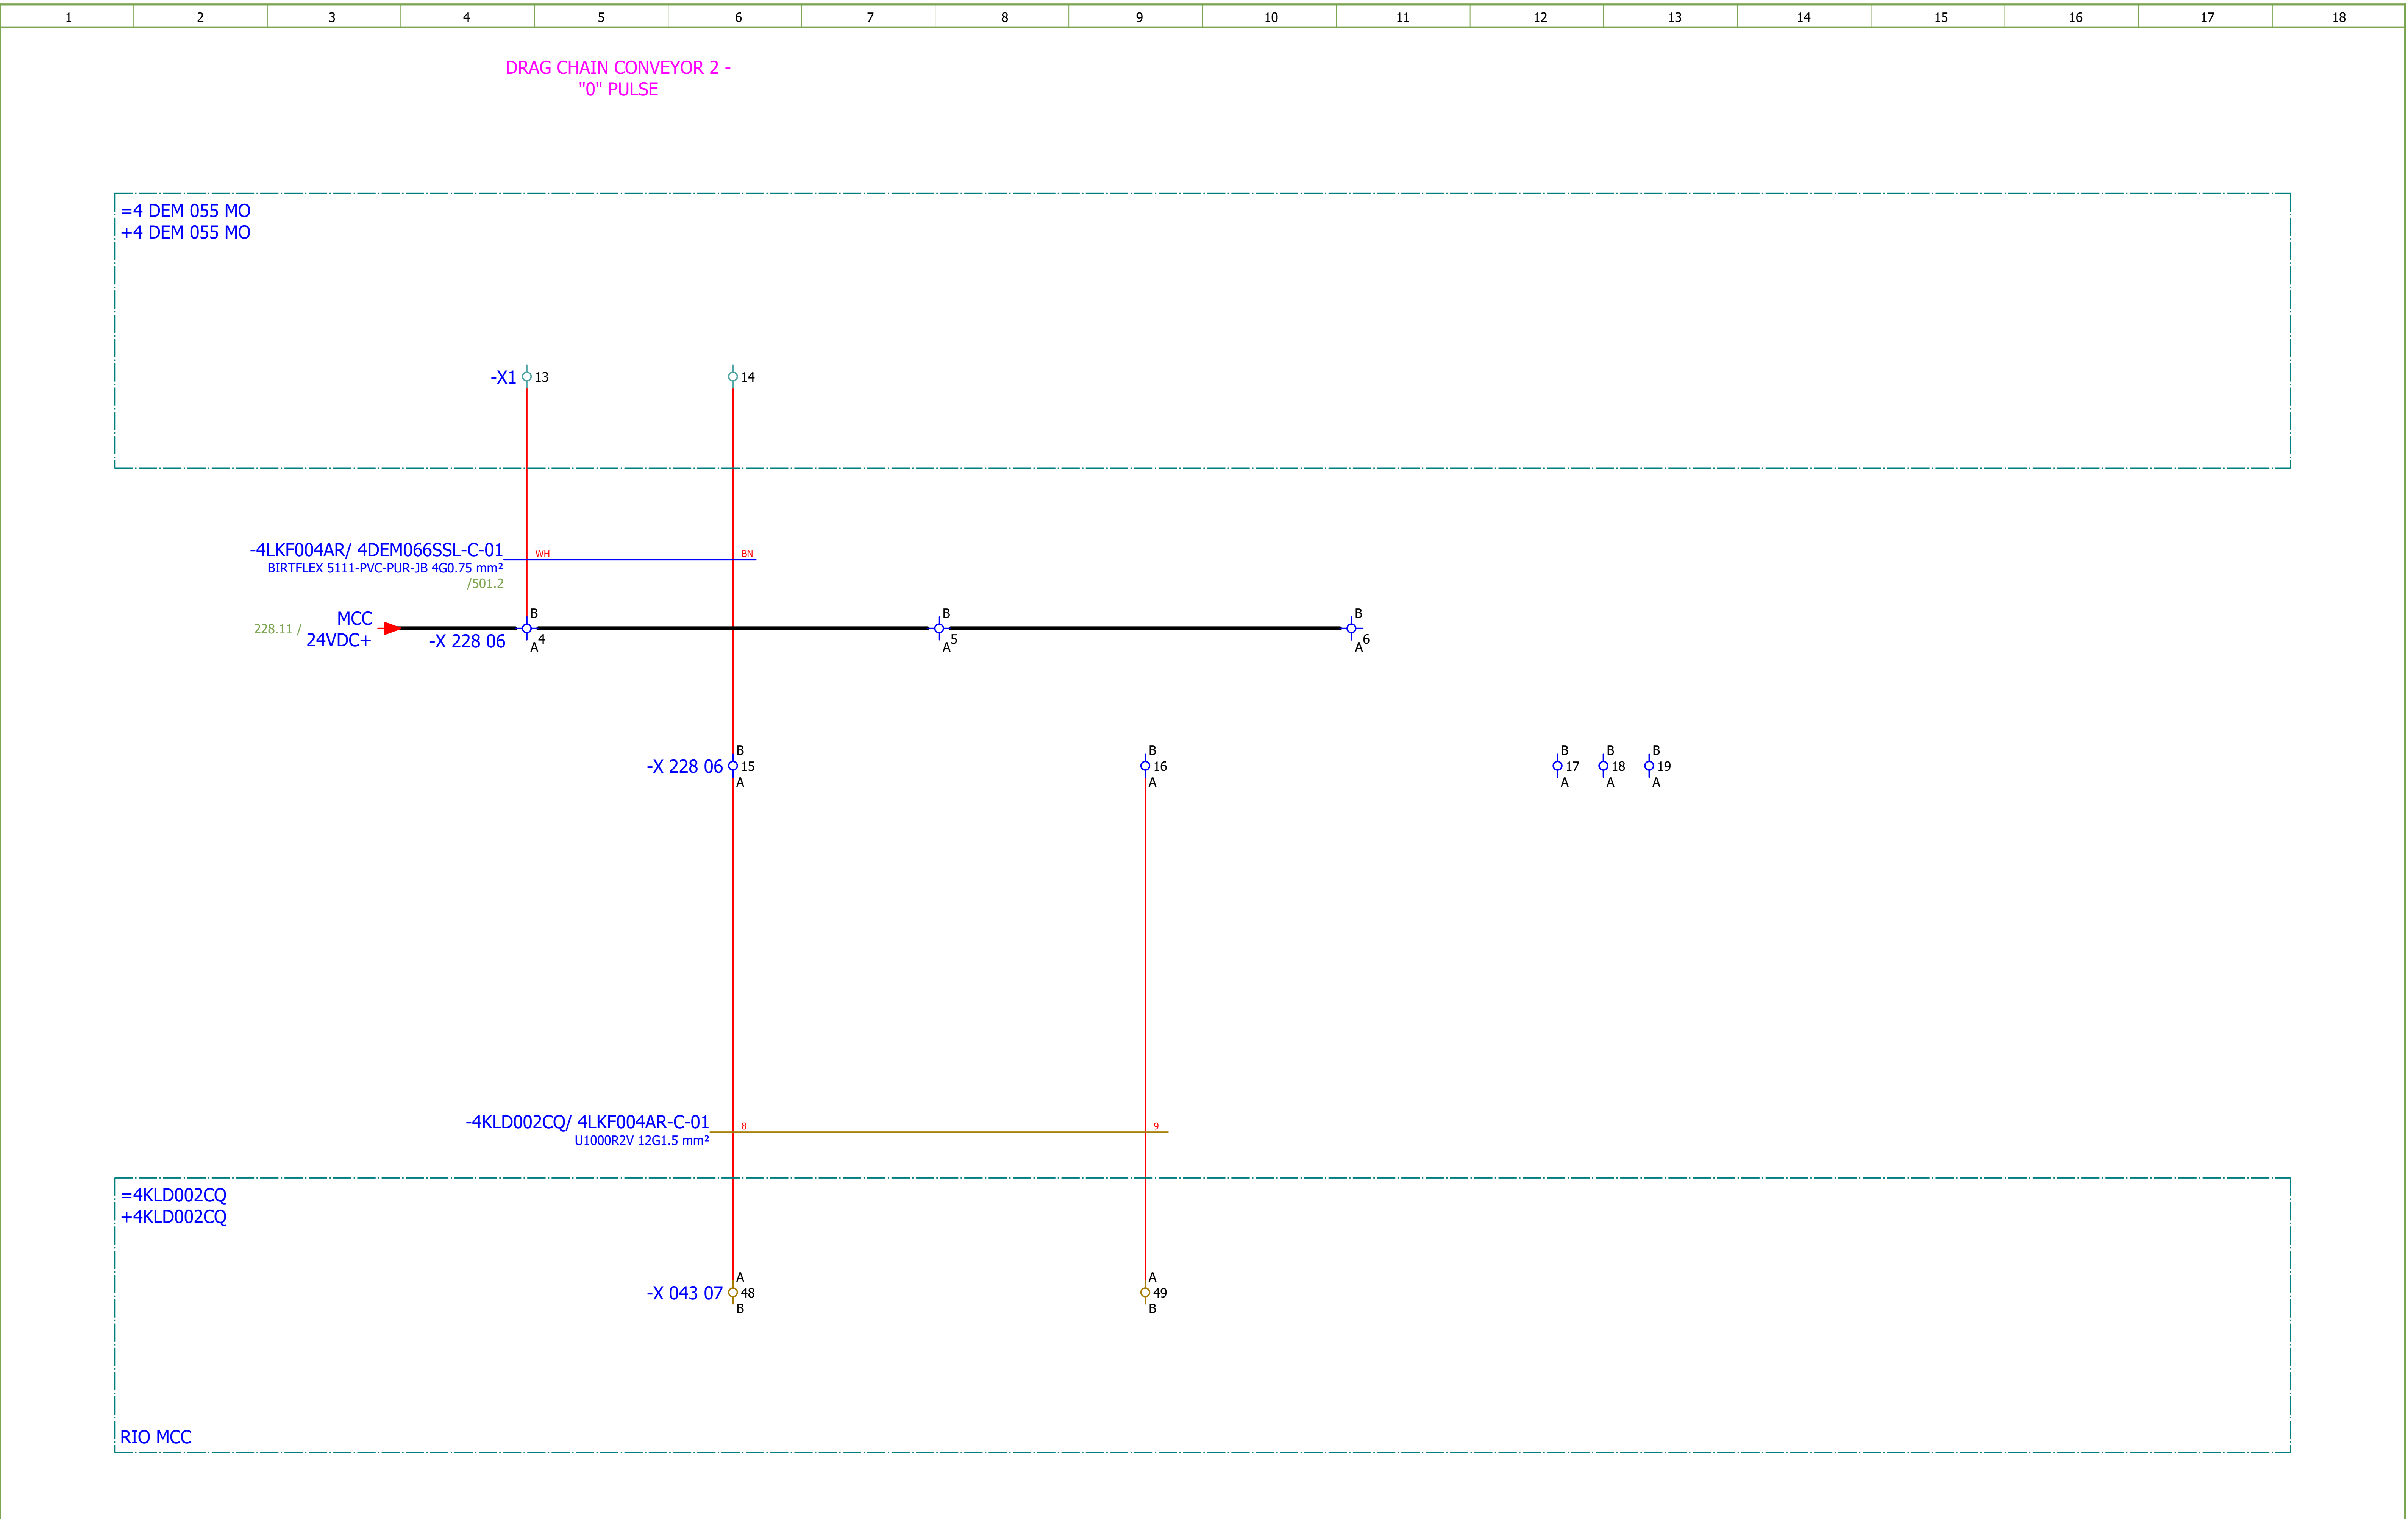

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 4	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: DRAG CHAIN CONVEYOR 2 - SIGNALIZATION	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 229
Format:	A3								+4LKF004AR	Next: 230

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

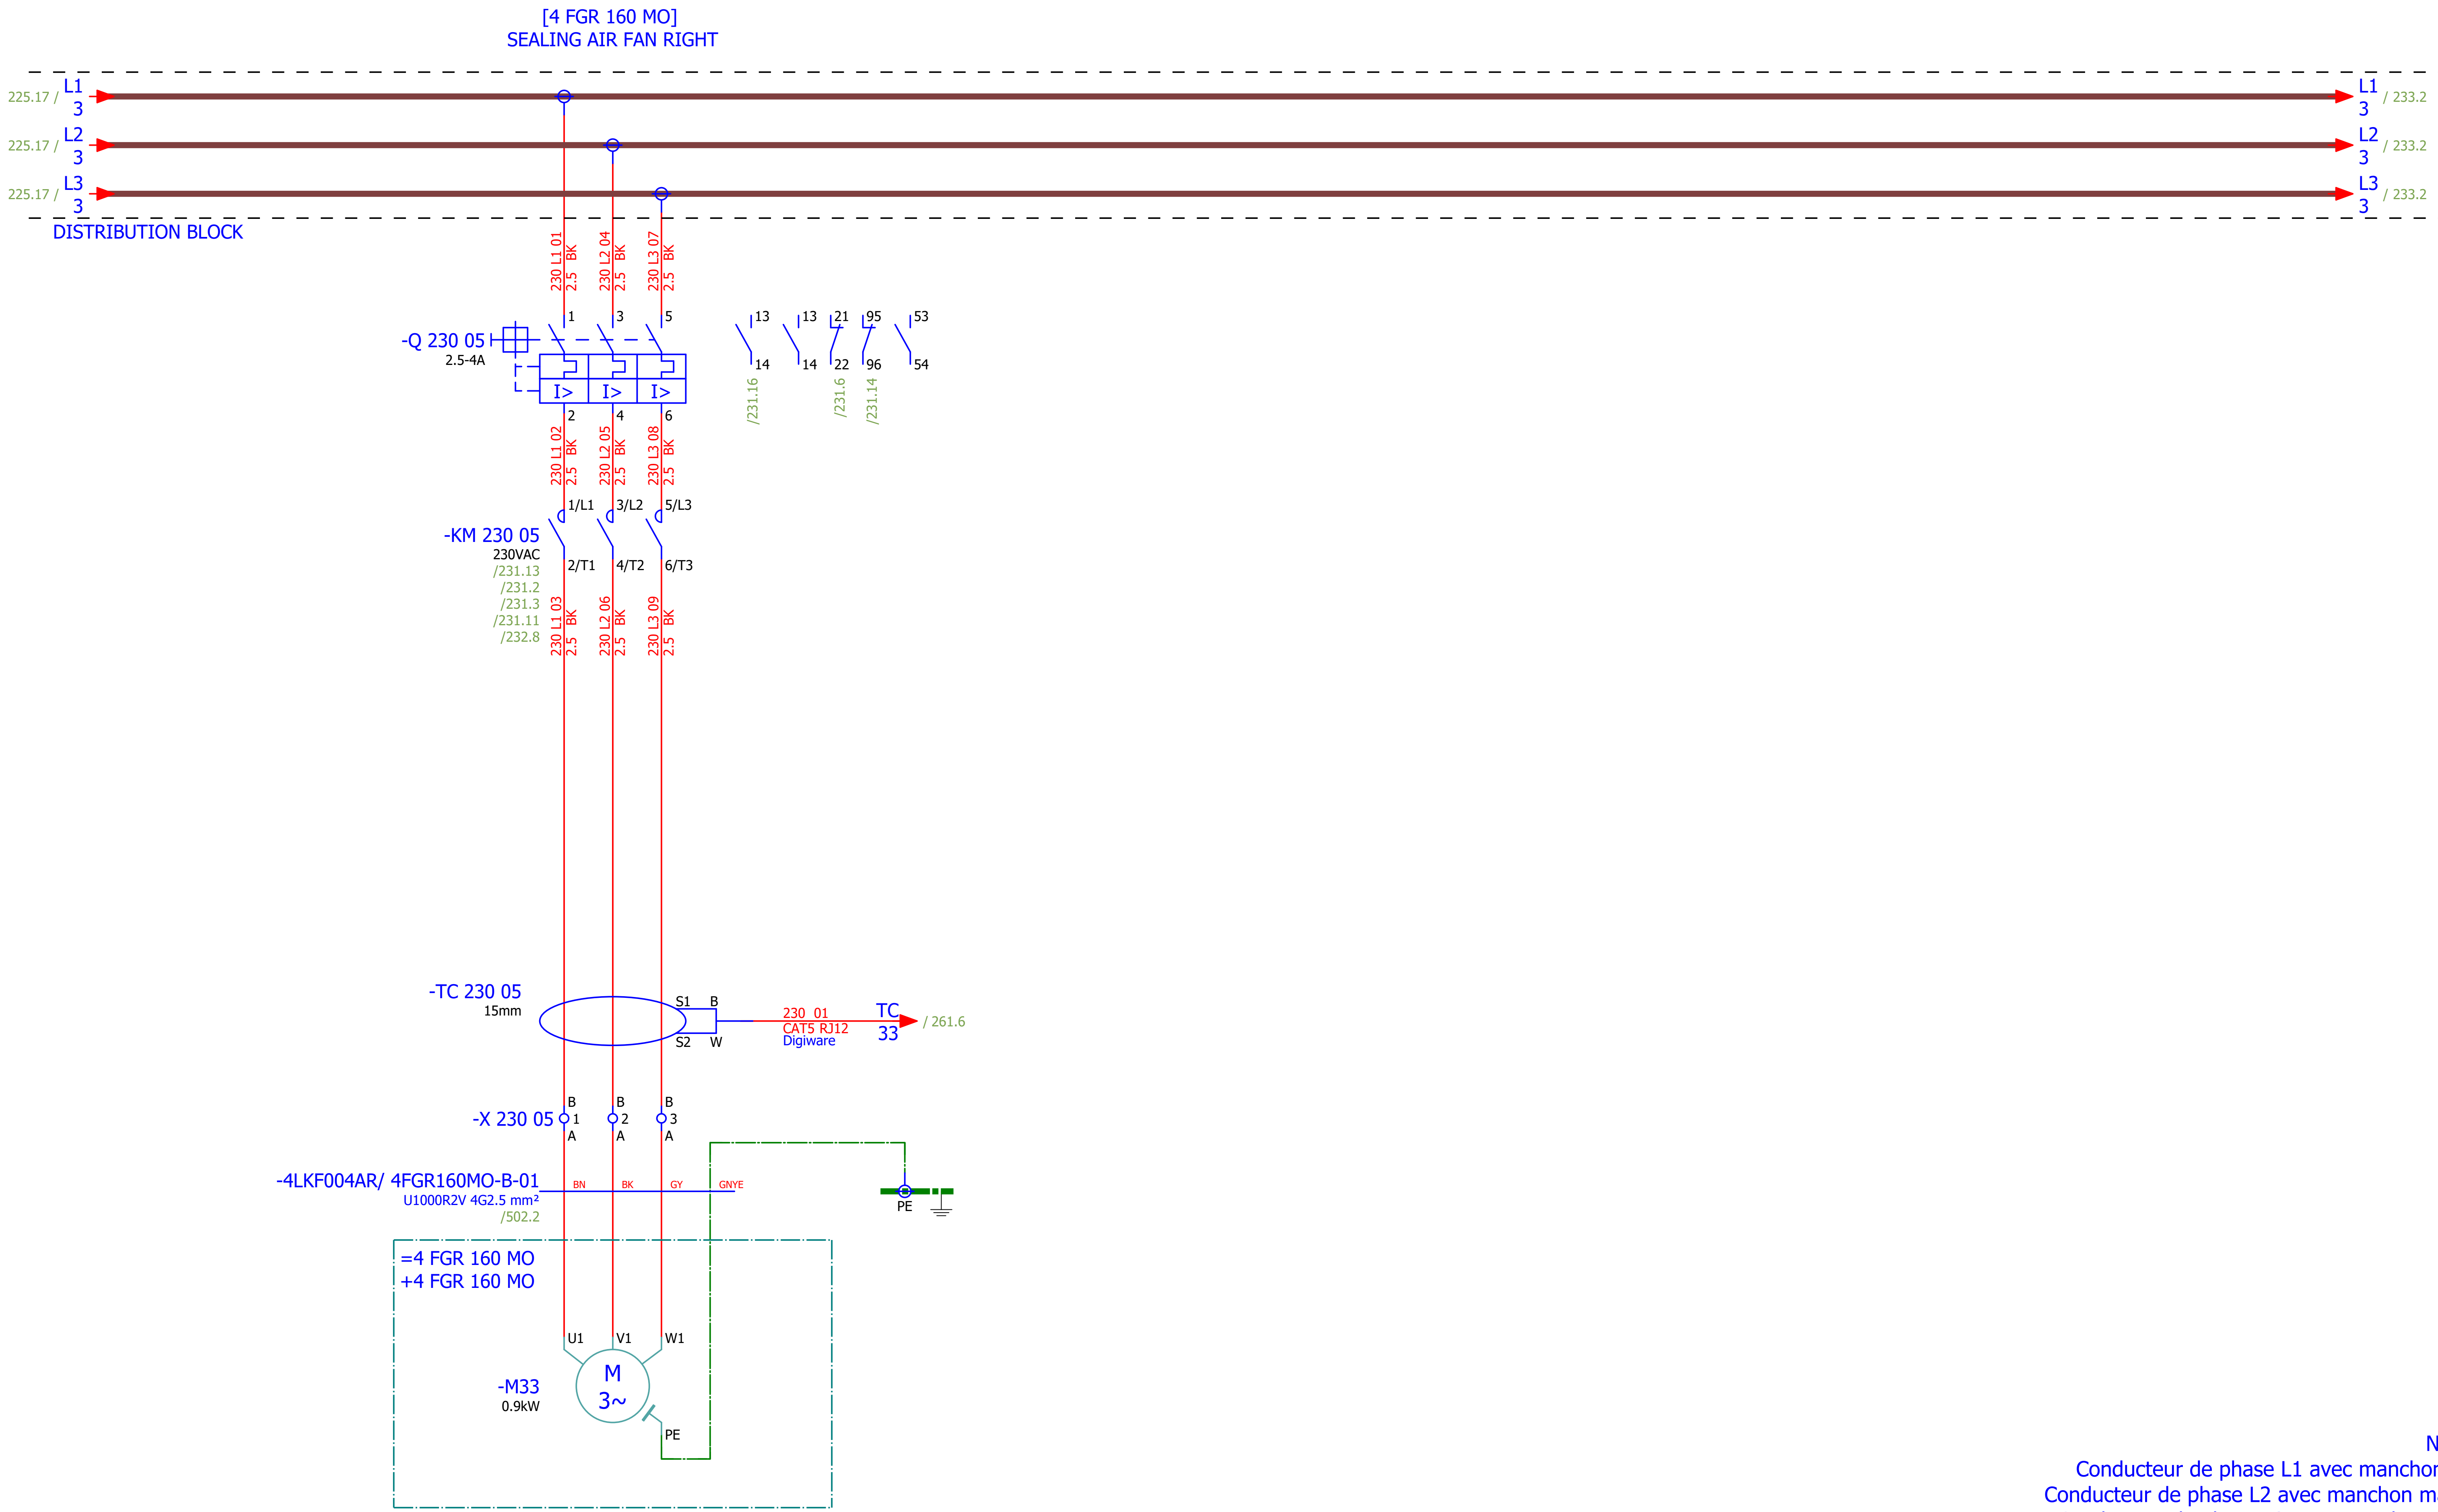

NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 4	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Luka Božičević									#D
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	SEALING AIR FAN RIGHT	Drawing designation:	BRC-4-ATEP0-1870-F	=4LKF001AR	Sheet: 230
Format:	A3								+4LKF004AR	Next: 231

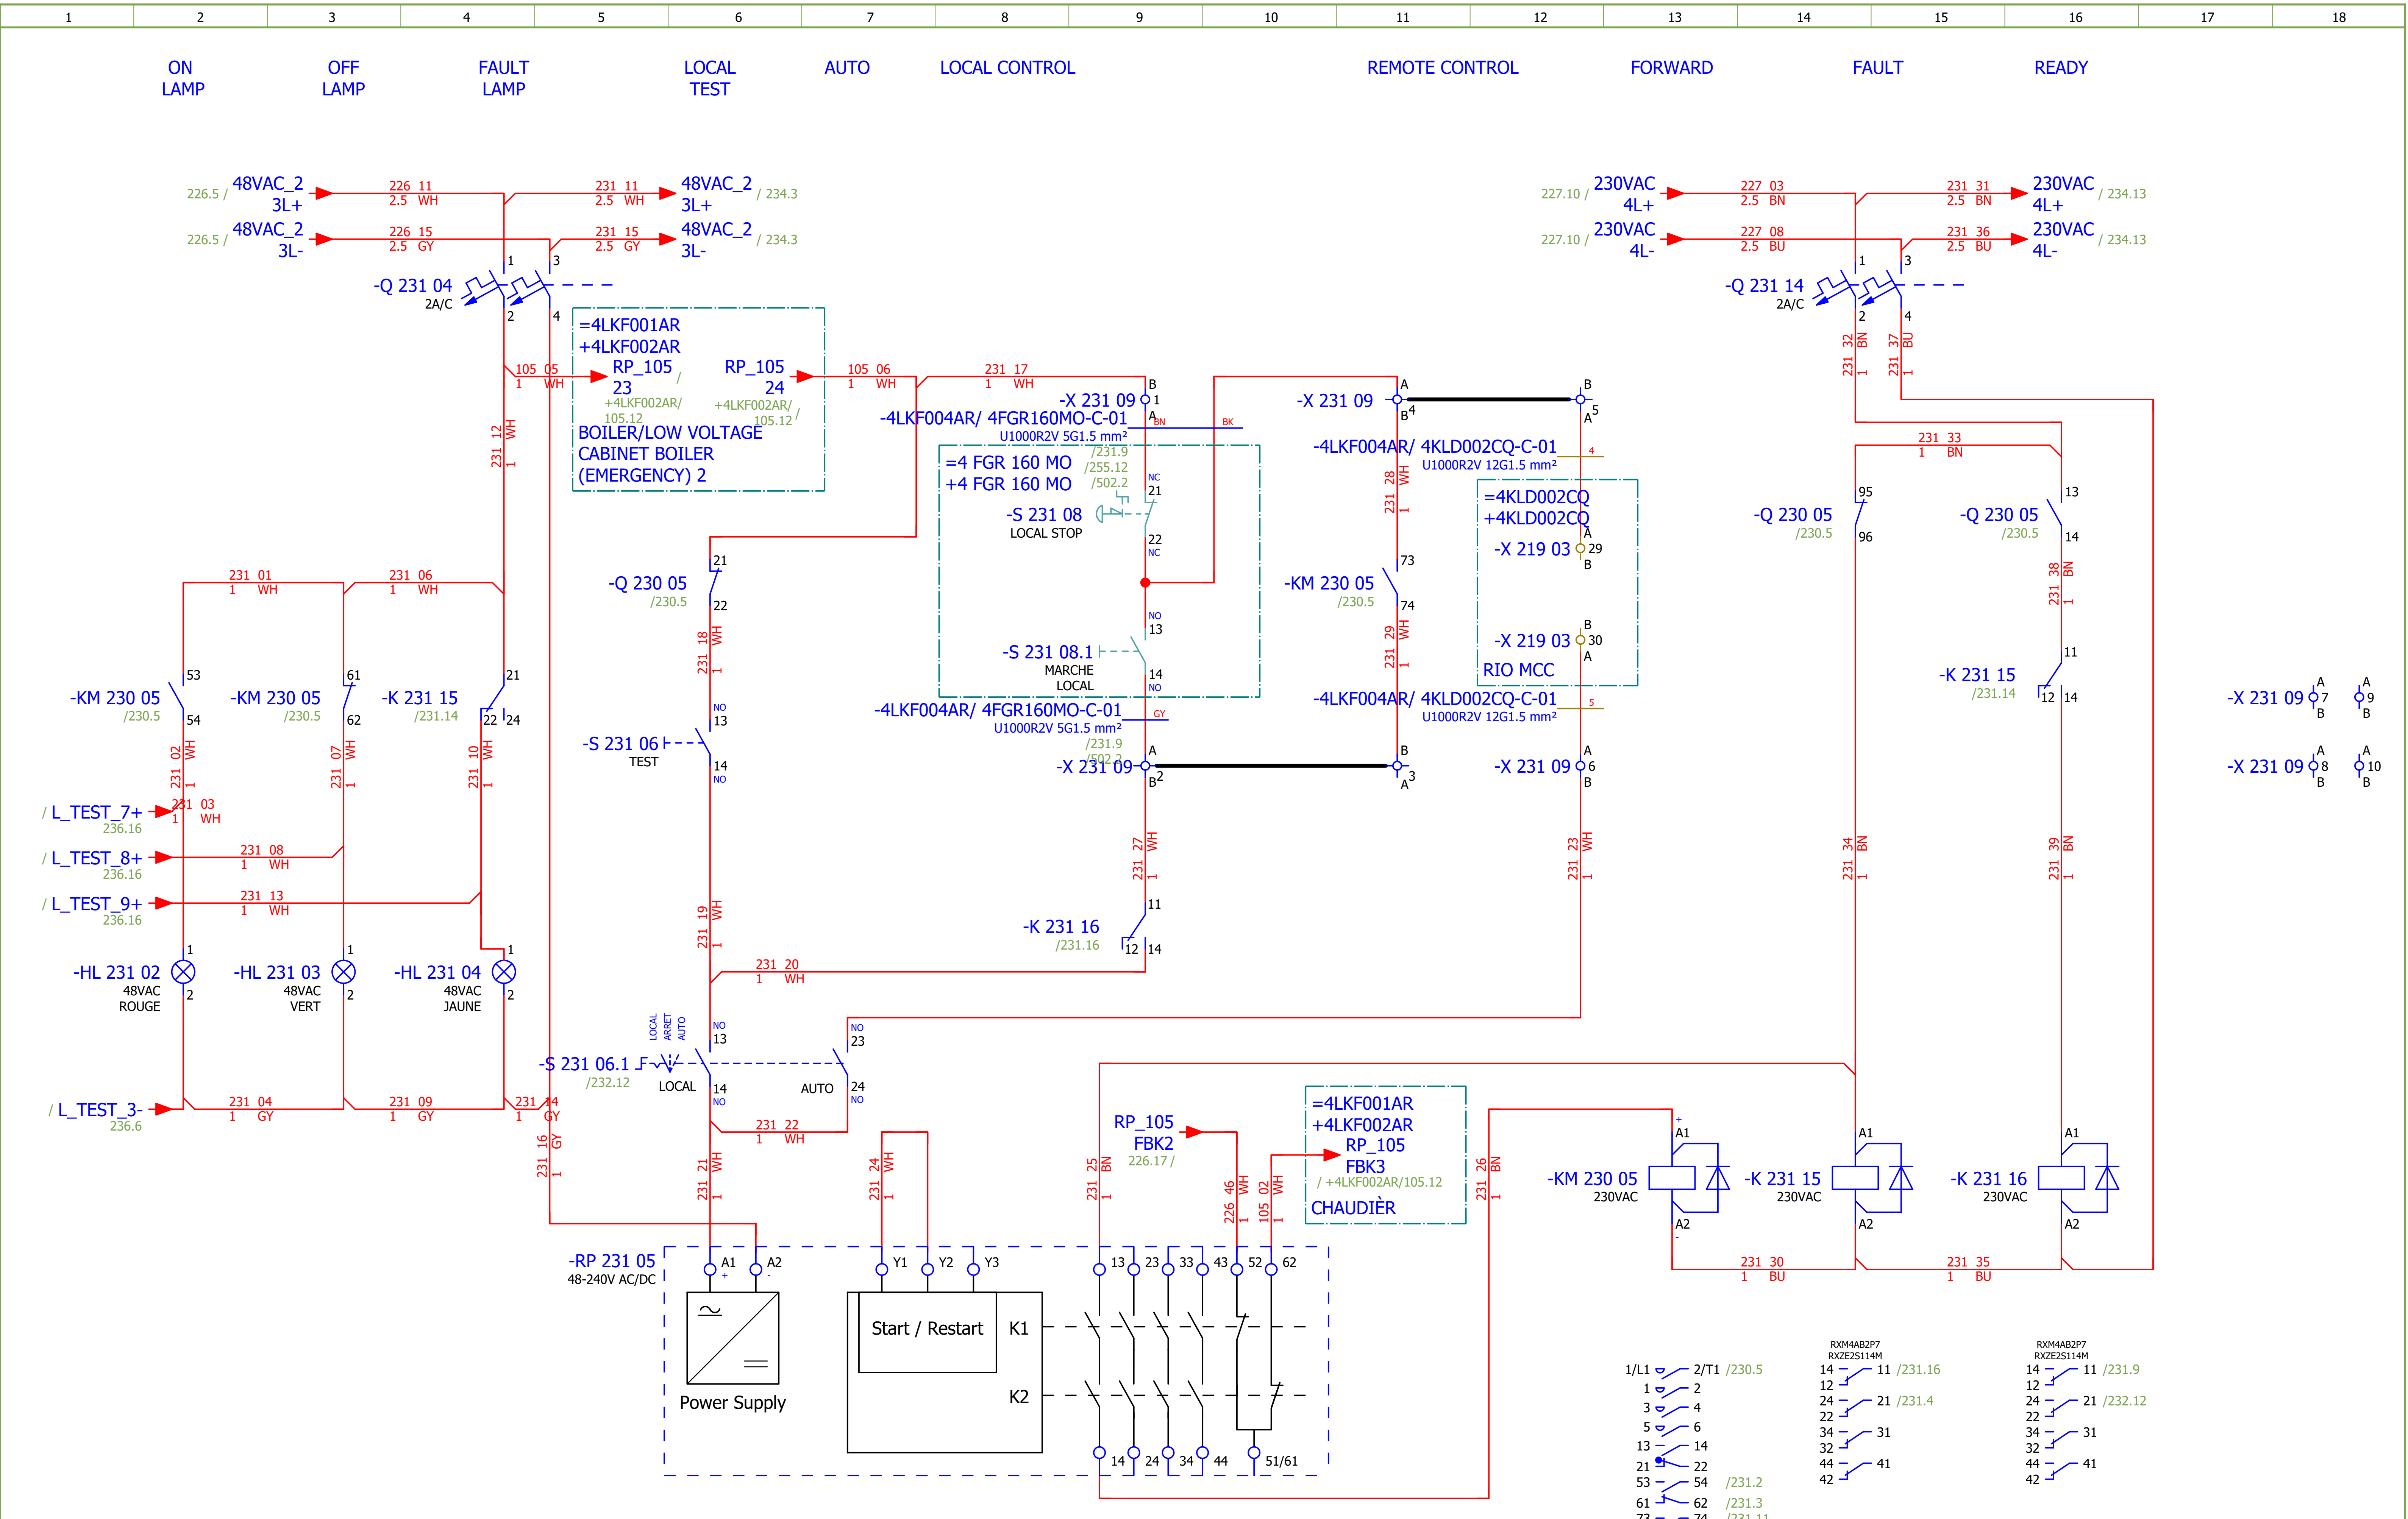

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 4	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SEALING AIR FAN RIGHT - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 231
Format:	A3								+4LKF004AR	Next: 232

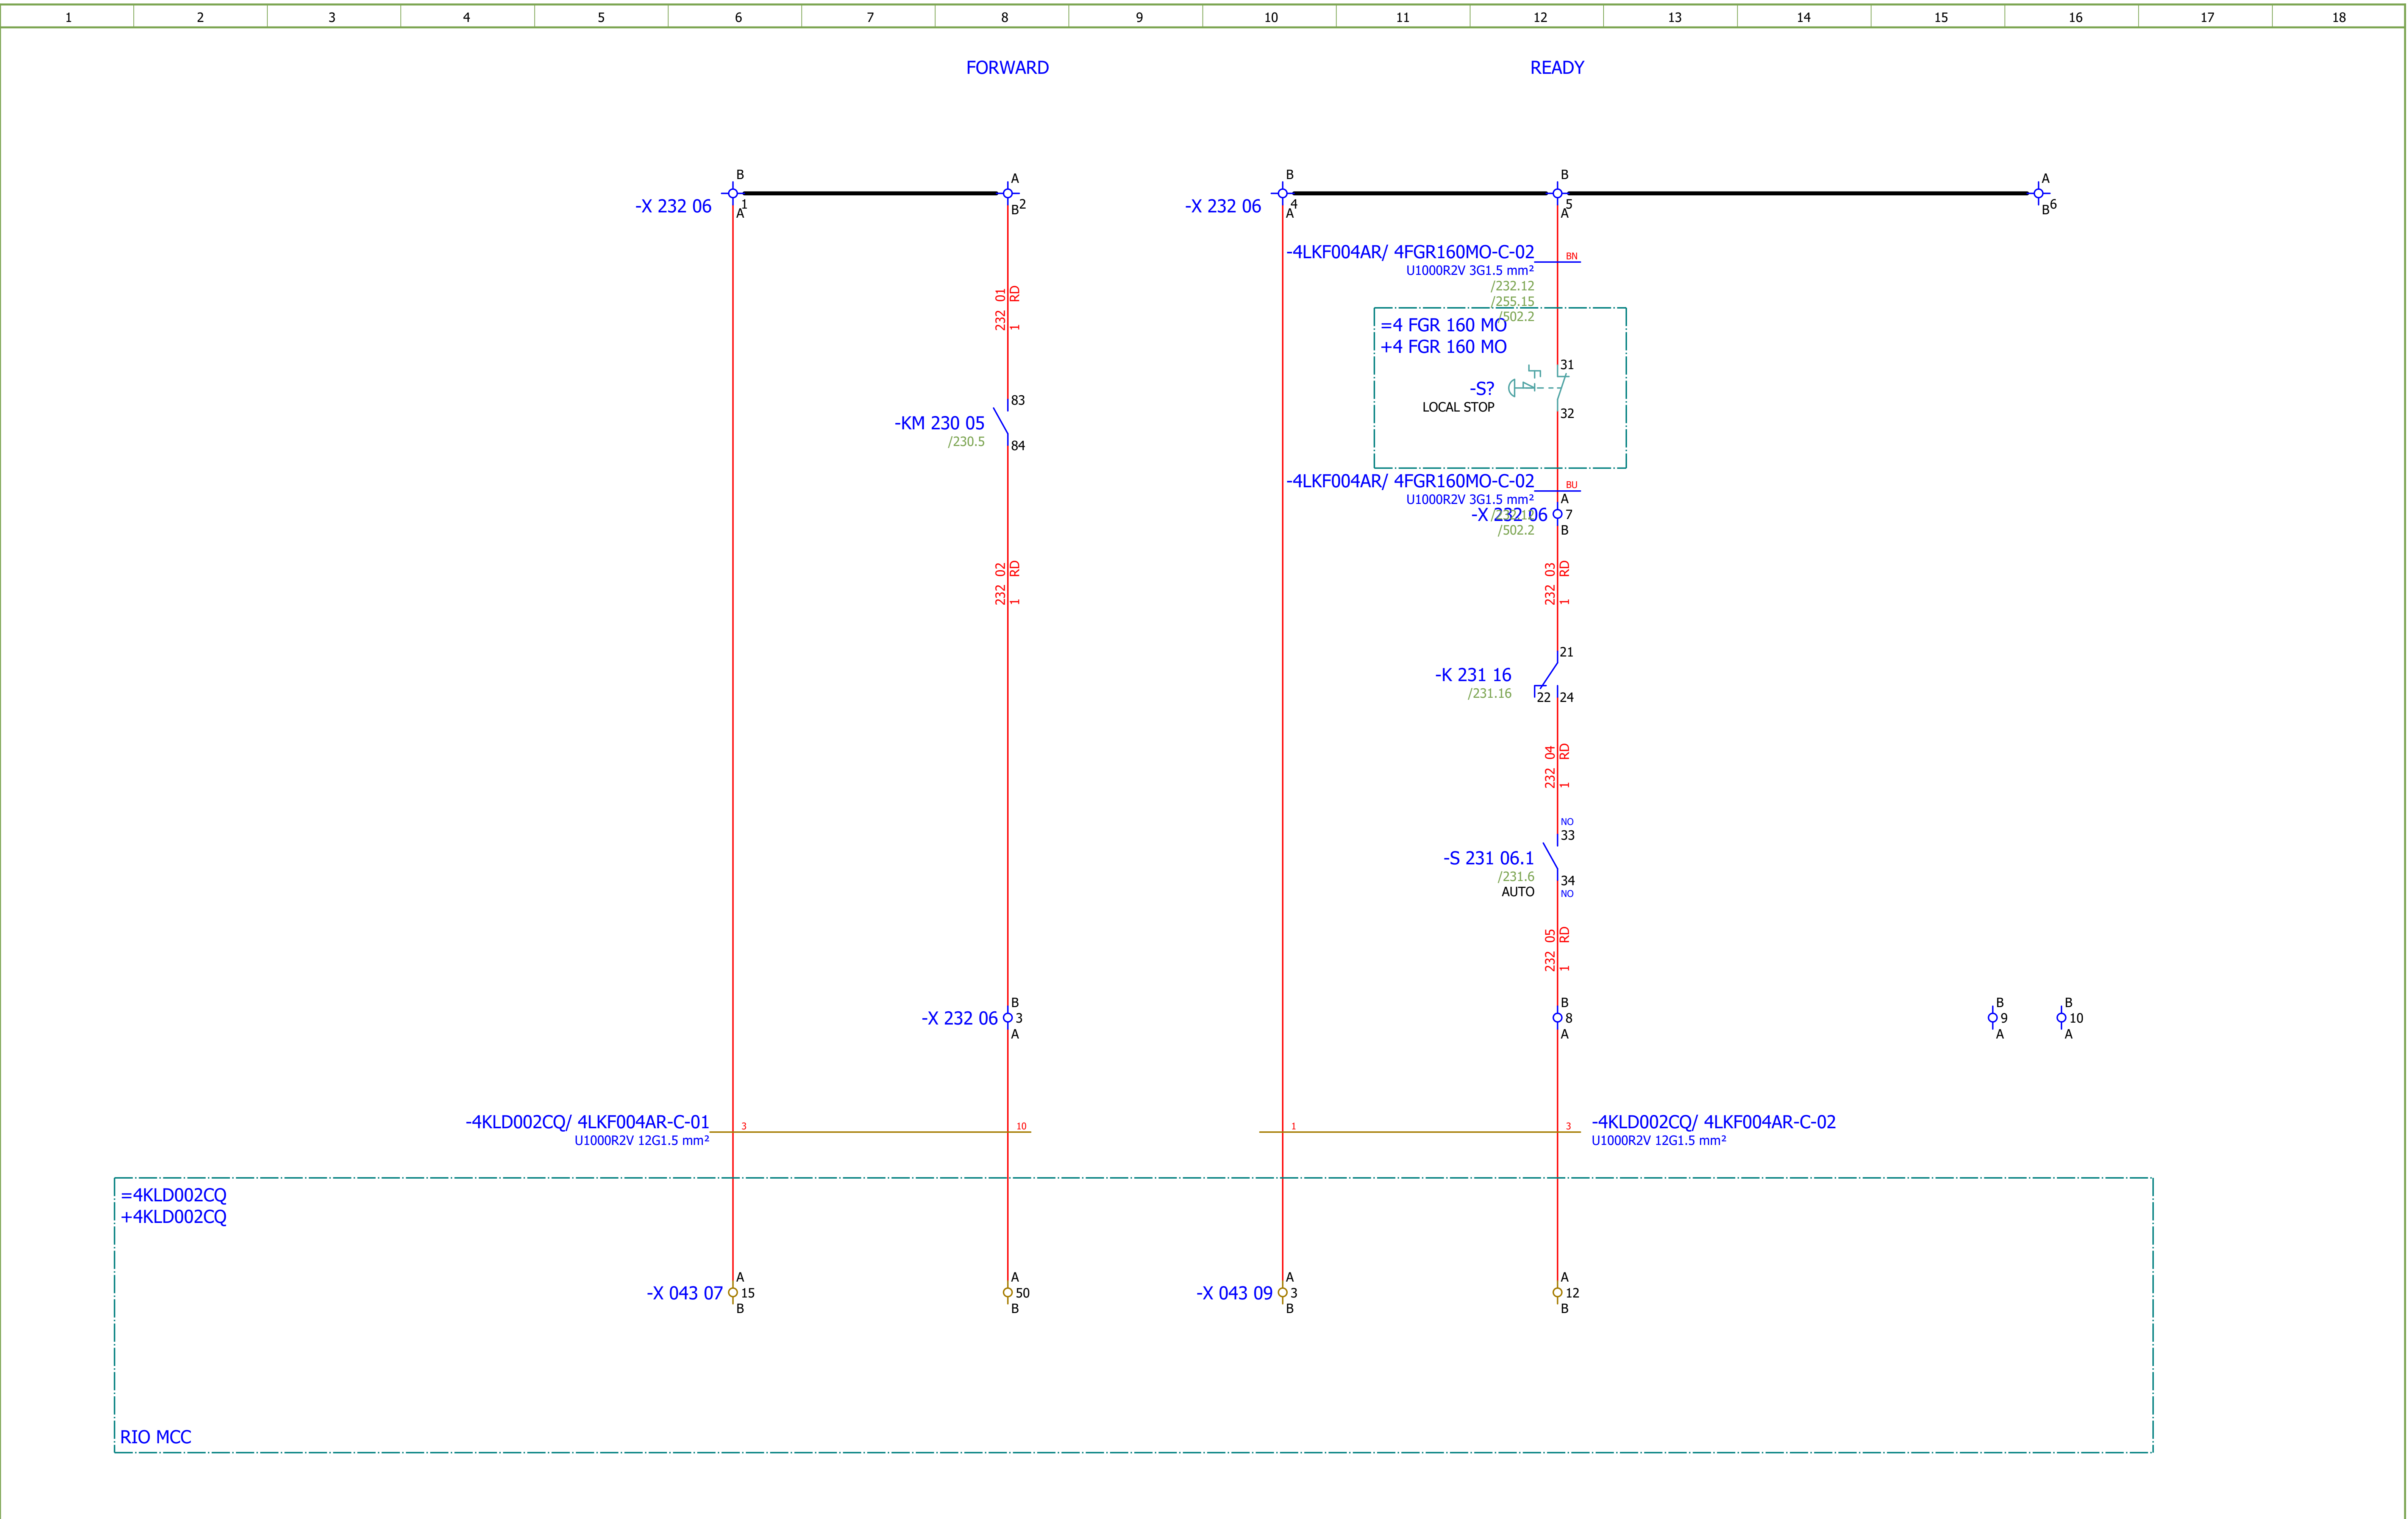

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 4	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Luka Božičević										
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	SEALING AIR FAN RIGHT - SIGNALIZATION	Drawing designation: BRC-4-ATEP0-1870-F	=4LKF001AR	Sheet: 232
Format:	A3							+4LKF004AR	Next: 233

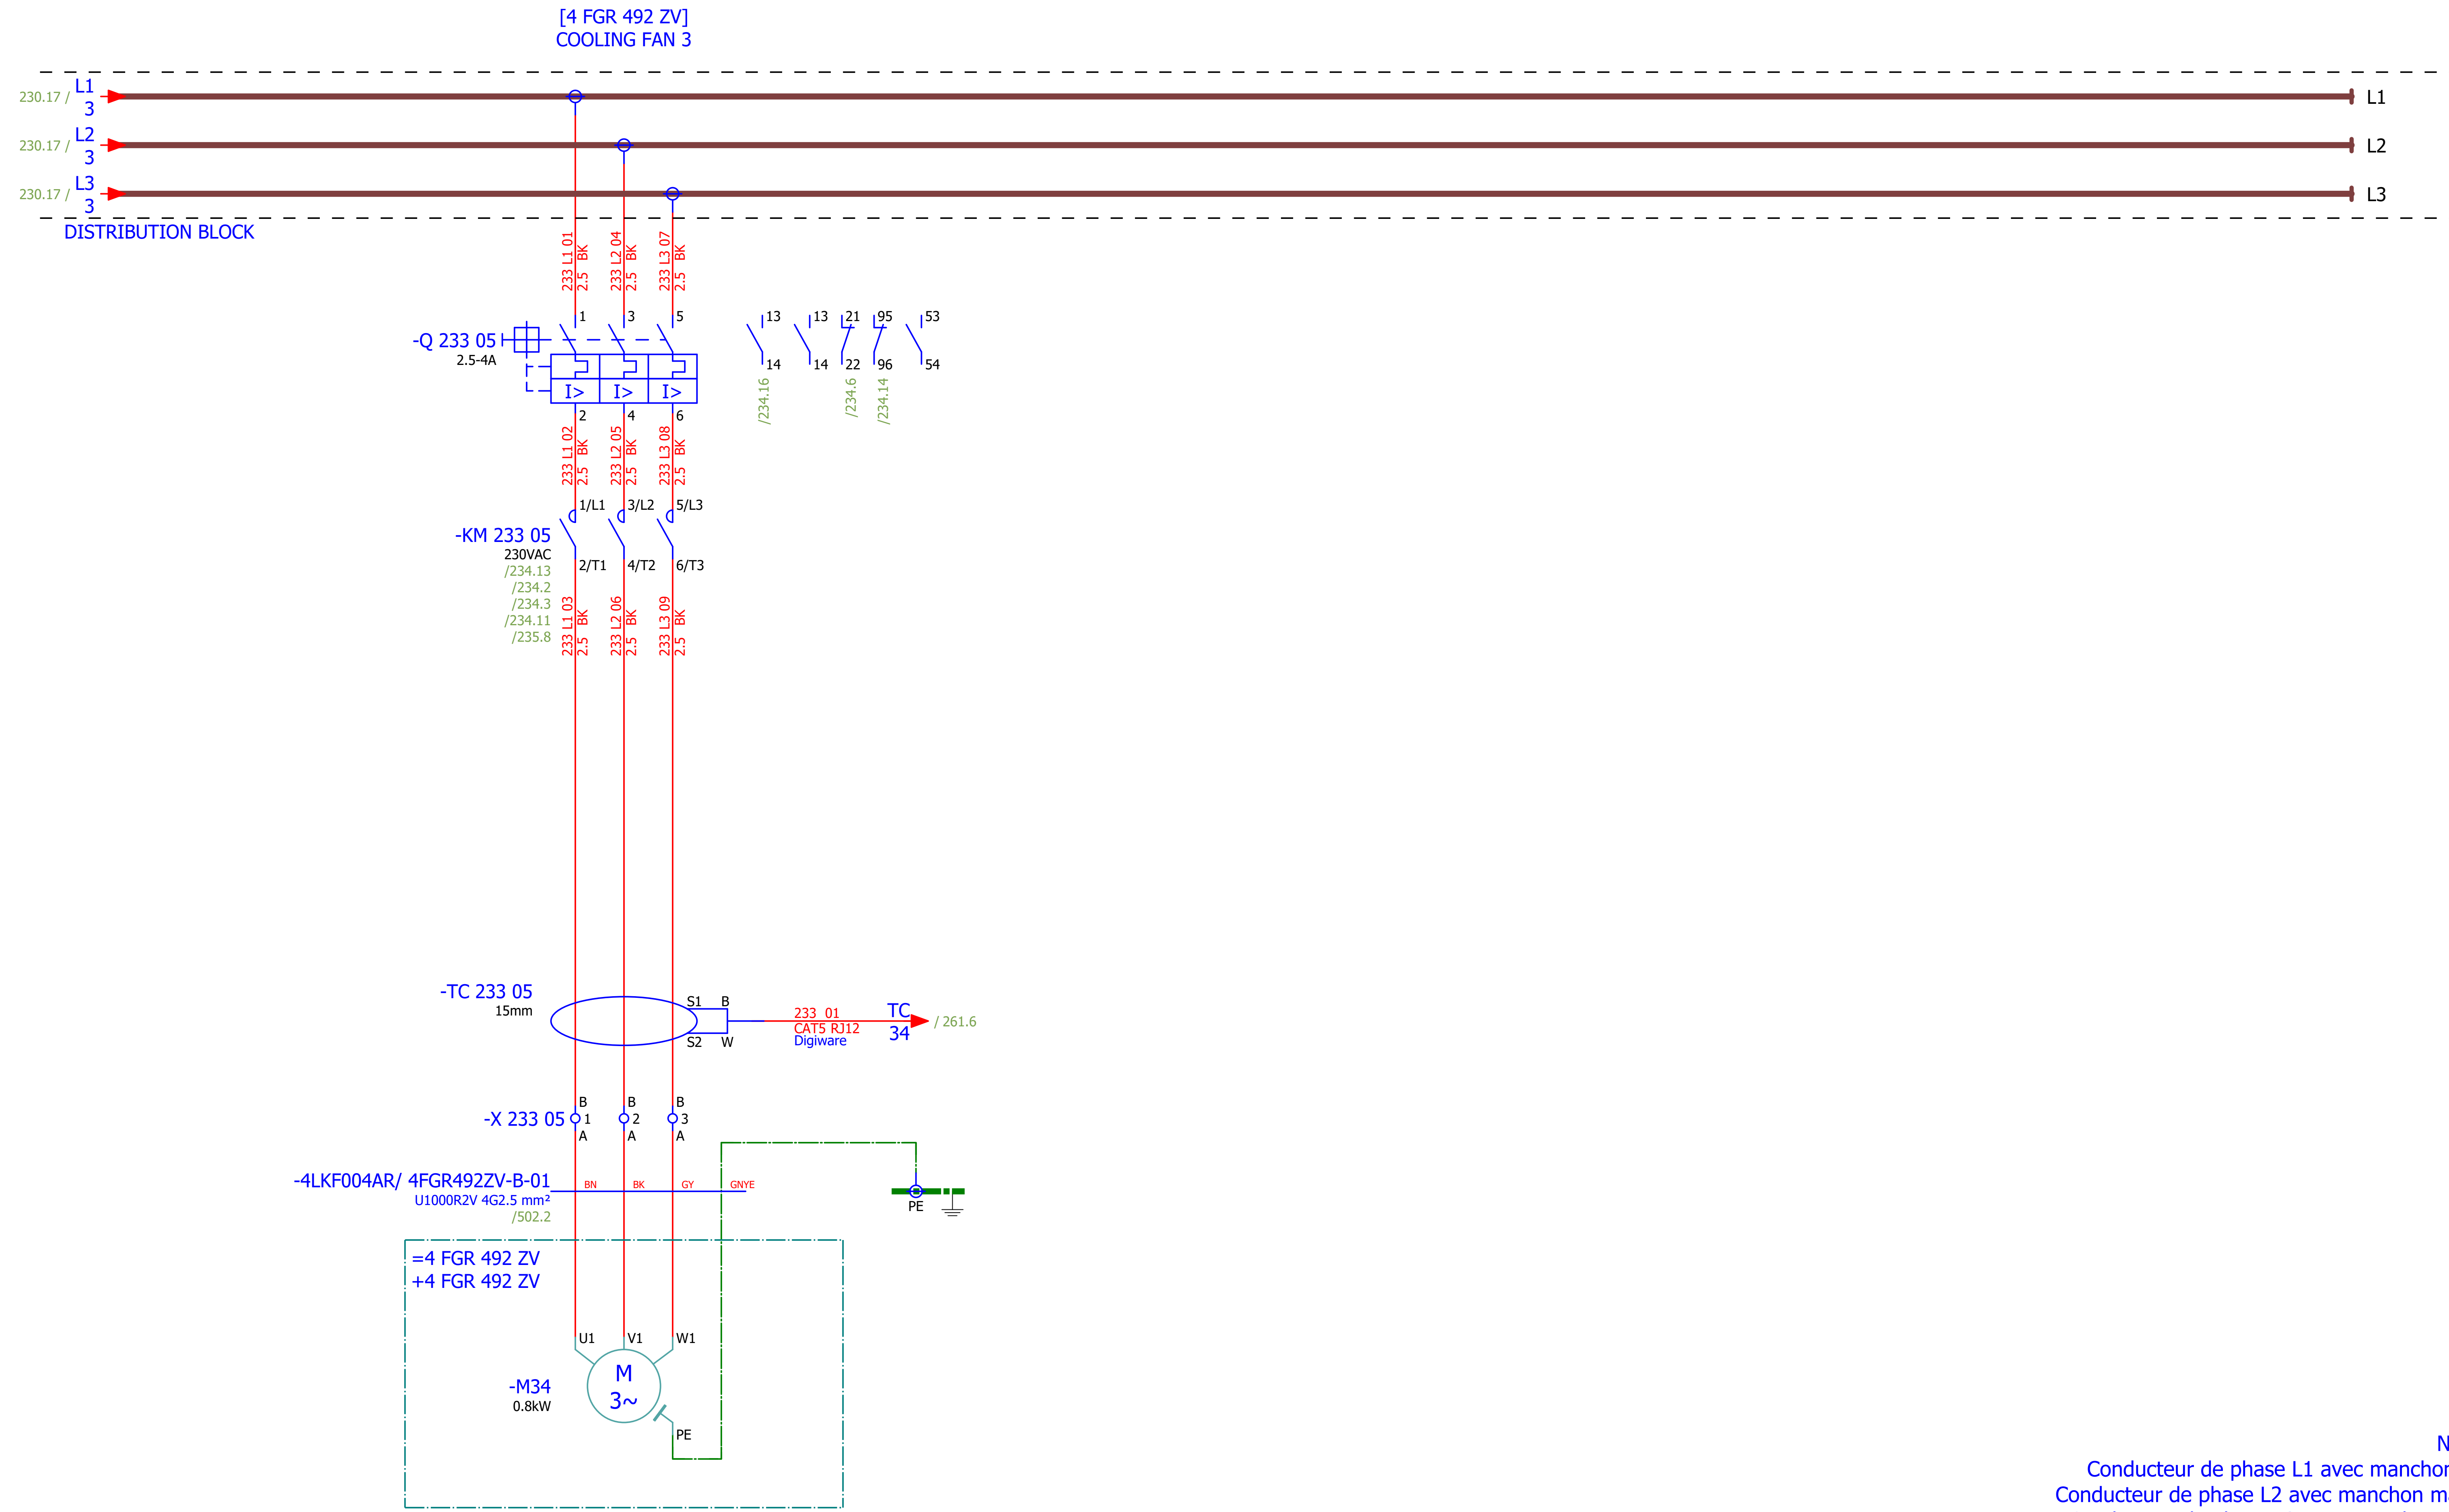

NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 4	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Luka Božičević								#D
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING FAN 3	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 233
Format:	A3							+4LKF004AR	Next: 234

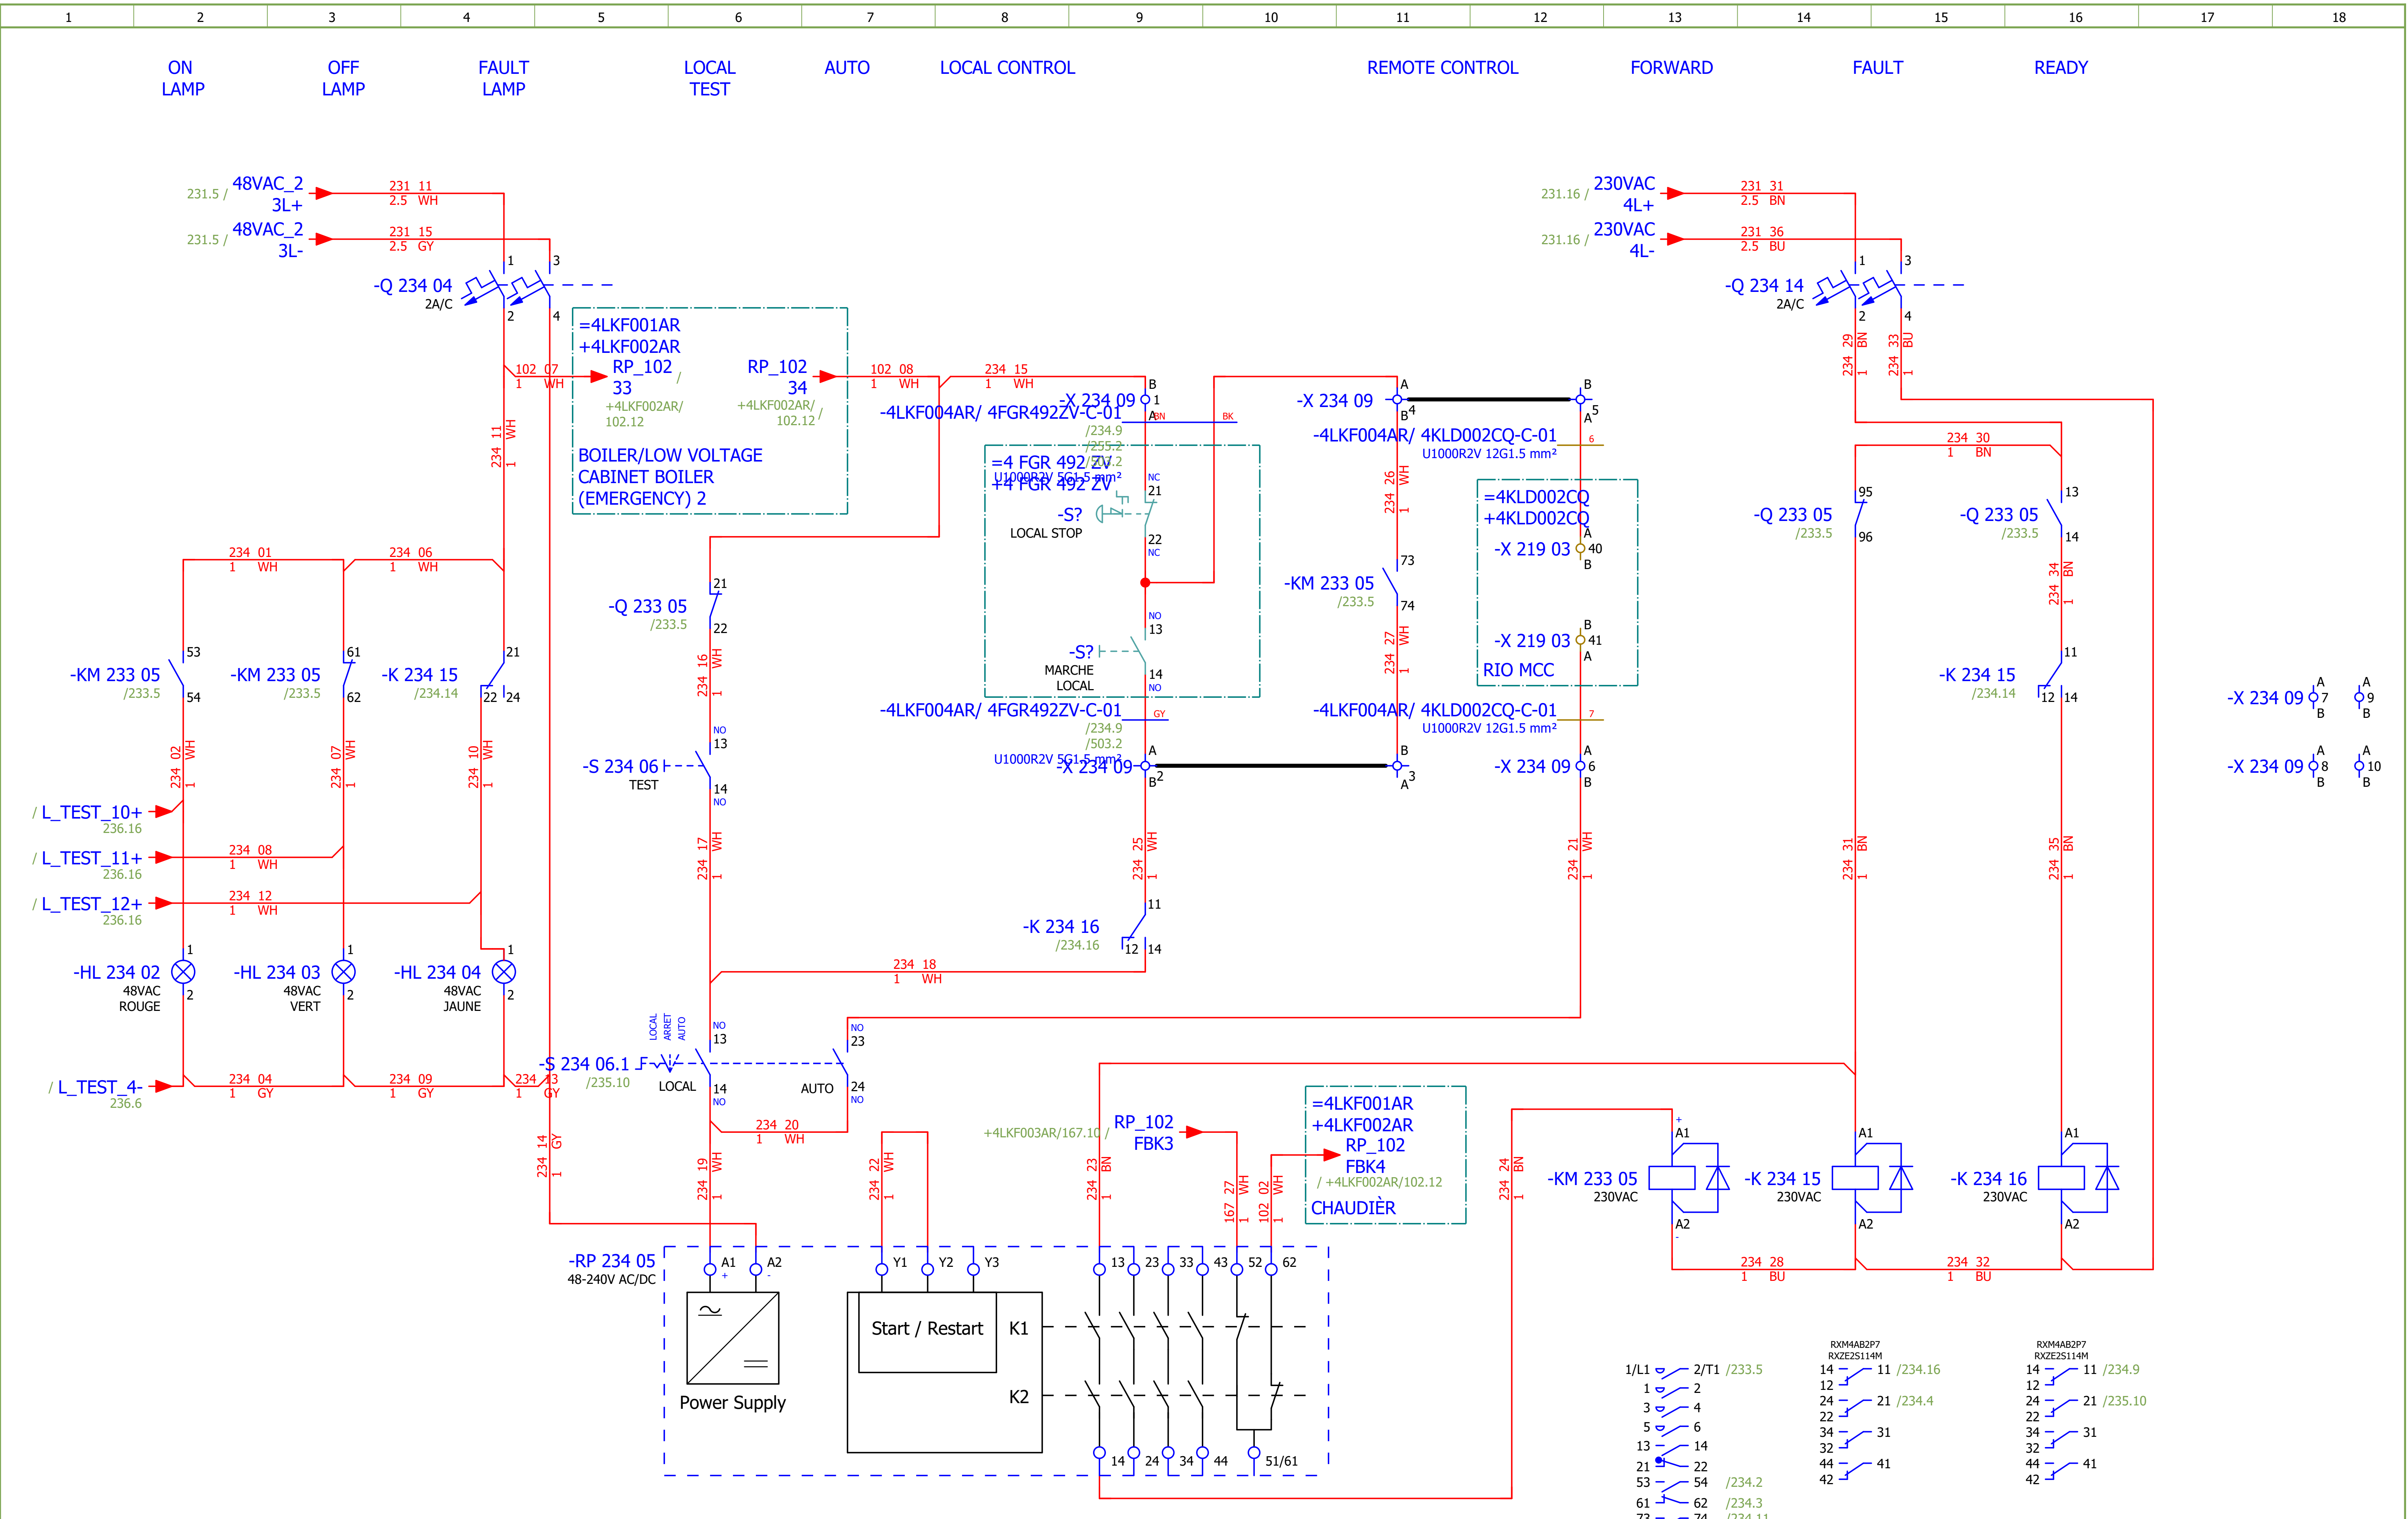

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 4	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Luka Božičević										
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	COOLING FAN 3 - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 234
Format:	A3									+4LKF004AR	Next: 235

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

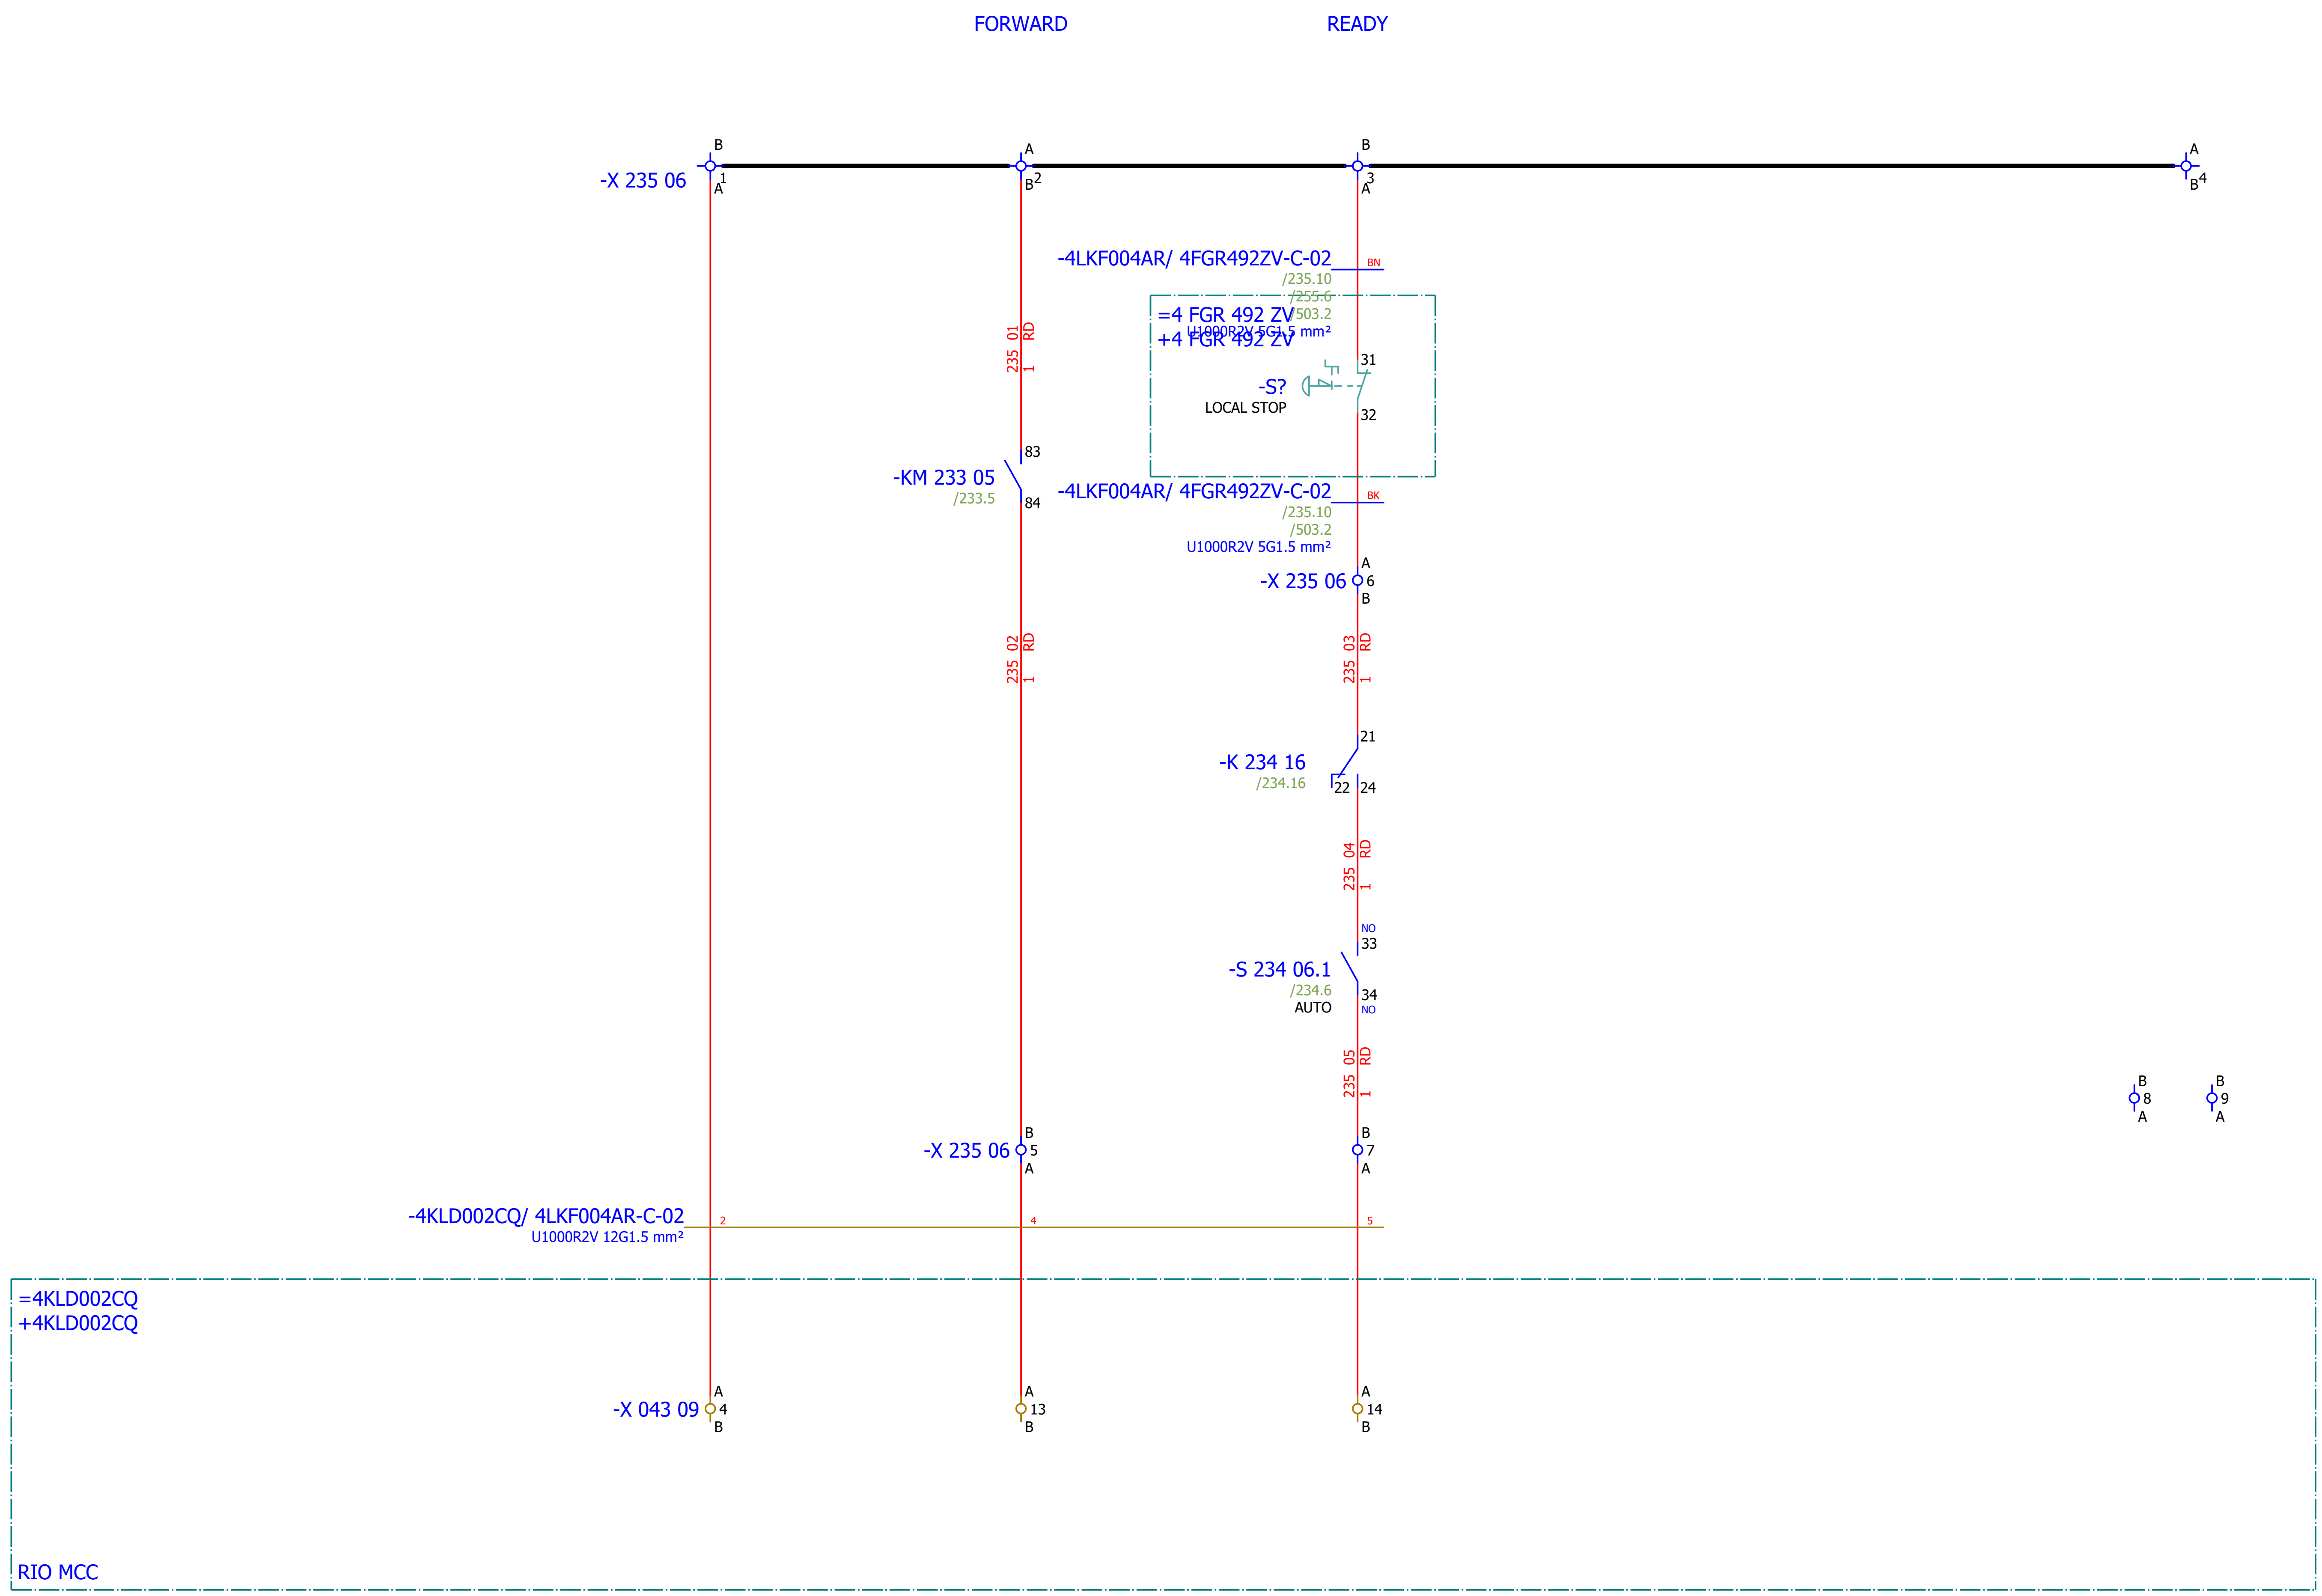

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 4	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING FAN 3 - SIGNALISATION	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 235
Format:	A3								+4LKF004AR	Next: 236

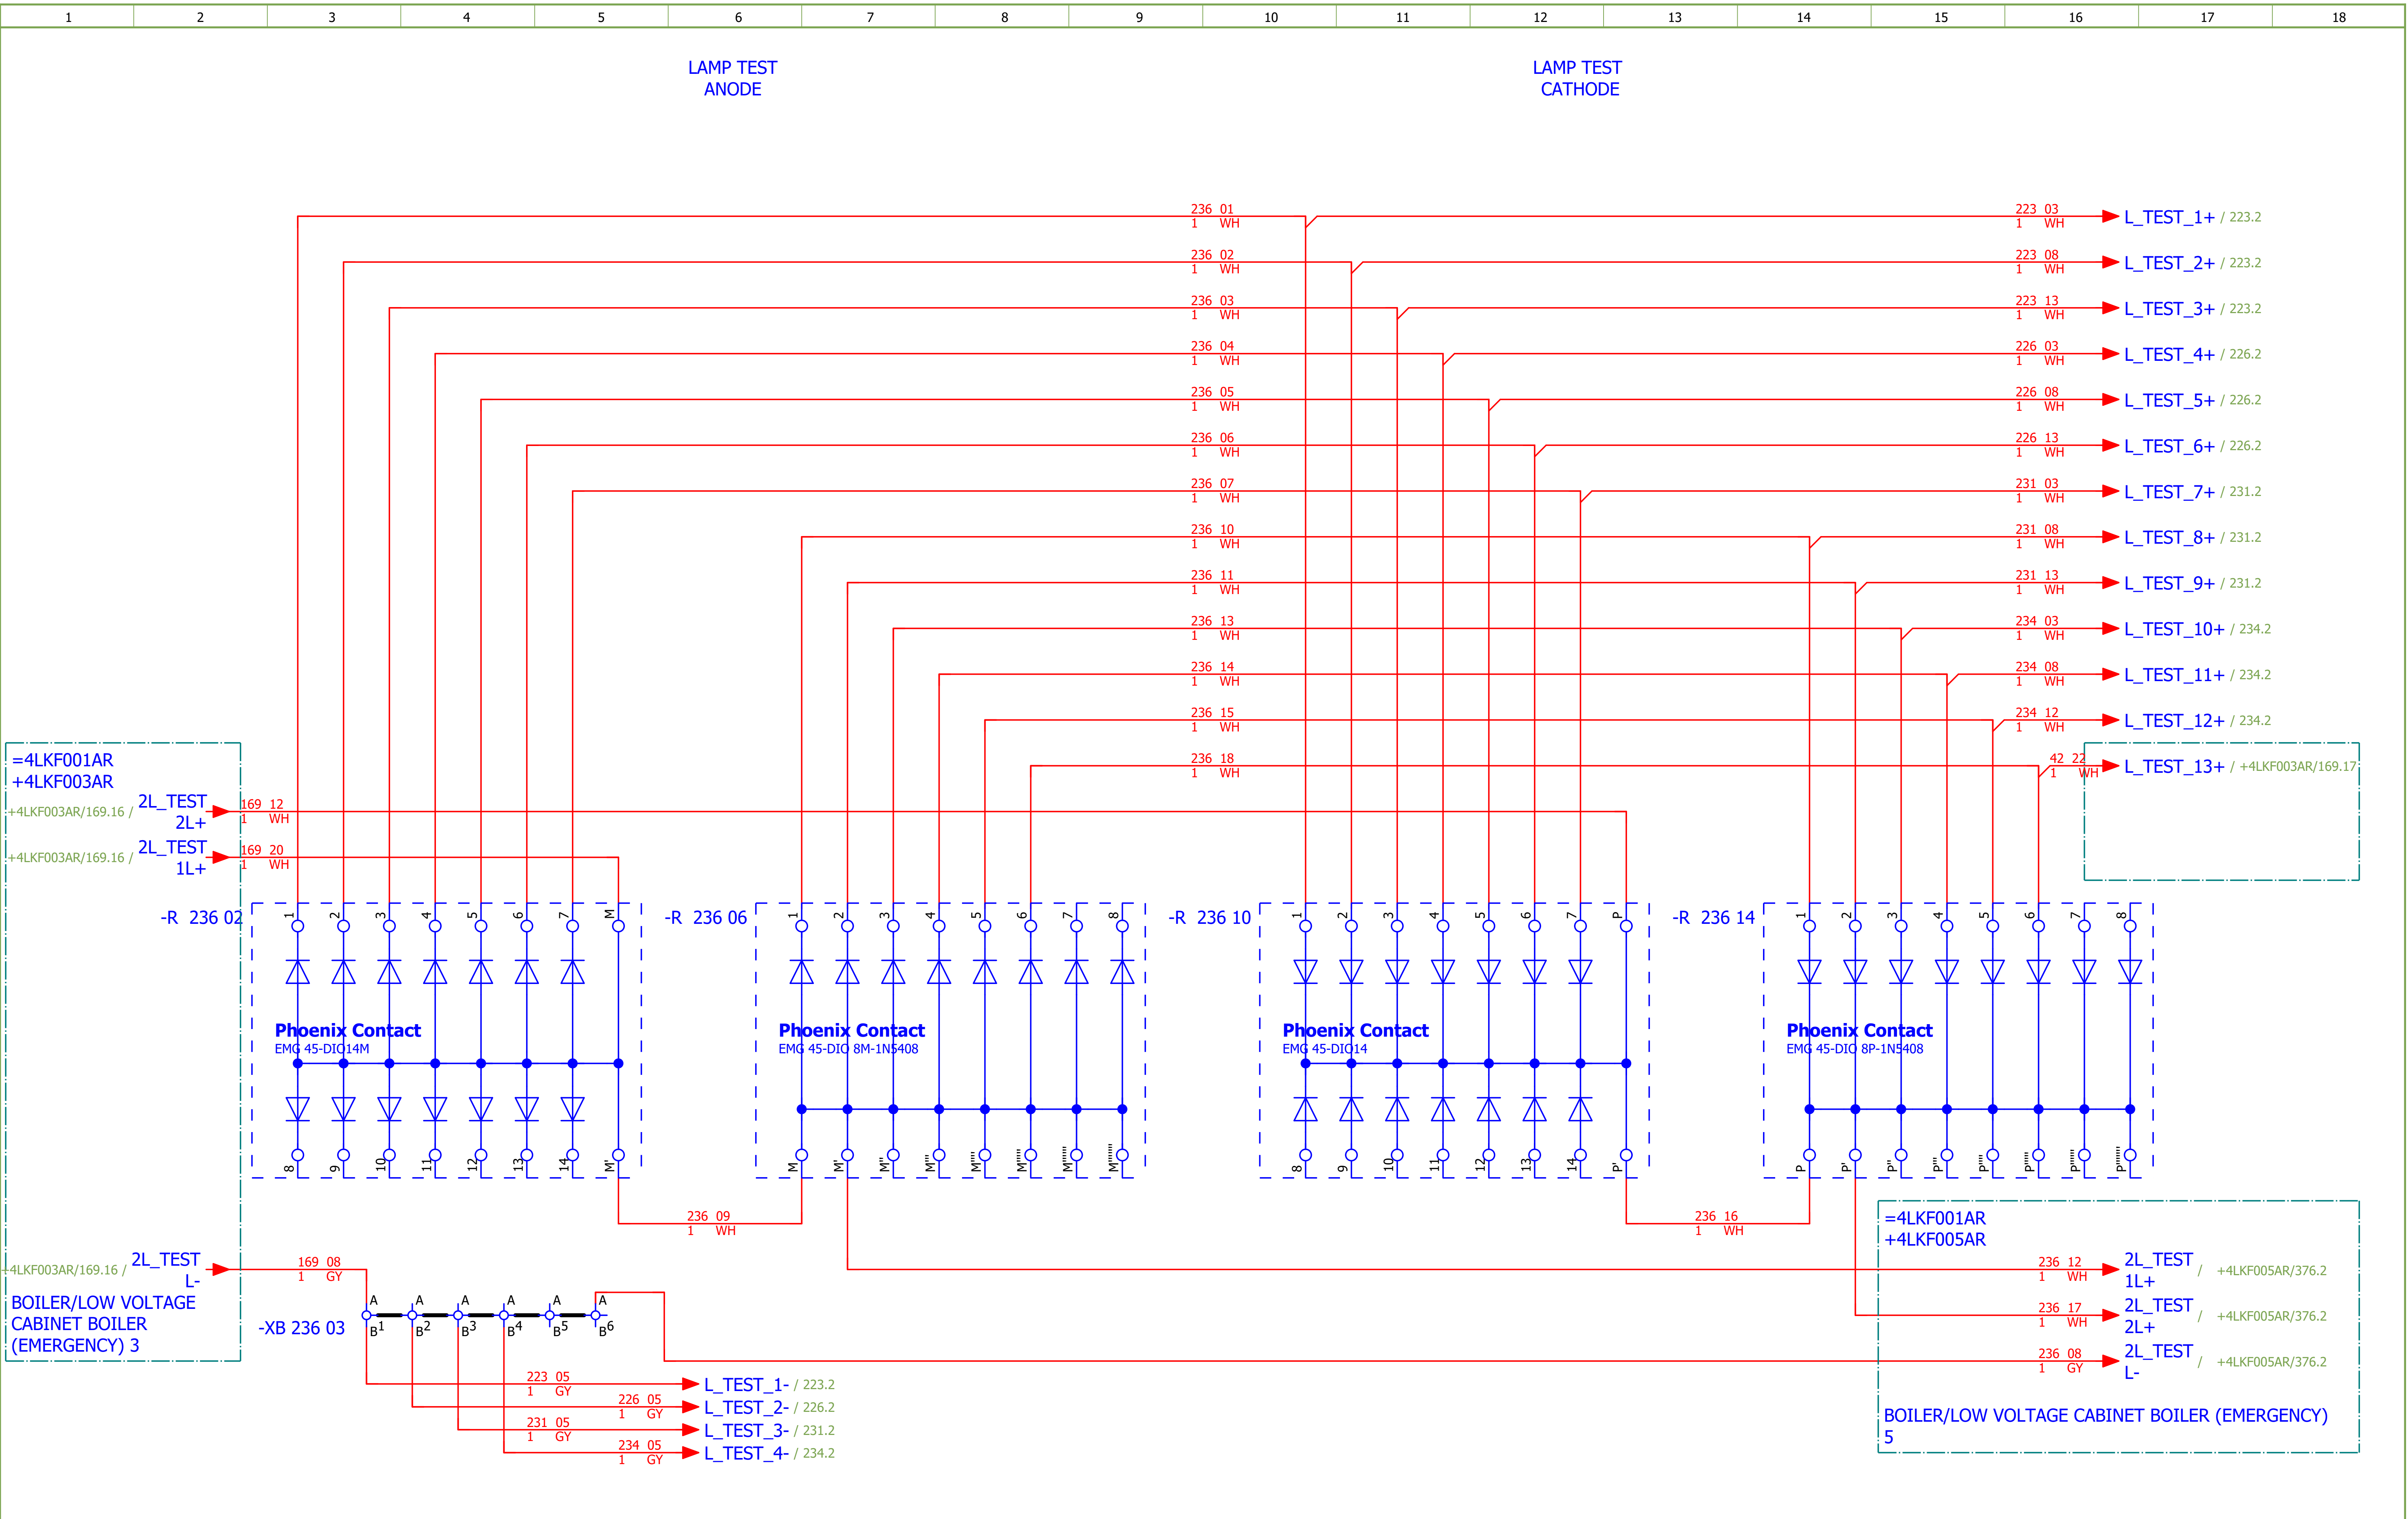

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 4	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Luka Božičević								#D
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: LAMP TEST	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 236
Format:	A3							+4LKF004AR	Next: 251

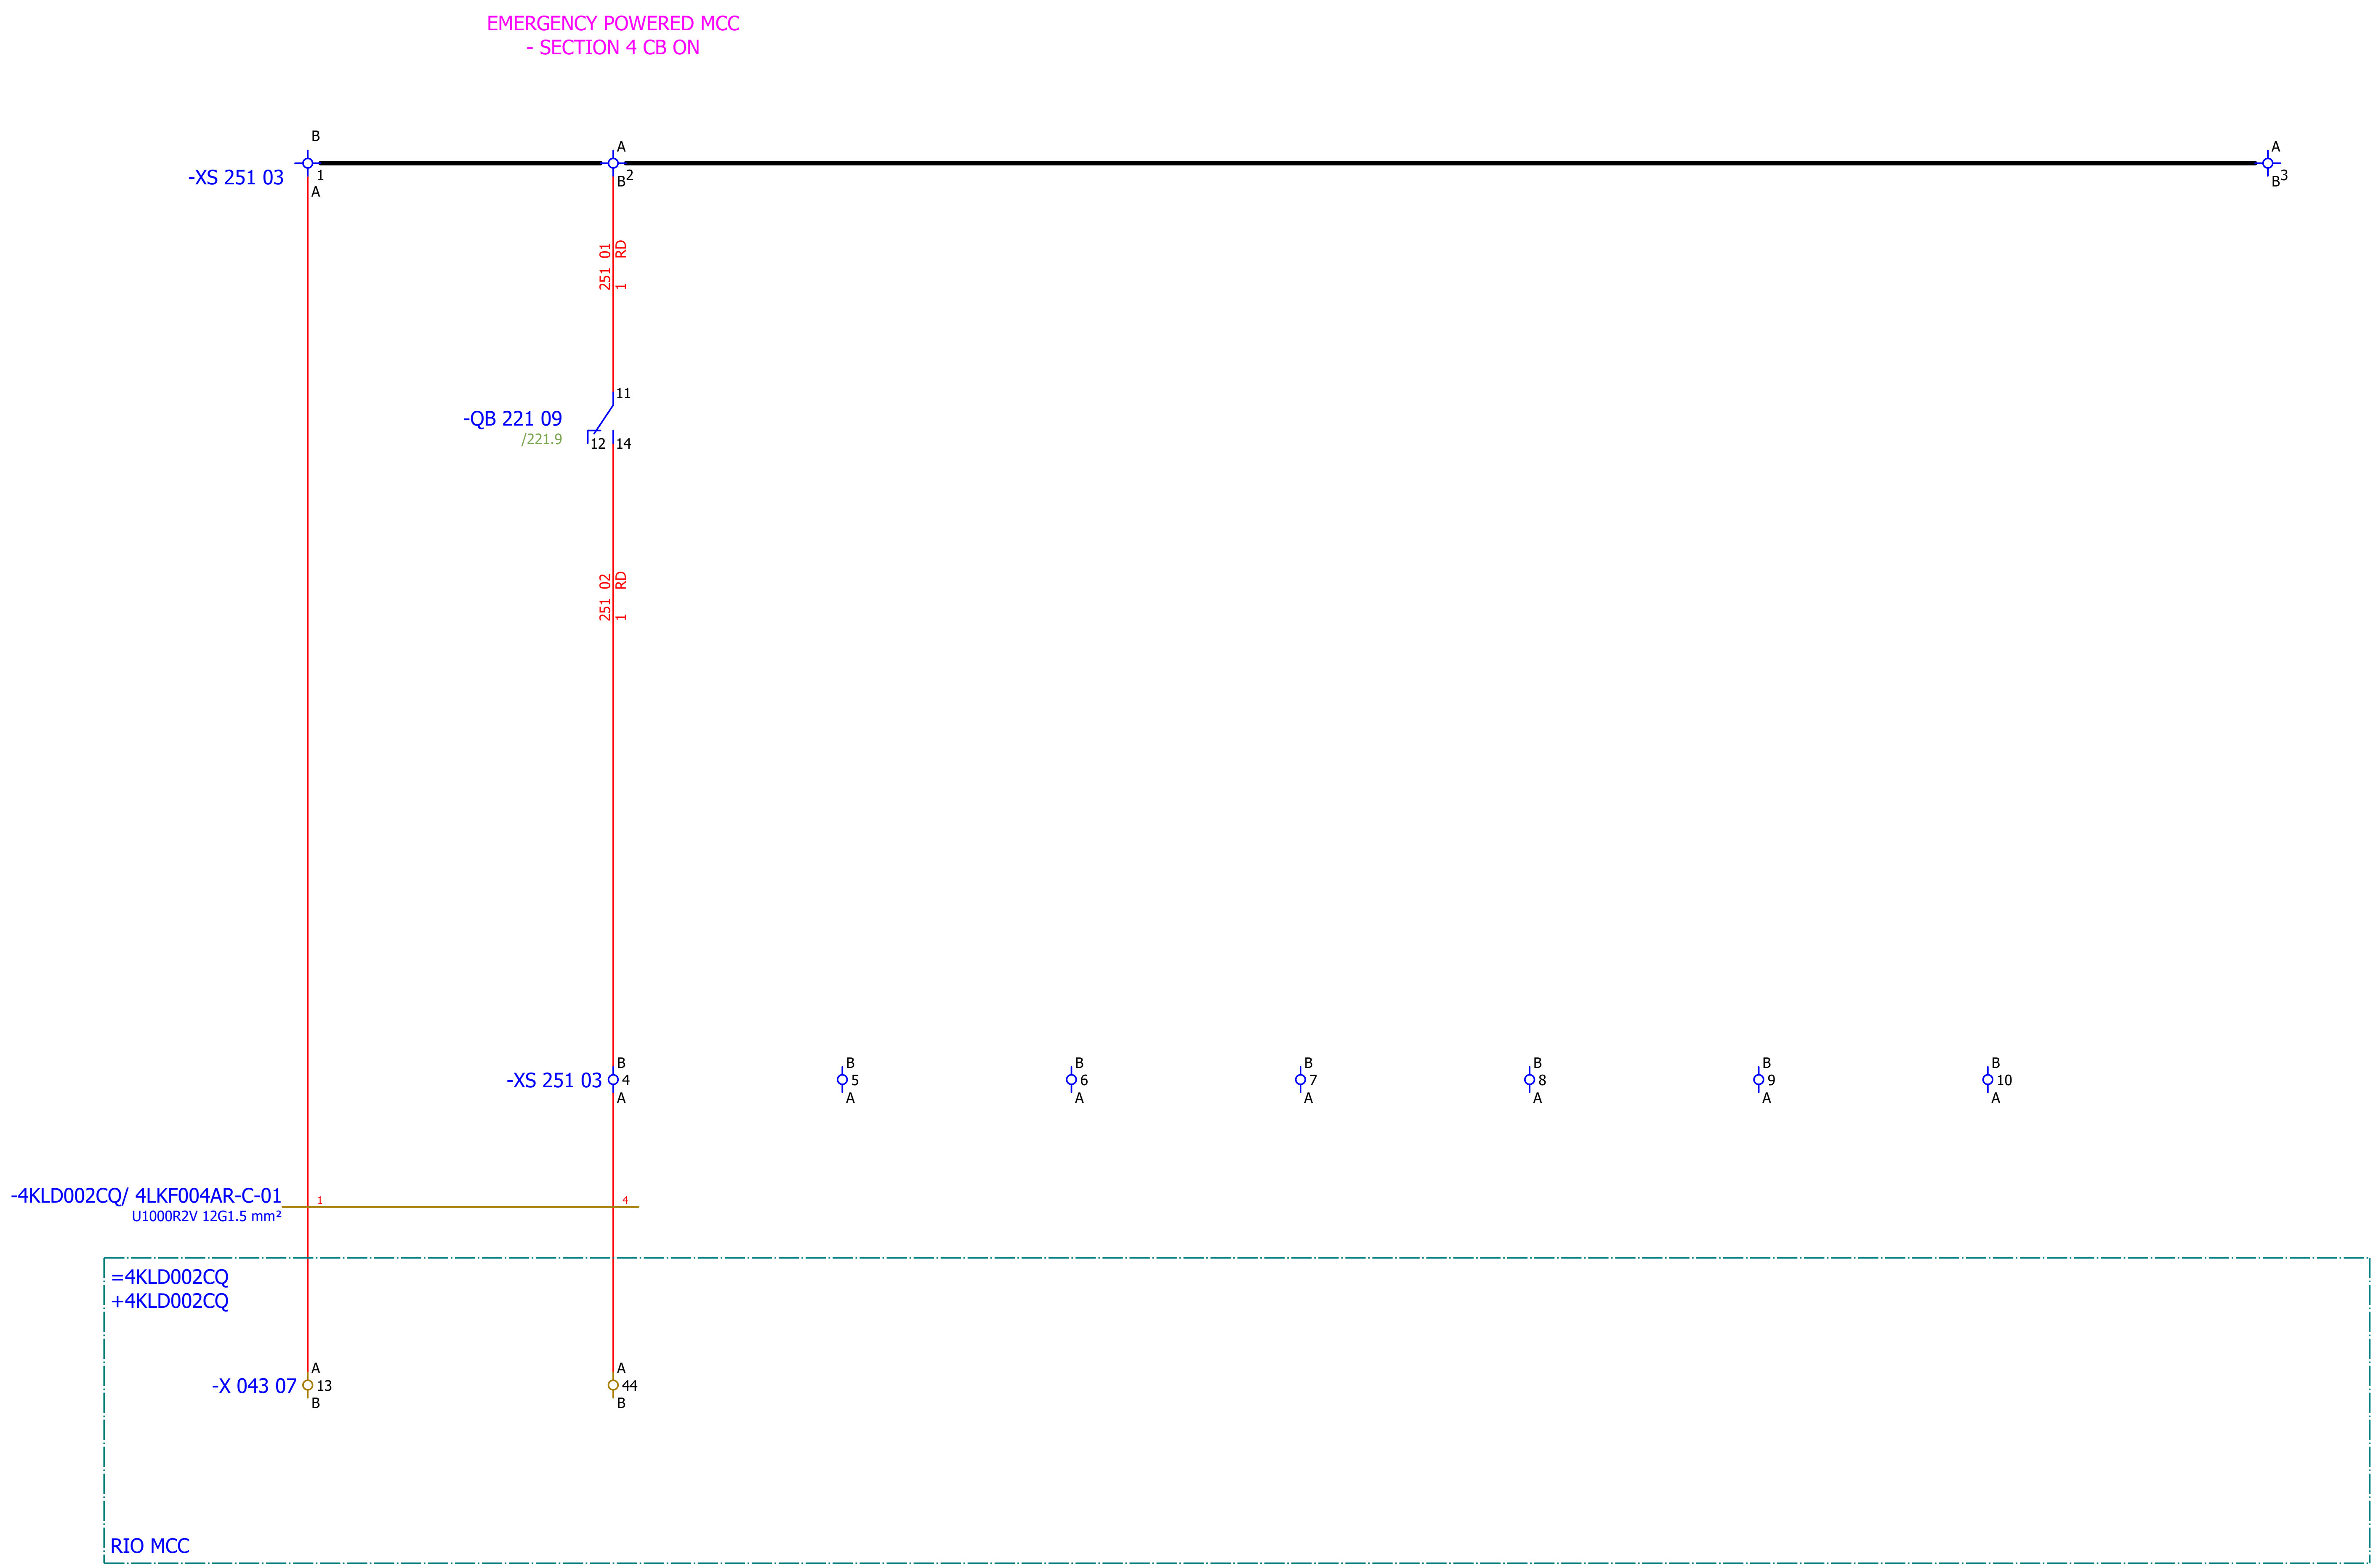
EMERGENCY POWERED MCC
- SECTION 4 CB ON
-XS 251 03
B
1
A
A
B 2
A
B 3
251 01 RD 1
-QB 221 09
/221.9
11
12
14
251 02 RD 1
-XS 251 03
B 4 A
B 5 A
B 6 A
B 7 A
B 8 A
B 9 A
B 10 A
-4KLD002CQ/ 4LKF004AR-C-01
U1000R2V 12G1.5 mm²
=4KLD002CQ
+4KLD002CQ
-X 043 07
A 13 B
A 44 B
RIO MCC

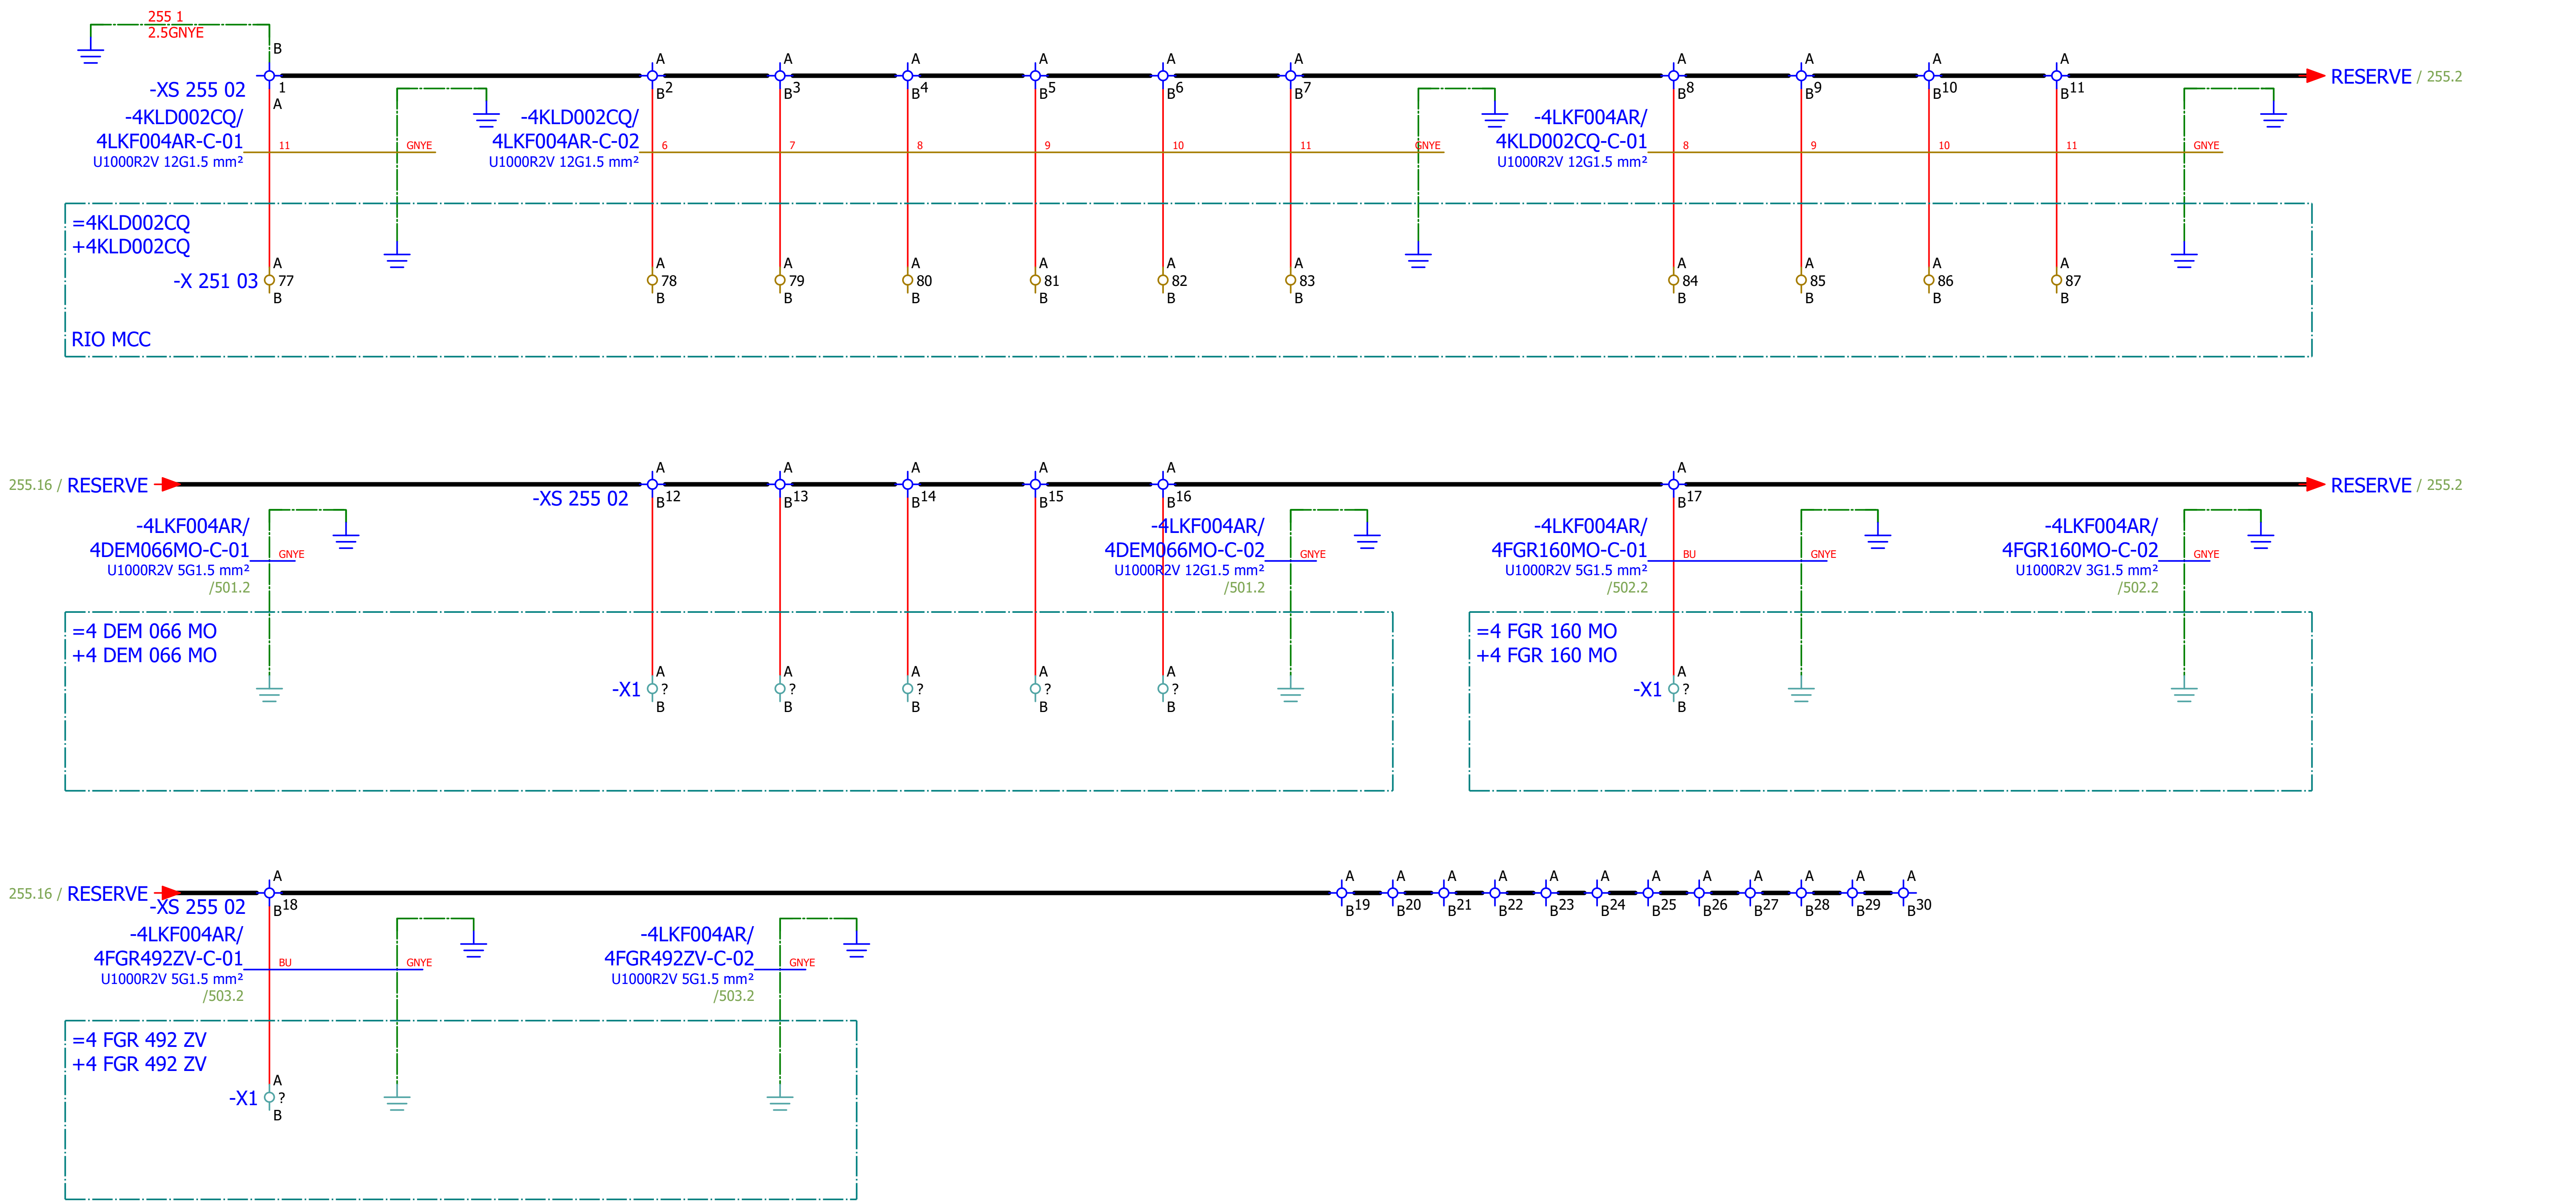

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 4	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#QB
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 255
Format:	A3								+4LKF004AR	Next: 261

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

MEASUREMENT

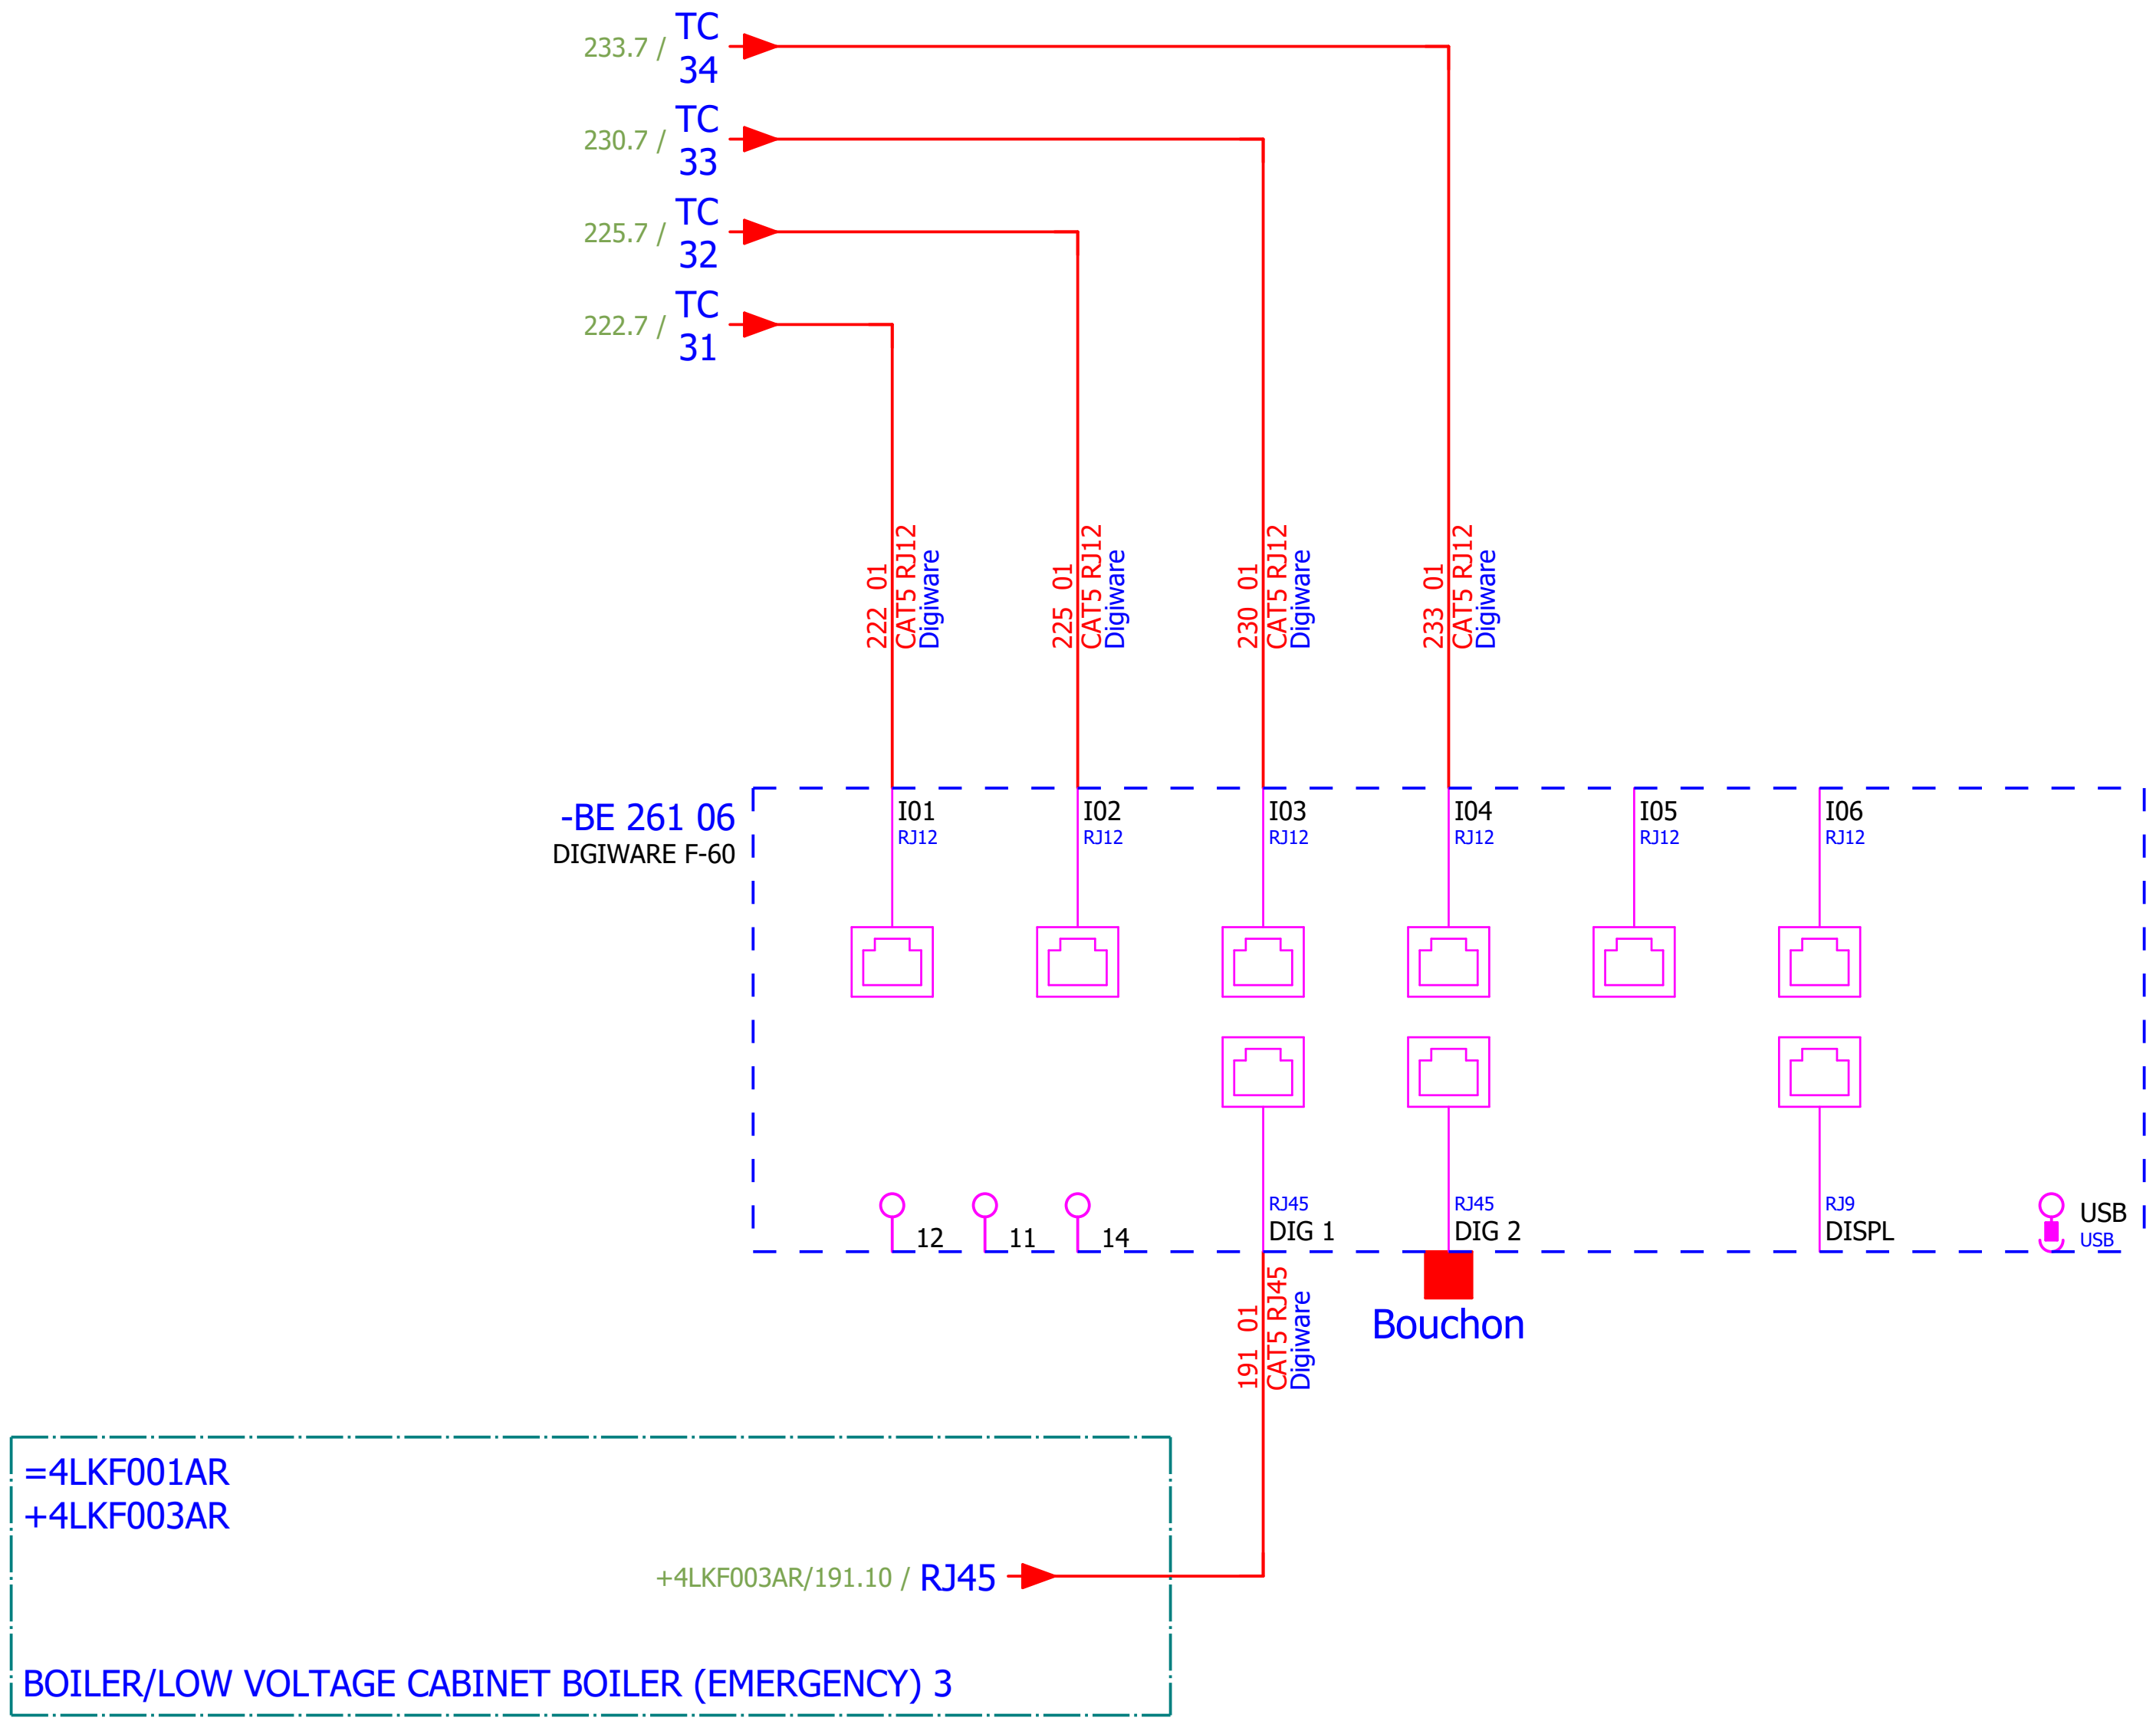

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 4	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Luka Božičević								#V
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COMMUNICATION	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 261
Format:	A3							+4LKF004AR	Next: 401

Sorting number	Part number	Quantity	Manufacturer	Device	Device description	Device designation
1.	SOC.47290126	1	Socomec	Module location default ISOM DIGIWARE F-60	Network type - Power distribution, Control circuits, Medical Rated voltage - 24 VDC Type - Insulation Fault Locator Indication - Digital	-BE 261 06
2.	SE.ZB4BVBG1	12	Schneider Electric	white light block with body/fixing collar integral LED 24...120VAC/DC		-HL 223 02...-HL 223 04;-HL 226 02...-HL 226 04;-HL 231 02...-HL 231 04;-HL 234 02...-HL 234 04
3.	SE.ZB4BV043	5	Schneider Electric	Red pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Red	-HL 223 02;-HL 226 02;-HL 226 03;-HL 231 02;-HL 234 02
4.	SE.ZBZ32	12	Schneider Electric	Harmony XB4	Legend holder, plastic	-HL 223 02...-HL 223 04;-HL 226 02...-HL 226 04;-HL 231 02...-HL 231 04;-HL 234 02...-HL 234 04
5.	SE.ZB4BV033	3	Schneider Electric	Green pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Green	-HL 223 03;-HL 231 03;-HL 234 03
6.	SE.ZB4BV053	4	Schneider Electric	Orange pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Orange	-HL 223 04;-HL 226 04;-HL 231 04;-HL 234 04
7.	SE.RXM4AB2P7	8	Schneider Electric	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED	-K 223 15;-K 223 16;-K 227 08;-K 227 10;-K 231 15;-K 231 16;-K 234 15;-K 234 16
8.	SE.RXZE2S114M	8	Schneider Electric	Socket	For RXM2/RXM4 relays Screw connectors Separate contact 4 C/O	-K 223 15;-K 223 16;-K 227 08;-K 227 10;-K 231 15;-K 231 16;-K 234 15;-K 234 16
9.	SE.RXM041FU7	8	Schneider Electric	Protection module	RC circuit - 110..240 V AC - for RPZ/RXZ sockets	-K 223 15;-K 223 16;-K 227 08;-K 227 10;-K 231 15;-K 231 16;-K 234 15;-K 234 16
10.	SE.LC1D12P7	5	Schneider Electric	Contactor TeSys LC1-D - 3P - AC-3 440V 12 A, Coil 230 V AC	Contactor TeSys LC1-D - 3P - AC-3 440V 18 A, Coil 230 V AC	-KM 222 05;-KM 225 05;-KM 225 07;-KM 230 05;-KM 233 05
11.	SE.LADN31	5	Schneider Electric	Auxiliary contact block TeSys - 3 NO + 1 NC,screw-clamps terminals	Auxiliary contact block TeSys - 3 NO + 1 NC,screw-clamps terminals	-KM 222 05;-KM 225 05;-KM 225 07;-KM 230 05;-KM 233 05
12.	SE.LAD4RCU	5	Schneider Electric	RC Transient Suppressor 110 TO 250 VAC	RC Transient Suppressor 110 TO 250 VAC	-KM 222 05;-KM 225 05;-KM 225 07;-KM 230 05;-KM 233 05
13.	SE.LAD9R1V	1	Schneider Electric	Reversing mechanical interlock kit	Tesys D, reversing mechanical interlock kit, with electrical interlocking, for LC1D09 to LC1D38	-KM 225 05
14.	SE.GV2P16	1	Schneider Electric	Thermal Magnetic Motor Circuit Breaker TeSys GV2P - 3P - 9...14 A	Thermal Magnetic Motor Circuit Breaker TeSys GV2P - 3P - 9...14 A	-Q 222 05
15.	SE.GVAE11	4	Schneider Electric	Auxiliary contact block	1NO+1NC Front mounting For GV2	-Q 222 05;-Q 225 05;-Q 230 05;-Q 233 05
16.	SE.GVAD0110	4	Schneider Electric	TeSys GV AD0110 - auxiliary contact - 1 NO + 1 NC (fault)		-Q 222 05;-Q 225 05;-Q 230 05;-Q 233 05
17.	SE.A9F74202	8	Schneider Electric	2-pole MCB, 2A/C	Nominal current: 2 A Tripping curve: C	-Q 223 04;-Q 223 14;-Q 226 04;-Q 227 08;-Q 231 04;-Q 231 14;-Q 234 04;-Q 234 14
18.	SE.GV2P08	3	Schneider Electric	3-pole transformator protection circuit breaker		-Q 225 05;-Q 230 05;-Q 233 05
19.	SE.C10F3TM032	1	Schneider Electric	Circuit breaker, ComPacT NSX100B	36kA/415VAC 3 poles TMD trip unit 32A	-QB 221 09
20.	SE.29450	1	Schneider Electric	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV	-QB 221 09
21.	SE.LV429337T	1	Schneider Electric	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40	-QB 221 09
22.	SE.LVS04033	1	Schneider Electric	LINERGY DP	LINERGY DP 3P D.BLK/COMPACT 250A 27HOLES	-QB 221 09

Sorting number	Part number	Quantity	Manufacturer	Device	Device description	Device designation
23.	SE.LV429517	1	Schneider Electric	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250	-QB 221 09
24.	PXC.2950129	1	Phoenix Contact	Component for protective circuit	Diode module, with 14 diodes, common anode, diode type 1N 4007	-R 236 02
25.	PXC.2954882	1	Phoenix Contact	Diode block	Diode module, with eight diodes, common anode, diode type 1N 5408	-R 236 06
26.	PXC.2950116	1	Phoenix Contact	Component for protective circuit	Diode module, with 14 diodes, common cathode, diode type 1N 4007	-R 236 10
27.	PXC.2954879	1	Phoenix Contact	Component for protective circuit	Diode module, with eight diodes, common cathode, diode type 1N 5408	-R 236 14
28.	SE.XPSBAC34AP	5	Schneider Electric	Safety module	Harmony Safety Automation Estop or guard ,Harmony XPS, connected to supply terminals 48-240 V AC/DC , no inputs, screw	-RP 223 05;-RP 226 05;-RP 226 11;-RP 231 05;-RP 234 05
29.	SE.XB4BA21	3	Schneider Electric	Black flush complete pushbutton Ø22 spring return 1NO "unmarked"	Black flush complete pushbutton Ø22 spring return 1NO	-S 223 06;-S 231 06;-S 234 06
30.	SE.XB4BD33	5	Schneider Electric	Selector switch, BLACK, 1-0-2, 2NO	Metal Black Ø22 3 positions 2 NO	-S 223 06.1;-S 226 07;-S 226 07.1;-S 231 06.1;-S 234 06.1
31.	SE.ZBE101	3	Schneider Electric	Single contact block NO	Harmony XB4 Silver alloy 1 NO	-S 226 07.1
32.	SOC.47506015	4	Socomec	TORES LOCATION SENSOR DELTA IP-15 (15mm)	Maximal diameter of cable: 15mm	-TC 222 05;-TC 225 05;-TC 230 05;-TC 233 05
33.	SOC.47290590	4	Socomec	ISOM T-15	Connection adaptor ISOM T-15 to ISOM Digiware F-60 modules	-TC 222 05;-TC 225 05;-TC 230 05;-TC 233 05
34.	PXC.3209510	147	Phoenix Contact	PT 2,5 - Feed-through terminal block	Feed-through terminal block, nom. voltage: 800 V, nominal current: 24 A, number of connections: 2, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm2, cross section: 0.14 mm2 - 4 mm2, mounting type: NS 35/7,5, NS 35/15, color: gray	-X 222 05;-X 223 09;-X 224 06;-X 225 05;-X 226 09;-X 228 06;-X 230 05;-X 231 09;-X 232 06;-X 233 05;-X 234 09;-X 235 06;-XB 236 03;-XS 251 03;-XS 255 02
35.	SE.NSYTRV42SC	2	Schneider Electric	Feed-through terminal block	SCREW TERMINAL, KNIFE DISCONNECT, 2 POINTS, 4MM², GREY	-X 232 06;-X 235 06

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Cable name: **4LKF004AR/ 4DEM066MO-B-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **4G2.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF004AR/225.5	=4LKF001AR+4LKF004AR-X 225 05	1:A	**BN**	=4 DEM 066 MO+4 DEM 066 MO-M32	U1	=4LKF001AR+4LKF004AR/225.5	
[4 DEM 066 MO] DRAG CHAIN CONVEYOR 2	=4LKF001AR+4LKF004AR/225.5	=4LKF001AR+4LKF004AR-X 225 05	2:A	**BK**	=4 DEM 066 MO+4 DEM 066 MO-M32	V1	=4LKF001AR+4LKF004AR/225.5	
=	=4LKF001AR+4LKF004AR/225.5	=4LKF001AR+4LKF004AR-X 225 05	3:A	**GY**	=4 DEM 066 MO+4 DEM 066 MO-M32	W1	=4LKF001AR+4LKF004AR/225.5	
	=4LKF001AR+4LKF004AR/225.7	=4LKF001AR+4LKF004AR-PE		**GNYE**	=4 DEM 066 MO+4 DEM 066 MO-M32	PE	=4LKF001AR+4LKF004AR/225.5	

Cable name: **4LKF004AR/ 4DEM066MO-C-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
FORWARD	=4LKF001AR+4LKF004AR/226.9	=4LKF001AR+4LKF004AR-X 226 09	1:A	**BN**	=4 DEM 066 MO+4 DEM 066 MO-S?	21	=4LKF001AR+4LKF004AR/226.9	LOCAL STOP
=	=4LKF001AR+4LKF004AR/226.9	=4LKF001AR+4LKF004AR-X 226 09	2:A	**BK**	=4 DEM 066 MO+4 DEM 066 MO-S?	14	=4LKF001AR+4LKF004AR/226.9	FORWARD LOCAL
=	=4LKF001AR+4LKF004AR/226.10	=4LKF001AR+4LKF004AR-X 226 09	4:A	**GY**	=4 DEM 066 MO+4 DEM 066 MO-S?	22	=4LKF001AR+4LKF004AR/226.9	LOCAL STOP
BACKWARD	=4LKF001AR+4LKF004AR/226.15	=4LKF001AR+4LKF004AR-X 226 09	7:A	**BU**	=4 DEM 066 MO+4 DEM 066 MO-S?	14	=4LKF001AR+4LKF004AR/226.15	BACKWORD LOCAL
	=4LKF001AR+4LKF004AR/255.3	=4LKF001AR+4LKF004AR-PE		**GNYE**	=4 DEM 066 MO+4 DEM 066 MO-PE		=4LKF001AR+4LKF004AR/255.2	

Cable name: **4LKF004AR/ 4DEM066MO-C-02**

Cable type: **U1000R2V** No. of conn., diameter, length: **3G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
READY	=4LKF001AR+4LKF004AR/228.11	=4LKF001AR+4LKF004AR-X 228 06	3:A	**BN**	=4 DEM 066 MO+4 DEM 066 MO-S?	31	=4LKF001AR+4LKF004AR/228.11	LOCAL STOP
=	=4LKF001AR+4LKF004AR/228.11	=4LKF001AR+4LKF004AR-X 228 06	)9:A	**BU**	=4 DEM 066 MO+4 DEM 066 MO-S?	32	=4LKF001AR+4LKF004AR/228.11	=
	=4LKF001AR+4LKF004AR/255.10	=4LKF001AR+4LKF004AR-PE		**GNYE**	=4 DEM 066 MO+4 DEM 066 MO-PE		=4LKF001AR+4LKF004AR/255.9	

Cable name: **4LKF004AR/ 4DEM066SSL-C-01**

Cable type: **BIRTFLEX 5111-PVC-PUR-JB** No. of conn., diameter, length: **4G0.75 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
				BK				
DRAG CHAIN CONVEYOR 2 - "0" PULSE	=4LKF001AR+4LKF004AR/229.6	=4LKF001AR+4LKF004AR-X 228 06	15:B	**BN**	=4 DEM 055 MO+4 DEM 055 MO-X1	14	=4LKF001AR+4LKF004AR/229.6	DRAG CHAIN CONVEYOR 2 - "0" PULSE
				GY				
				GNYE				
	=4LKF001AR+4LKF004AR/229.4	=4LKF001AR+4LKF004AR-X 228 06	4:B	**WH**	=4 DEM 055 MO+4 DEM 055 MO-X1	13	=4LKF001AR+4LKF004AR/229.4	

Cable name: **4LKF004AR/ 4FGR160MO-B-01**
Cable type: **U1000R2V** No. of conn., diameter, length: **4G2.5 mm² /**
Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF004AR/230.5	=4LKF001AR+4LKF004AR-X 230 05	1:A	**BN**	=4 FGR 160 MO+4 FGR 160 MO-M33	U1	=4LKF001AR+4LKF004AR/230.5	
[4 FGR 160 MO] SEALING AIR FAN RIGHT	=4LKF001AR+4LKF004AR/230.5	=4LKF001AR+4LKF004AR-X 230 05	2:A	**BK**	=4 FGR 160 MO+4 FGR 160 MO-M33	V1	=4LKF001AR+4LKF004AR/230.5	
=	=4LKF001AR+4LKF004AR/230.5	=4LKF001AR+4LKF004AR-X 230 05	3:A	**GY**	=4 FGR 160 MO+4 FGR 160 MO-M33	W1	=4LKF001AR+4LKF004AR/230.5	
	=4LKF001AR+4LKF004AR/230.7	=4LKF001AR+4LKF004AR-PE		**GNYE**	=4 FGR 160 MO+4 FGR 160 MO-M33	PE	=4LKF001AR+4LKF004AR/230.5	

Cable name: **4LKF004AR/ 4FGR160MO-C-01**
Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**
Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
LOCAL CONTROL	=4LKF001AR+4LKF004AR/231.9	=4LKF001AR+4LKF004AR-X 231 09	1:A	**BN**	=4 FGR 160 MO+4 FGR 160 MO-S 231 08	21	=4LKF001AR+4LKF004AR/231.9	LOCAL STOP
=	=4LKF001AR+4LKF004AR/231.11	=4LKF001AR+4LKF004AR-X 231 09	4:A	**BK**	=4 FGR 160 MO+4 FGR 160 MO-S 231 08.1	13	=4LKF001AR+4LKF004AR/231.9	MARCHE LOCAL
=	=4LKF001AR+4LKF004AR/231.9	=4LKF001AR+4LKF004AR-X 231 09	2:A	**GY**	=4 FGR 160 MO+4 FGR 160 MO-S 231 08.1	14	=4LKF001AR+4LKF004AR/231.9	=
	=4LKF001AR+4LKF004AR/255.12	=4LKF001AR+4LKF004AR-XS 255 02	17:B	**BU**	=4 FGR 160 MO+4 FGR 160 MO-X1	?:A	=4LKF001AR+4LKF004AR/255.12	
	=4LKF001AR+4LKF004AR/255.13	=4LKF001AR+4LKF004AR-PE		**GNYE**	=4 FGR 160 MO+4 FGR 160 MO-PE		=4LKF001AR+4LKF004AR/255.13	

Cable name: **4LKF004AR/ 4FGR160MO-C-02**
Cable type: **U1000R2V** No. of conn., diameter, length: **3G1.5 mm² /**
Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
READY	=4LKF001AR+4LKF004AR/232.12	=4LKF001AR+4LKF004AR-X 232 06	5:A	**BN**	=4 FGR 160 MO+4 FGR 160 MO-S?	31	=4LKF001AR+4LKF004AR/232.12	LOCAL STOP
=	=4LKF001AR+4LKF004AR/232.12	=4LKF001AR+4LKF004AR-X 232 06	7:A	**BU**	=4 FGR 160 MO+4 FGR 160 MO-S?	32	=4LKF001AR+4LKF004AR/232.12	=
	=4LKF001AR+4LKF004AR/255.16	=4LKF001AR+4LKF004AR-PE		**GNYE**	=4 FGR 160 MO+4 FGR 160 MO-PE		=4LKF001AR+4LKF004AR/255.15	

Cable name: **4LKF004AR/ 4FGR492ZV-B-01**
Cable type: **U1000R2V** No. of conn., diameter, length: **4G2.5 mm² /**
Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF004AR/233.5	=4LKF001AR+4LKF004AR-X 233 05	1:A	**BN**	=4 FGR 492 ZV+4 FGR 492 ZV-M34	U1	=4LKF001AR+4LKF004AR/233.5	
[4 FGR 492 ZV] COOLING FAN 3	=4LKF001AR+4LKF004AR/233.5	=4LKF001AR+4LKF004AR-X 233 05	2:A	**BK**	=4 FGR 492 ZV+4 FGR 492 ZV-M34	V1	=4LKF001AR+4LKF004AR/233.5	
=	=4LKF001AR+4LKF004AR/233.5	=4LKF001AR+4LKF004AR-X 233 05	3:A	**GY**	=4 FGR 492 ZV+4 FGR 492 ZV-M34	W1	=4LKF001AR+4LKF004AR/233.5	
	=4LKF001AR+4LKF004AR/233.7	=4LKF001AR+4LKF004AR-PE		**GNYE**	=4 FGR 492 ZV+4 FGR 492 ZV-M34	PE	=4LKF001AR+4LKF004AR/233.5	

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Cable name: **4LKF004AR/ 4FGR492ZV-C-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
LOCAL CONTROL	=4LKF001AR+4LKF004AR/234.9	=4LKF001AR+4LKF004AR-X 234 09	1:A	**BN**	=4 FGR 492 ZV+4 FGR 492 ZV-S?	21	=4LKF001AR+4LKF004AR/234.9	LOCAL STOP
=	=4LKF001AR+4LKF004AR/234.11	=4LKF001AR+4LKF004AR-X 234 09	4:A	**BK**	=4 FGR 492 ZV+4 FGR 492 ZV-S?	13	=4LKF001AR+4LKF004AR/234.9	MARCHE LOCAL
=	=4LKF001AR+4LKF004AR/234.9	=4LKF001AR+4LKF004AR-X 234 09	2:A	**GY**	=4 FGR 492 ZV+4 FGR 492 ZV-S?	14	=4LKF001AR+4LKF004AR/234.9	=
	=4LKF001AR+4LKF004AR/255.2	=4LKF001AR+4LKF004AR-XS 255 02	18:B	**BU**	=4 FGR 492 ZV+4 FGR 492 ZV-X1	?:A	=4LKF001AR+4LKF004AR/255.2	
	=4LKF001AR+4LKF004AR/255.4	=4LKF001AR+4LKF004AR-PE		**GNYE**	=4 FGR 492 ZV+4 FGR 492 ZV-PE		=4LKF001AR+4LKF004AR/255.3	

Cable name: **4LKF004AR/ 4FGR492ZV-C-02**

Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
READY	=4LKF001AR+4LKF004AR/235.10	=4LKF001AR+4LKF004AR-X 235 06	3:A	**BN**	=4 FGR 492 ZV+4 FGR 492 ZV-S?	31	=4LKF001AR+4LKF004AR/235.10	LOCAL STOP
=	=4LKF001AR+4LKF004AR/235.10	=4LKF001AR+4LKF004AR-X 235 06	6:A	**BK**	=4 FGR 492 ZV+4 FGR 492 ZV-S?	32	=4LKF001AR+4LKF004AR/235.10	=
				GY				
				BU				
				GNYE				
	=4LKF001AR+4LKF004AR/255.6	=4LKF001AR+4LKF004AR-PE		**GNYE**	=4 FGR 492 ZV+4 FGR 492 ZV-PE		=4LKF001AR+4LKF004AR/255.6	

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Terminal diagram

A SIDE

Strip
=4LKF001AR+4LKF004AR-PE

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
				'	2		
				'	3		
				'	4		
				'	5		
				'	6		
				'	7		
				'	8		
				'	9		
				'	10		
				'	11		

Terminal diagram

Strip

=4LKF001AR+4LKF004AR-X 222 05

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
				'	1	BK 2.5 mm²	-KM 222 05:2/T1
				'	2	BK 2.5 mm²	-KM 222 05:4/T2
				'	3	BK 2.5 mm²	-KM 222 05:6/T3

Terminal diagram

Strip

A SIDE | =4LKF001AR+4LKF004AR-X 223 09 | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/223.9	=??+??-S 223 08:21				1	WH 1 mm²	-Q 222 05:21
/223.9	=??+??-S 223 08.1:14				2	WH 1 mm²	-K 223 16:11
					3	WH 1 mm²	-KM 222 05:74
/223.9	=??+??-S 223 08.1:13				4	WH 1 mm²	-KM 222 05:73
/223.12	=4KLD002CQ+4KLD002CQ-X?:?:A				5		
/223.12	=4KLD002CQ+4KLD002CQ-X?:?:A				6	WH 1 mm²	-S 223 06.1:23
					7		
					8		
					9		
					10		

Date:		SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 4	Project: BRC-4	Unit & Issuer:	Number:	Revision: #Y
Drawn:								
Approved:	Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: Terminal diagram =4LKF001AR+4LKF004AR-X 223 09	Drawing designation:	=4LKF001AR	Sheet: 603
Format:	A3					+4LKF004AR	Next: 604

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF004AR-X 224 06

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1		
					2	RD 1 mm²	-KM 222 05:83
/224.10	=??+??-S?:31				3		
					4		
					5	RD 1 mm²	-KM 222 05:84
/224.10	=??+??-S?:32				6	RD 1 mm²	-K 223 16:21
					7	RD 1 mm²	-S 223 06.1:34
					8		
					9		

Terminal diagram

Strip

=4LKF001AR+4LKF004AR-X 225 05

A SIDE — B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/225.5	=4 DEM 066 MO+4 DEM 066 MO-M32:U1	4LKF004AR/ 4DEM066MO-B-01 U1000R2V 4G2.5 mm²	BN 2.5 mm²	'	1	BK 2.5 mm²	-KM 225 05:2/T1
/225.5	=4 DEM 066 MO+4 DEM 066 MO-M32:V1	4LKF004AR/ 4DEM066MO-B-01 U1000R2V 4G2.5 mm²	BK 2.5 mm²	'	2	BK 2.5 mm²	-KM 225 05:4/T2
/225.5	=4 DEM 066 MO+4 DEM 066 MO-M32:W1	4LKF004AR/ 4DEM066MO-B-01 U1000R2V 4G2.5 mm²	GY 2.5 mm²	'	3	BK 2.5 mm²	-KM 225 05:6/T3

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF004AR-X 226 09

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/226.9	=4 DEM 066 MO+4 DEM 066 MO-S?:21	4LKF004AR/ 4DEM066MO-C-01 U1000R2V 5G1.5 mm²	BN 1.5 mm²		1	WH 1 mm²	-Q 225 05:21
/226.9	=4 DEM 066 MO+4 DEM 066 MO-S?:14	4LKF004AR/ 4DEM066MO-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²		2	WH 1 mm²	-K 227 10:11
					3	WH 1 mm²	-KM 225 05:74
/226.9	=4 DEM 066 MO+4 DEM 066 MO-S?:22	4LKF004AR/ 4DEM066MO-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²		4	WH 1 mm²	-KM 225 05:73
					5	WH 1 mm²	-KM 225 07:73
					6	WH 1 mm²	-S 226 07.1:23
/226.15	=4 DEM 066 MO+4 DEM 066 MO-S?:14	4LKF004AR/ 4DEM066MO-C-01 U1000R2V 5G1.5 mm²	BU 1.5 mm²		7	WH 1 mm²	-K 227 10:21
					8		
					9		
					10		
					11		
					12	WH 1 mm²	-S 226 07.1:43

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF004AR-X 228 06

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					)1		
					2	RD 1 mm²	-KM 225 05:83
/228.11	=4 DEM 066 MO+4 DEM 066 MO-S?:31	4LKF004AR/ 4DEM066MO-C-02 U1000R2V 12G1.5 mm²	1 1.5 mm²		3		
					1		
					4	3 1.5 mm²	=4 DEM 055 MO+4 DEM 055
					5	5 1.5 mm²	=4 DEM 055 MO+4 DEM 055
					6		
					7	RD 1 mm²	-KM 225 05:84
					8	RD 1 mm²	-KM 225 07:84
/228.11	=4 DEM 066 MO+4 DEM 066 MO-S?:32	4LKF004AR/ 4DEM066MO-C-02 U1000R2V 12G1.5 mm²	2 1.5 mm²		)9	RD 1 mm²	-K 227 10:31
					10	RD 1 mm²	-S 226 07.1:54
					11		
					12		
					13		
					14		
					15	4 1.5 mm²	=4 DEM 055 MO+4 DEM 055
					16	6 1.5 mm²	=4 DEM 055 MO+4 DEM 055
					17		
					18		
					19		

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF004AR-X 230 05

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Wiring	Target designation
/230.5	=4 FGR 160 MO+4 FGR 160 MO-M33:U1	4LKF004AR/ 4FGR160MO-B-01 U1000R2V 4G2.5 mm²	BN 2.5 mm²	'	1	BK 2.5 mm²	-KM 230 05:2/T1
/230.5	=4 FGR 160 MO+4 FGR 160 MO-M33:V1	4LKF004AR/ 4FGR160MO-B-01 U1000R2V 4G2.5 mm²	BK 2.5 mm²	'	2	BK 2.5 mm²	-KM 230 05:4/T2
/230.5	=4 FGR 160 MO+4 FGR 160 MO-M33:W1	4LKF004AR/ 4FGR160MO-B-01 U1000R2V 4G2.5 mm²	GY 2.5 mm²	'	3	BK 2.5 mm²	-KM 230 05:6/T3

Terminal diagram

A SIDE

Strip
=4LKF001AR+4LKF004AR-X 231 09

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/231.9	=4 FGR 160 MO+4 FGR 160 MO-S 231 08:21	4LKF004AR/ 4FGR160MO-C-01 U1000R2V 5G1.5 mm²	BN 1.5 mm²		1	WH 1 mm²	-Q 230 05:21
/231.9	=4 FGR 160 MO+4 FGR 160 MO-S 231 08.1:14	4LKF004AR/ 4FGR160MO-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²		2	WH 1 mm²	-K 231 16:11
					3	WH 1 mm²	-KM 230 05:74
/231.9	=4 FGR 160 MO+4 FGR 160 MO-S 231 08.1:13	4LKF004AR/ 4FGR160MO-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²		4	WH 1 mm²	-KM 230 05:73
					5		
					6	WH 1 mm²	-S 231 06.1:23
					7		
					8		
					9		
					10		

Terminal diagram

Strip

=4LKF001AR+4LKF004AR-X 232 06

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1		
					2	RD 1 mm²	-KM 230 05:83
					3	RD 1 mm²	-KM 230 05:84
					4		
/232.12	=4 FGR 160 MO+4 FGR 160 MO-S?:31	4LKF004AR/ 4FGR160MO-C-02 U1000R2V 3G1.5 mm²	BN 1.5 mm²		5		
					6		
/232.12	=4 FGR 160 MO+4 FGR 160 MO-S?:32	4LKF004AR/ 4FGR160MO-C-02 U1000R2V 3G1.5 mm²	BU 1.5 mm²		7	RD 1 mm²	-K 231 16:21
					8	RD 1 mm²	-S 231 06.1:34
					9		
					10		

Terminal diagram

Strip

=4LKF001AR+4LKF004AR-X 233 05

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/233.5	=4 FGR 492 ZV+4 FGR 492 ZV-M34:U1	4LKF004AR/ 4FGR492ZV-B-01 U1000R2V 4G2.5 mm²	BN 2.5 mm²	'	1	BK 2.5 mm²	-KM 233 05:2/T1
/233.5	=4 FGR 492 ZV+4 FGR 492 ZV-M34:V1	4LKF004AR/ 4FGR492ZV-B-01 U1000R2V 4G2.5 mm²	BK 2.5 mm²	'	2	BK 2.5 mm²	-KM 233 05:4/T2
/233.5	=4 FGR 492 ZV+4 FGR 492 ZV-M34:W1	4LKF004AR/ 4FGR492ZV-B-01 U1000R2V 4G2.5 mm²	GY 2.5 mm²	'	3	BK 2.5 mm²	-KM 233 05:6/T3

Terminal diagram

Strip

=4LKF001AR+4LKF004AR-X 234 09

A SIDE | B SIDE

Placement		Target designation		Cable name and type		Conductor		Jumper	Terminal	Wiring		Target designation
/234.9		=4 FGR 492 ZV+4 FGR 492 ZV-S?:21		4LKF004AR/ 4FGR492ZV-C-01 U1000R2V 5G1.5 mm²		BN 1.5 mm²			1	WH 1 mm²		-Q 233 05:21
/234.9		=4 FGR 492 ZV+4 FGR 492 ZV-S?:14		4LKF004AR/ 4FGR492ZV-C-01 U1000R2V 5G1.5 mm²		GY 1.5 mm²			2	WH 1 mm²		-K 234 16:11
									3	WH 1 mm²		-KM 233 05:74
/234.9		=4 FGR 492 ZV+4 FGR 492 ZV-S?:13		4LKF004AR/ 4FGR492ZV-C-01 U1000R2V 5G1.5 mm²		BK 1.5 mm²			4	WH 1 mm²		-KM 233 05:73
									5			
									6	WH 1 mm²		-S 234 06.1:23
									7			
									8			
									9			
									10			

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Terminal diagram

A SIDE

Strip
=4LKF001AR+4LKF004AR-X 235 06

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1		
					2	RD 1 mm²	-KM 233 05:83
/235.10	=4 FGR 492 ZV+4 FGR 492 ZV-S?:31	4LKF004AR/ 4FGR492ZV-C-02 U1000R2V 3G1.5 mm²	BN 1.5 mm²		3		
					4		
					5	RD 1 mm²	-KM 233 05:84
/235.10	=4 FGR 492 ZV+4 FGR 492 ZV-S?:32	4LKF004AR/ 4FGR492ZV-C-02 U1000R2V 3G1.5 mm²	BU 1.5 mm²		6	RD 1 mm²	-K 234 16:21
					7	RD 1 mm²	-S 234 06.1:34
					8		
					9		

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF004AR-XB 236 03

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
+4LKF003AR/169.5	+4LKF003AR-XB 169 03:6:A		GY 1 mm²		1	GY 1 mm²	-HL 223 02:2
					2	GY 1 mm²	-HL 226 02:2
					3	GY 1 mm²	-HL 231 02:2
					4	GY 1 mm²	-HL 234 02:2
					5		
+4LKF005AR/376.3	+4LKF005AR-XB 376 03:1:A		GY 1 mm²		6		

Terminal diagram

Strip

=4LKF001AR+4LKF004AR-XS 251 03

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1		
					2	RD 1 mm²	-QB 221 09:11
					3		
					4	RD 1 mm²	-QB 221 09:14
					5		
					6		
					7		
					8		
					9		
					10		

Terminal diagram

Strip

=4LKF001AR+4LKF004AR-XS 255 02

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1	GNYE 2.5 mm²	-PE1
					2		
					3		
					4		
					5		
					6		
					7		
					8		
					9		
					10		
					11		
					12	7 1.5 mm²	=4 DEM 066 MO+4 DEM 066
					13	8 1.5 mm²	=4 DEM 066 MO+4 DEM 066
					14	9 1.5 mm²	=4 DEM 066 MO+4 DEM 066
					15	10 1.5 mm²	=4 DEM 066 MO+4 DEM 066
					16	11 1.5 mm²	=4 DEM 066 MO+4 DEM 066
					17	BU 1.5 mm²	=4 FGR 160 MO+4 FGR 160
					18	BU 1.5 mm²	=4 FGR 492 ZV+4 FGR 492
					19		
					20		
					21		
					22		
					23		
					24		
					25		

Terminal diagram

Strip

=4LKF001AR+4LKF004AR-XS 255 02

A SIDE						B SIDE	
Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
				•	26		
				•	27		
				•	28		
				•	29		
				•	30		

Table of contents

Table of contents

Table of contents

Table of contents

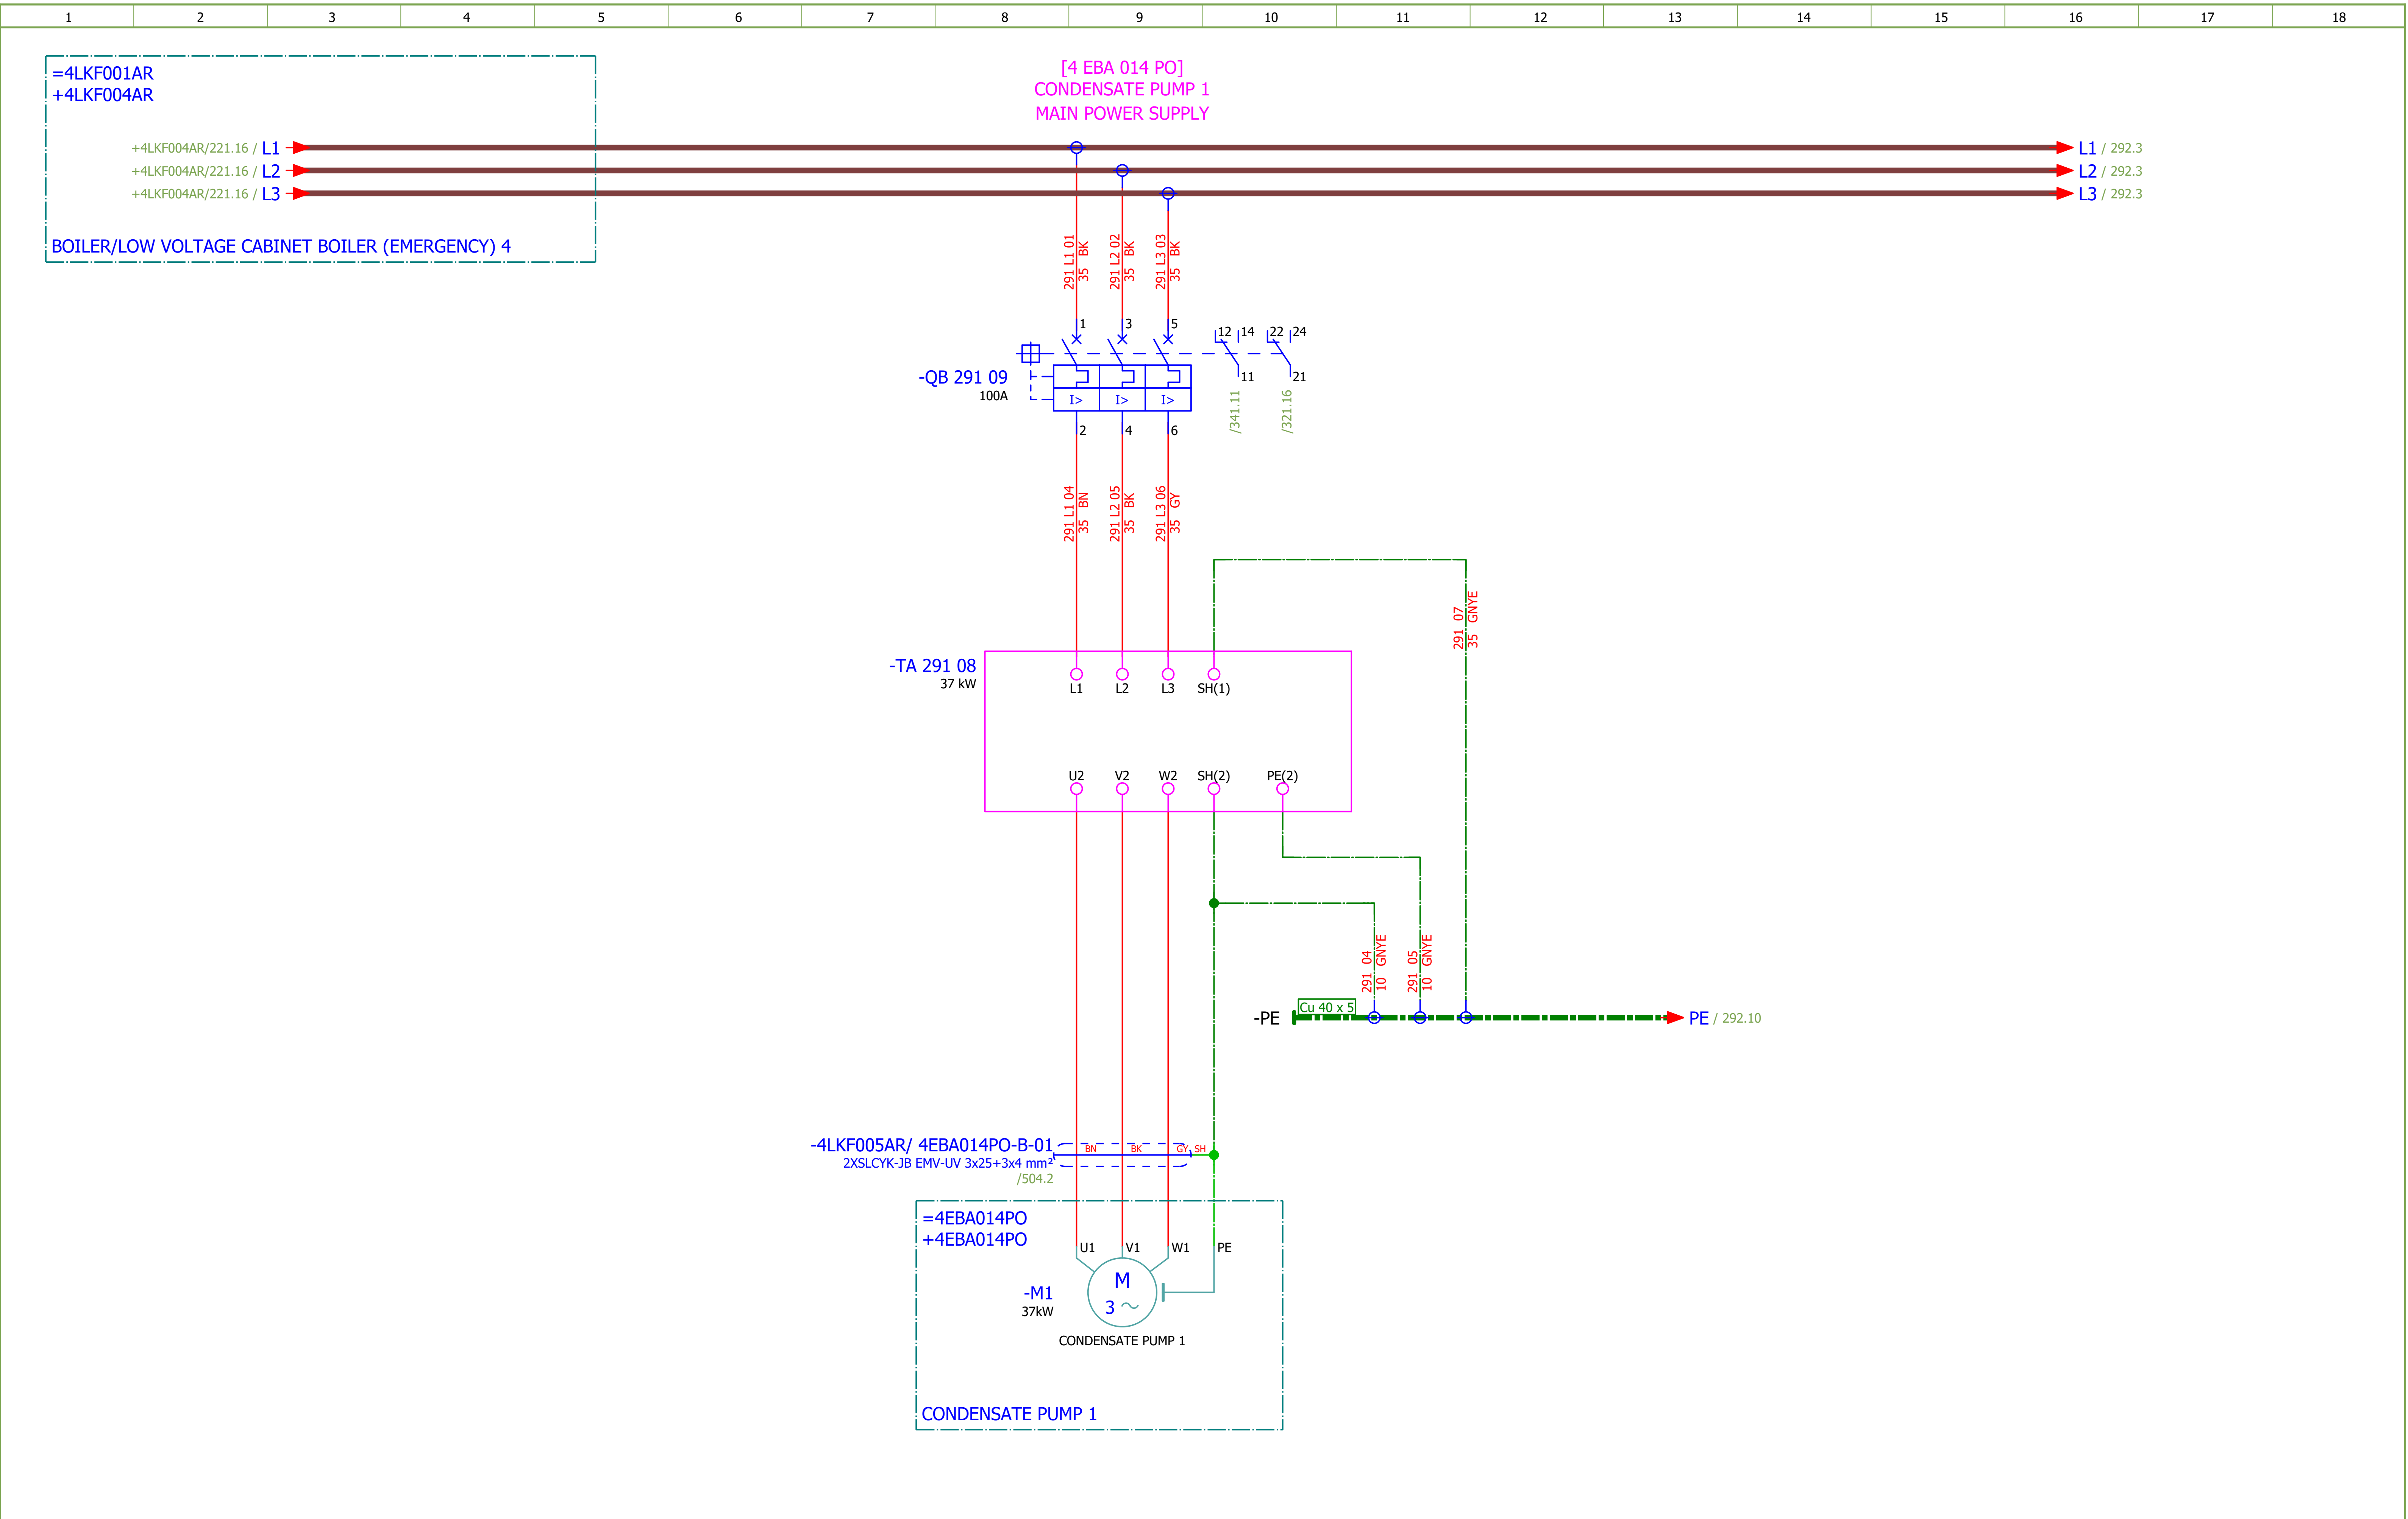

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Jere Radas								#D
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: CONDENSATE PUMP 1 - MAIN POWER SUPPLY	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 291
Format:	A3							+4LKF005AR	Next: 292

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

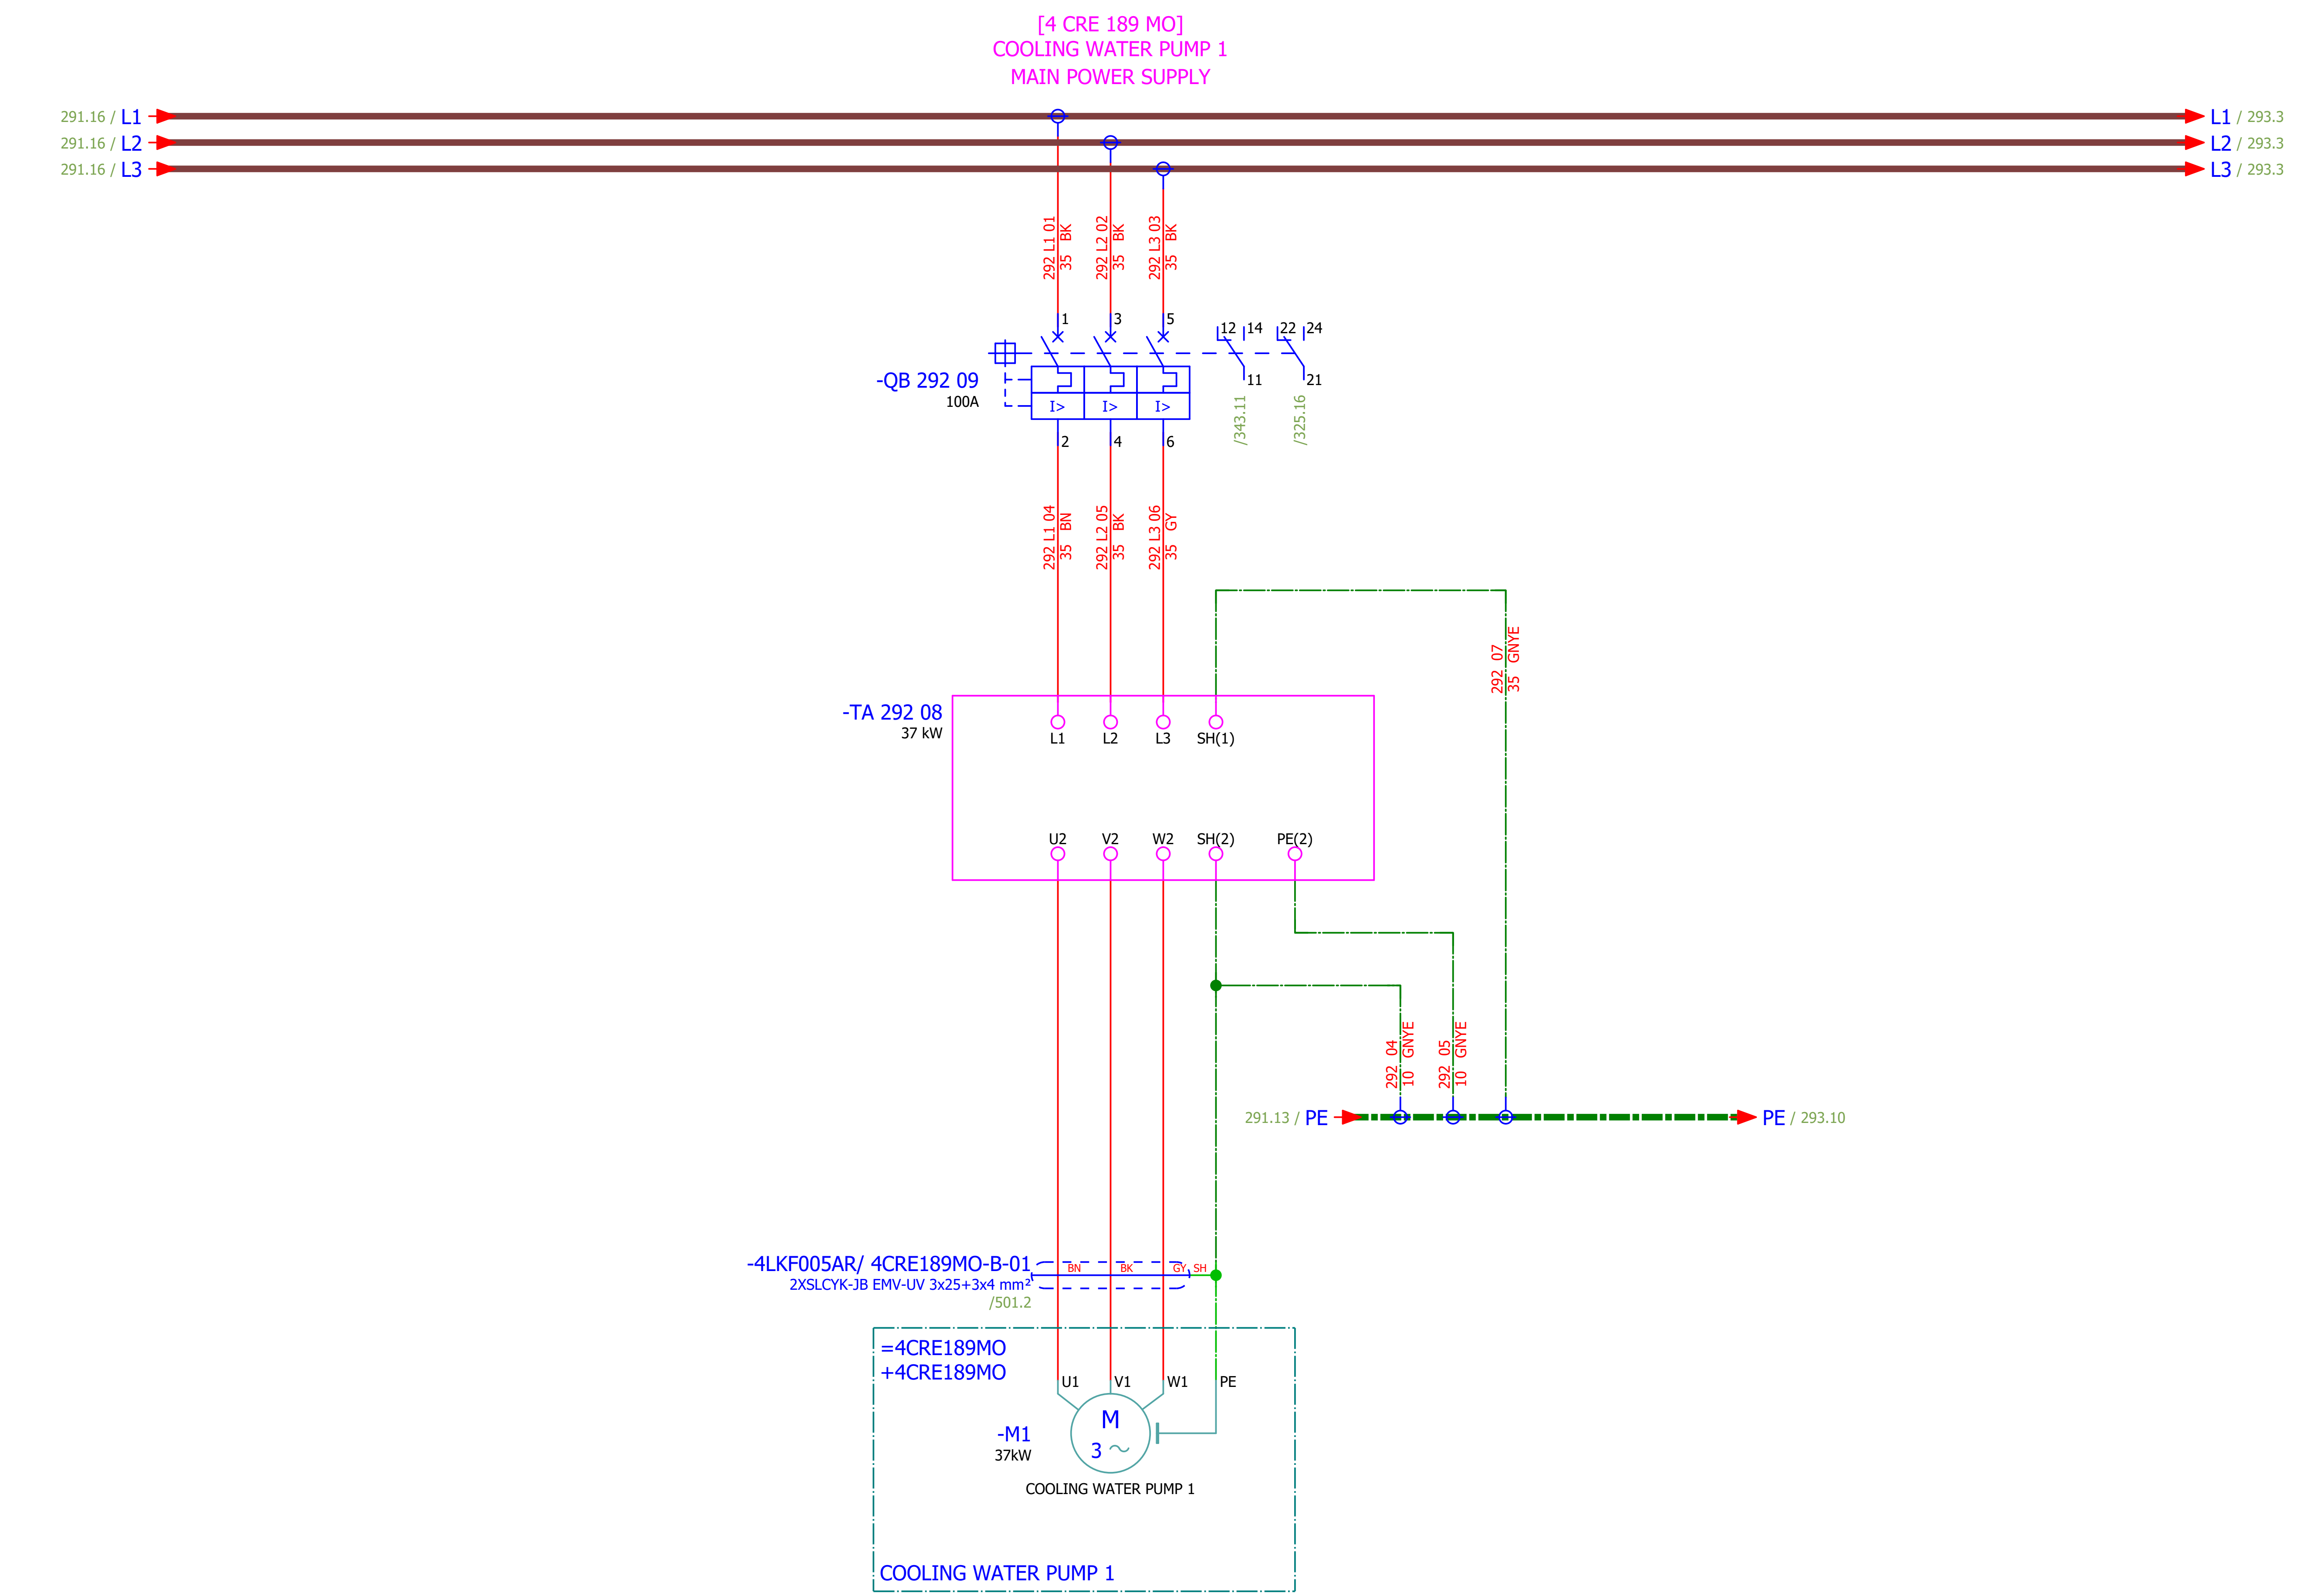

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Jere Radas									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 1 - MAIN POWER SUPPLY	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 292
Format:	A3								+4LKF005AR	Next: 293

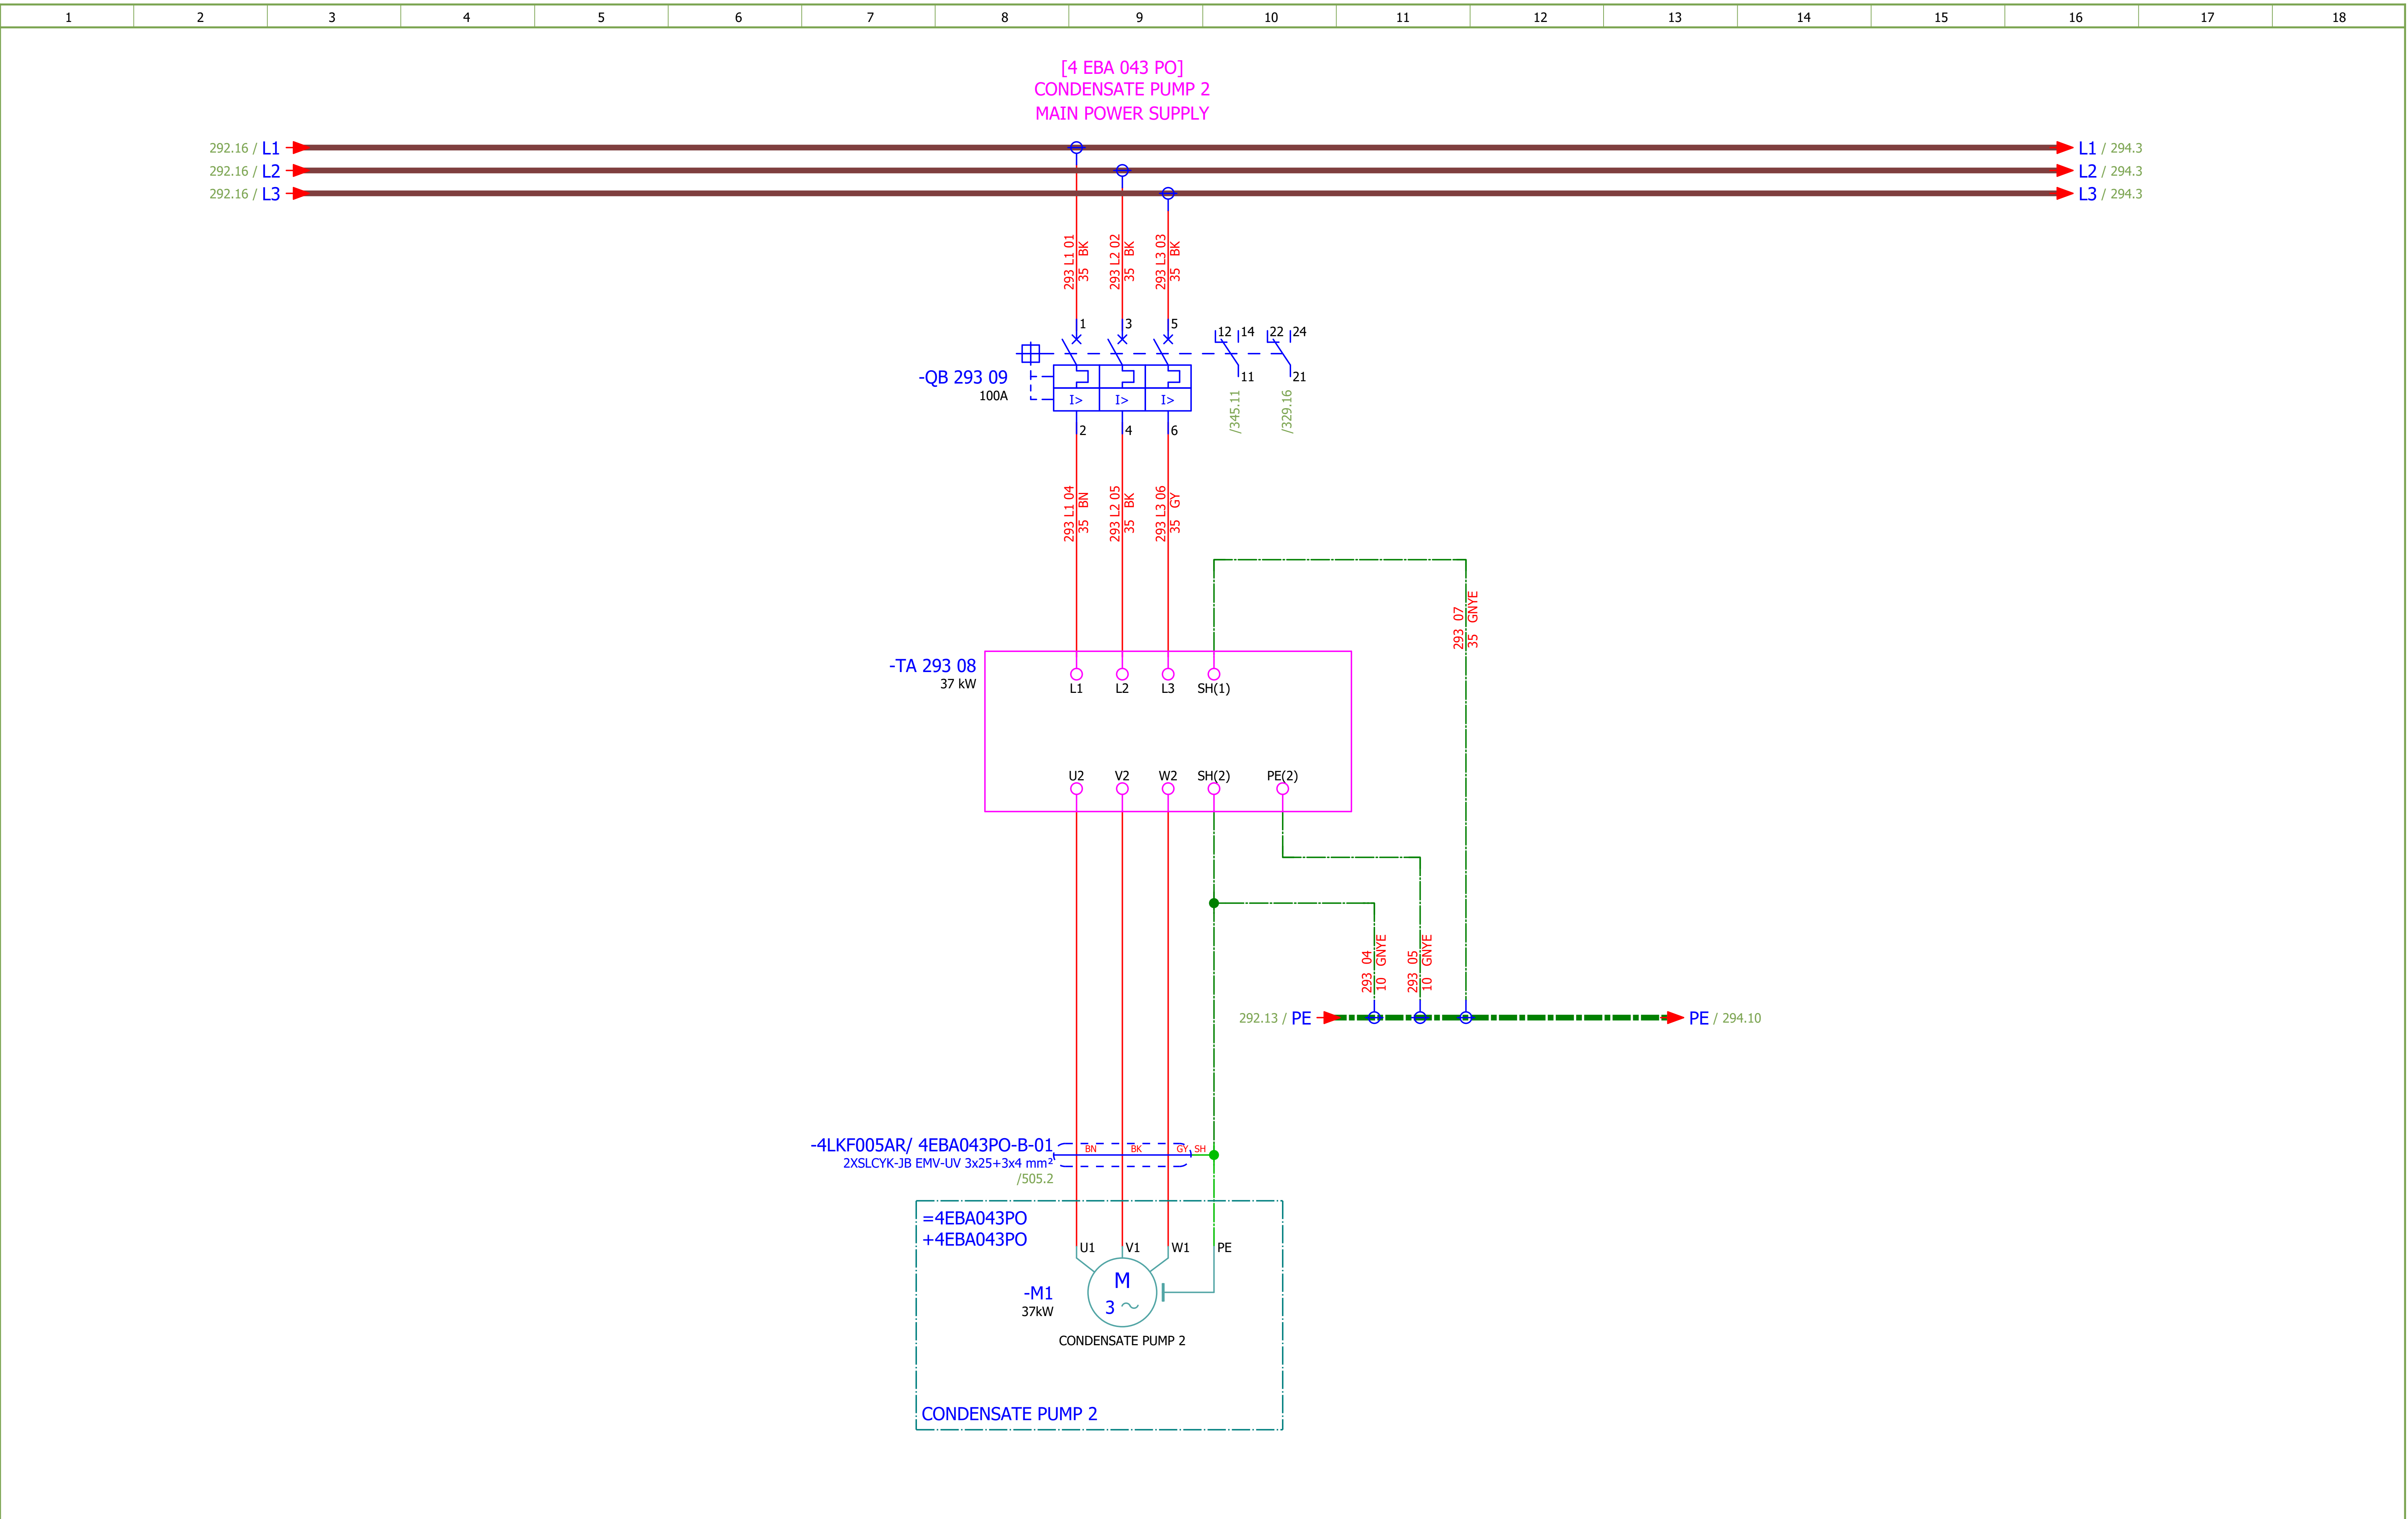

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Jere Radas									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: CONDENSATE PUMP 2 - MAIN POWER SUPPLY	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 293
Format:	A3								+4LKF005AR	Next: 294

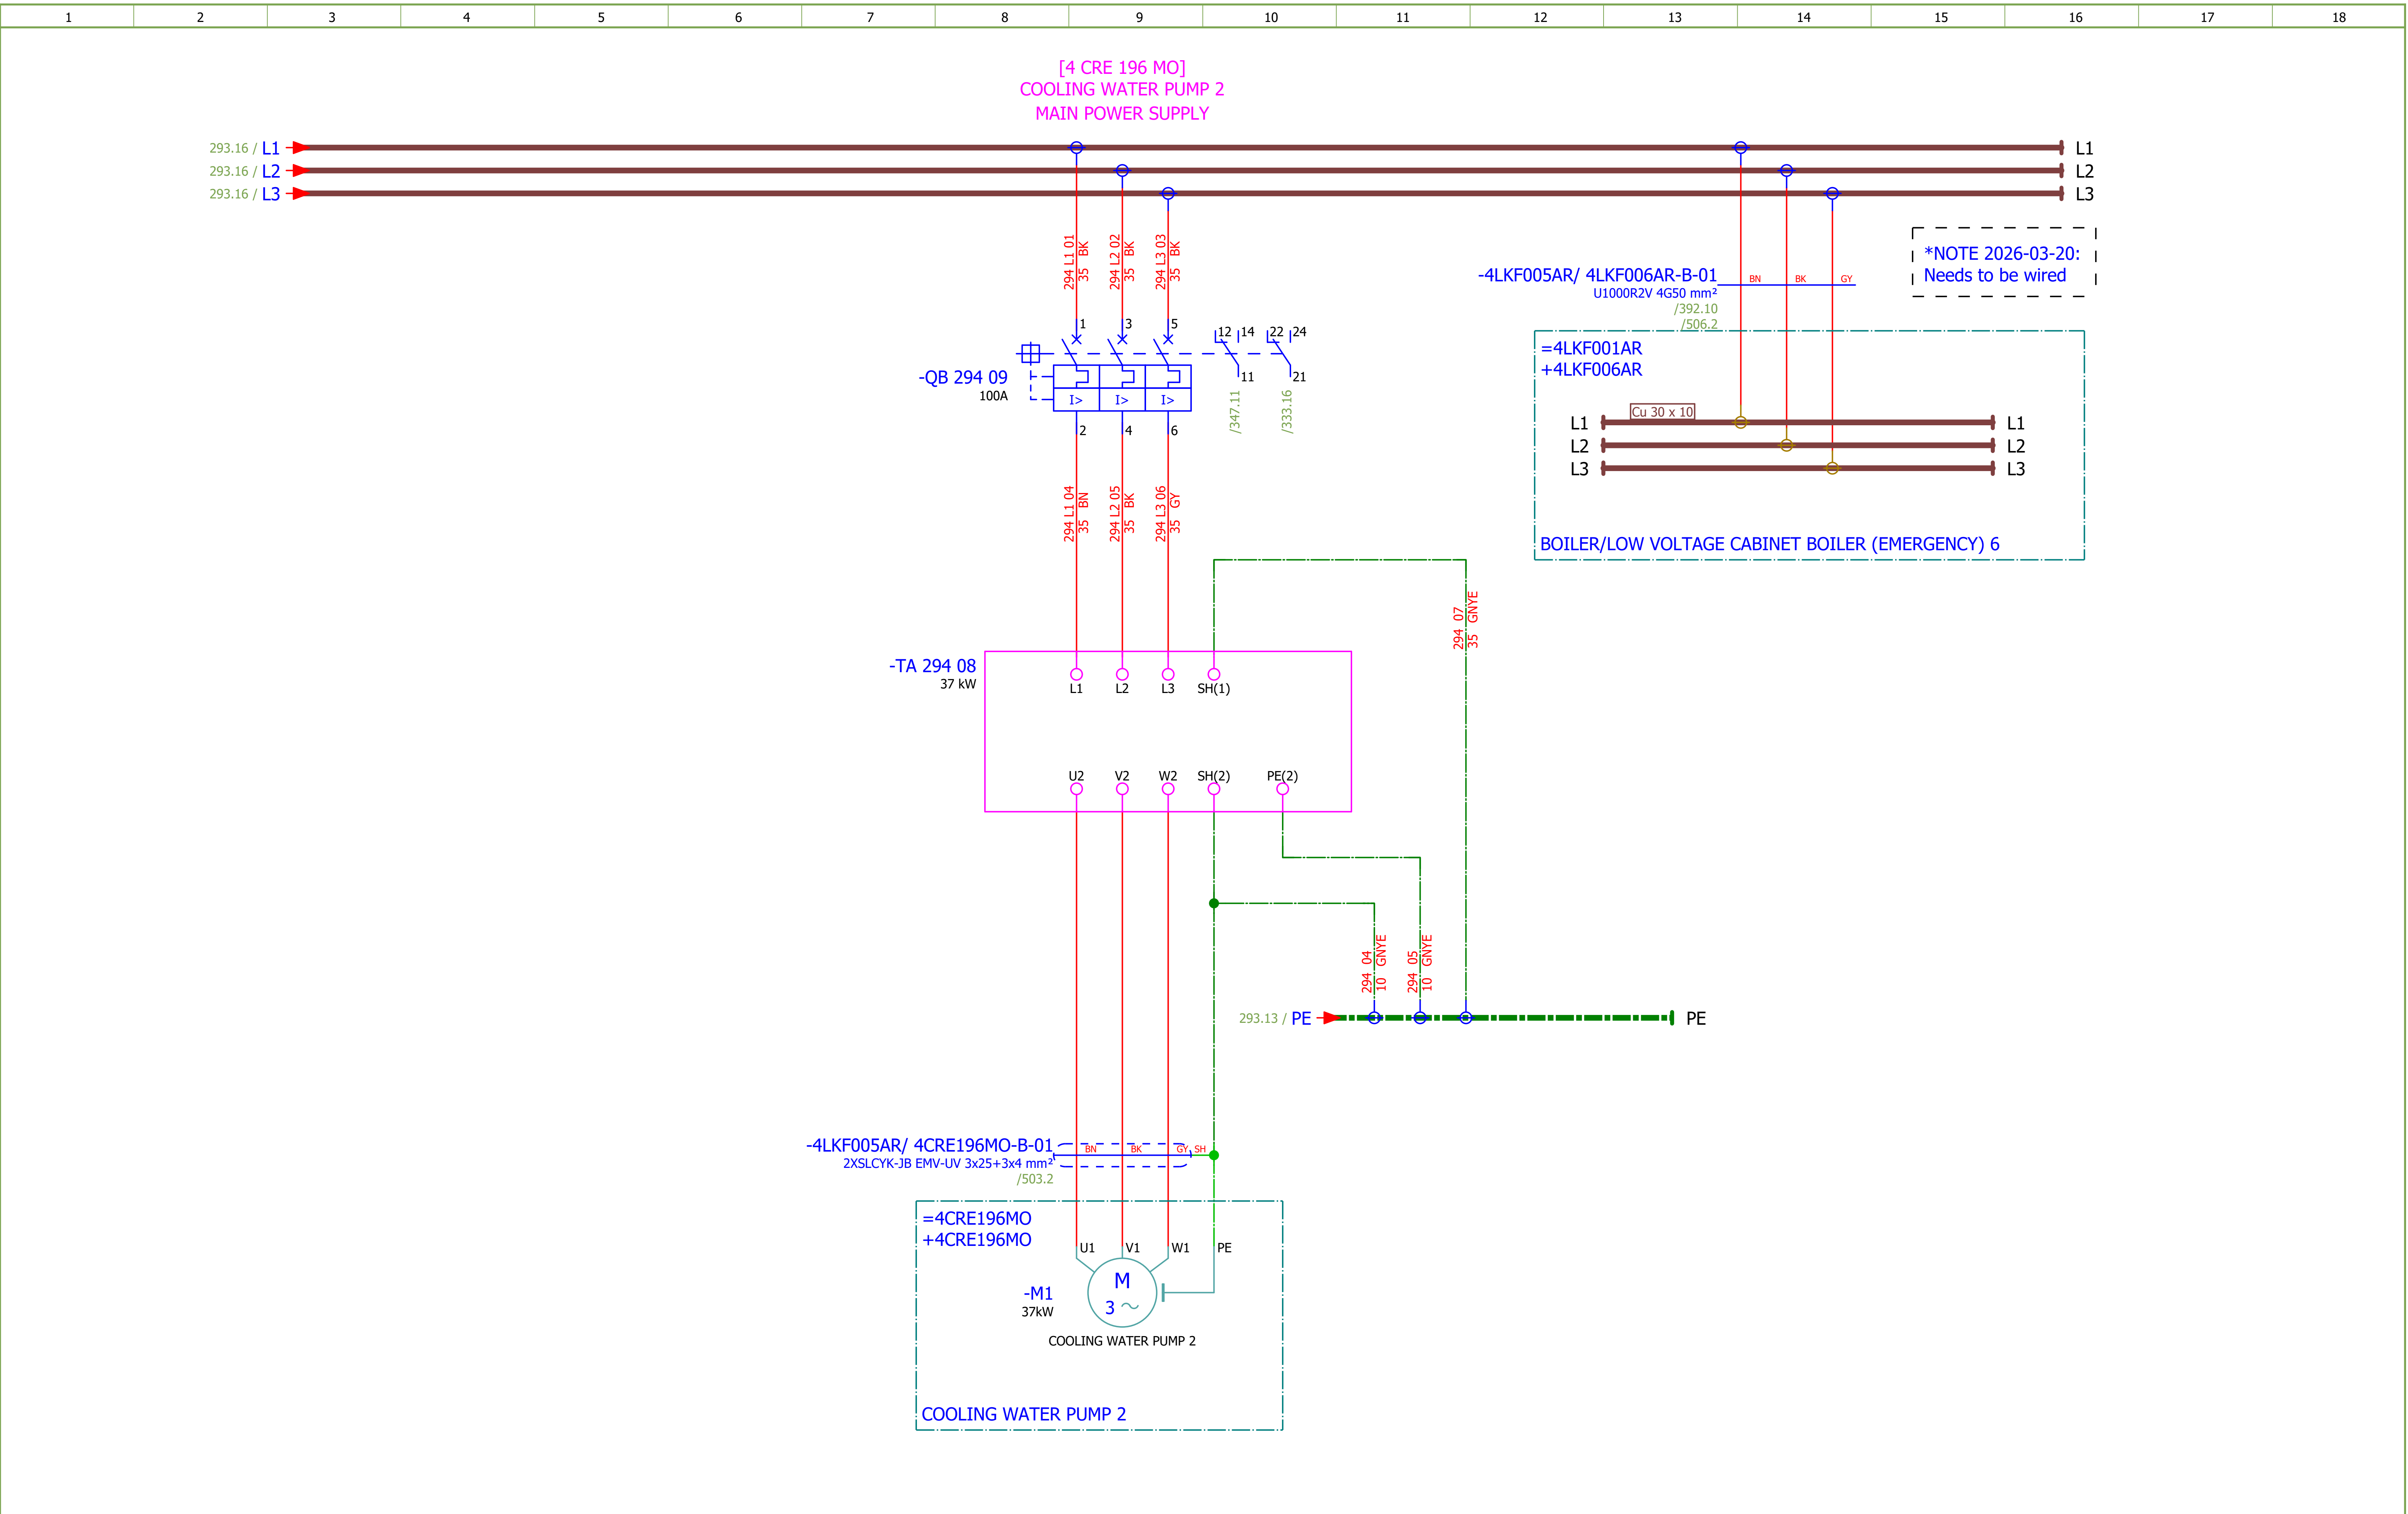

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	
Drawn:	Jere Radas									#D
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 2 - MAIN POWER SUPPLY	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 294
Format:	A3								+4LKF005AR	Next: 295

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

VFD GROUP 1
230 VAC AUXILIARY
POWER SUPPLY

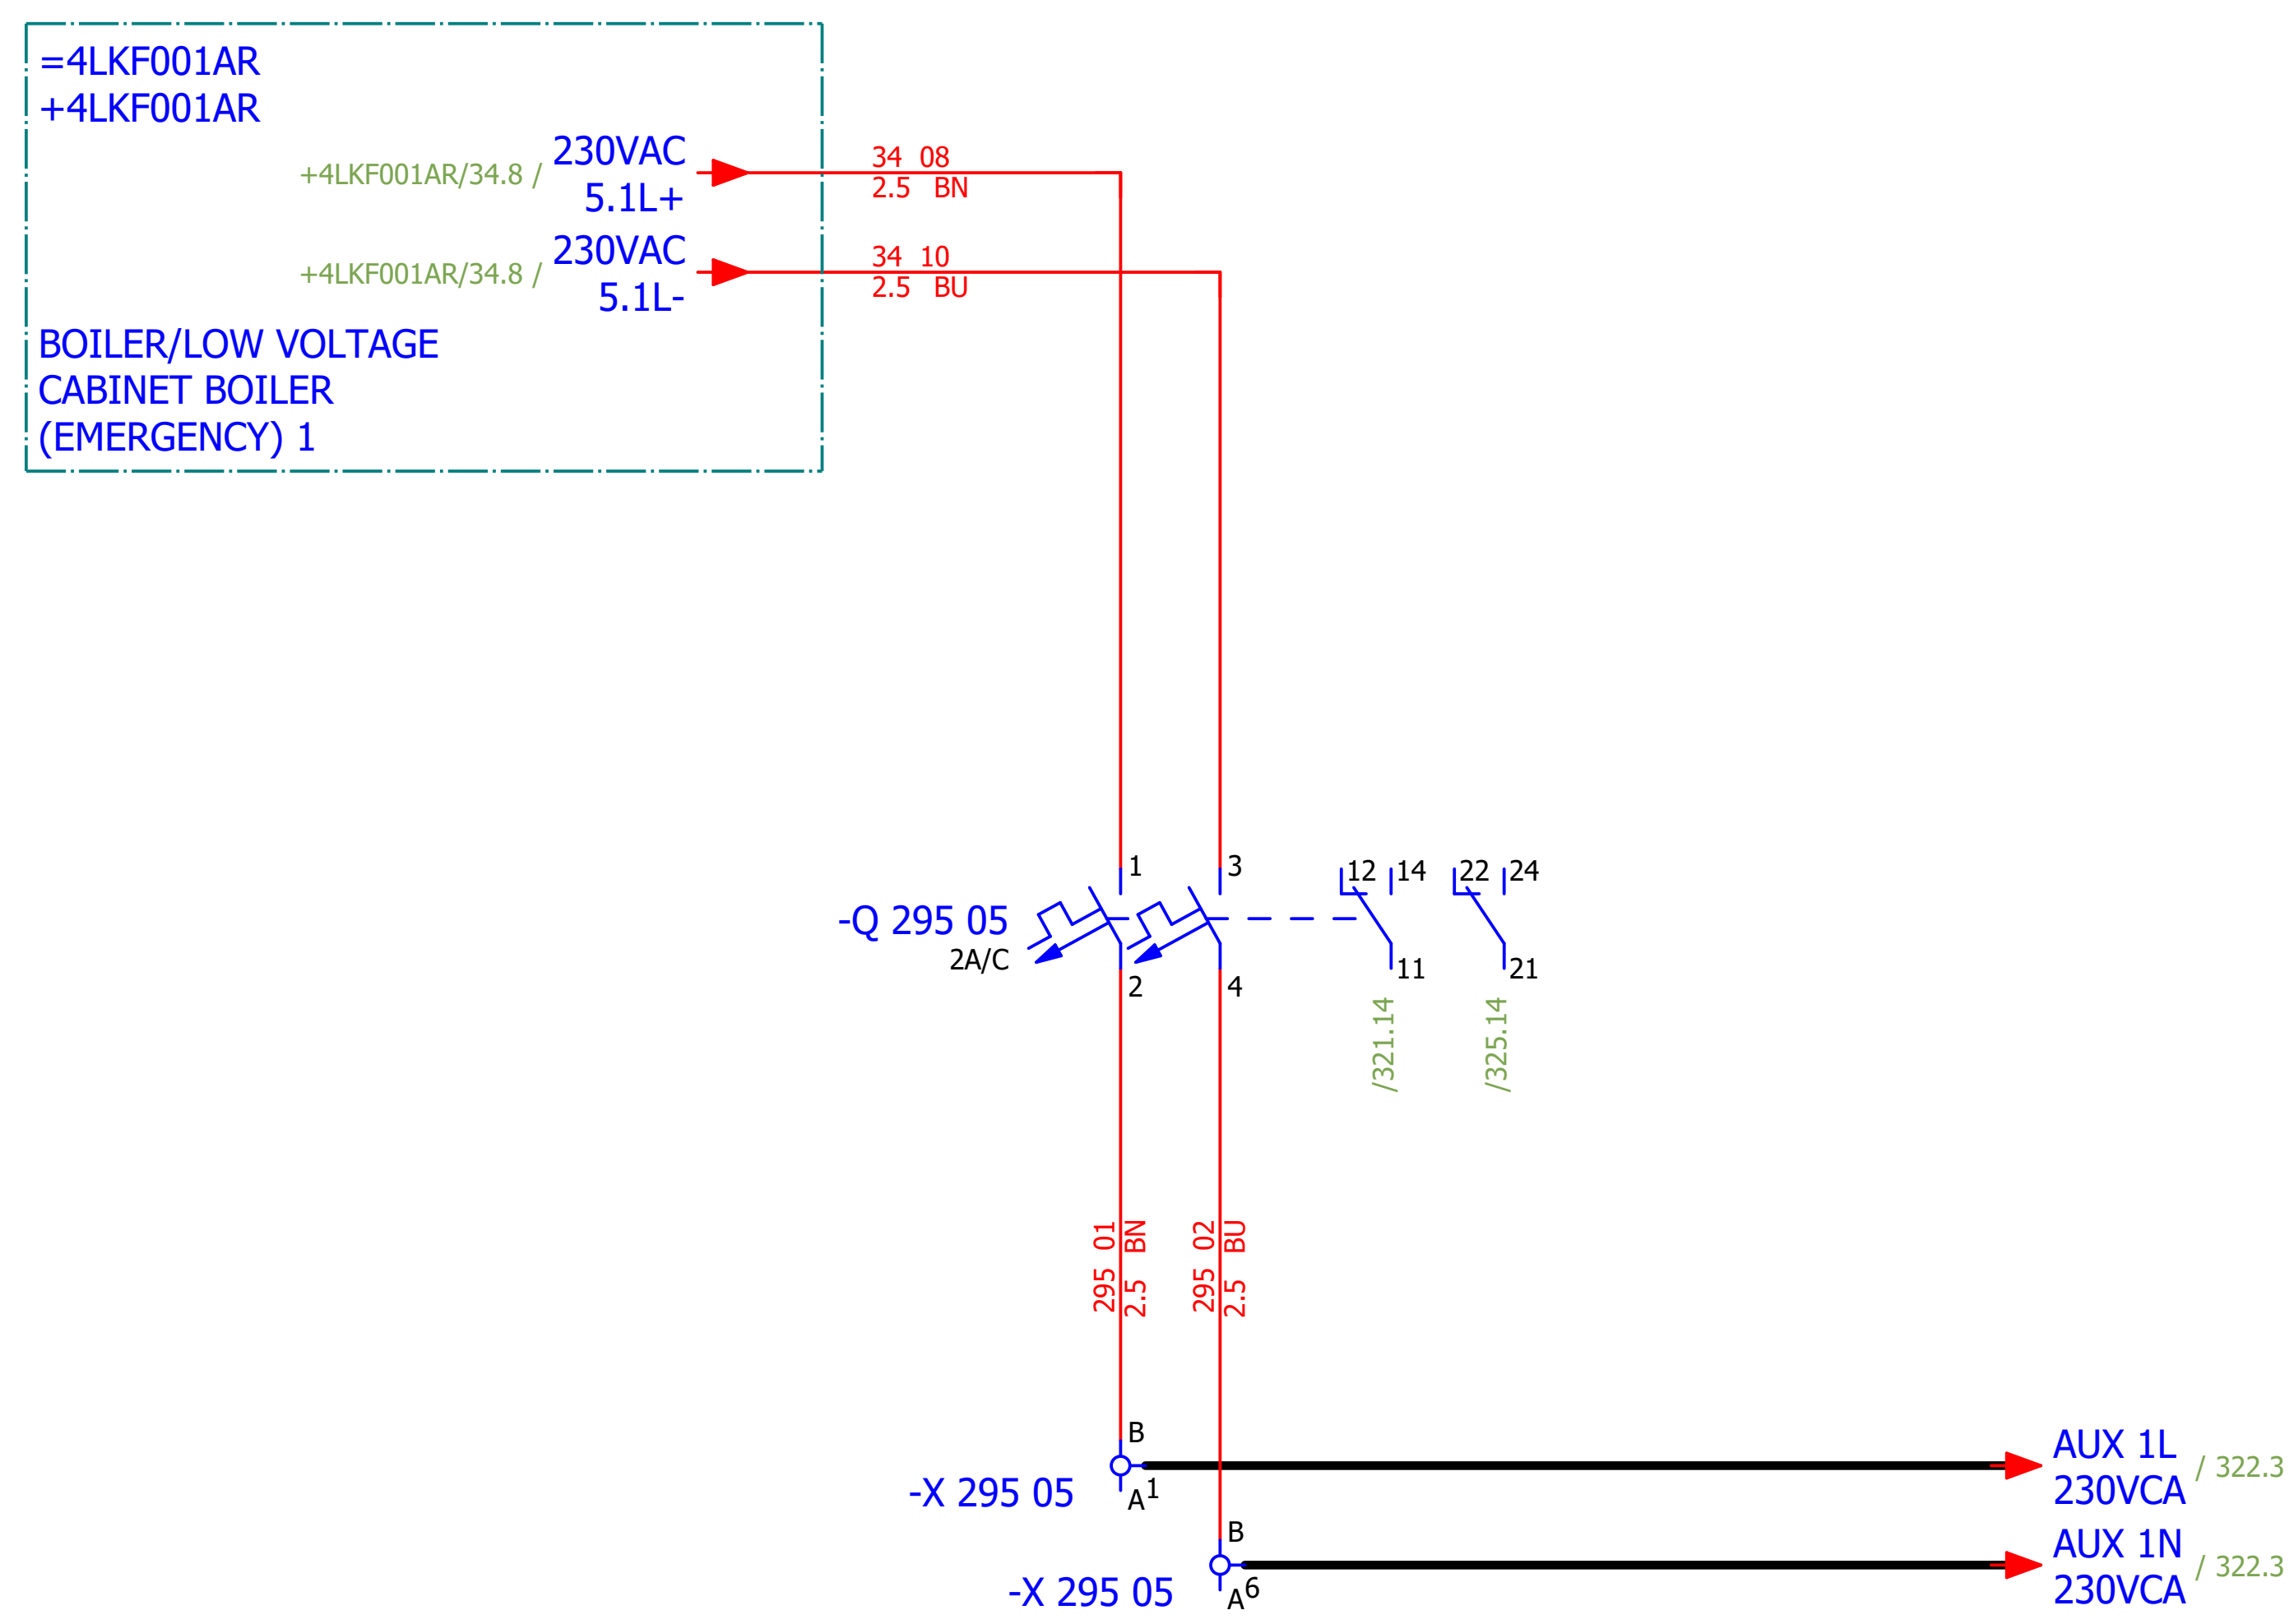

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Jere Radas									#D
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	VFD GROUP 1 - 230 VAC AUXILIARY POWER SUPPLY	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR / Sheet: 295
Format:	A3									+4LKF005AR / Next: 296

VFD GROUP 1
48 VAC AUXILIARY
POWER SUPPLY

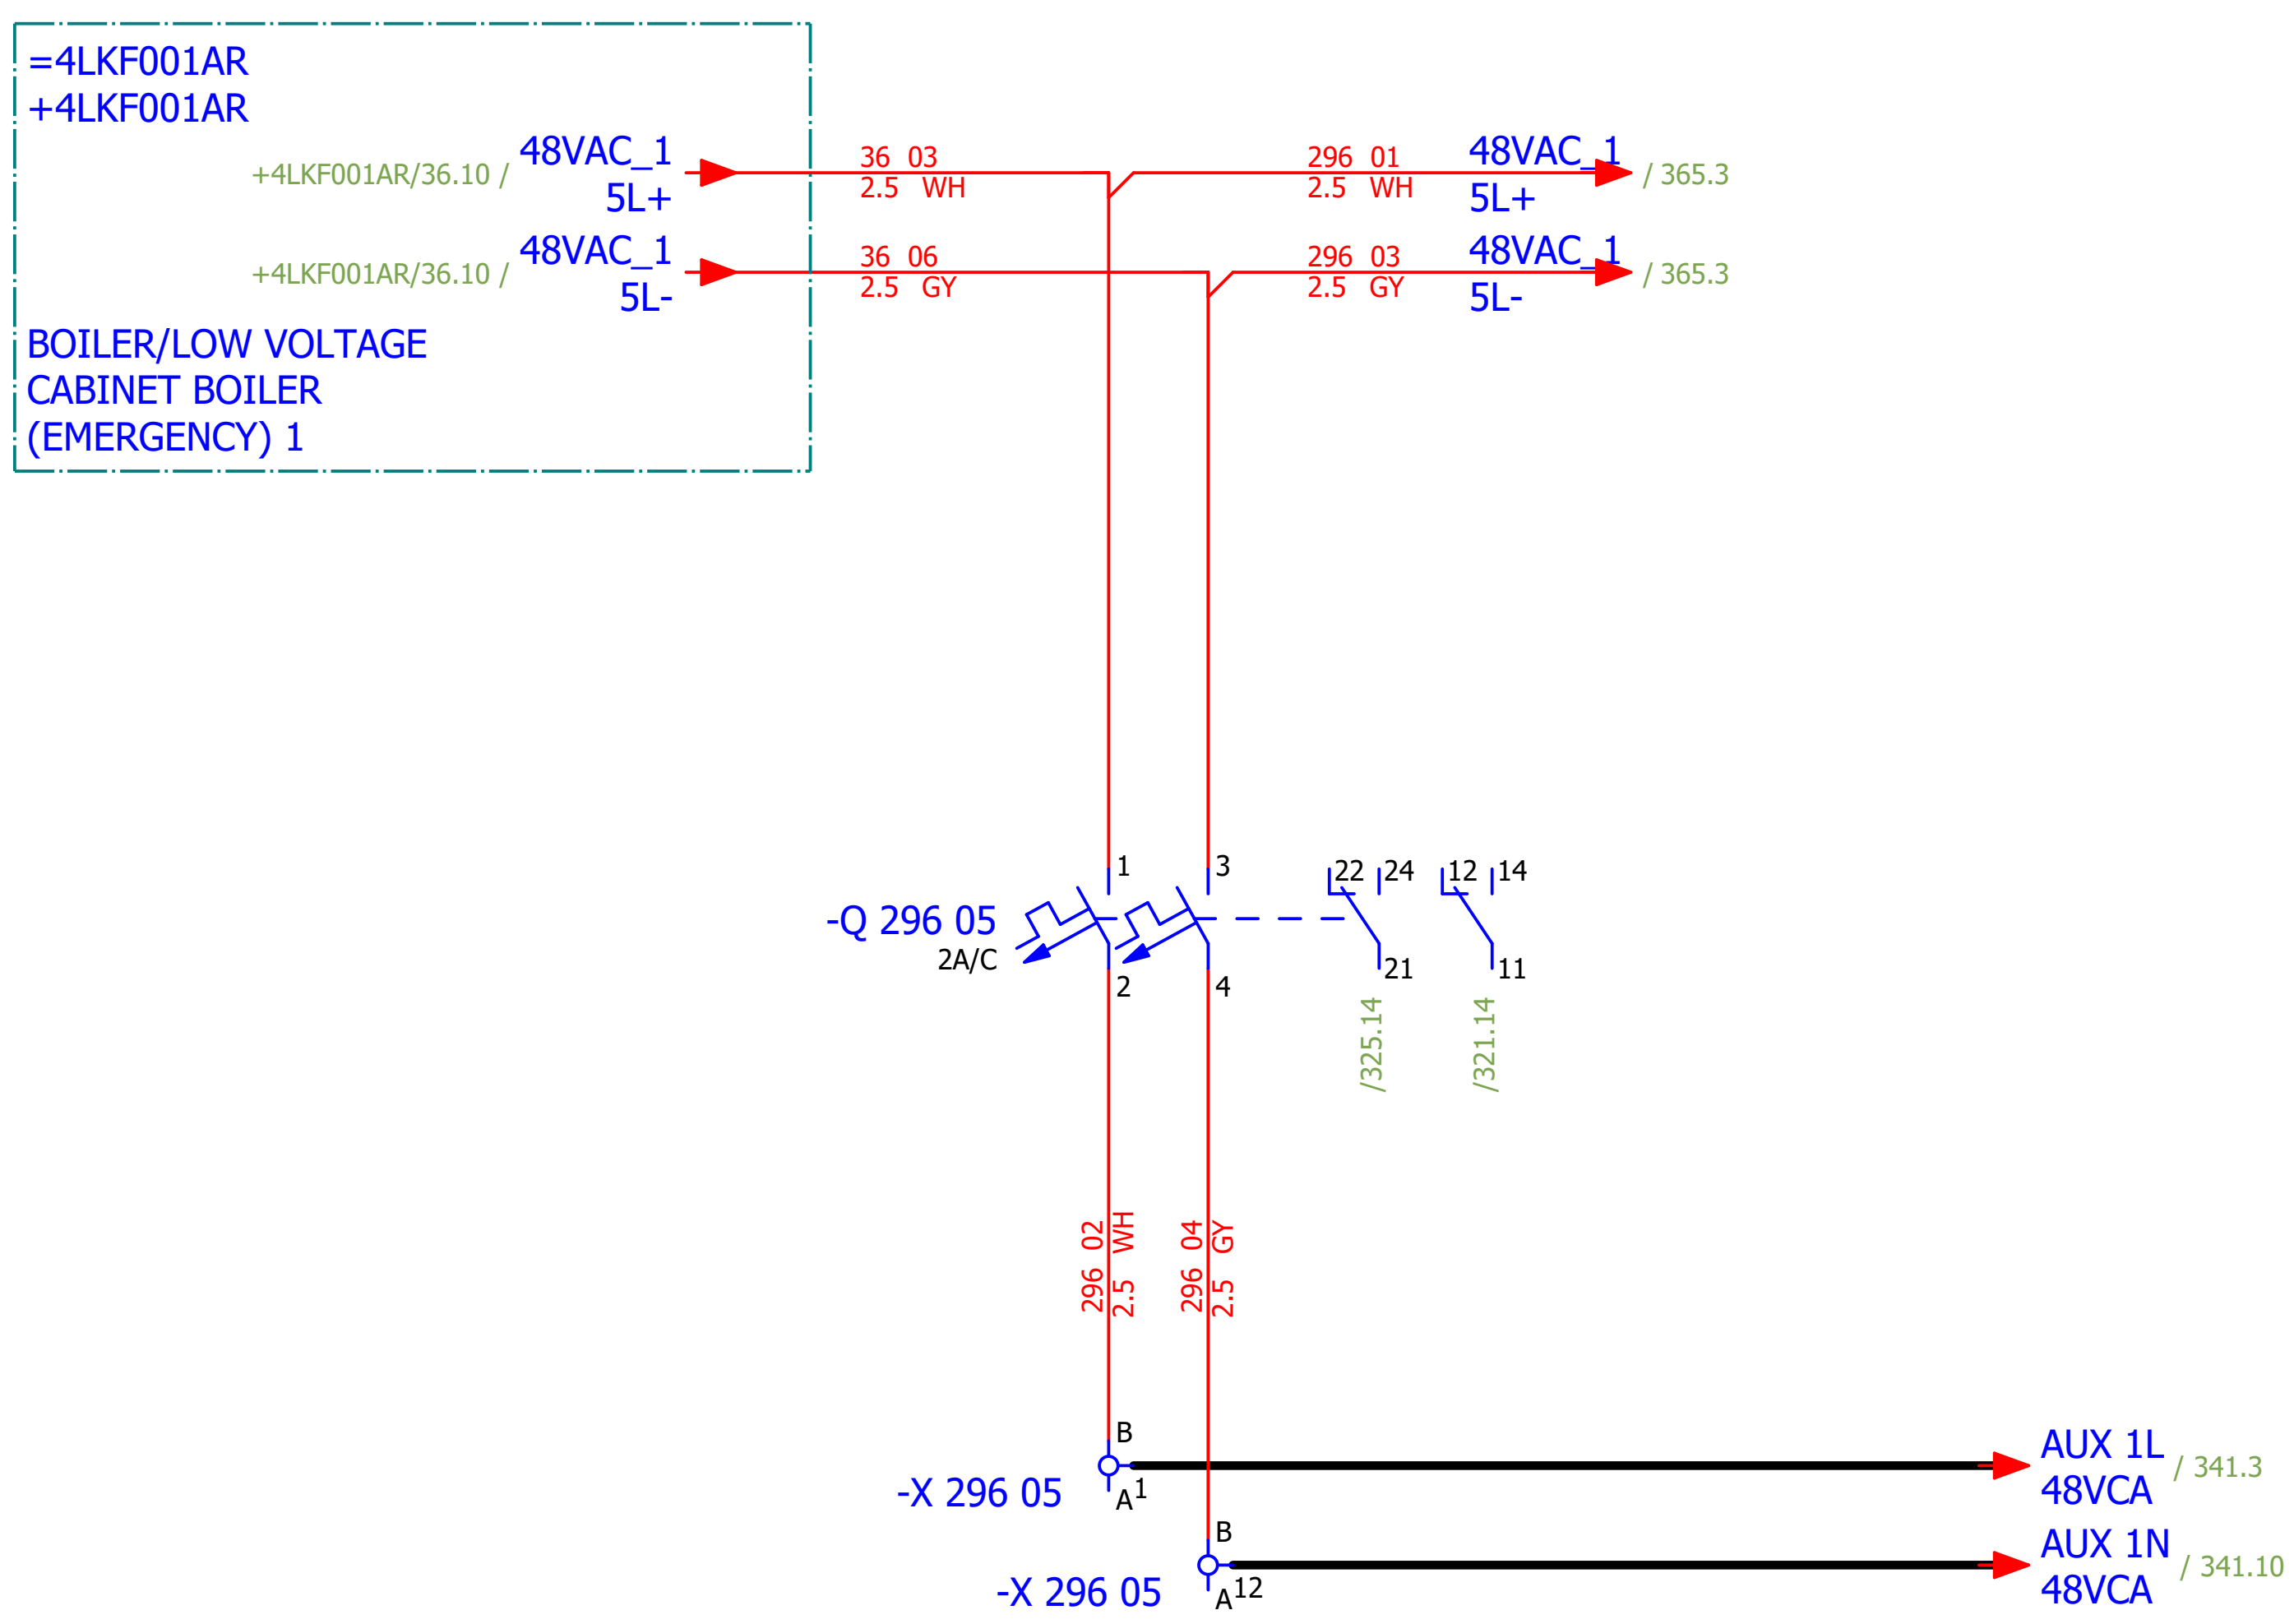

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5
Drawn:	Jere Radas				
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: VFD GROUP 1 - 48 VAC AUXILIARY POWER SUPPLY
Format:	A3				

Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 296
			+4LKF005AR	Next: 297

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

VFD GROUP 2
230 VAC AUXILIARY
POWER SUPPLY

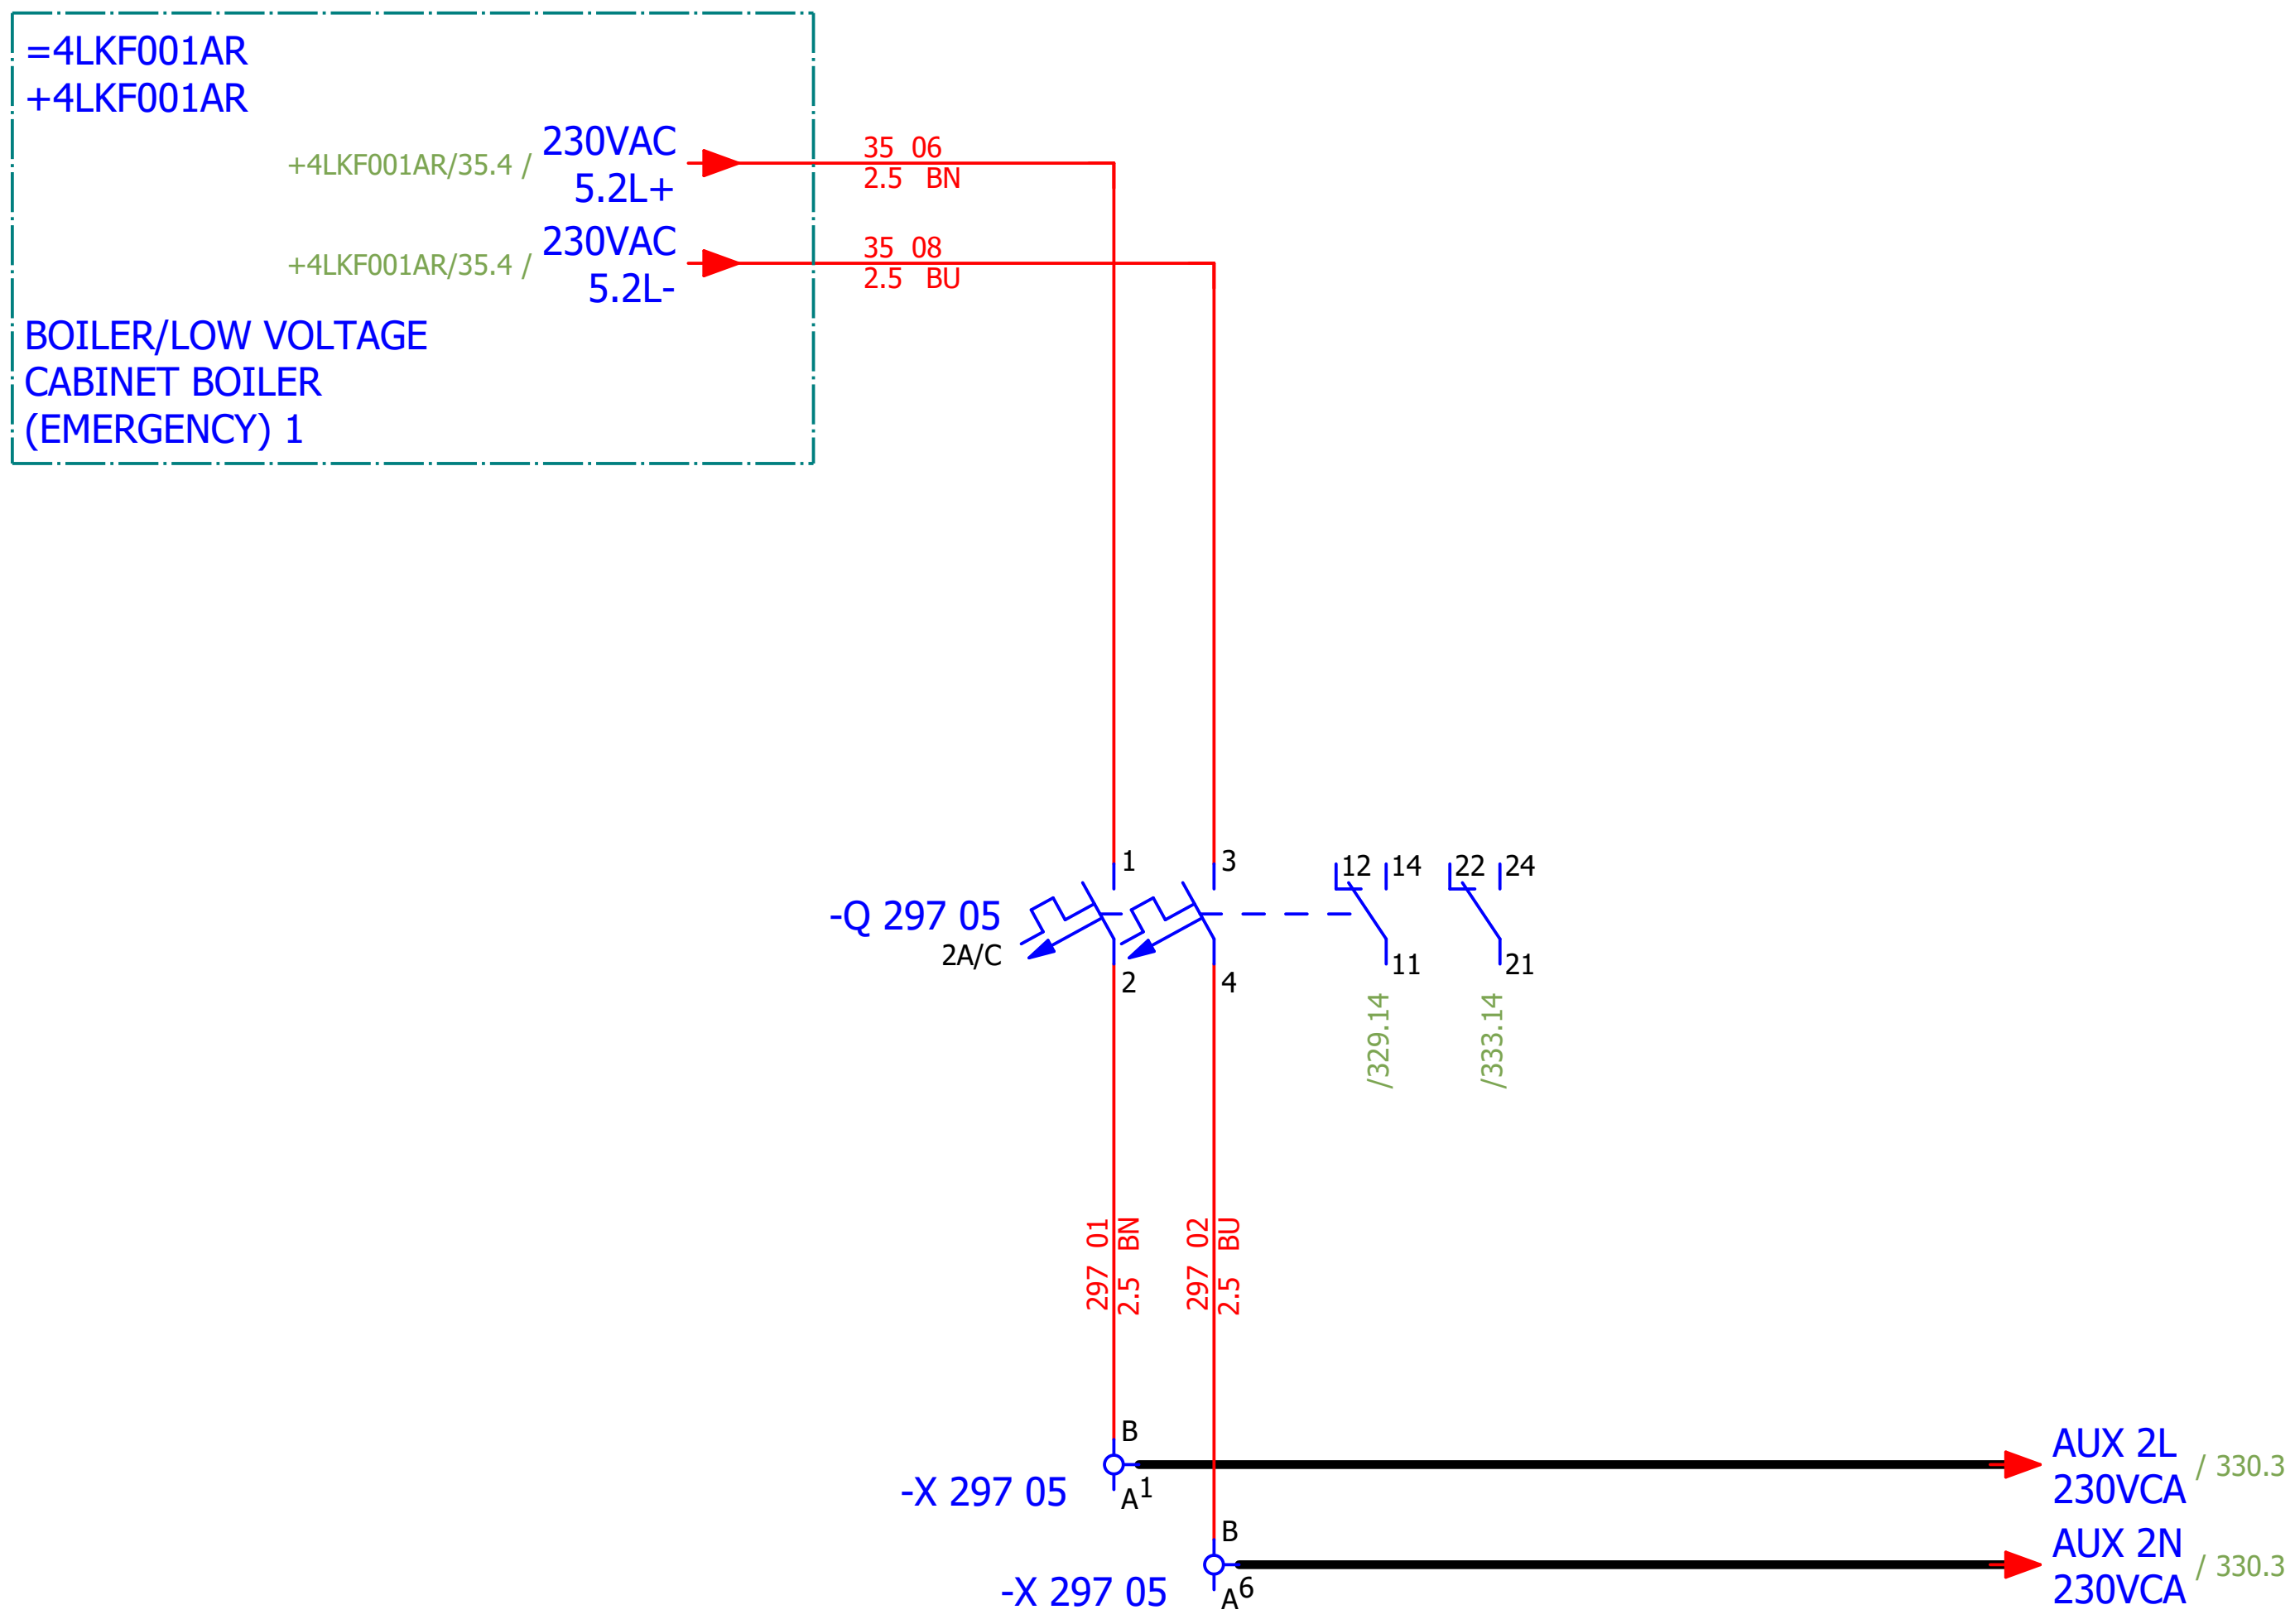

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Jere Radas									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: VFD GROUP 2 - 230 VAC AUXILIARY POWER SUPPLY	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 297
Format:	A3								+4LKF005AR	Next: 298

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

VFD GROUP 2
48 VAC AUXILIARY
POWER SUPPLY

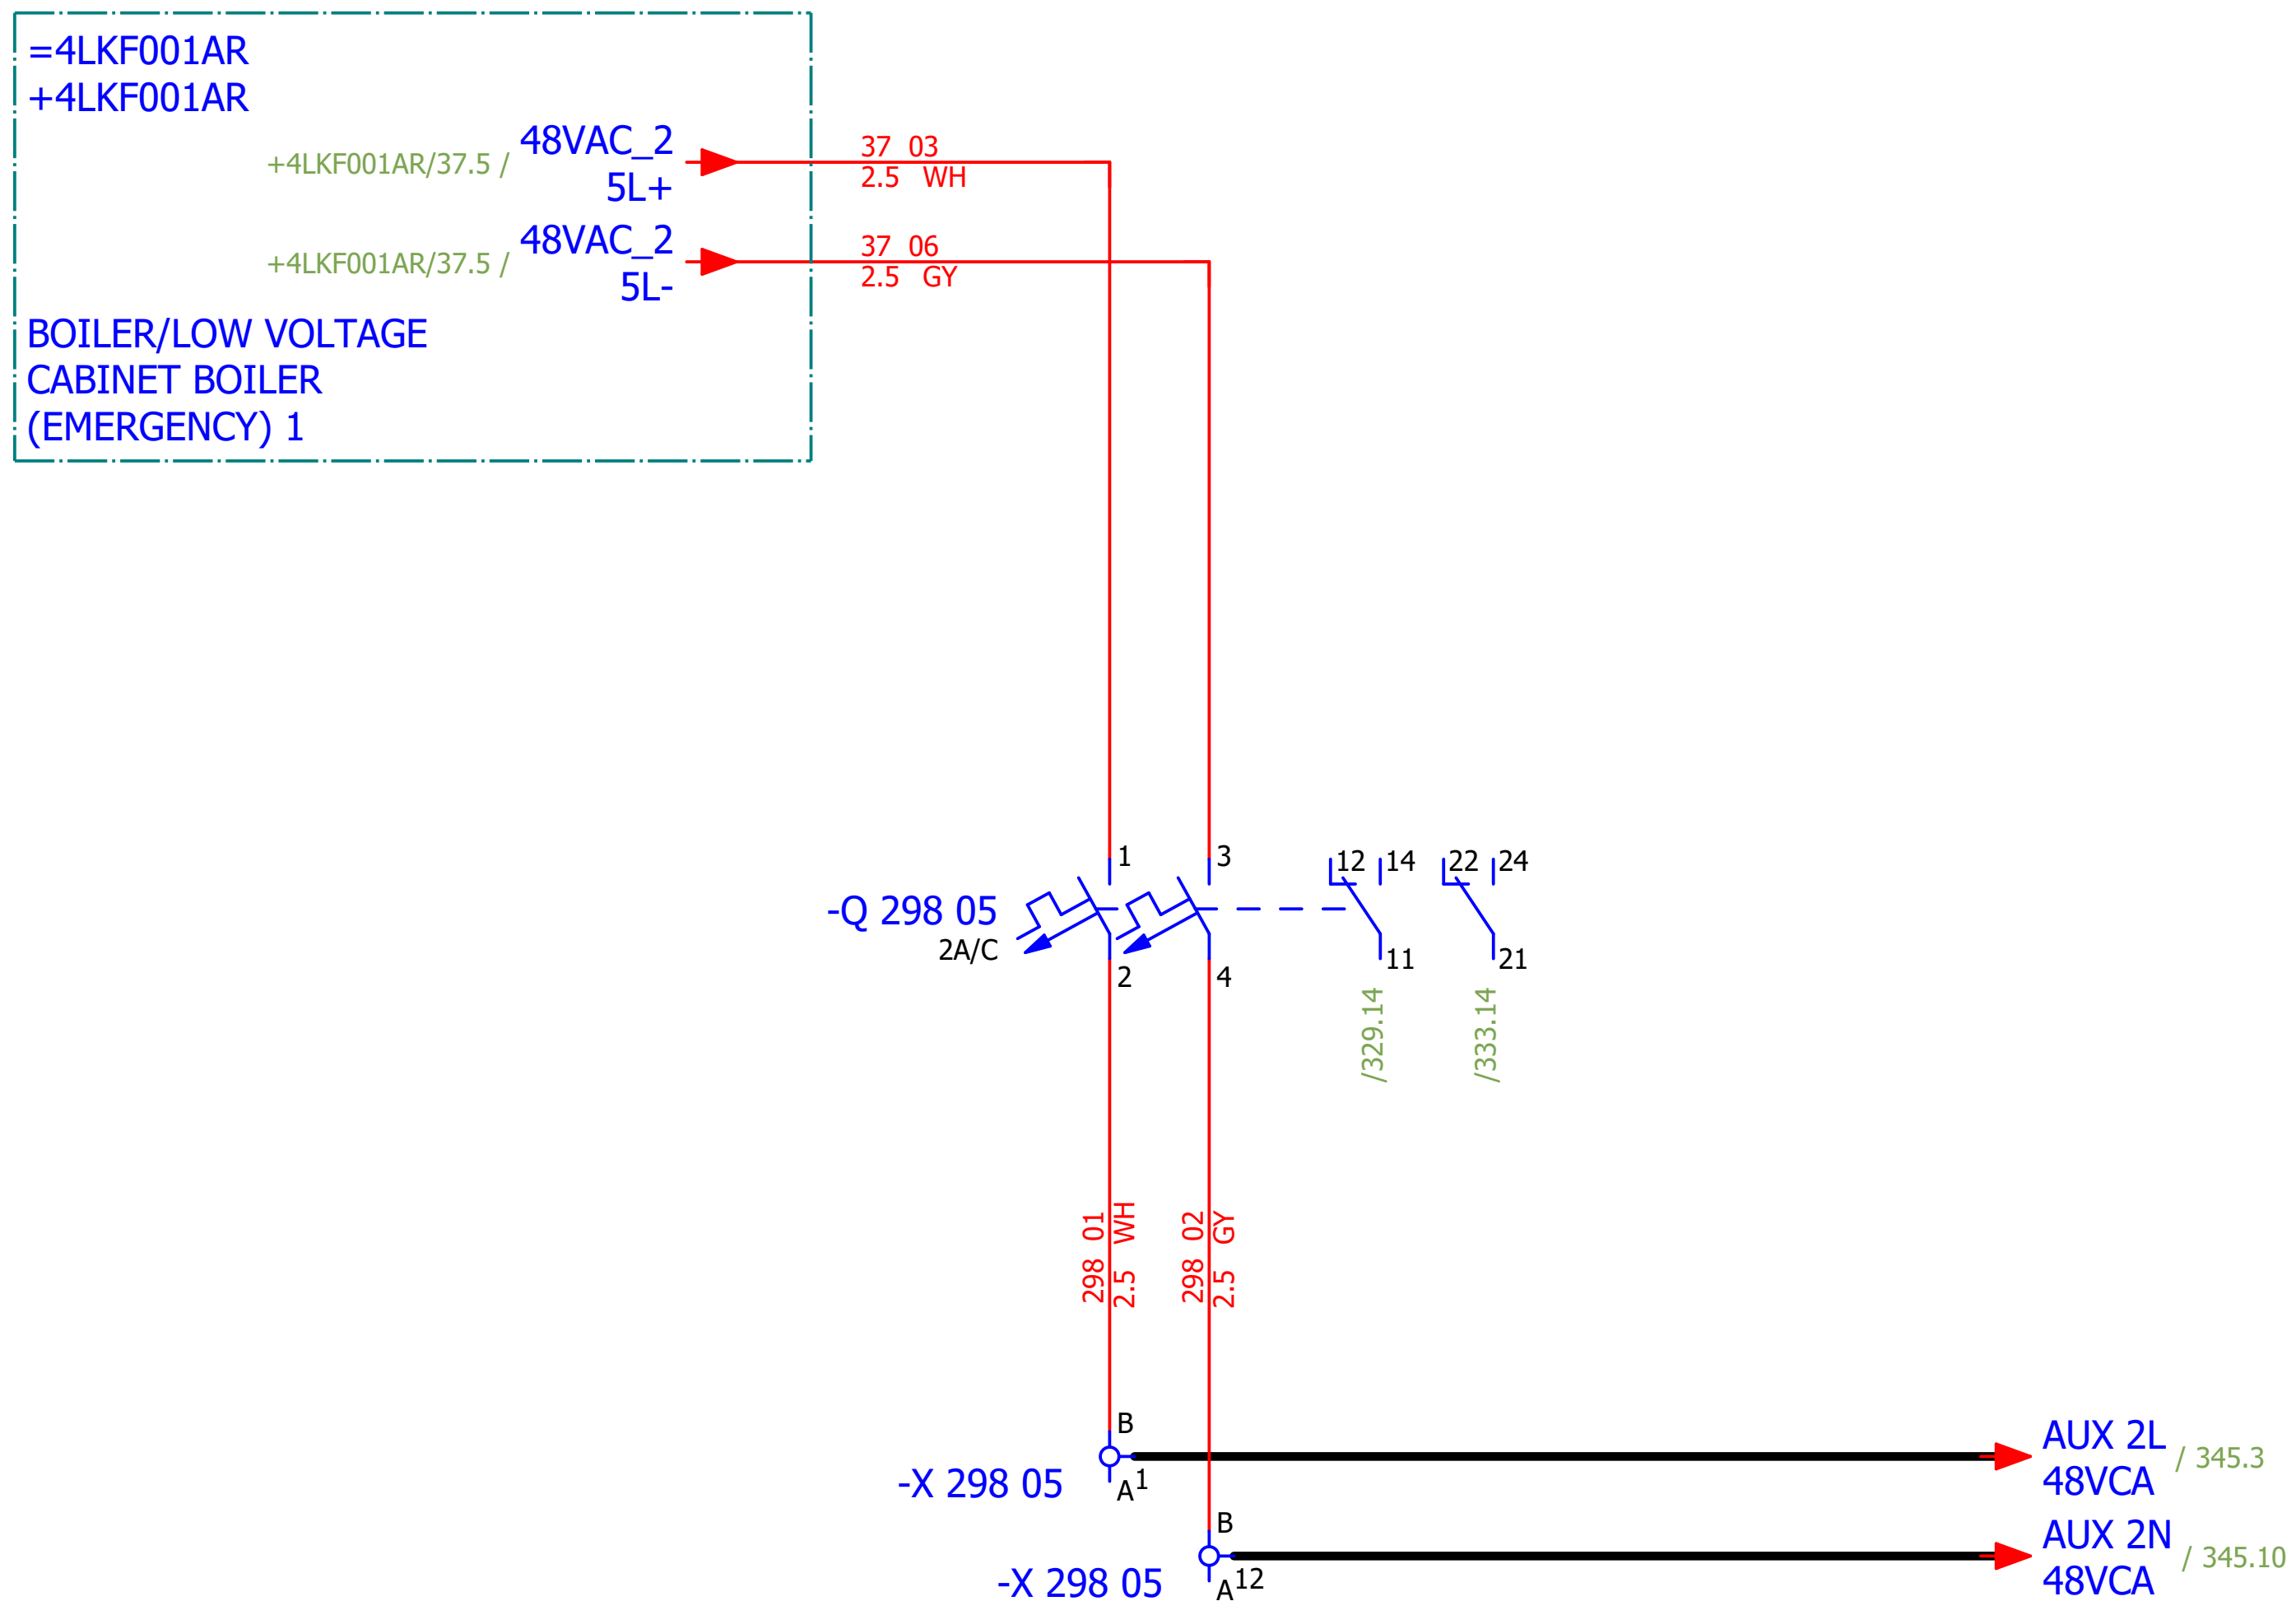

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#D
Drawn:	Jere Radas									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: VFD GROUP 2 - 48 VAC AUXILIARY POWER SUPPLY	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 298
Format:	A3								+4LKF005AR	Next: 311

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

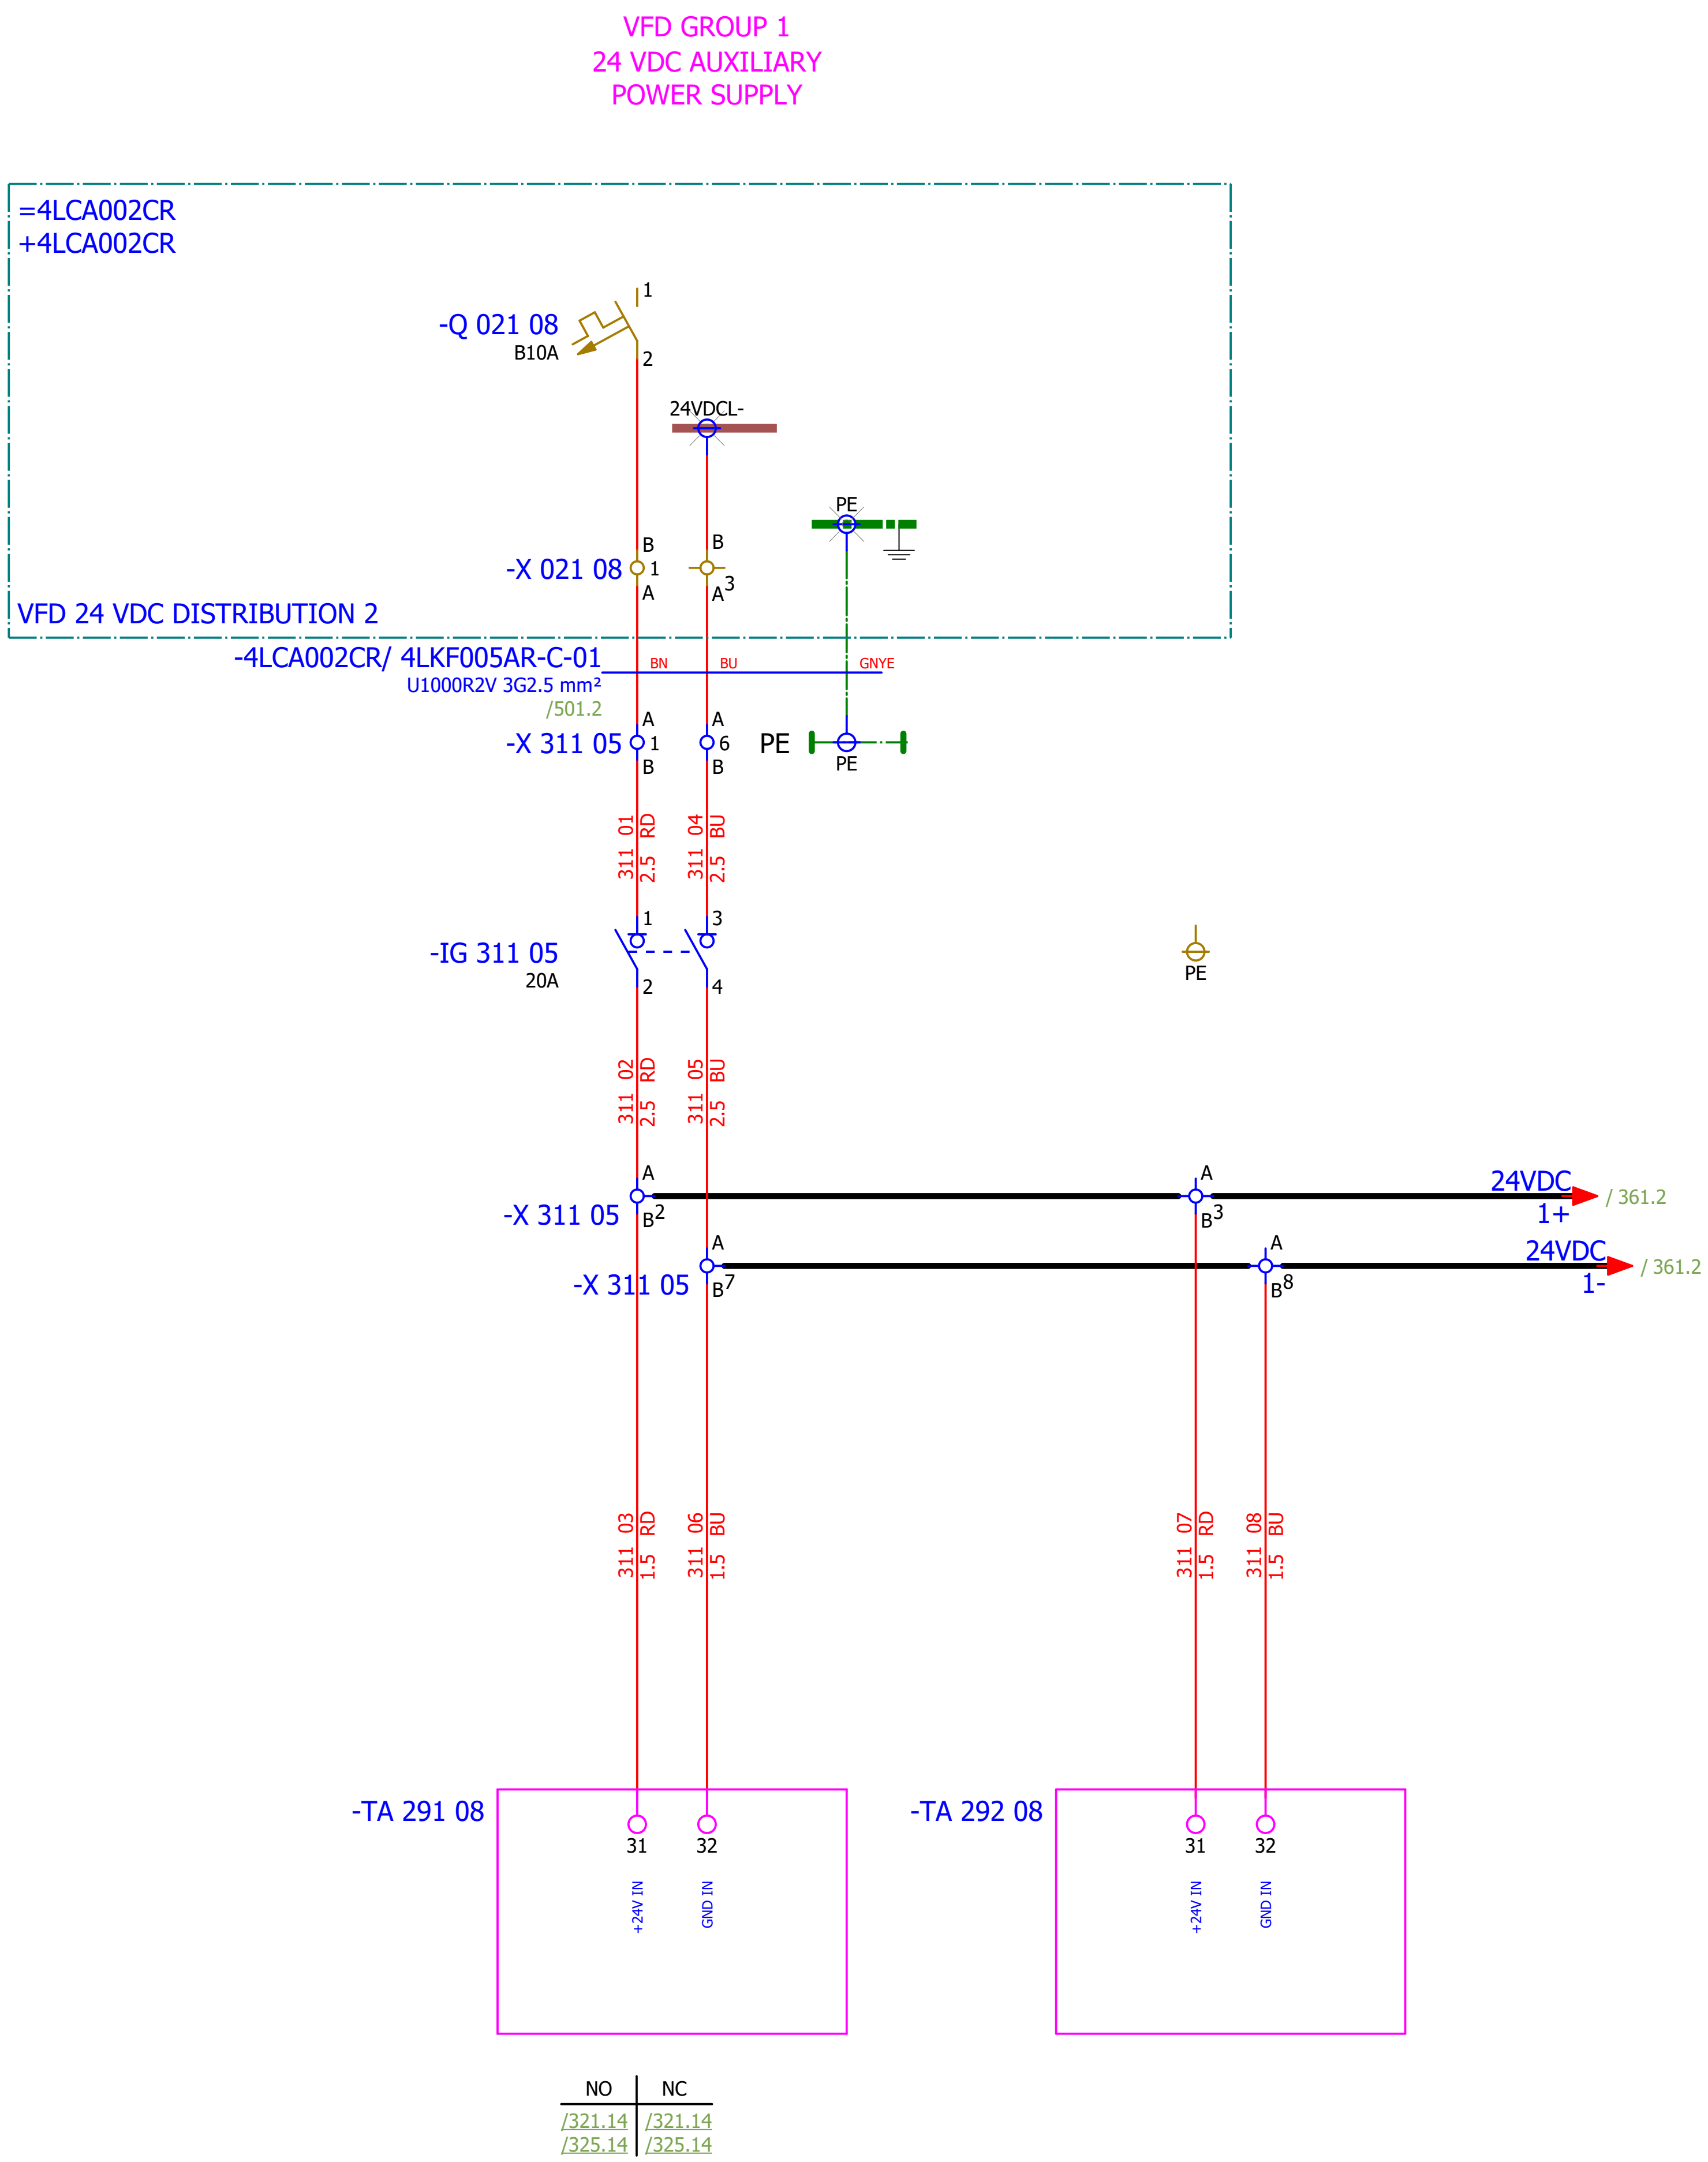

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Jere Radas								#G
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: VFD GROUP 1 - 24 VDC AUXILIARY POWER SUPPLY	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 311
Format:	A3							+4LKF005AR	Next: 312

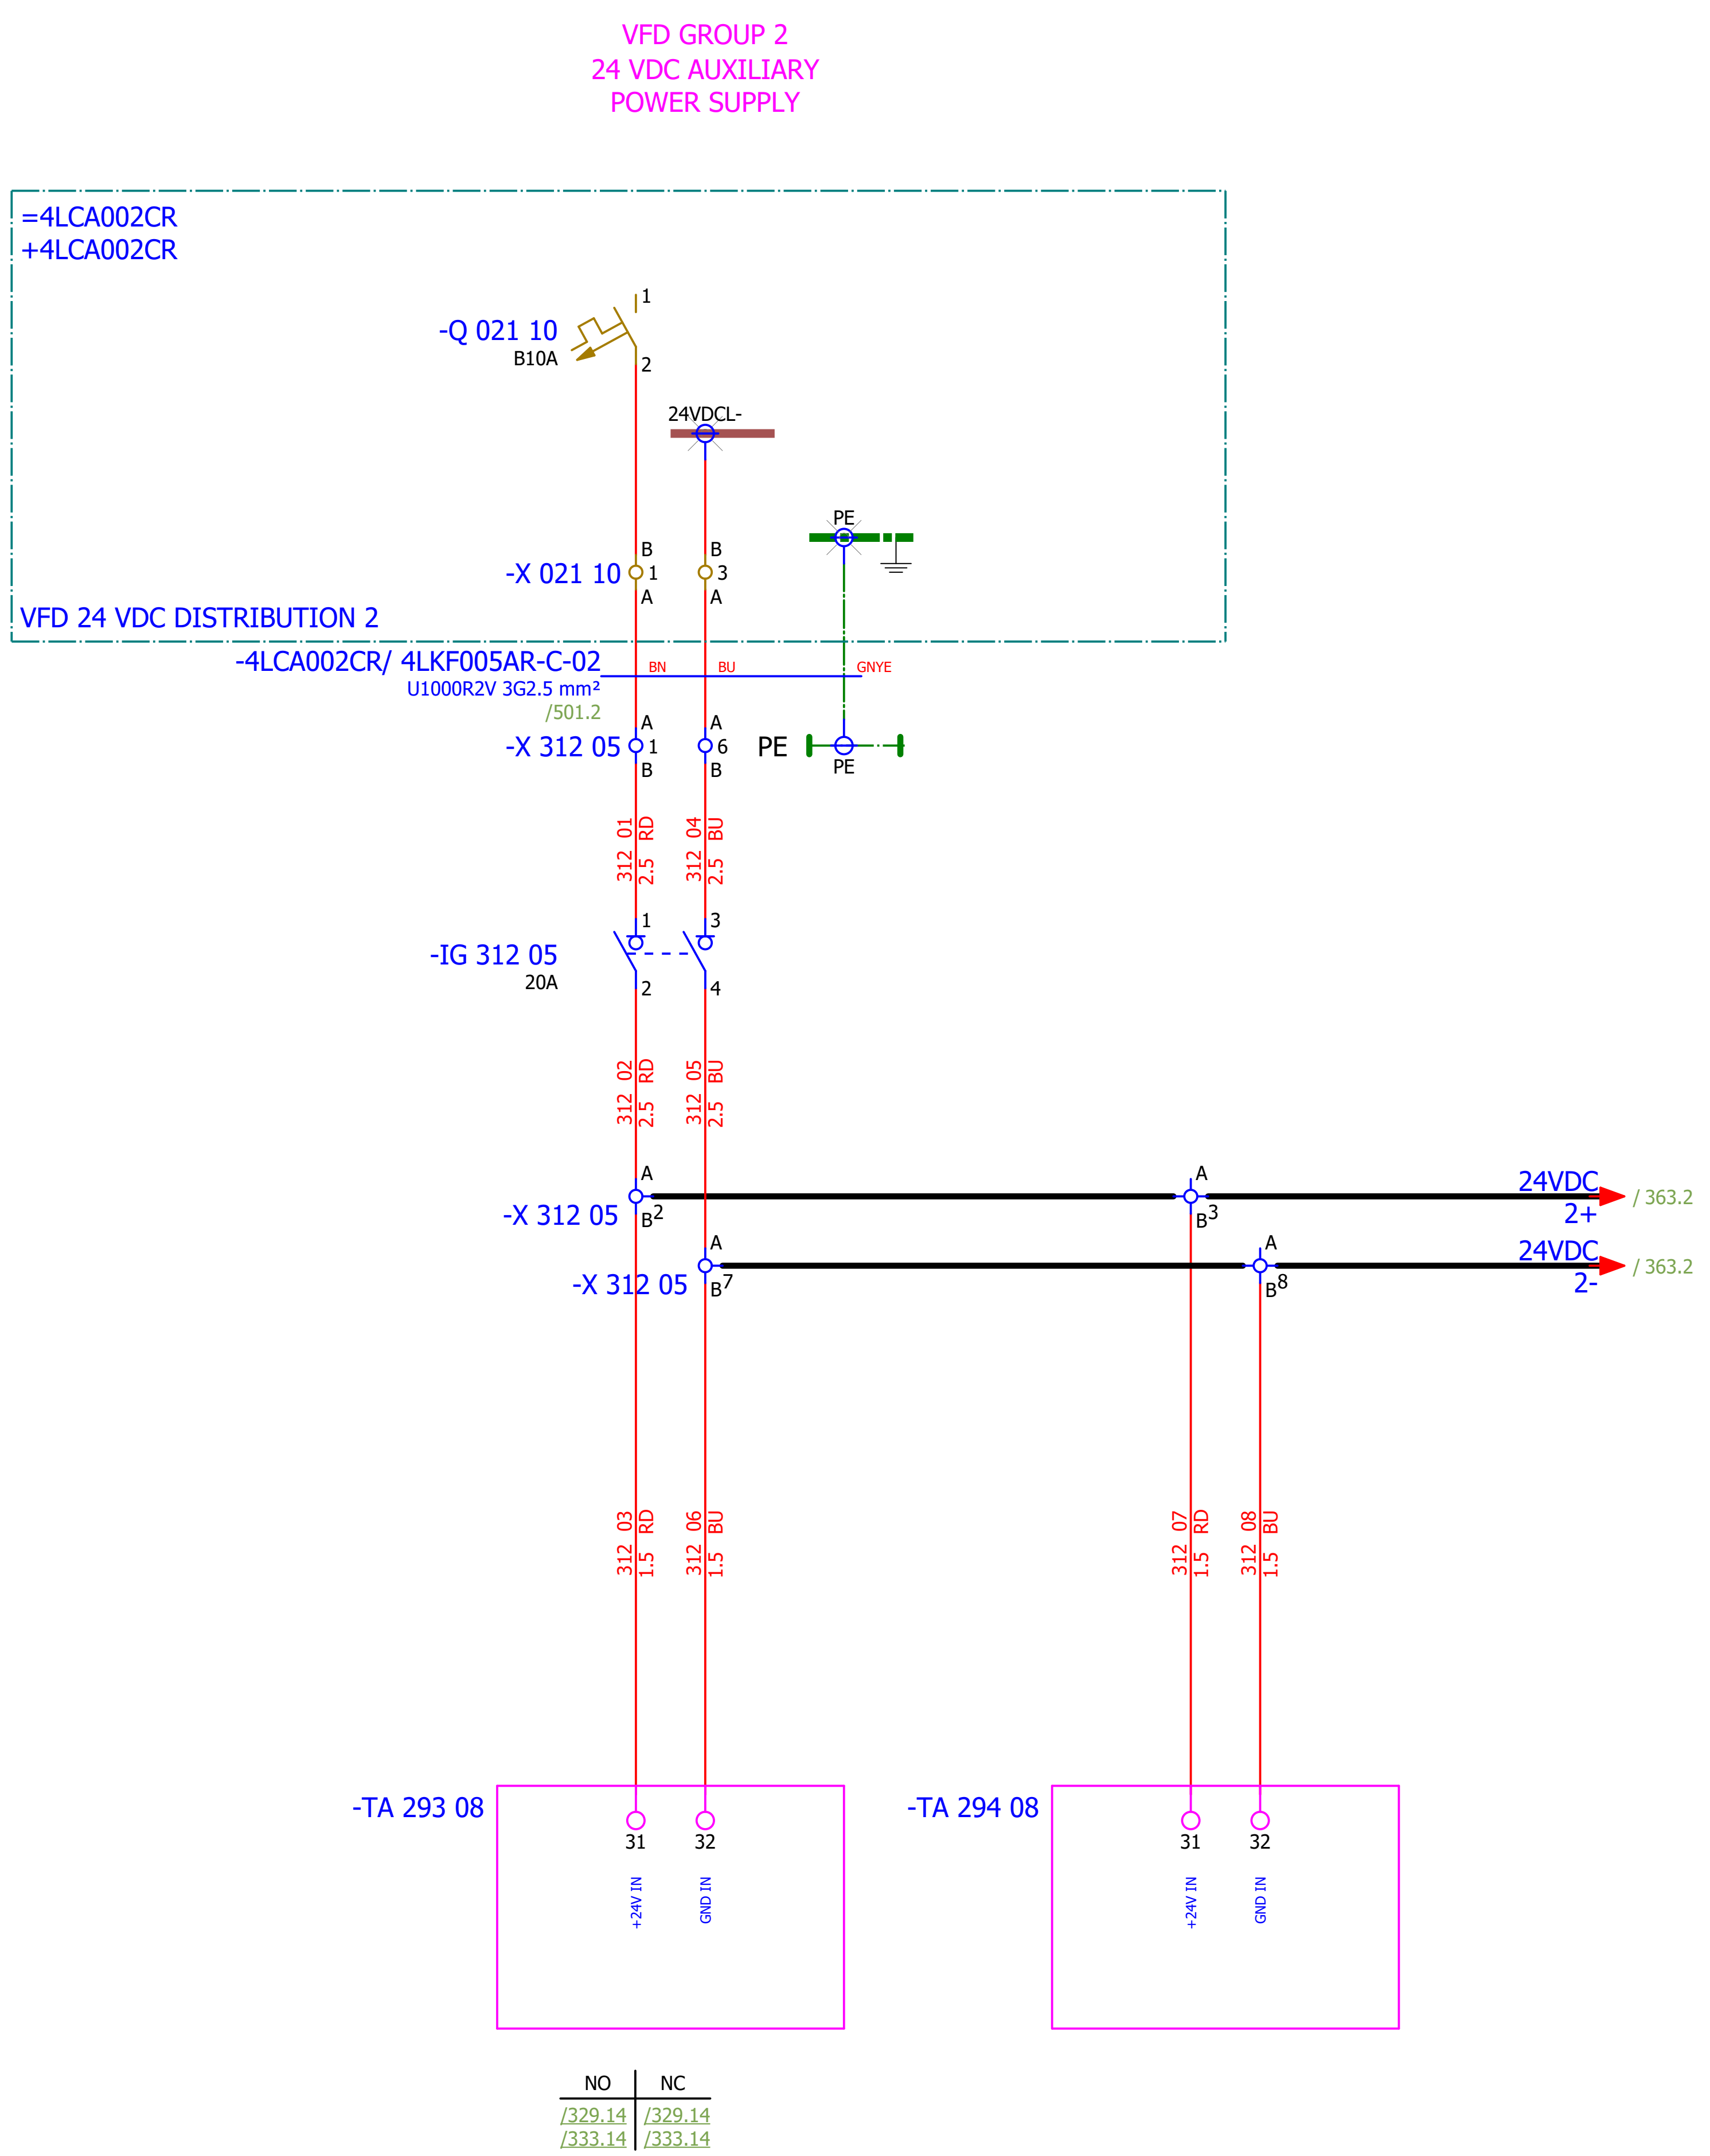

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Jere Radas								#G
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: VFD GROUP 2 - 24 VDC AUXILIARY POWER SUPPLY	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 312
Format:	A3							+4LKF005AR	Next: 321

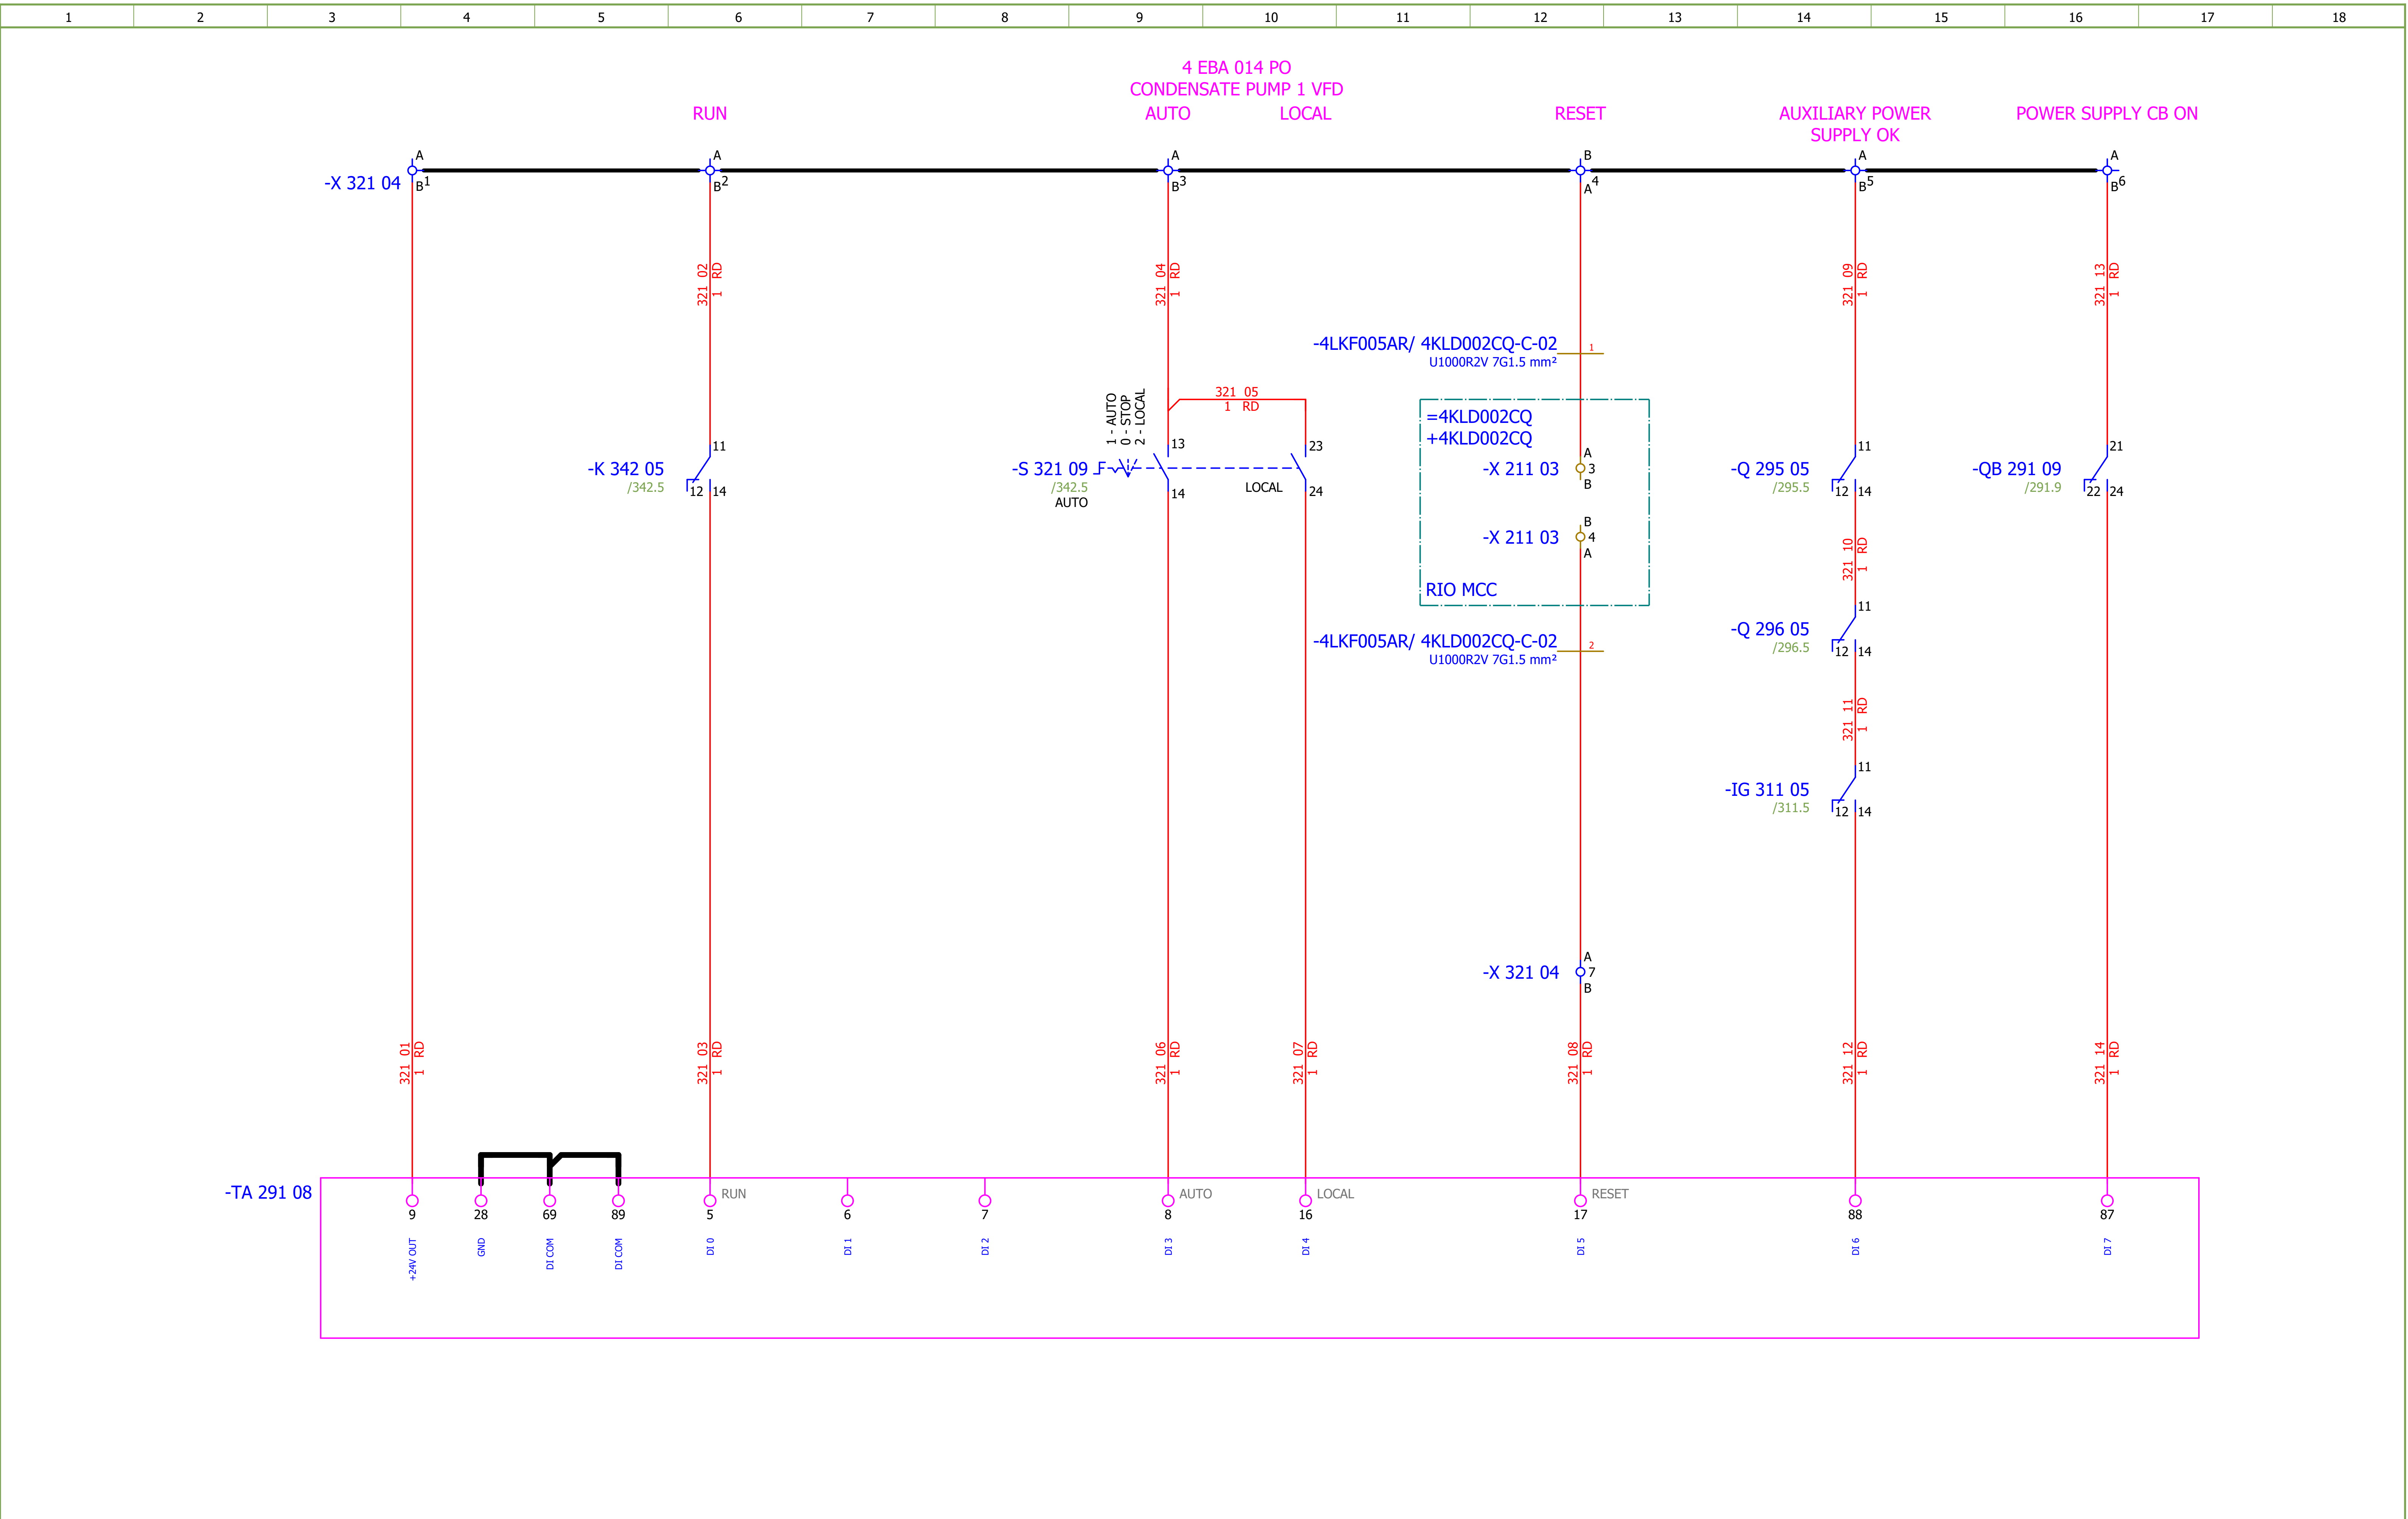

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#MB
Drawn:	Jere Radas									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: CONDENSATE PUMP 1 - DIGITAL INPUTS	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 321
Format:	A3								+4LKF005AR	Next: 322

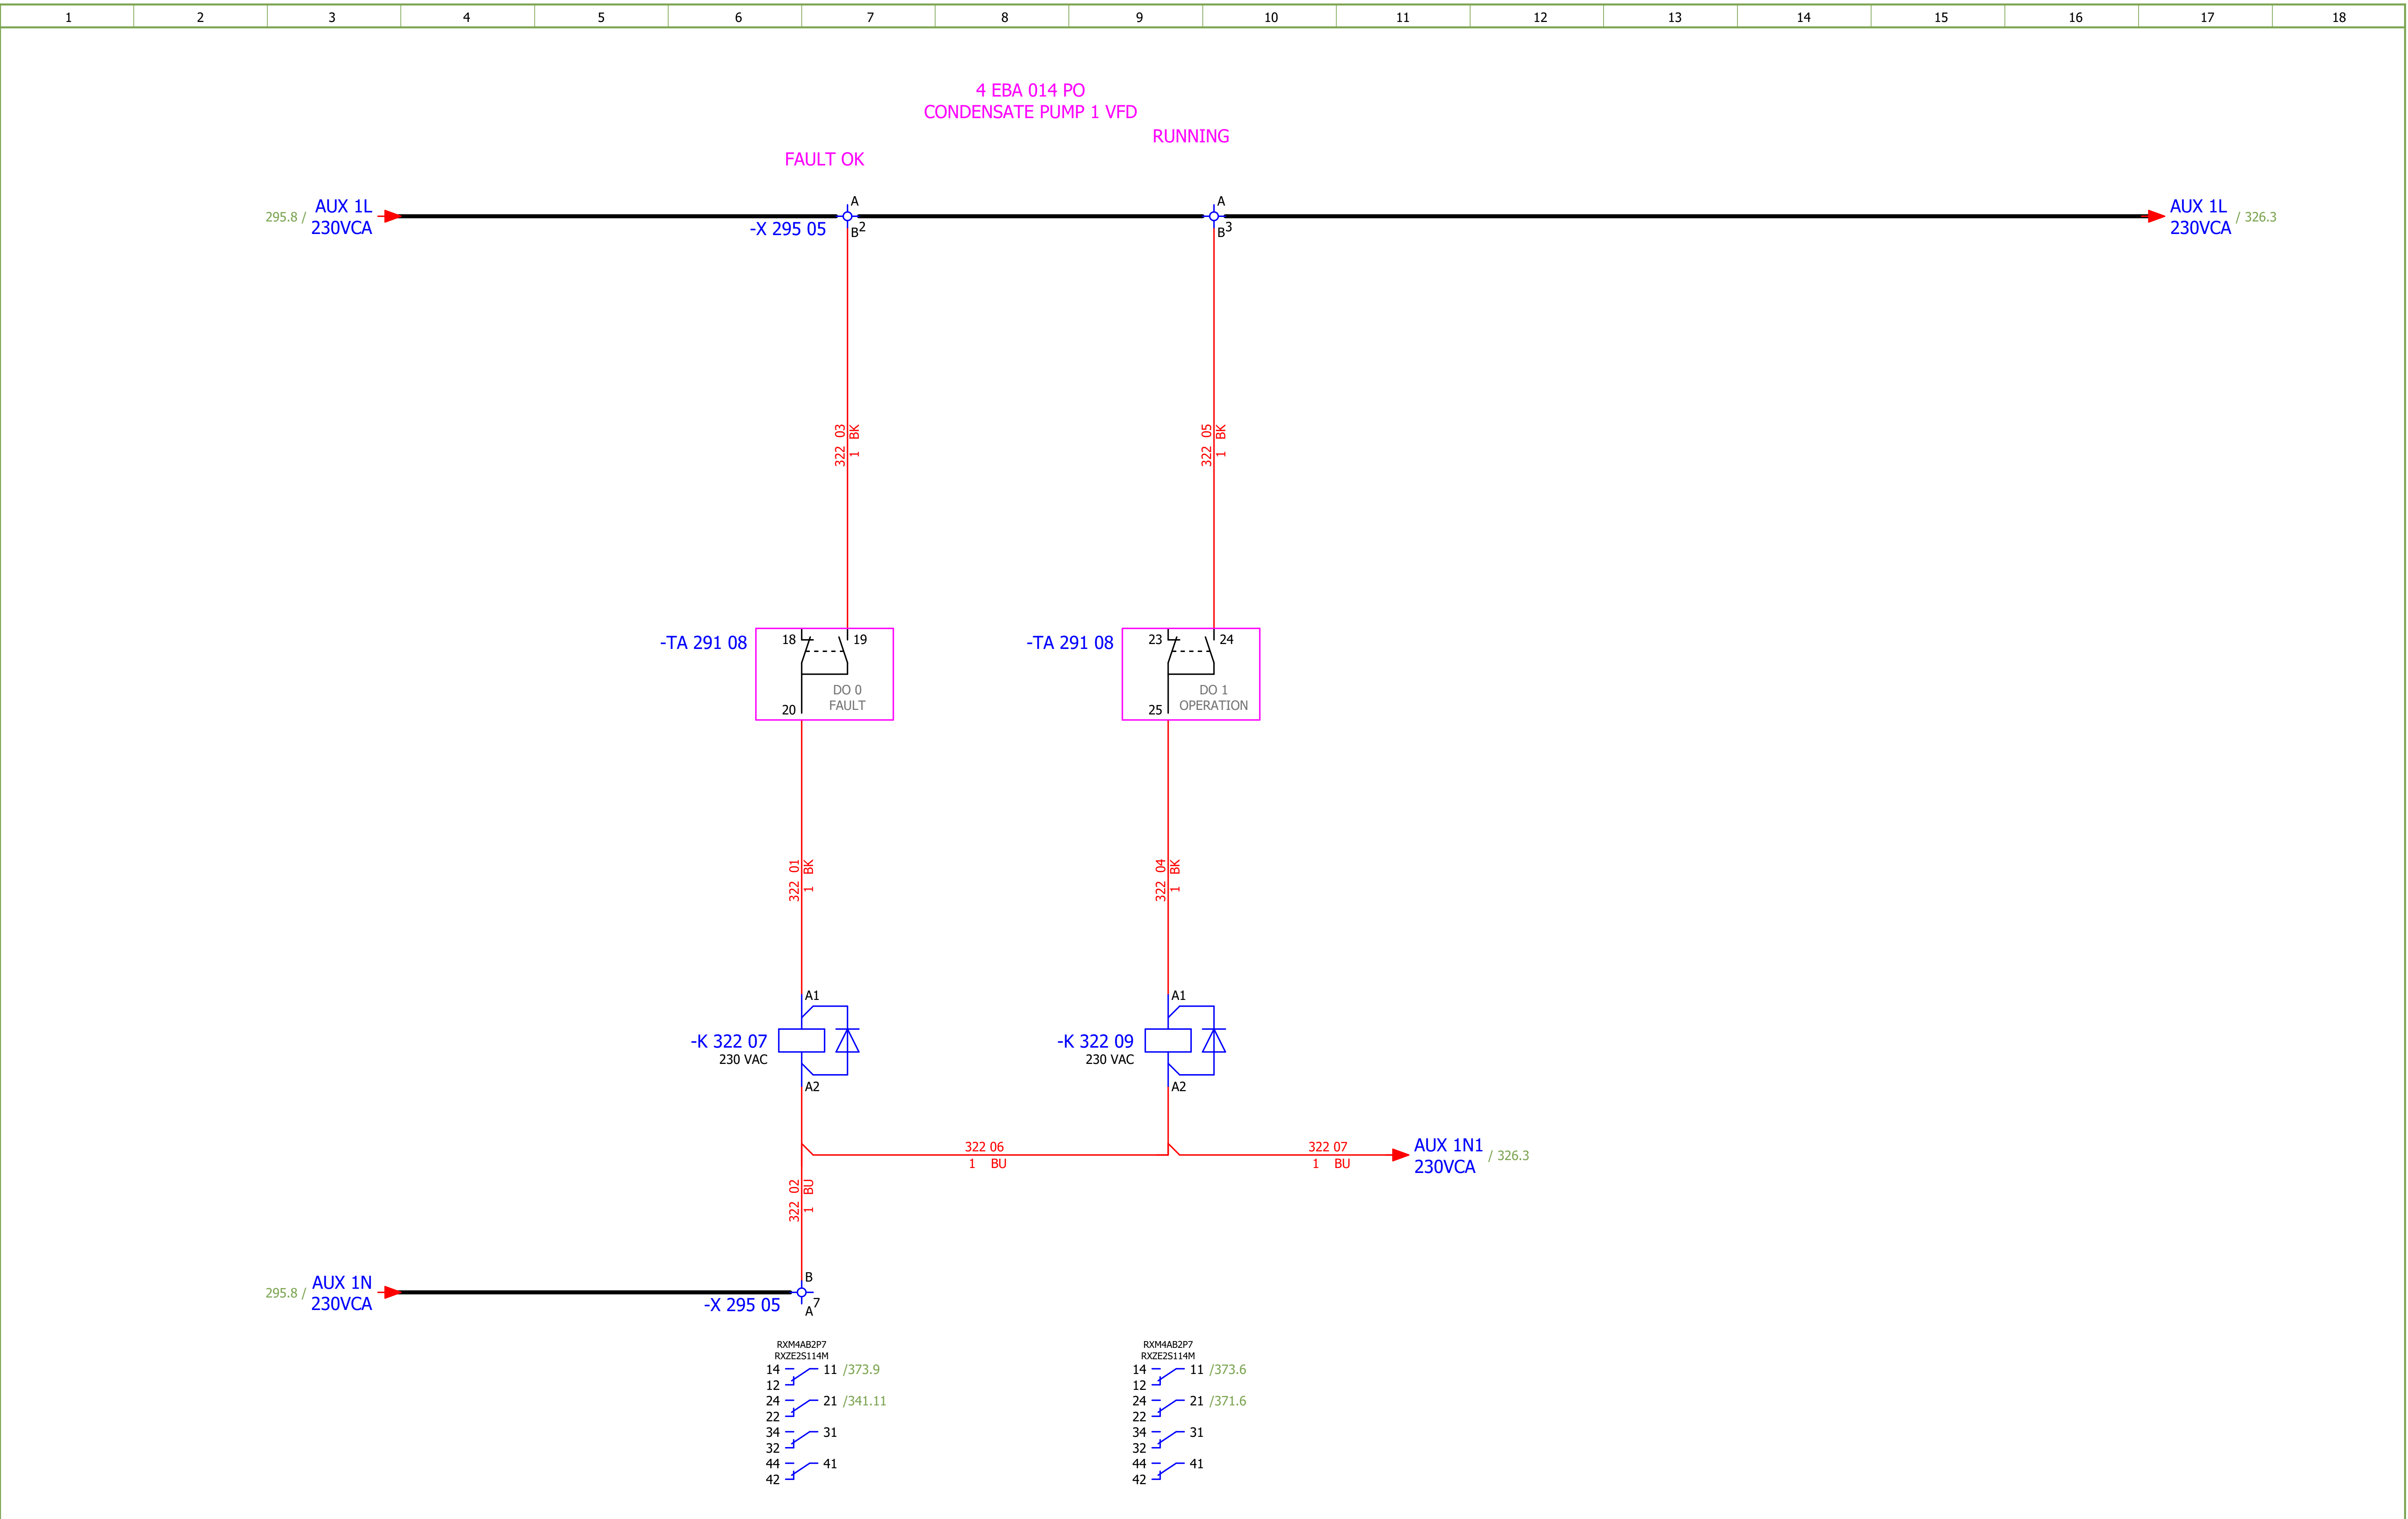

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Jere Radas								#MB
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: CONDENSATE PUMP 1 - DIGITAL OUTPUTS	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 322
Format:	A3							+4LKF005AR	Next: 323

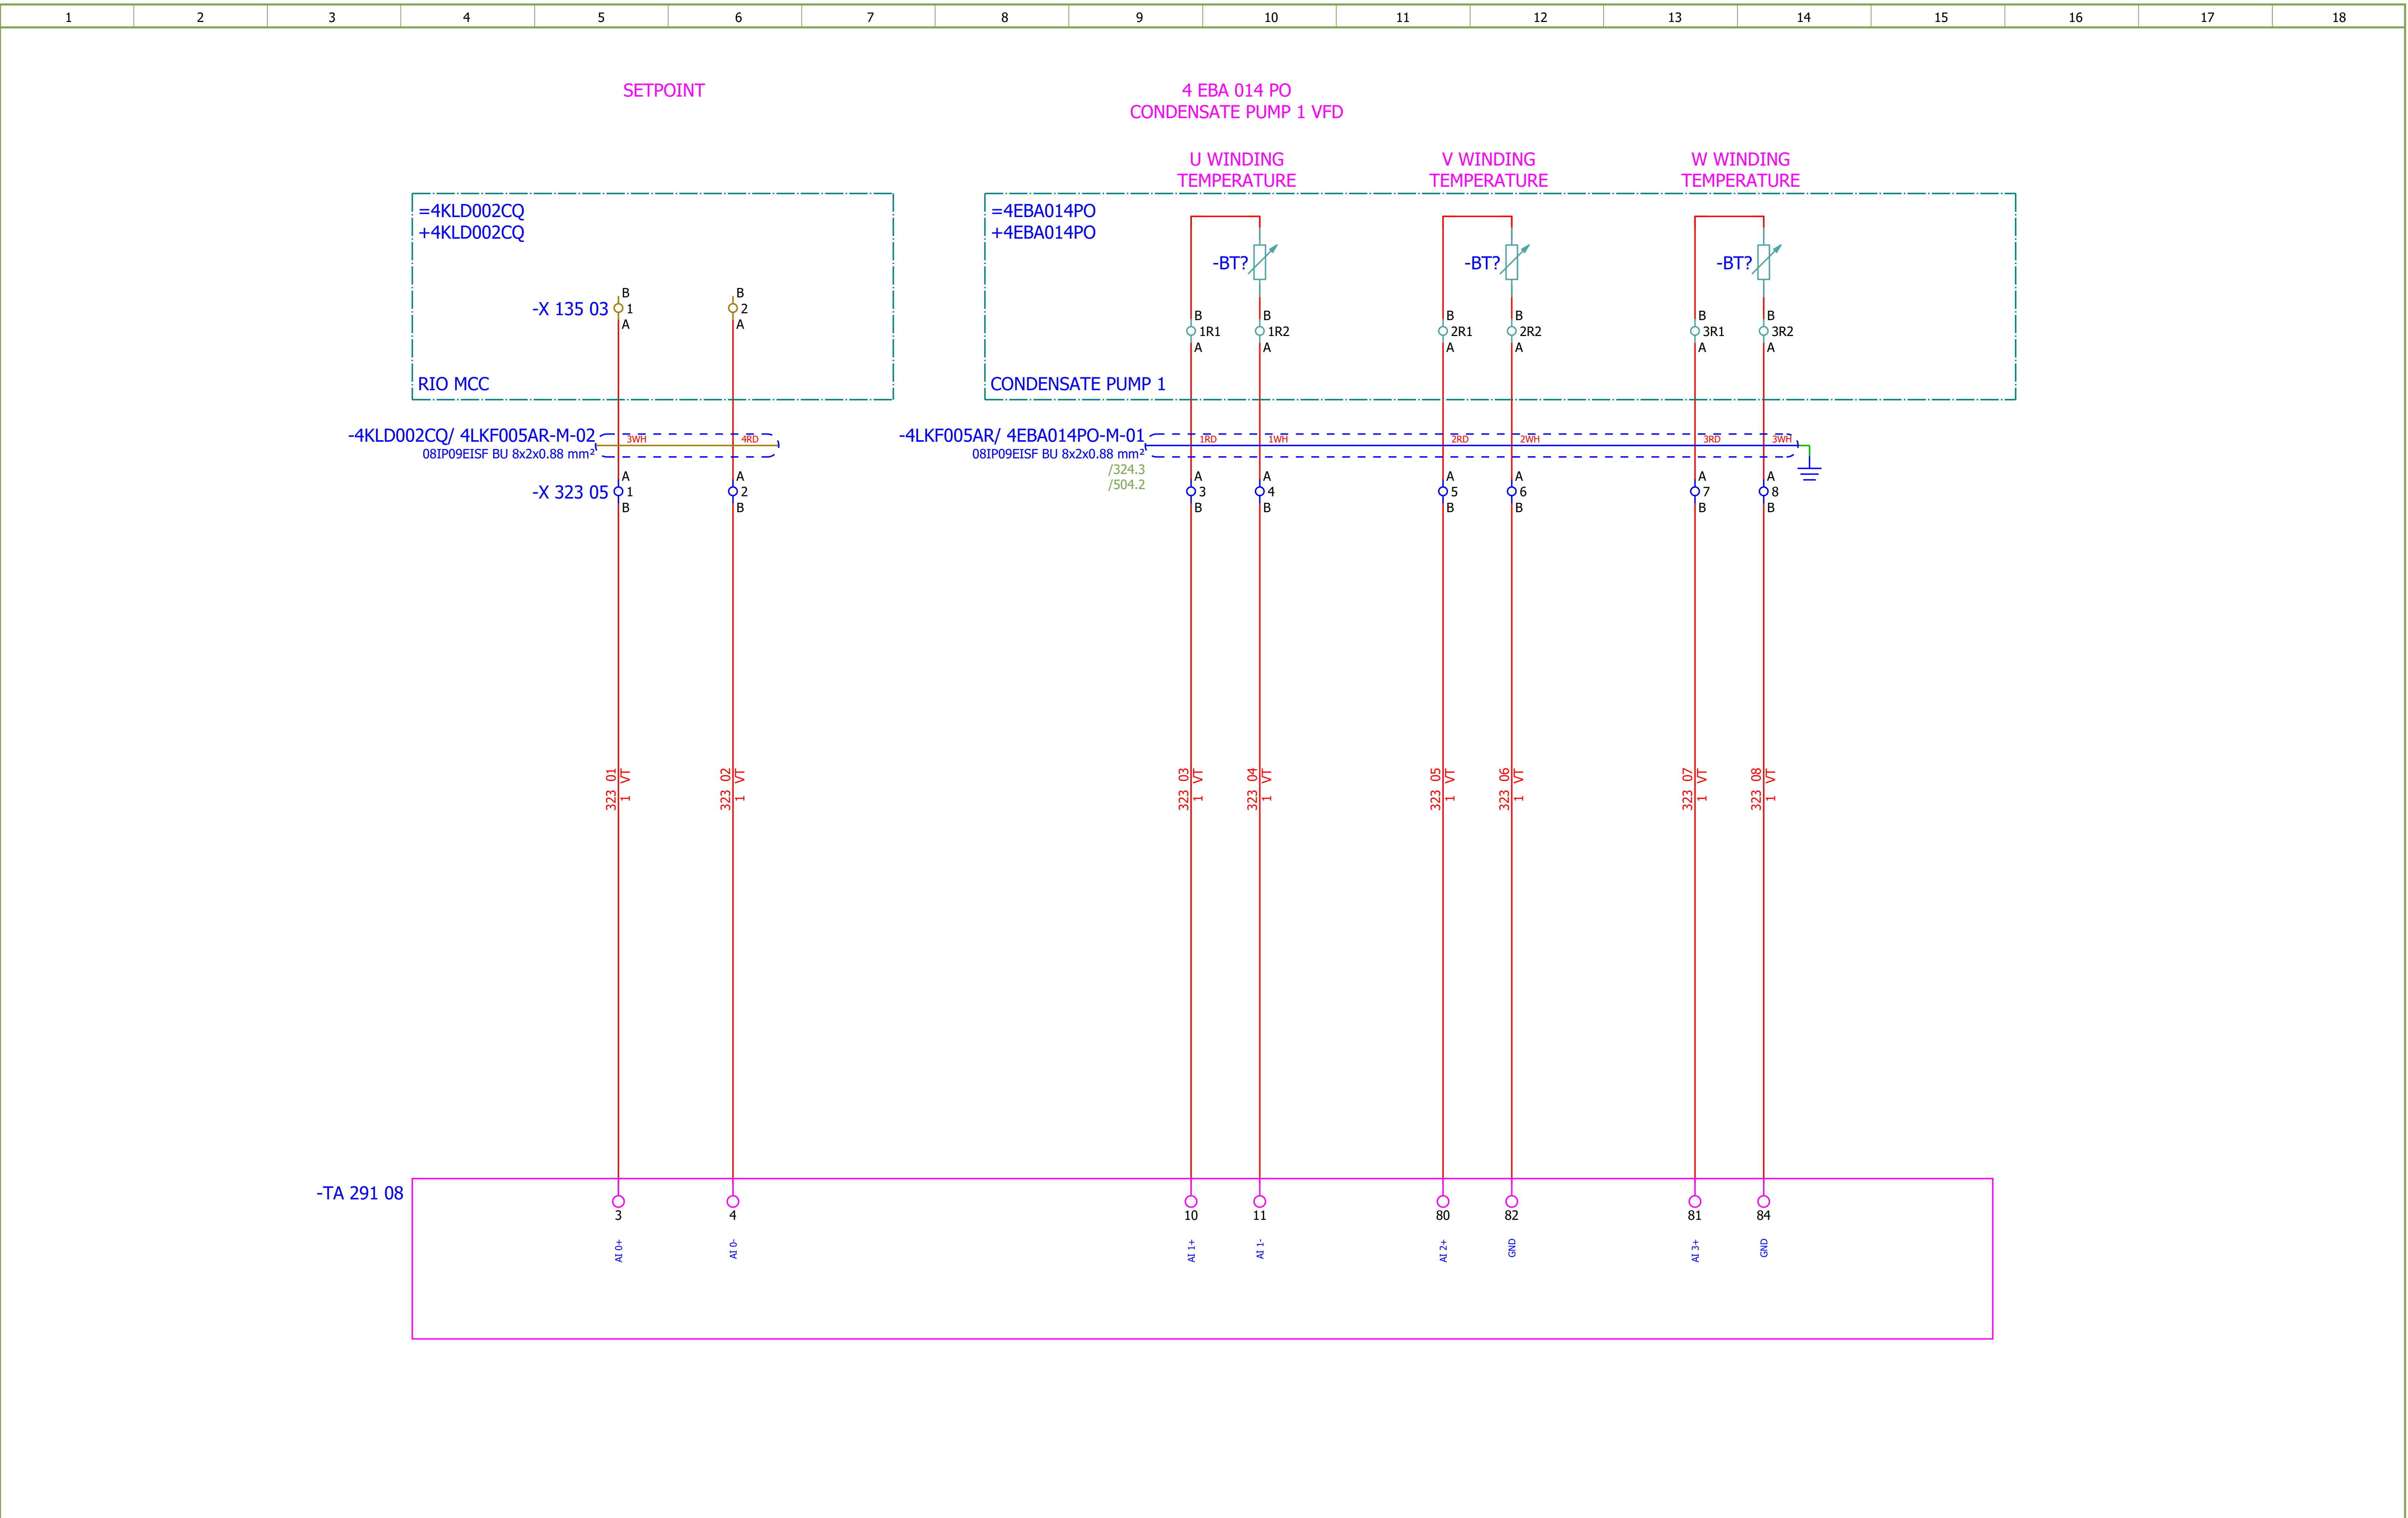

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#MB
Drawn:	Jere Radas									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: CONDENSATE PUMP 1 - ANALOG INPUTS	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 323
Format:	A3								+4LKF005AR	Next: 324

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

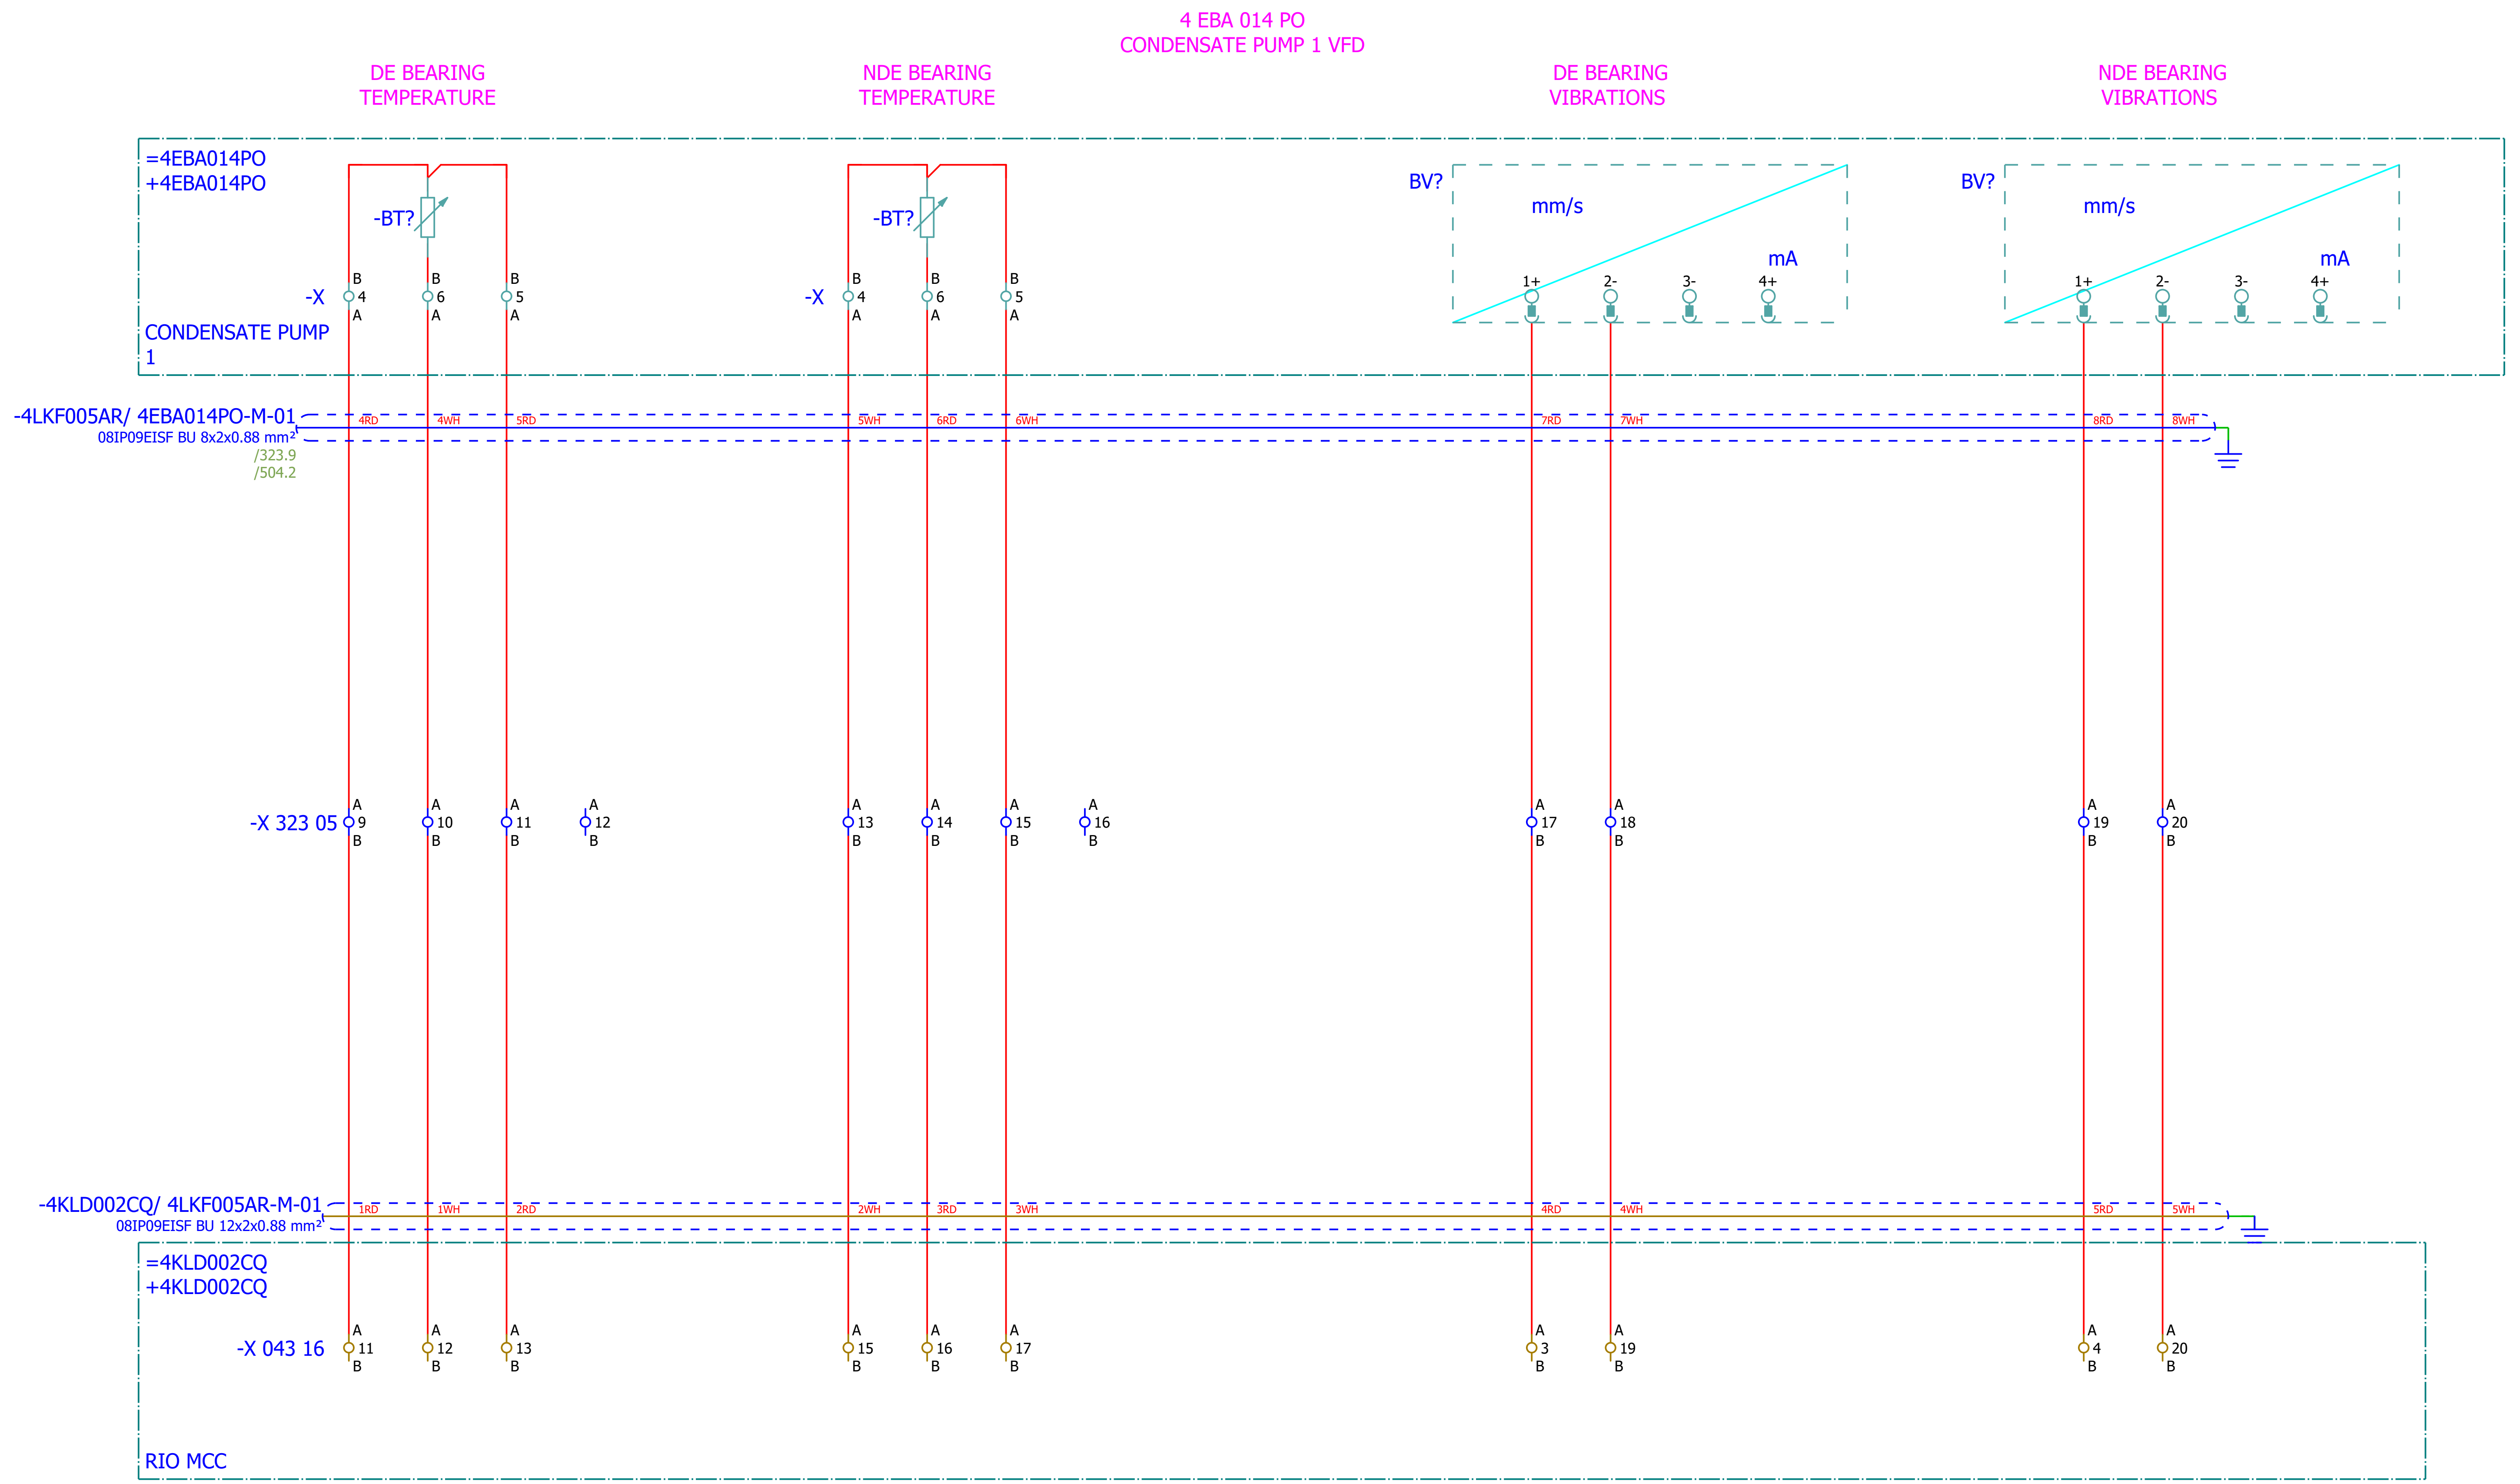

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#MB
Drawn:	Jere Radas									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: CONDENSATE PUMP 1 - ANALOG INPUTS	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 324
Format:	A3								+4LKF005AR	Next: 325

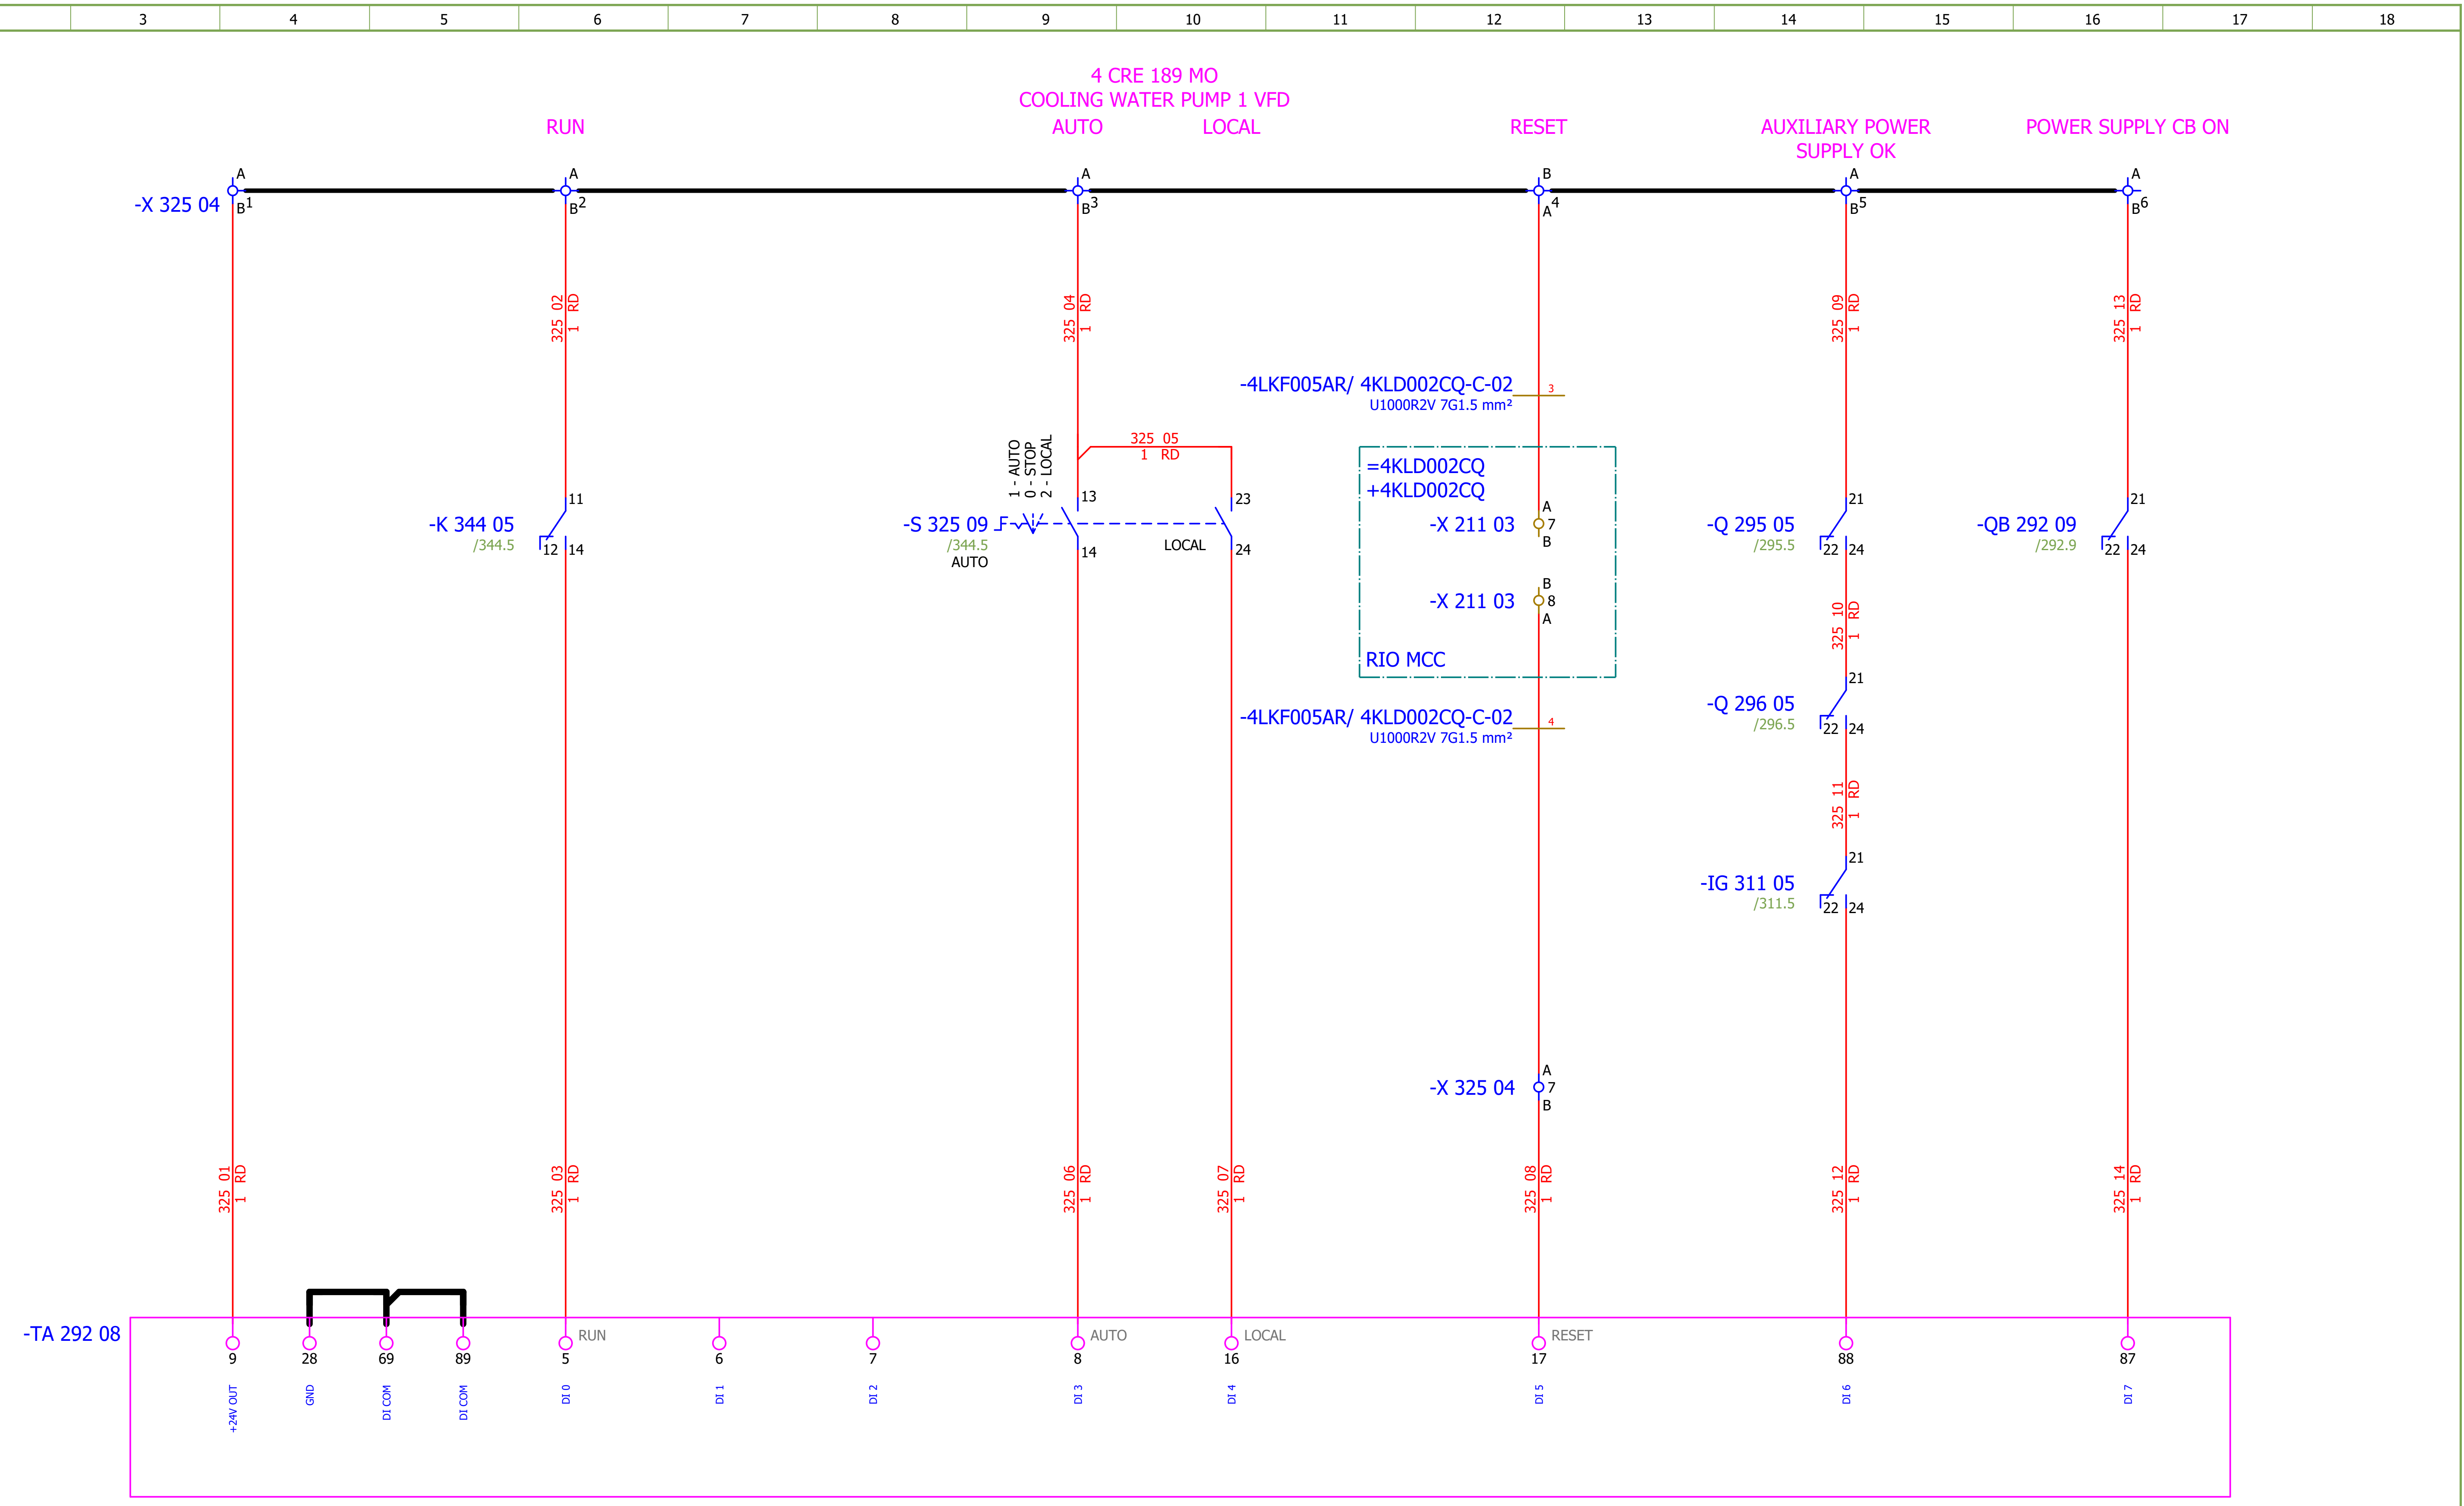

Date:	17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#MB
Drawn:	Jere Radas								
Approved:	Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 1 - DIGITAL INPUTS	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 325
Format:	A3							+4LKF005AR	Next: 326

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

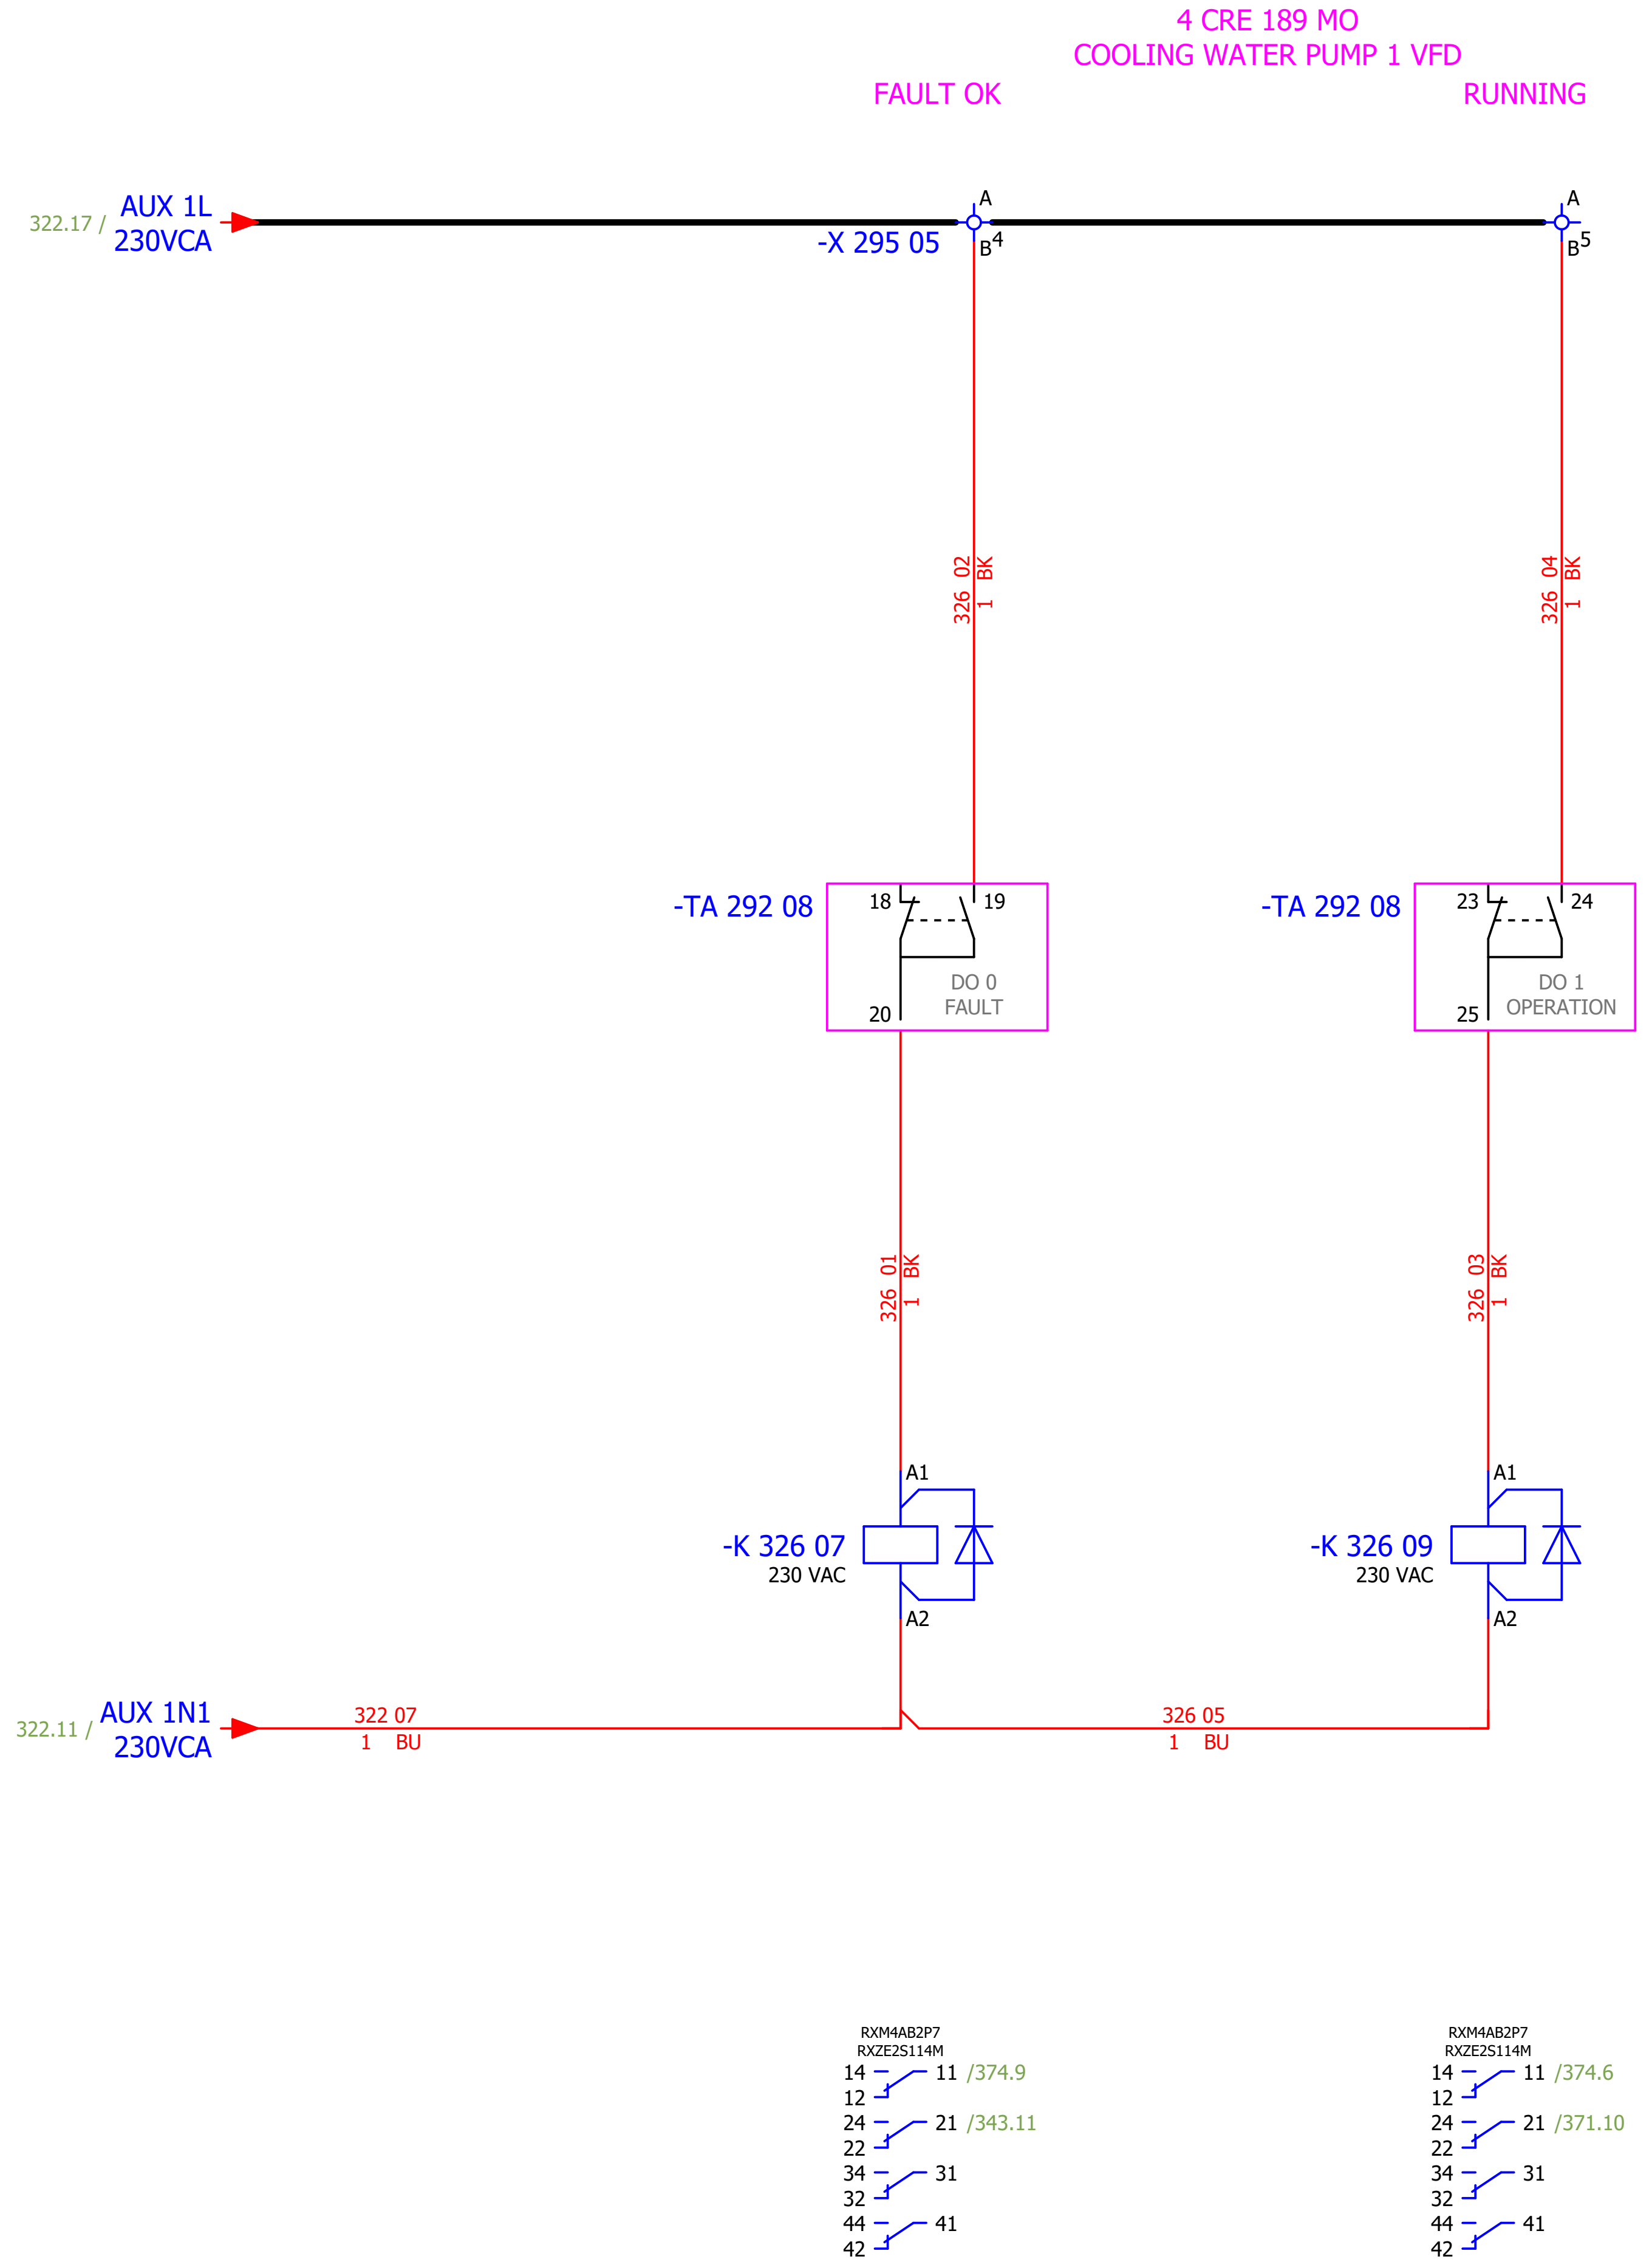

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Jere Radas								#MB
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 1 - DIGITAL OUTPUTS	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 326
Format:	A3							+4LKF005AR	Next: 327

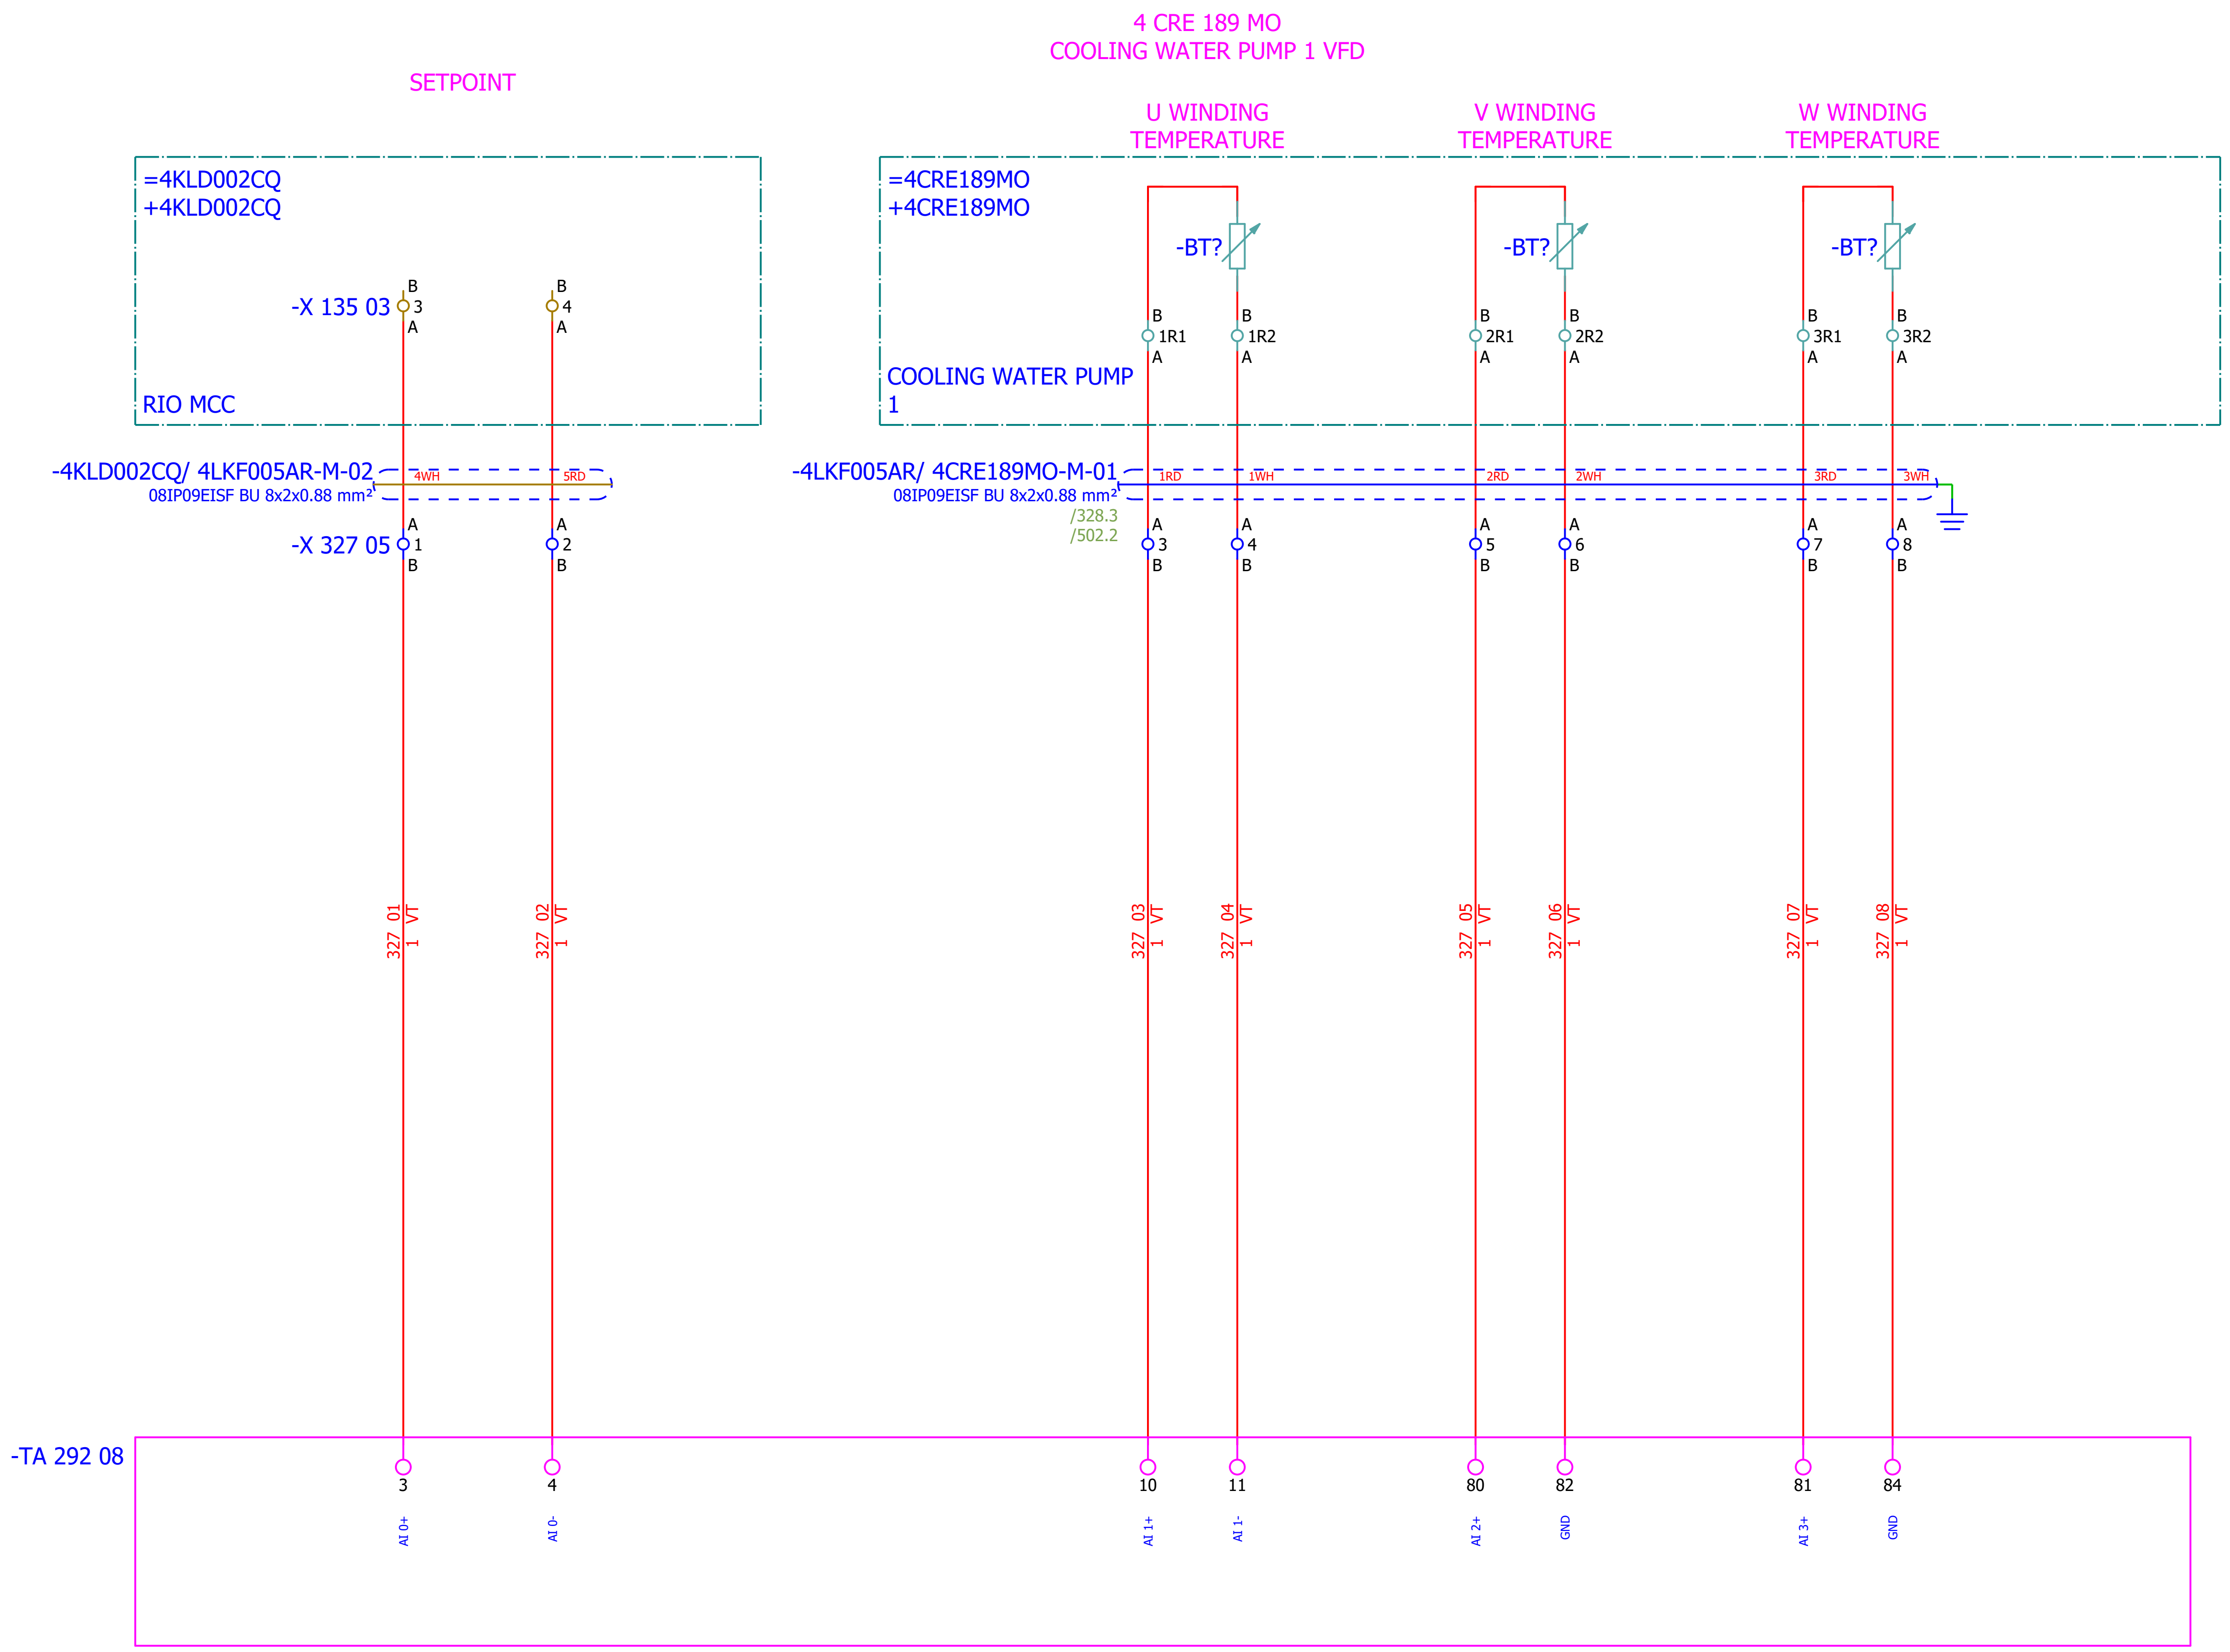

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#MB
Drawn:	Jere Radas									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 1 - ANALOG INPUTS	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 327
Format:	A3								+4LKF005AR	Next: 328

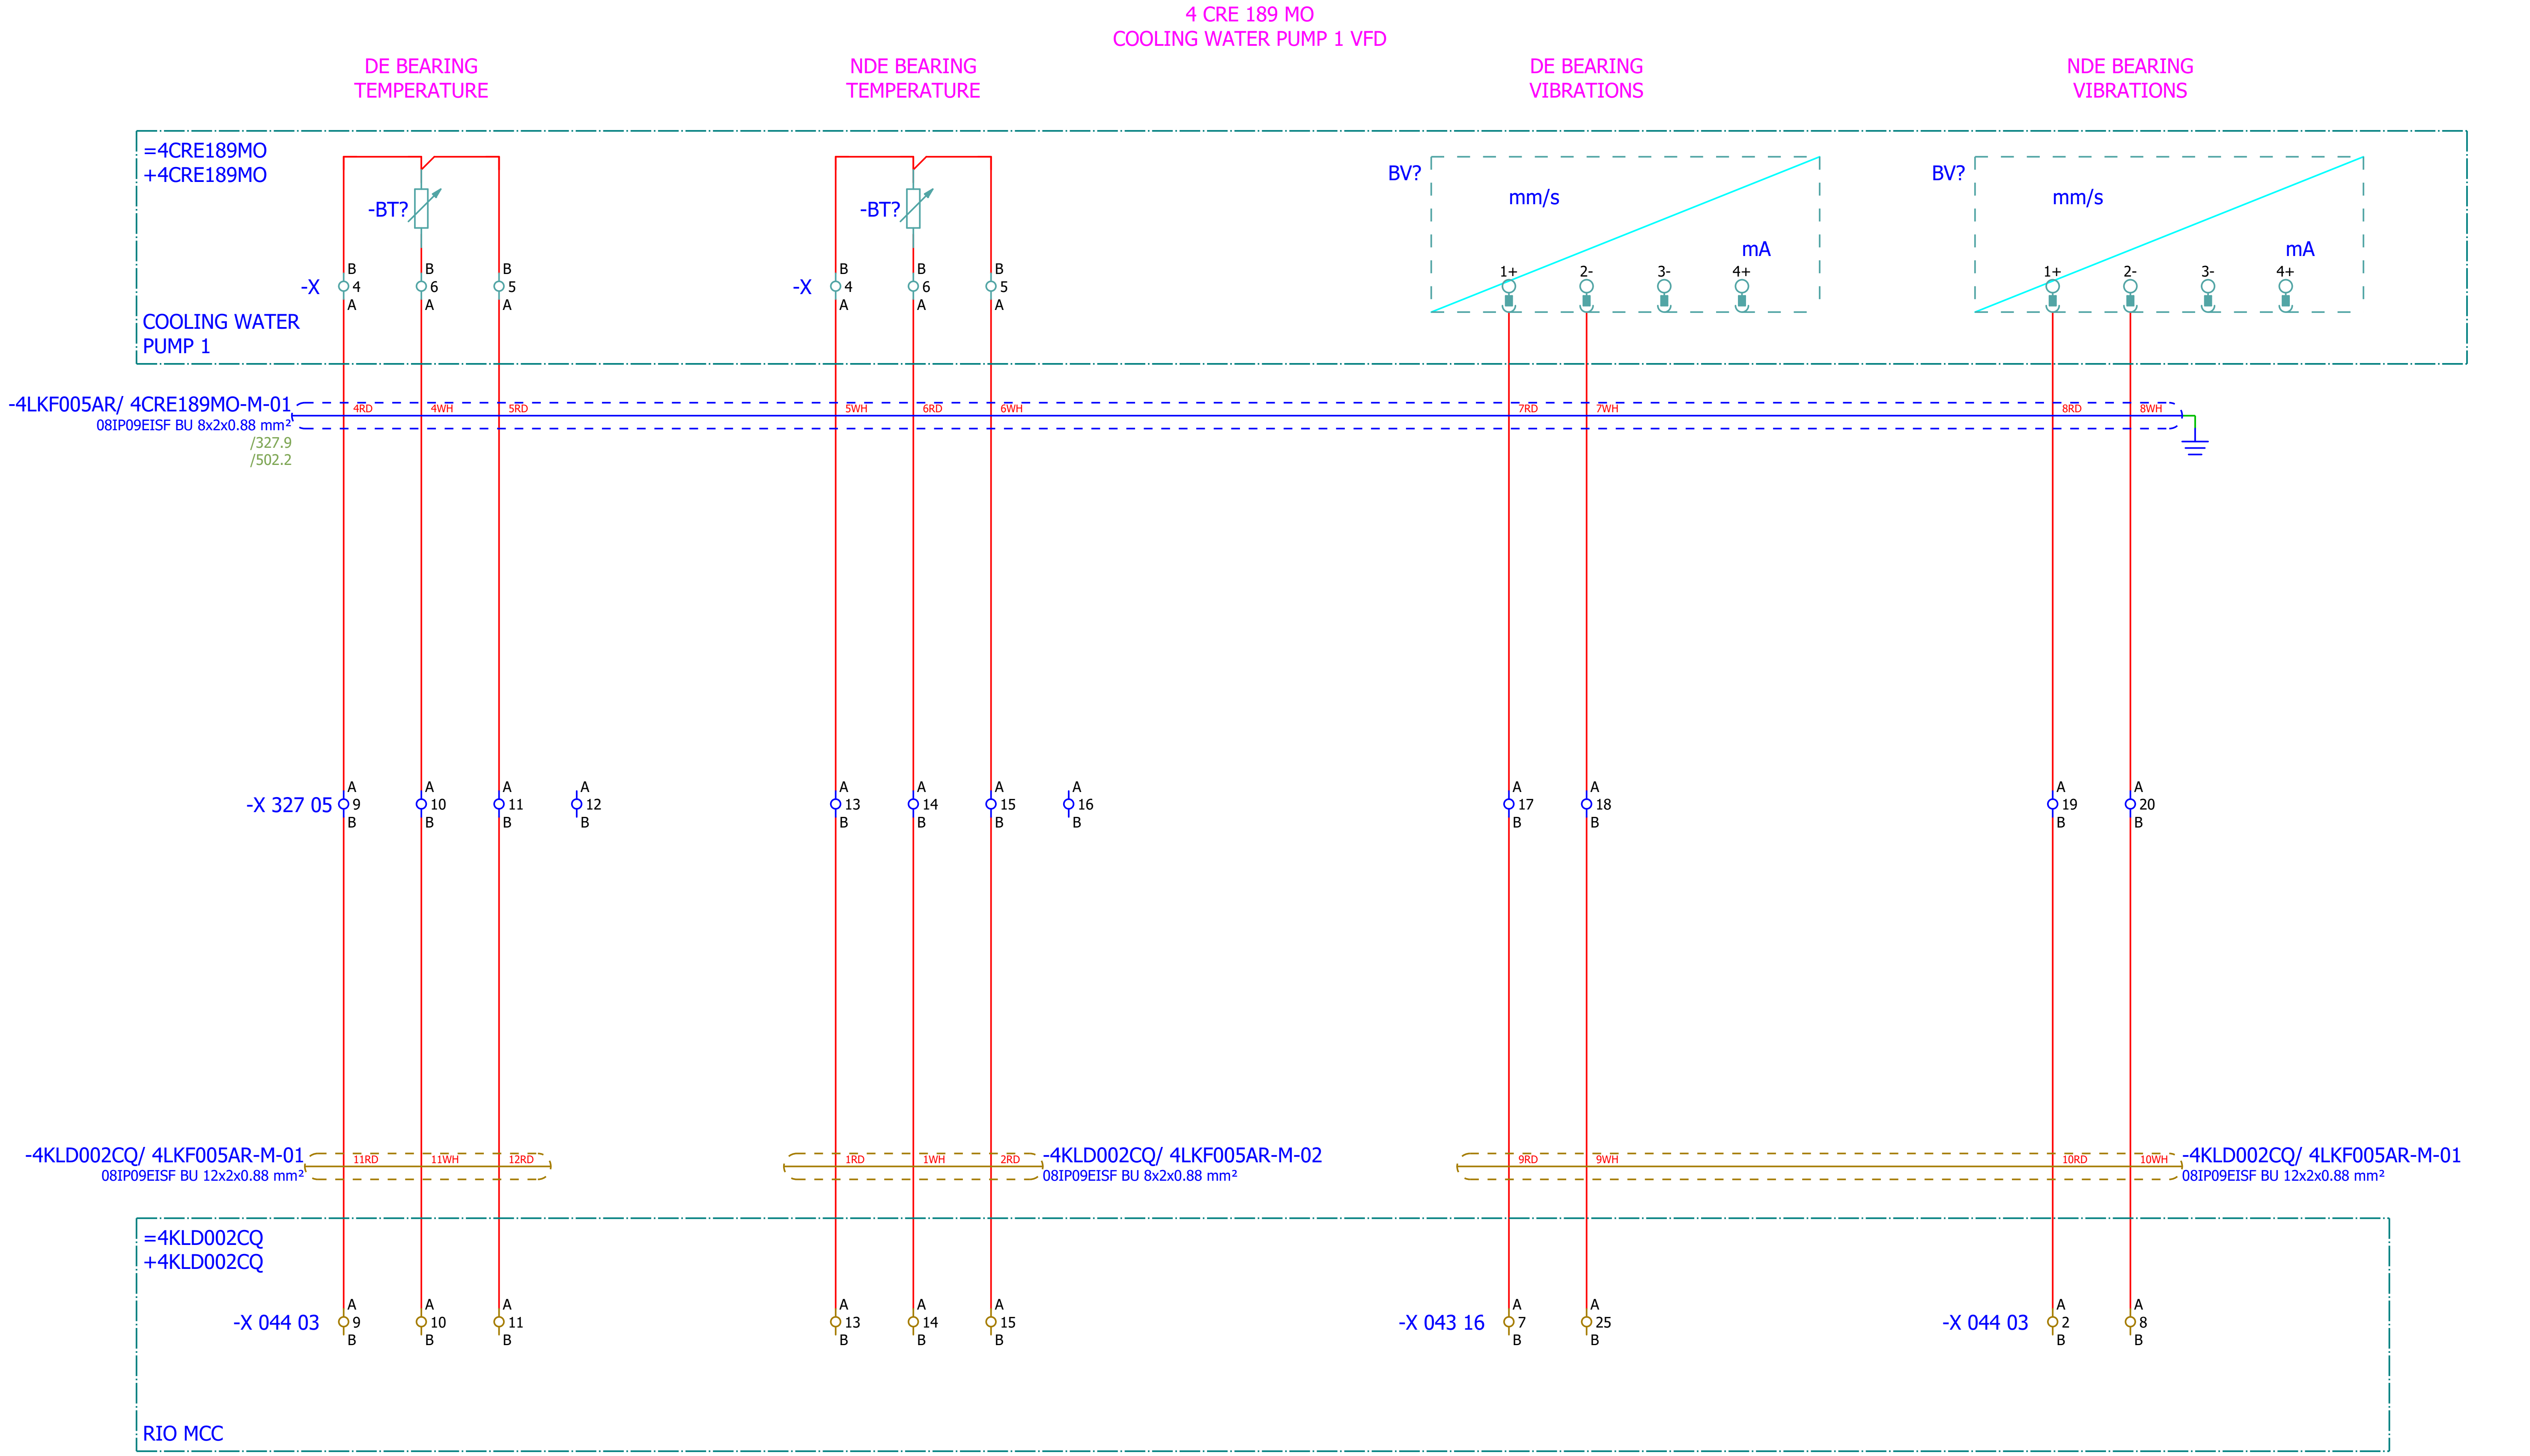

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870
Drawn:	Jere Radas							Revision: F
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 1 - ANALOG INPUTS	Drawing designation: BRC-4-ATEP0-1870-F	=4LKF001AR +4LKF005AR	#MB Sheet: 328 Next: 329
Format:	A3							

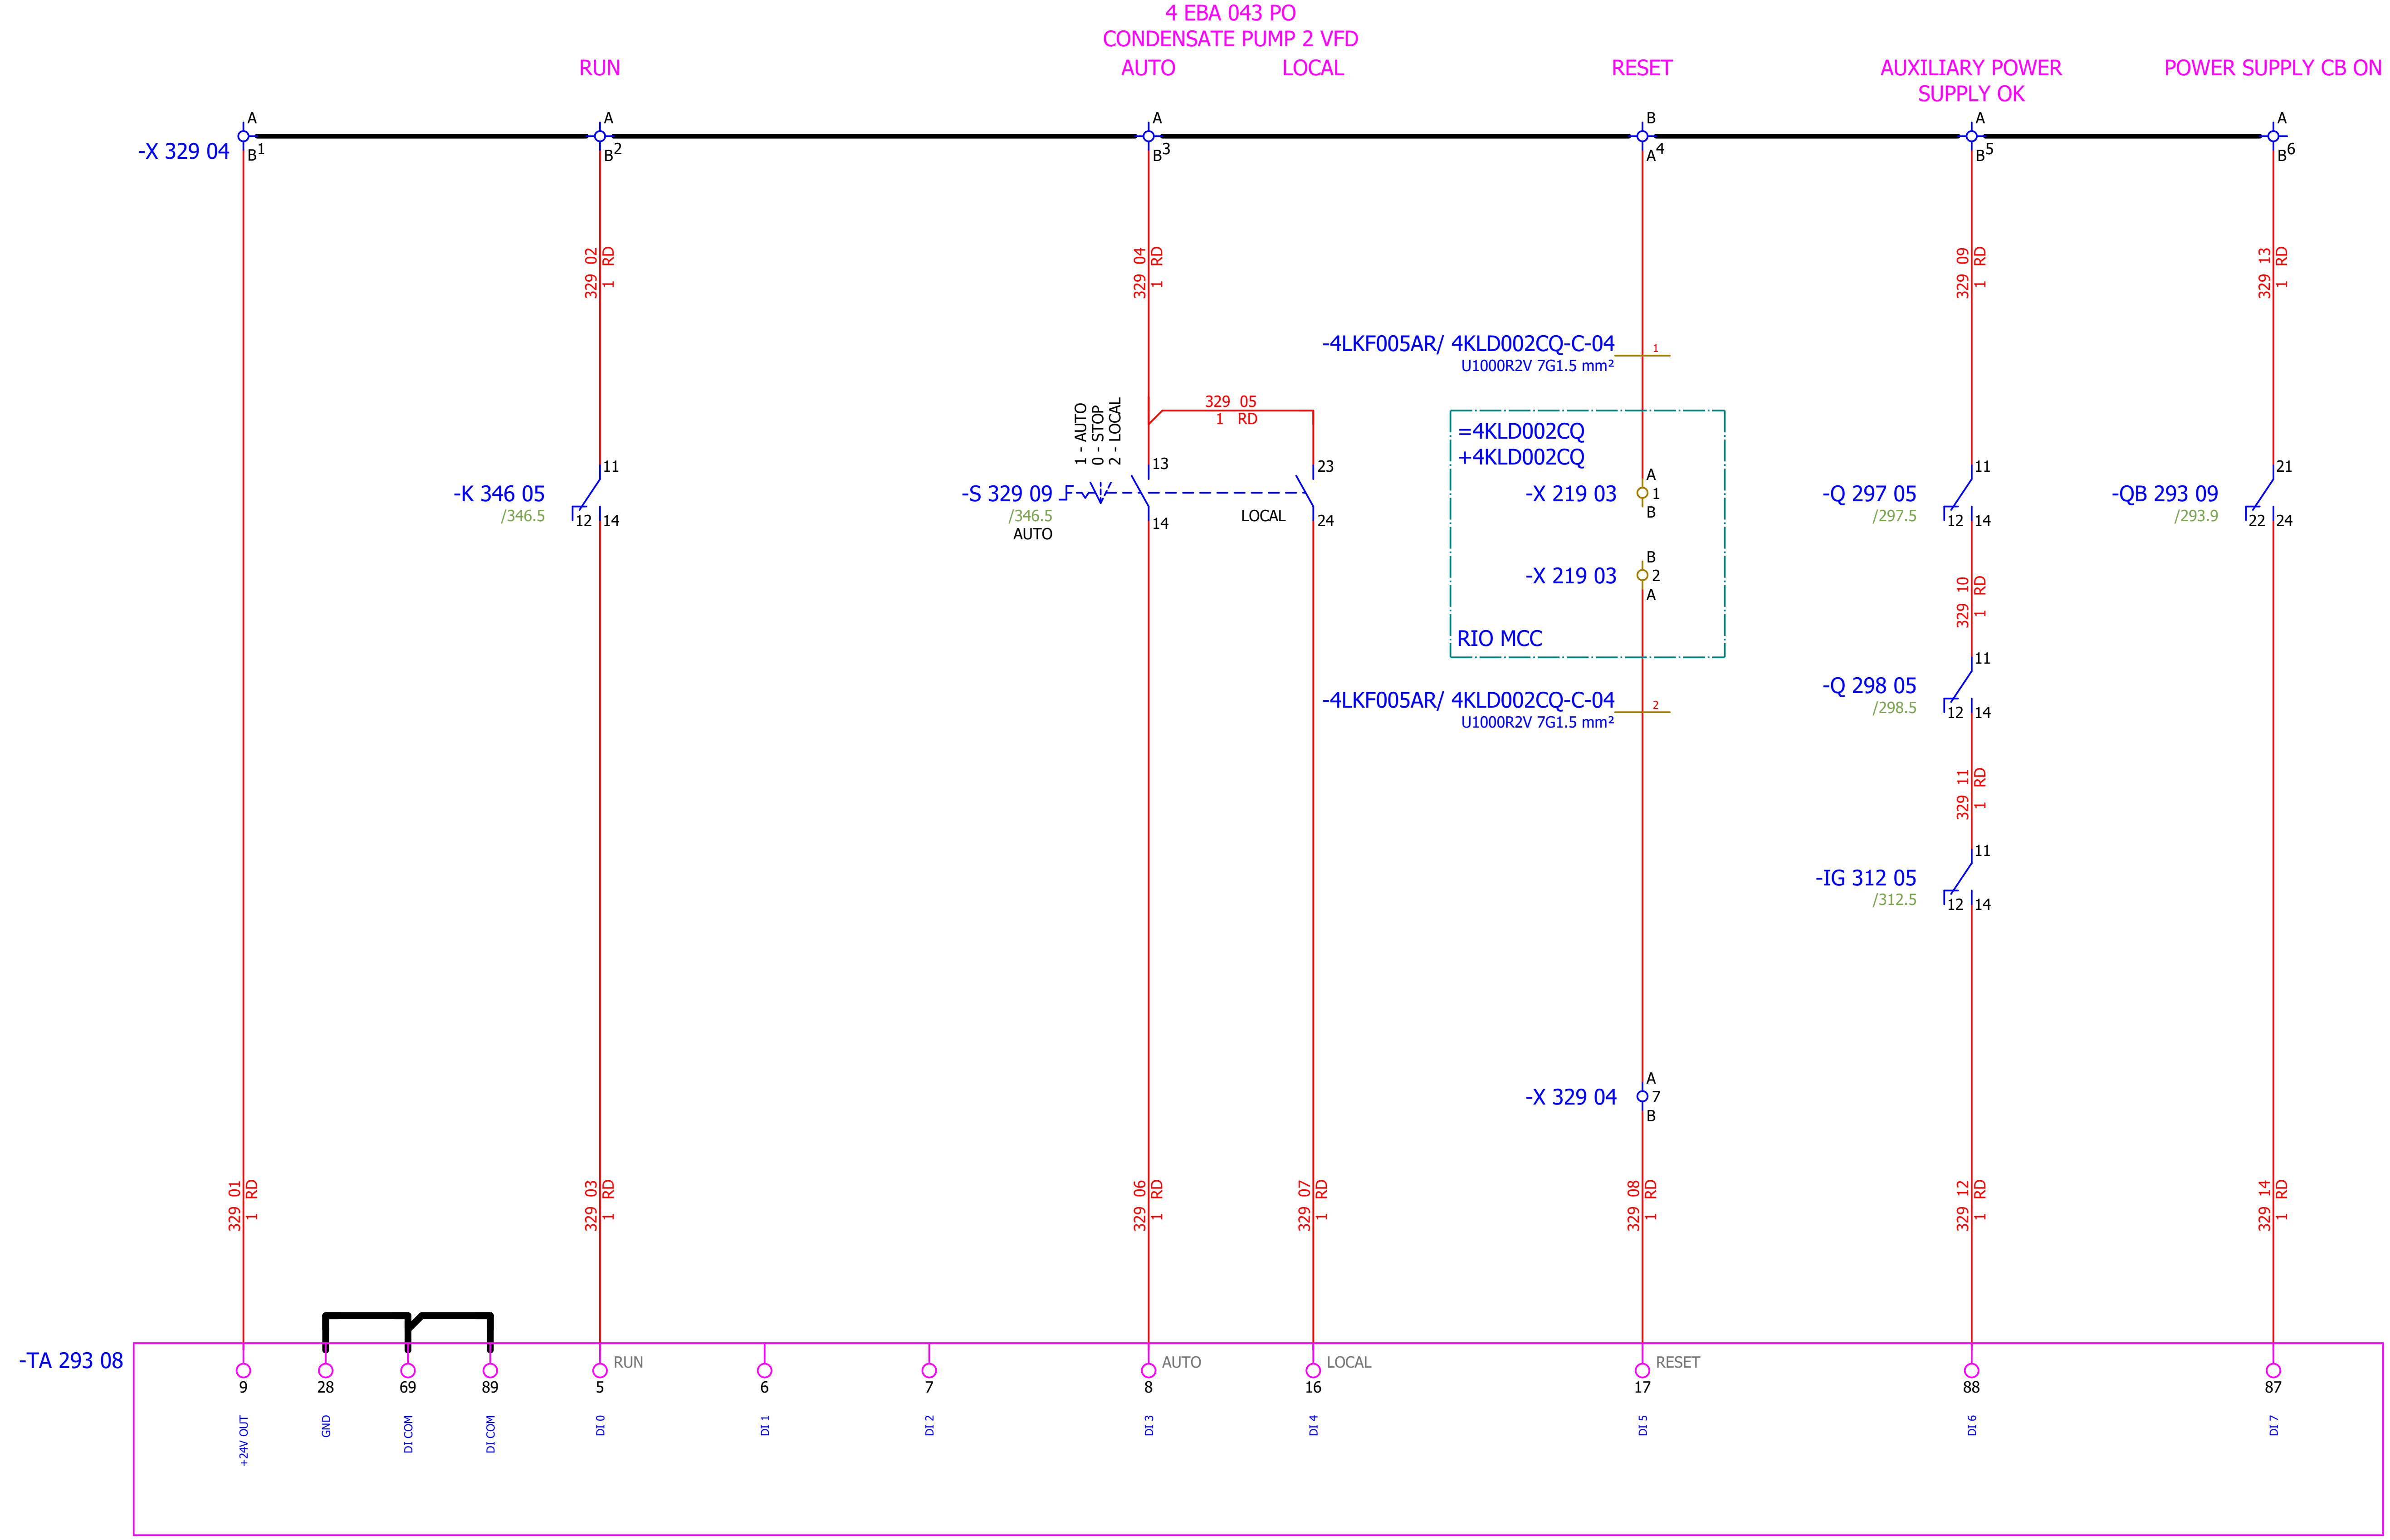

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Jere Radas								#MB
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: CONDENSATE PUMP 2 - DIGITAL INPUTS	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 329
Format:	A3							+4LKF005AR	Next: 330

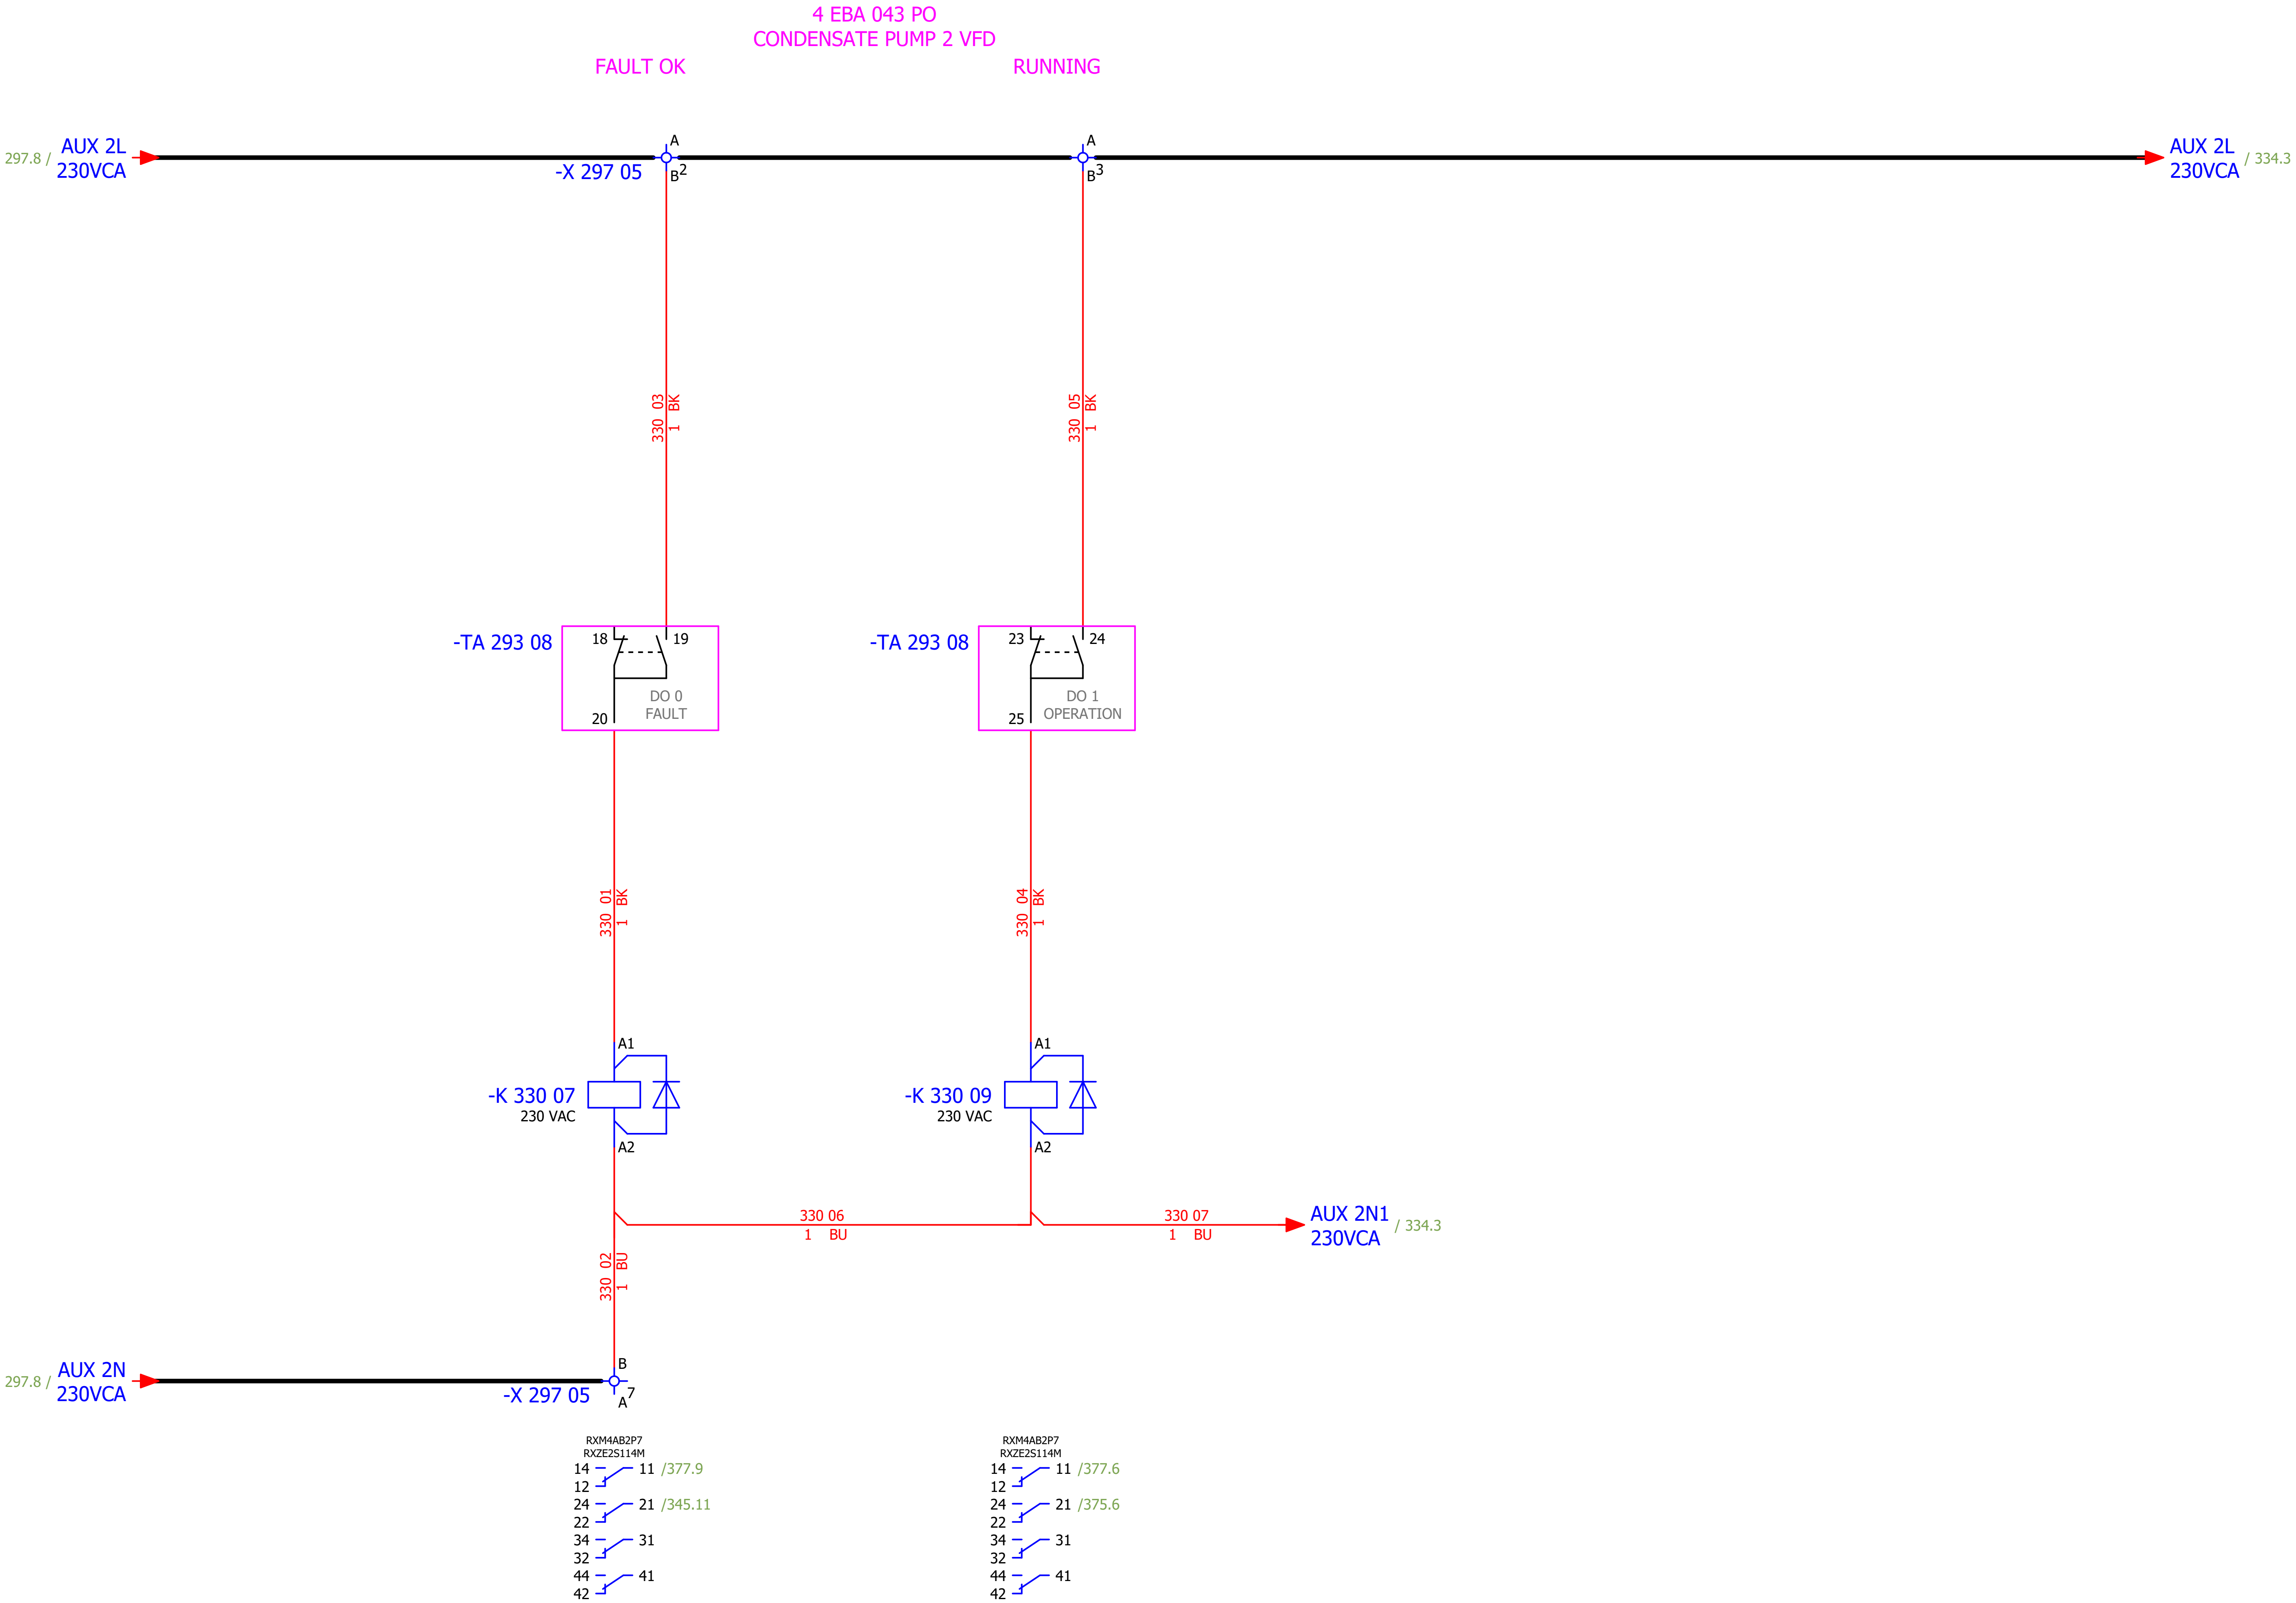

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Jere Radas								#MB
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: CONDENSATE PUMP 2 - DIGITAL OUTPUTS	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 330
Format:	A3							+4LKF005AR	Next: 331

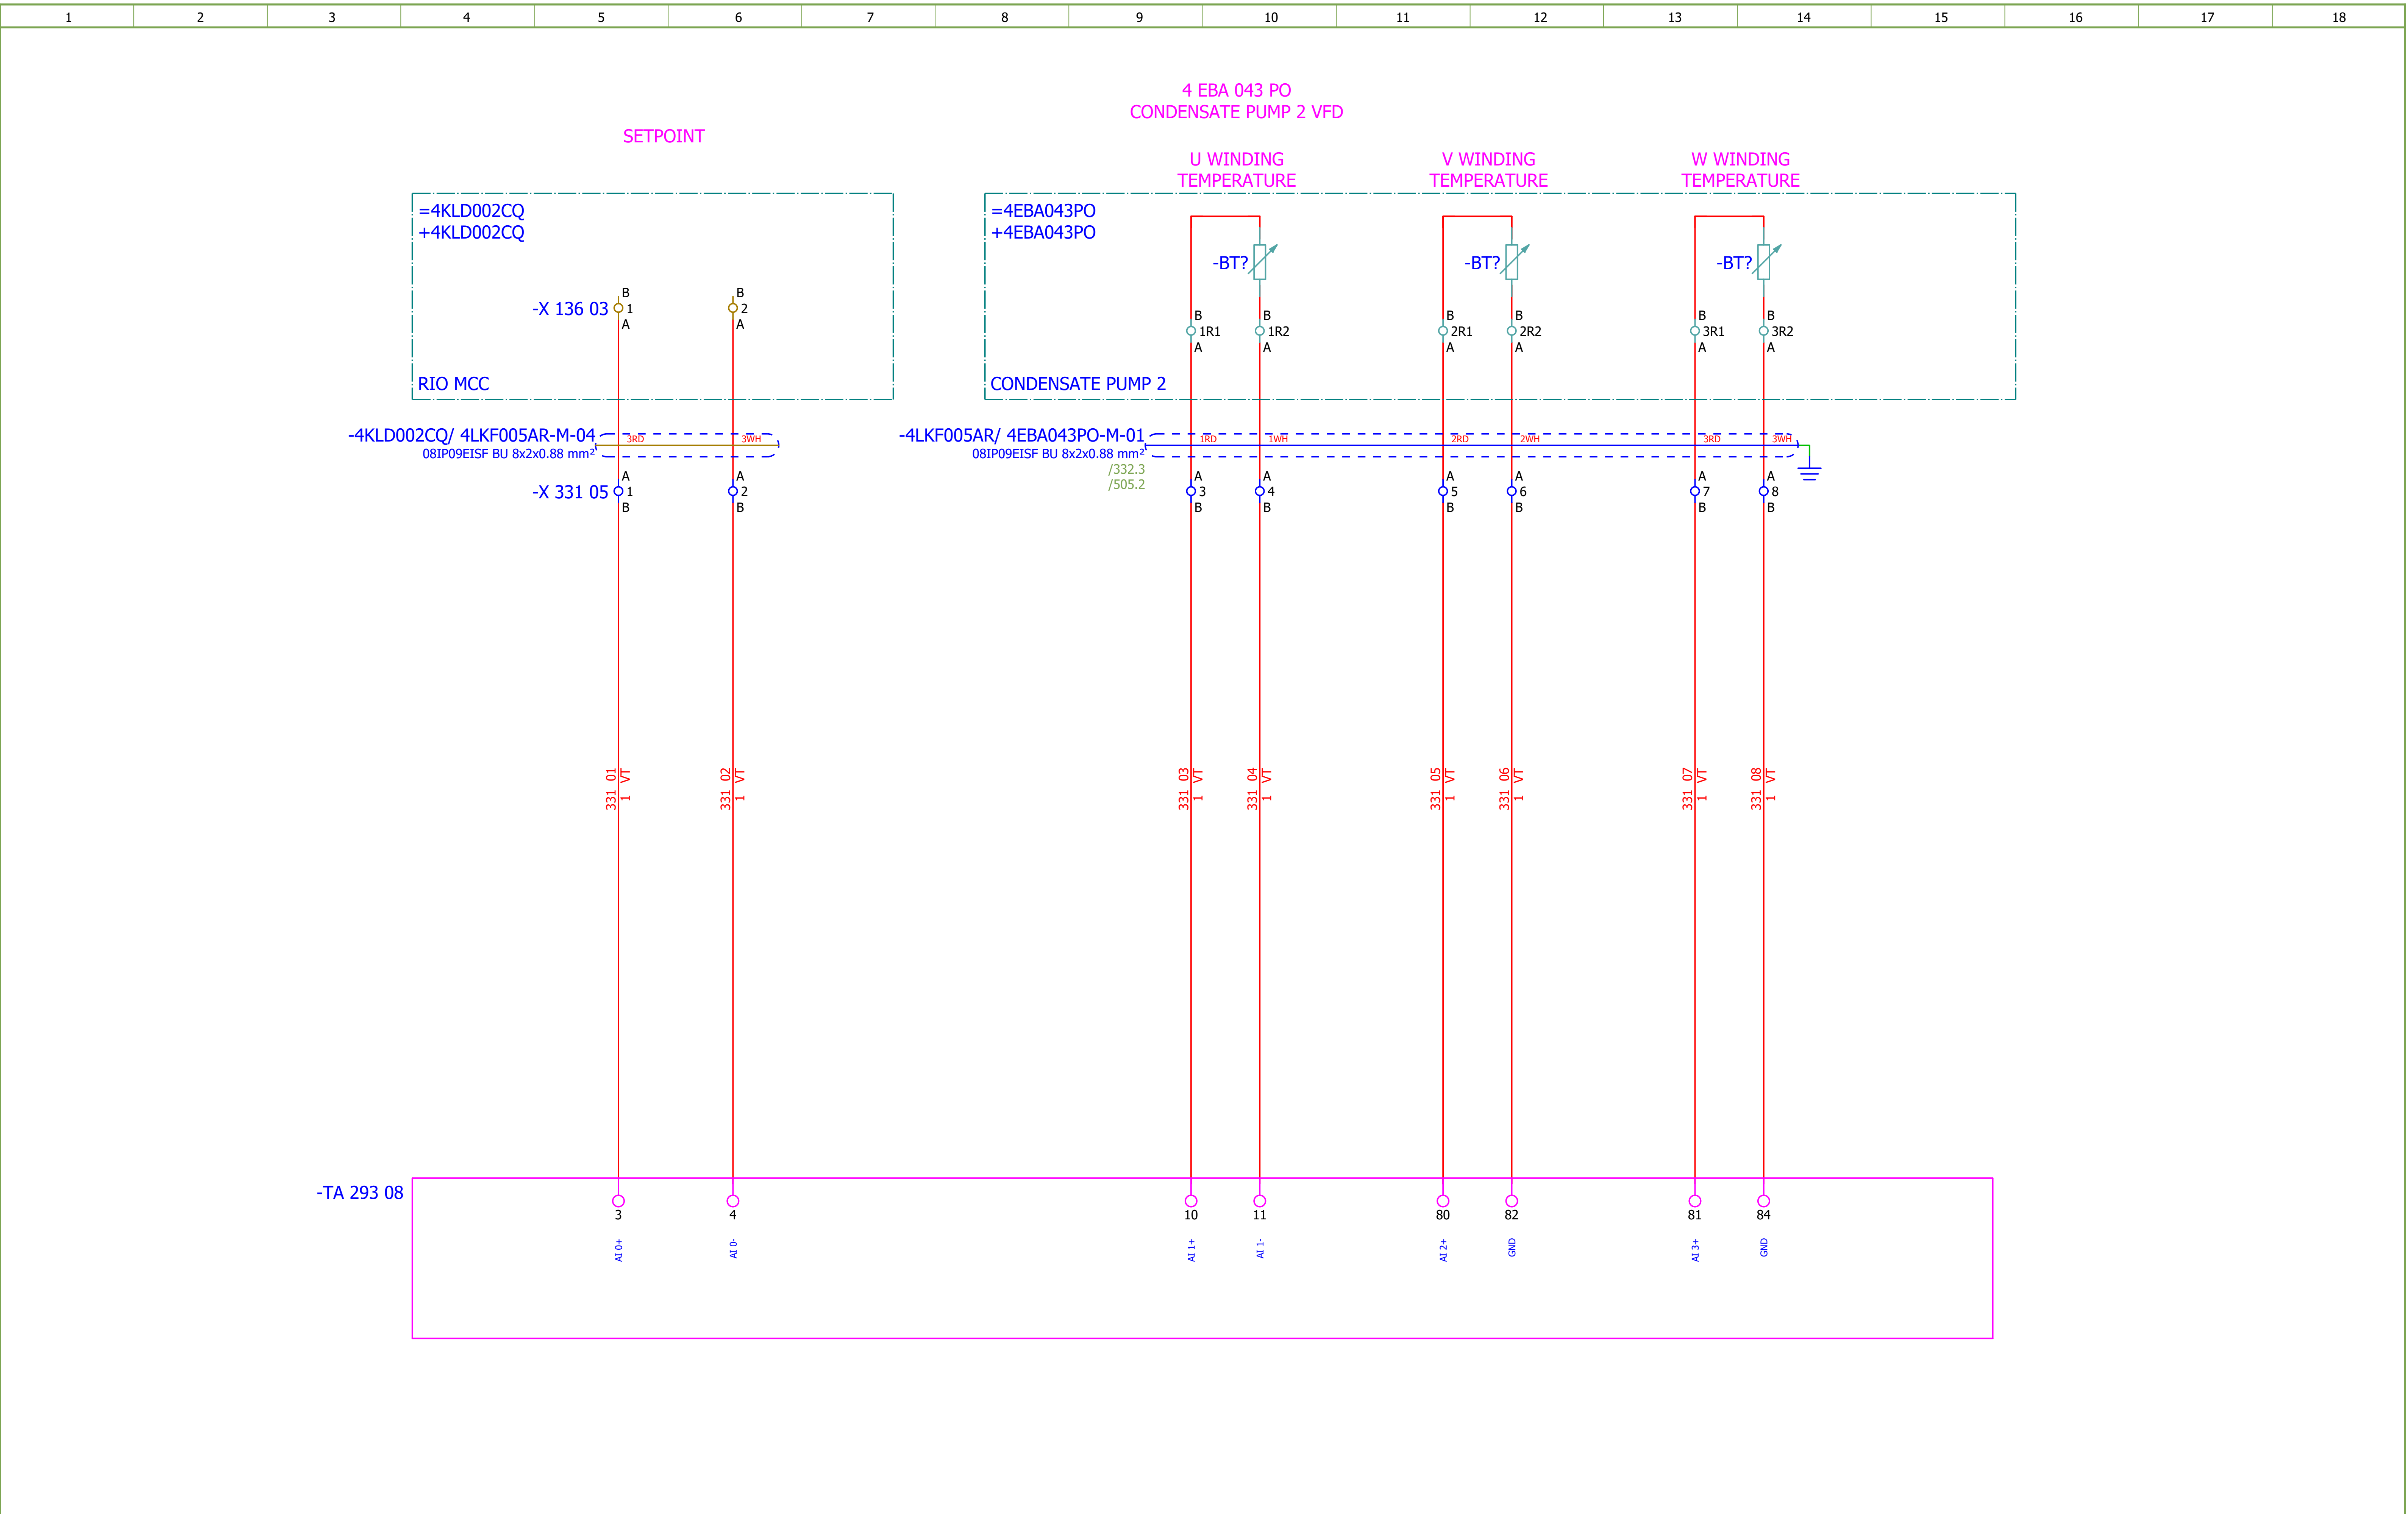

Date: 17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870
Drawn: Jere Radas						Revision: F
Approved: Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: CONDENSATE PUMP 2 - ANALOG INPUTS	Drawing designation: BRC-4-ATEP0-1870-F	=4LKF001AR	#MB Sheet: 331
Format: A3					+4LKF005AR	Next: 332

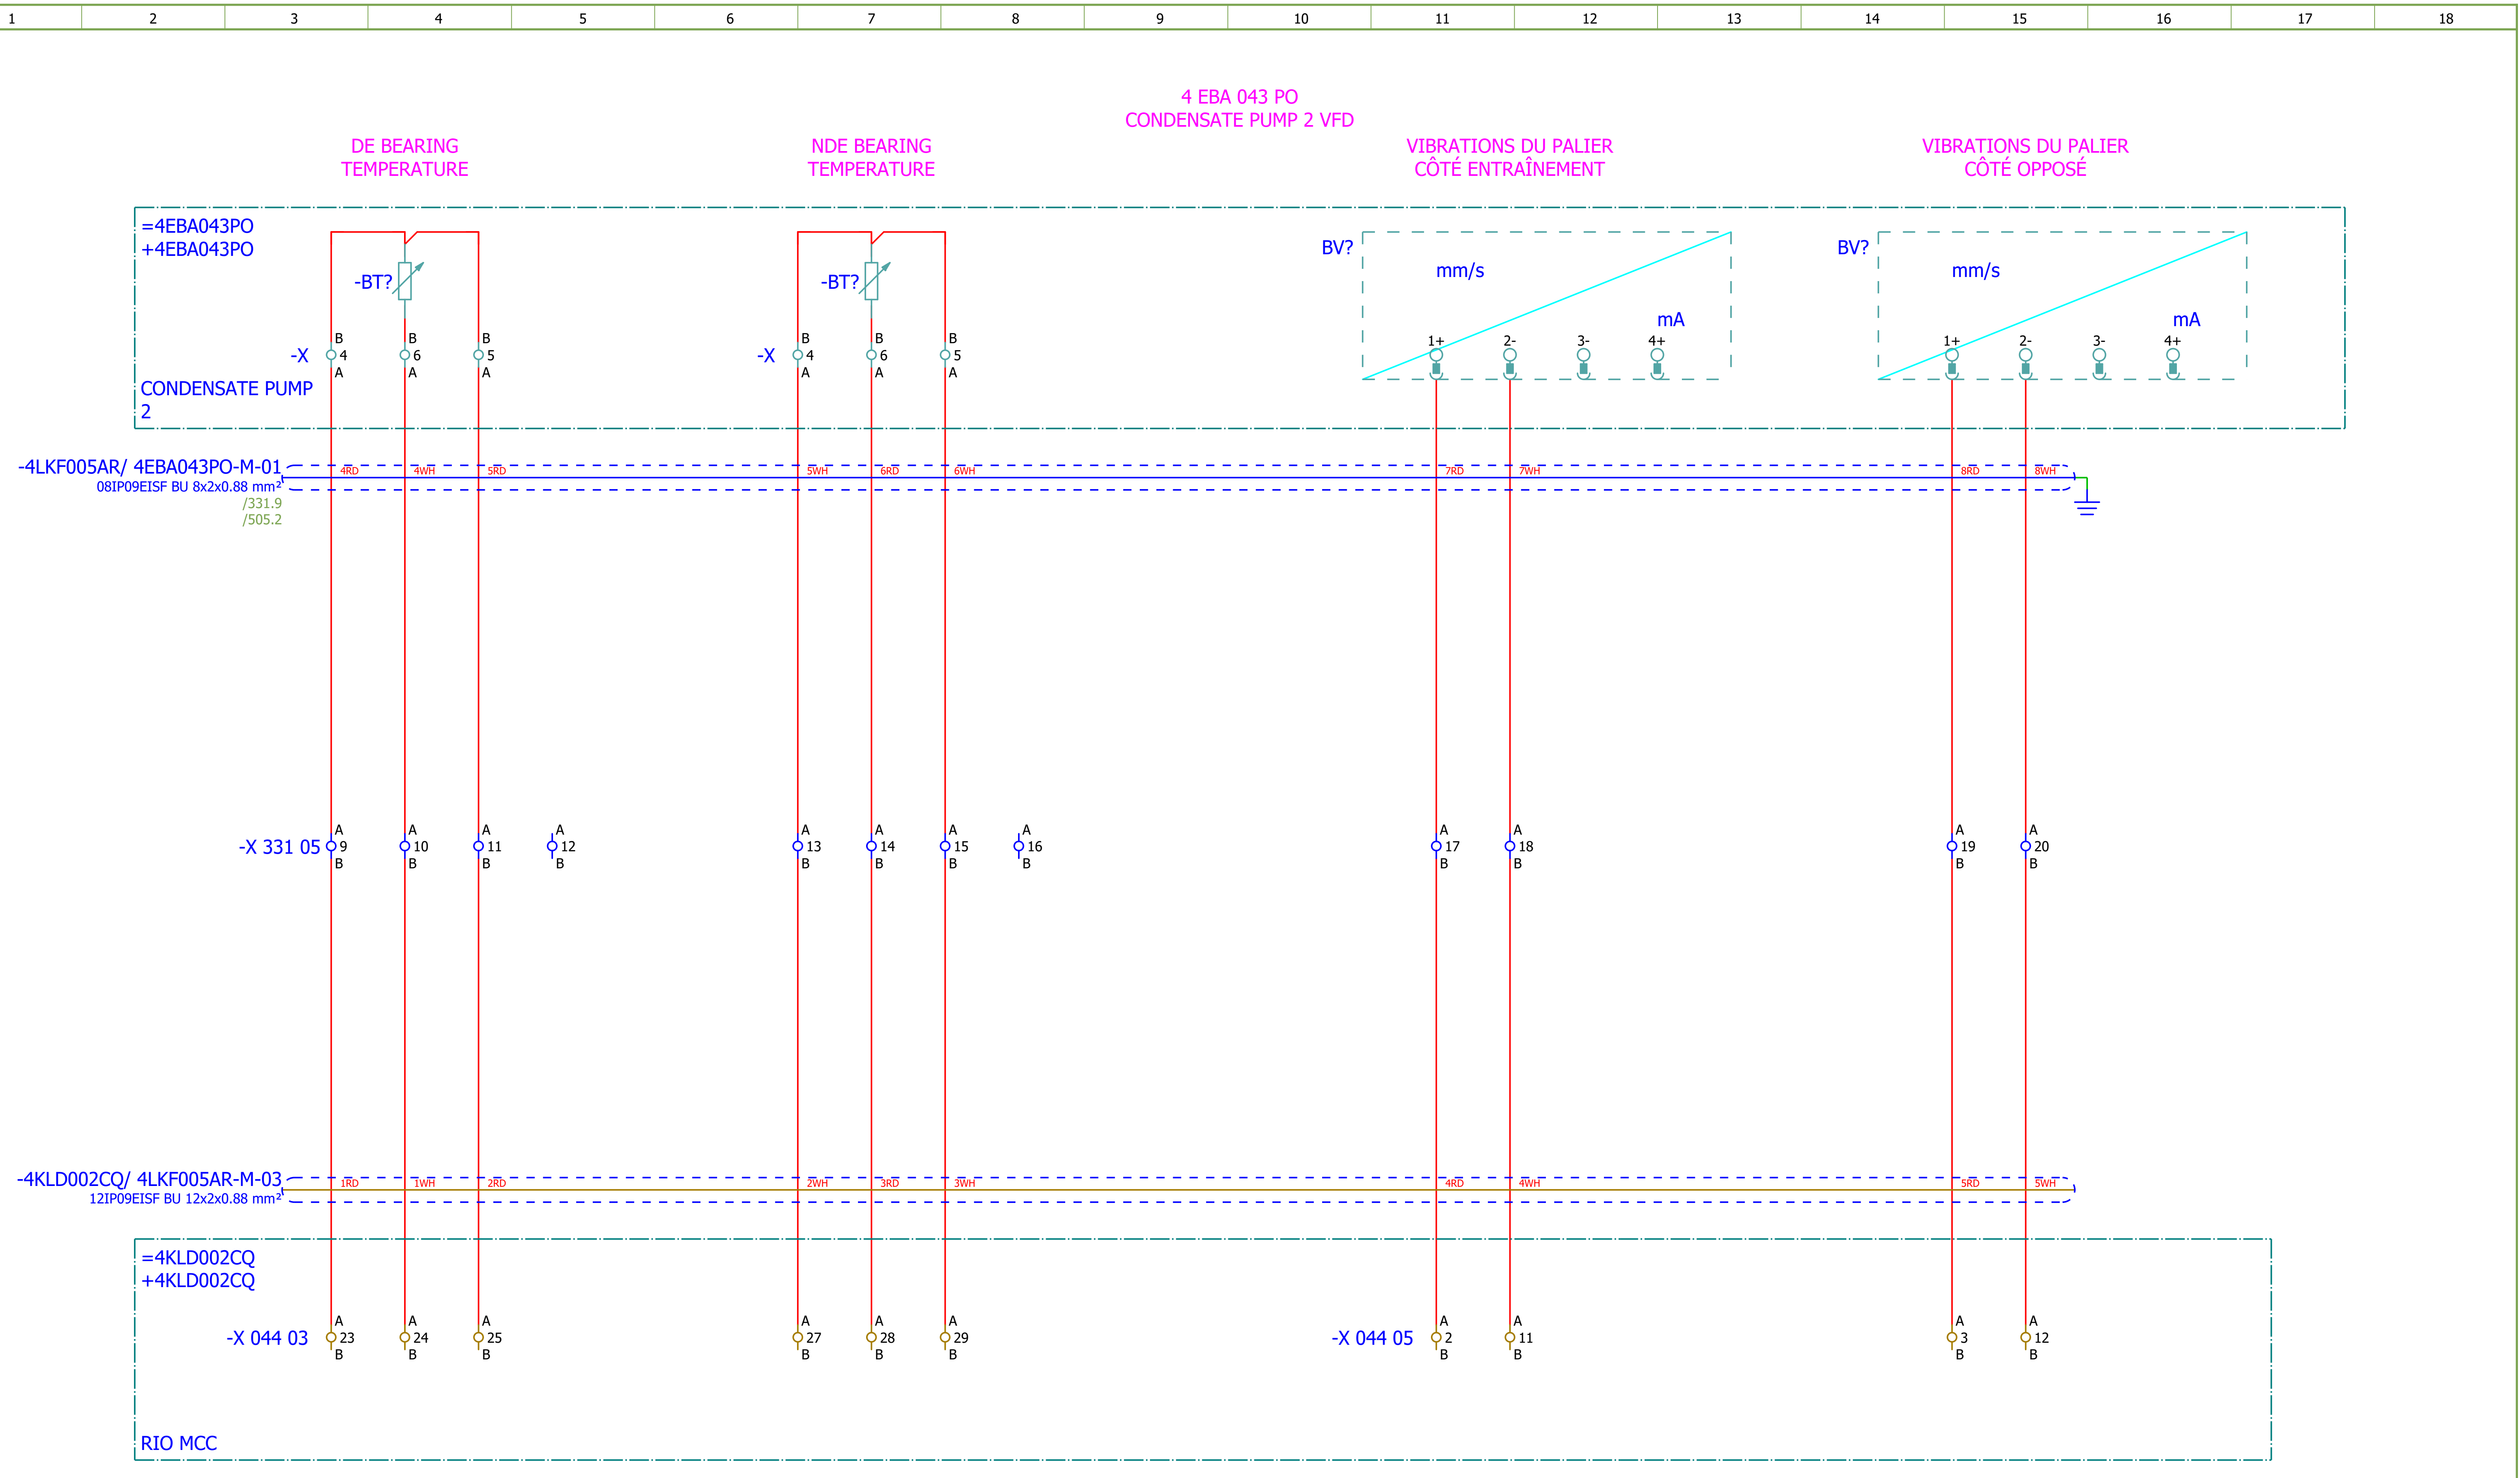

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Jere Radas								#MB
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: CONDENSATE PUMP 2 - ANALOG INPUTS	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 332
Format:	A3							+4LKF005AR	Next: 333

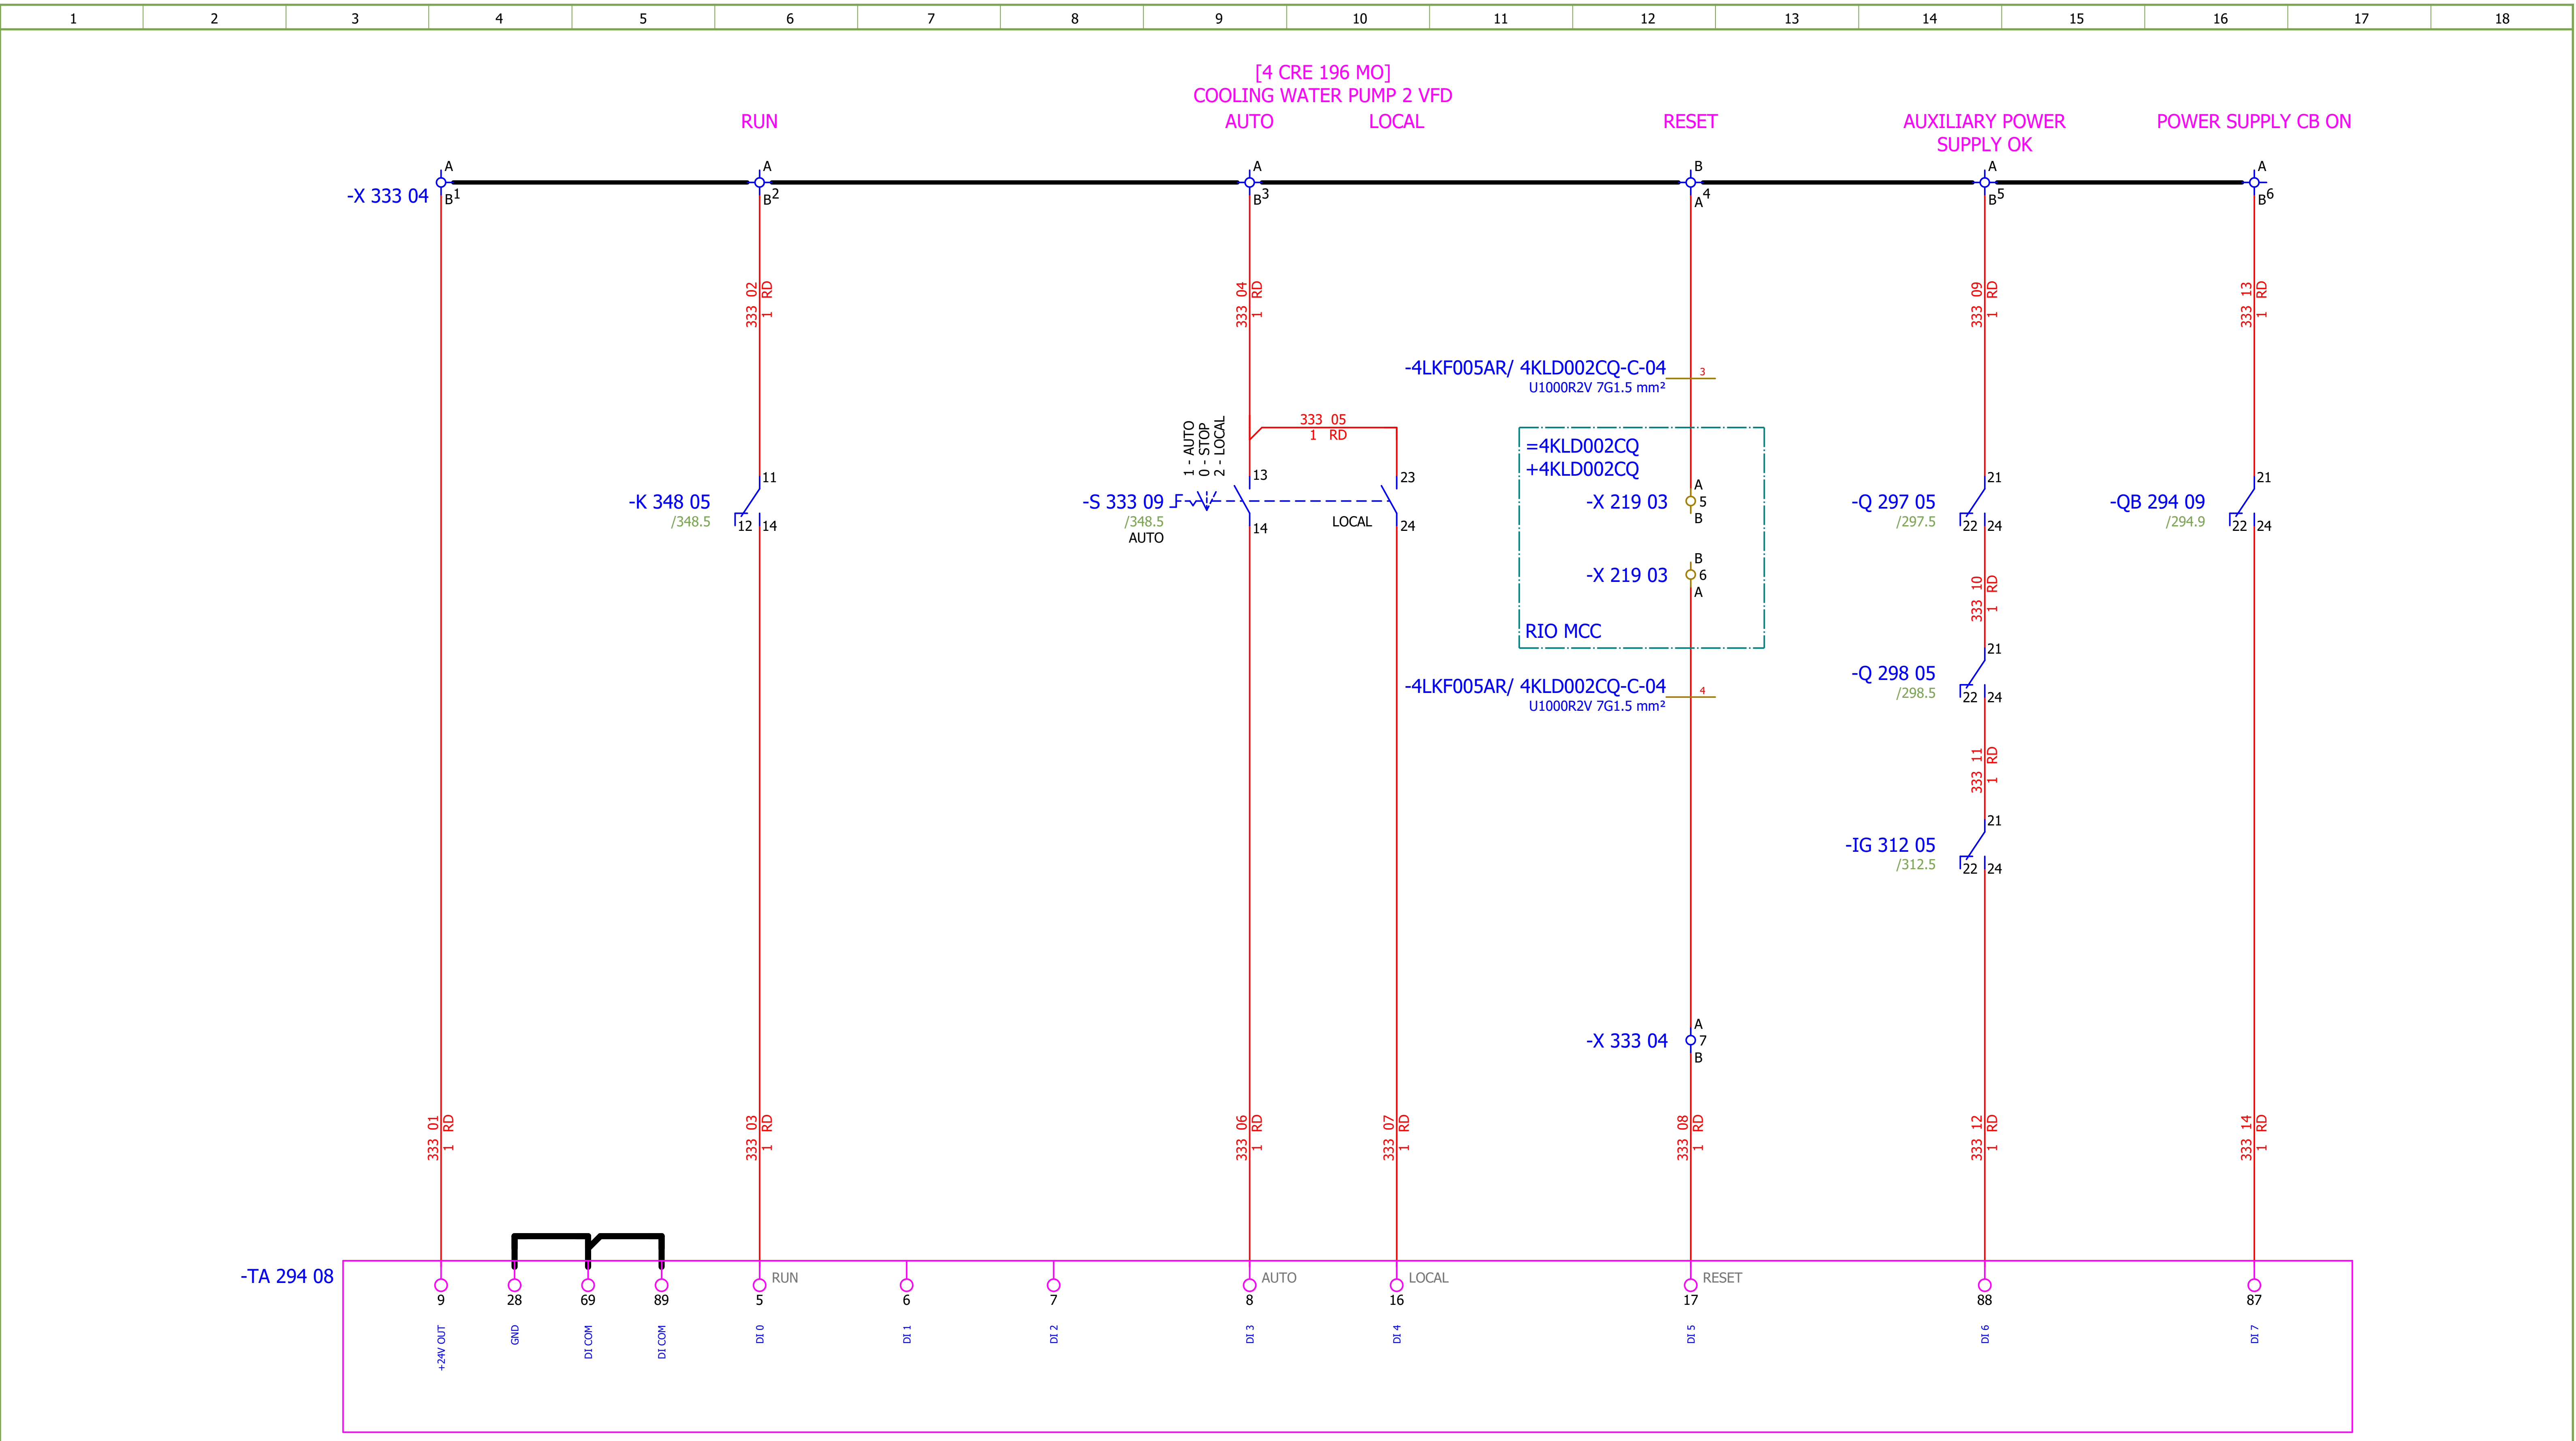

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#MB
Drawn:	Jere Radas									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 2 - DIGITAL INPUTS	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 333
Format:	A3								+4LKF005AR	Next: 334

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

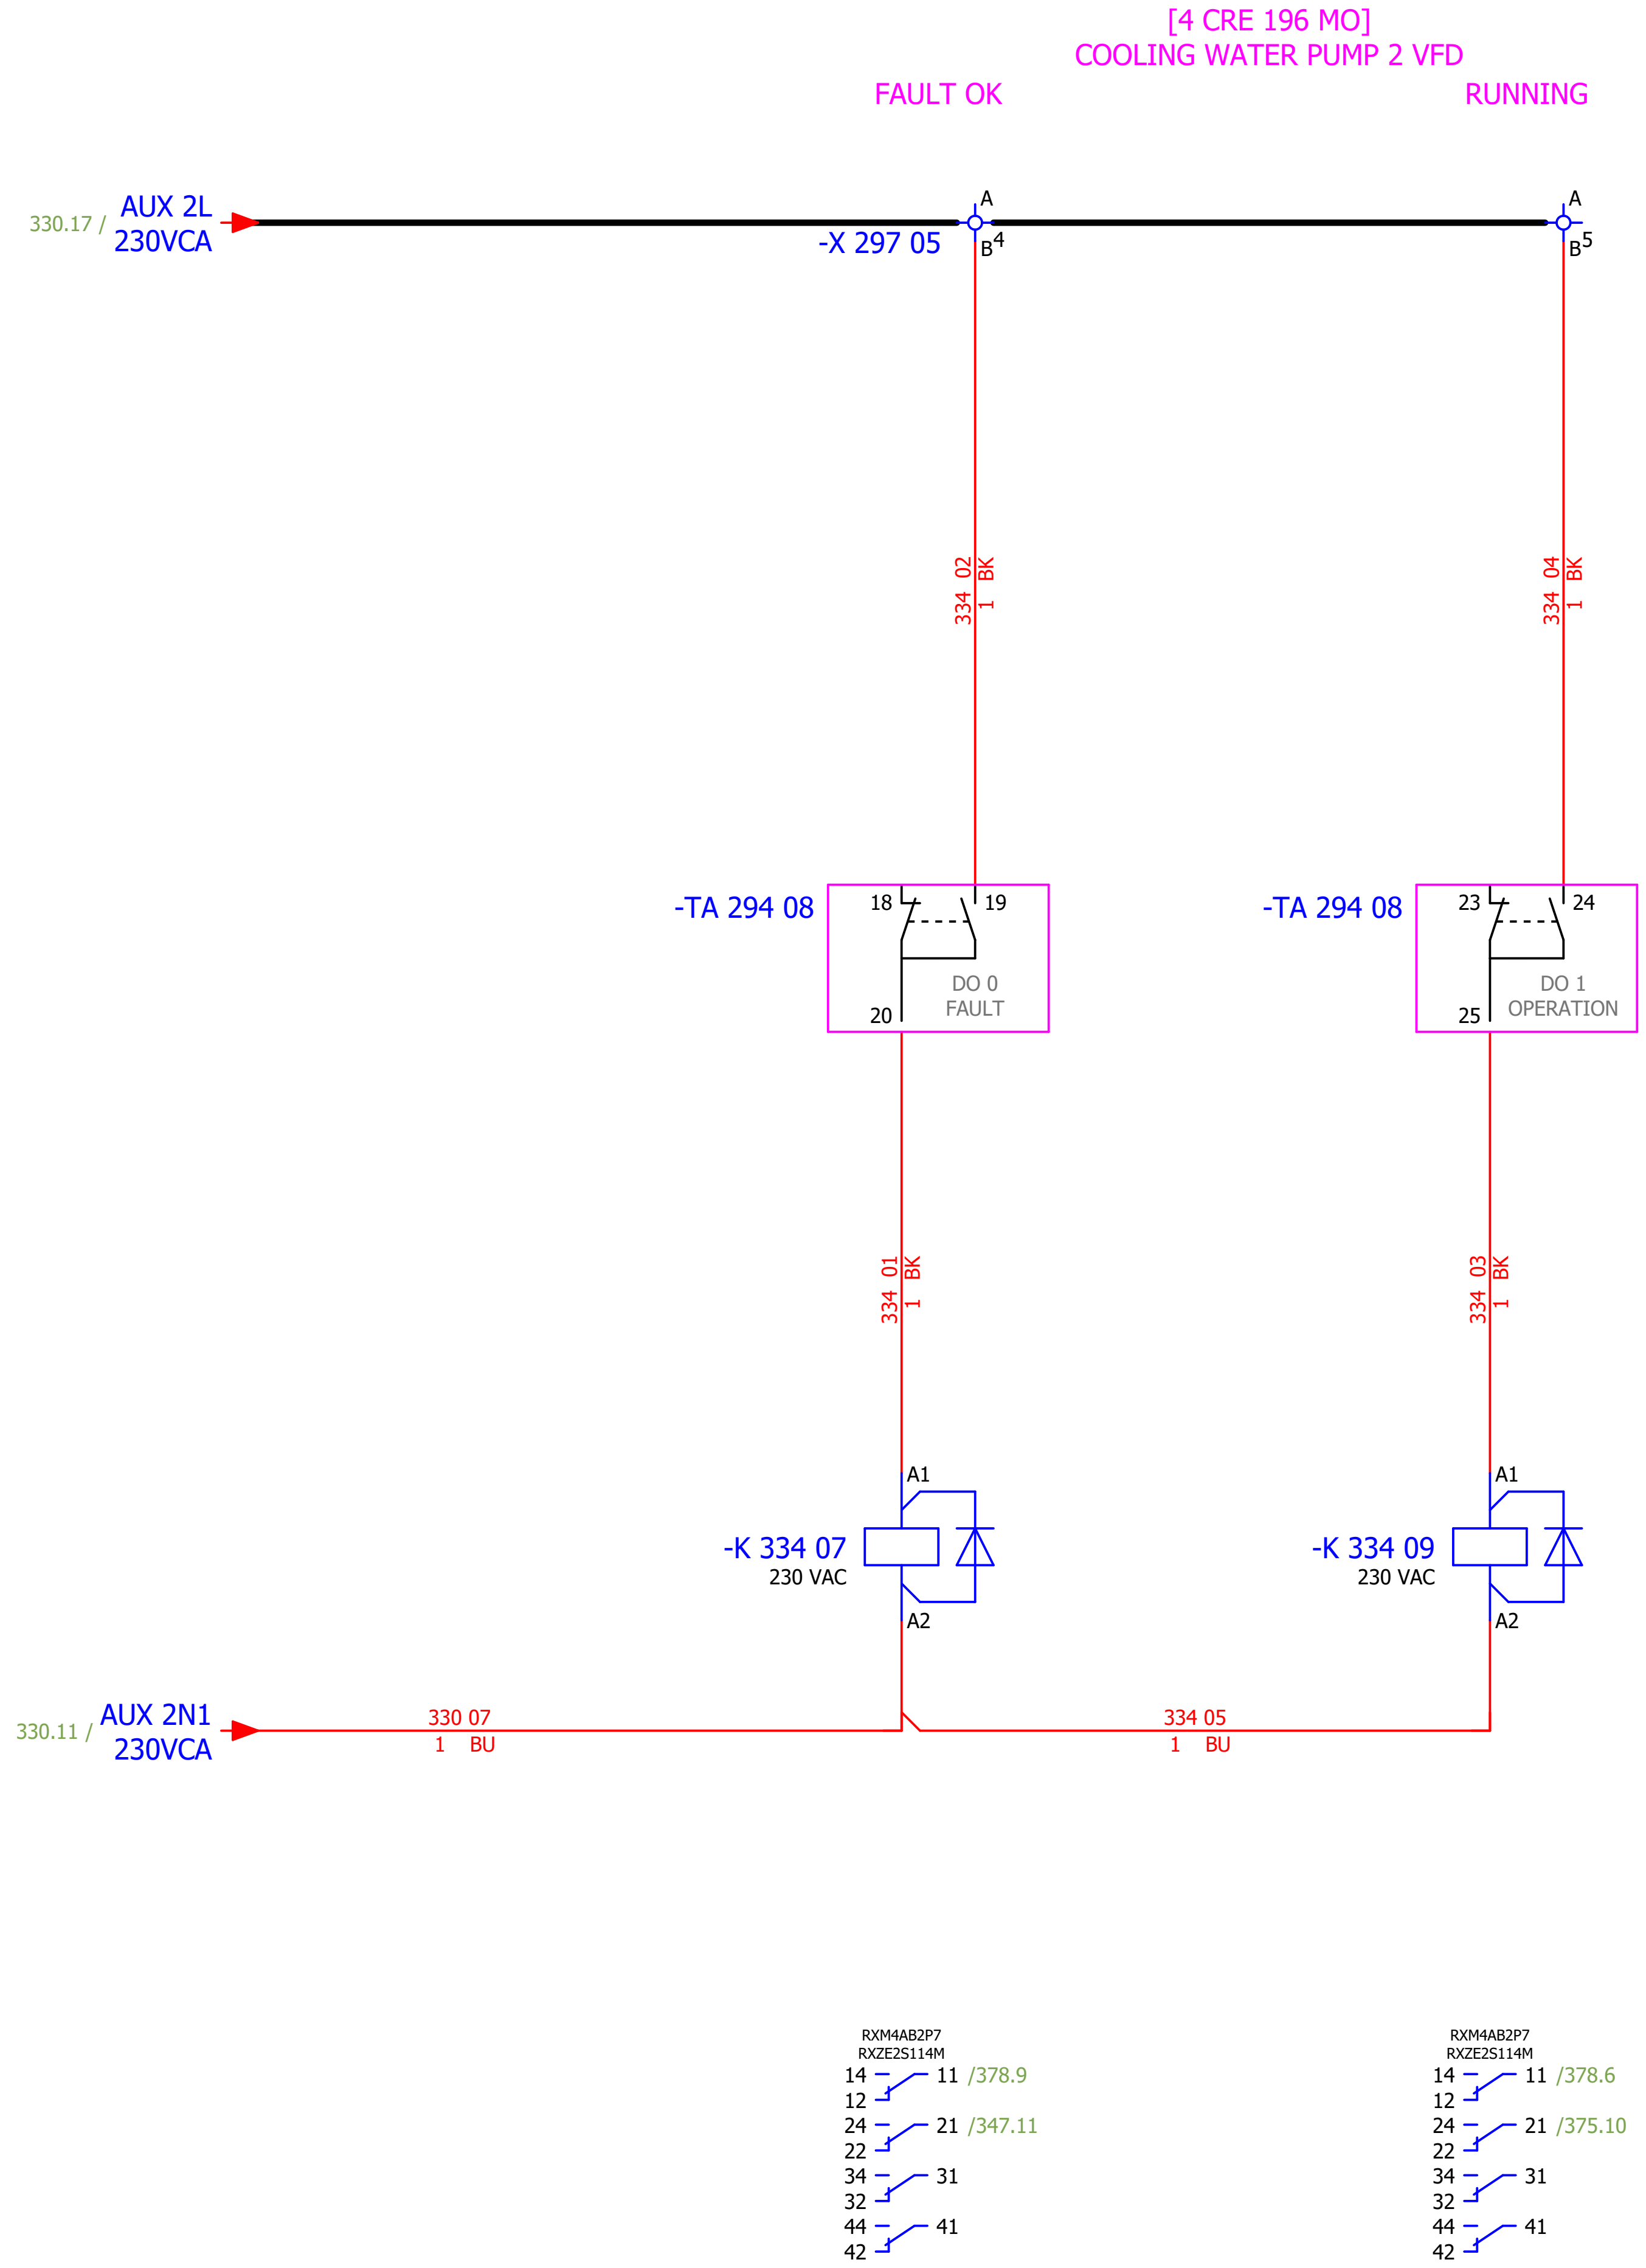

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#MB
Drawn:	Jere Radas									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 2 - DIGITAL OUTPUTS	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 334
Format:	A3								+4LKF005AR	Next: 335

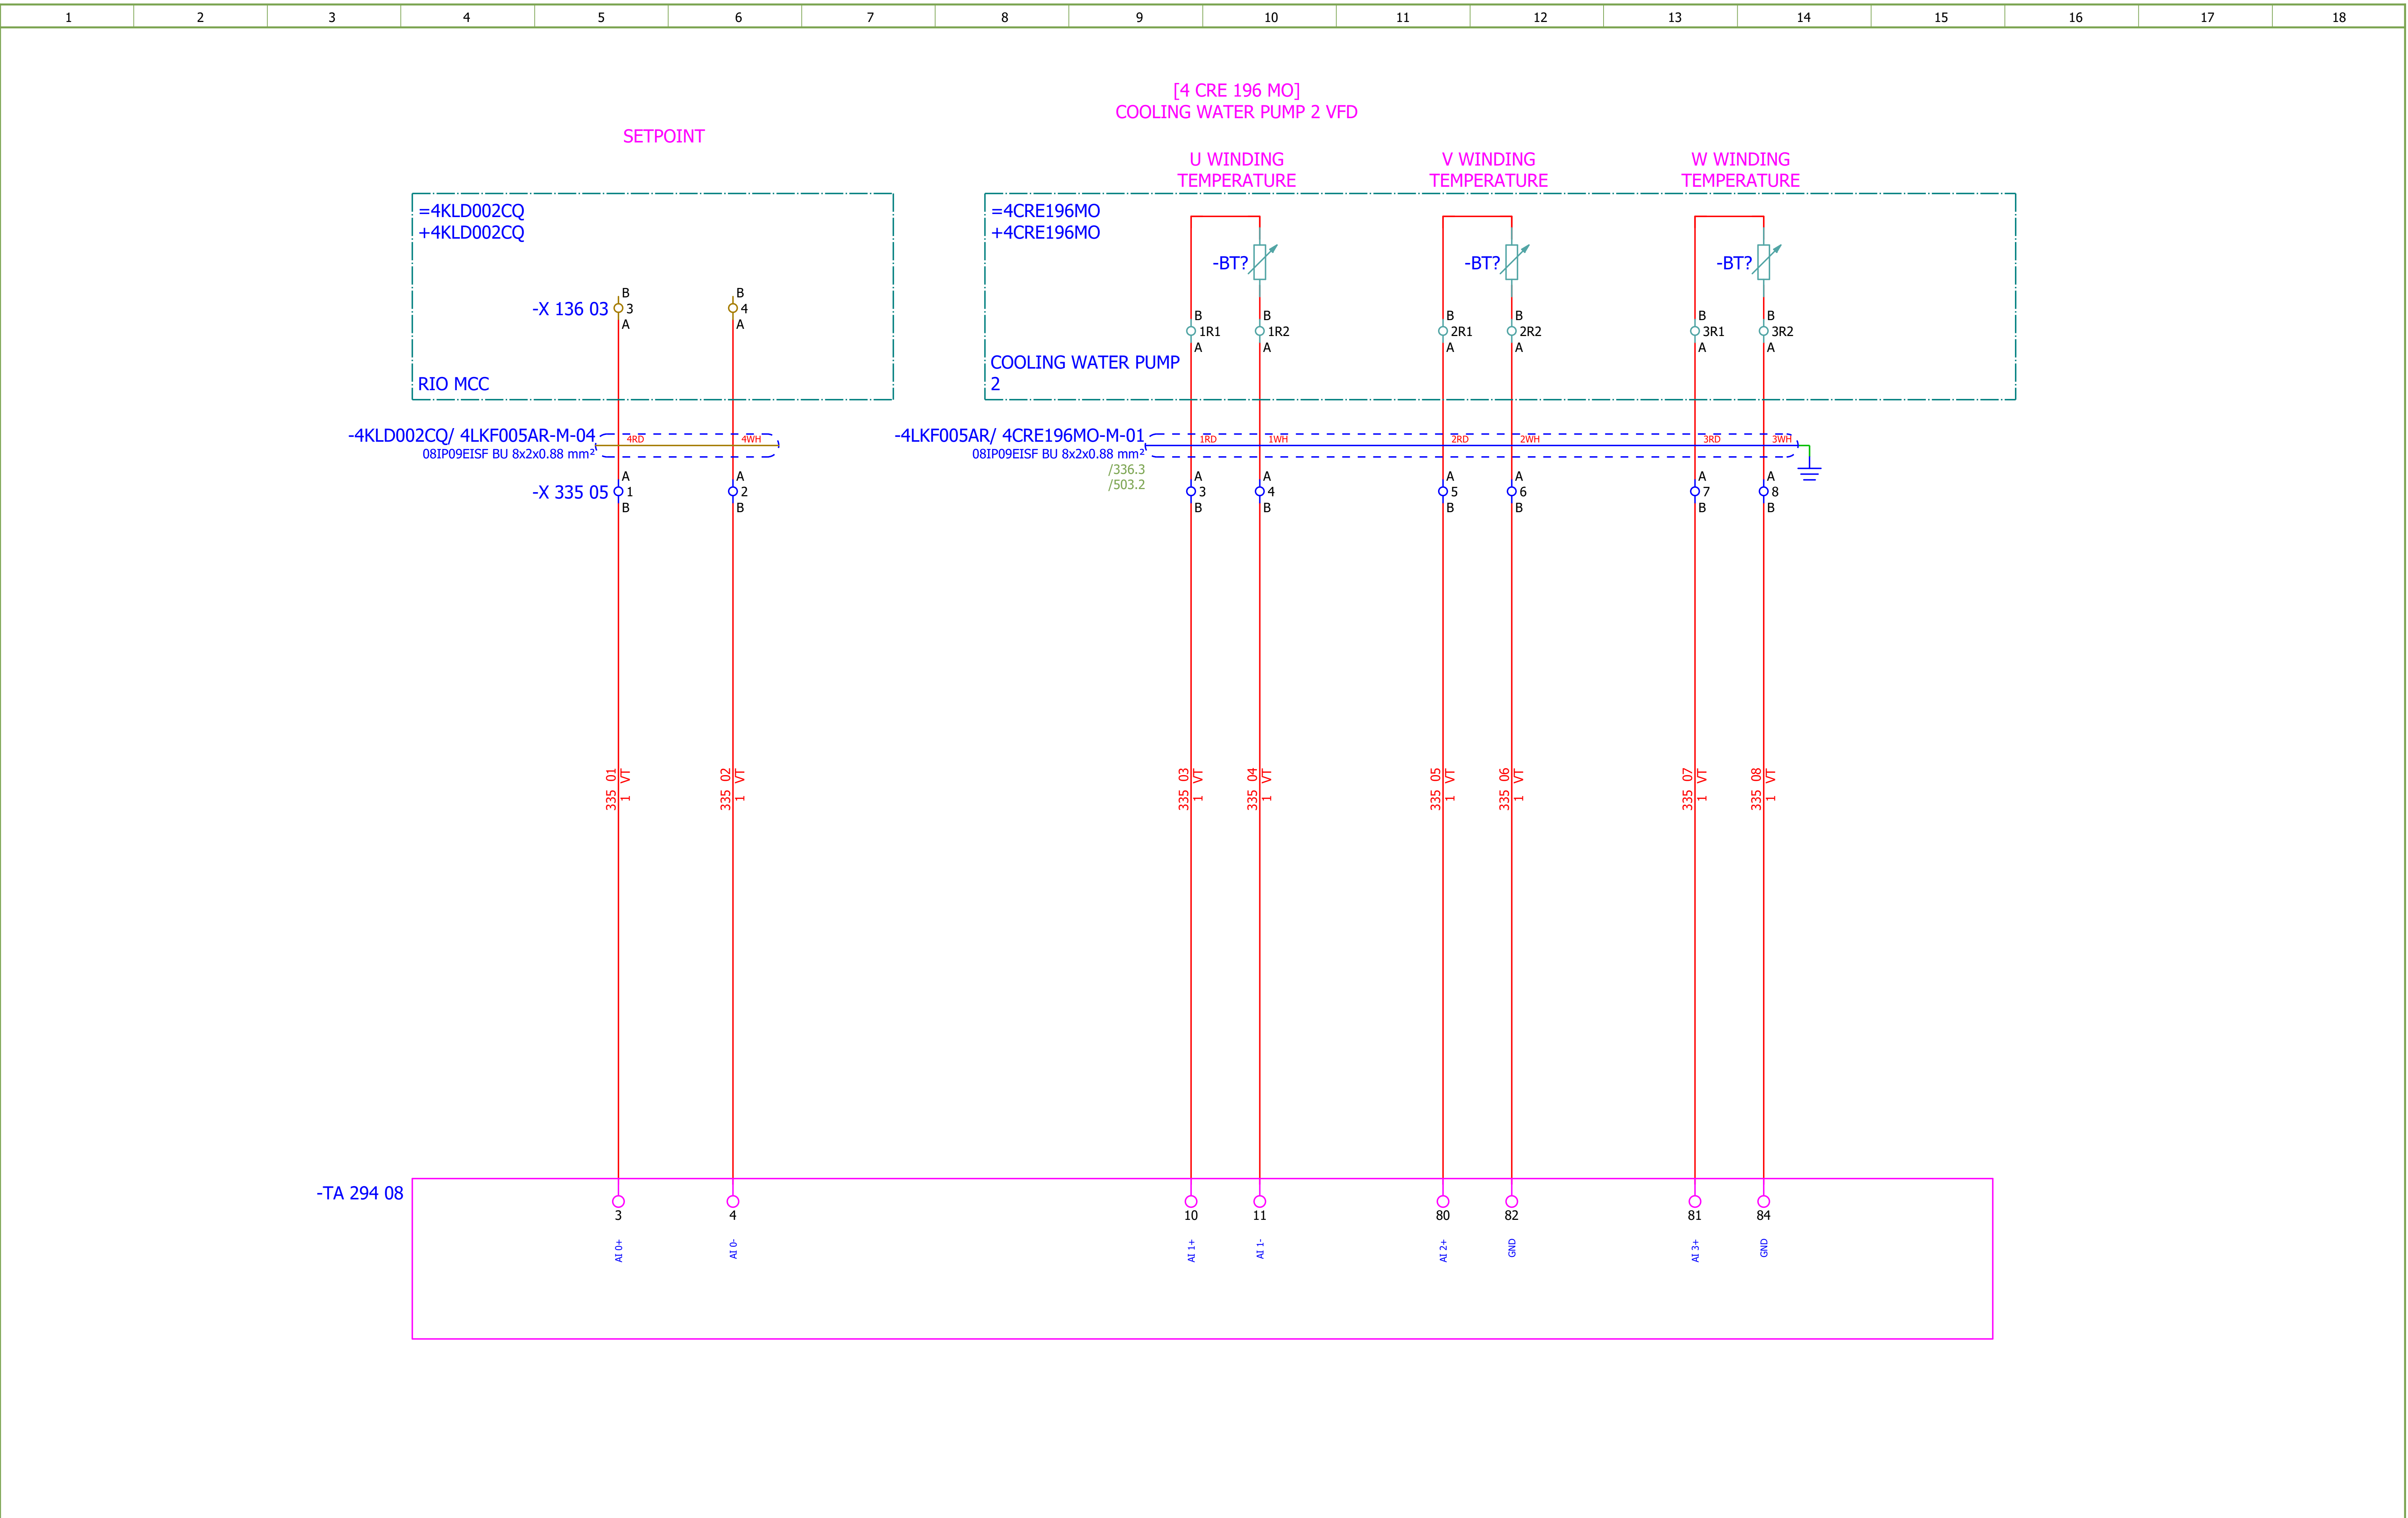

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Jere Radas								#MB
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 2 - ANALOG INPUTS	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 335
Format:	A3							+4LKF005AR	Next: 336

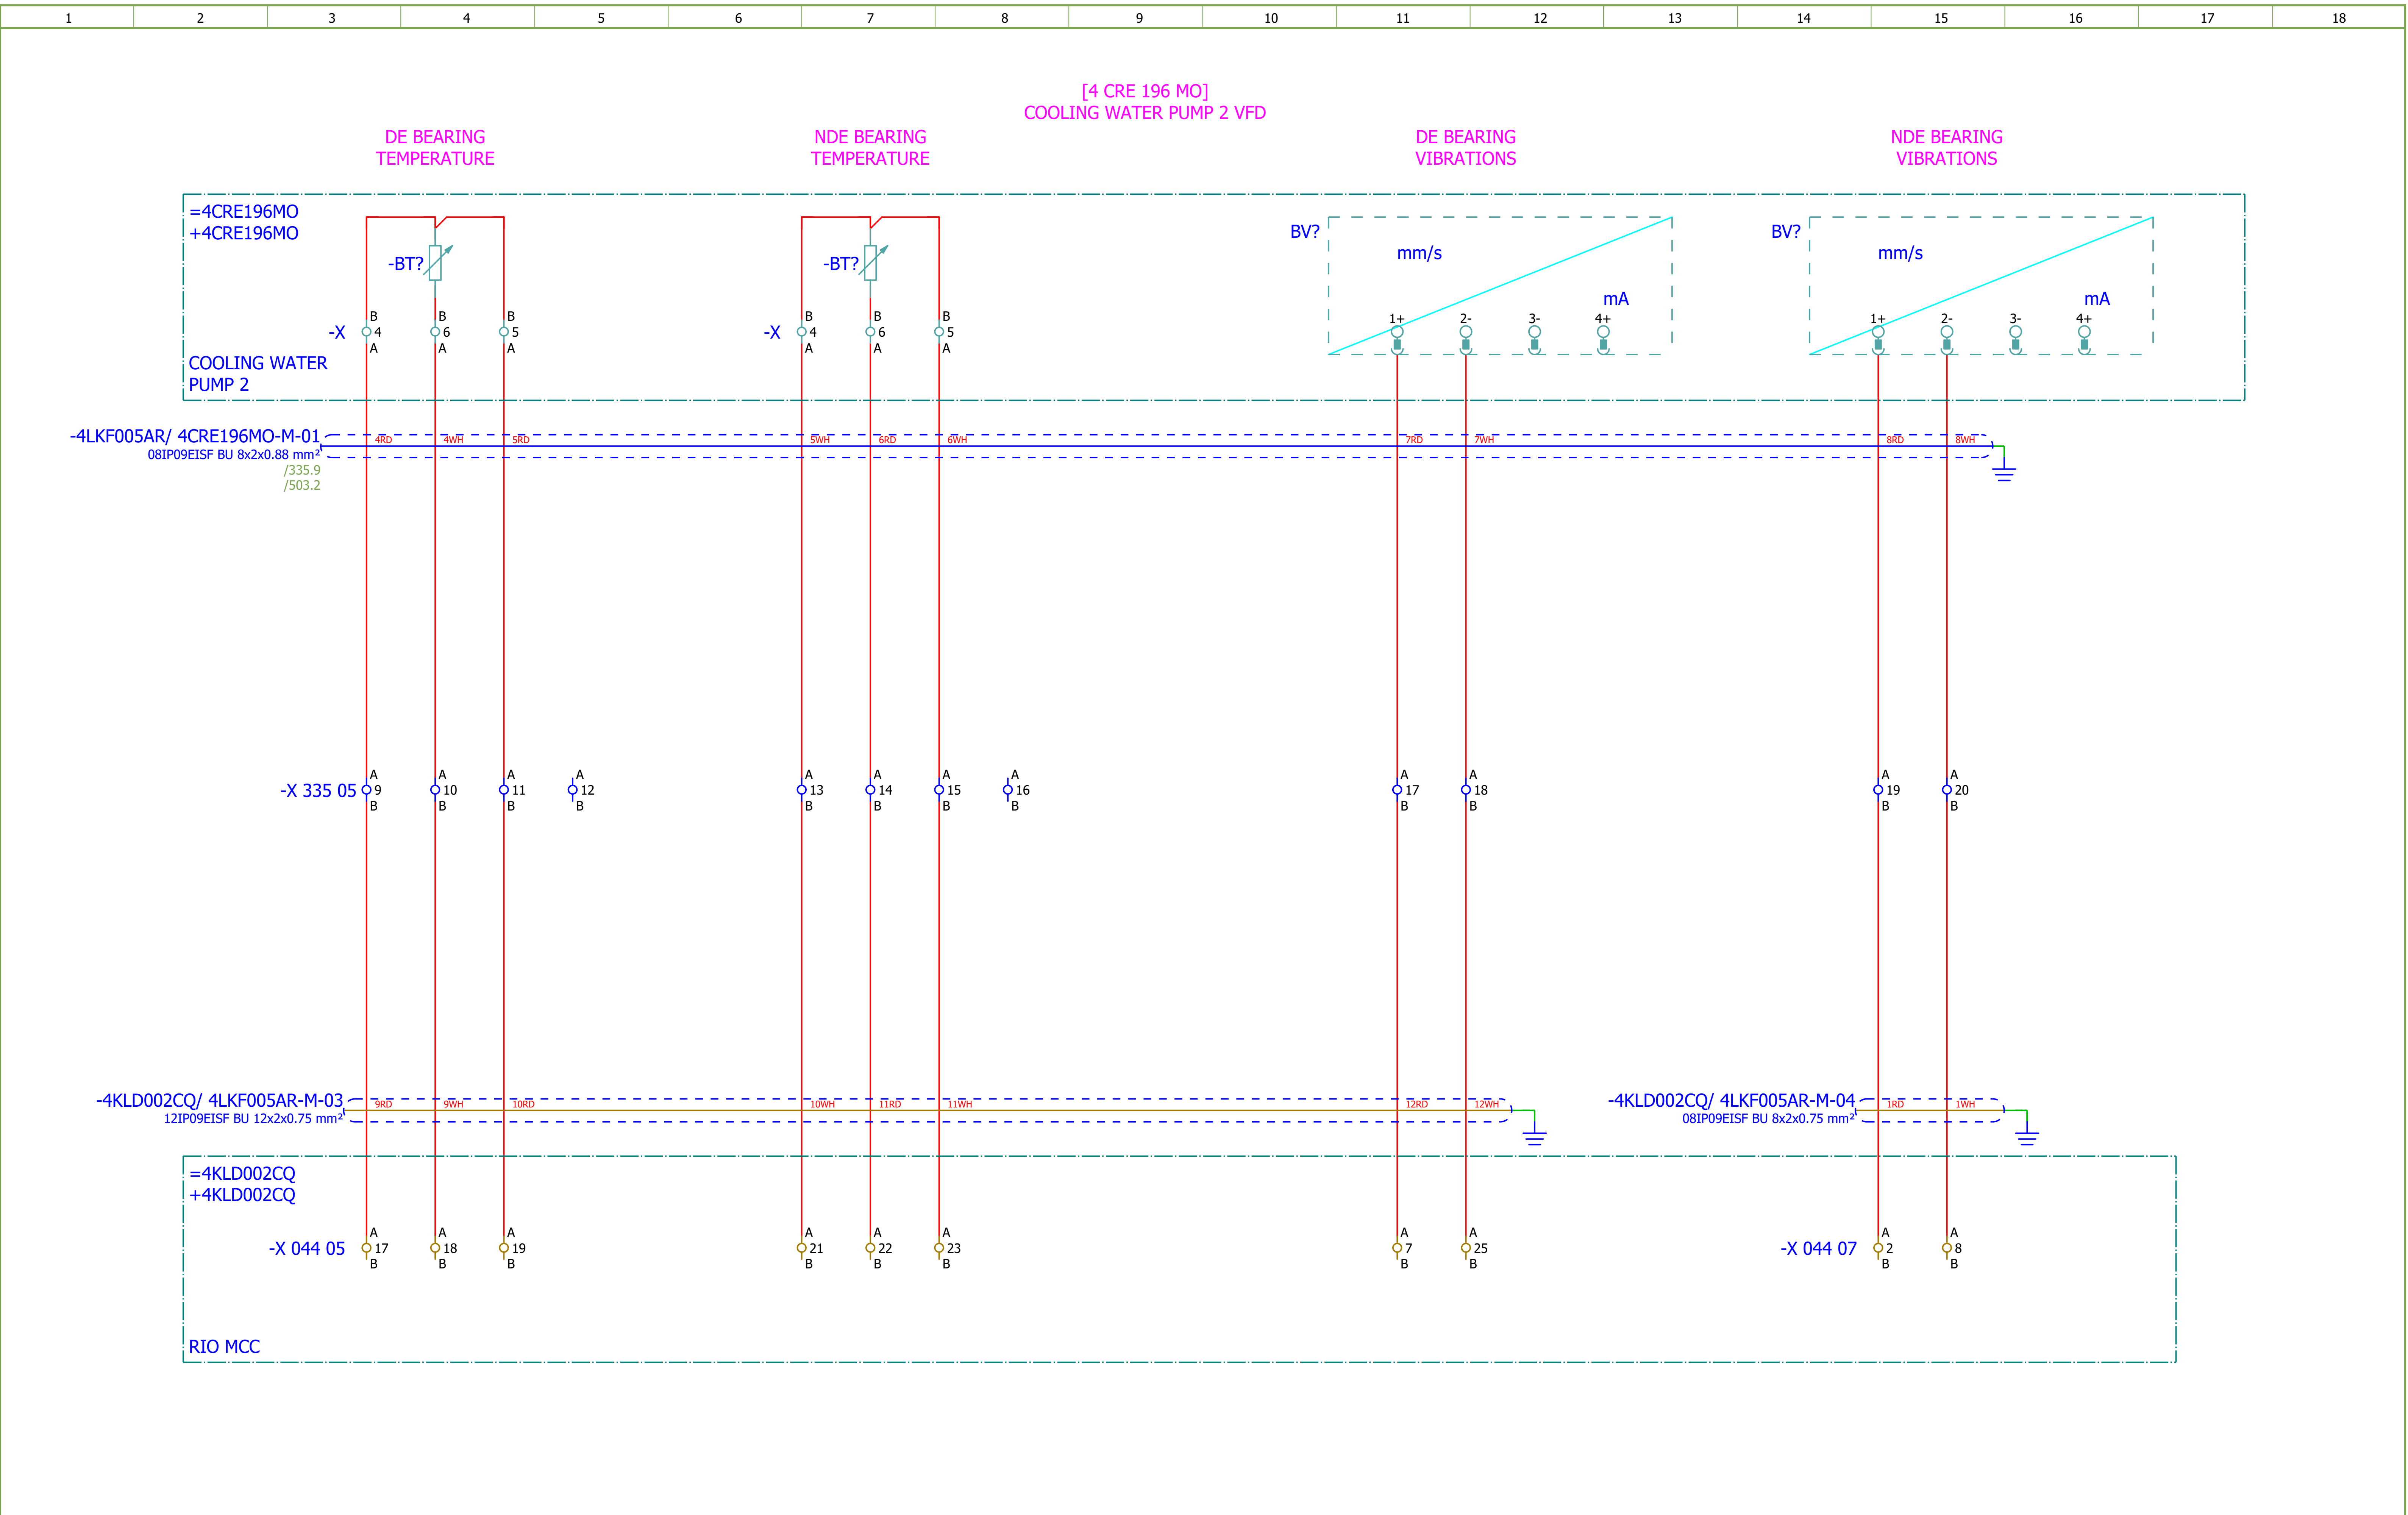

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#MB	
Drawn:	Jere Radas											
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	COOLING WATER PUMP 2 - ANALOG INPUTS	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet:	336
Format:	A3									+4LKF005AR	Next:	337

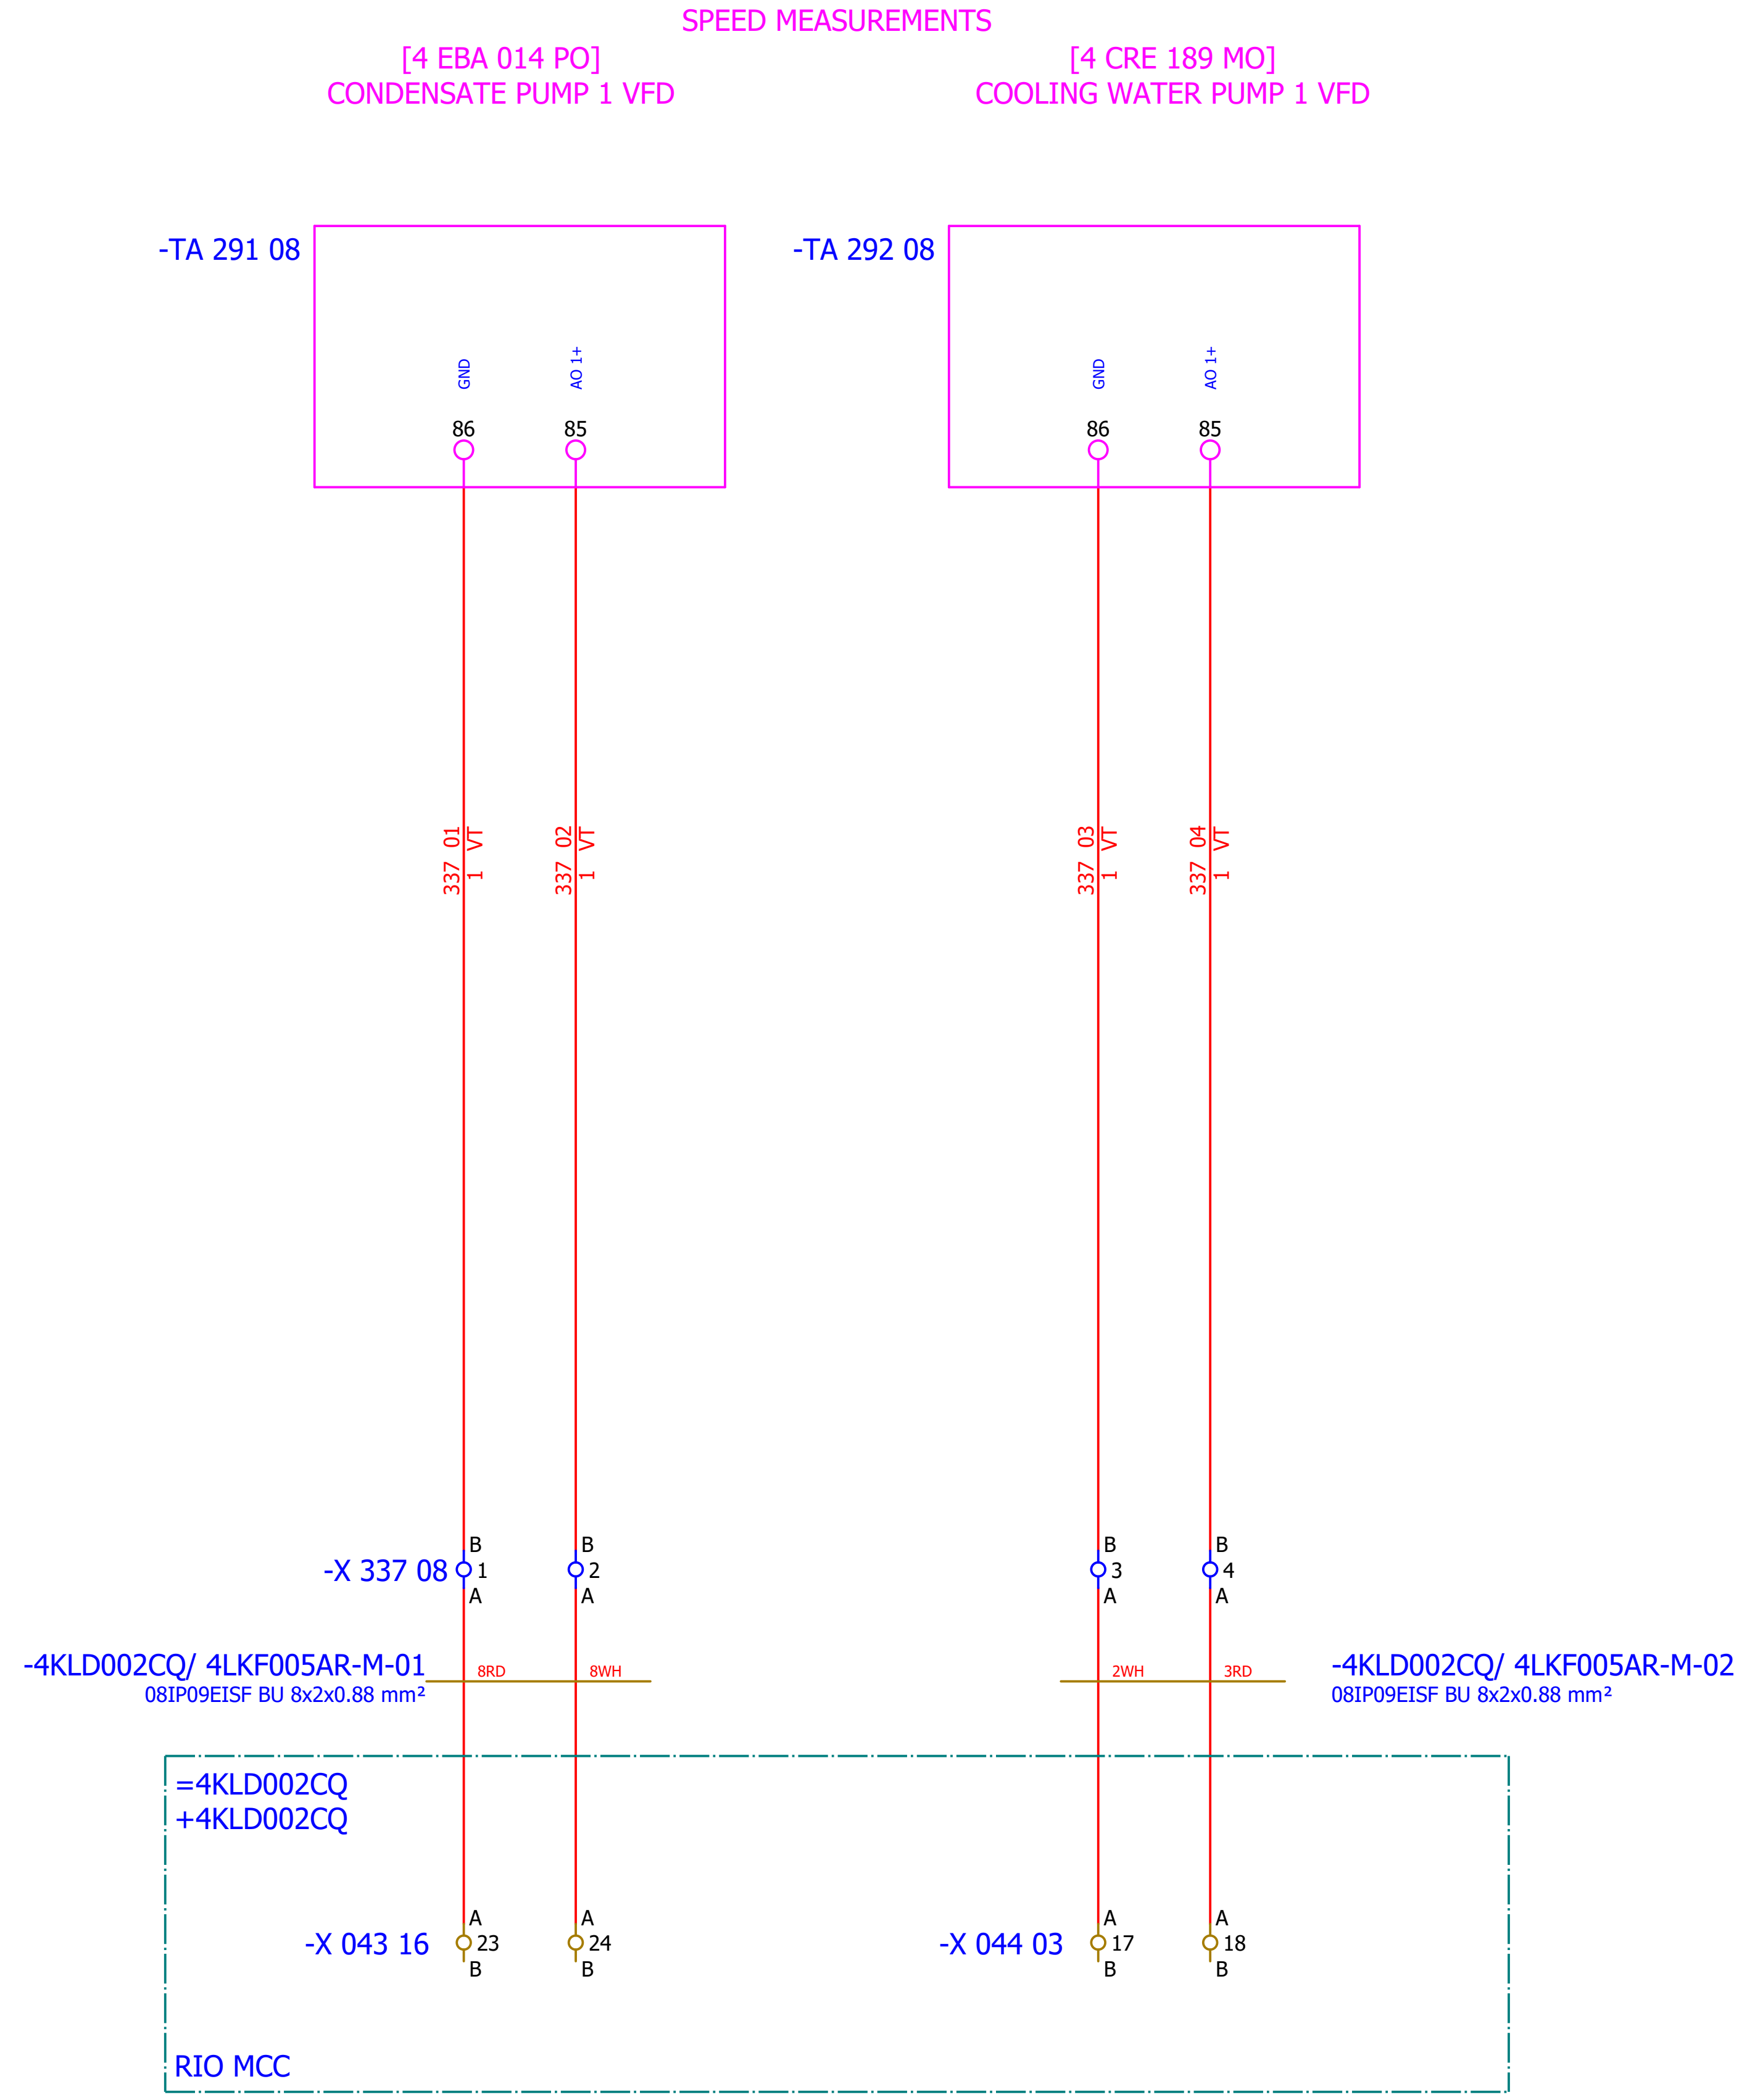

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Jere Radas								#MB
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: VFD GROUP 1 - ANALOG OUTPUTS	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 337
Format:	A3							+4LKF005AR	Next: 338

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

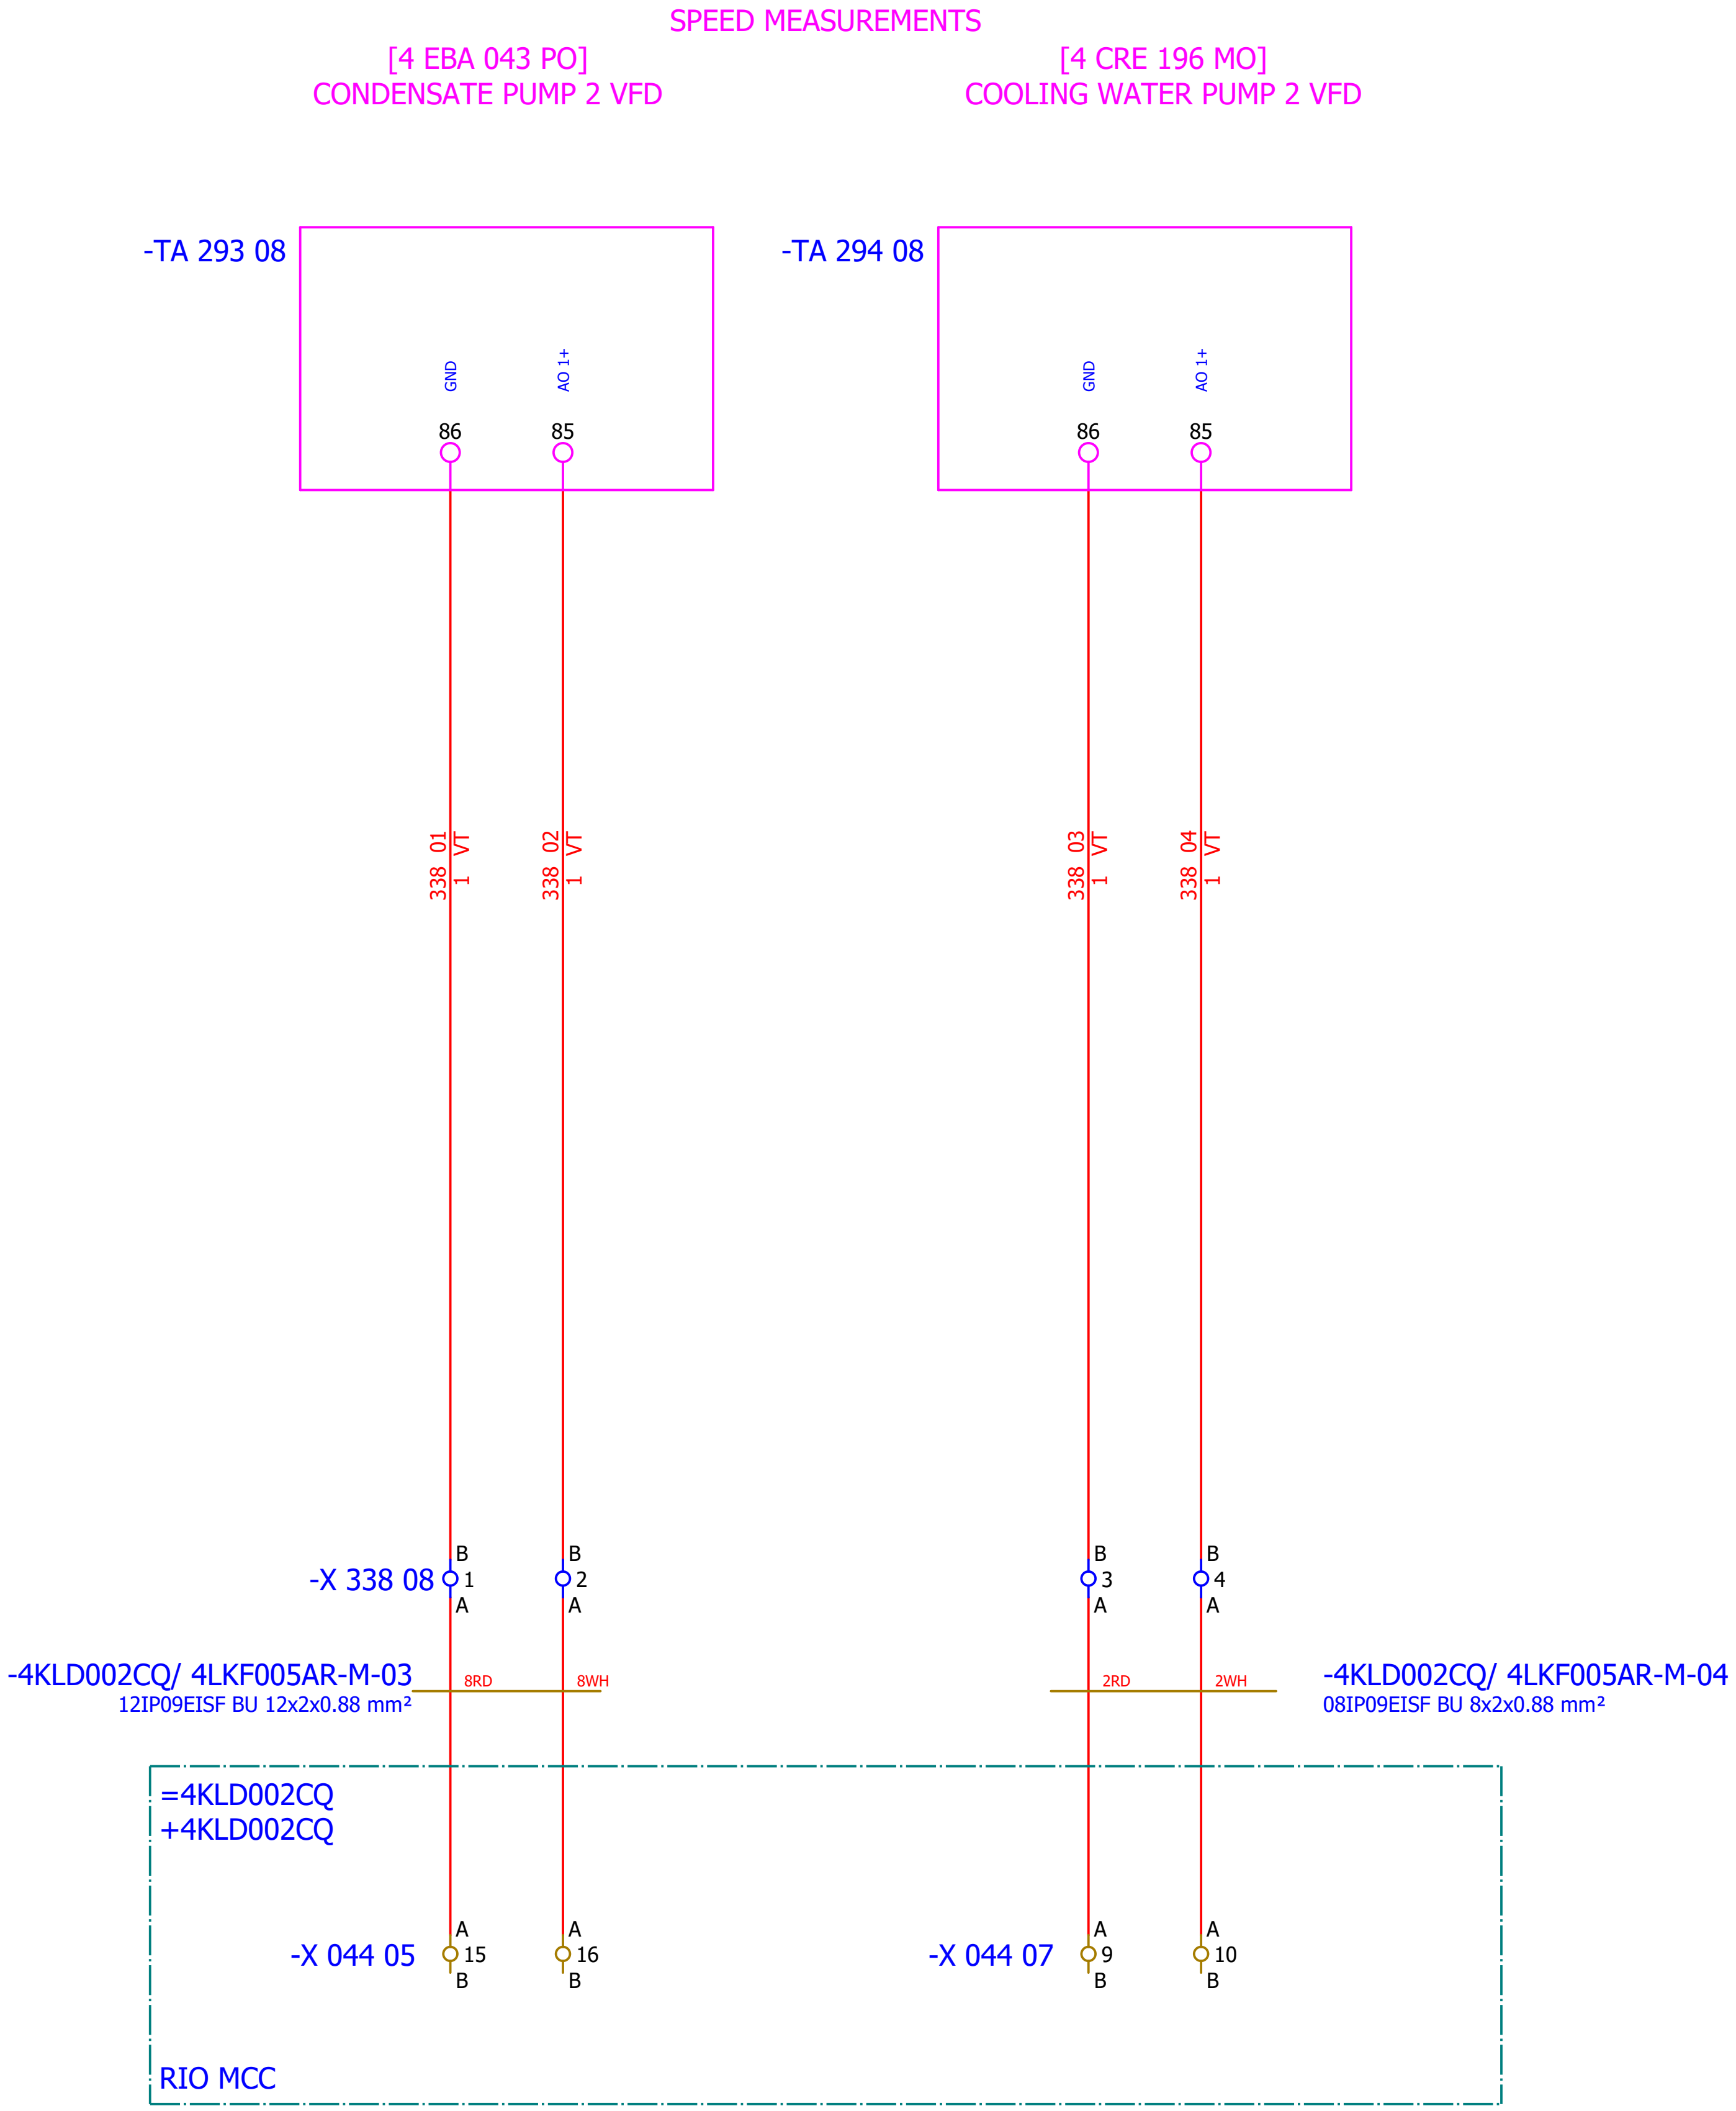

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Jere Radas								#MB
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: VFD GROUP 2 - ANALOG OUTPUTS	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 338
Format:	A3							+4LKF005AR	Next: 341

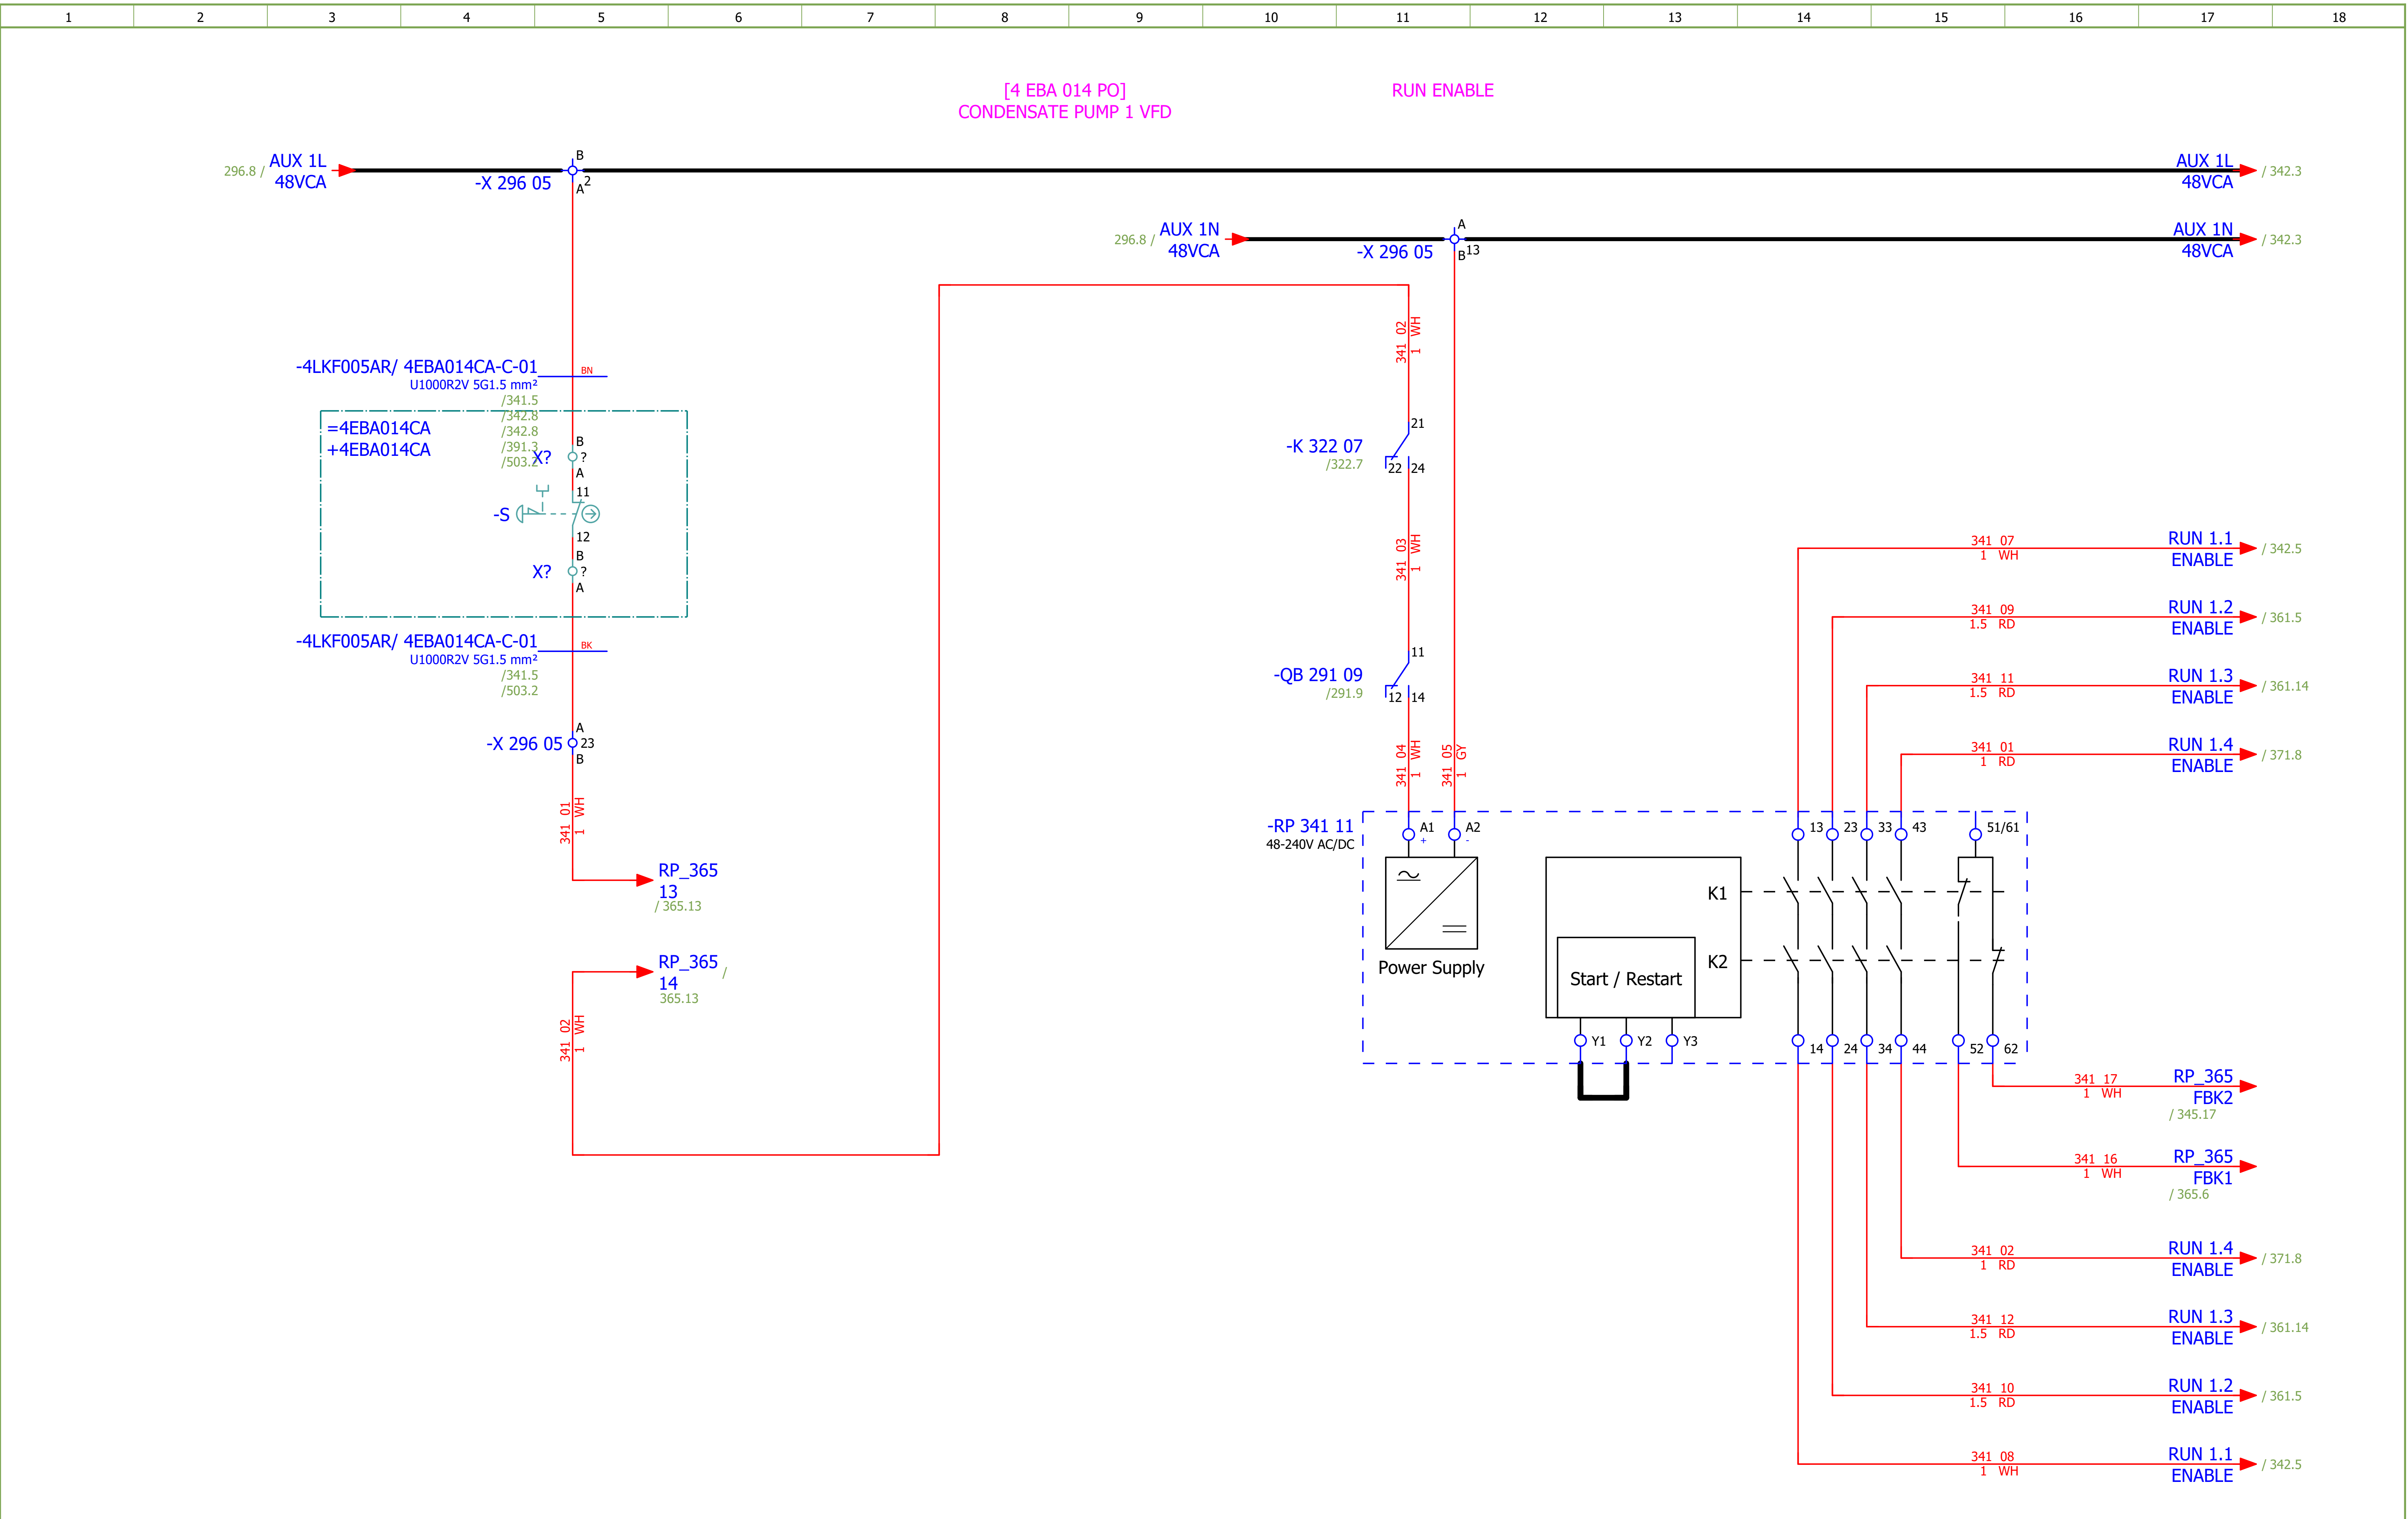

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870
Drawn:	Jere Radas							Revision: F
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: CONDENSATE PUMP 1 - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F	=4LKF001AR	#MC Sheet: 341
Format:	A3						+4LKF005AR	Next: 342

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

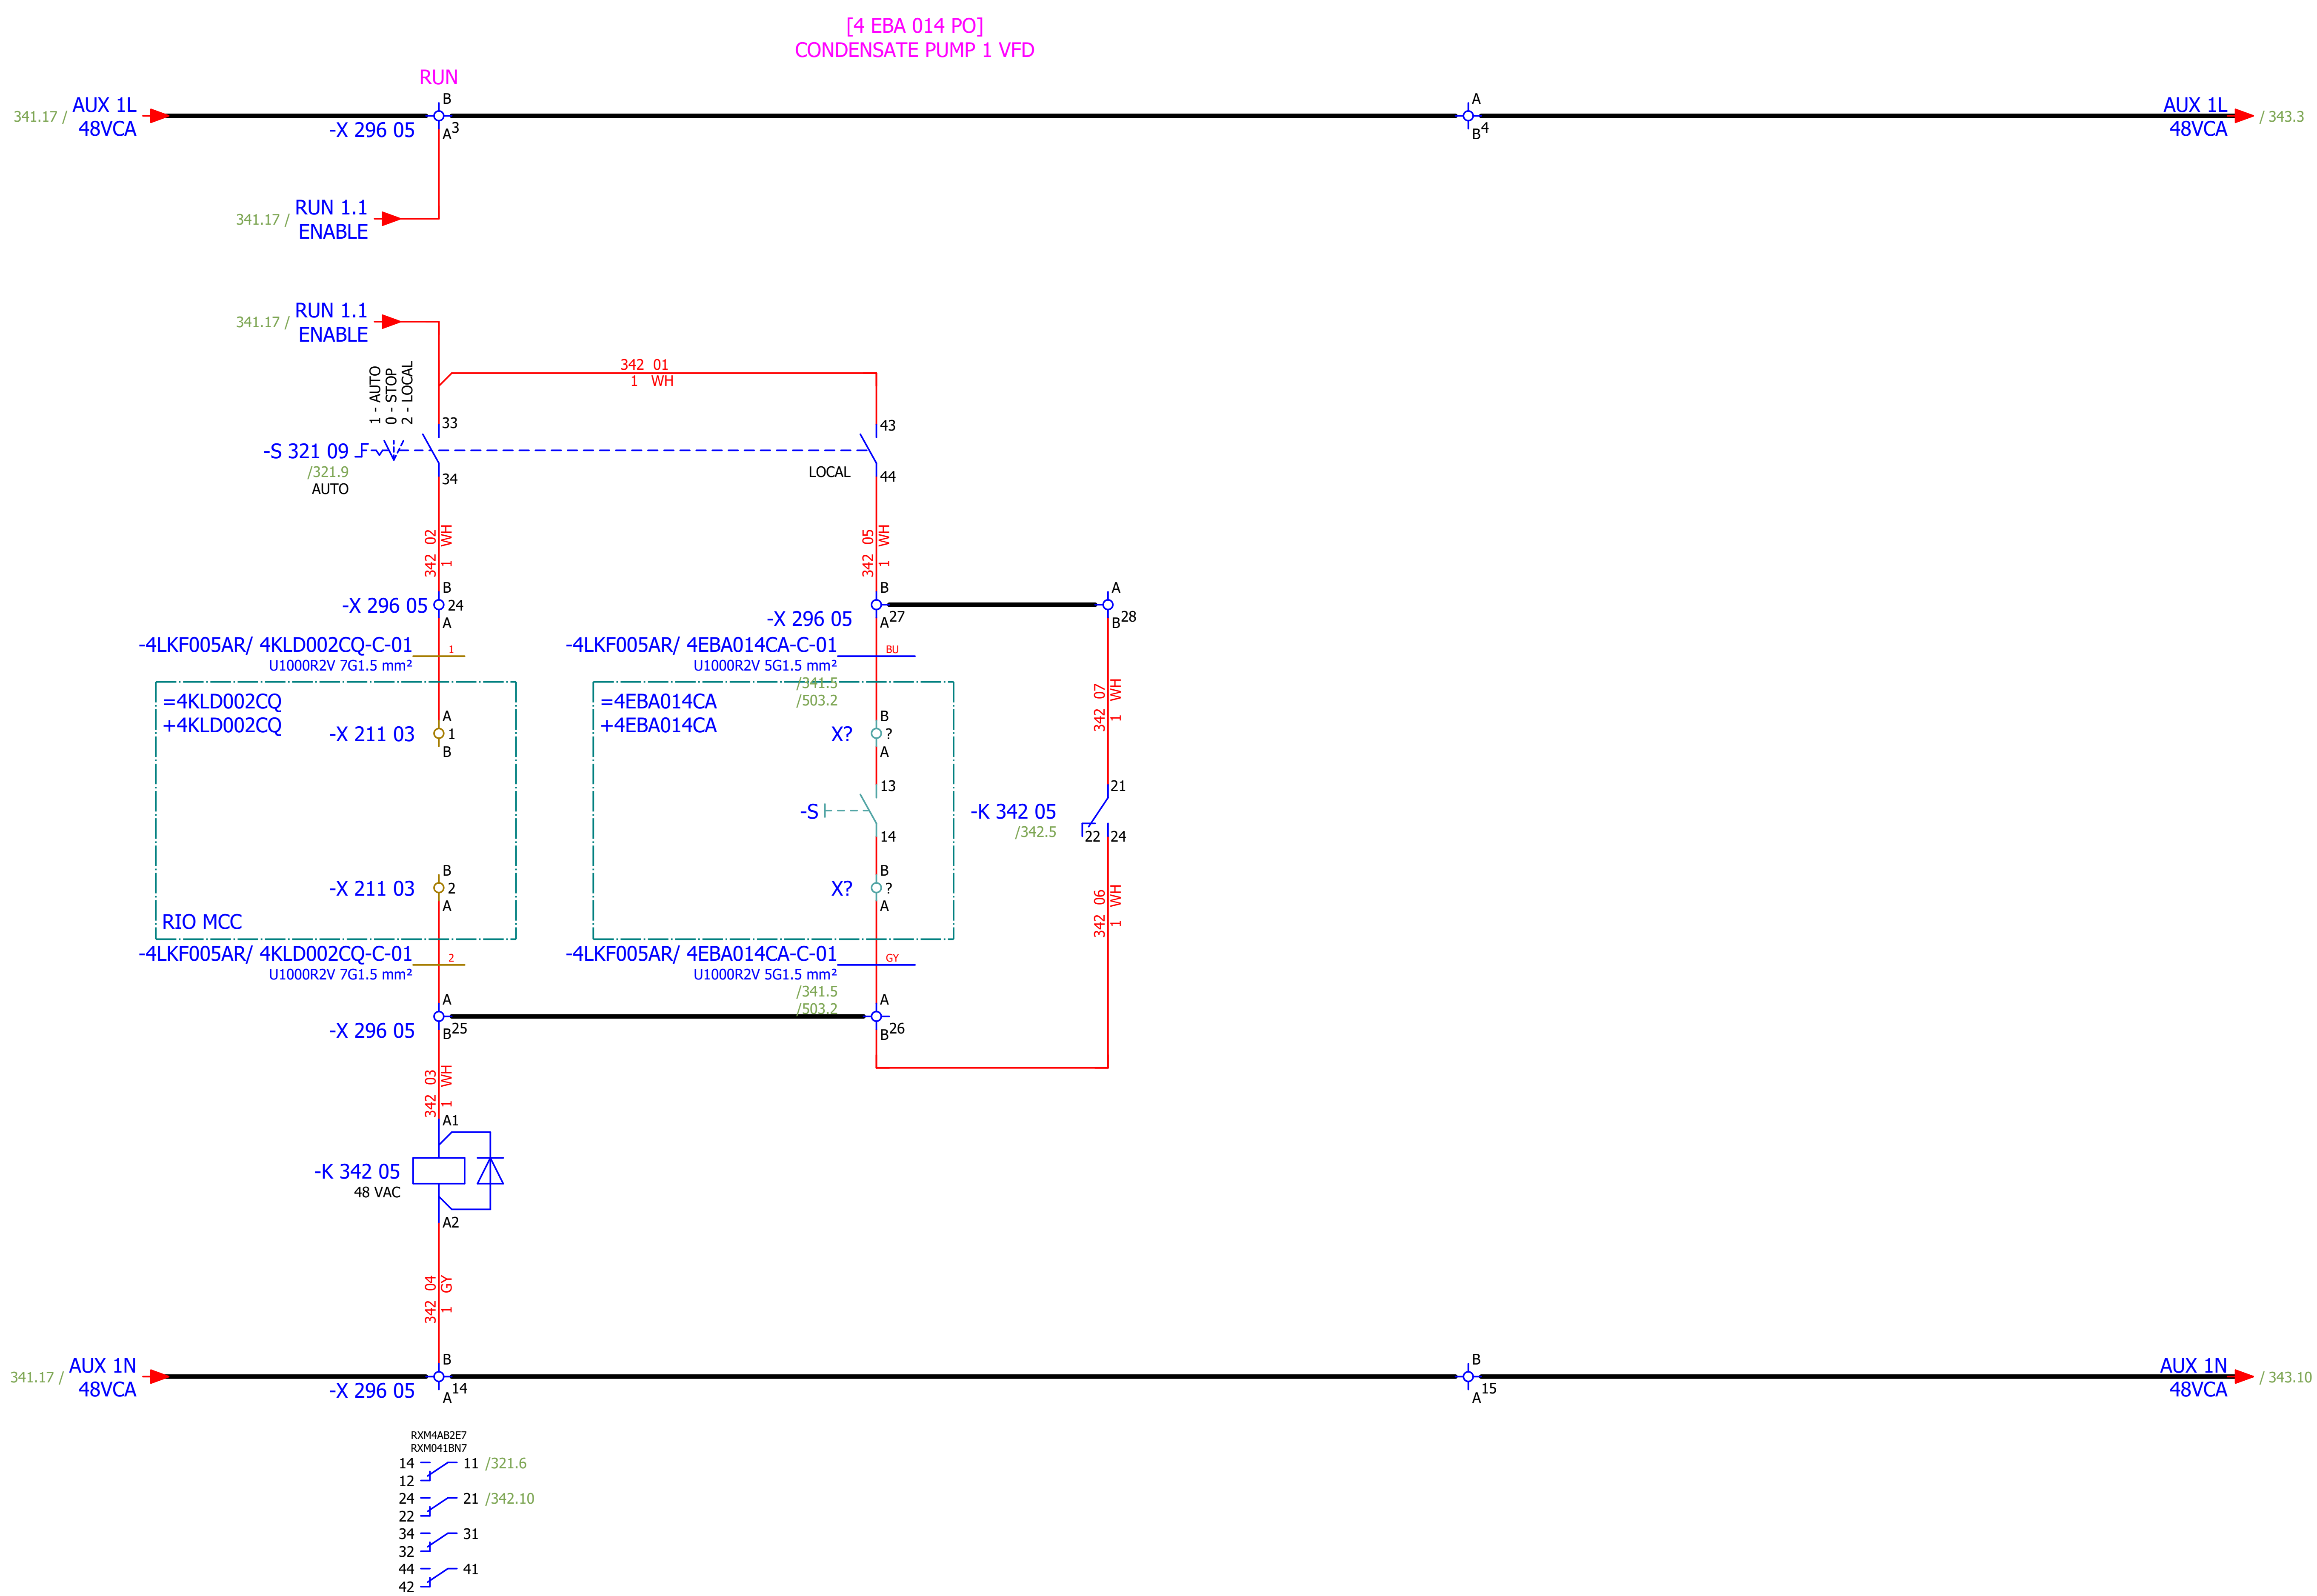

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Jere Radas								#MC
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: CONDENSATE PUMP 1 - CONTROL	Drawing designation:	BRC-4-ATEP0-1870-F	=4LKF001AR	Sheet: 342
Format:	A3							+4LKF005AR	Next: 343

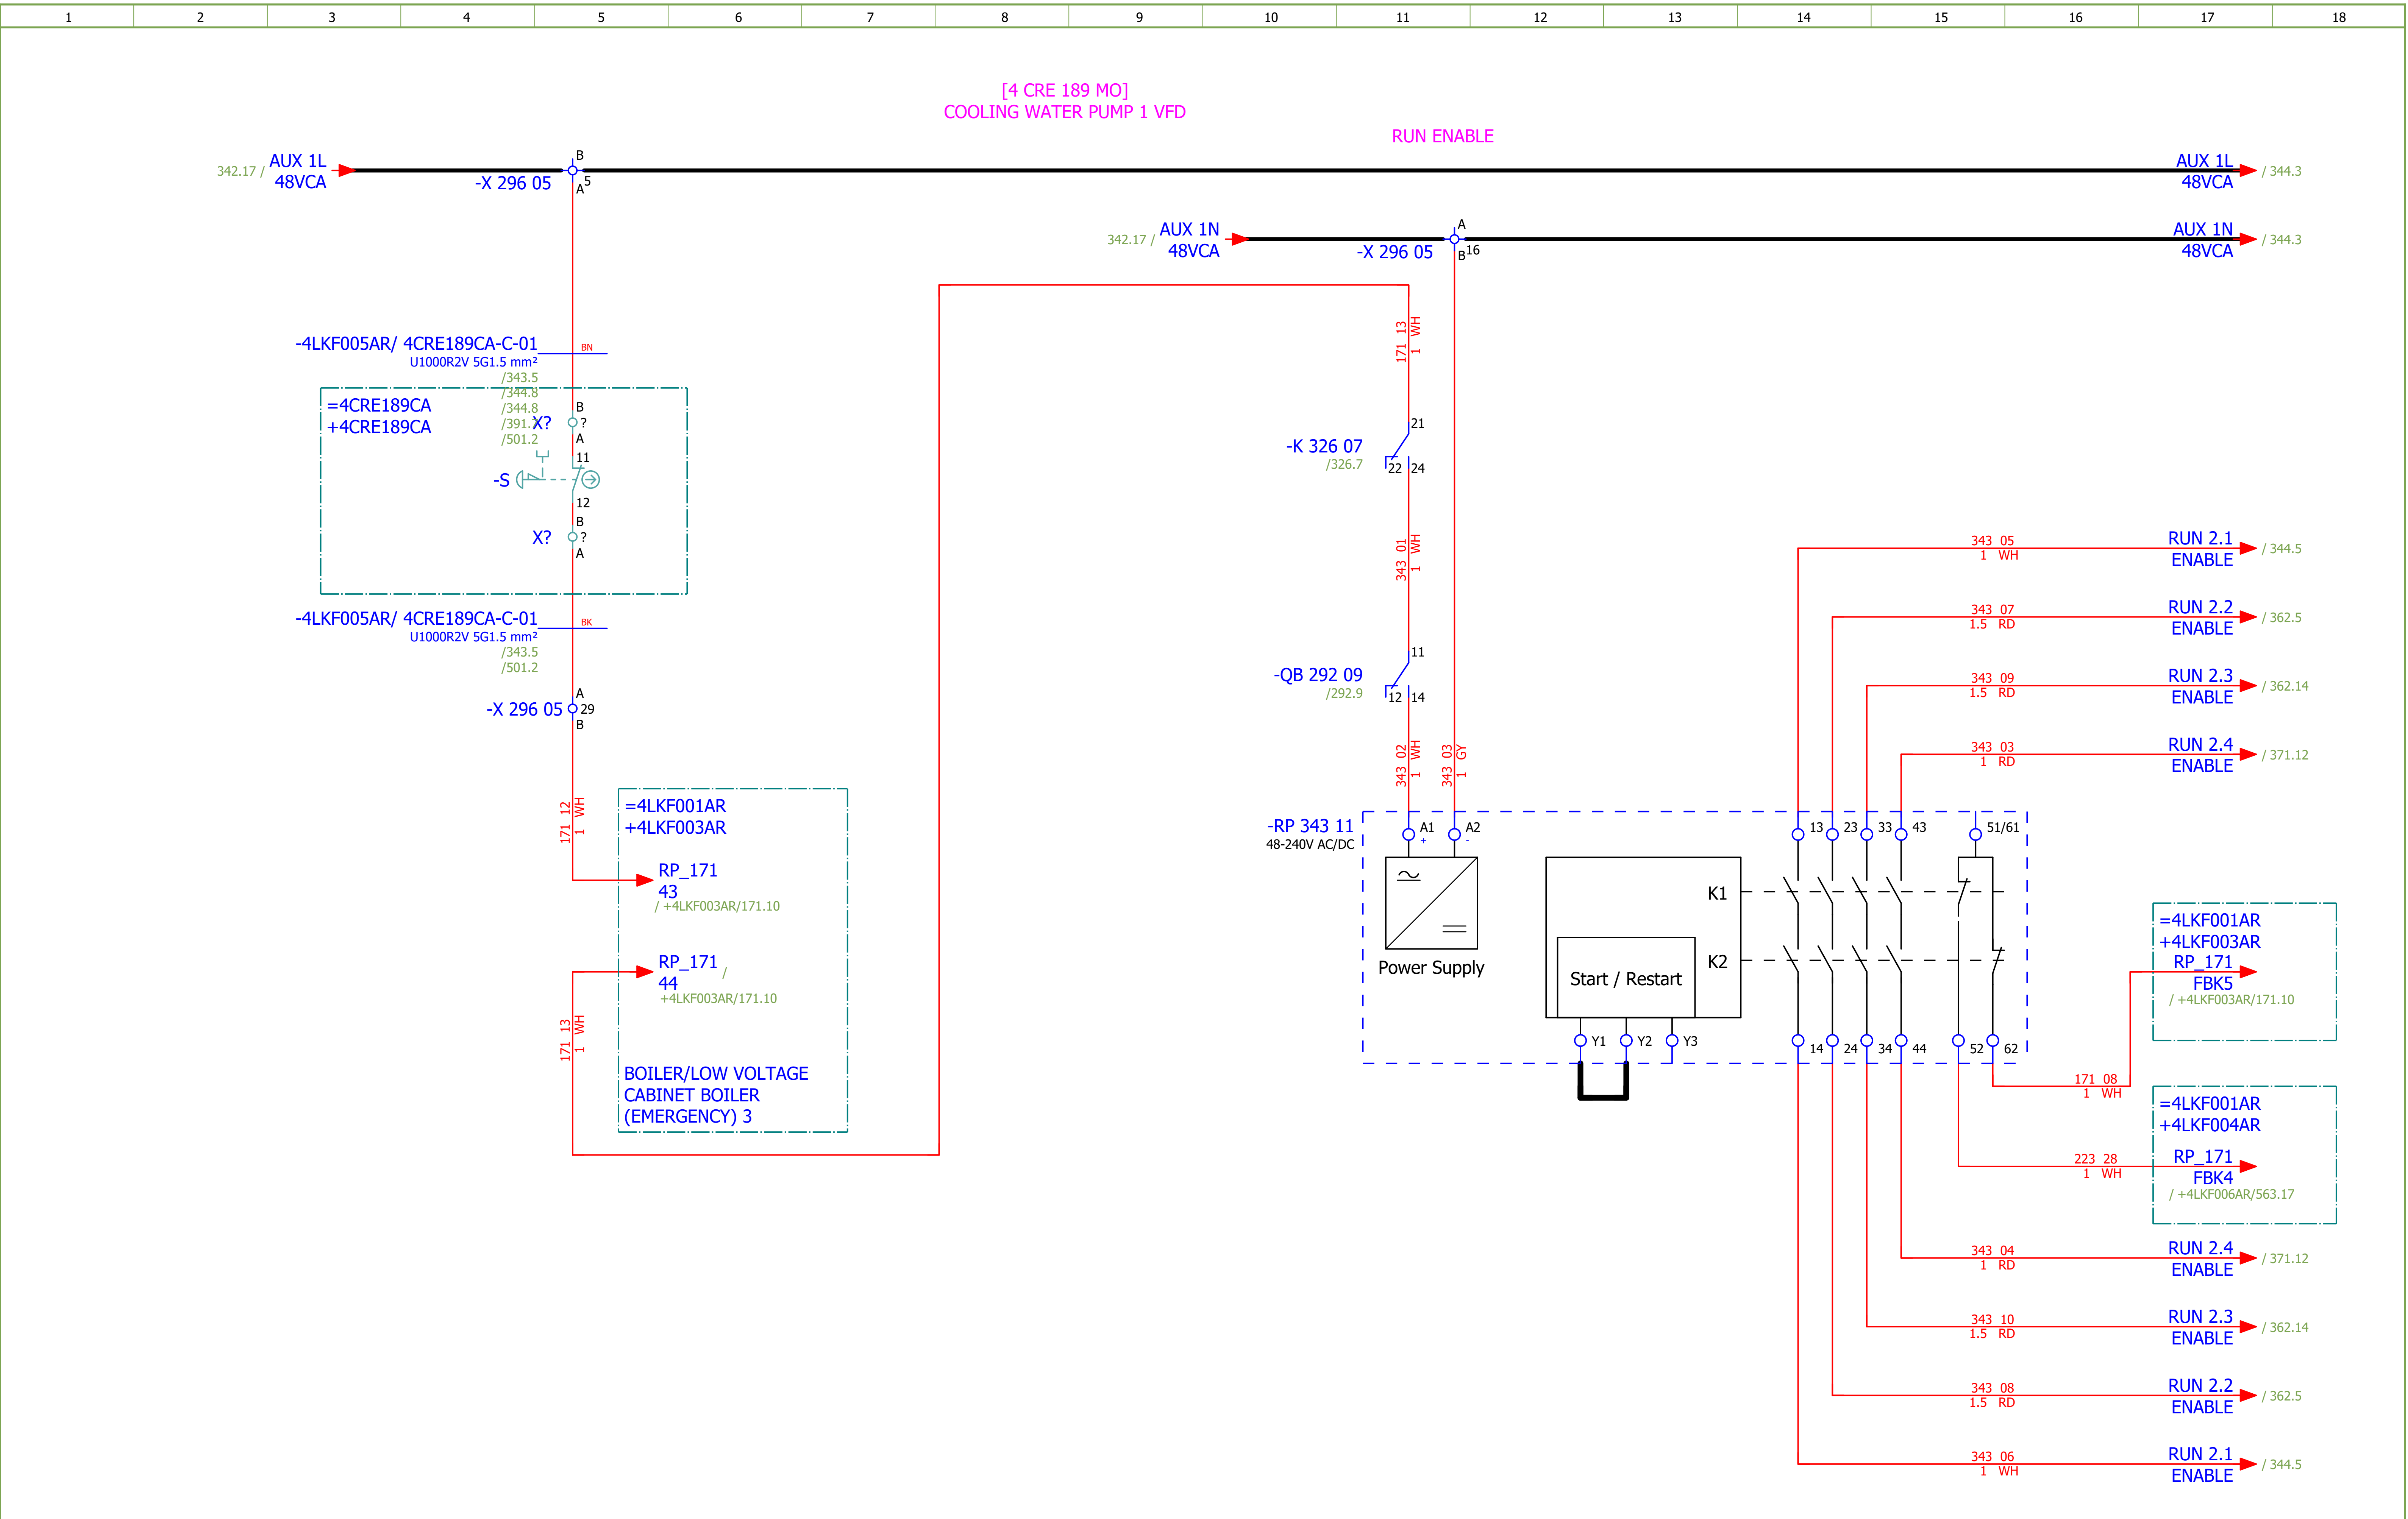

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#MC
Drawn:	Jere Radas									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 1 - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 343
Format:	A3								+4LKF005AR	Next: 344

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

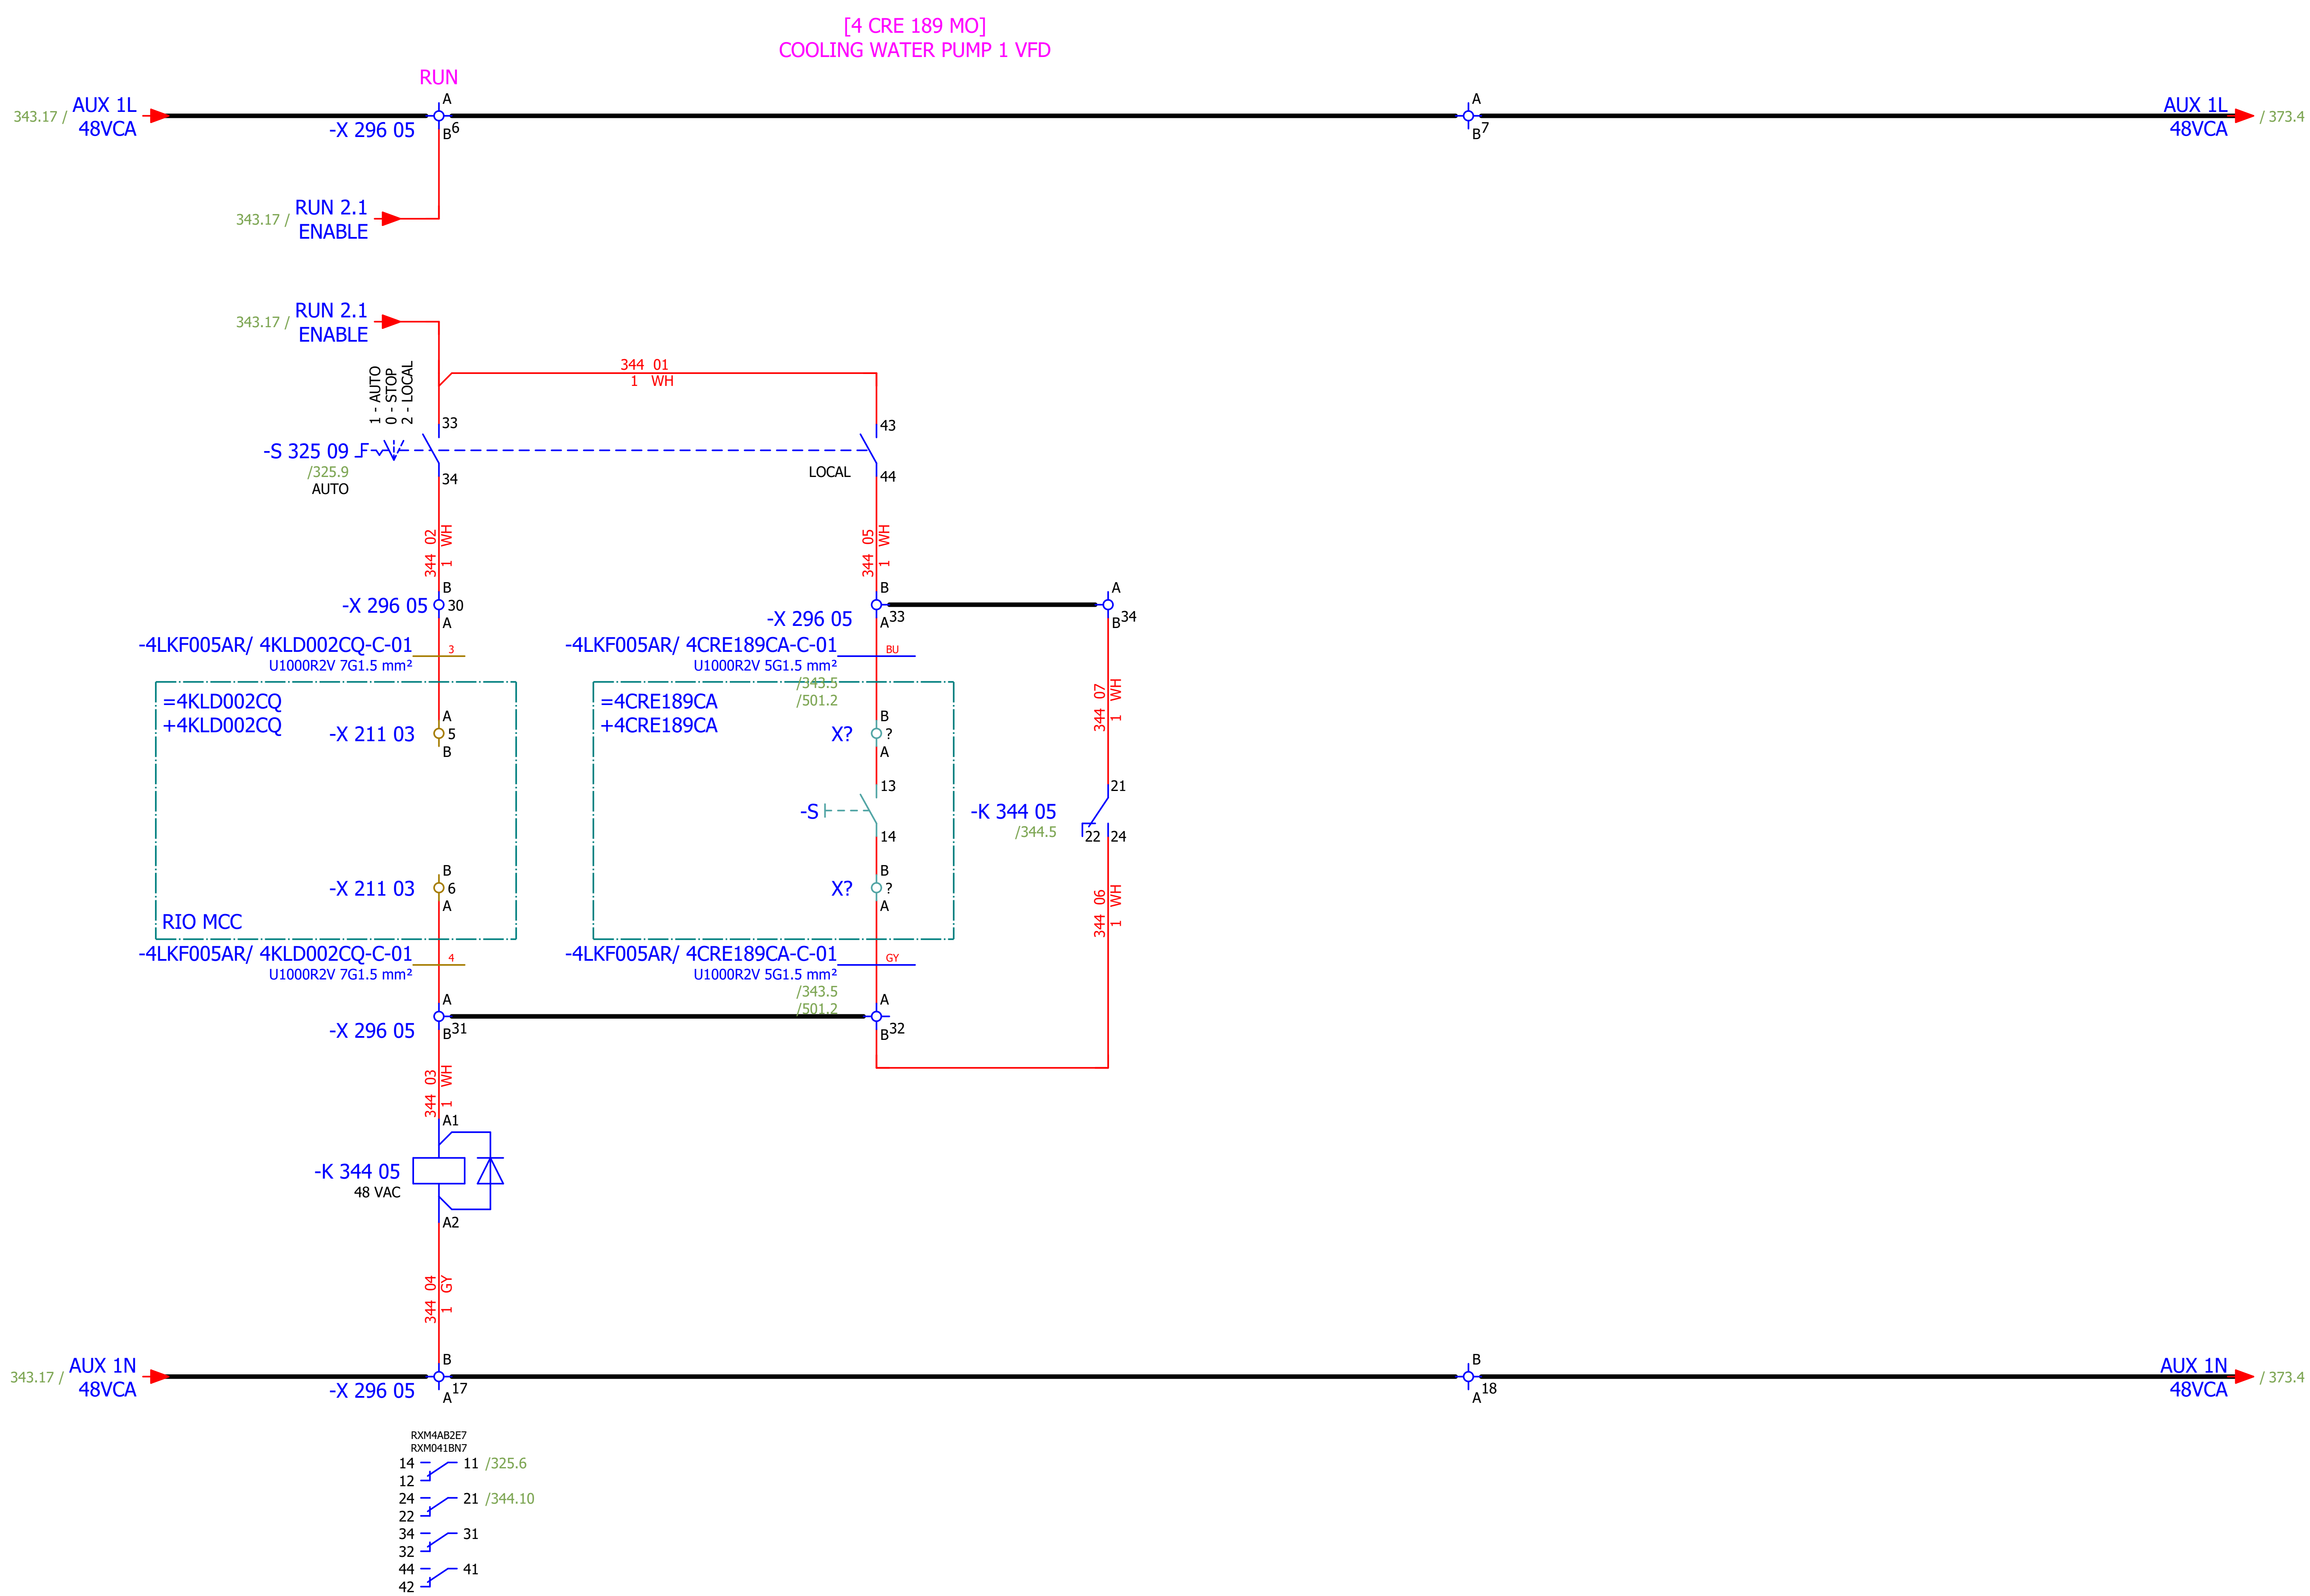

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#MC
Drawn:	Jere Radas										
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	COOLING WATER PUMP 1 - CONTROL	Drawing designation:	BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 344
Format:	A3									+4LKF005AR	Next: 345

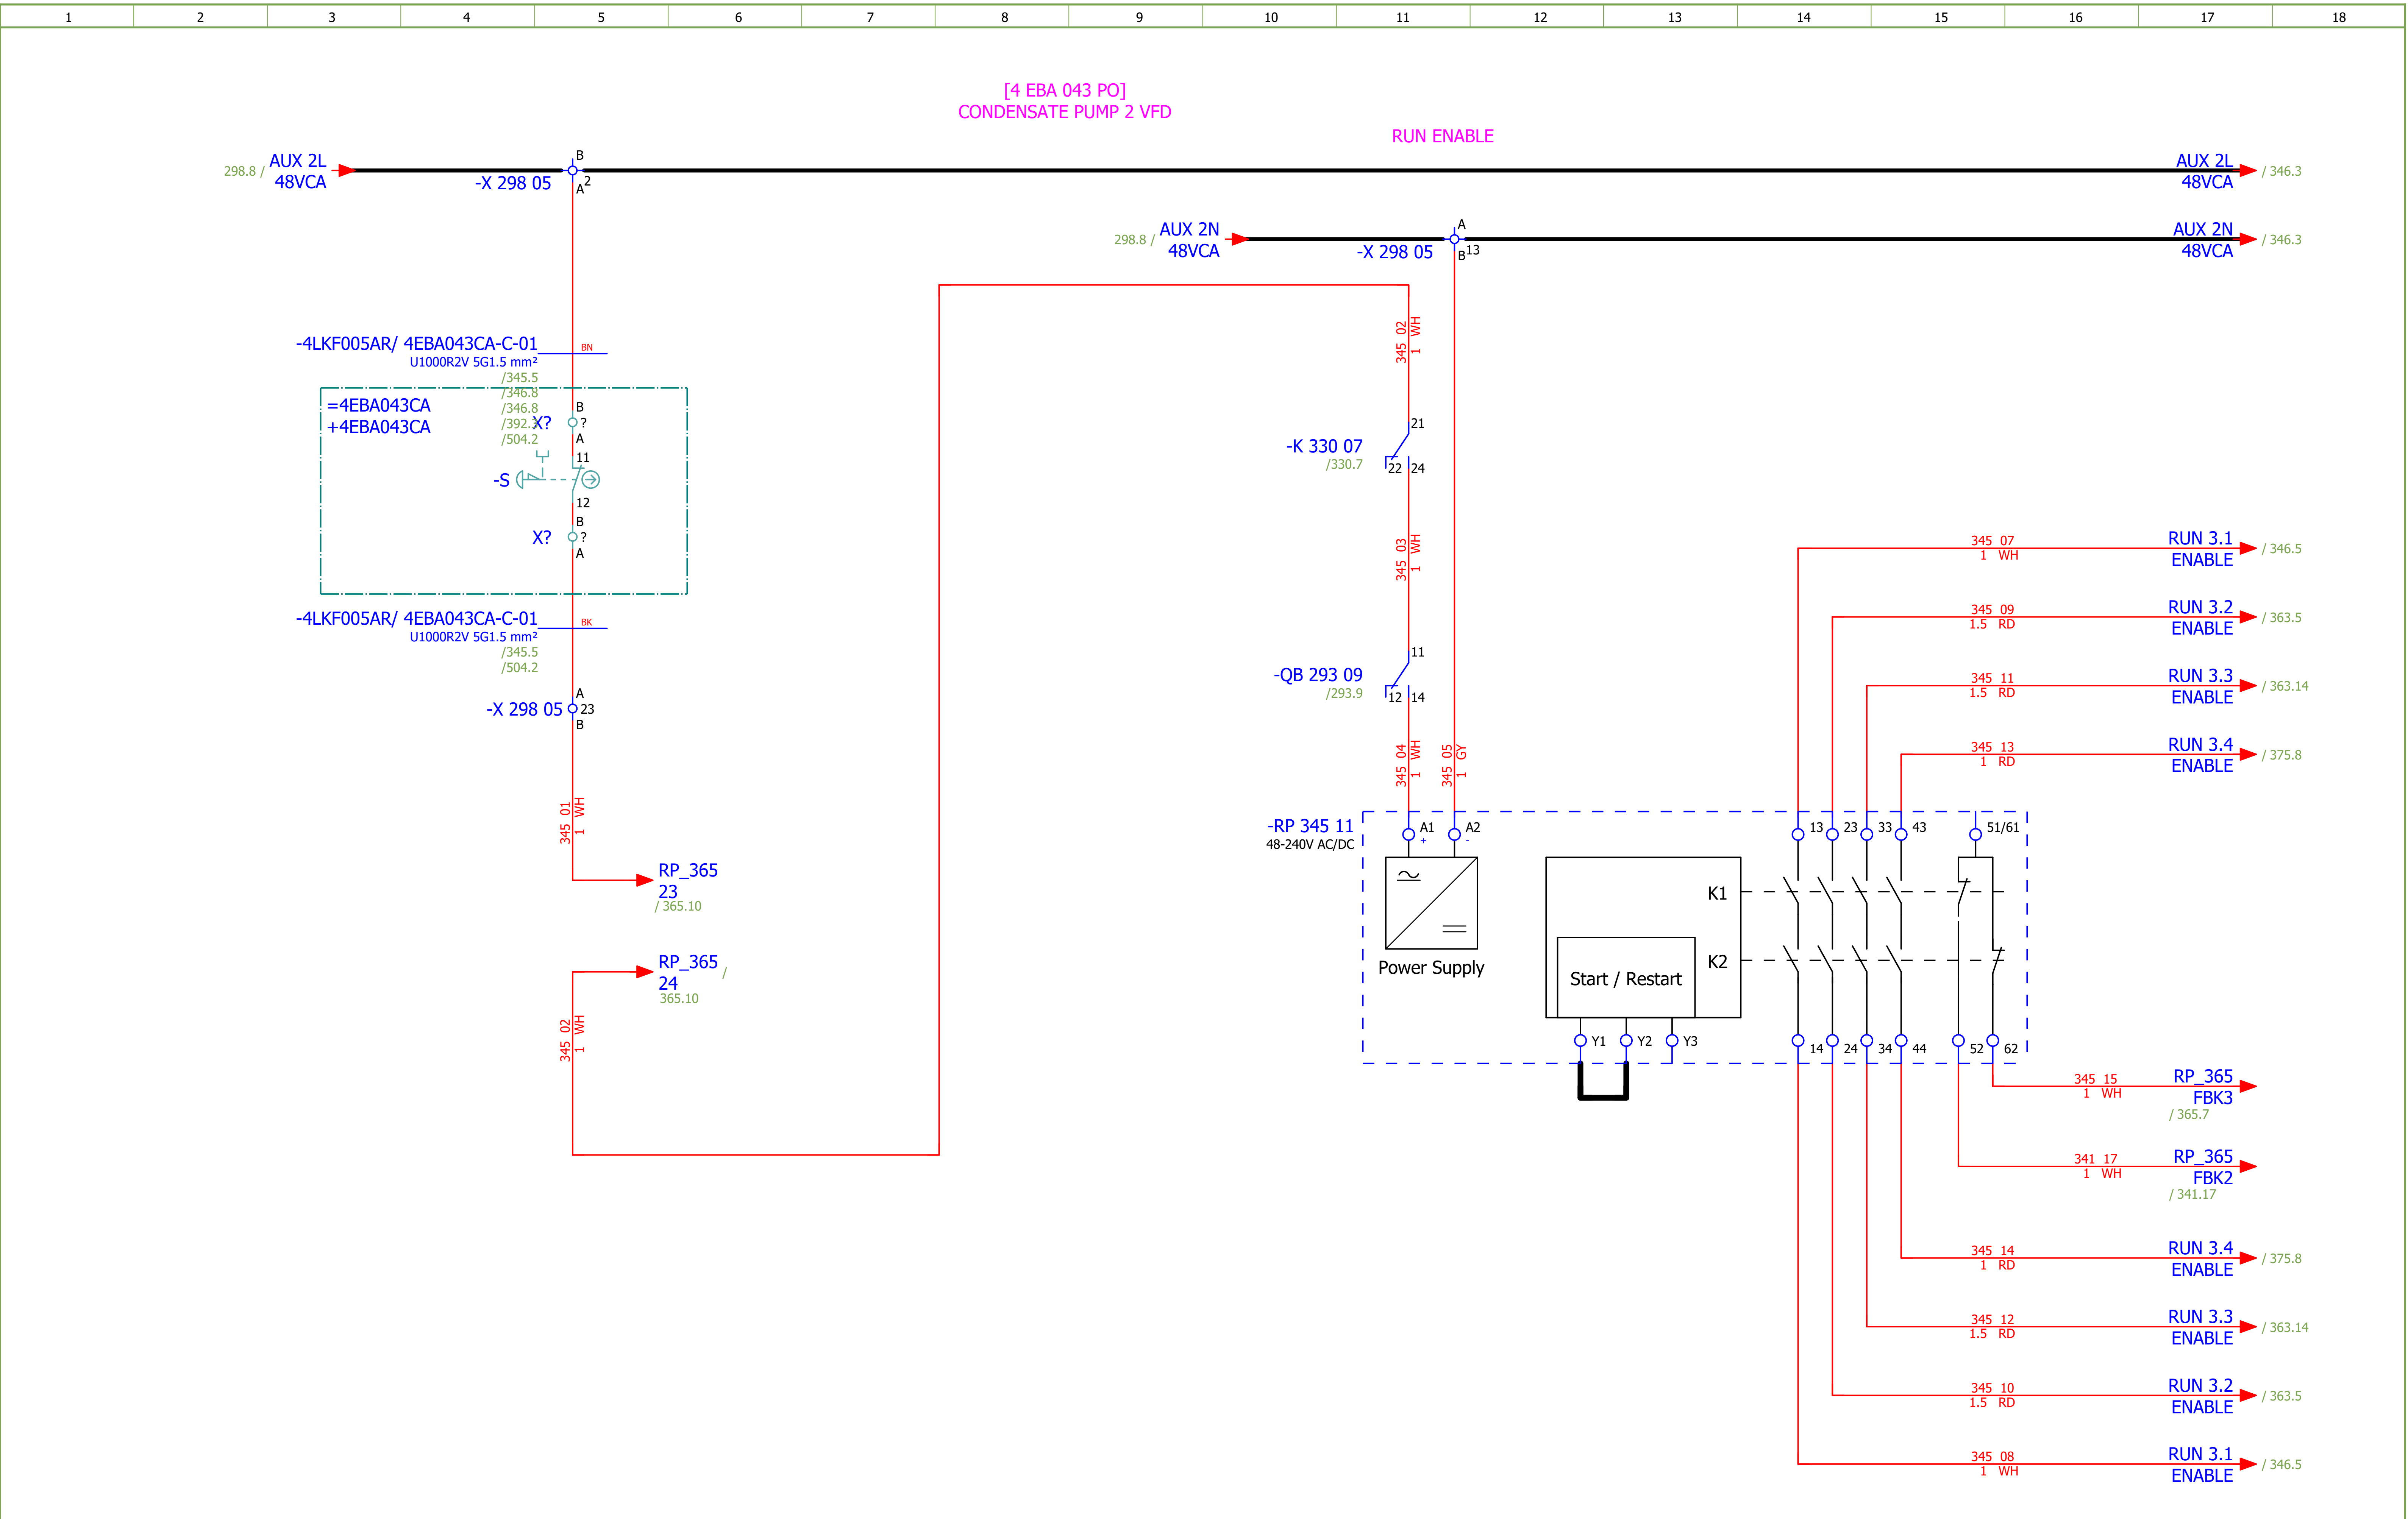

Date: 17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn: Jere Radas								#MC
Approved: Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: CONDENSATE PUMP 2 - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 345
Format: A3							+4LKF005AR	Next: 346

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

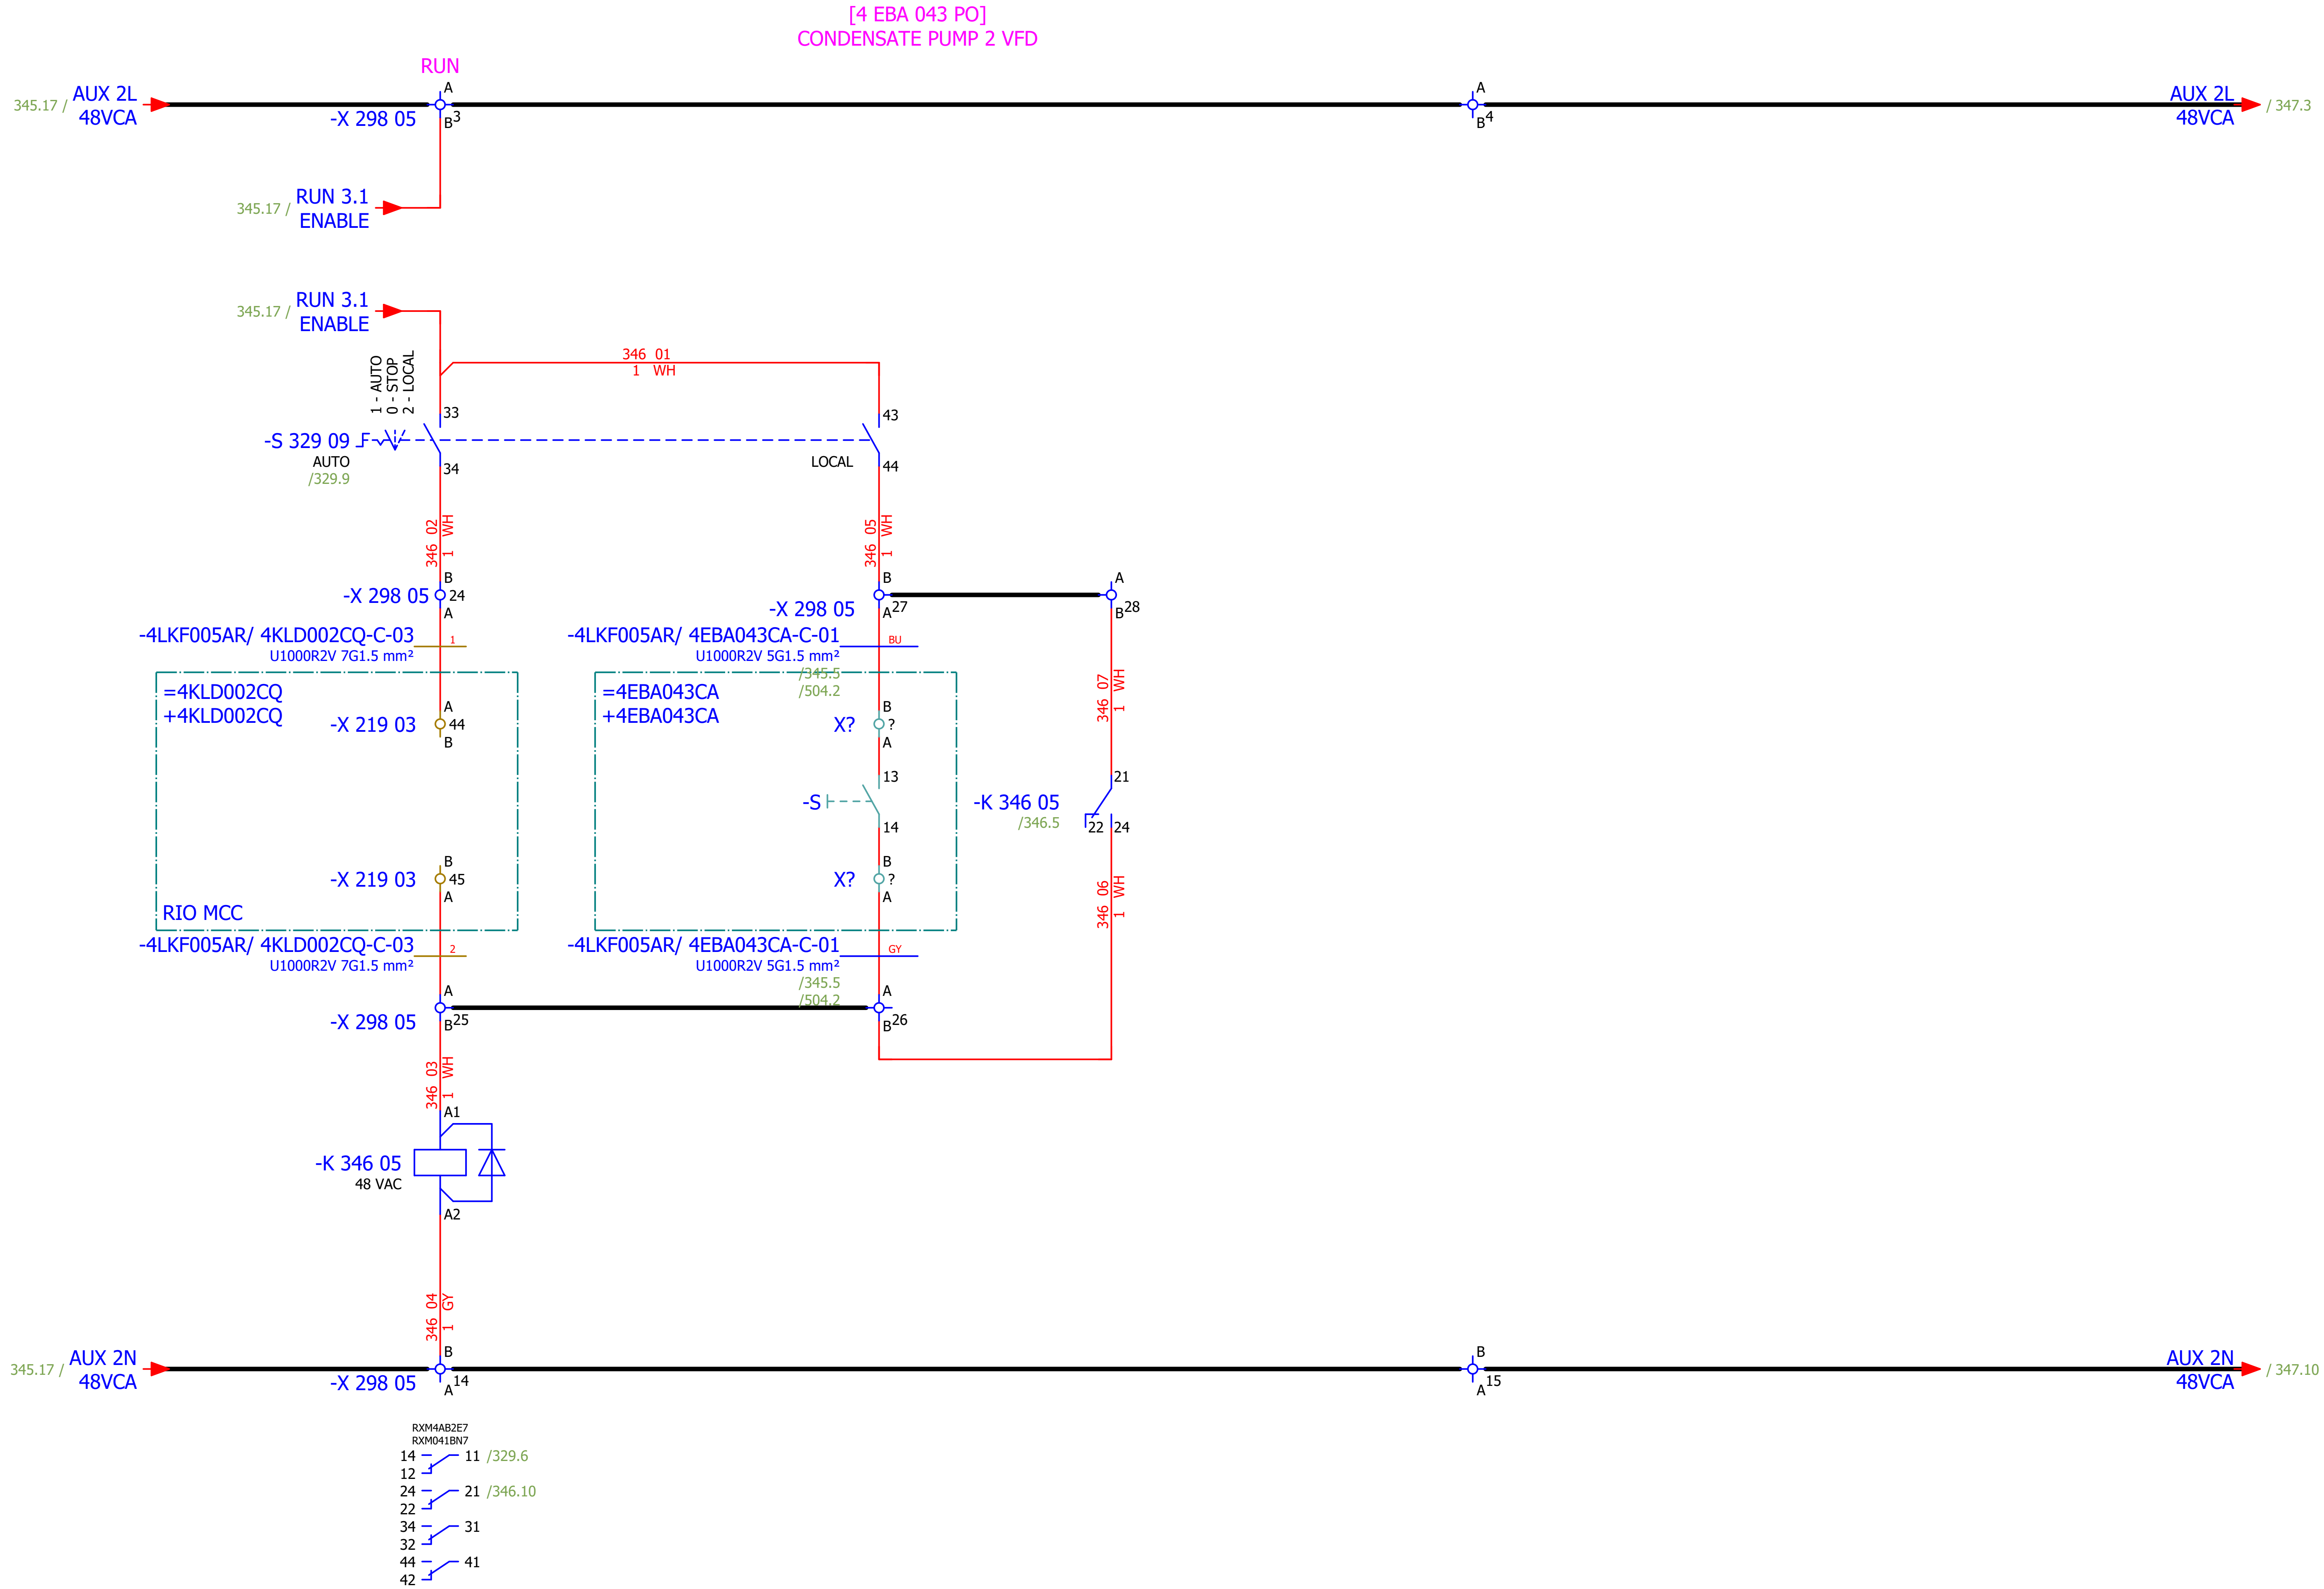

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Jere Radas									#MC
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	CONDENSATE PUMP 2 - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 346
Format:	A3								+4LKF005AR	Next: 347

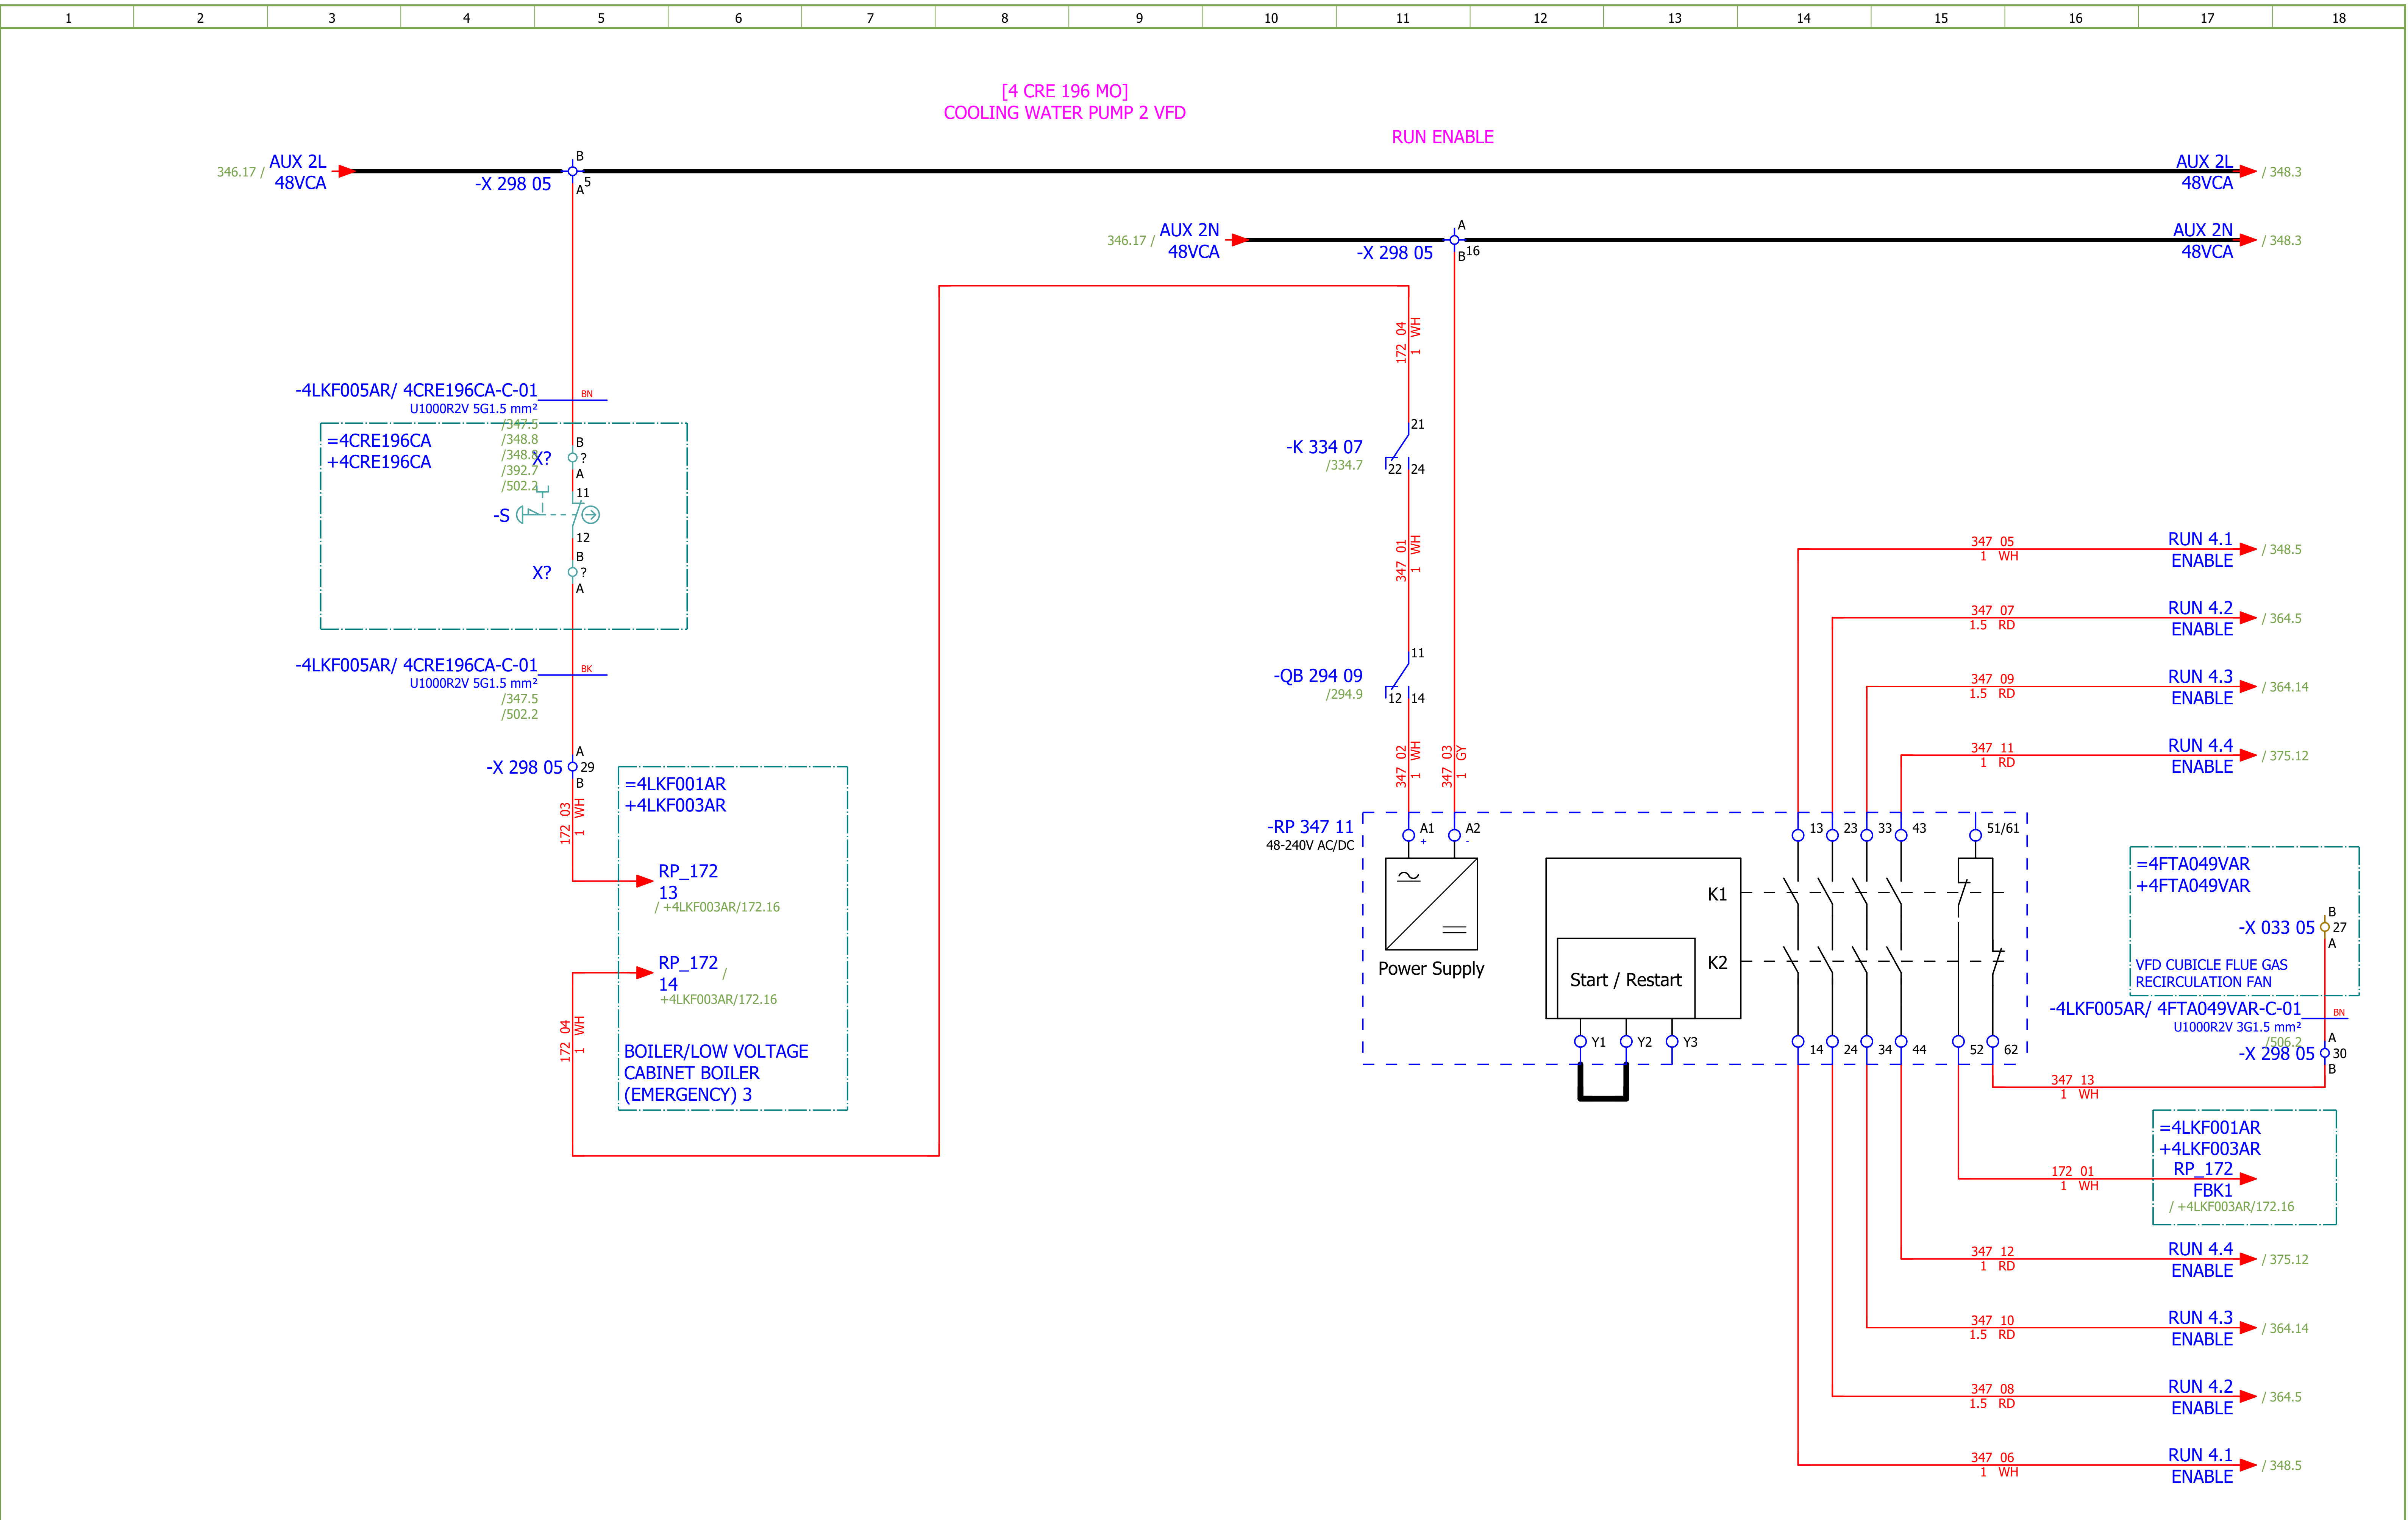

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#MC
Drawn:	Jere Radas										
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	COOLING WATER PUMP 2 - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 347
Format:	A3									+4LKF005AR	Next: 348

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

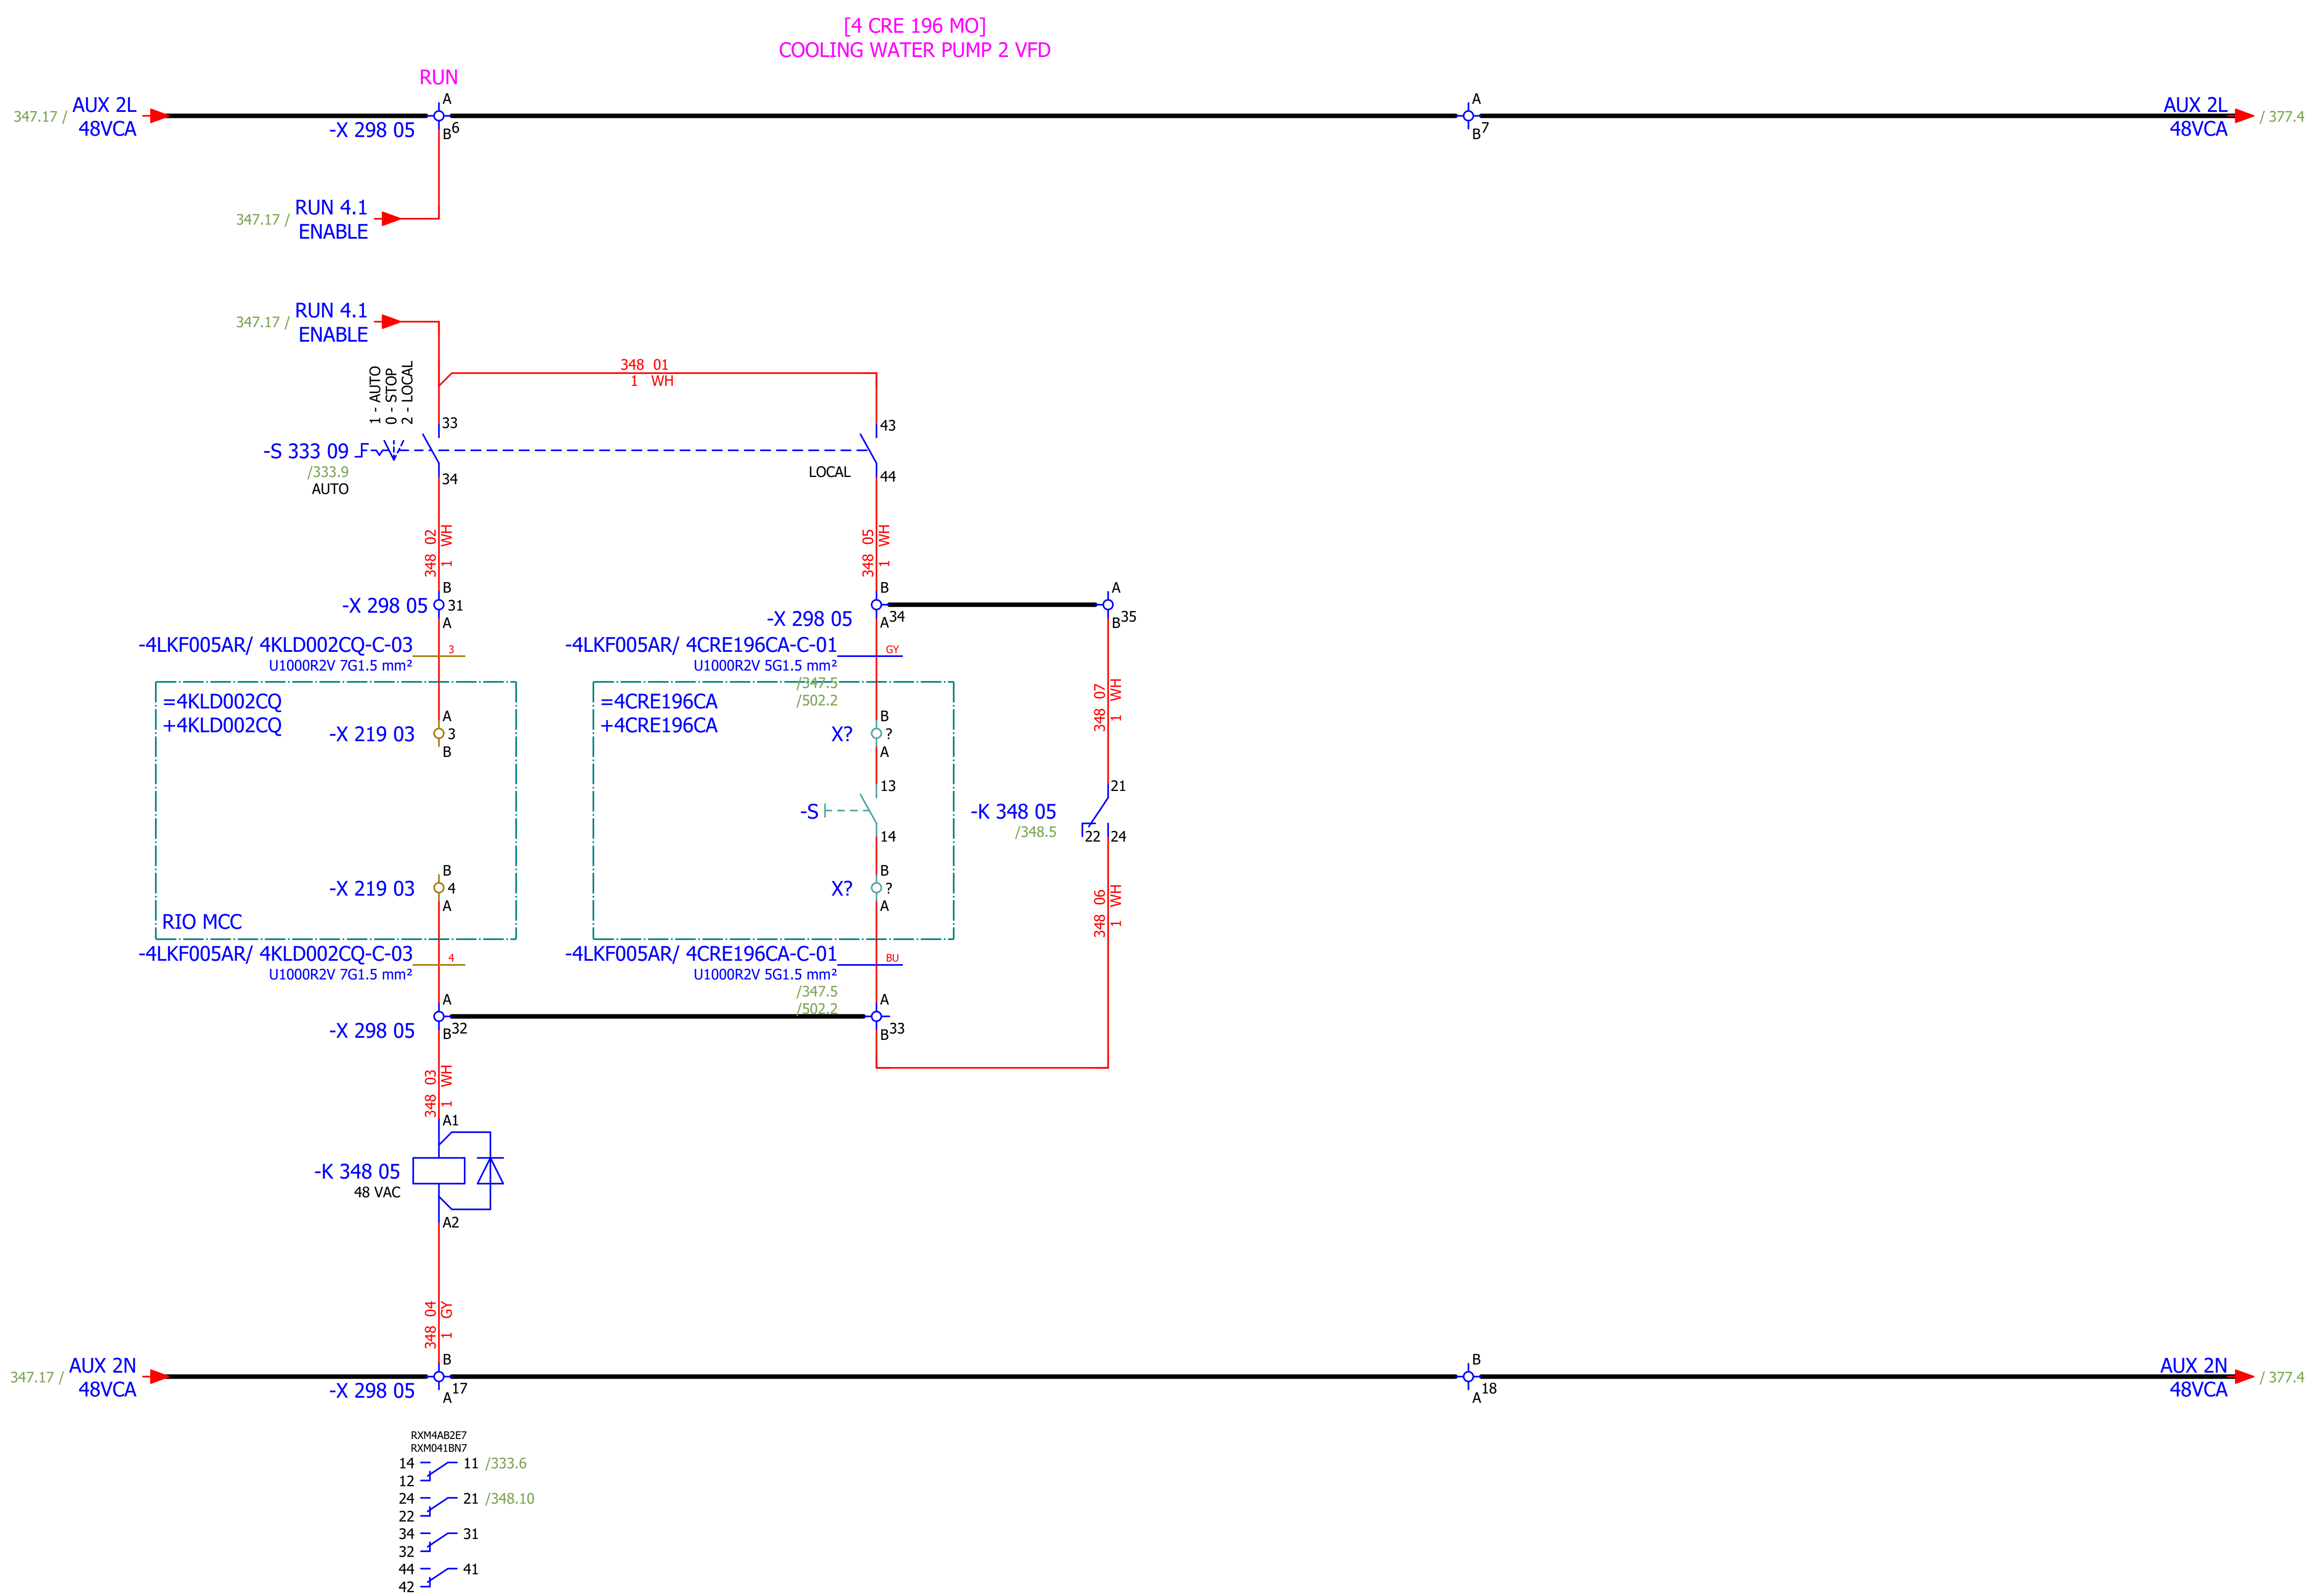

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Jere Radas								#MC
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 2 - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 348
Format:	A3							+4LKF005AR	Next: 361

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

[4 EBA 014 PO]
CONDENSATE PUMP 1 VFD
SAFE TORQUE OFF

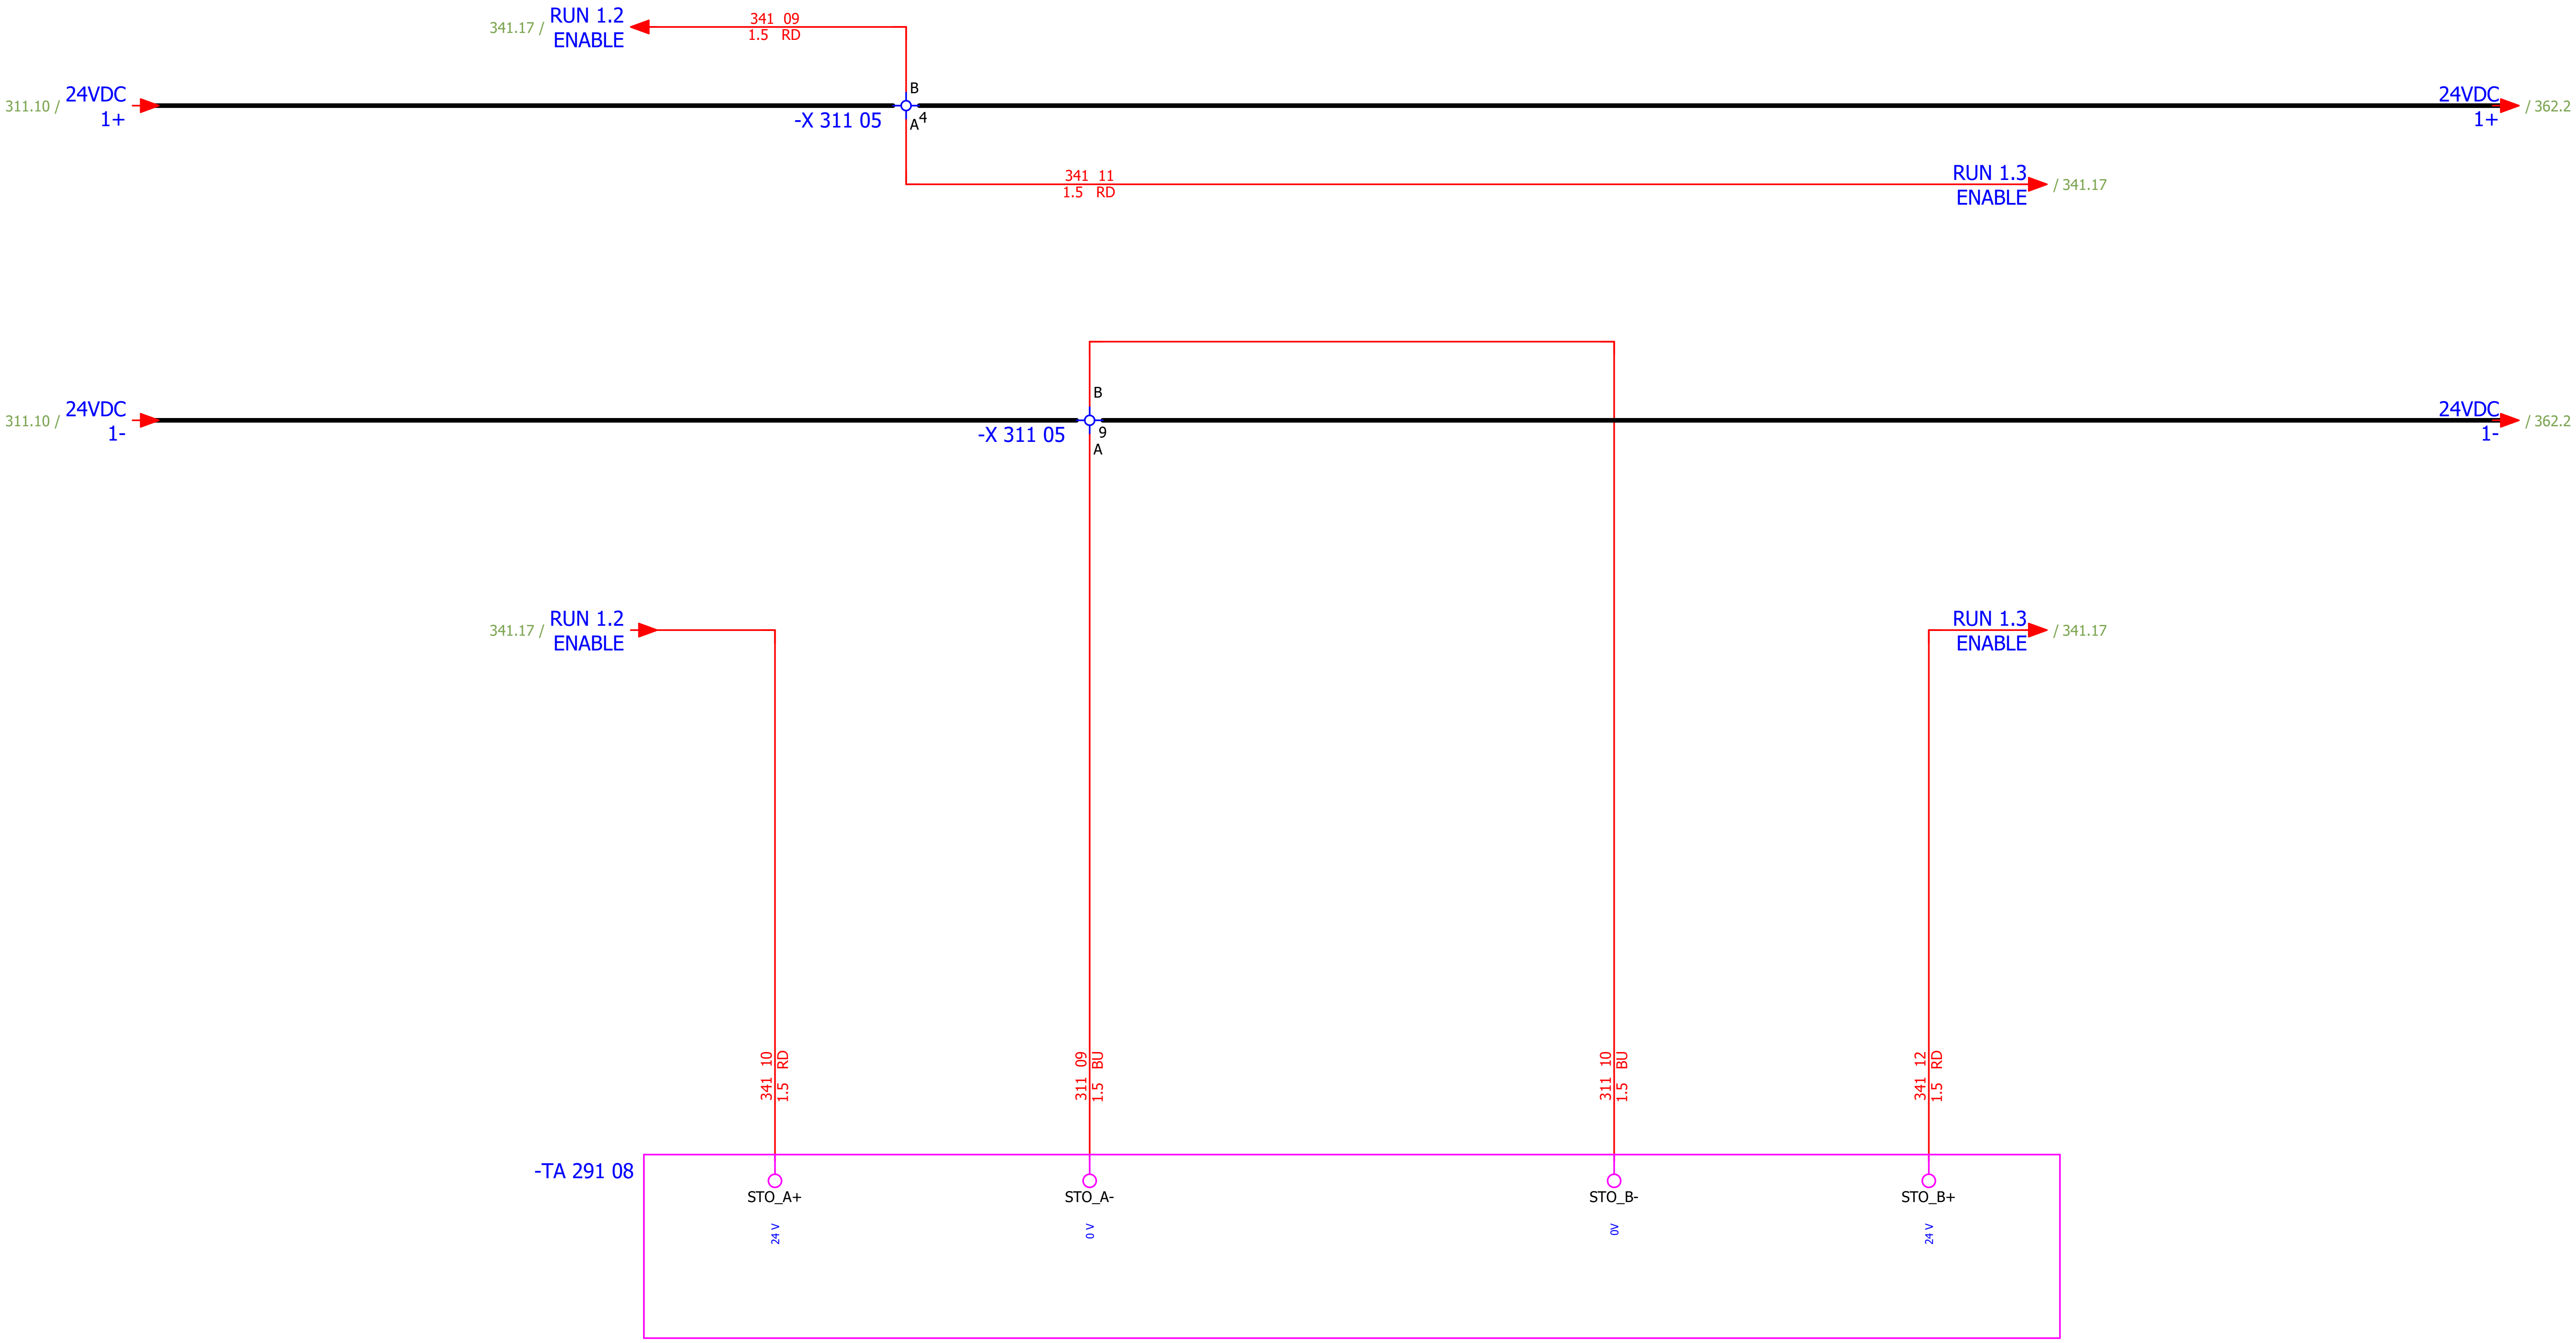

Date: 17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#NA
Drawn: Jere Radas									
Approved: Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: CONDENSATE PUMP 1 - SAFE TORQUE OFF	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 361
Format: A3								+4LKF005AR	Next: 362

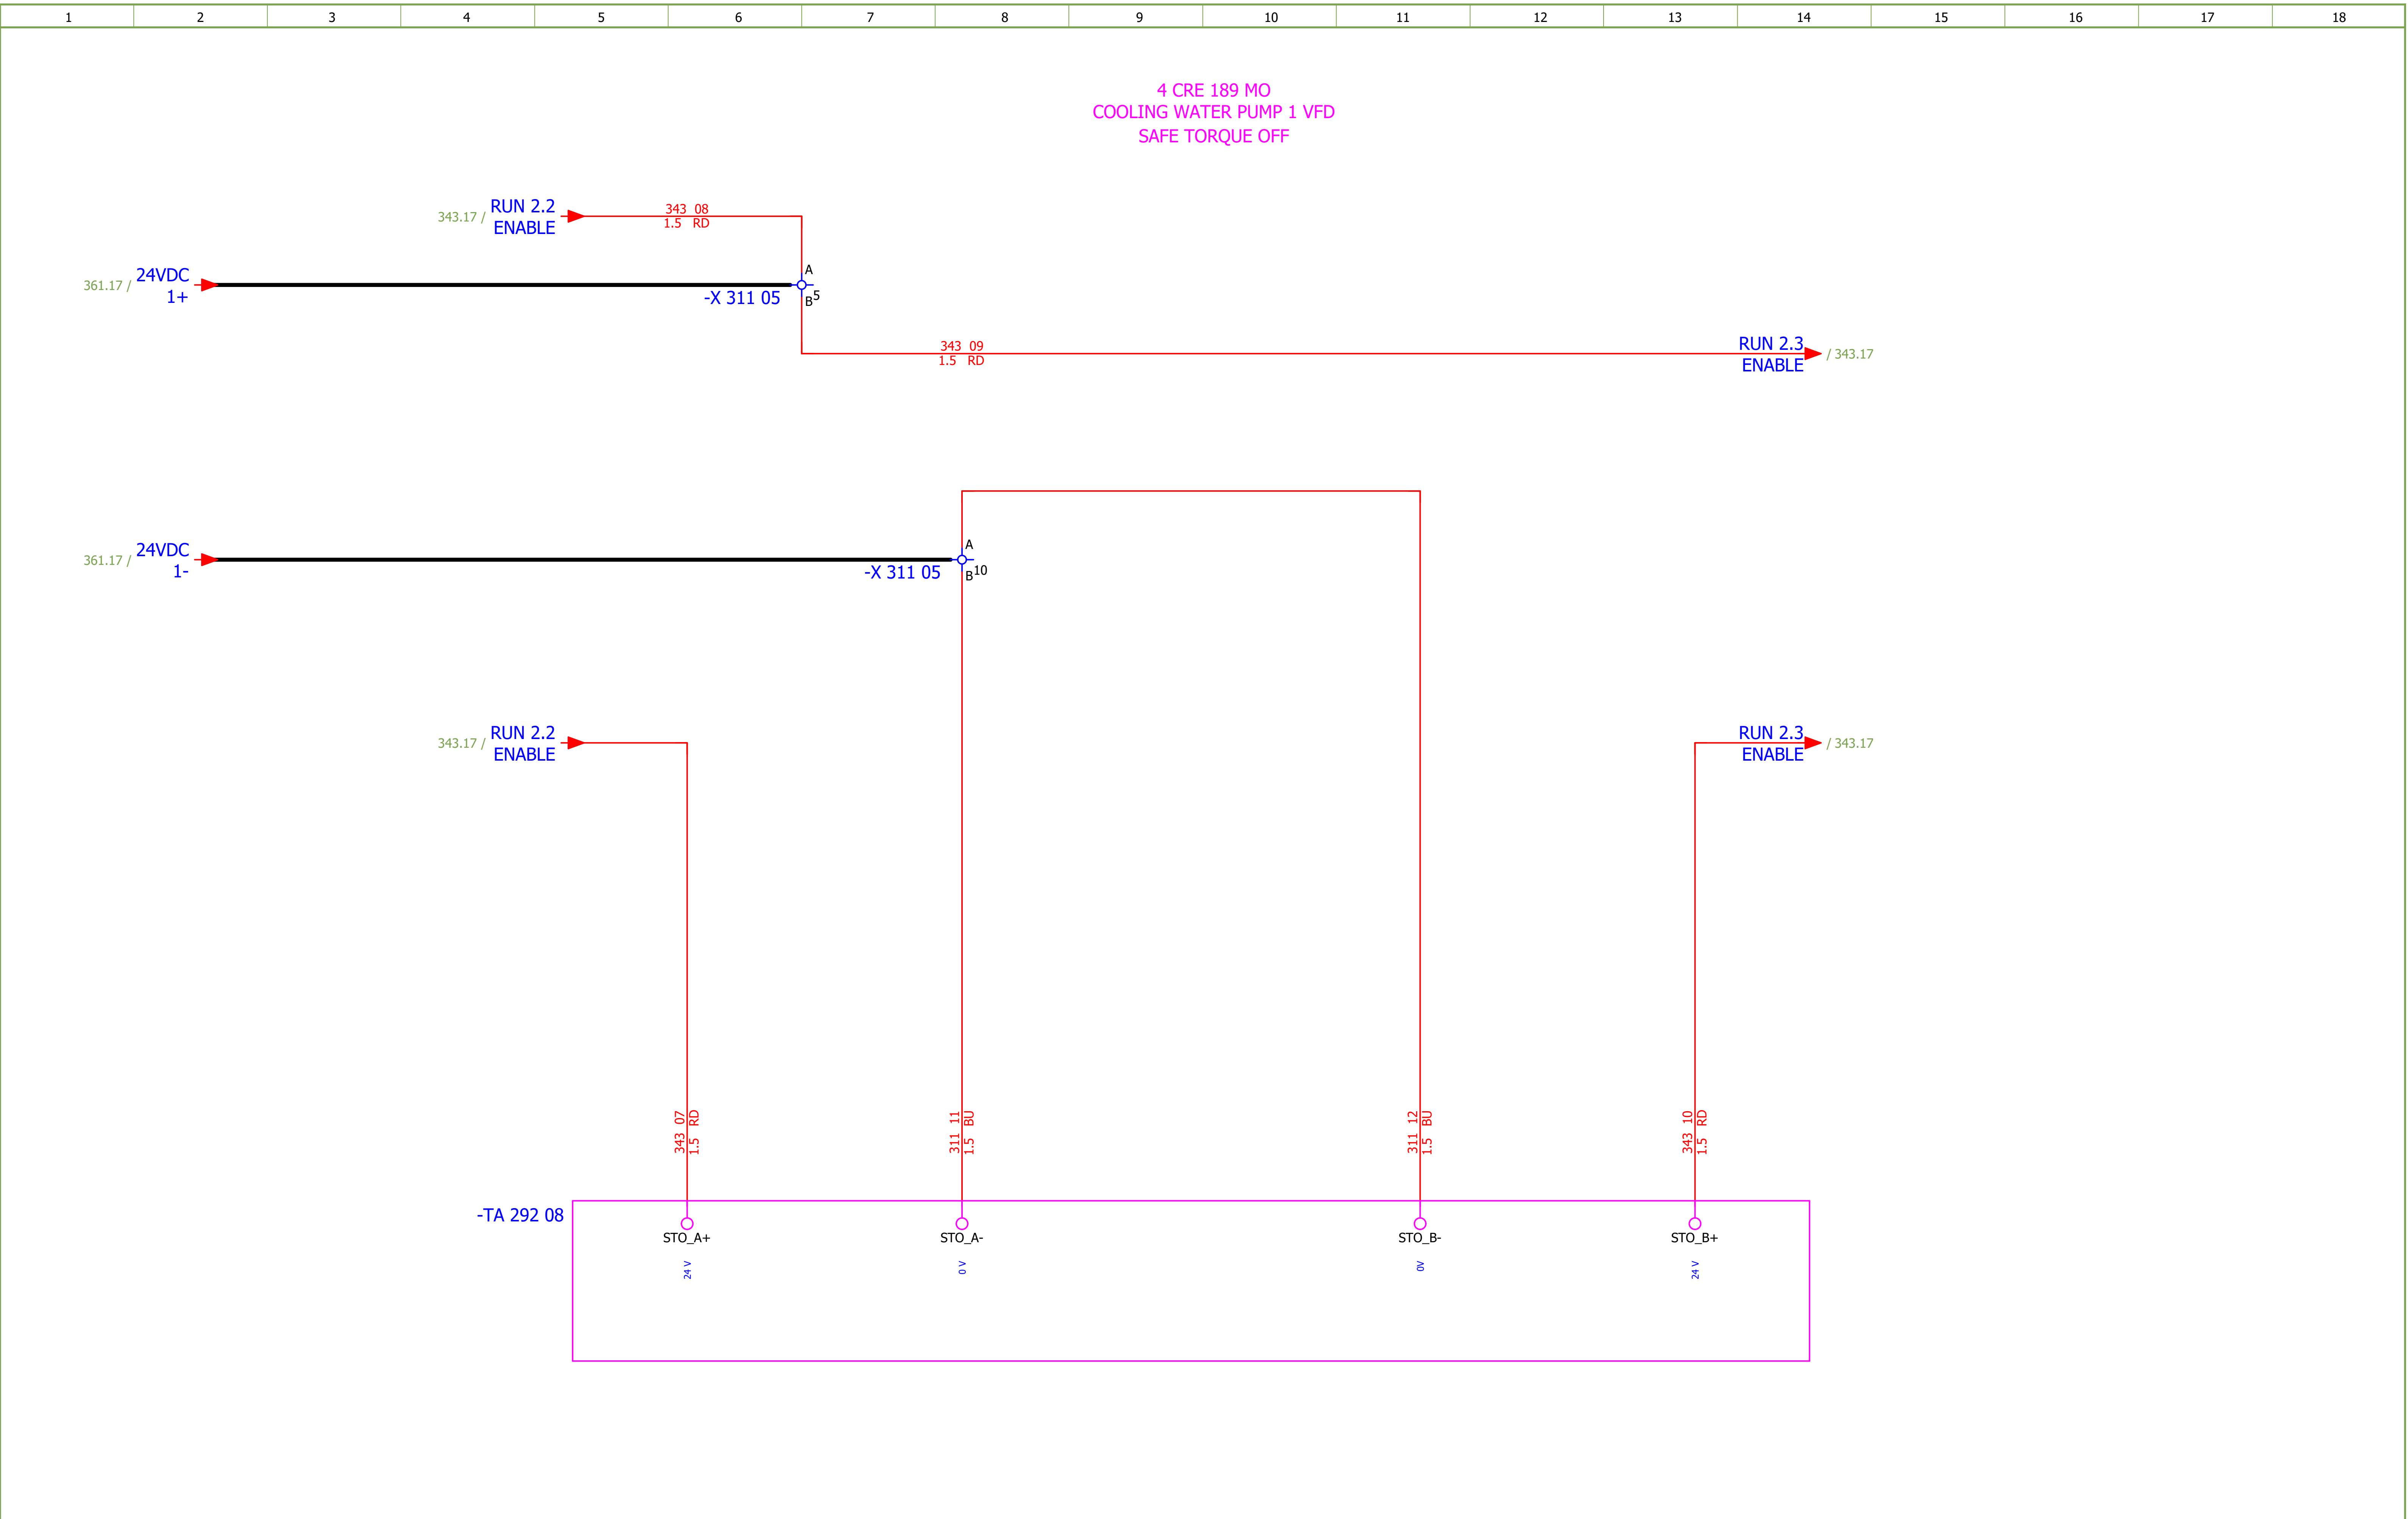

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Jere Radas								#NA
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 1 - SAFE TORQUE OFF	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 362
Format:	A3							+4LKF005AR	Next: 363

[4 EBA 043 PO]
CONDENSATE PUMP 2 VFD
SAFE TORQUE OFF

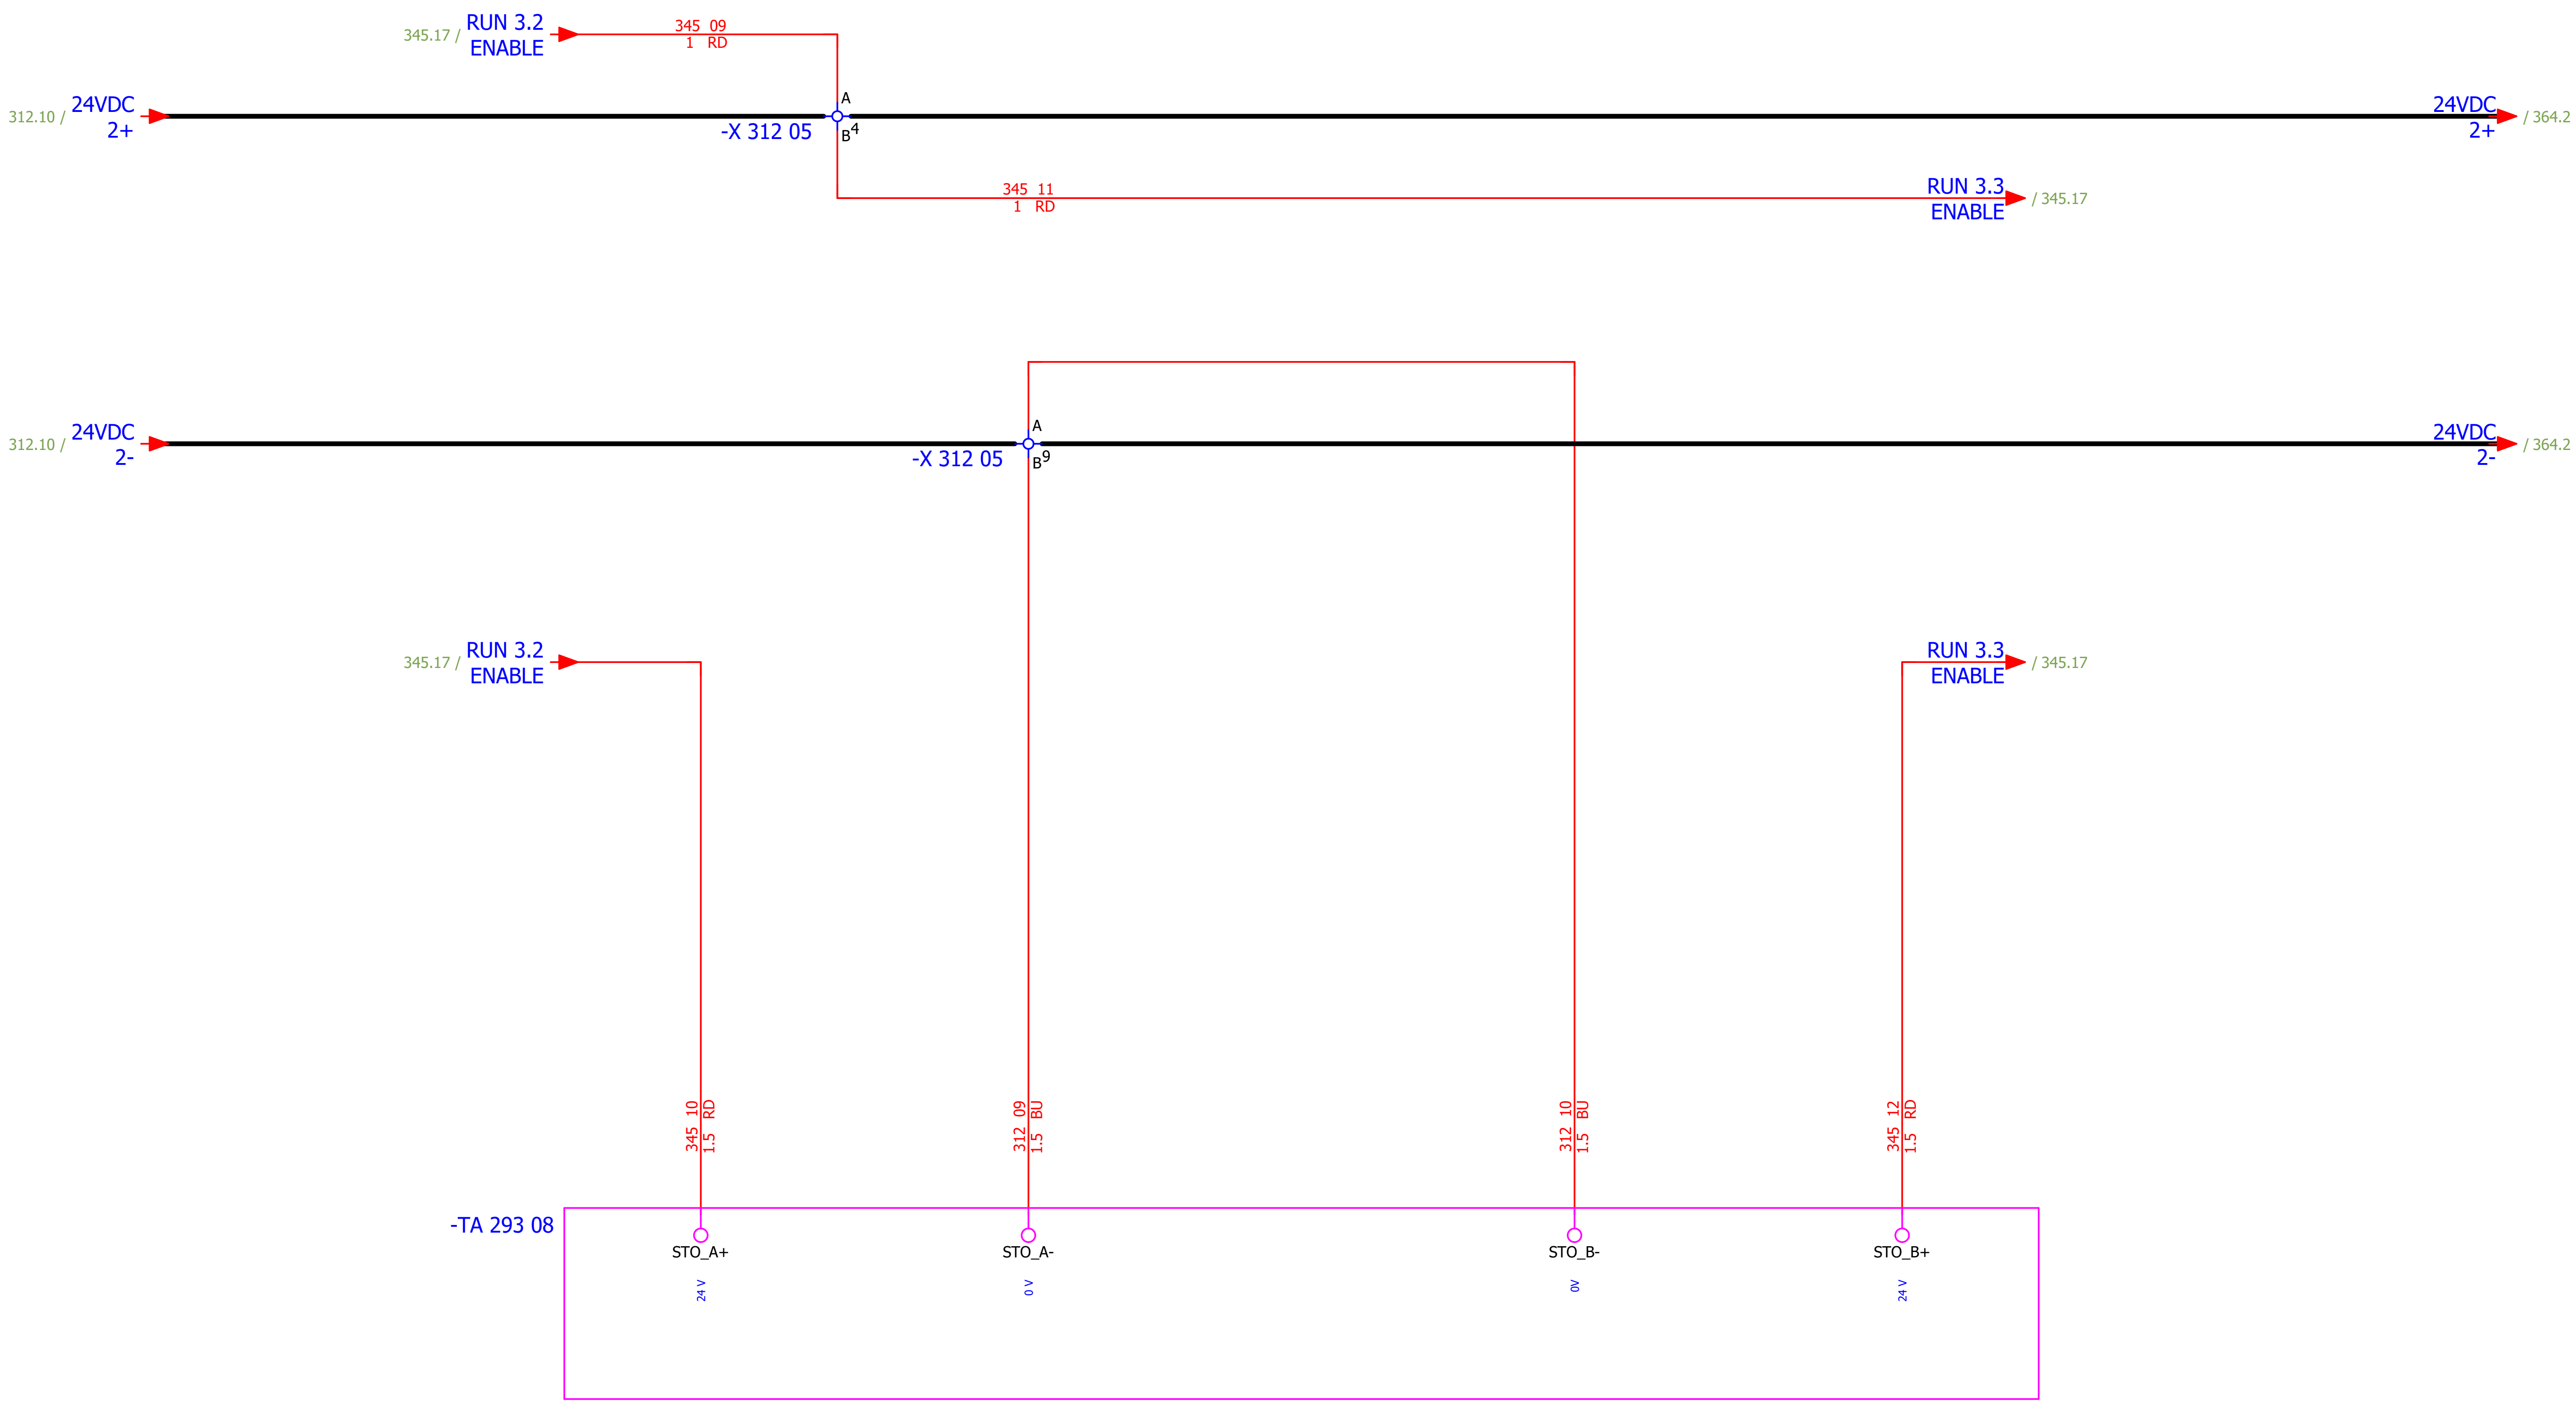

Date: 17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#NA
Drawn: Jere Radas								
Approved: Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: CONDENSATE PUMP 2 - SAFE TORQUE OFF	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 363
Format: A3							+4LKF005AR	Next: 364

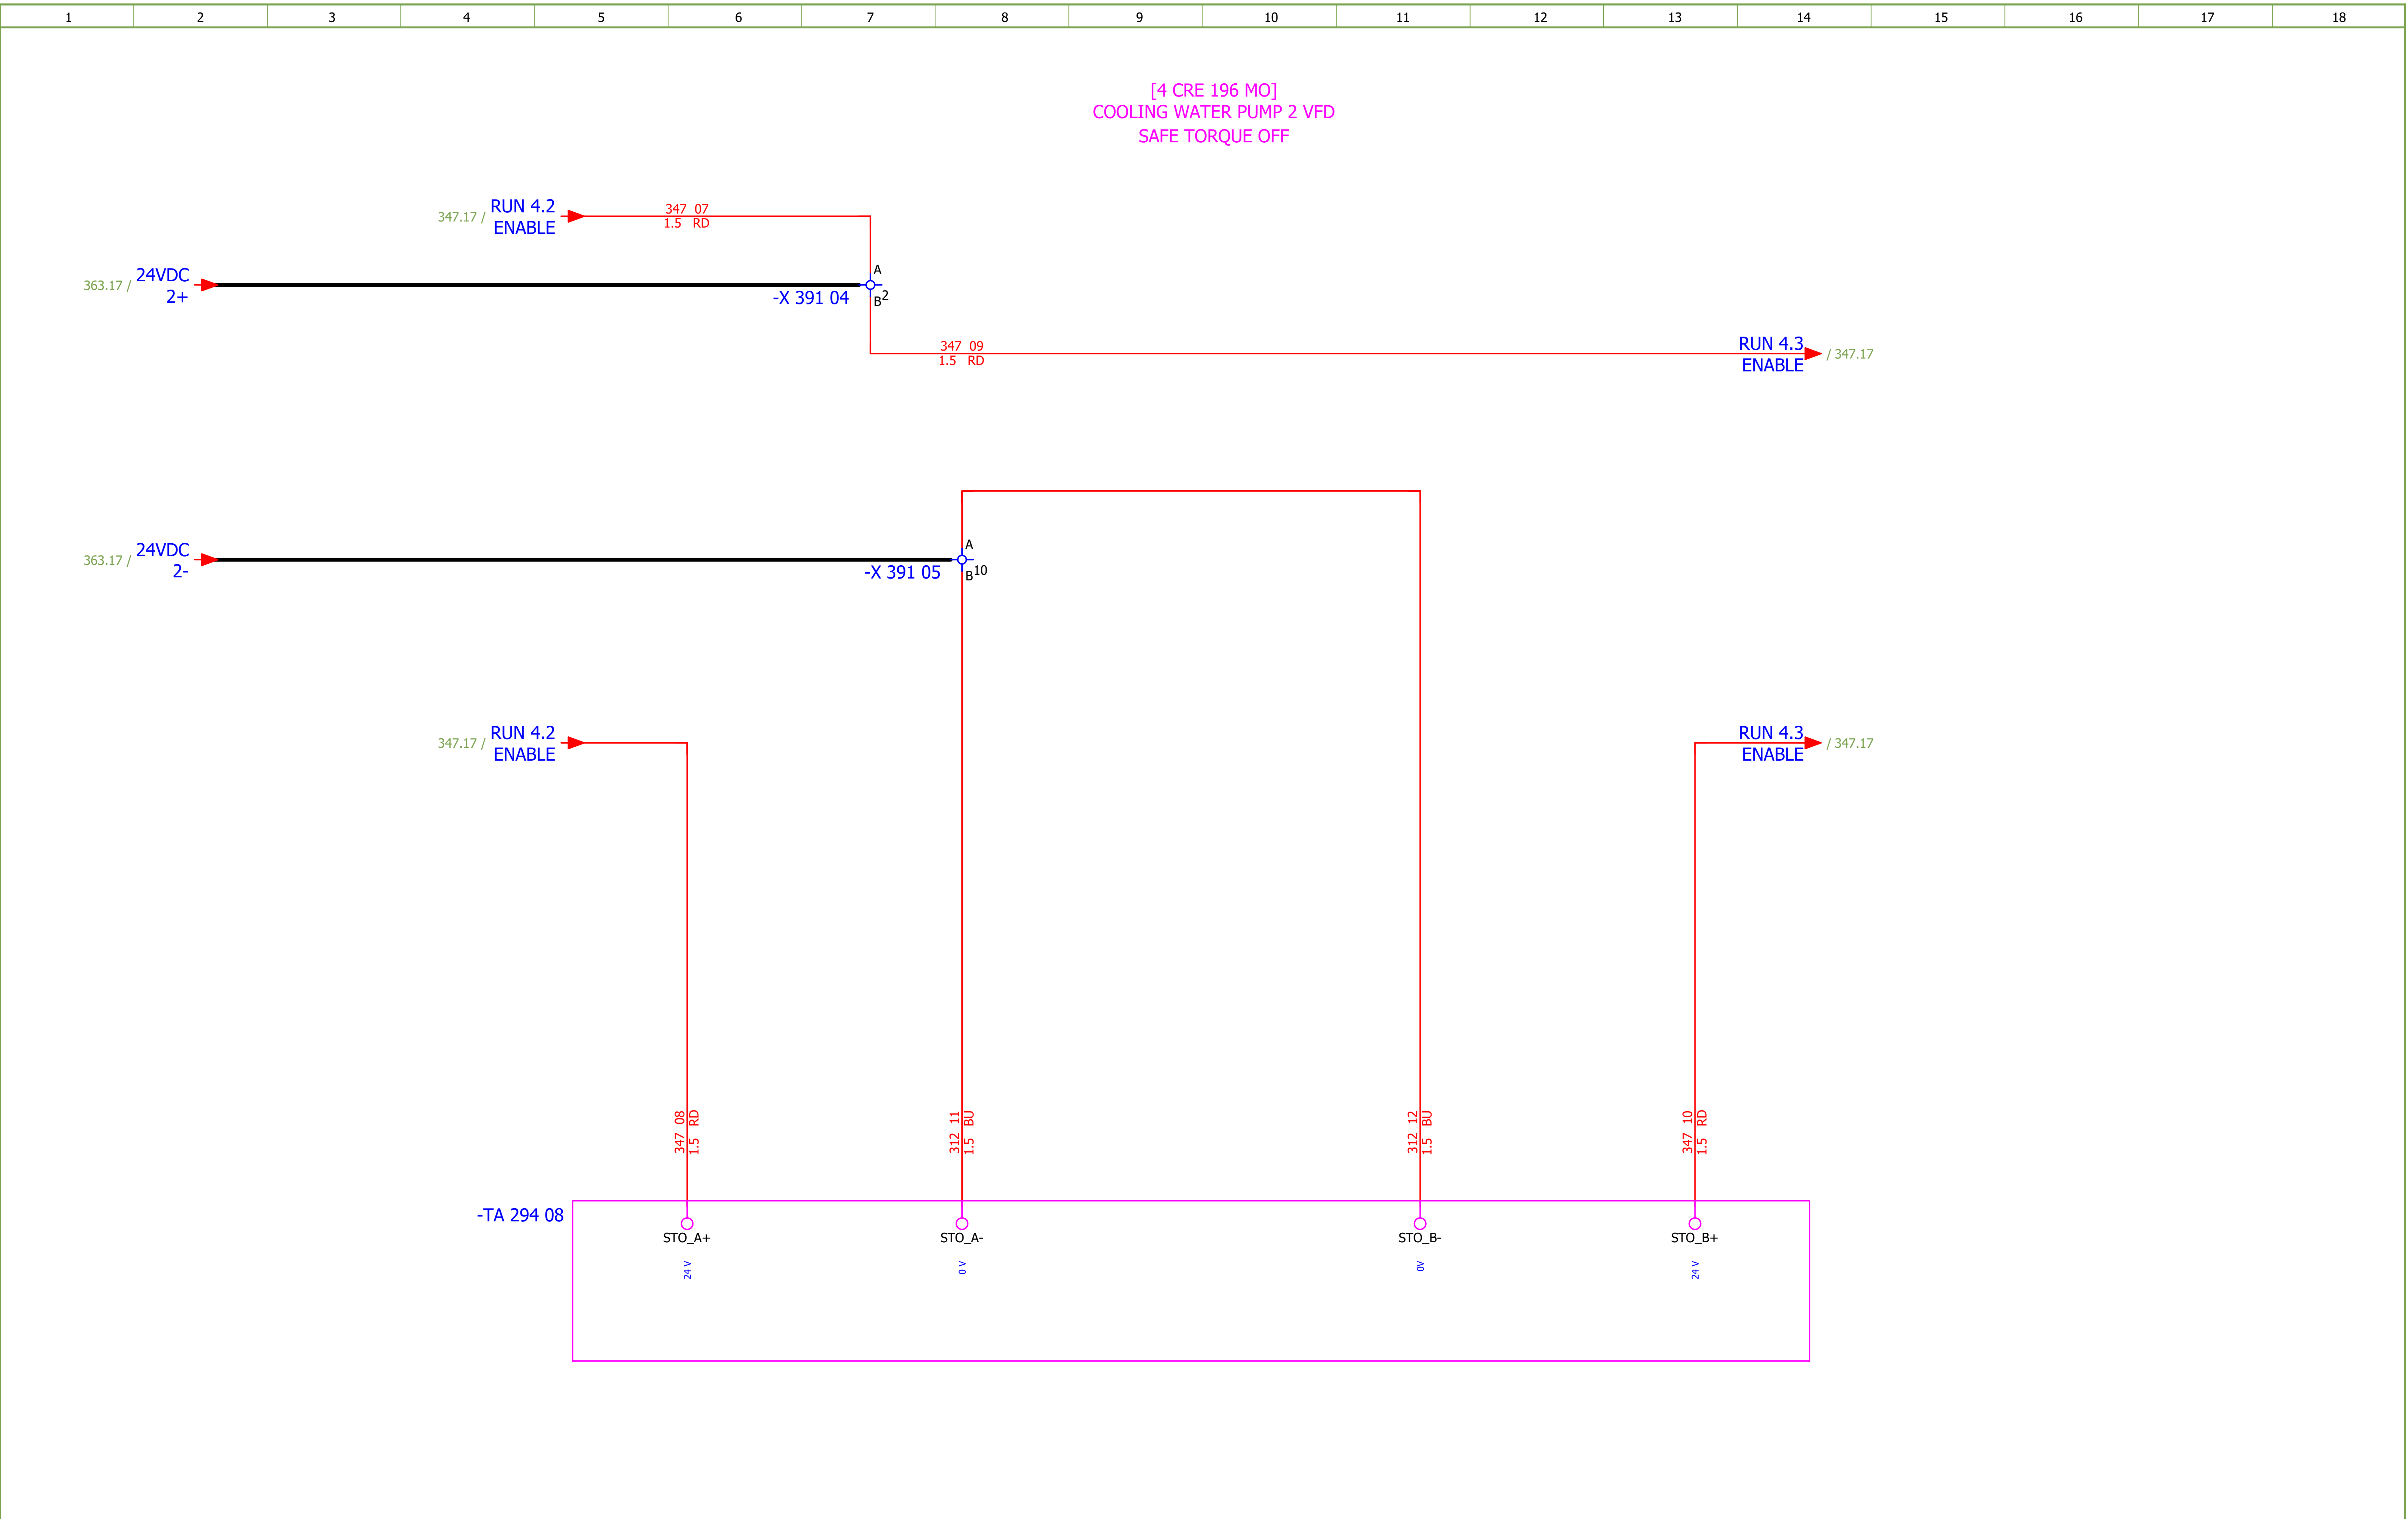

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0
Drawn:	Jere Radas					Number: 1870	Revision: F
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 2 - SAFE TORQUE OFF	Drawing designation: BRC-4-ATEP0-1870-F	#NA
Format:	A3					=4LKF001AR +4LKF005AR	Sheet: 364 Next: 365

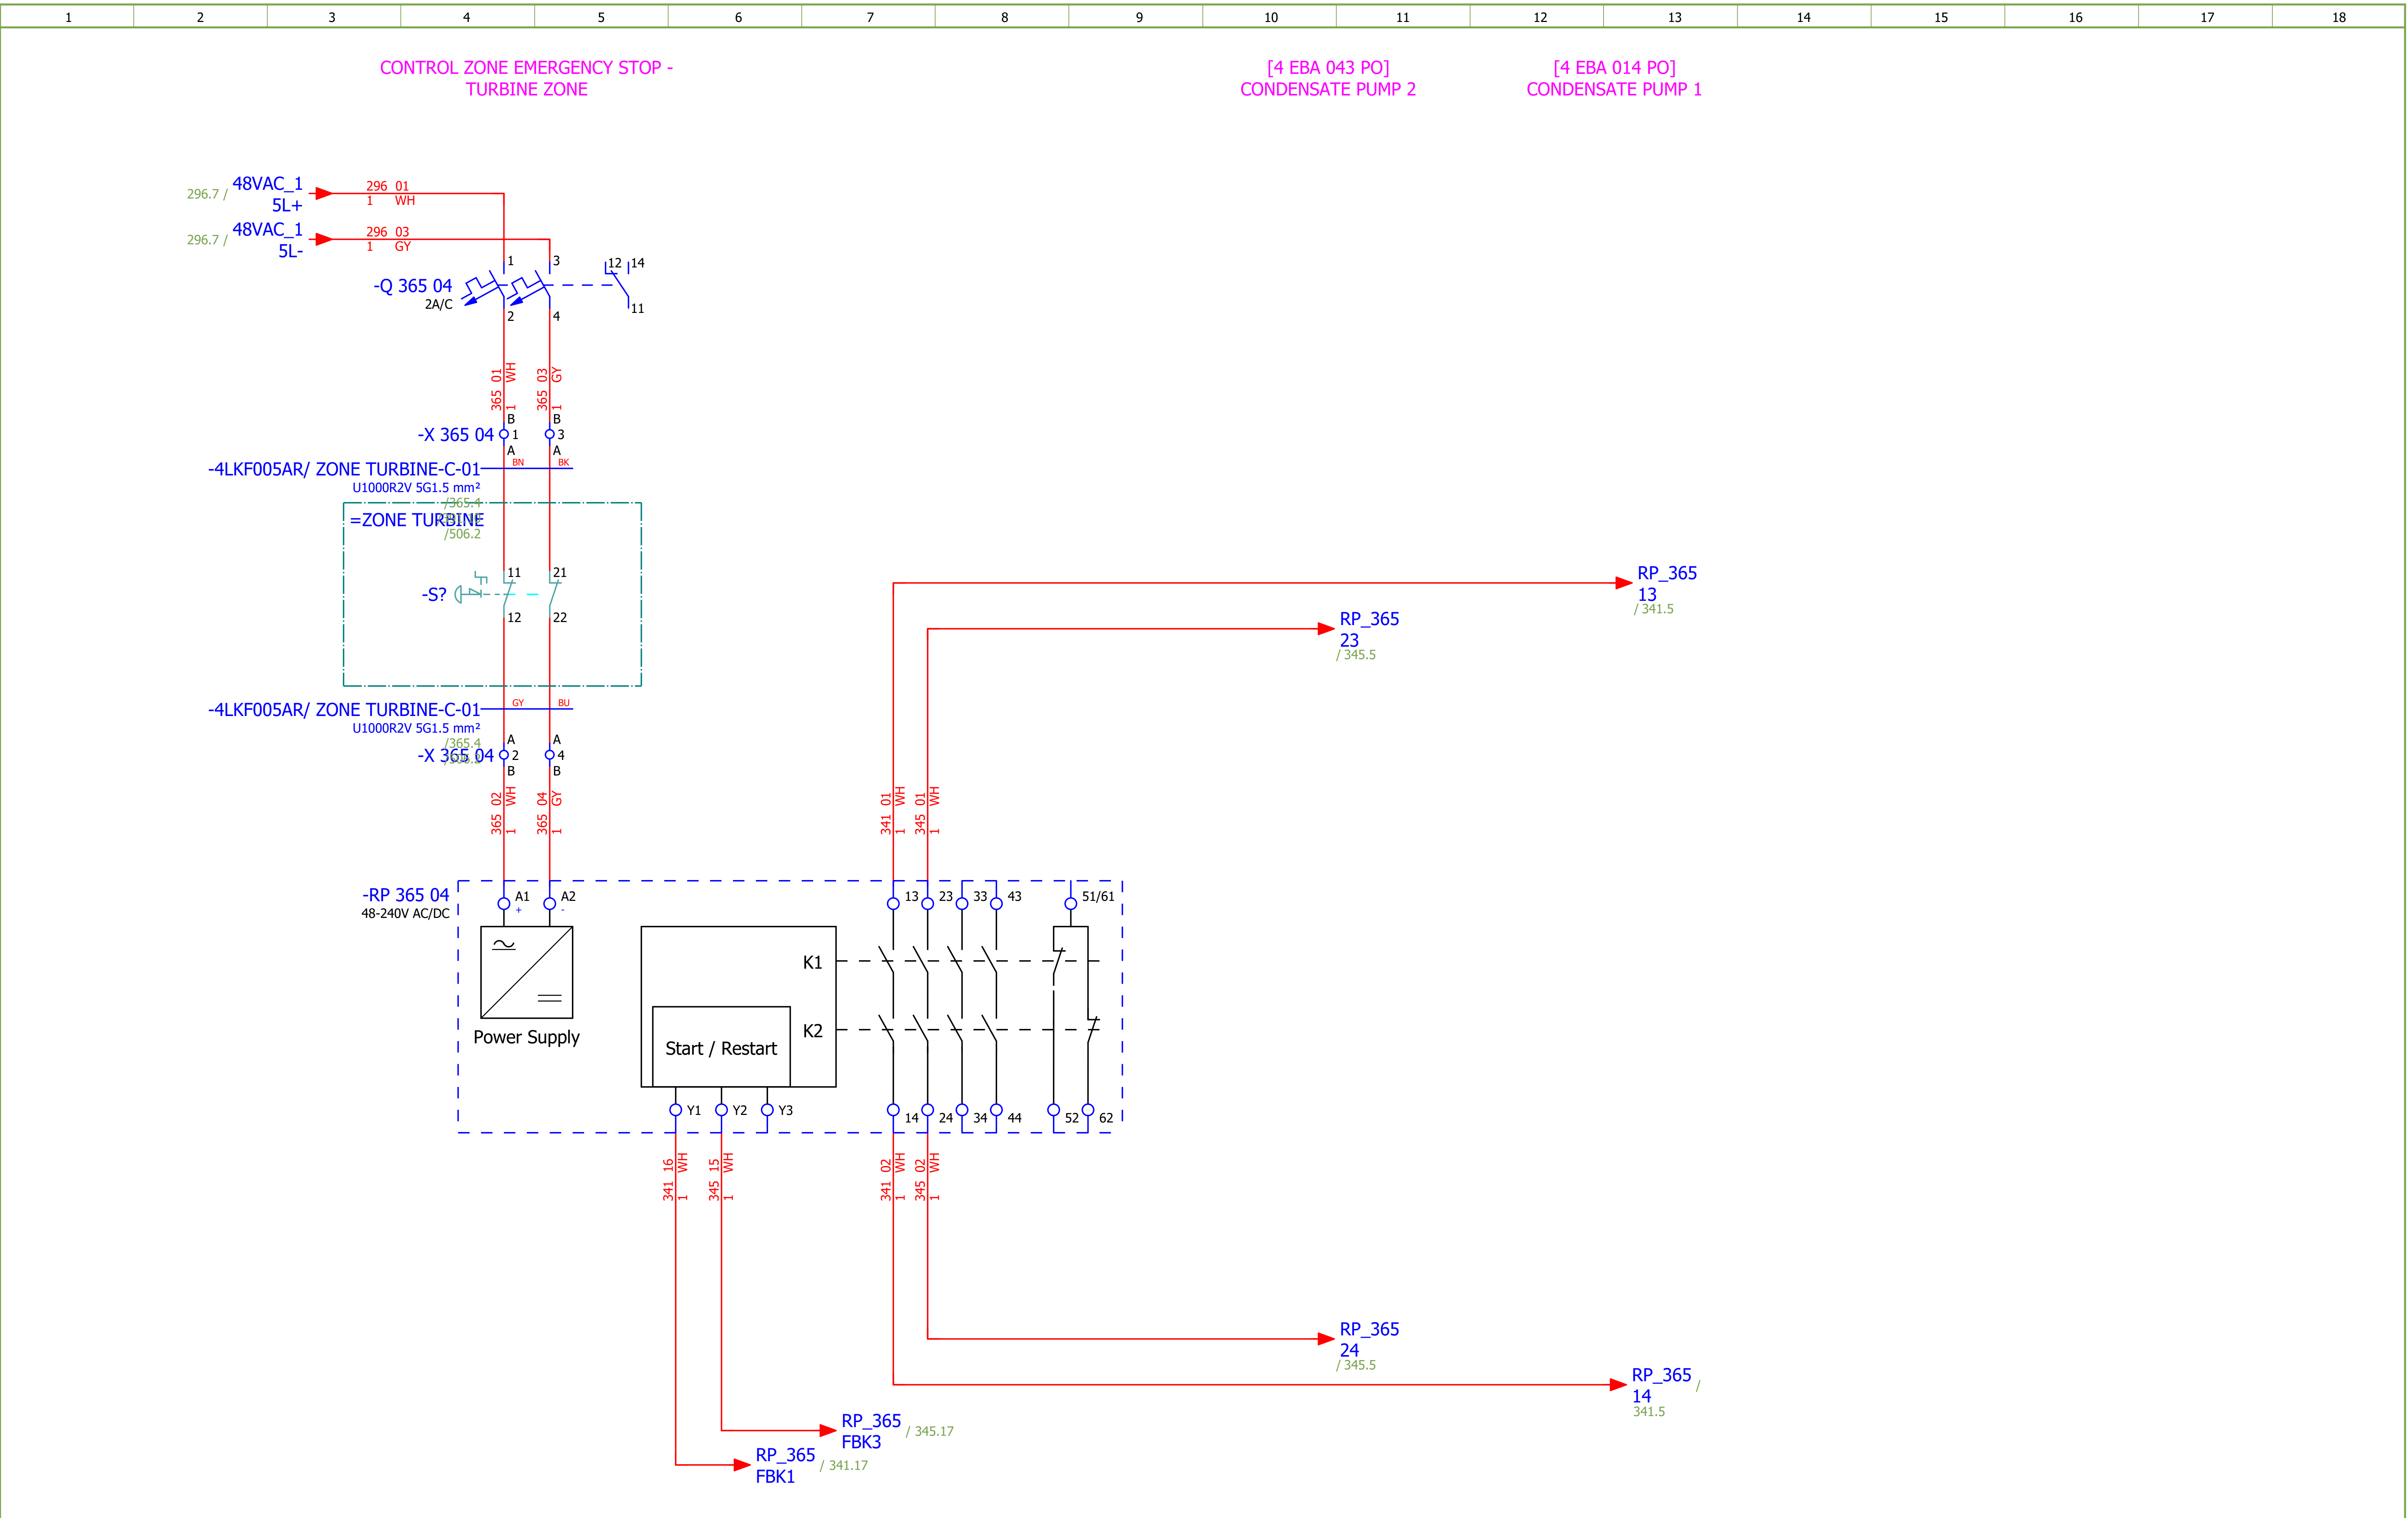

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870
Drawn:	Jere Radas						Revision: F	#NA
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: EMERGENCY SHUTDOWN - TURBINE ZONE	Drawing designation: BRC-4-ATEP0-1870-F	=4LKF001AR	Sheet: 365
Format:	A3						+4LKF005AR	Next: 371

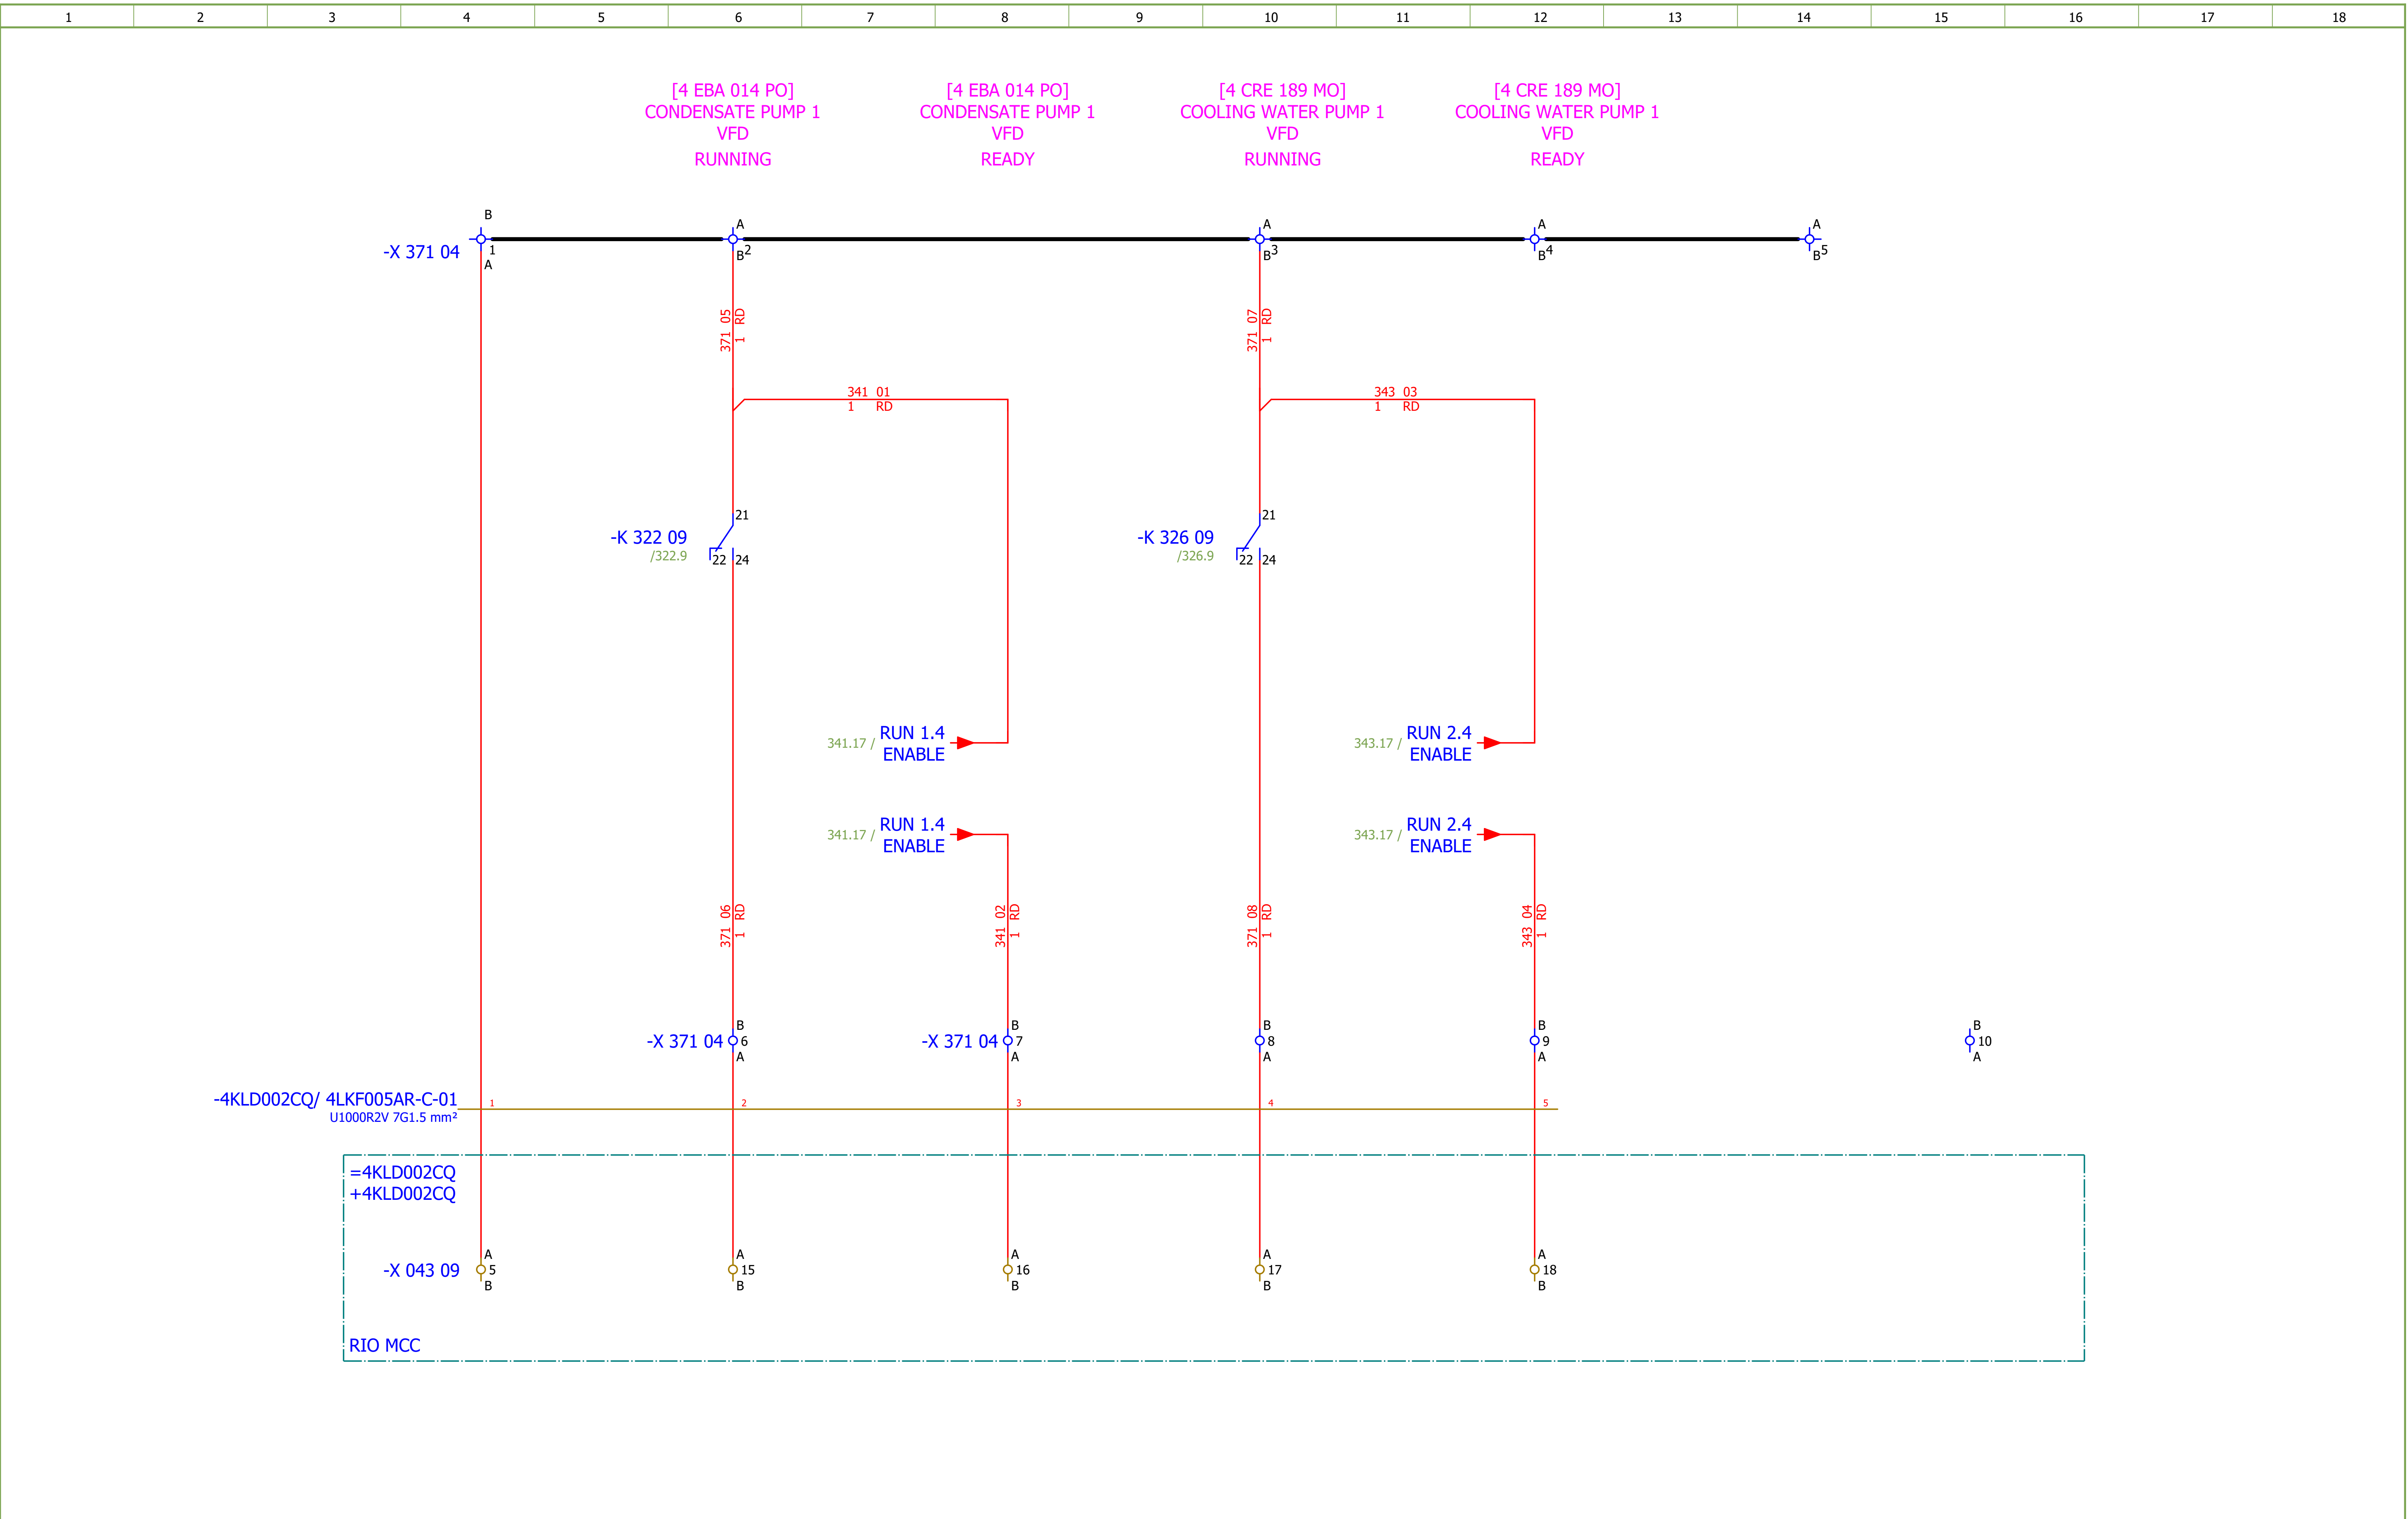

Date: 17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870
Drawn: Jere Radas						Revision: F
Approved: Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: VFD GROUP 1 - SIGNALIZATION TO PLC	Drawing designation: BRC-4-ATEP0-1870-F	=4LKF001AR	#QA Sheet: 371
Format: A3					+4LKF005AR	Next: 372

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

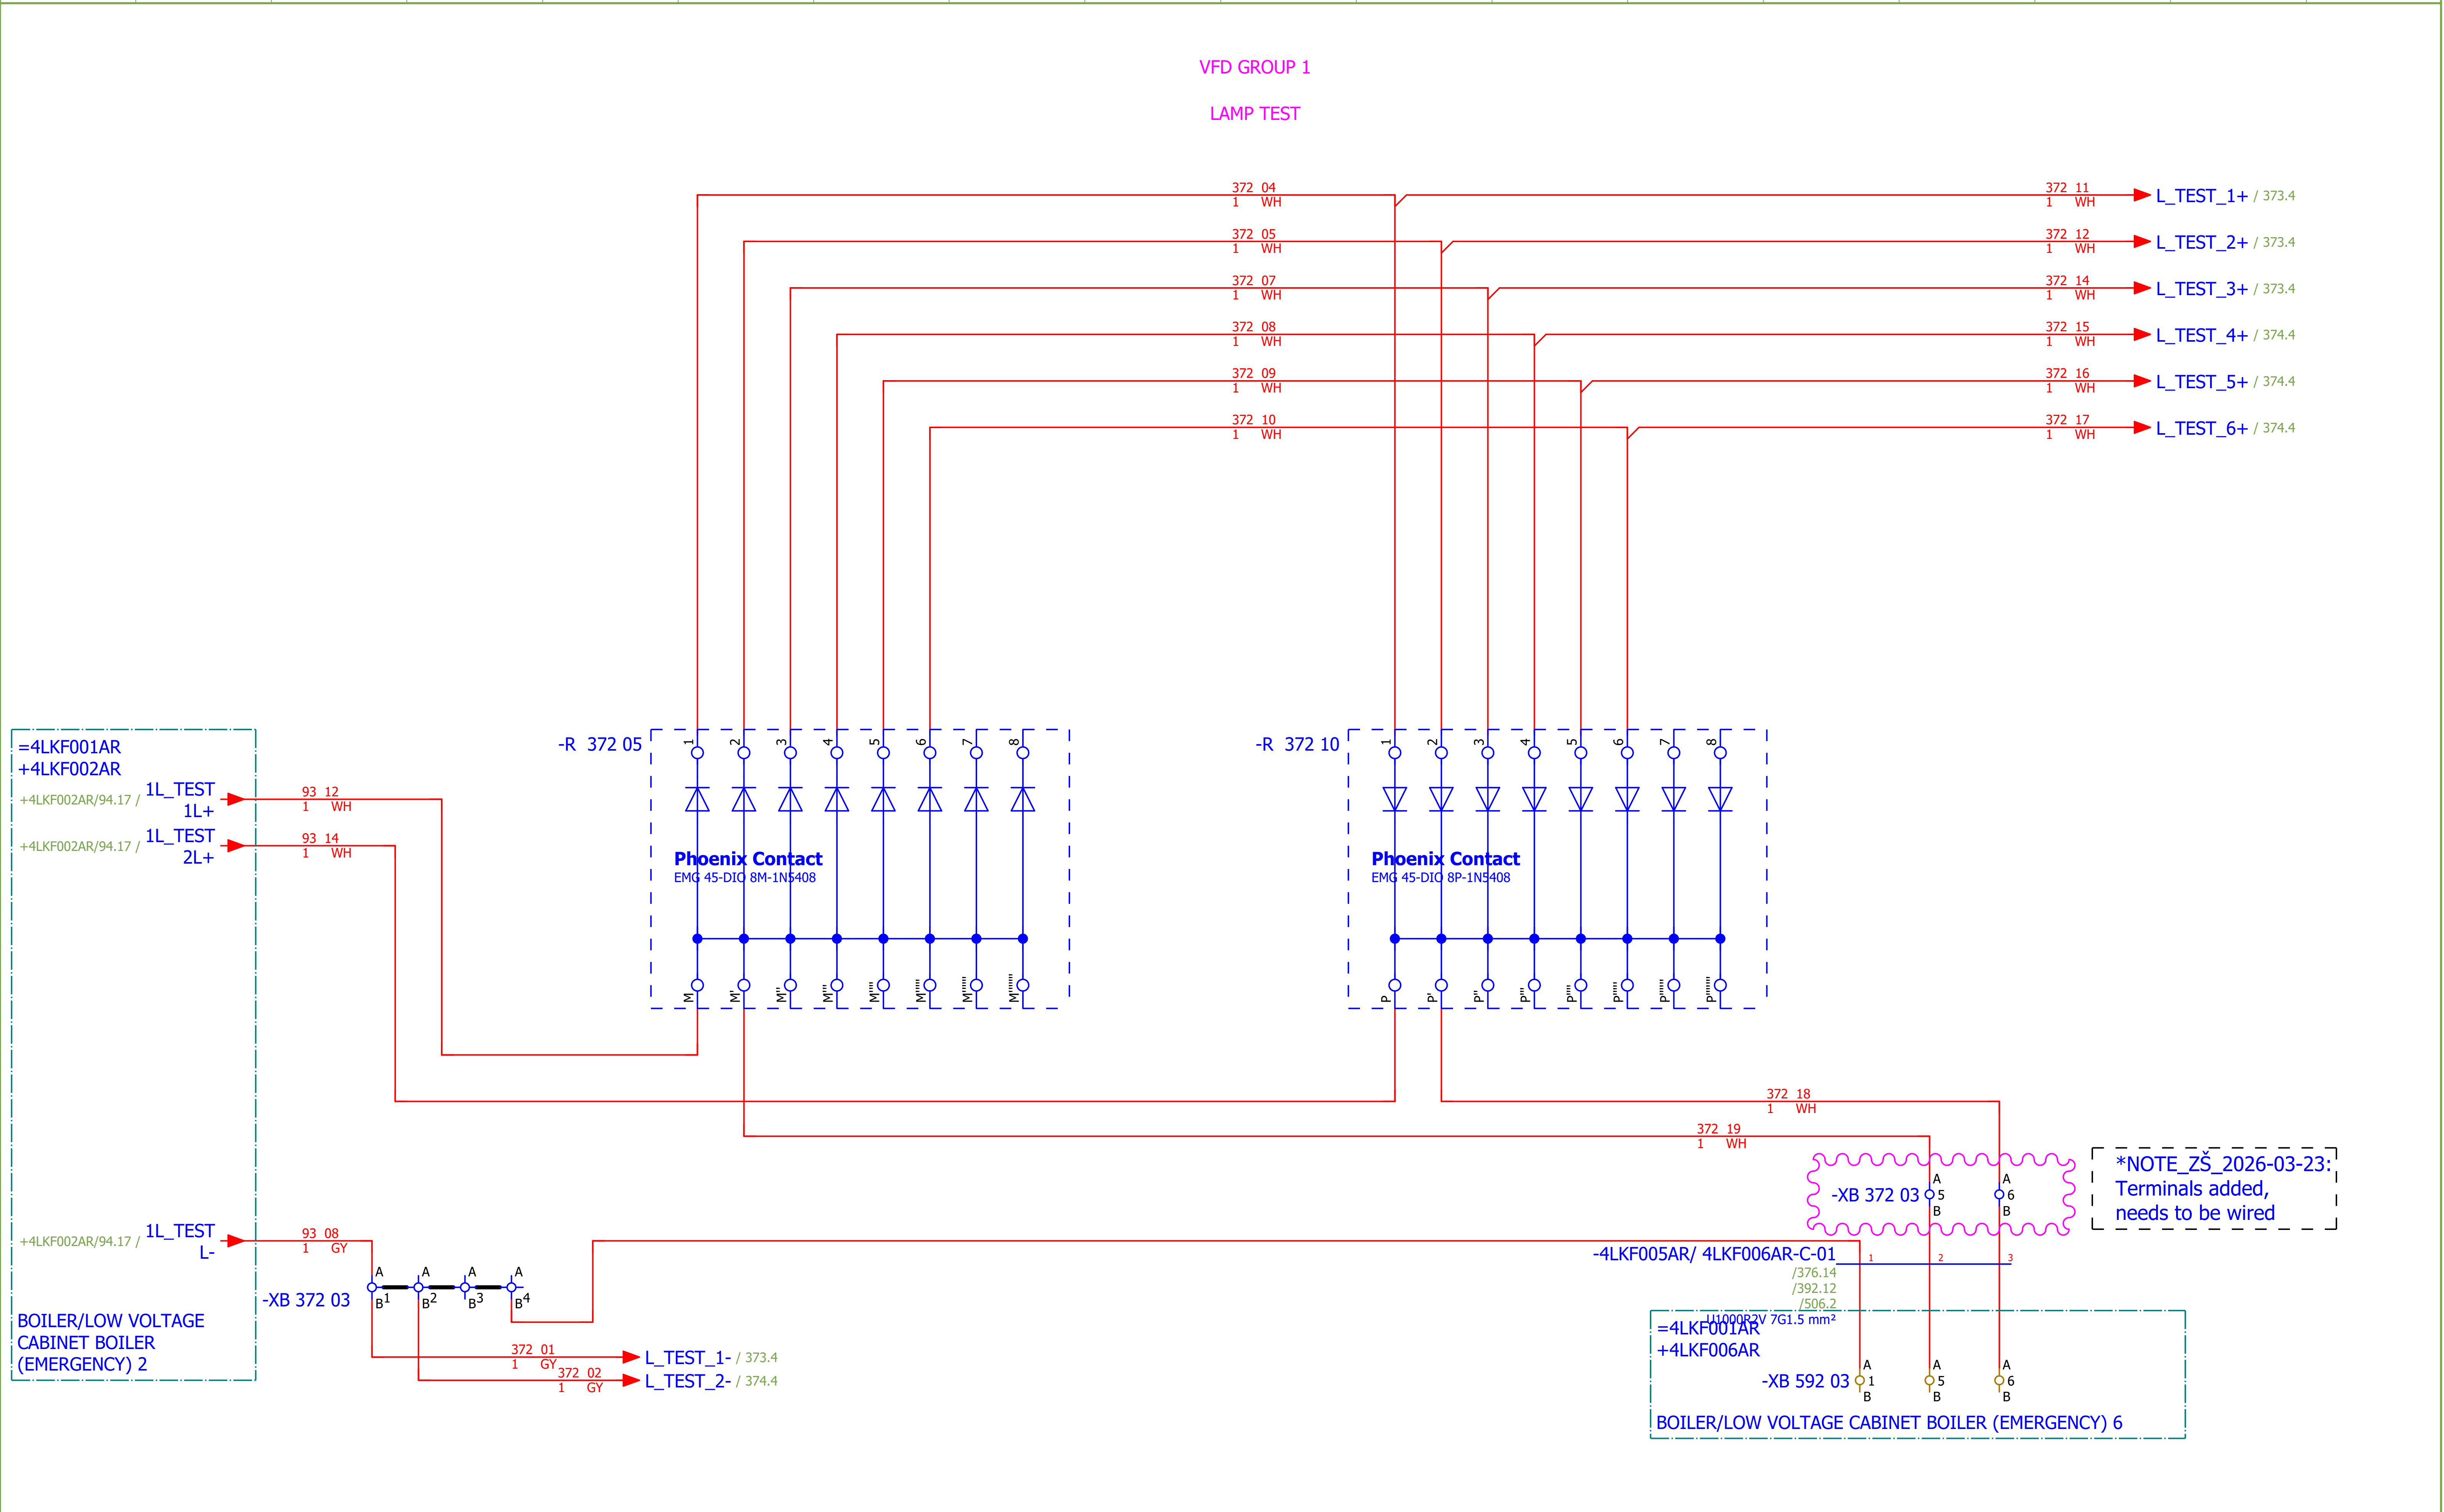

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#QA
Drawn:	Jere Radas									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: VFD GROUP 1 - LAMP TEST	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 372
Format:	A3								+4LKF005AR	Next: 373

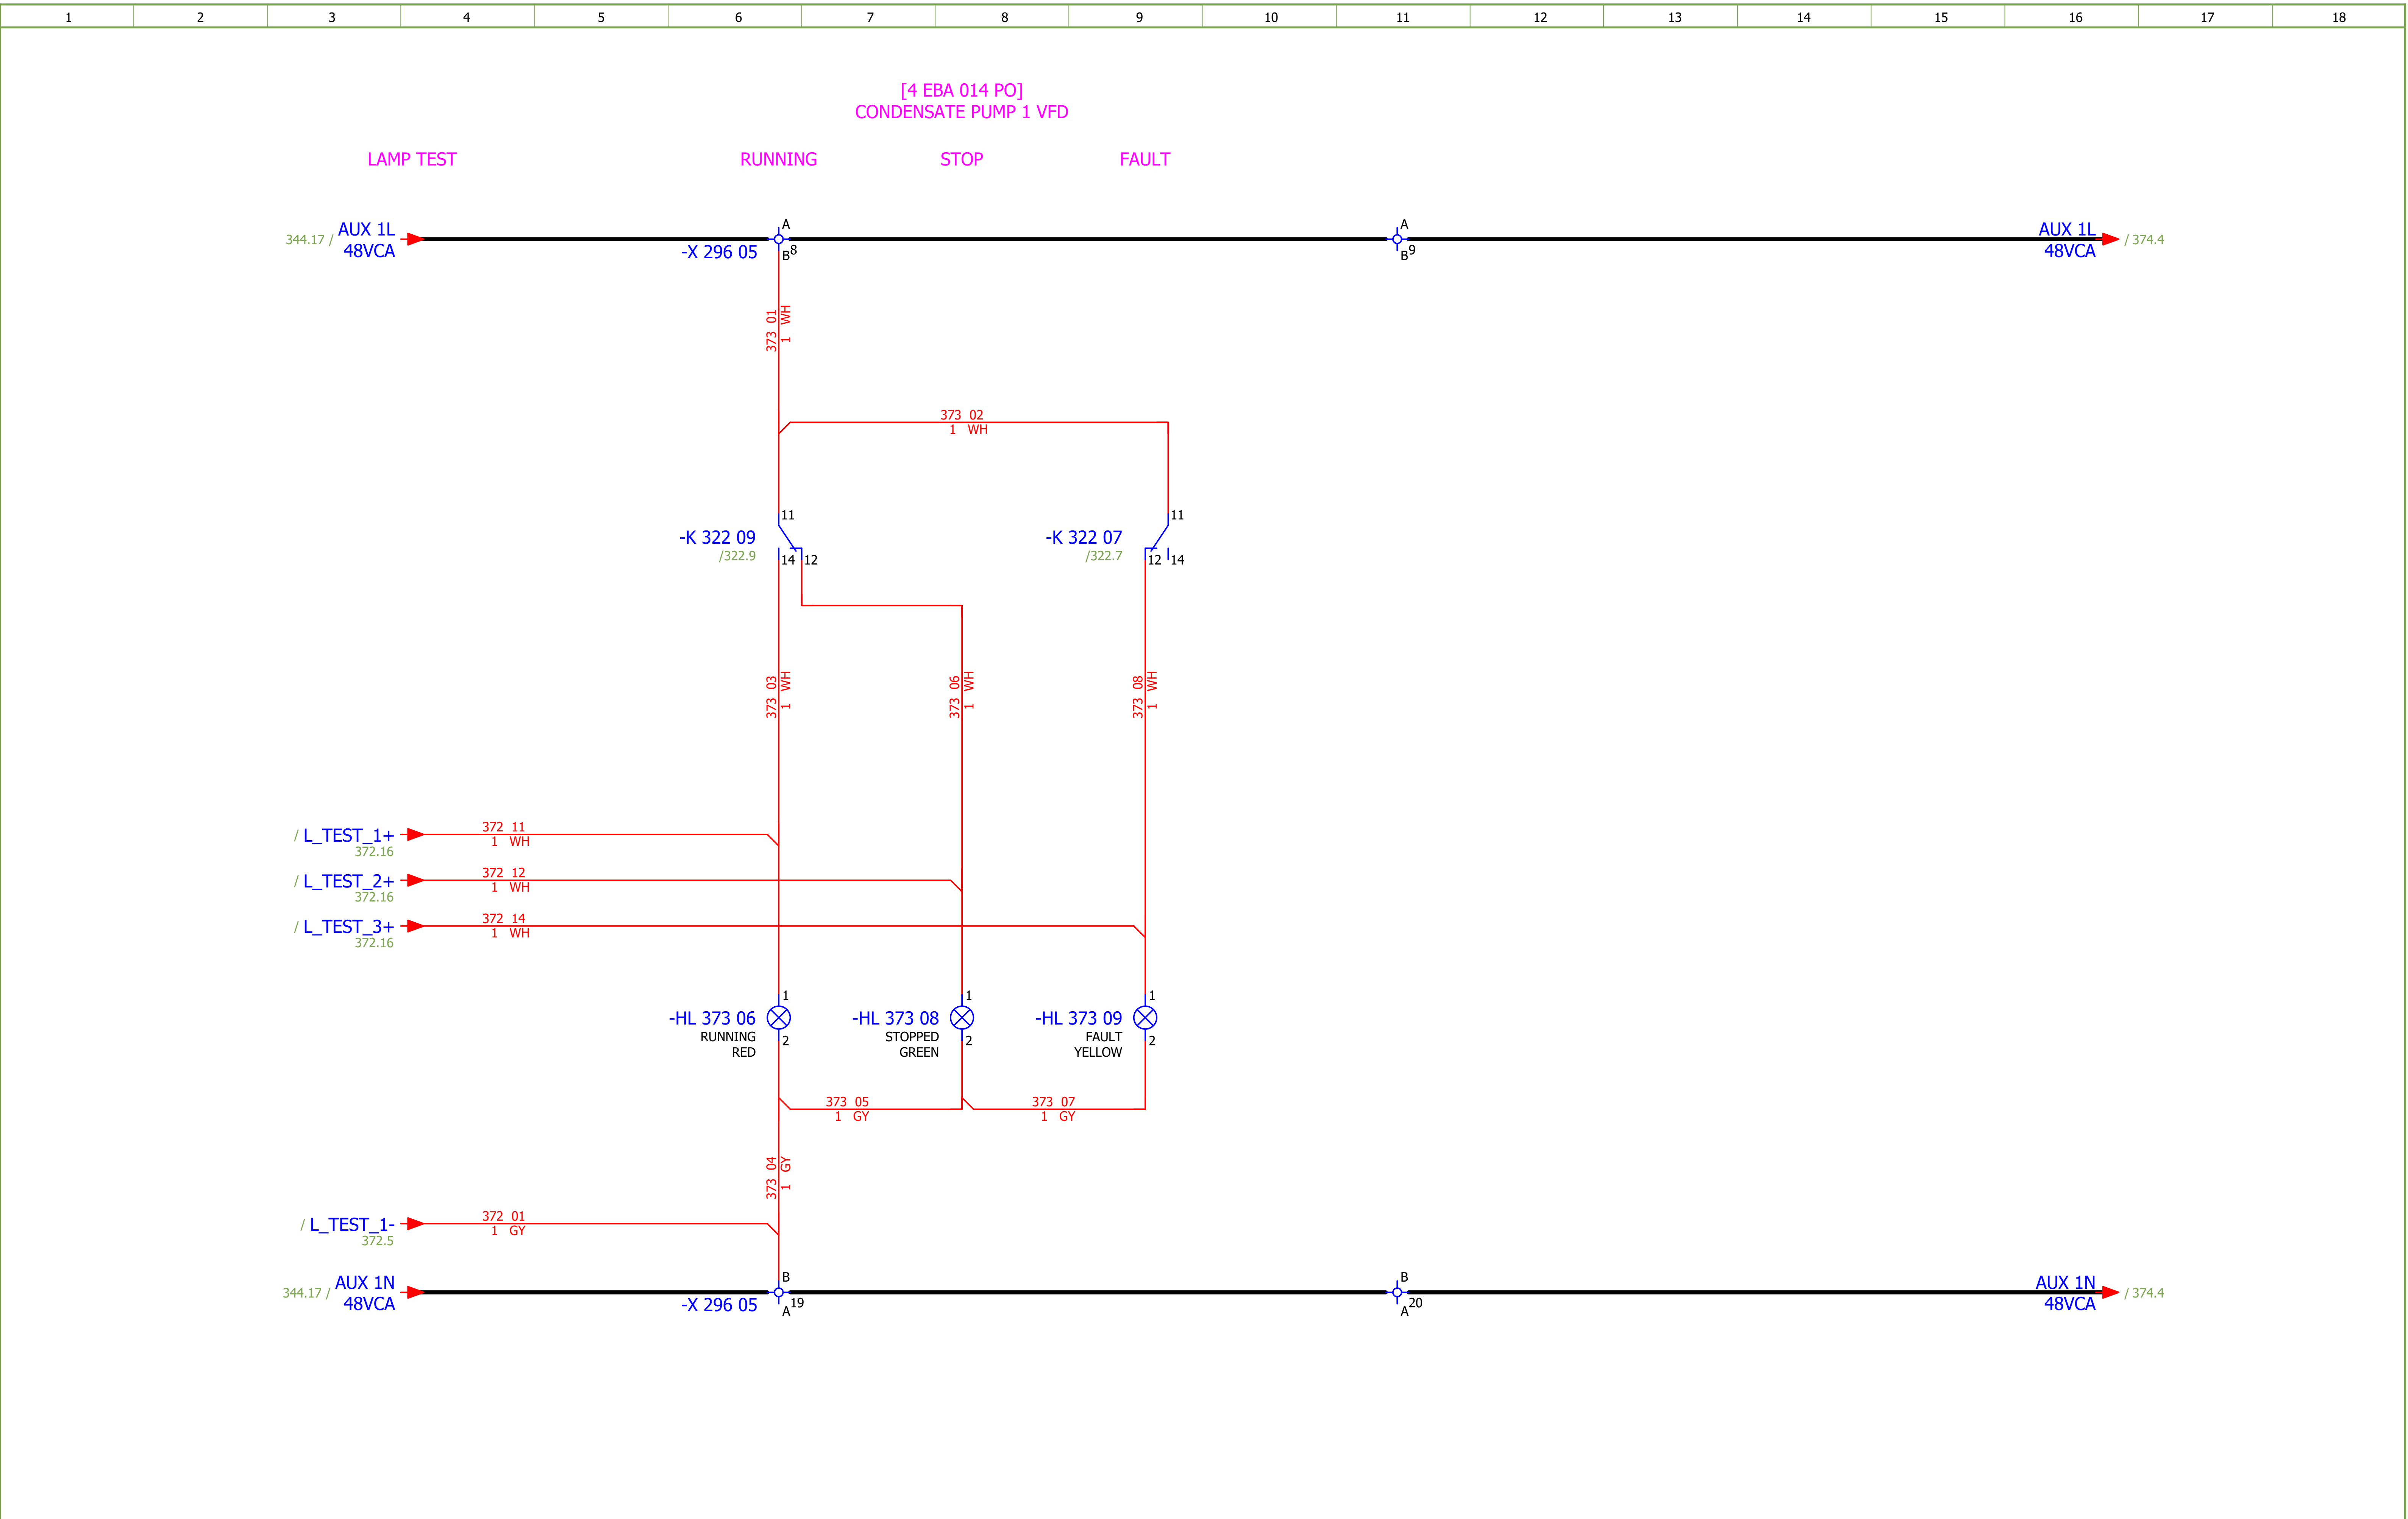

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Jere Radas								#QA
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: CONDENSATE PUMP 1 - SIGNALIZATION LAMPS	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 373
Format:	A3							+4LKF005AR	Next: 374

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

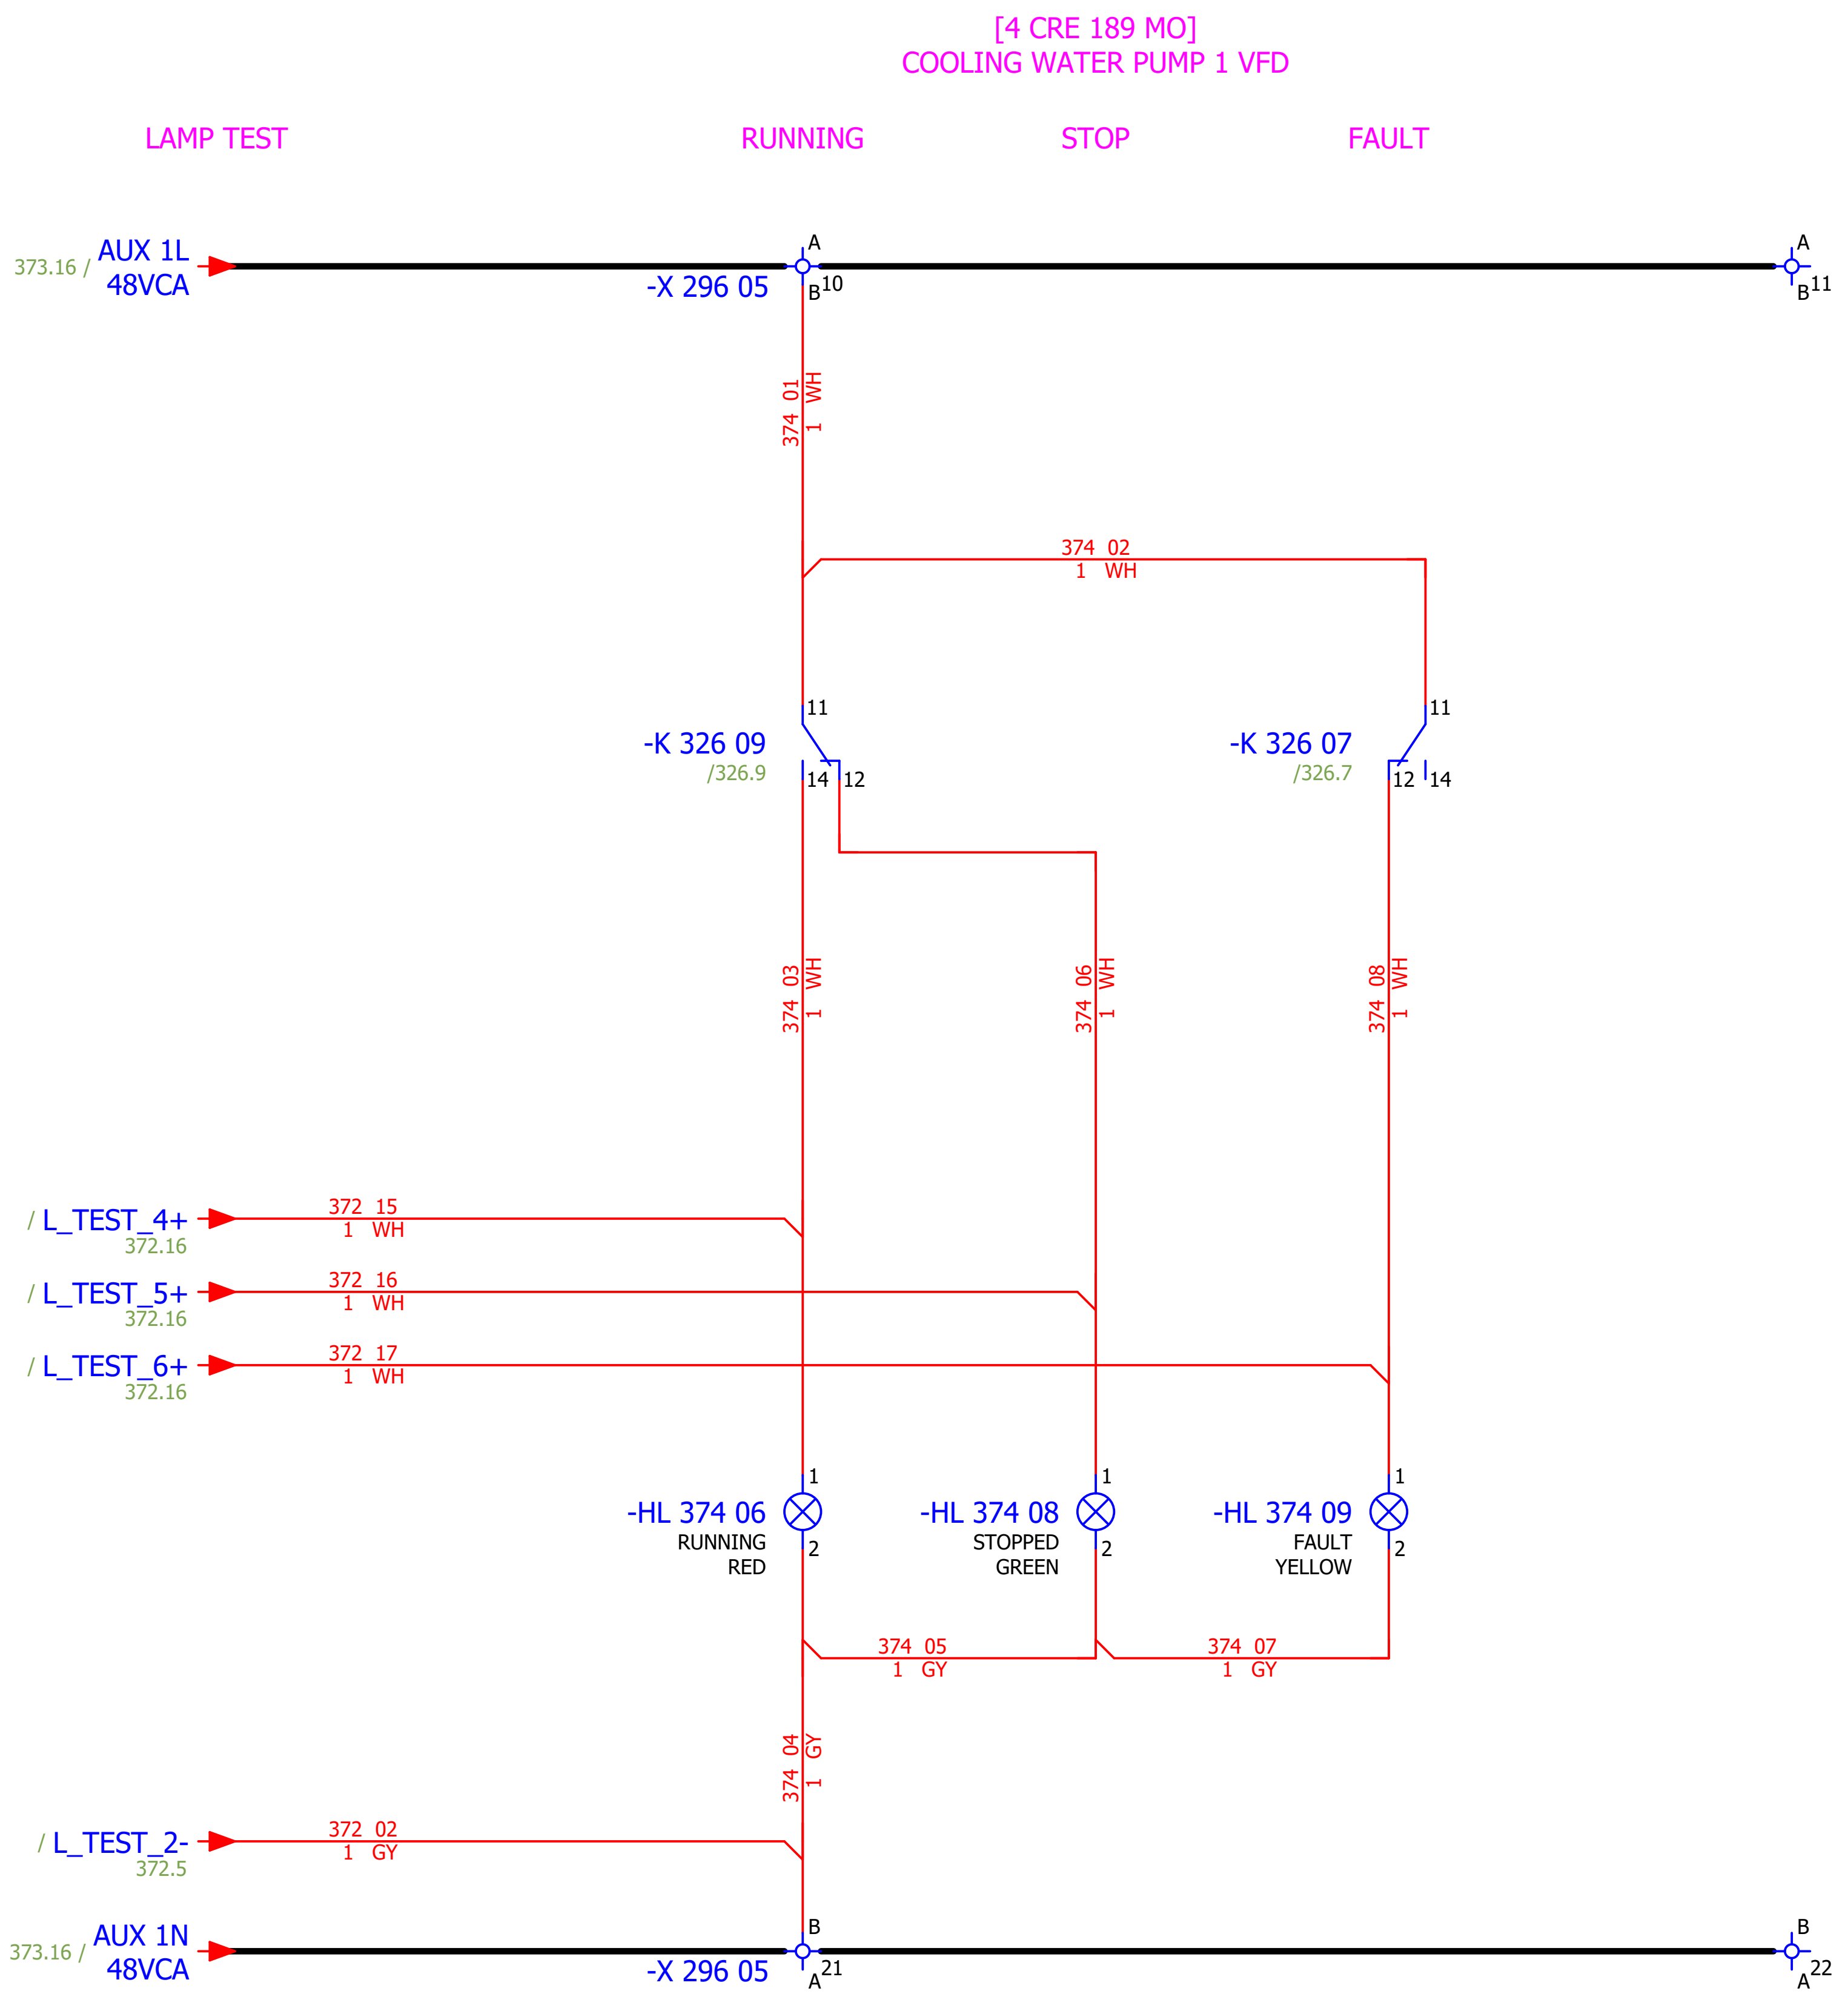

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#QA
Drawn:	Jere Radas										
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	COOLING WATER PUMP 1 - SIGNALIZATION LAMPS	Drawing designation:	BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 374
Format:	A3									+4LKF005AR	Next: 375

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

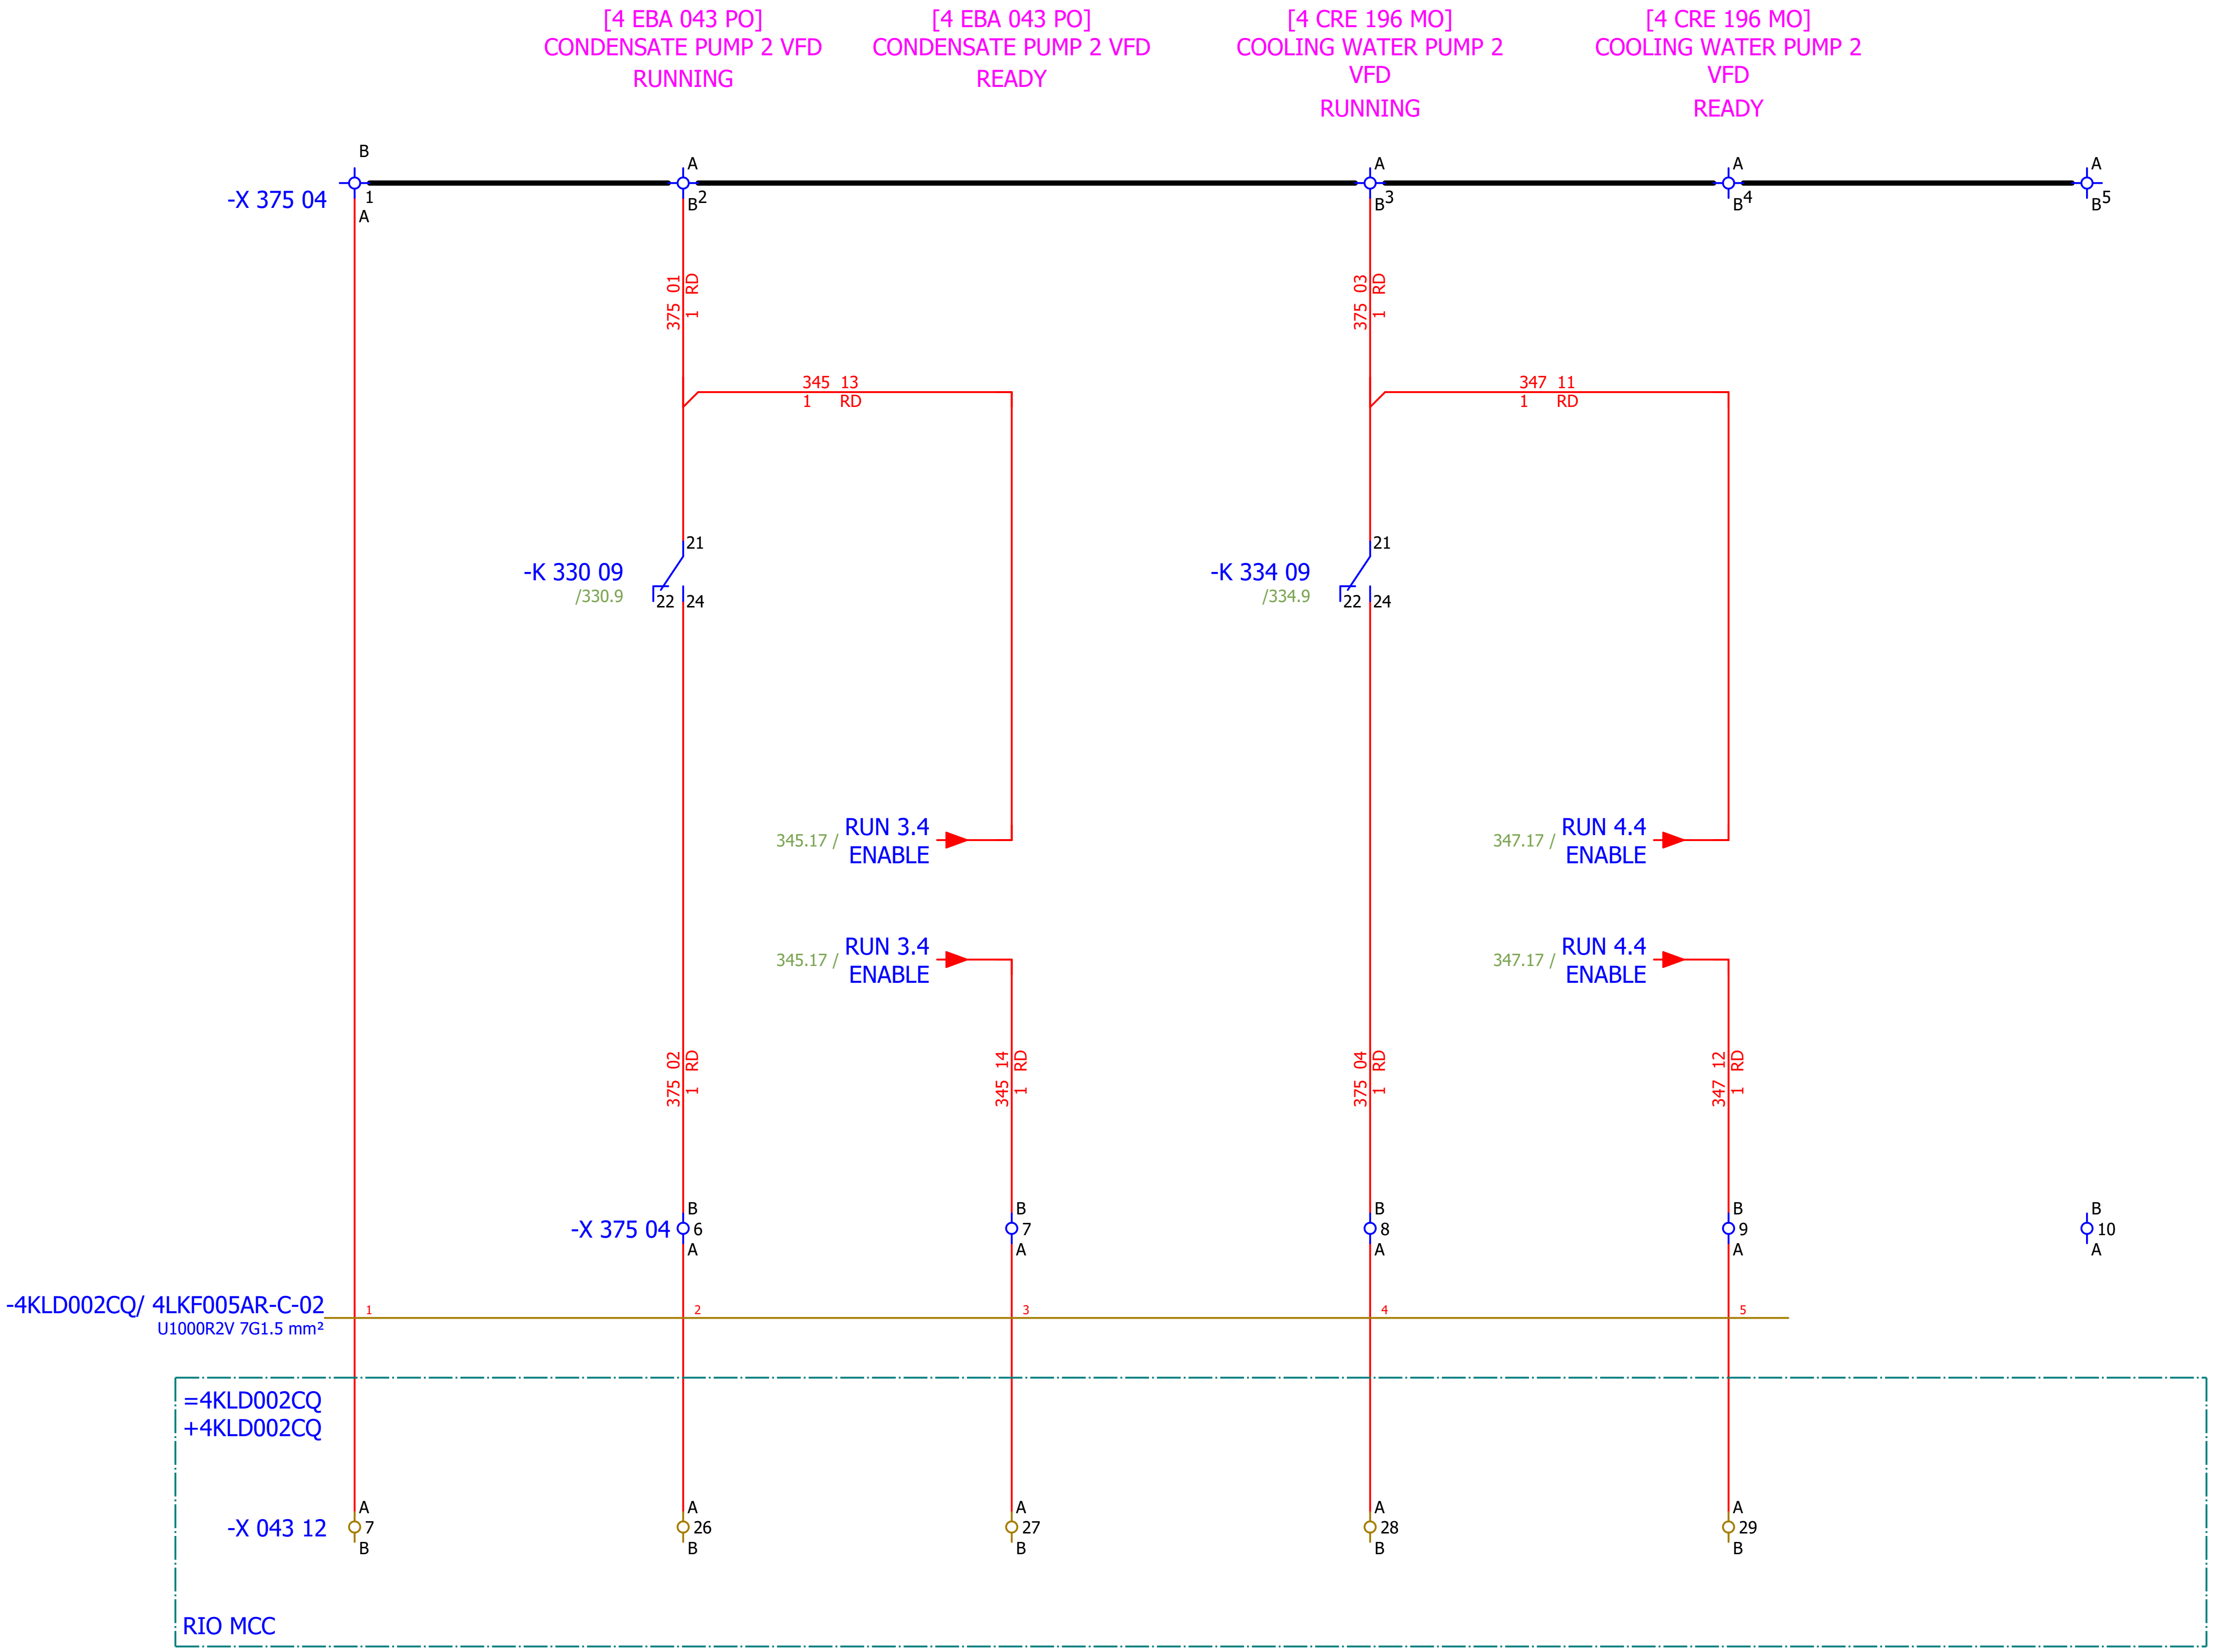

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#QA
Drawn:	Jere Radas									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: VFD GROUP 2 - SIGNALIZATION TO PLC	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 375
Format:	A3								+4LKF005AR	Next: 376

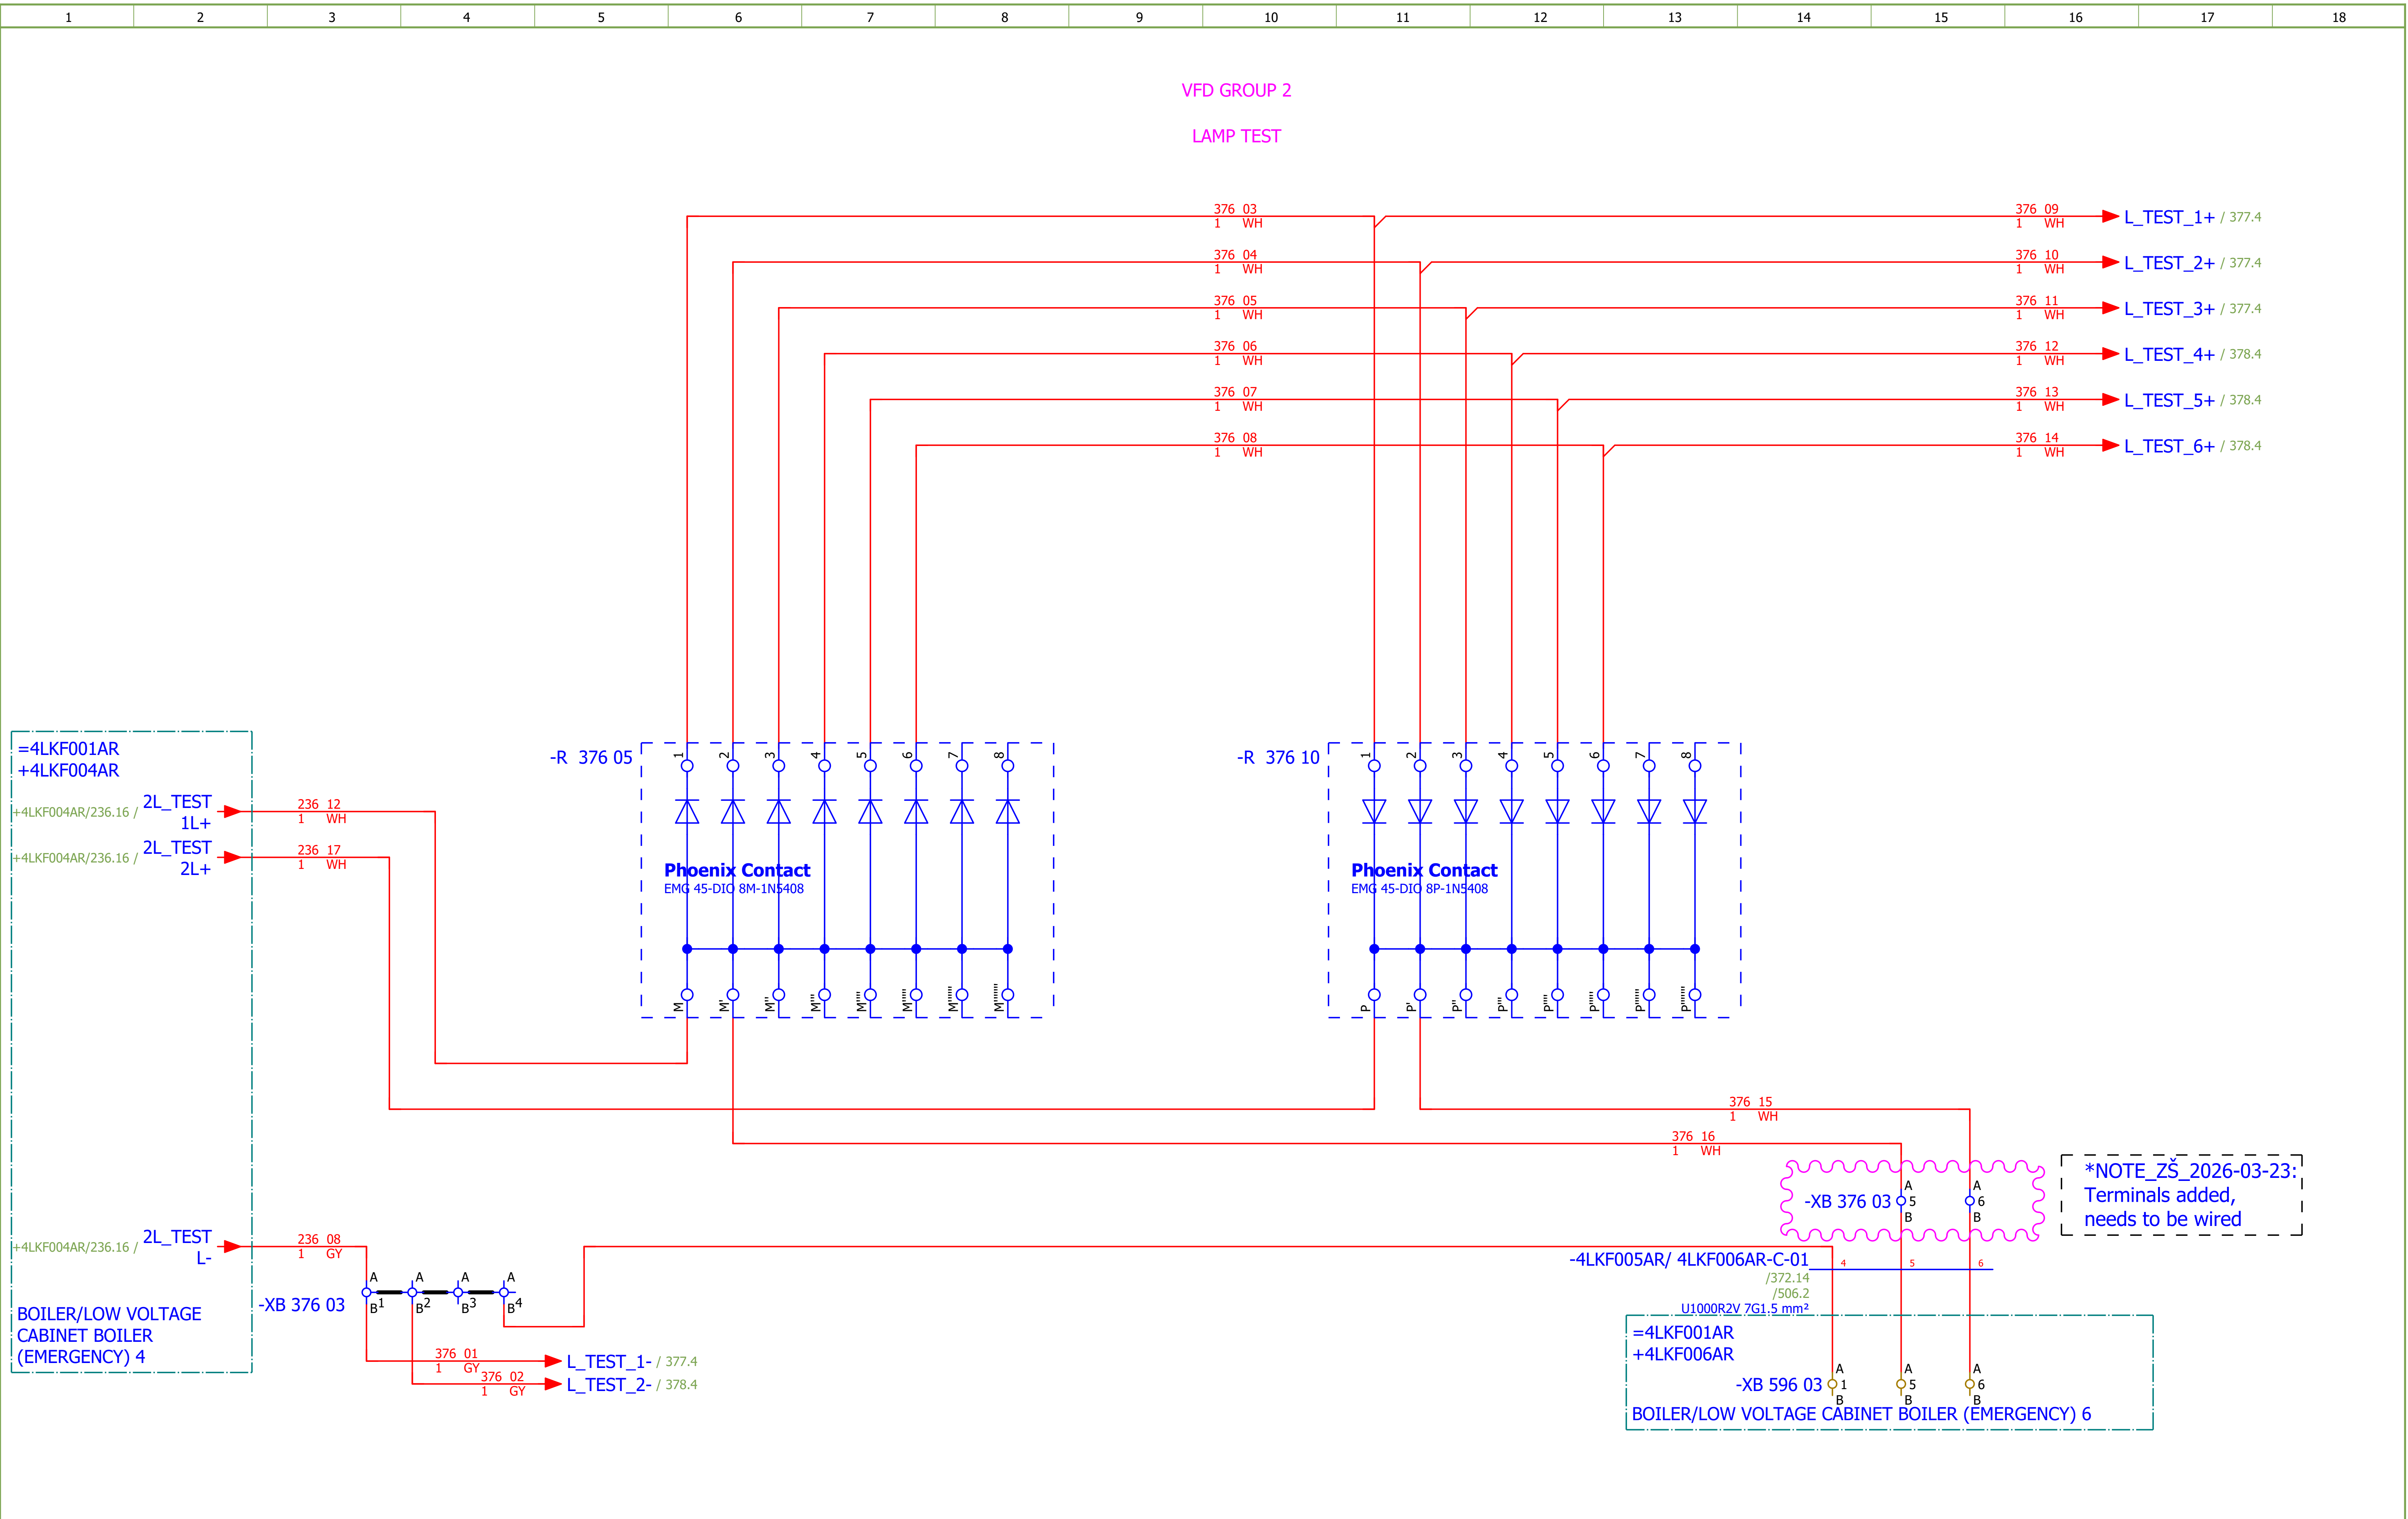

Date: 17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#QA
Drawn: Jere Radas									
Approved: Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: VFD GROUP 2 - LAMP TEST	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 376
Format: A3								+4LKF005AR	Next: 377

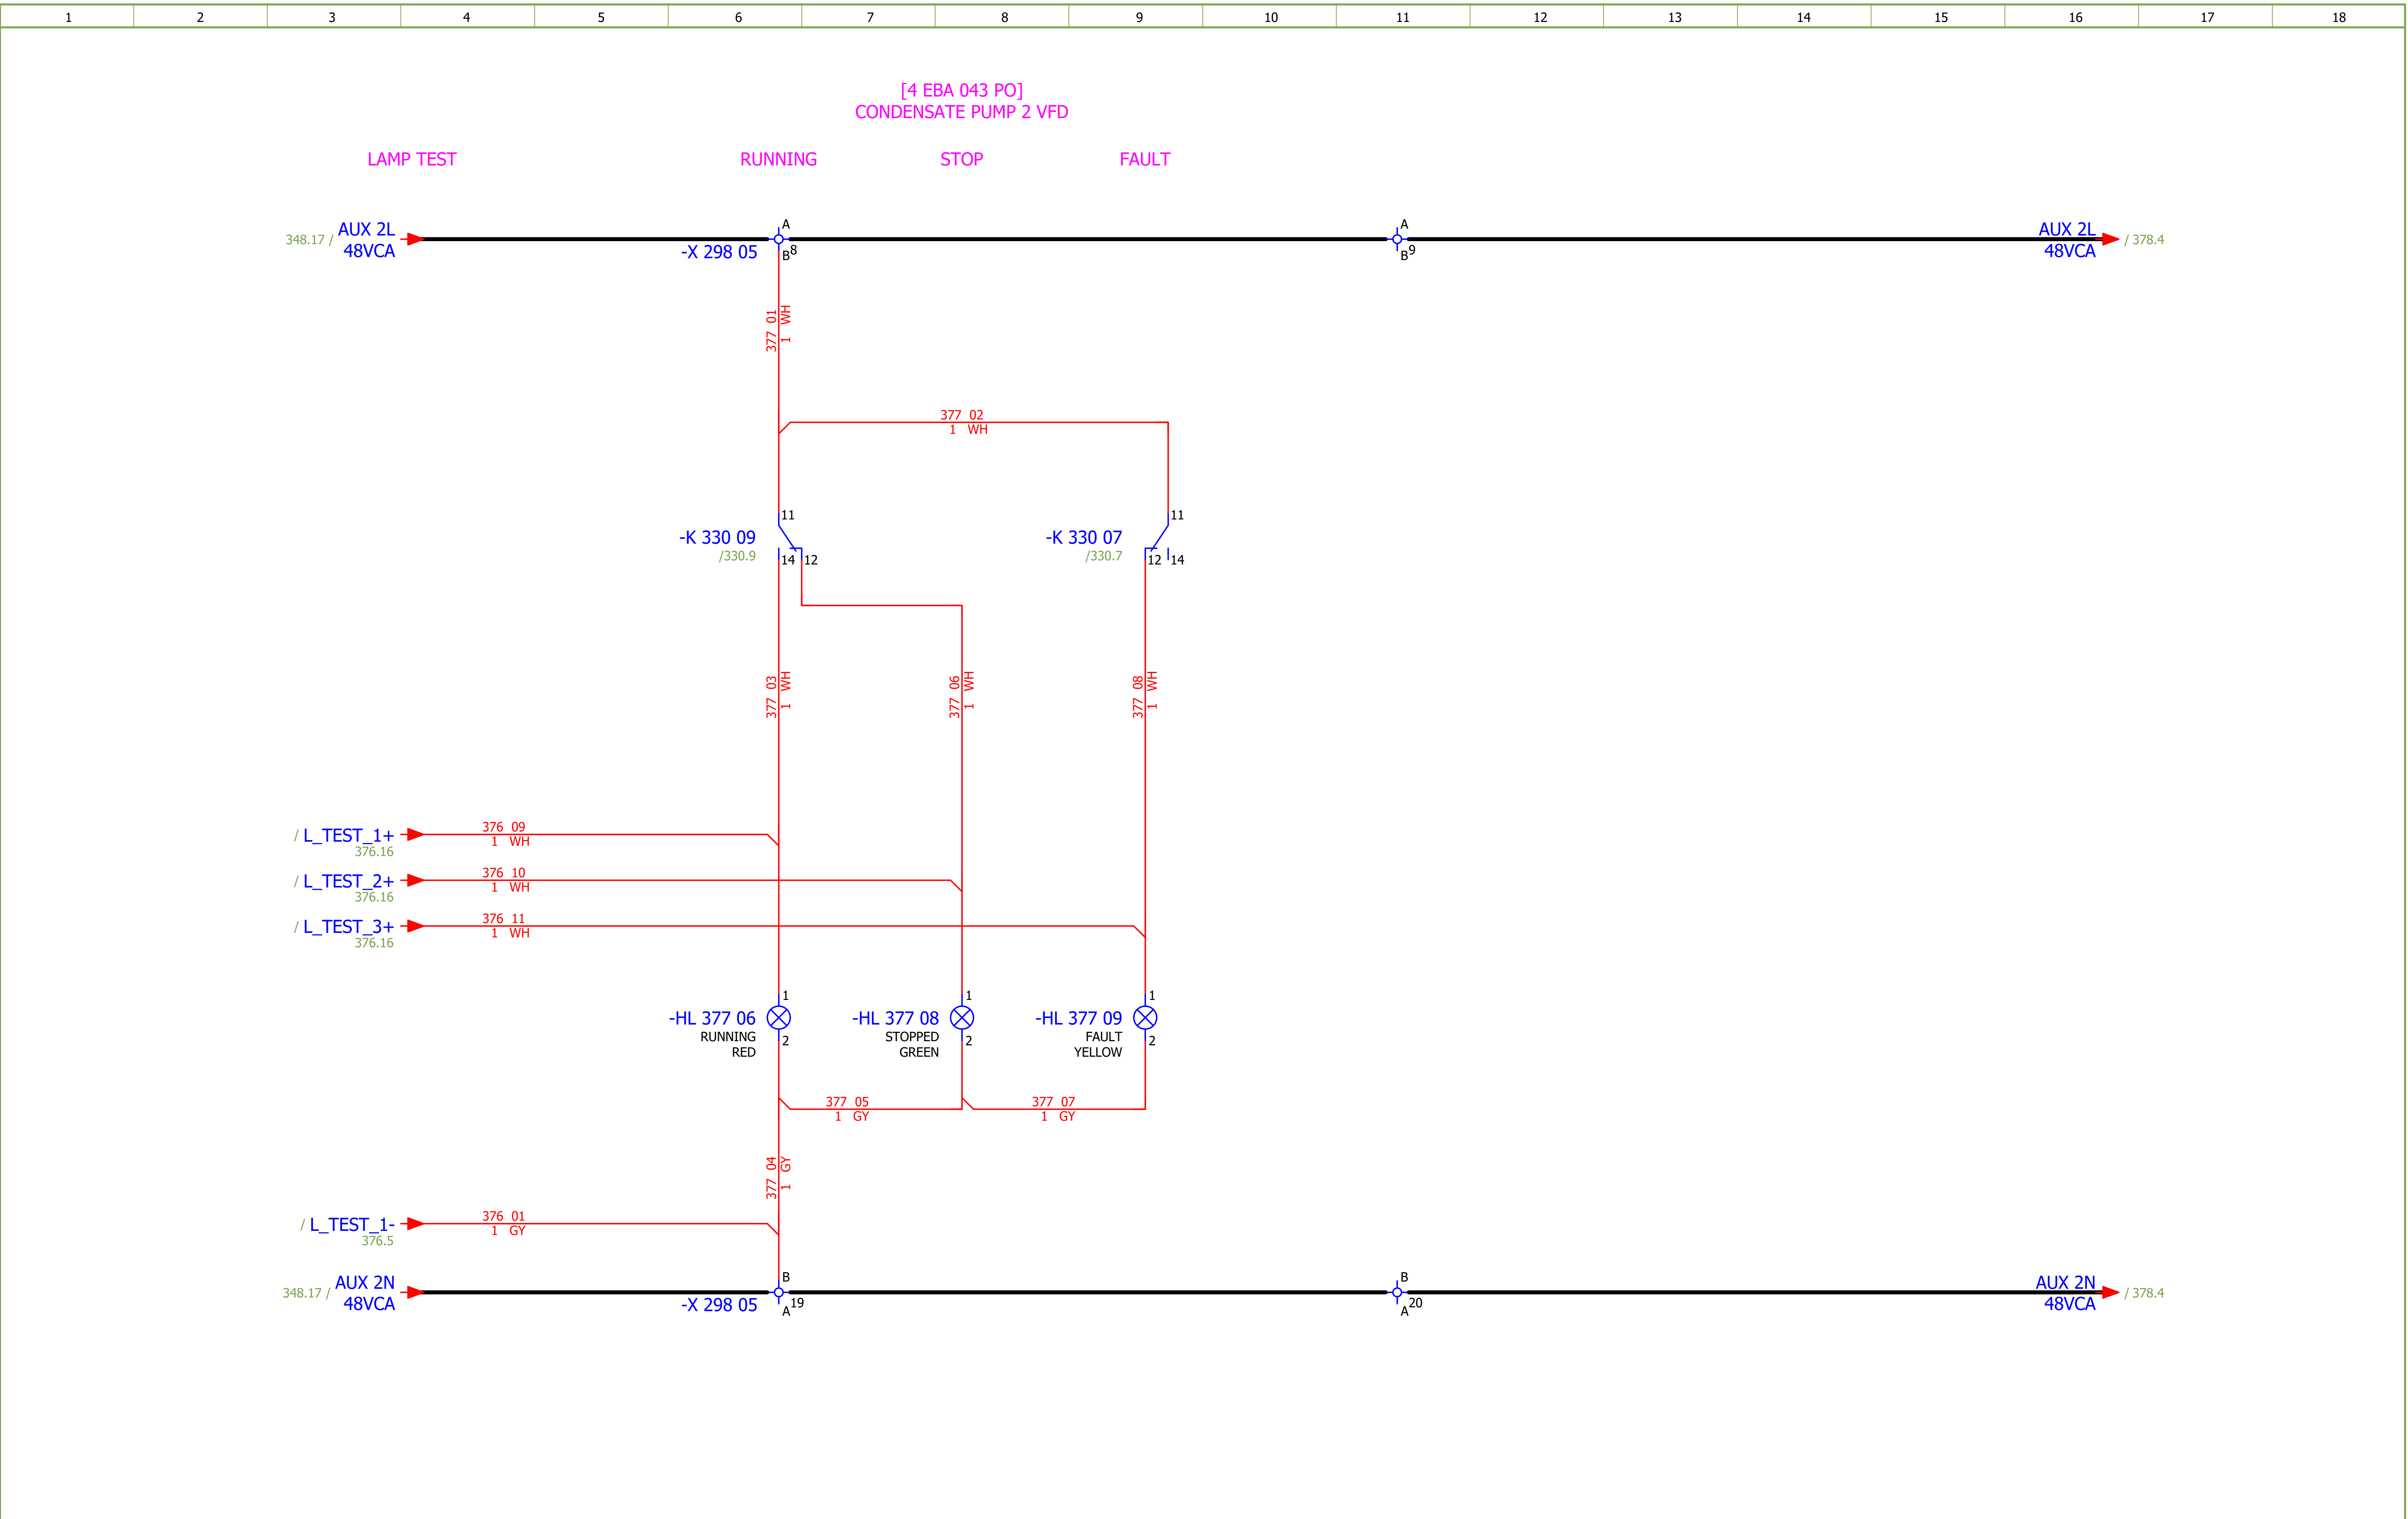

Date:	17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870
Drawn:	Jere Radas						Revision: F
Approved:	Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: CONDENSATE PUMP 2 - SIGNALIZATION LAMPS	Drawing designation: BRC-4-ATEP0-1870-F	=4LKF001AR	#QA / Sheet: 377
Format:	A3					+4LKF005AR	Next: 378

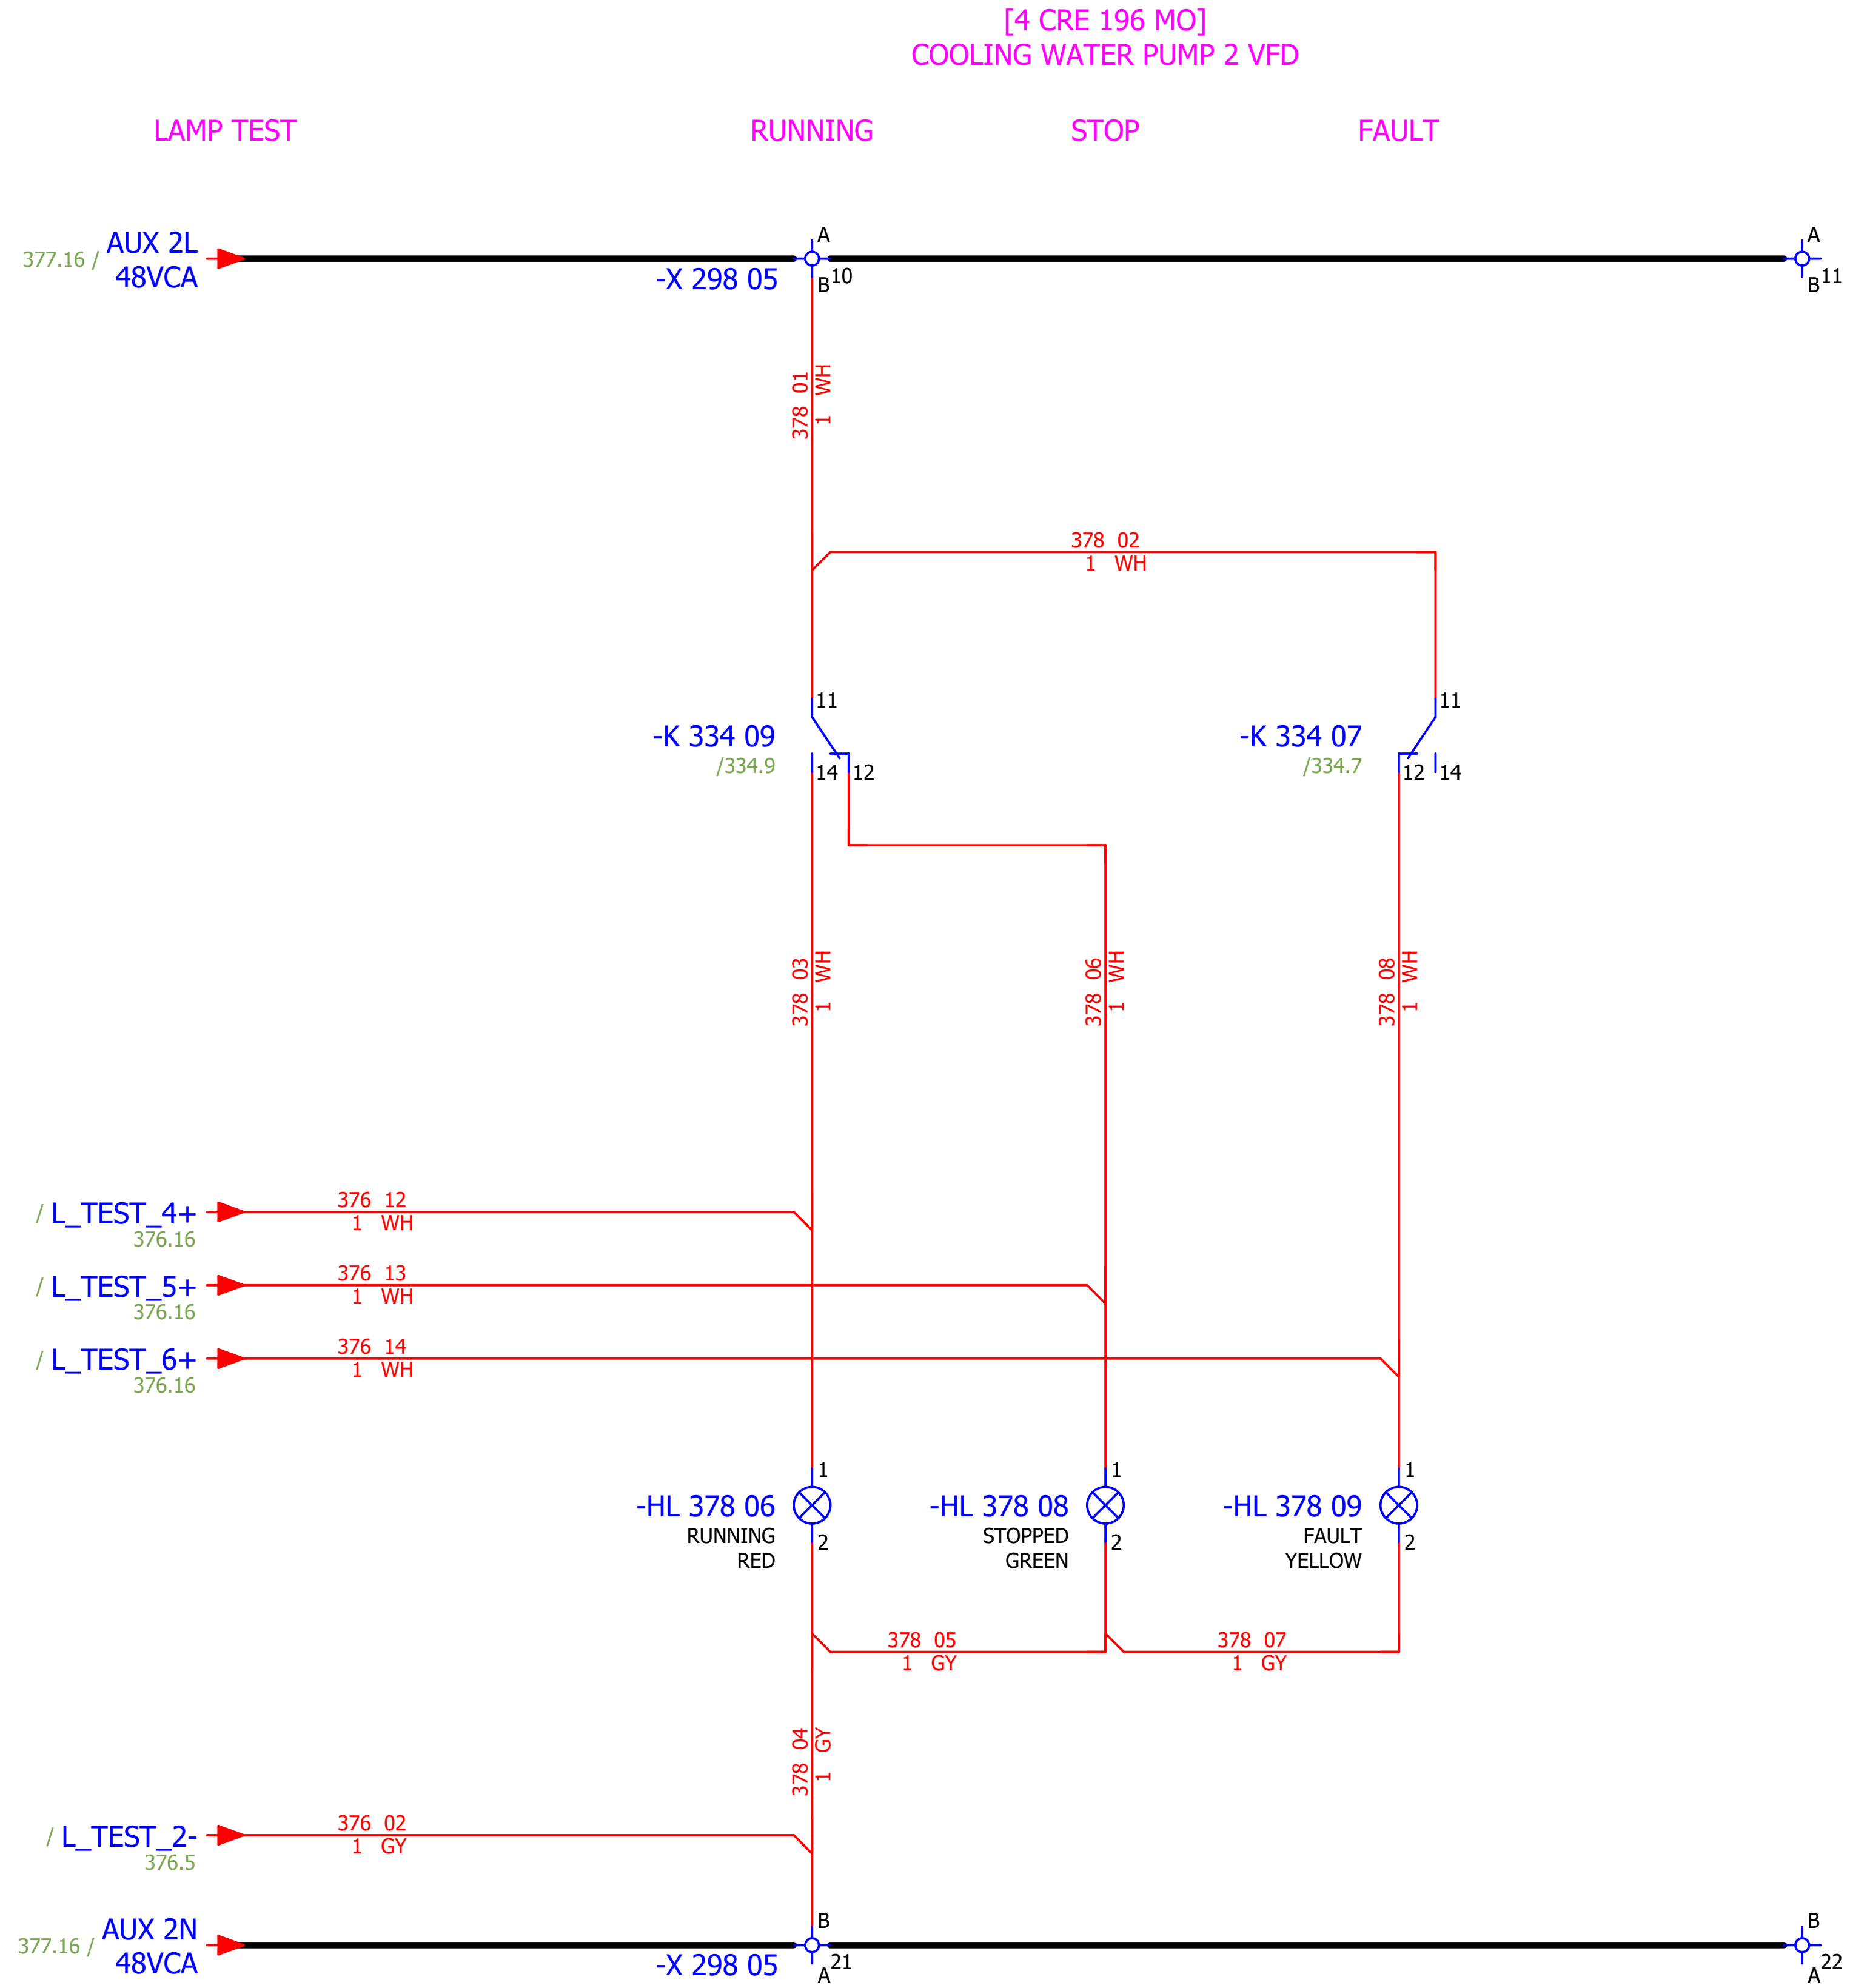

Date:	17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#QA
Drawn:	Jere Radas								
Approved:	Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 2 - SIGNALIZATION LAMPS	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 378
Format:	A3							+4LKF005AR	Next: 391

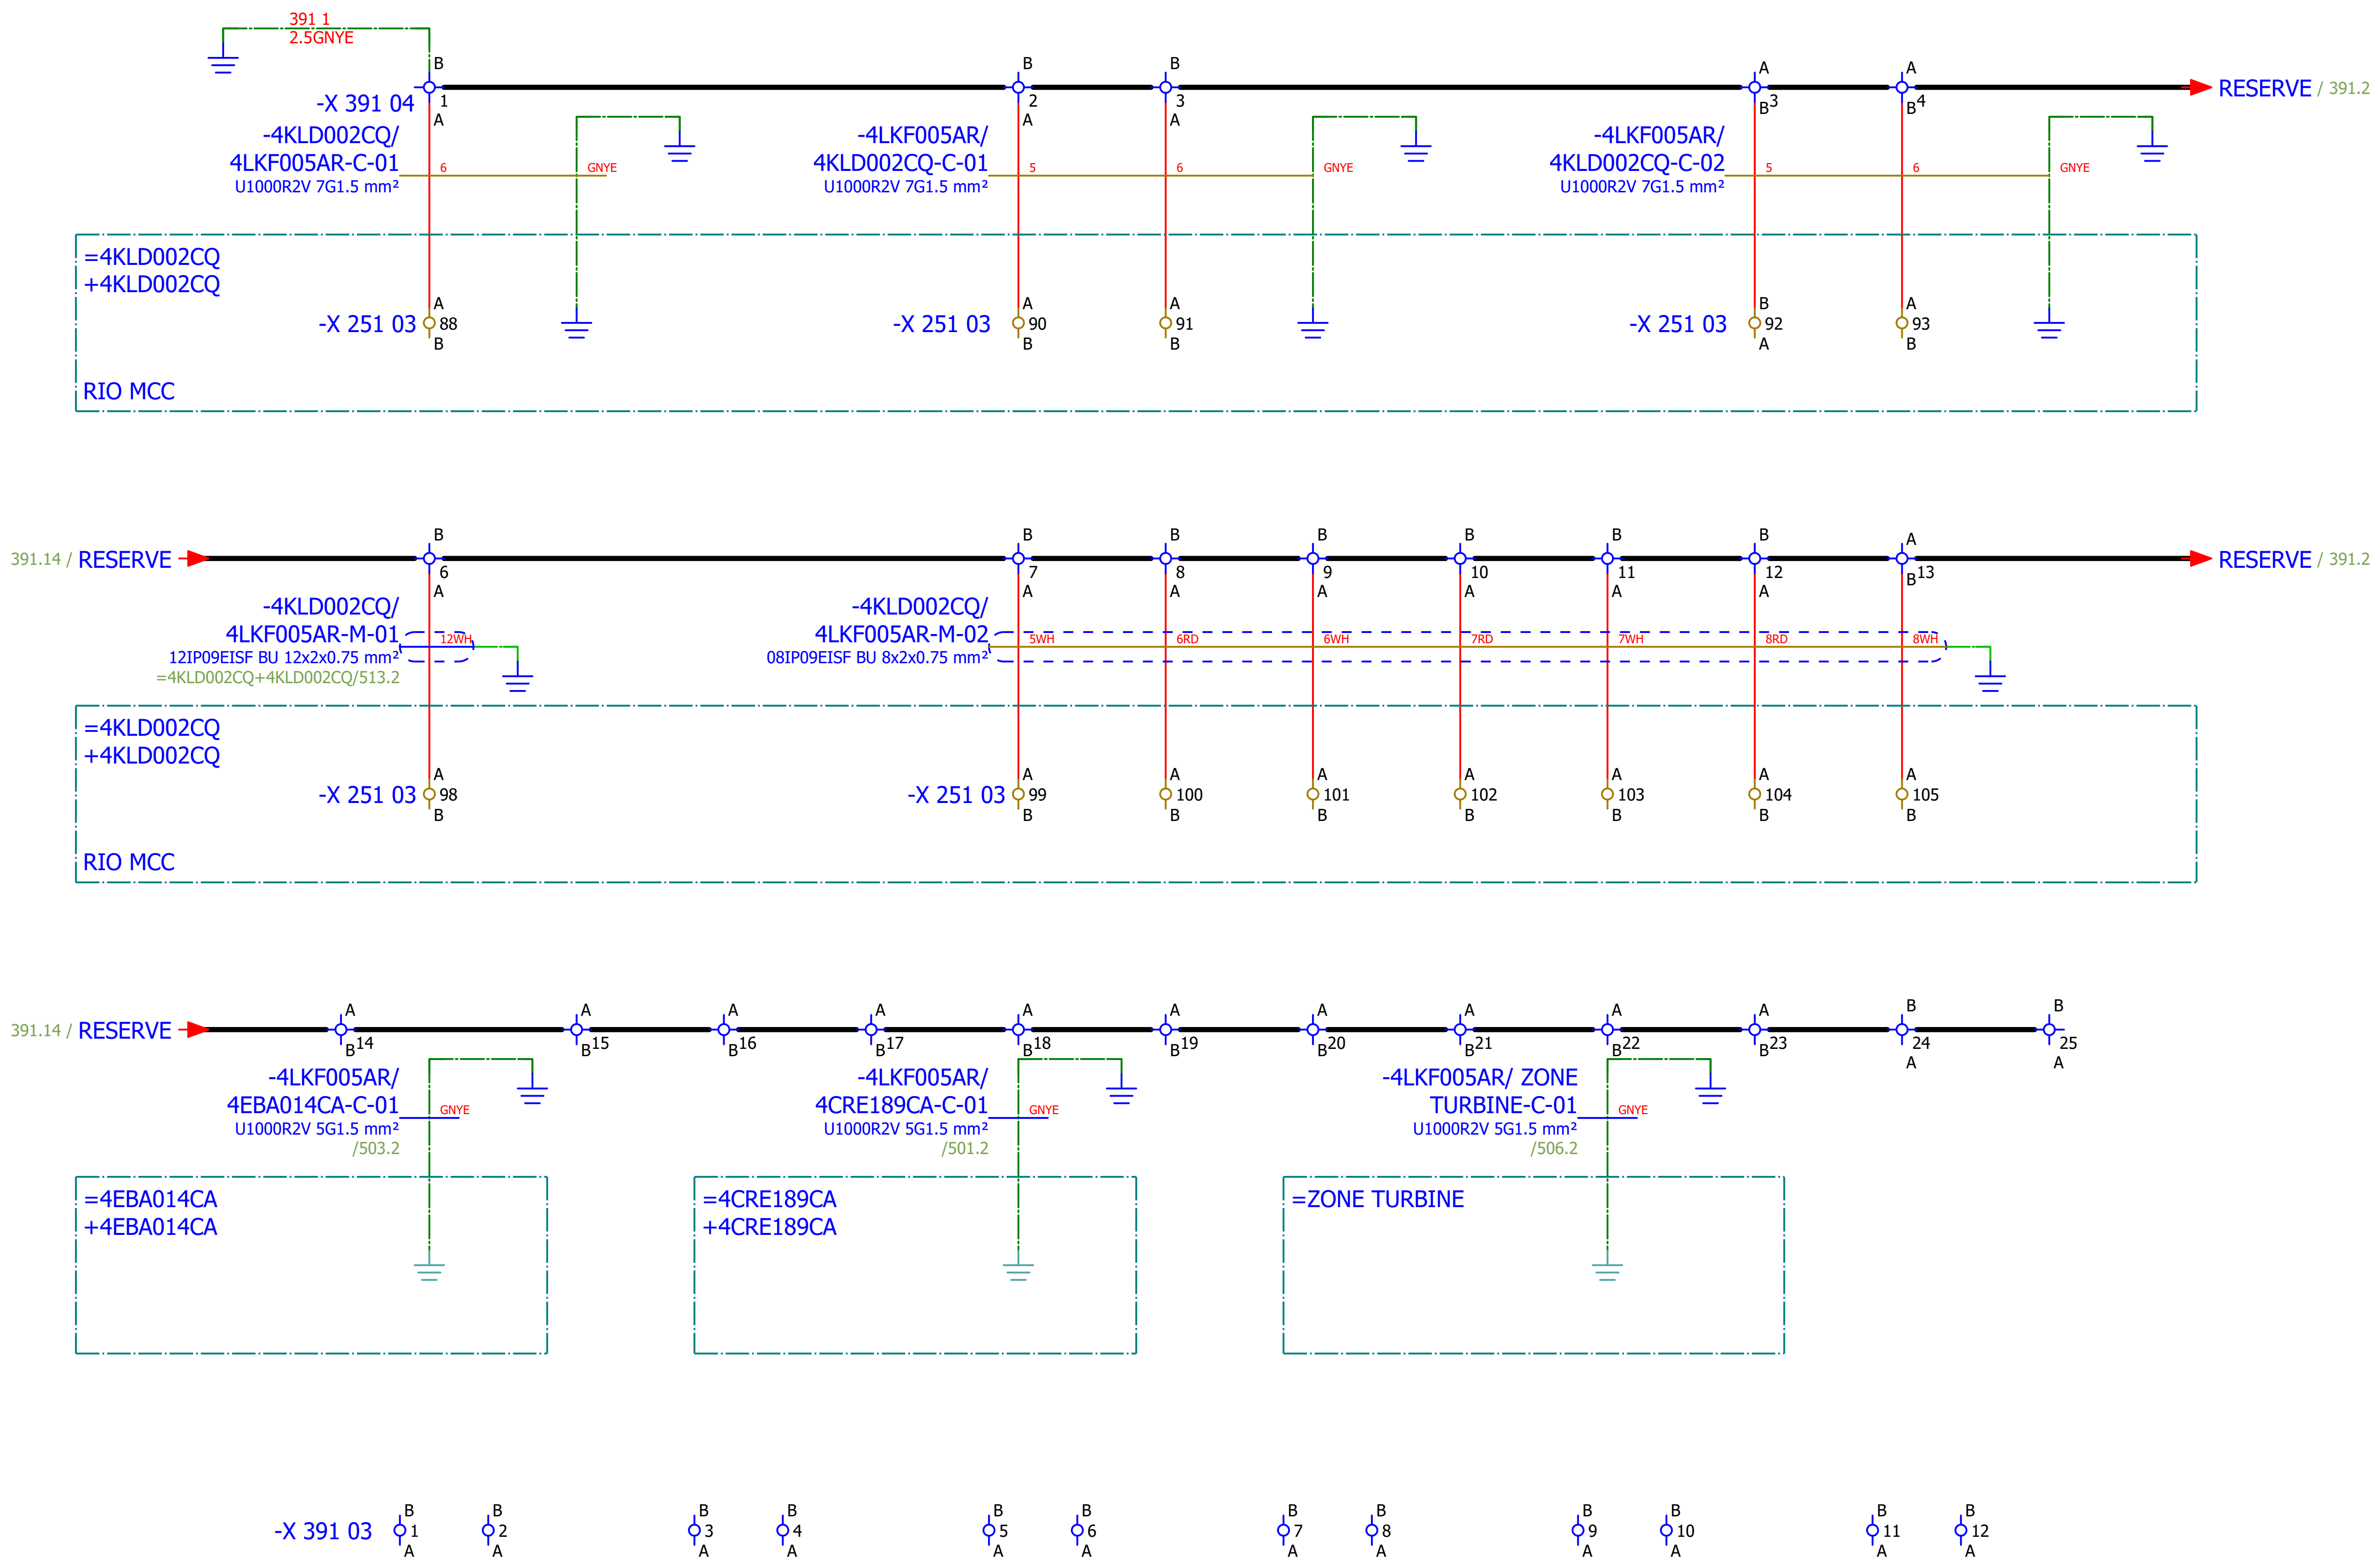

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	#QB
Drawn:	Jere Radas										
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	SPARE CONTACTS	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 391
Format:	A3									+4LKF005AR	Next: 392

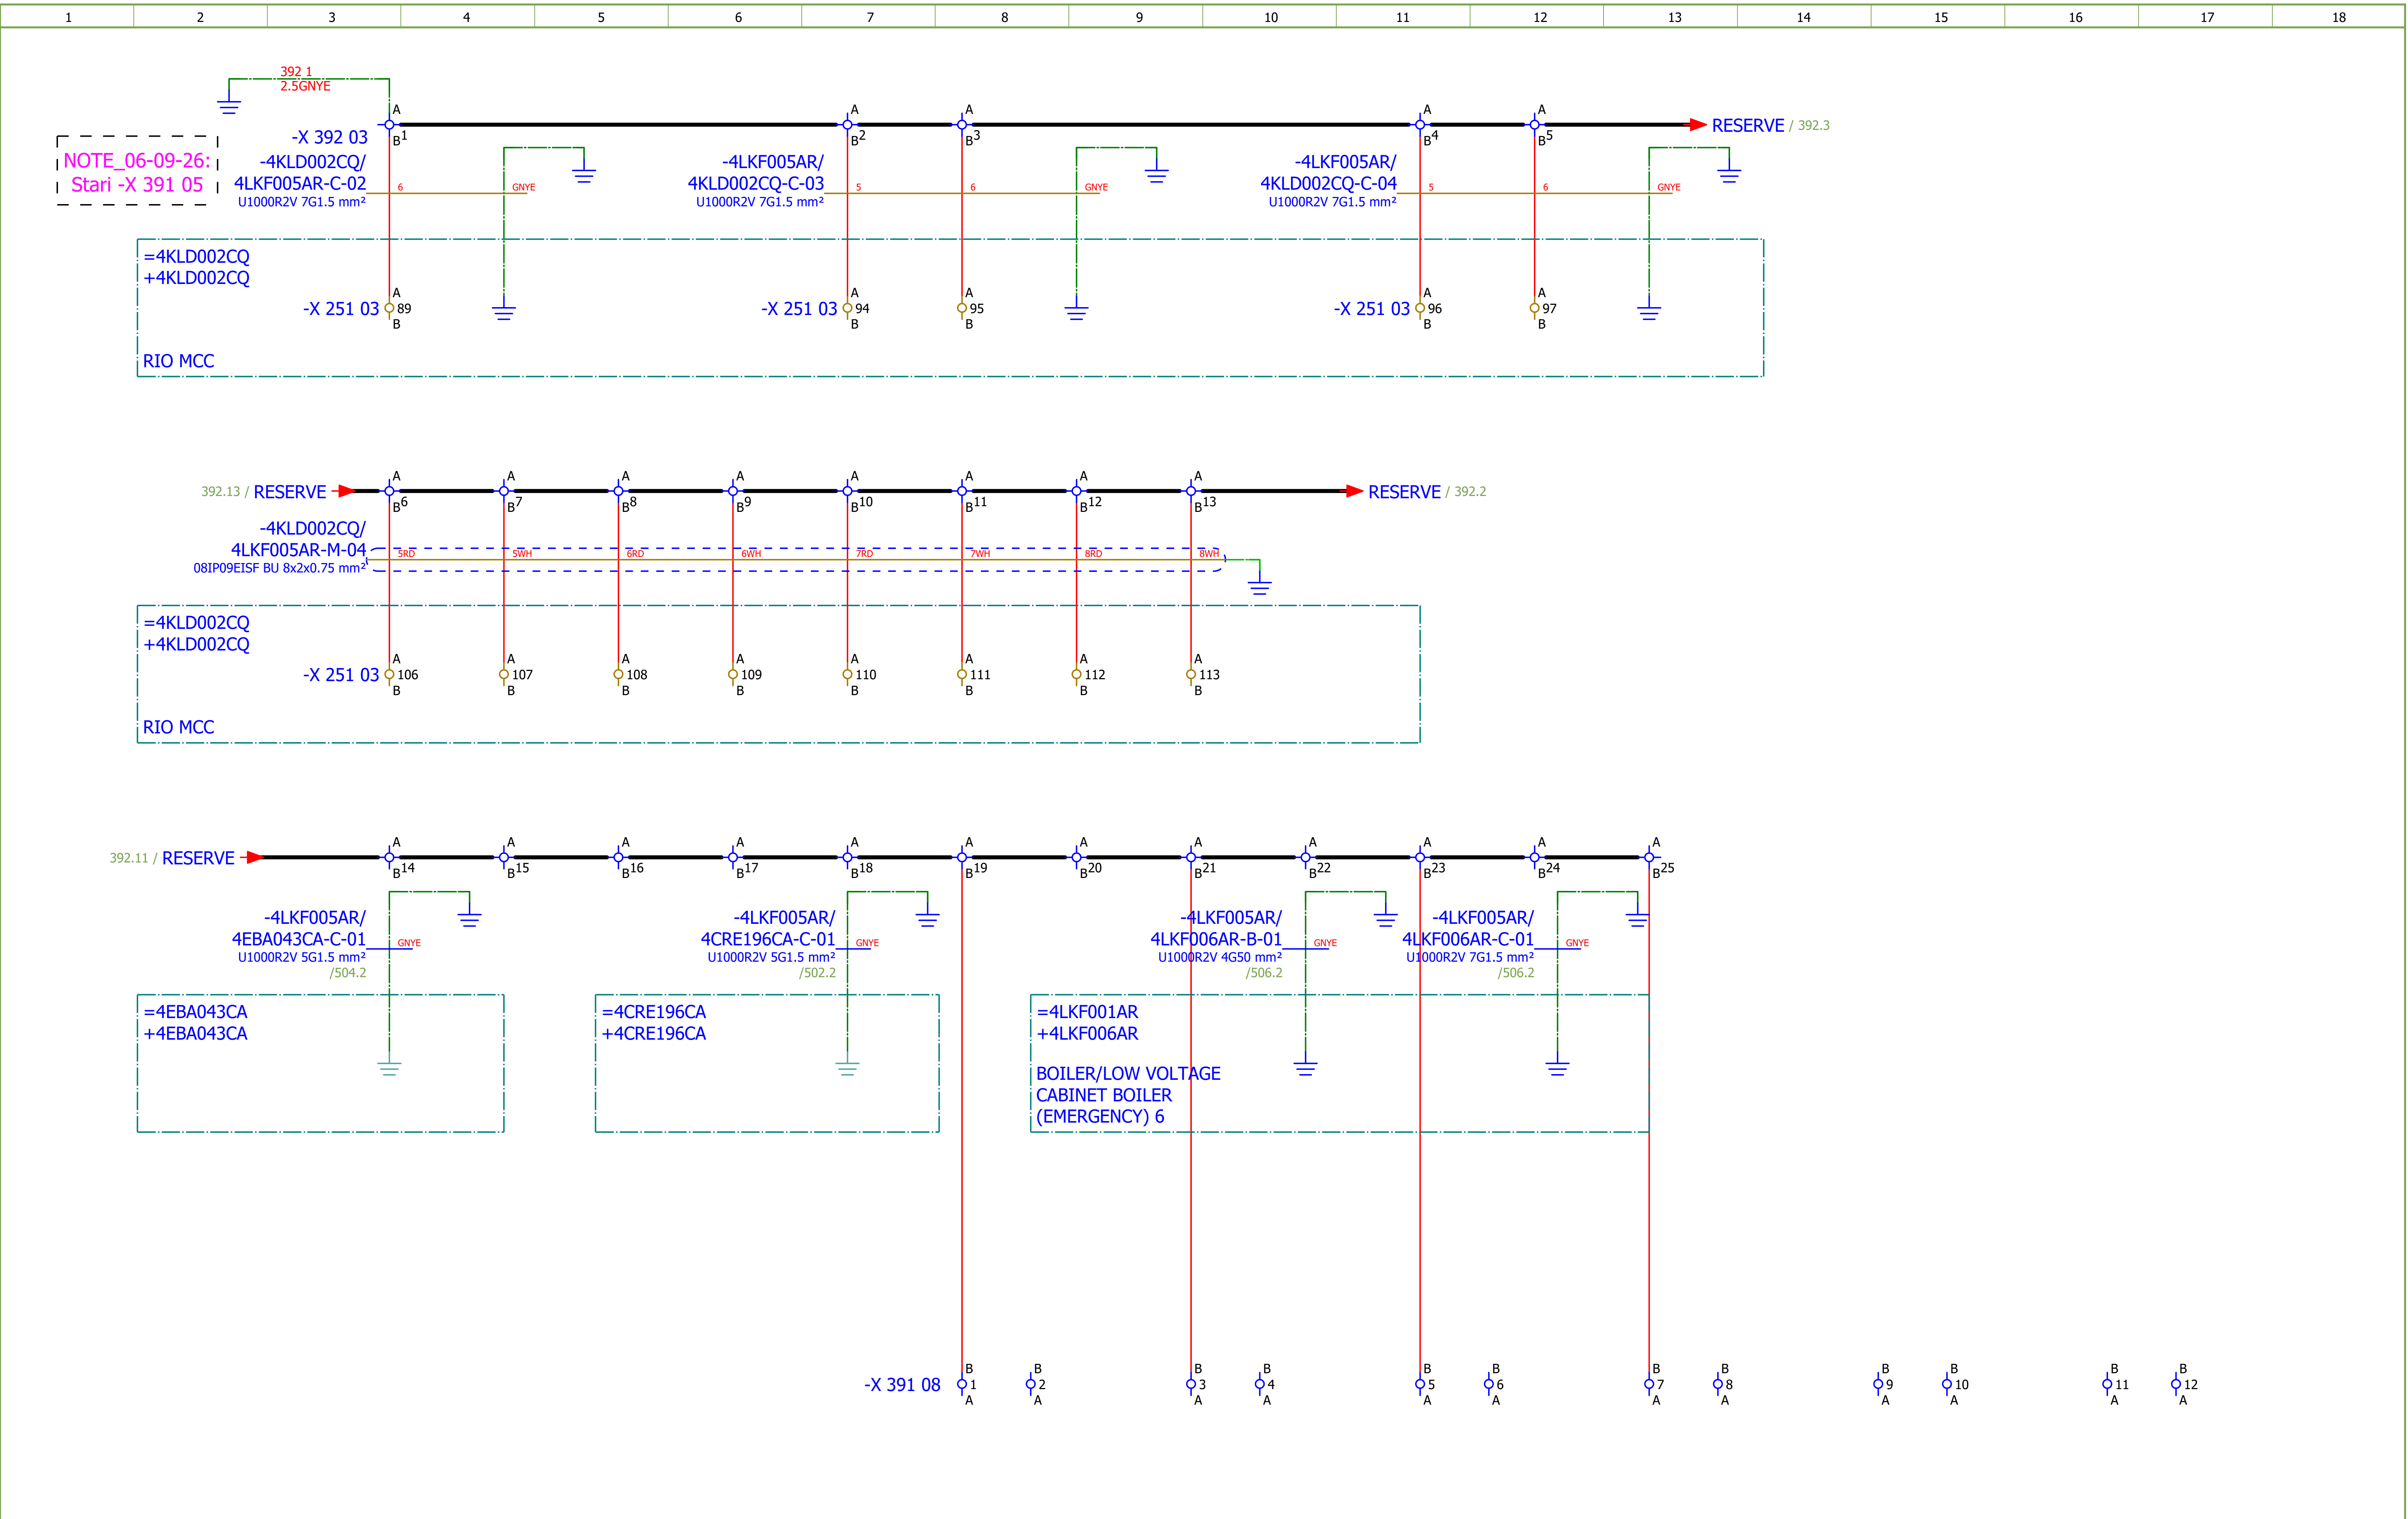

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F	
Drawn:	Jere Radas									#QB
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE CONTACTS	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 392
Format:	A3								+4LKF005AR	Next: 401

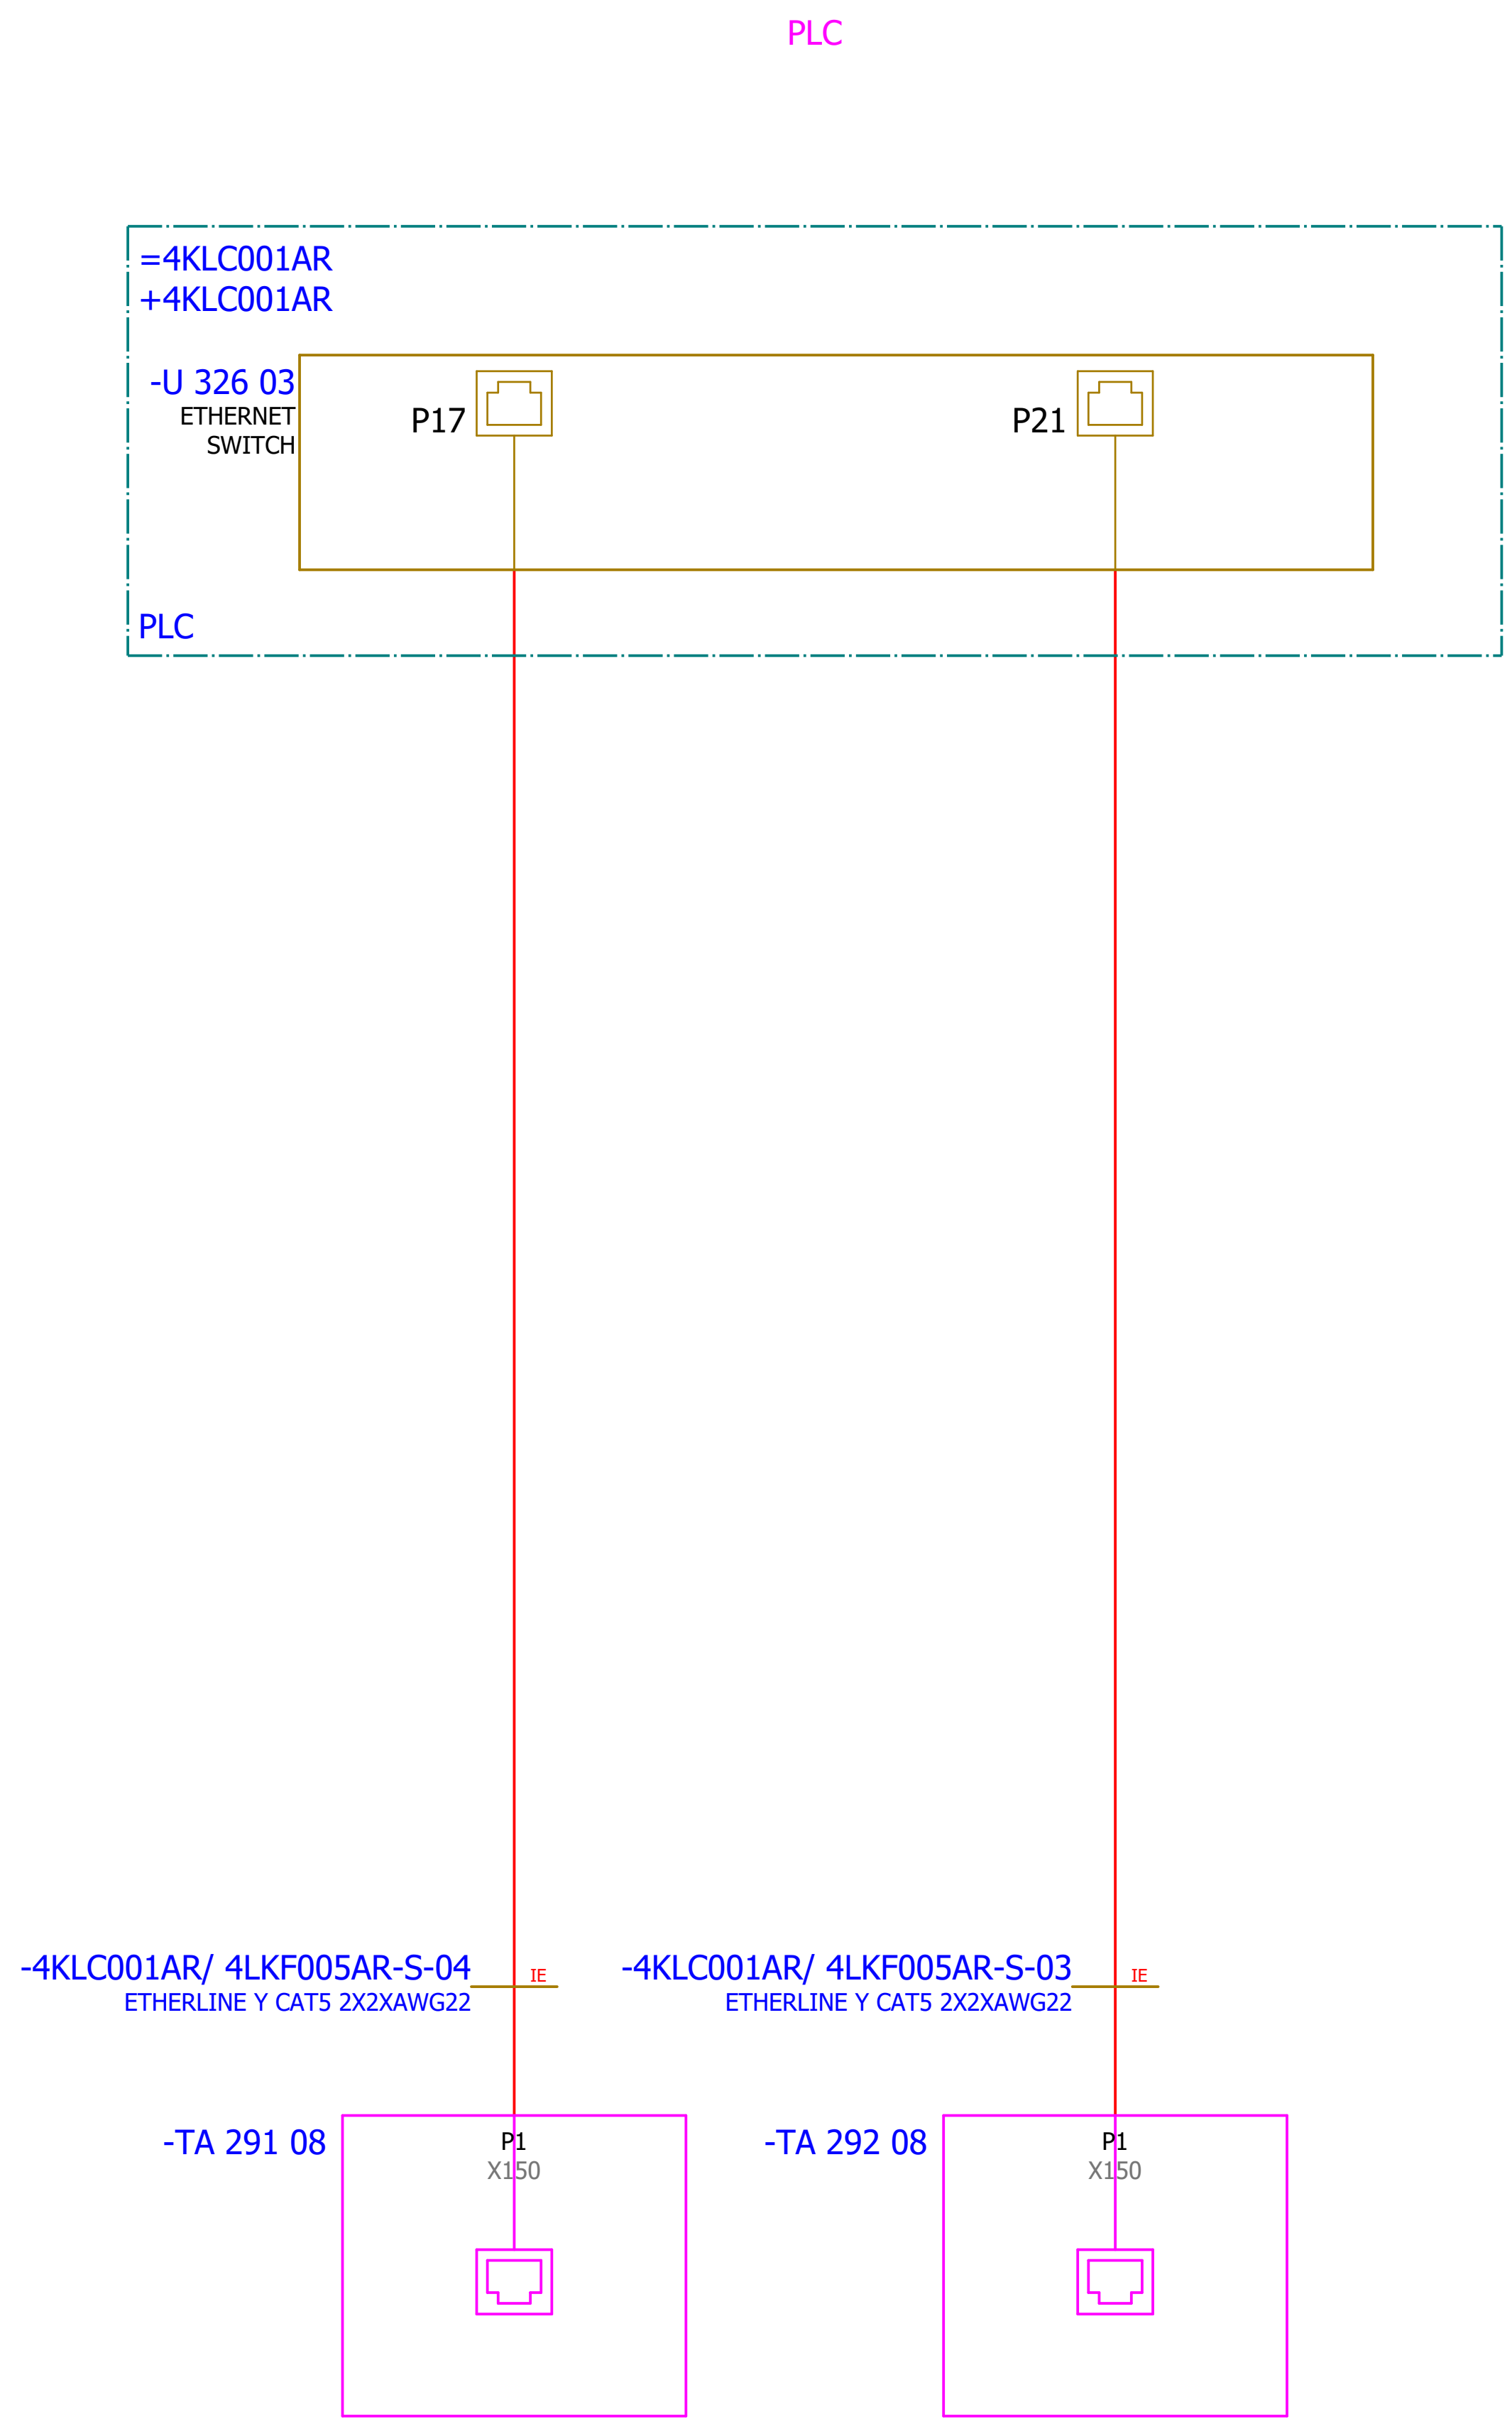
PLC
=4KLC001AR
+4KLC001AR
-U 326 03
ETHERNET
SWITCH
P17
P21
PLC
-4KLC001AR/ 4LKF005AR-S-04
ETHERLINE Y CAT5 2X2XAWG22
IE
-4KLC001AR/ 4LKF005AR-S-03
ETHERLINE Y CAT5 2X2XAWG22
IE
-TA 291 08
P1
X150
-TA 292 08
P1
X150

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

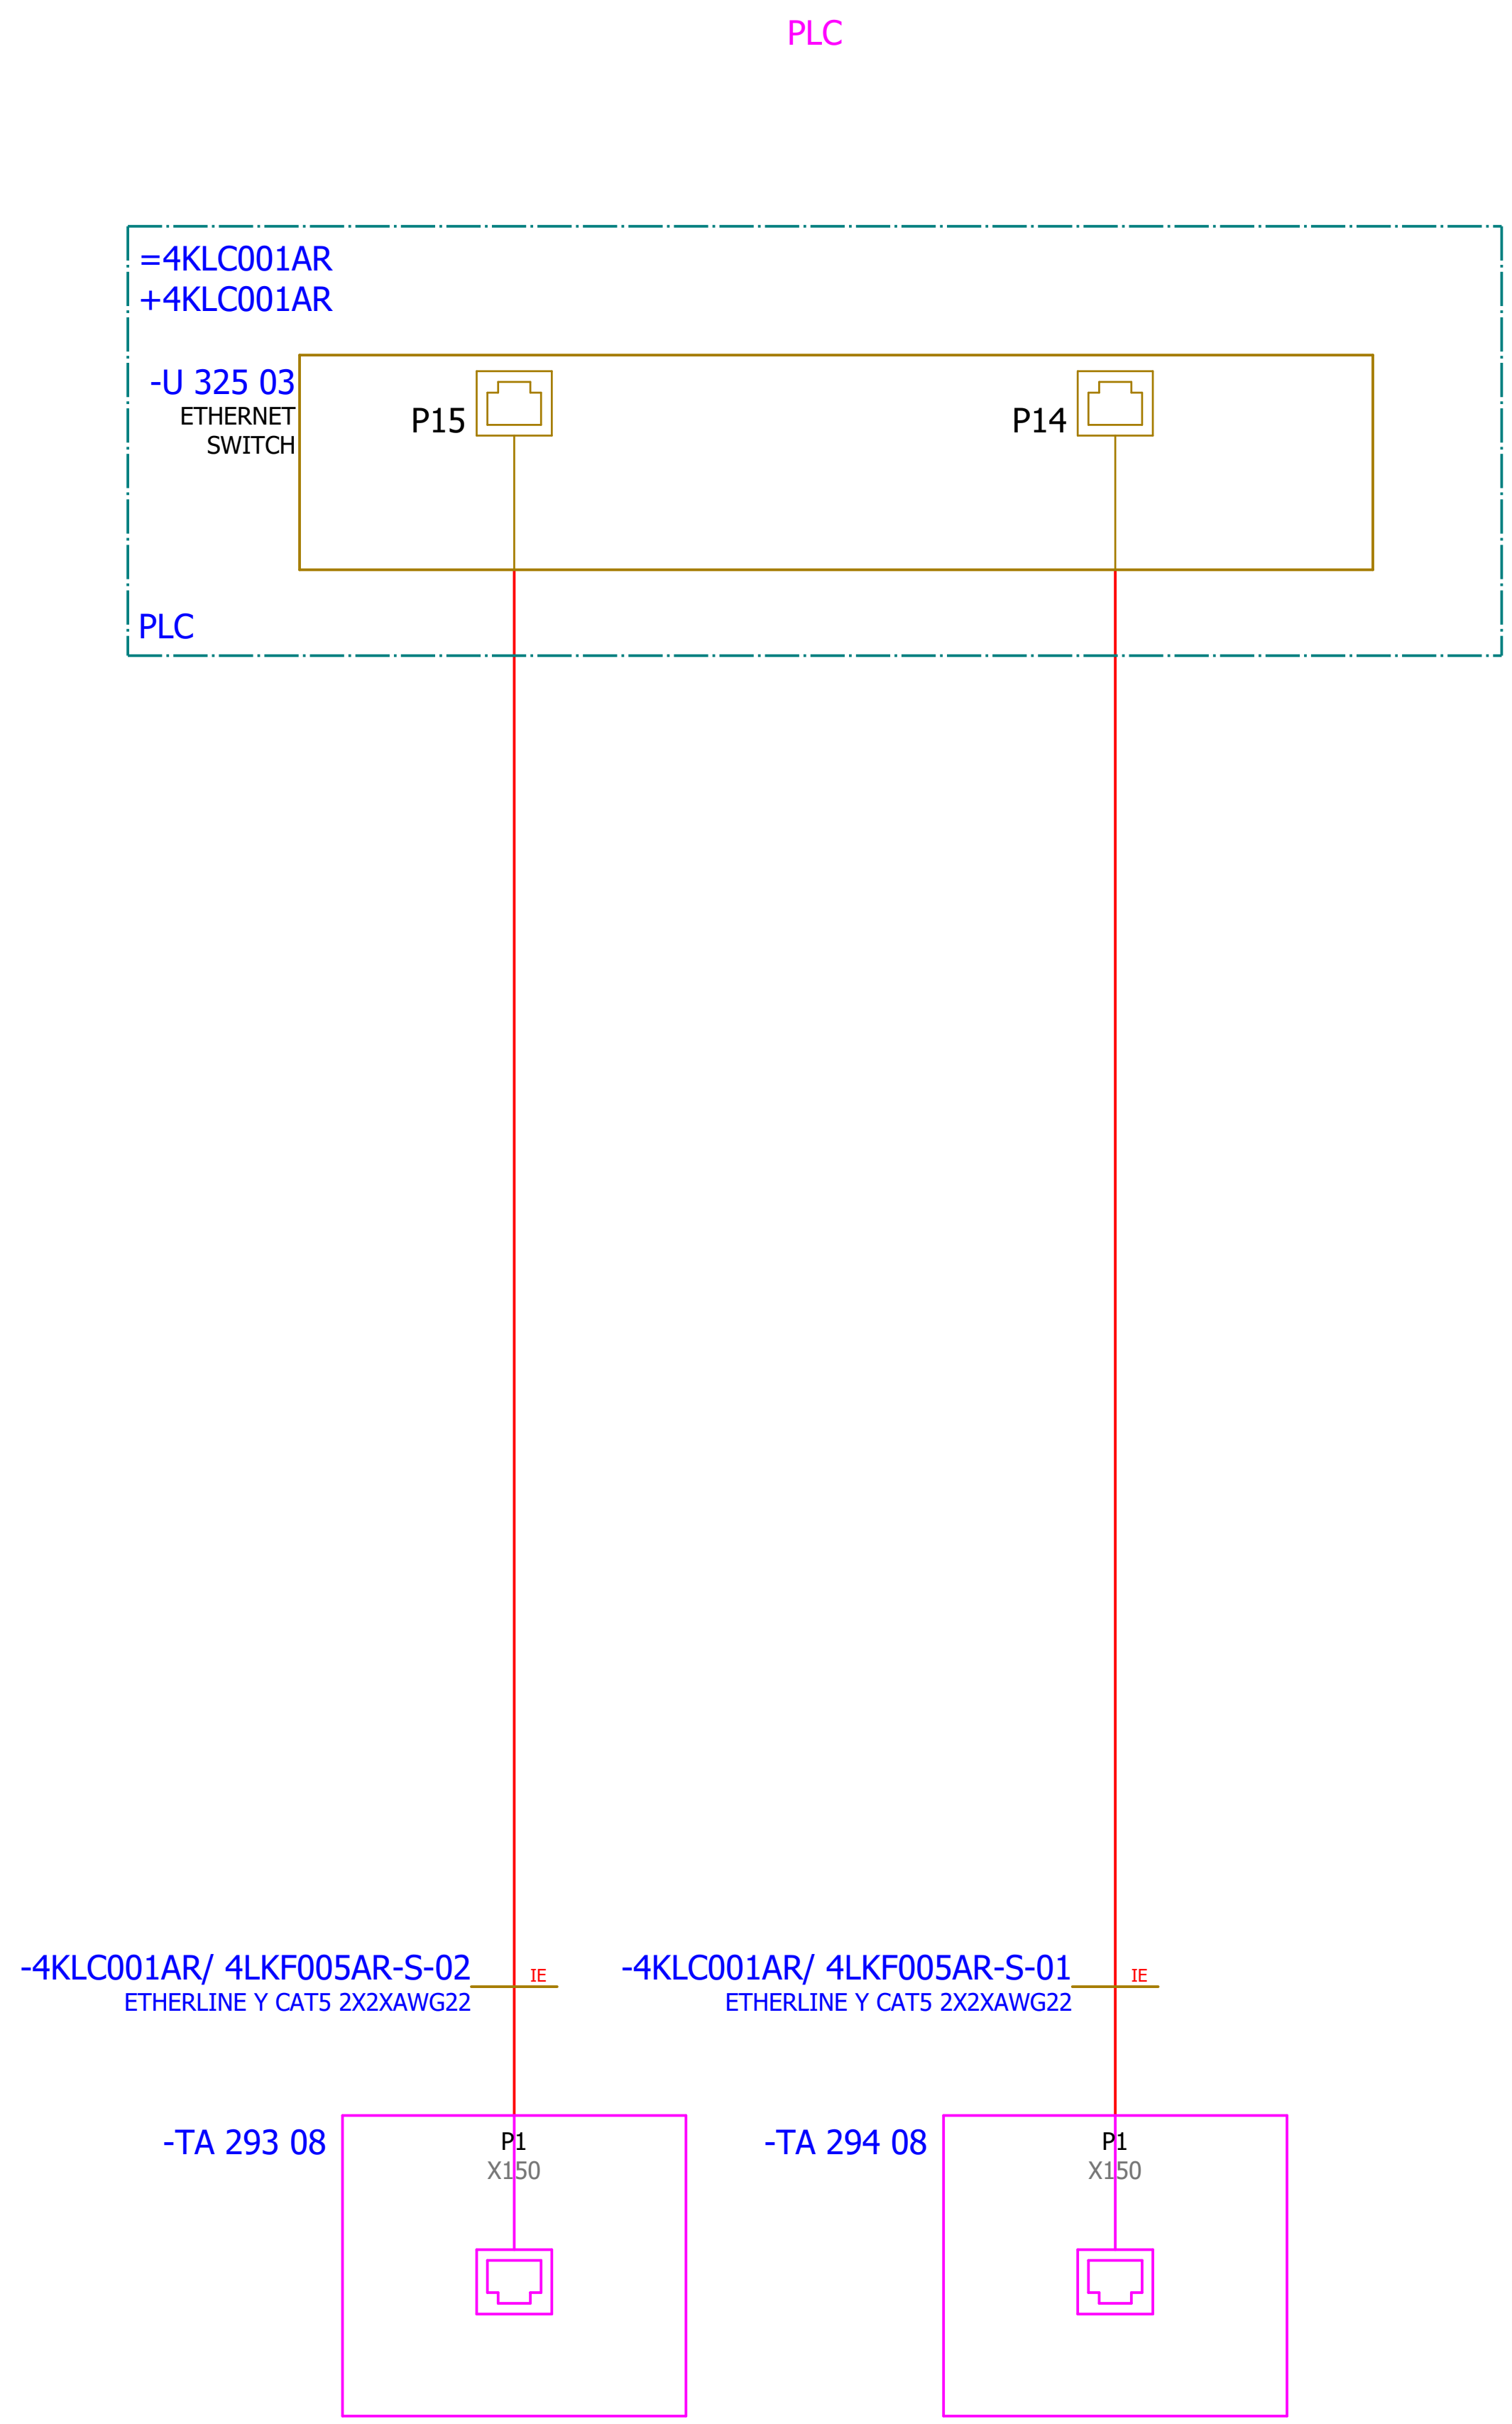

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 5	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: F
Drawn:	Jere Radas								#V
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: VFD GROUP 2 - COMMUNICATION	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 402
Format:	A3							+4LKF005AR	Next: 403

Sorting number	Part number	Quantity	Manufacturer	Device	Device description	Device designation
1.	SE.ZB4BVBG1	12	Schneider Electric	white light block with body/fixing collar integral LED 24...120VAC/DC		-HL 373 06;-HL 373 08;-HL 373 09;-HL 374 06;-HL 374 08;-HL 374 09;-HL 377 06;-HL 377 08;-HL 377 09;-HL 378 06;-HL 378 08;-HL 378 09
2.	SE.ZB4BV043	4	Schneider Electric	Red pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Red	-HL 373 06;-HL 374 06;-HL 377 06;-HL 378 06
3.	SE.ZB4BV033	4	Schneider Electric	Green pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Green	-HL 373 08;-HL 374 08;-HL 377 08;-HL 378 08
4.	SE.ZB4BV053	4	Schneider Electric	Orange pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Orange	-HL 373 09;-HL 374 09;-HL 377 09;-HL 378 09
5.	SE.A9S60220	2	Schneider Electric	Control switch iSW, 2P, 20A	Acti 9 iSW 2P 20 A at 415 V AC 50/60 Hz	-IG 311 05;-IG 312 05
6.	SE.A9A15096	4	Schneider Electric	Auxiliary contact iOF, iSW, 3A	Auxiliary contact iOF, iSW, 3A	-IG 311 05;-IG 312 05
7.	SE.RXM4AB2P7	8	Schneider Electric	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED	-K 322 07;-K 322 09;-K 326 07;-K 326 09;-K 330 07;-K 330 09;-K 334 07;-K 334 09
8.	SE.RXZE2S114M	12	Schneider Electric	Socket	For RXM2/RXM4 relays Screw connectors Separate contact 4 C/O	-K 322 07;-K 322 09;-K 326 07;-K 326 09;-K 330 07;-K 330 09;-K 334 07;-K 334 09;-K 342 05;-K 344 05;-K 346 05;-K 348 05
9.	SE.RXM041FU7	8	Schneider Electric	Protection module	RC circuit - 110..240 V AC - for RPZ/RXZ sockets	-K 322 07;-K 322 09;-K 326 07;-K 326 09;-K 330 07;-K 330 09;-K 334 07;-K 334 09
10.	SE.RXZR335	12	Schneider Electric	Maintaining clamp	For RXZ socket Plastic	-K 322 07;-K 322 09;-K 326 07;-K 326 09;-K 330 07;-K 330 09;-K 334 07;-K 334 09;-K 342 05;-K 344 05;-K 346 05;-K 348 05
11.	SE.RXM4AB2E7	4	Schneider Electric	Miniature Plug-in relay - Zelio RXM 4 C/O 48 V AC 6 A with LED	Miniature Plug-in relay - Zelio RXM 4 C/O 48 V AC 6 A with LED	-K 342 05;-K 344 05;-K 346 05;-K 348 05
12.	SE.RXM041BN7	4	Schneider Electric	Protection diode	RC circuit - 24..60 V AC - for RPZ/RXZ sockets	-K 342 05;-K 344 05;-K 346 05;-K 348 05
13.	SE.A9F74202	5	Schneider Electric	2-pole MCB, 2A/C	Nominal current: 2 A Tripping curve: C	-Q 295 05;-Q 296 05;-Q 297 05;-Q 298 05;-Q 365 04
14.	SE.A9A26904	8	Schneider Electric	Auxiliary contact iOF, iC60	100mA-6A, 24VAC-415VAC, 24-130 VDC	-Q 295 05;-Q 296 05;-Q 297 05;-Q 298 05
15.	SE.A9A26924	1	Schneider Electric	Auxiliary contact iOF, iC60	Auxiliary contact, Acti9, iOF, 1 OC, AC/DC	-Q 365 04
16.	SE.C10F3TM100	4	Schneider Electric	Circuit breaker ComPacT NSX100F, 36kA	Circuit breaker ComPacT NSX100F, 36kA at 415VAC, TMD trip unit 100A, 3 poles 3d	-QB 291 09;-QB 292 09;-QB 293 09;-QB 294 09
17.	SE.29450	8	Schneider Electric	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV	-QB 291 09;-QB 292 09;-QB 293 09;-QB 294 09
18.	SE.LV429337T	4	Schneider Electric	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40	-QB 291 09;-QB 292 09;-QB 293 09;-QB 294 09
19.	SE.LVS04033	4	Schneider Electric	LINERGY DP	LINERGY DP 3P D.BLK/COMPACT 250A 27HOLES	-QB 291 09;-QB 292 09;-QB 293 09;-QB 294 09
20.	SE.LV429517	4	Schneider Electric	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250	-QB 291 09;-QB 292 09;-QB 293 09;-QB 294 09
21.	PXC.2954882	2	Phoenix Contact	Diode block	Diode module, with eight diodes, common anode, diode type 1N 5408	-R 372 05;-R 376 05
22.	PXC.2954879	2	Phoenix Contact	Component for protective circuit	Diode module, with eight diodes, common cathode, diode type 1N 5408	-R 372 10;-R 376 10

Sorting number	Part number	Quantity	Manufacturer	Device	Device description	Device designation
23.	SE.XPSBAC34AP	5	Schneider Electric	Safety module	Harmony Safety Automation Estop or guard ,Harmony XPS, connected to supply terminals 48-240 V AC/DC , no inputs, screw	-RP 341 11;-RP 343 11;-RP 345 11;-RP 347 11;-RP 365 04
24.	SE.XB4BD33	4	Schneider Electric	Selector switch, BLACK, 1-0-2, 2NO	Metal Black Ø22 3 positions 2 NO	-S 321 09;-S 325 09;-S 329 09;-S 333 09
25.	SE.ZBE101	16	Schneider Electric	Single contact block NO	Harmony XB4 Silver alloy 1 NO	-S 321 09;-S 325 09;-S 329 09;-S 333 09
26.	PXC.3209510	289	Phoenix Contact	PT 2,5 - Feed-through terminal block	Feed-through terminal block, nom. voltage: 800 V, nominal current: 24 A, number of connections: 2, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm2, cross section: 0.14 mm2 - 4 mm2, mounting type: NS 35/7,5, NS 35/15, color: gray	-X 295 05;-X 296 05;-X 297 05;-X 298 05;-X 311 05;-X 312 05;-X 321 04;-X 323 05;-X 325 04;-X 327 05;-X 329 04;-X 331 05;-X 333 04;-X 335 05;-X 337 08;-X 338 08;-X 365 04;-X 371 04;-X 375 04;-X 391 03...-X 391 05;-X 391 08;-X 392 03;-XB 372 03;-XB 376 03

Cable name: **4LCA002CR/ 4LKF005AR-C-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **3G2.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
EMERG. MCC 5 VFD GROUP 1 24 VDC CONTROL VOLTAGE	=4LKF001AR+4LKF005AR/311.5	=4LKF001AR+4LKF005AR-X 311 05	1:A	**BN**	=4LCA002CR+4LCA002CR-X 021 08	1:A	=4LCA002CR+4LCA002CR/21.8	EMERG. MCC 5 VFD GROUP 1 24 VDC CONTROL VOLTAGE
24 VDC AUXILIARY POWER SUPPLY	=4LKF001AR+4LKF005AR/311.5	=4LKF001AR+4LKF005AR-X 311 05	6:A	**BU**	=4LCA002CR+4LCA002CR-X 021 08	3:A	=4LCA002CR+4LCA002CR/21.8	=
	=4LKF001AR+4LKF005AR/311.6	=4LKF001AR+4LKF005AR-PE		**GNYE**	=4LCA002CR+4LCA002CR-PE		=4LKF001AR+4LKF005AR/311.6	

Cable name: **4LCA002CR/ 4LKF005AR-C-02**

Cable type: **U1000R2V** No. of conn., diameter, length: **3G2.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
EMERG. MCC 5 VFD GROUP 2 24 VDC CONTROL VOLTAGE	=4LKF001AR+4LKF005AR/312.5	=4LKF001AR+4LKF005AR-X 312 05	1:A	**BN**	=4LCA002CR+4LCA002CR-X 021 10	1:A	=4LCA002CR+4LCA002CR/21.10	EMERG. MCC 5 VFD GROUP 2 24 VDC CONTROL VOLTAGE
24 VDC AUXILIARY POWER SUPPLY	=4LKF001AR+4LKF005AR/312.5	=4LKF001AR+4LKF005AR-X 312 05	6:A	**BU**	=4LCA002CR+4LCA002CR-X 021 10	3:A	=4LCA002CR+4LCA002CR/21.10	=
	=4LKF001AR+4LKF005AR/312.6	=4LKF001AR+4LKF005AR-PE		**GNYE**	=4LCA002CR+4LCA002CR-PE		=4LKF001AR+4LKF005AR/312.6	

Cable name: **4LKF005AR/ 4CRE189CA-C-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF005AR/343.5	=4LKF001AR+4LKF005AR-X 296 05	5:A	**BN**	=4CRE189CA+4CRE189CA-X?	?:B	=4LKF001AR+4LKF005AR/343.5	
	=4LKF001AR+4LKF005AR/343.5	=4LKF001AR+4LKF005AR-X 296 05	29:A	**BK**	=4CRE189CA+4CRE189CA-X?	?:A	=4LKF001AR+4LKF005AR/343.5	
	=4LKF001AR+4LKF005AR/344.8	=4LKF001AR+4LKF005AR-X 296 05	32:A	**GY**	=4CRE189CA+4CRE189CA-X?	?:A	=4LKF001AR+4LKF005AR/344.8	
	=4LKF001AR+4LKF005AR/344.8	=4LKF001AR+4LKF005AR-X 296 05	33:A	**BU**	=4CRE189CA+4CRE189CA-X?	?:B	=4LKF001AR+4LKF005AR/344.8	
	=4LKF001AR+4LKF005AR/391.8	=4LKF001AR+4LKF005AR-PE		**GNYE**	=4CRE189CA+4CRE189CA-PE		=4LKF001AR+4LKF005AR/391.7	

Cable name: **4LKF005AR/ 4CRE189MO-B-01**

Cable type: **2XSLCYK-JB EMV-UV** No. of conn., diameter, length: **3x25+3x4 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF005AR/292.9	=4LKF001AR+4LKF005AR-TA 292 08	U2	**BN**	=4CRE189MO+4CRE189MO-M1	U1	=4LKF001AR+4LKF005AR/292.9	COOLING WATER PUMP 1
MAIN POWER SUPPLY	=4LKF001AR+4LKF005AR/292.9	=4LKF001AR+4LKF005AR-TA 292 08	V2	**BK**	=4CRE189MO+4CRE189MO-M1	V1	=4LKF001AR+4LKF005AR/292.9	=
	=4LKF001AR+4LKF005AR/292.9	=4LKF001AR+4LKF005AR-TA 292 08	W2	**GY**	=4CRE189MO+4CRE189MO-M1	W1	=4LKF001AR+4LKF005AR/292.9	=
				GNYE				
				GNYE				
				GNYE				
MAIN POWER SUPPLY	=4LKF001AR+4LKF005AR/292.9			**SH**	=4CRE189MO+4CRE189MO-M1	PE	=4LKF001AR+4LKF005AR/292.9	COOLING WATER PUMP 1

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Cable name: **4LKF005AR/ 4CRE189MO-M-01**

Cable type: **08IP09EISF BU** No. of conn., diameter, length: **8x2x0.88 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF005AR/327.9		1R1:A	**1RD**	=4LKF001AR+4LKF005AR-X 327 05	3:A	=4LKF001AR+4LKF005AR/327.9	
4 CRE 189 MO COOLING WATER PUMP 1 VFD	=4LKF001AR+4LKF005AR/327.10		1R2:A	**1WH**	=4LKF001AR+4LKF005AR-X 327 05	4:A	=4LKF001AR+4LKF005AR/327.10	4 CRE 189 MO COOLING WATER PUMP 1 VFD
=	=4LKF001AR+4LKF005AR/327.11		2R1:A	**2RD**	=4LKF001AR+4LKF005AR-X 327 05	5:A	=4LKF001AR+4LKF005AR/327.11	=
=	=4LKF001AR+4LKF005AR/327.12		2R2:A	**2WH**	=4LKF001AR+4LKF005AR-X 327 05	6:A	=4LKF001AR+4LKF005AR/327.12	=
=	=4LKF001AR+4LKF005AR/327.13		3R1:A	**3RD**	=4LKF001AR+4LKF005AR-X 327 05	7:A	=4LKF001AR+4LKF005AR/327.13	=
=	=4LKF001AR+4LKF005AR/327.14		3R2:A	**3WH**	=4LKF001AR+4LKF005AR-X 327 05	8:A	=4LKF001AR+4LKF005AR/327.14	=
	=4LKF001AR+4LKF005AR/328.3	=4LKF001AR+4LKF005AR-X 327 05	9:A	**4RD**	=4CRE189MO+4CRE189MO-X	4:A	=4LKF001AR+4LKF005AR/328.3	
	=4LKF001AR+4LKF005AR/328.4	=4LKF001AR+4LKF005AR-X 327 05	10:A	**4WH**	=4CRE189MO+4CRE189MO-X	6:A	=4LKF001AR+4LKF005AR/328.4	
	=4LKF001AR+4LKF005AR/328.4	=4LKF001AR+4LKF005AR-X 327 05	11:A	**5RD**	=4CRE189MO+4CRE189MO-X	5:A	=4LKF001AR+4LKF005AR/328.4	
	=4LKF001AR+4LKF005AR/328.7	=4LKF001AR+4LKF005AR-X 327 05	13:A	**5WH**	=4CRE189MO+4CRE189MO-X	4:A	=4LKF001AR+4LKF005AR/328.7	
	=4LKF001AR+4LKF005AR/328.7	=4LKF001AR+4LKF005AR-X 327 05	14:A	**6RD**	=4CRE189MO+4CRE189MO-X	6:A	=4LKF001AR+4LKF005AR/328.7	
	=4LKF001AR+4LKF005AR/328.8	=4LKF001AR+4LKF005AR-X 327 05	15:A	**6WH**	=4CRE189MO+4CRE189MO-X	5:A	=4LKF001AR+4LKF005AR/328.8	
4 CRE 189 MO COOLING WATER PUMP 1 VFD	=4LKF001AR+4LKF005AR/328.11	=4LKF001AR+4LKF005AR-X 327 05	17:A	**7RD**	=4CRE189MO+4CRE189MO-BV?	1+	=4LKF001AR+4LKF005AR/328.11	
=	=4LKF001AR+4LKF005AR/328.11	=4LKF001AR+4LKF005AR-X 327 05	18:A	**7WH**	=4CRE189MO+4CRE189MO-BV?	2-	=4LKF001AR+4LKF005AR/328.11	
4 EBA 043 PO CONDENSATE PUMP 2 VFD	=4LKF001AR+4LKF005AR/328.15	=4LKF001AR+4LKF005AR-X 327 05	19:A	**8RD**	=4CRE189MO+4CRE189MO-BV?	1+	=4LKF001AR+4LKF005AR/328.15	4 EBA 043 PO CONDENSATE PUMP 2 VFD
=	=4LKF001AR+4LKF005AR/328.15	=4LKF001AR+4LKF005AR-X 327 05	20:A	**8WH**	=4CRE189MO+4CRE189MO-BV?	2-	=4LKF001AR+4LKF005AR/328.15	

Cable name: **4LKF005AR/ 4CRE196CA-C-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF005AR/347.5	=4LKF001AR+4LKF005AR-X 298 05	5:A	**BN**	=4CRE196CA+4CRE196CA-X?	?:B	=4LKF001AR+4LKF005AR/347.5	
	=4LKF001AR+4LKF005AR/347.5	=4LKF001AR+4LKF005AR-X 298 05	29:A	**BK**	=4CRE196CA+4CRE196CA-X?	?:A	=4LKF001AR+4LKF005AR/347.5	
	=4LKF001AR+4LKF005AR/348.8	=4LKF001AR+4LKF005AR-X 298 05	34:A	**GY**	=4CRE196CA+4CRE196CA-X?	?:B	=4LKF001AR+4LKF005AR/348.8	
	=4LKF001AR+4LKF005AR/348.8	=4LKF001AR+4LKF005AR-X 298 05	33:A	**BU**	=4CRE196CA+4CRE196CA-X?	?:A	=4LKF001AR+4LKF005AR/348.8	
	=4LKF001AR+4LKF005AR/392.7	=4LKF001AR+4LKF005AR-PE		**GNYE**	=4CRE196CA+4CRE196CA-PE		=4LKF001AR+4LKF005AR/392.7	

Cable name: **4LKF005AR/ 4CRE196MO-B-01**

Cable type: **2XSLCYK-JB EMV-UV** No. of conn., diameter, length: **3x25+3x4 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
				BN				
				BK				
				GY				
				GNYE				
				GNYE				
				GNYE				
MAIN POWER SUPPLY	=4LKF001AR+4LKF005AR/294.9	=4LKF001AR+4LKF005AR-TA 294 08	V2	**BK**	=4CRE196MO+4CRE196MO-M1	V1	=4LKF001AR+4LKF005AR/294.9	COOLING WATER PUMP 2
	=4LKF001AR+4LKF005AR/294.9	=4LKF001AR+4LKF005AR-TA 294 08	U2	**BN**	=4CRE196MO+4CRE196MO-M1	U1	=4LKF001AR+4LKF005AR/294.9	=

Cable name: **4LKF005AR/ 4CRE196MO-B-01**

Cable type: **2XSLCYK-JB EMV-UV** No. of conn., diameter, length: **3x25+3x4 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF005AR/294.9	=4LKF001AR+4LKF005AR-TA 294 08	W2	**GY**	=4CRE196MO+4CRE196MO-M1	W1	=4LKF001AR+4LKF005AR/294.9	COOLING WATER PUMP 2
MAIN POWER SUPPLY	=4LKF001AR+4LKF005AR/294.9			**SH**	=4CRE196MO+4CRE196MO-M1	PE	=4LKF001AR+4LKF005AR/294.9	=

Cable name: **4LKF005AR/ 4CRE196MO-M-01**

Cable type: **08IP09EISF BU** No. of conn., diameter, length: **8x2x0.88 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF005AR/335.9		1R1:A	**1RD**	=4LKF001AR+4LKF005AR-X 335 05	3:A	=4LKF001AR+4LKF005AR/335.9	
[4 CRE 196 MO] COOLING WATER PUMP 2 VFD	=4LKF001AR+4LKF005AR/335.10		1R2:A	**1WH**	=4LKF001AR+4LKF005AR-X 335 05	4:A	=4LKF001AR+4LKF005AR/335.10	[4 CRE 196 MO] COOLING WATER PUMP 2 VFD
=	=4LKF001AR+4LKF005AR/335.11		2R1:A	**2RD**	=4LKF001AR+4LKF005AR-X 335 05	5:A	=4LKF001AR+4LKF005AR/335.11	=
=	=4LKF001AR+4LKF005AR/335.12		2R2:A	**2WH**	=4LKF001AR+4LKF005AR-X 335 05	6:A	=4LKF001AR+4LKF005AR/335.12	=
=	=4LKF001AR+4LKF005AR/335.13		3R1:A	**3RD**	=4LKF001AR+4LKF005AR-X 335 05	7:A	=4LKF001AR+4LKF005AR/335.13	=
=	=4LKF001AR+4LKF005AR/335.14		3R2:A	**3WH**	=4LKF001AR+4LKF005AR-X 335 05	8:A	=4LKF001AR+4LKF005AR/335.14	=
	=4LKF001AR+4LKF005AR/336.3	=4LKF001AR+4LKF005AR-X 335 05	9:A	**4RD**	=4CRE196MO+4CRE196MO-X	4:A	=4LKF001AR+4LKF005AR/336.3	
	=4LKF001AR+4LKF005AR/336.4	=4LKF001AR+4LKF005AR-X 335 05	10:A	**4WH**	=4CRE196MO+4CRE196MO-X	6:A	=4LKF001AR+4LKF005AR/336.4	
	=4LKF001AR+4LKF005AR/336.4	=4LKF001AR+4LKF005AR-X 335 05	11:A	**5RD**	=4CRE196MO+4CRE196MO-X	5:A	=4LKF001AR+4LKF005AR/336.4	
	=4LKF001AR+4LKF005AR/336.7	=4LKF001AR+4LKF005AR-X 335 05	13:A	**5WH**	=4CRE196MO+4CRE196MO-X	4:A	=4LKF001AR+4LKF005AR/336.7	
	=4LKF001AR+4LKF005AR/336.7	=4LKF001AR+4LKF005AR-X 335 05	14:A	**6RD**	=4CRE196MO+4CRE196MO-X	6:A	=4LKF001AR+4LKF005AR/336.7	
	=4LKF001AR+4LKF005AR/336.8	=4LKF001AR+4LKF005AR-X 335 05	15:A	**6WH**	=4CRE196MO+4CRE196MO-X	5:A	=4LKF001AR+4LKF005AR/336.8	
[4 CRE 196 MO] COOLING WATER PUMP 2 VFD	=4LKF001AR+4LKF005AR/336.11	=4LKF001AR+4LKF005AR-X 335 05	17:A	**7RD**	=4CRE196MO+4CRE196MO-BV?	1+	=4LKF001AR+4LKF005AR/336.11	
=	=4LKF001AR+4LKF005AR/336.11	=4LKF001AR+4LKF005AR-X 335 05	18:A	**7WH**	=4CRE196MO+4CRE196MO-BV?	2-	=4LKF001AR+4LKF005AR/336.11	
4 EBA 043 PO CONDENSATE PUMP 2 VFD	=4LKF001AR+4LKF005AR/336.15	=4LKF001AR+4LKF005AR-X 335 05	19:A	**8RD**	=4CRE196MO+4CRE196MO-BV?	1+	=4LKF001AR+4LKF005AR/336.15	4 EBA 043 PO CONDENSATE PUMP 2 VFD
=	=4LKF001AR+4LKF005AR/336.15	=4LKF001AR+4LKF005AR-X 335 05	20:A	**8WH**	=4CRE196MO+4CRE196MO-BV?	2-	=4LKF001AR+4LKF005AR/336.15	

Cable name: **4LKF005AR/ 4EBA014CA-C-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF005AR/341.5	=4LKF001AR+4LKF005AR-X 296 05	2:A	**BN**	=4EBA014CA+4EBA014CA-X?	?:B	=4LKF001AR+4LKF005AR/341.5	
	=4LKF001AR+4LKF005AR/341.5	=4LKF001AR+4LKF005AR-X 296 05	23:A	**BK**	=4EBA014CA+4EBA014CA-X?	?:A	=4LKF001AR+4LKF005AR/341.5	
	=4LKF001AR+4LKF005AR/342.8	=4LKF001AR+4LKF005AR-X 296 05	26:A	**GY**	=4EBA014CA+4EBA014CA-X?	?:A	=4LKF001AR+4LKF005AR/342.8	
	=4LKF001AR+4LKF005AR/342.8	=4LKF001AR+4LKF005AR-X 296 05	27:A	**BU**	=4EBA014CA+4EBA014CA-X?	?:B	=4LKF001AR+4LKF005AR/342.8	
	=4LKF001AR+4LKF005AR/391.4	=4LKF001AR+4LKF005AR-PE		**GNYE**	=4EBA014CA+4EBA014CA-PE		=4LKF001AR+4LKF005AR/391.4	

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Cable name: **4LKF005AR/ 4EBA014PO-B-01**

Cable type: **2XSLCYK-JB EMV-UV** No. of conn., diameter, length: **3x25+3x4 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF005AR/291.9	=4LKF001AR+4LKF005AR-TA 291 08	U2	**BN**	=4EBA014PO+4EBA014PO-M1	U1	=4LKF001AR+4LKF005AR/291.9	CONDENSATE PUMP 1
MAIN POWER SUPPLY	=4LKF001AR+4LKF005AR/291.9	=4LKF001AR+4LKF005AR-TA 291 08	V2	**BK**	=4EBA014PO+4EBA014PO-M1	V1	=4LKF001AR+4LKF005AR/291.9	=
	=4LKF001AR+4LKF005AR/291.9	=4LKF001AR+4LKF005AR-TA 291 08	W2	**GY**	=4EBA014PO+4EBA014PO-M1	W1	=4LKF001AR+4LKF005AR/291.9	=
				GNYE				
				GNYE				
				GNYE				
MAIN POWER SUPPLY	=4LKF001AR+4LKF005AR/291.9			**SH**	=4EBA014PO+4EBA014PO-M1	PE	=4LKF001AR+4LKF005AR/291.9	CONDENSATE PUMP 1

Cable name: **4LKF005AR/ 4EBA014PO-M-01**

Cable type: **08IP09EISF BU** No. of conn., diameter, length: **8x2x0.88 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF005AR/323.9		1R1:A	**1RD**	=4LKF001AR+4LKF005AR-X 323 05	3:A	=4LKF001AR+4LKF005AR/323.9	
4 EBA 014 PO CONDENSATE PUMP 1 VFD	=4LKF001AR+4LKF005AR/323.10		1R2:A	**1WH**	=4LKF001AR+4LKF005AR-X 323 05	4:A	=4LKF001AR+4LKF005AR/323.10	4 EBA 014 PO CONDENSATE PUMP 1 VFD
=	=4LKF001AR+4LKF005AR/323.11		2R1:A	**2RD**	=4LKF001AR+4LKF005AR-X 323 05	5:A	=4LKF001AR+4LKF005AR/323.11	=
=	=4LKF001AR+4LKF005AR/323.12		2R2:A	**2WH**	=4LKF001AR+4LKF005AR-X 323 05	6:A	=4LKF001AR+4LKF005AR/323.12	=
=	=4LKF001AR+4LKF005AR/323.13		3R1:A	**3RD**	=4LKF001AR+4LKF005AR-X 323 05	7:A	=4LKF001AR+4LKF005AR/323.13	=
=	=4LKF001AR+4LKF005AR/323.14		3R2:A	**3WH**	=4LKF001AR+4LKF005AR-X 323 05	8:A	=4LKF001AR+4LKF005AR/323.14	=
	=4LKF001AR+4LKF005AR/324.3	=4LKF001AR+4LKF005AR-X 323 05	9:A	**4RD**	=4EBA014PO+4EBA014PO-X	4:A	=4LKF001AR+4LKF005AR/324.3	
	=4LKF001AR+4LKF005AR/324.4	=4LKF001AR+4LKF005AR-X 323 05	10:A	**4WH**	=4EBA014PO+4EBA014PO-X	6:A	=4LKF001AR+4LKF005AR/324.4	
	=4LKF001AR+4LKF005AR/324.4	=4LKF001AR+4LKF005AR-X 323 05	11:A	**5RD**	=4EBA014PO+4EBA014PO-X	5:A	=4LKF001AR+4LKF005AR/324.4	
	=4LKF001AR+4LKF005AR/324.7	=4LKF001AR+4LKF005AR-X 323 05	13:A	**5WH**	=4EBA014PO+4EBA014PO-X	4:A	=4LKF001AR+4LKF005AR/324.7	
	=4LKF001AR+4LKF005AR/324.7	=4LKF001AR+4LKF005AR-X 323 05	14:A	**6RD**	=4EBA014PO+4EBA014PO-X	6:A	=4LKF001AR+4LKF005AR/324.7	
	=4LKF001AR+4LKF005AR/324.8	=4LKF001AR+4LKF005AR-X 323 05	15:A	**6WH**	=4EBA014PO+4EBA014PO-X	5:A	=4LKF001AR+4LKF005AR/324.8	
4 EBA 014 PO CONDENSATE PUMP 1 VFD	=4LKF001AR+4LKF005AR/324.11	=4LKF001AR+4LKF005AR-X 323 05	17:A	**7RD**	=4EBA014PO+4EBA014PO-BV?	1+	=4LKF001AR+4LKF005AR/324.11	
=	=4LKF001AR+4LKF005AR/324.11	=4LKF001AR+4LKF005AR-X 323 05	18:A	**7WH**	=4EBA014PO+4EBA014PO-BV?	2-	=4LKF001AR+4LKF005AR/324.11	
25.11.22.	=4LKF001AR+4LKF005AR/324.15	=4LKF001AR+4LKF005AR-X 323 05	19:A	**8RD**	=4EBA014PO+4EBA014PO-BV?	1+	=4LKF001AR+4LKF005AR/324.15	
=	=4LKF001AR+4LKF005AR/324.15	=4LKF001AR+4LKF005AR-X 323 05	20:A	**8WH**	=4EBA014PO+4EBA014PO-BV?	2-	=4LKF001AR+4LKF005AR/324.15	

Cable name: **4LKF005AR/ 4EBA043CA-C-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF005AR/345.5	=4LKF001AR+4LKF005AR-X 298 05	2:A	**BN**	=4EBA043CA+4EBA043CA-X?	?:B	=4LKF001AR+4LKF005AR/345.5	
	=4LKF001AR+4LKF005AR/345.5	=4LKF001AR+4LKF005AR-X 298 05	23:A	**BK**	=4EBA043CA+4EBA043CA-X?	?:A	=4LKF001AR+4LKF005AR/345.5	
	=4LKF001AR+4LKF005AR/346.8	=4LKF001AR+4LKF005AR-X 298 05	26:A	**GY**	=4EBA043CA+4EBA043CA-X?	?:A	=4LKF001AR+4LKF005AR/346.8	
	=4LKF001AR+4LKF005AR/346.8	=4LKF001AR+4LKF005AR-X 298 05	27:A	**BU**	=4EBA043CA+4EBA043CA-X?	?:B	=4LKF001AR+4LKF005AR/346.8	
	=4LKF001AR+4LKF005AR/392.4	=4LKF001AR+4LKF005AR-PE		**GNYE**	=4EBA043CA+4EBA043CA-PE		=4LKF001AR+4LKF005AR/392.3	

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Cable name: **4LKF005AR/ 4EBA043PO-B-01**

Cable type: **2XSLCYK-JB EMV-UV** | No. of conn., diameter, length: **3x25+3x4 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
				BN				
				BK				
				GY				
				GNYE				
				GNYE				
				GNYE				
MAIN POWER SUPPLY	=4LKF001AR+4LKF005AR/293.9	=4LKF001AR+4LKF005AR-TA 293 08	V2	**BK**	=4EBA043PO+4EBA043PO-M1	V1	=4LKF001AR+4LKF005AR/293.9	CONDENSATE PUMP 2
	=4LKF001AR+4LKF005AR/293.9	=4LKF001AR+4LKF005AR-TA 293 08	U2	**BN**	=4EBA043PO+4EBA043PO-M1	U1	=4LKF001AR+4LKF005AR/293.9	=
	=4LKF001AR+4LKF005AR/293.9	=4LKF001AR+4LKF005AR-TA 293 08	W2	**GY**	=4EBA043PO+4EBA043PO-M1	W1	=4LKF001AR+4LKF005AR/293.9	=
MAIN POWER SUPPLY	=4LKF001AR+4LKF005AR/293.9			**SH**	=4EBA043PO+4EBA043PO-M1	PE	=4LKF001AR+4LKF005AR/293.9	=

Cable name: **4LKF005AR/ 4EBA043PO-M-01**

Cable type: **08IP09EISF BU** | No. of conn., diameter, length: **8x2x0.88 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF005AR/331.9		1R1:A	**1RD**	=4LKF001AR+4LKF005AR-X 331 05	3:A	=4LKF001AR+4LKF005AR/331.9	
4 EBA 043 PO CONDENSATE PUMP 2 VFD	=4LKF001AR+4LKF005AR/331.10		1R2:A	**1WH**	=4LKF001AR+4LKF005AR-X 331 05	4:A	=4LKF001AR+4LKF005AR/331.10	4 EBA 043 PO CONDENSATE PUMP 2 VFD
=	=4LKF001AR+4LKF005AR/331.11		2R1:A	**2RD**	=4LKF001AR+4LKF005AR-X 331 05	5:A	=4LKF001AR+4LKF005AR/331.11	=
=	=4LKF001AR+4LKF005AR/331.12		2R2:A	**2WH**	=4LKF001AR+4LKF005AR-X 331 05	6:A	=4LKF001AR+4LKF005AR/331.12	=
=	=4LKF001AR+4LKF005AR/331.13		3R1:A	**3RD**	=4LKF001AR+4LKF005AR-X 331 05	7:A	=4LKF001AR+4LKF005AR/331.13	=
=	=4LKF001AR+4LKF005AR/331.14		3R2:A	**3WH**	=4LKF001AR+4LKF005AR-X 331 05	8:A	=4LKF001AR+4LKF005AR/331.14	=
	=4LKF001AR+4LKF005AR/332.3	=4LKF001AR+4LKF005AR-X 331 05	9:A	**4RD**	=4EBA043PO+4EBA043PO-X	4:A	=4LKF001AR+4LKF005AR/332.3	
	=4LKF001AR+4LKF005AR/332.4	=4LKF001AR+4LKF005AR-X 331 05	10:A	**4WH**	=4EBA043PO+4EBA043PO-X	6:A	=4LKF001AR+4LKF005AR/332.4	
	=4LKF001AR+4LKF005AR/332.4	=4LKF001AR+4LKF005AR-X 331 05	11:A	**5RD**	=4EBA043PO+4EBA043PO-X	5:A	=4LKF001AR+4LKF005AR/332.4	
	=4LKF001AR+4LKF005AR/332.7	=4LKF001AR+4LKF005AR-X 331 05	13:A	**5WH**	=4EBA043PO+4EBA043PO-X	4:A	=4LKF001AR+4LKF005AR/332.7	
	=4LKF001AR+4LKF005AR/332.7	=4LKF001AR+4LKF005AR-X 331 05	14:A	**6RD**	=4EBA043PO+4EBA043PO-X	6:A	=4LKF001AR+4LKF005AR/332.7	
	=4LKF001AR+4LKF005AR/332.8	=4LKF001AR+4LKF005AR-X 331 05	15:A	**6WH**	=4EBA043PO+4EBA043PO-X	5:A	=4LKF001AR+4LKF005AR/332.8	
4 EBA 043 PO CONDENSATE PUMP 2 VFD	=4LKF001AR+4LKF005AR/332.11	=4LKF001AR+4LKF005AR-X 331 05	17:A	**7RD**	=4EBA043PO+4EBA043PO-BV?	1+	=4LKF001AR+4LKF005AR/332.11	
=	=4LKF001AR+4LKF005AR/332.11	=4LKF001AR+4LKF005AR-X 331 05	18:A	**7WH**	=4EBA043PO+4EBA043PO-BV?	2-	=4LKF001AR+4LKF005AR/332.11	
4 EBA 043 PO CONDENSATE PUMP 2 VFD	=4LKF001AR+4LKF005AR/332.15	=4LKF001AR+4LKF005AR-X 331 05	19:A	**8RD**	=4EBA043PO+4EBA043PO-BV?	1+	=4LKF001AR+4LKF005AR/332.15	4 EBA 043 PO CONDENSATE PUMP 2 VFD
=	=4LKF001AR+4LKF005AR/332.15	=4LKF001AR+4LKF005AR-X 331 05	20:A	**8WH**	=4EBA043PO+4EBA043PO-BV?	2-	=4LKF001AR+4LKF005AR/332.15	

Cable name: **4LKF005AR/ 4FTA049VAR-C-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **3G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
4 CRE 196 MO COOLING WATER PUMP 2 VFD	=4LKF001AR+4LKF005AR/347.18	=4LKF001AR+4LKF005AR-X 298 05	30:A	**BN**	=4FTA049VAR+4FTA049VAR-X 033 05	27:A	=4FTA049VAR+4FTA049VAR/56.18	4 CRE 196 MO COOLING WATER PUMP 2 VFD
				BU				
				GNYE				
	=4FTA049VAR+4FTA049VAR/91.14	=4LKF001AR+4LKF005AR-X?	?	**BU**	=4FTA049VAR+4FTA049VAR-X 091 04	7:A	=4FTA049VAR+4FTA049VAR/91.14	
	=4FTA049VAR+4FTA049VAR/91.15	=4LKF001AR+4LKF005AR-PE		**GNYE**	=4FTA049VAR+4FTA049VAR-PE		=4FTA049VAR+4FTA049VAR/91.15	

Cable name: **4LKF005AR/ 4LKF006AR-B-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **4G50 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF005AR/294.14	=4LKF001AR+4LKF005AR-L1		**BN**	=4LKF001AR+4LKF006AR-L1		=4LKF001AR+4LKF005AR/294.13	
	=4LKF001AR+4LKF005AR/294.14	=4LKF001AR+4LKF005AR-L2		**BK**	=4LKF001AR+4LKF006AR-L2		=4LKF001AR+4LKF005AR/294.13	
	=4LKF001AR+4LKF005AR/294.14	=4LKF001AR+4LKF005AR-L3		**GY**	=4LKF001AR+4LKF006AR-L3		=4LKF001AR+4LKF005AR/294.13	
	=4LKF001AR+4LKF005AR/392.11	=4LKF001AR+4LKF005AR-PE		**GNYE**	=4LKF001AR+4LKF006AR-PE		=4LKF001AR+4LKF005AR/392.10	

Cable name: **4LKF005AR/ 4LKF006AR-C-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **7G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
*NOTE_ZŠ_2026-03-23: Terminals added	=4LKF001AR+4LKF005AR/372.4	=4LKF001AR+4LKF005AR-XB 372 03	4:B	**1**	=4LKF001AR+4LKF006AR-XB 592 03	1:A	=4LKF001AR+4LKF006AR/592.3	*NOTE_ZŠ_2026-03-23: Terminals added
4 EBA 043 PO CONDENSATE PUMP 2 VFD	=4LKF001AR+4LKF005AR/372.15	=4LKF001AR+4LKF005AR-XB 372 03	5:B	**2**	=4LKF001AR+4LKF006AR-XB 592 03	5:A	=4LKF001AR+4LKF006AR/592.4	=
=	=4LKF001AR+4LKF005AR/372.15	=4LKF001AR+4LKF005AR-XB 372 03	6:B	**3**	=4LKF001AR+4LKF006AR-XB 592 03	6:A	=4LKF001AR+4LKF006AR/592.4	=
	=4LKF001AR+4LKF005AR/376.4	=4LKF001AR+4LKF005AR-XB 376 03	4:B	**4**	=4LKF001AR+4LKF006AR-XB 596 03	1:A	=4LKF001AR+4LKF006AR/596.3	=
4 EBA 043 PO CONDENSATE PUMP 2 VFD	=4LKF001AR+4LKF005AR/376.15	=4LKF001AR+4LKF005AR-XB 376 03	5:B	**5**	=4LKF001AR+4LKF006AR-XB 596 03	5:A	=4LKF001AR+4LKF006AR/596.4	=
=	=4LKF001AR+4LKF005AR/376.15	=4LKF001AR+4LKF005AR-XB 376 03	6:B	**6**	=4LKF001AR+4LKF006AR-XB 596 03	6:A	=4LKF001AR+4LKF006AR/596.4	=
	=4LKF001AR+4LKF005AR/392.13	=4LKF001AR+4LKF005AR-PE		**GNYE**	=4LKF001AR+4LKF006AR-PE		=4LKF001AR+4LKF005AR/392.12	

Cable name: **4LKF005AR/ ZONE TURBINE-C-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF005AR/365.4	=4LKF001AR+4LKF005AR-X 365 04	1:A	**BN**	=ZONE TURBINE-S303	11	=4LKF001AR+4LKF005AR/365.4	
CONTROL ZONE EMERGENCY STOP - TURBINE ZONE	=4LKF001AR+4LKF005AR/365.5	=4LKF001AR+4LKF005AR-X 365 04	3:A	**BK**	=ZONE TURBINE-S303	21	=4LKF001AR+4LKF005AR/365.5	
	=4LKF001AR+4LKF005AR/365.4	=4LKF001AR+4LKF005AR-X 365 04	2:A	**GY**	=ZONE TURBINE-S303	12	=4LKF001AR+4LKF005AR/365.4	
CONTROL ZONE EMERGENCY STOP - TURBINE ZONE	=4LKF001AR+4LKF005AR/365.5	=4LKF001AR+4LKF005AR-X 365 04	4:A	**BU**	=ZONE TURBINE-S303	22	=4LKF001AR+4LKF005AR/365.5	
	=4LKF001AR+4LKF005AR/391.11	=4LKF001AR+4LKF005AR-PE		**GNYE**	=ZONE TURBINE-PE		=4LKF001AR+4LKF005AR/391.10	

Terminal diagram

Strip

A SIDE — =4LKF001AR+4LKF005AR-X 295 05 — B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1	BN 2.5 mm²	-Q 295 05:2
					2	BK 1 mm²	-TA 291 08:19
					3	BK 1 mm²	-TA 291 08:24
					4	BK 1 mm²	-TA 292 08:19
					5	BK 1 mm²	-TA 292 08:24
					6	BU 2.5 mm²	-Q 295 05:4
					7	BU 1 mm²	-K 322 07:A2

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF005AR-X 296 05

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					24		
					25		
					31		
					1	WH 2.5 mm²	-Q 296 05:2
/341.5	=4EBA014CA+4EBA014CA-X?:?:B	4LKF005AR/ 4EBA014CA-C-01 U1000R2V 5G1.5 mm²	BN 1.5 mm²		2		
					3	WH 1 mm²	-RP 341 11:13
					4		
/343.5	=4CRE189CA+4CRE189CA-X?:?:B	4LKF005AR/ 4CRE189CA-C-01 U1000R2V 5G1.5 mm²	BN 1.5 mm²		5		
					6	WH 1 mm²	-RP 343 11:13
					7		
					8	WH 1 mm²	-K 322 09:11
					9		
					10	WH 1 mm²	-K 326 09:11
					11		
					12	GY 2.5 mm²	-Q 296 05:4
					13	GY 1 mm²	-RP 341 11:A2
					14	GY 1 mm²	-K 342 05:A2
					15		
					16	GY 1 mm²	-RP 343 11:A2
					17	GY 1 mm²	-K 344 05:A2
					18		
					19	GY 1 mm²	-HL 373 06:2
						GY 1 mm²	-XB 372 03:1:B
					20		
					21	GY 1 mm²	-HL 374 06:2

Terminal diagram

Strip

=4LKF001AR+4LKF005AR-X 296 05

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
						GY 1 mm²	-XB 372 03:2:B
					22		
/341.5	=4EBA014CA+4EBA014CA-X?:?:A	4LKF005AR/ 4EBA014CA-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²		23	WH 1 mm²	-RP 365 04:13
					24	WH 1 mm²	-S 321 09:34
					25	WH 1 mm²	-K 342 05:A1
/342.8	=4EBA014CA+4EBA014CA-X?:?:A	4LKF005AR/ 4EBA014CA-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²		26	WH 1 mm²	-K 342 05:24
/342.8	=4EBA014CA+4EBA014CA-X?:?:B	4LKF005AR/ 4EBA014CA-C-01 U1000R2V 5G1.5 mm²	BU 1.5 mm²		27	WH 1 mm²	-S 321 09:44
					28	WH 1 mm²	-K 342 05:21
/343.5	=4CRE189CA+4CRE189CA-X?:?:A	4LKF005AR/ 4CRE189CA-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²		29	WH 1 mm²	+4LKF003AR-RP 171 04:43
					30	WH 1 mm²	-S 325 09:34
					31	WH 1 mm²	-K 344 05:A1
/344.8	=4CRE189CA+4CRE189CA-X?:?:A	4LKF005AR/ 4CRE189CA-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²		32	WH 1 mm²	-K 344 05:24
/344.8	=4CRE189CA+4CRE189CA-X?:?:B	4LKF005AR/ 4CRE189CA-C-01 U1000R2V 5G1.5 mm²	BU 1.5 mm²		33	WH 1 mm²	-S 325 09:44
					34	WH 1 mm²	-K 344 05:21

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF005AR-X 297 05

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1	BN 2.5 mm²	-Q 297 05:2
					2	BK 1 mm²	-TA 293 08:19
					3	BK 1 mm²	-TA 293 08:24
					4	BK 1 mm²	-TA 294 08:19
					5	BK 1 mm²	-TA 294 08:24
					6	BU 2.5 mm²	-Q 297 05:4
					7	BU 1 mm²	-K 330 07:A2

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF005AR-X 298 05

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1	WH 2.5 mm²	-Q 298 05:2
/345.5	=4EBA043CA+4EBA043CA-X?:?:B	4LKF005AR/ 4EBA043CA-C-01 U1000R2V 5G1.5 mm²	BN 1.5 mm²		2		
					3	WH 1 mm²	-RP 345 11:13
					4		
/347.5	=4CRE196CA+4CRE196CA-X?:?:B	4LKF005AR/ 4CRE196CA-C-01 U1000R2V 5G1.5 mm²	BN 1.5 mm²		5		
					6	WH 1 mm²	-RP 347 11:13
					7		
					8	WH 1 mm²	-K 330 09:11
					9		
					10	WH 1 mm²	-K 334 09:11
					11		
					12	GY 2.5 mm²	-Q 298 05:4
					13	GY 1 mm²	-RP 345 11:A2
					14	GY 1 mm²	-K 346 05:A2
					15		
					16	GY 1 mm²	-RP 347 11:A2
					17	GY 1 mm²	-K 348 05:A2
					18		
					19	GY 1 mm²	-HL 377 06:2
						GY 1 mm²	-XB 376 03:1:B
					20		
					21	GY 1 mm²	-HL 378 06:2
						GY 1 mm²	-XB 376 03:2:B
					22		
/345.5	=4EBA043CA+4EBA043CA-X?:?:A	4LKF005AR/ 4EBA043CA-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²		23	WH 1 mm²	-RP 365 04:23

Terminal diagram

Strip

A SIDE =4LKF001AR+4LKF005AR-X 298 05 B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					24	WH 1 mm²	-S 329 09:34
					25	WH 1 mm²	-K 346 05:A1
/346.8	=4EBA043CA+4EBA043CA-X?:?:A	4LKF005AR/ 4EBA043CA-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²		26	WH 1 mm²	-K 346 05:24
/346.8	=4EBA043CA+4EBA043CA-X?:?:B	4LKF005AR/ 4EBA043CA-C-01 U1000R2V 5G1.5 mm²	BU 1.5 mm²		27	WH 1 mm²	-S 329 09:44
					28	WH 1 mm²	-K 346 05:21
/347.5	=4CRE196CA+4CRE196CA-X?:?:A	4LKF005AR/ 4CRE196CA-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²		29	WH 1 mm²	+4LKF003AR-RP 172 04:13
=4FTA049VAR+4FTA049VAR/56.18	=4FTA049VAR+4FTA049VAR-X 033 05:27:A	4LKF005AR/ 4FTA049VAR-C-01 U1000R2V 3G1.5 mm²	BN 1.5 mm²		30	WH 1 mm²	-RP 347 11:62
					31	WH 1 mm²	-S 333 09:34
					32	WH 1 mm²	-K 348 05:A1
/348.8	=4CRE196CA+4CRE196CA-X?:?:A	4LKF005AR/ 4CRE196CA-C-01 U1000R2V 5G1.5 mm²	BU 1.5 mm²		33	WH 1 mm²	-K 348 05:24
/348.8	=4CRE196CA+4CRE196CA-X?:?:B	4LKF005AR/ 4CRE196CA-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²		34	WH 1 mm²	-S 333 09:44
					35	WH 1 mm²	-K 348 05:21

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF005AR-X 311 05

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
=4LCA002CR+4LCA002CR/21.8	=4LCA002CR+4LCA002CR-X 021 08:1:A	4LCA002CR/ 4LKF005AR-C-01 U1000R2V 3G2.5 mm²	BN 2.5 mm²		1	RD 2.5 mm²	-IG 311 05:1
					1		
					6		
/311.5	-IG 311 05:2		RD 2.5 mm²		2	RD 1.5 mm²	-TA 291 08:31
					3	RD 1.5 mm²	-TA 292 08:31
/343.14	-RP 343 11:23		RD 1.5 mm²		5	RD 1.5 mm²	-RP 343 11:33
/362.11	-TA 292 08:STO_B-		BU 1.5 mm²		10	BU 1.5 mm²	-TA 292 08:STO_A-
/341.14	-RP 341 11:23		RD 1.5 mm²		4	RD 1.5 mm²	-RP 341 11:33
=4LCA002CR+4LCA002CR/21.8	=4LCA002CR+4LCA002CR-X 021 08:3:A	4LCA002CR/ 4LKF005AR-C-01 U1000R2V 3G2.5 mm²	BU 2.5 mm²		6	BU 2.5 mm²	-IG 311 05:3
/311.5	-IG 311 05:4		BU 2.5 mm²		7	BU 1.5 mm²	-TA 291 08:32
					8	BU 1.5 mm²	-TA 292 08:32
/361.11	-TA 291 08:STO_B-		BU 1.5 mm²		9	BU 1.5 mm²	-TA 291 08:STO_A-

Terminal diagram

A SIDE

Strip
=4LKF001AR+4LKF005AR-X 312 05

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
=4LCA002CR+4LCA002CR/21.10	=4LCA002CR+4LCA002CR-X 021 10:1:A	4LCA002CR/ 4LKF005AR-C-02 U1000R2V 3G2.5 mm²	BN 2.5 mm²		1	RD 2.5 mm²	-IG 312 05:1
					1		
					6		
/312.5	-IG 312 05:2		RD 2.5 mm²		2	RD 1.5 mm²	-TA 293 08:31
					3	RD 1.5 mm²	-TA 294 08:31
/345.14	-RP 345 11:23		RD 1.5 mm²		4	RD 1.5 mm²	-RP 345 11:33
/364.7	-X 391 04:2						
=4LCA002CR+4LCA002CR/21.10	=4LCA002CR+4LCA002CR-X 021 10:3:A	4LCA002CR/ 4LKF005AR-C-02 U1000R2V 3G2.5 mm²	BU 2.5 mm²		6	BU 2.5 mm²	-IG 312 05:3
/363.11	-TA 293 08:STO_B-		BU 1.5 mm²		9	BU 1.5 mm²	-TA 293 08:STO_A-
/364.8	-X 391 05:10						
/312.5	-IG 312 05:4		BU 2.5 mm²		7	BU 1.5 mm²	-TA 293 08:32
					8	BU 1.5 mm²	-TA 294 08:32

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF005AR-X 321 04

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Strip	Wiring	Target designation
					4		
					7		
					1	RD 1 mm²	-TA 291 08:9
					2	RD 1 mm²	-K 342 05:11
					3	RD 1 mm²	-S 321 09:13
					4		
					5	RD 1 mm²	-Q 295 05:11
					6	RD 1 mm²	-QB 291 09:21
					7	RD 1 mm²	-TA 291 08:17

Terminal diagram

Strip

=4LKF001AR+4LKF005AR-X 323 05

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
				'	9		
				'	10		
				'	11		
				'	13		
				'	14		
				'	15		
				'	17		
				'	18		
				'	19		
				'	20		
				'	1	VT 1 mm²	-TA 291 08:3
				'	2	VT 1 mm²	-TA 291 08:4
/323.9	1R1:A	4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.88 mm²	1RD 0.88 mm²	'	3	VT 1 mm²	-TA 291 08:10
/323.10	1R2:A	4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.88 mm²	1WH 0.88 mm²	'	4	VT 1 mm²	-TA 291 08:11
/323.11	2R1:A	4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.88 mm²	2RD 0.88 mm²	'	5	VT 1 mm²	-TA 291 08:80
/323.12	2R2:A	4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.88 mm²	2WH 0.88 mm²	'	6	VT 1 mm²	-TA 291 08:82
/323.13	3R1:A	4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.88 mm²	3RD 0.88 mm²	'	7	VT 1 mm²	-TA 291 08:81
/323.14	3R2:A	4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.88 mm²	3WH 0.88 mm²	'	8	VT 1 mm²	-TA 291 08:84
/324.3	=4EBA014PO+4EBA014PO-X:4:A	4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.88 mm²	4RD 0.88 mm²	'	9		
/324.4	=4EBA014PO+4EBA014PO-X:6:A	4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.88 mm²	4WH 0.88 mm²	'	10		
/324.4	=4EBA014PO+4EBA014PO-X:5:A	4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.88 mm²	5RD 0.88 mm²	'	11		
				'	12		
/324.7	=4EBA014PO+4EBA014PO-X:4:A	4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.88 mm²	5WH 0.88 mm²	'	13		
/324.7	=4EBA014PO+4EBA014PO-X:6:A	4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.88 mm²	6RD 0.88 mm²	'	14		
/324.8	=4EBA014PO+4EBA014PO-X:5:A	4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.88 mm²	6WH 0.88 mm²	'	15		

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF005AR-X 323 05

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Terminal	Wiring	Target designation
				'		16		
/324.11	=4EBA014PO+4EBA014PO-BV?:1+	4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.88 mm²	7RD 0.88 mm²	'		17		
/324.11	=4EBA014PO+4EBA014PO-BV?:2-	4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.88 mm²	7WH 0.88 mm²	'		18		
/324.15	=4EBA014PO+4EBA014PO-BV?:1+	4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.88 mm²	8RD 0.88 mm²	'		19		
/324.15	=4EBA014PO+4EBA014PO-BV?:2-	4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.88 mm²	8WH 0.88 mm²	'		20		

Terminal diagram

A SIDE

Strip
=4LKF001AR+4LKF005AR-X 325 04

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					4		
					7		
					1	RD 1 mm²	-TA 292 08:9
					2	RD 1 mm²	-K 344 05:11
					3	RD 1 mm²	-S 325 09:13
					4		
					5	RD 1 mm²	-Q 295 05:21
					6	RD 1 mm²	-QB 292 09:21
					7	RD 1 mm²	-TA 292 08:17

Terminal diagram

A SIDE

Strip
=4LKF001AR+4LKF005AR-X 327 05

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					9		
					10		
					11		
					13		
					14		
					15		
					17		
					18		
					19		
					20		
					1	VT 1 mm²	-TA 292 08:3
					2	VT 1 mm²	-TA 292 08:4
/327.9	1R1:A	4LKF005AR/ 4CRE189MO-M-01 08IP09EISF BU 8x2x0.88 mm²	1RD 0.88 mm²		3	VT 1 mm²	-TA 292 08:10
/327.10	1R2:A	4LKF005AR/ 4CRE189MO-M-01 08IP09EISF BU 8x2x0.88 mm²	1WH 0.88 mm²		4	VT 1 mm²	-TA 292 08:11
/327.11	2R1:A	4LKF005AR/ 4CRE189MO-M-01 08IP09EISF BU 8x2x0.88 mm²	2RD 0.88 mm²		5	VT 1 mm²	-TA 292 08:80
/327.12	2R2:A	4LKF005AR/ 4CRE189MO-M-01 08IP09EISF BU 8x2x0.88 mm²	2WH 0.88 mm²		6	VT 1 mm²	-TA 292 08:82
/327.13	3R1:A	4LKF005AR/ 4CRE189MO-M-01 08IP09EISF BU 8x2x0.88 mm²	3RD 0.88 mm²		7	VT 1 mm²	-TA 292 08:81
/327.14	3R2:A	4LKF005AR/ 4CRE189MO-M-01 08IP09EISF BU 8x2x0.88 mm²	3WH 0.88 mm²		8	VT 1 mm²	-TA 292 08:84
/328.3	=4CRE189MO+4CRE189MO-X:4:A	4LKF005AR/ 4CRE189MO-M-01 08IP09EISF BU 8x2x0.88 mm²	4RD 0.88 mm²		9		
					10	4WH 0.88 mm²	=4CRE189MO+4CRE189MO-X:6:A
					11	5RD 0.88 mm²	=4CRE189MO+4CRE189MO-X:5:A
					12		
					13	5WH 0.88 mm²	=4CRE189MO+4CRE189MO-X:4:A
					14	6RD 0.88 mm²	=4CRE189MO+4CRE189MO-X:6:A
					15	6WH 0.88 mm²	=4CRE189MO+4CRE189MO-X:5:A

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF005AR-X 327 05

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					16		
					17	7RD 0.88 mm²	=4CRE189MO+4CRE189MO-BV?:1+
					18	7WH 0.88 mm²	=4CRE189MO+4CRE189MO-BV?:2-
					19	8RD 0.88 mm²	=4CRE189MO+4CRE189MO-BV?:1+
					20	8WH 0.88 mm²	=4CRE189MO+4CRE189MO-BV?:2-

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF005AR-X 329 04

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1	RD 1 mm²	-TA 293 08:9
					2	RD 1 mm²	-K 346 05:11
					3	RD 1 mm²	-S 329 09:13
					4		
					5	RD 1 mm²	-Q 297 05:11
					6	RD 1 mm²	-QB 293 09:21
					7	RD 1 mm²	-TA 293 08:17

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Terminal diagram

A SIDE

Strip
=4LKF001AR+4LKF005AR-X 331 05

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
				'	9		
				'	10		
				'	11		
				'	13		
				'	14		
				'	15		
				'	17		
				'	18		
				'	19		
				'	20		
				'	1	VT 1 mm²	-TA 293 08:3
				'	2	VT 1 mm²	-TA 293 08:4
/331.9	1R1:A	4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.88 mm²	1RD 0.88 mm²	'	3	VT 1 mm²	-TA 293 08:10
/331.10	1R2:A	4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.88 mm²	1WH 0.88 mm²	'	4	VT 1 mm²	-TA 293 08:11
/331.11	2R1:A	4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.88 mm²	2RD 0.88 mm²	'	5	VT 1 mm²	-TA 293 08:80
/331.12	2R2:A	4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.88 mm²	2WH 0.88 mm²	'	6	VT 1 mm²	-TA 293 08:82
/331.13	3R1:A	4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.88 mm²	3RD 0.88 mm²	'	7	VT 1 mm²	-TA 293 08:81
/331.14	3R2:A	4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.88 mm²	3WH 0.88 mm²	'	8	VT 1 mm²	-TA 293 08:84
/332.3	=4EBA043PO+4EBA043PO-X:4:A	4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.88 mm²	4RD 0.88 mm²	'	9		
/332.4	=4EBA043PO+4EBA043PO-X:6:A	4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.88 mm²	4WH 0.88 mm²	'	10		
/332.4	=4EBA043PO+4EBA043PO-X:5:A	4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.88 mm²	5RD 0.88 mm²	'	11		
				'	12		
/332.7	=4EBA043PO+4EBA043PO-X:4:A	4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.88 mm²	5WH 0.88 mm²	'	13		
/332.7	=4EBA043PO+4EBA043PO-X:6:A	4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.88 mm²	6RD 0.88 mm²	'	14		
/332.8	=4EBA043PO+4EBA043PO-X:5:A	4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.88 mm²	6WH 0.88 mm²	'	15		

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF005AR-X 331 05

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Terminal	Wiring	Target designation
				'		16		
/332.11	=4EBA043PO+4EBA043PO-BV?:1+	4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.88 mm²	7RD 0.88 mm²	'		17		
/332.11	=4EBA043PO+4EBA043PO-BV?:2-	4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.88 mm²	7WH 0.88 mm²	'		18		
/332.15	=4EBA043PO+4EBA043PO-BV?:1+	4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.88 mm²	8RD 0.88 mm²	'		19		
/332.15	=4EBA043PO+4EBA043PO-BV?:2-	4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.88 mm²	8WH 0.88 mm²	'		20		

Terminal diagram

A SIDE

Strip
=4LKF001AR+4LKF005AR-X 333 04

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1	RD 1 mm²	-TA 294 08:9
					2	RD 1 mm²	-K 348 05:11
					3	RD 1 mm²	-S 333 09:13
					4		
					5	RD 1 mm²	-Q 297 05:21
					6	RD 1 mm²	-QB 294 09:21
					7	RD 1 mm²	-TA 294 08:17

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF005AR-X 335 05

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
				'	9		
				'	10		
				'	11		
				'	13		
				'	14		
				'	15		
				'	17		
				'	18		
				'	19		
				'	20		
				'	1	VT 1 mm²	-TA 294 08:3
				'	2	VT 1 mm²	-TA 294 08:4
/335.9	1R1:A	4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.88 mm²	1RD 0.88 mm²	'	3	VT 1 mm²	-TA 294 08:10
/335.10	1R2:A	4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.88 mm²	1WH 0.88 mm²	'	4	VT 1 mm²	-TA 294 08:11
/335.11	2R1:A	4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.88 mm²	2RD 0.88 mm²	'	5	VT 1 mm²	-TA 294 08:80
/335.12	2R2:A	4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.88 mm²	2WH 0.88 mm²	'	6	VT 1 mm²	-TA 294 08:82
/335.13	3R1:A	4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.88 mm²	3RD 0.88 mm²	'	7	VT 1 mm²	-TA 294 08:81
/335.14	3R2:A	4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.88 mm²	3WH 0.88 mm²	'	8	VT 1 mm²	-TA 294 08:84
/336.3	=4CRE196MO+4CRE196MO-X:4:A	4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.88 mm²	4RD 0.88 mm²	'	9		
/336.4	=4CRE196MO+4CRE196MO-X:6:A	4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.88 mm²	4WH 0.88 mm²	'	10		
/336.4	=4CRE196MO+4CRE196MO-X:5:A	4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.88 mm²	5RD 0.88 mm²	'	11		
				'	12		
/336.7	=4CRE196MO+4CRE196MO-X:4:A	4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.88 mm²	5WH 0.88 mm²	'	13		
/336.7	=4CRE196MO+4CRE196MO-X:6:A	4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.88 mm²	6RD 0.88 mm²	'	14		
/336.8	=4CRE196MO+4CRE196MO-X:5:A	4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.88 mm²	6WH 0.88 mm²	'	15		

Terminal diagram

Strip
=4LKF001AR+4LKF005AR-X 335 05

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Terminal	Wiring	Target designation
				'		16		
/336.11	=4CRE196MO+4CRE196MO-BV?:1+	4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.88 mm²	7RD 0.88 mm²	'		17		
/336.11	=4CRE196MO+4CRE196MO-BV?:2-	4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.88 mm²	7WH 0.88 mm²	'		18		
/336.15	=4CRE196MO+4CRE196MO-BV?:1+	4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.88 mm²	8RD 0.88 mm²	'		19		
/336.15	=4CRE196MO+4CRE196MO-BV?:2-	4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.88 mm²	8WH 0.88 mm²	'		20		

Terminal diagram

A SIDE

Strip
=4LKF001AR+4LKF005AR-X 337 08

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
				'	1		
				'	2		
				'	3		
				'	4		
				'	1	VT 1 mm²	-TA 291 08:86
				'	2	VT 1 mm²	-TA 291 08:85
				'	3	VT 1 mm²	-TA 292 08:86
				'	4	VT 1 mm²	-TA 292 08:85

Terminal diagram

Strip

A SIDE =4LKF001AR+4LKF005AR-X 338 08 B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Terminal	Wiring	Target designation
				'		1		
				'		2		
				'		3		
				'		4		
				'		1	VT 1 mm²	-TA 293 08:86
				'		2	VT 1 mm²	-TA 293 08:85
				'		3	VT 1 mm²	-TA 294 08:86
				'		4	VT 1 mm²	-TA 294 08:85

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF005AR-X 365 04

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/365.4	=ZONE TURBINE-S303:11	4LKF005AR/ ZONE TURBINE-C-01 U1000R2V 5G1.5 mm²	BN 1.5 mm²	'	1	WH 1 mm²	-Q 365 04:2
/365.4	=ZONE TURBINE-S303:12	4LKF005AR/ ZONE TURBINE-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²	'	2	WH 1 mm²	-RP 365 04:A1
/365.5	=ZONE TURBINE-S303:21	4LKF005AR/ ZONE TURBINE-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²	'	3	GY 1 mm²	-Q 365 04:4
/365.5	=ZONE TURBINE-S303:22	4LKF005AR/ ZONE TURBINE-C-01 U1000R2V 5G1.5 mm²	BU 1.5 mm²	'	4	GY 1 mm²	-RP 365 04:A2

Terminal diagram

Strip

=4LKF001AR+4LKF005AR-X 371 04

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1		
					2	RD 1 mm²	-K 322 09:21
					3	RD 1 mm²	-K 326 09:21
					4		
					5		
					6	RD 1 mm²	-K 322 09:24
					7	RD 1 mm²	-RP 341 11:44
					8	RD 1 mm²	-K 326 09:24
					9	RD 1 mm²	-RP 343 11:44
					10		

Terminal diagram

A SIDE

Strip
=4LKF001AR+4LKF005AR-X 375 04

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1		
					2	RD 1 mm²	-K 330 09:21
					3	RD 1 mm²	-K 334 09:21
					4		
					5		
					6	RD 1 mm²	-K 330 09:24
					7	RD 1 mm²	-RP 345 11:44
					8	RD 1 mm²	-K 334 09:24
					9	RD 1 mm²	-RP 347 11:44
					10		

Terminal diagram

A SIDE

Strip
=4LKF001AR+4LKF005AR-X 391 03

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Terminal	Wiring	Target designation
				'		1		
				'		2		
				'		3		
				'		4		
				'		5		
				'		6		
				'		7		
				'		8		
				'		9		
				'		10		
				'		11		
				'		12		

Terminal diagram

Strip

A SIDE | =4LKF001AR+4LKF005AR-X 391 04 | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					5		
					6		
					7		
					8		
					9		
					10		
					11		
					12		
					13		
					1	GNYE 2.5 mm²	-PE
/347.14	-RP 347 11:23		RD 1.5 mm²		2	RD 1.5 mm²	-RP 347 11:33
/363.7	-X 312 05:4						
					2		
					3		
					3		
/391.4	6				4		

Terminal diagram

A SIDE

Strip
=4LKF001AR+4LKF005AR-X 391 05

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Terminal	Wiring	Target designation
/364.11	-TA 294 08:STO_B-		BU 1.5 mm²	'		10	BU 1.5 mm²	-TA 294 08:STO_A-
/363.8	-X 312 05:9							

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF005AR-X 391 08

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Terminal	Wiring	Target designation
				'		1		
				'		2		
				'		3		
				'		4		
				'		5		
				'		6		
				'		7		
				'		8		
				'		9		
				'		10		
				'		11		
				'		12		

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF005AR-X 392 03

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					6		
					7		
					8		
					9		
					10		
					11		
					12		
					13		
/392.2	-PE		GNYE 2.5 mm²		1		
					2		
					3		
					4		
/392.9	13				5		

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF005AR-XB 372 03

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
+4LKF002AR/94.5	+4LKF002AR-XB 093 03:6:A		GY 1 mm²		1	GY 1 mm²	-X 296 05:19:B
					2	GY 1 mm²	-X 296 05:21:B
					3		
					4	1 1.5 mm²	+4LKF006AR-XB 592 03:1:A
/372.6	-R 372 05:M'		WH 1 mm²		5	2 1.5 mm²	+4LKF006AR-XB 592 03:5:A
					4		
					5		
/372.11	-R 372 10:P'		WH 1 mm²		6	3 1.5 mm²	+4LKF006AR-XB 592 03:6:A
					6		

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF005AR-XB 376 03

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Strip	Wiring	Target designation
+4LKF004AR/236.5	+4LKF004AR-XB 236 03:6:A		GY 1 mm²		1	GY 1 mm²	-X 298 05:19:B
					2	GY 1 mm²	-X 298 05:21:B
					3		
					4	4 1.5 mm²	+4LKF006AR-XB 596 03:1:A
/376.6	-R 376 05:M'		WH 1 mm²		5	5 1.5 mm²	+4LKF006AR-XB 596 03:5:A
/376.11	-R 376 10:P'		WH 1 mm²		6	6 1.5 mm²	+4LKF006AR-XB 596 03:6:A

Table of contents

Table of contents

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Table of contents

Sorting number	Part number	Quantity	Manufacturer	Device	Device description	Device designation
1.	SE.ZB4BVBG1	18	Schneider Electric	white light block with body/fixing collar integral LED 24...120VAC/DC	white light block with body/fixing collar integral LED 24...120VAC/DC	-HL 593 06;-HL 593 08;-HL 593 09;-HL 594 06;-HL 594 08;-HL 594 09;-HL 597 06;-HL 597 08;-HL 597 09;-HL 598 06;-HL 598 08;-HL 598 09;-HL 601 06;-HL 601 08;-HL 601 09;-HL 602 06;-HL 602 08;-HL 602 09
2.	SE.ZB4BV043	6	Schneider Electric	Red pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Red	-HL 593 06;-HL 594 06;-HL 597 06;-HL 598 06;-HL 601 06;-HL 602 06
3.	SE.ZB4BV033	6	Schneider Electric	Green pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Green	-HL 593 08;-HL 594 08;-HL 597 08;-HL 598 08;-HL 601 08;-HL 602 08
4.	SE.ZB4BV053	6	Schneider Electric	Orange pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Orange	-HL 593 09;-HL 594 09;-HL 597 09;-HL 598 09;-HL 601 09;-HL 602 09
5.	SE.A9S60220	2	Schneider Electric	Control switch iSW, 2P, 20A	Acti 9 iSW 2P 20 A at 415 V AC 50/60 Hz	-IG 531 05;-IG 532 05
6.	SE.A9A15096	4	Schneider Electric	Auxiliary contact iOF, iSW, 3A	Auxiliary contact iOF, iSW, 3A	-IG 531 05;-IG 532 05
7.	SE.RXM4AB2P7	14	Schneider Electric	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED	-K 515 05;-K 517 05;-K 542 07;-K 542 09;-K 545 07;-K 545 09;-K 548 07;-K 548 09;-K 551 07;-K 551 09;-K 556 07;-K 556 09;-K 559 07;-K 559 09
8.	SE.RXZE2S114M	20	Schneider Electric	Socket	For RXM2/RXM4 relays Screw connectors Separate contact 4 C/O	-K 515 05;-K 517 05;-K 542 07;-K 542 09;-K 545 07;-K 545 09;-K 548 07;-K 548 09;-K 551 07;-K 551 09;-K 556 07;-K 556 09;-K 559 07;-K 559 09;-K 562 05;-K 564 05;-K 566 05;-K 568 05;-K 571 05;-K 572 05
9.	SE.RXM041FU7	14	Schneider Electric	Protection module	RC circuit - 110..240 V AC - for RPZ/RXZ sockets	-K 515 05;-K 517 05;-K 542 07;-K 542 09;-K 545 07;-K 545 09;-K 548 07;-K 548 09;-K 551 07;-K 551 09;-K 556 07;-K 556 09;-K 559 07;-K 559 09
10.	SE.RXZR335	20	Schneider Electric	Maintaining clamp	For RXZ socket Plastic	-K 515 05;-K 517 05;-K 542 07;-K 542 09;-K 545 07;-K 545 09;-K 548 07;-K 548 09;-K 551 07;-K 551 09;-K 556 07;-K 556 09;-K 559 07;-K 559 09;-K 562 05;-K 564 05;-K 566 05;-K 568 05;-K 571 05;-K 572 05
11.	SE.RXM4AB2E7	6	Schneider Electric	Miniature Plug-in relay - Zelio RXM 4 C/O 48 V AC 6 A with LED	Miniature Plug-in relay - Zelio RXM 4 C/O 48 V AC 6 A with LED	-K 562 05;-K 564 05;-K 566 05;-K 568 05;-K 571 05;-K 572 05
12.	SE.RXM041BN7	6	Schneider Electric	Protection diode	RC circuit - 24..60 V AC - for RPZ/RXZ sockets	-K 562 05;-K 564 05;-K 566 05;-K 568 05;-K 571 05;-K 572 05
13.	SE.A9F74202	5	Schneider Electric	2-pole MCB, 2A/C	Nominal current: 2 A Tripping curve: C	-Q 515 05;-Q 516 05;-Q 517 05;-Q 518 05;-Q 585 04
14.	SE.A9A26909	4	Schneider Electric	Acti9 A9A iOF/SD+OF t&b wire 0.1-6A aux	Auxiliary contact, Acti9 A9A, iOF/SD+OF, 2 C/O, 100mA to 6A, 24VAC to 415VAC, 24VDC to 130VDC, top and bottom connection	-Q 515 05;-Q 516 05;-Q 517 05;-Q 518 05
15.	SE.A9A26904	5	Schneider Electric	Auxiliary contact iOF, iC60	100mA-6A, 24VAC-415VAC, 24-130 VDC	-Q 515 05;-Q 516 05;-Q 517 05;-Q 518 05;-Q 585 04
16.	SE.C10F3TM050	2	Schneider Electric	Circuit breaker, ComPacT NSX100B	36kA/415VAC 3 poles TMD trip unit 50A	-QB 511 09;-QB 513 09
17.	SE.29450	4	Schneider Electric	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV	-QB 511 09;-QB 513 09
18.	SE.LV429337T	2	Schneider Electric	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40	-QB 511 09;-QB 513 09
19.	SE.LVS04033	2	Schneider Electric	LINERGY DP	LINERGY DP 3P D.BLK/COMPACT 250A 27HOLES	-QB 511 09;-QB 513 09

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Sorting number	Part number	Quantity	Manufacturer	Device	Device description	Device designation
20.	SE.LV429517	2	Schneider Electric	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250	-QB 511 09;-QB 513 09
21.	SE.GV2P32	4	Schneider Electric	Thermal Magnetic Motor Circuit Breaker TeSys GV2P - 3P - 24...32 A	Thermal Magnetic Motor Circuit Breaker TeSys GV2P - 3P - 24...32 A	-QB 512 09;-QB 514 09;-QB 519 09;-QB 520 09
22.	SE.GVAN20	4	Schneider Electric	TeSys GVAN20 - auxiliary contact block - 2 NO	TeSys GVAN20 - auxiliary contact block - 2 NO	-QB 512 09;-QB 514 09;-QB 519 09;-QB 520 09
23.	PXC.2954882	3	Phoenix Contact	Diode block	Diode module, with eight diodes, common anode, diode type 1N 5408	-R 592 05;-R 596 05;-R 600 05
24.	PXC.2954879	3	Phoenix Contact	Component for protective circuit	Diode module, with eight diodes, common cathode, diode type 1N 5408	-R 592 10;-R 596 10;-R 600 10
25.	SE.XPSBAC34AP	8	Schneider Electric	Safety module	Harmony Safety Automation Estop or guard ,Harmony XPS, connected to supply terminals 48-240 V AC/DC , no inputs, screw	-RP 561 11;-RP 563 11;-RP 565 11;-RP 567 11;-RP 569 11;-RP 571 11;-RP 585 04;-RP 585 12
26.	SE.XB4BD33	6	Schneider Electric	Selector switch, BLACK, 1-0-2, 2NO	Metal Black Ø22 3 positions 2 NO	-S 541 09;-S 544 09;-S 547 09;-S 550 09;-S 555 09;-S 558 09
27.	SE.ZBE101	24	Schneider Electric	Single contact block NO	Harmony XB4 Silver alloy 1 NO	-S 541 09;-S 544 09;-S 547 09;-S 550 09;-S 555 09;-S 558 09
28.	PXC.3209510	308	Phoenix Contact	PT 2,5 - Feed-through terminal block	Feed-through terminal block, nom. voltage: 800 V, nominal current: 24 A, number of connections: 2, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm2, cross section: 0.14 mm2 - 4 mm2, mounting type: NS 35/7,5, NS 35/15, color: gray	-X 515 05;-X 516 05;-X 517 05;-X 518 05;-X 531 05;-X 532 05;-X 541 04;-X 543 05;-X 544 04;-X 546 09;-X 547 04;-X 549 05;-X 550 04;-X 552 09;-X 553 08;-X 554 08;-X 555 04;-X 557 09;-X 558 04;-X 560 09;-X 569 05;-X 571 05;-X 585 04;-X 591 04;-X 595 04;-X 599 04;-X 611 03;-X 611 04;-X 611 08;-X 612 03;-XA 515 05;-XA 517 05;-XB 516 05;-XB 518 05;-XB 592 03;-XB 596 03;-XB 600 03
29.	SE.NSYTRV42SC	1	Schneider Electric	Feed-through terminal block	SCREW TERMINAL, KNIFE DISCONNECT, 2 POINTS, 4MM², GREY	-X 591 04

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Cable name: **4FGO101CR/ 4LKF006AR-S-01**

Cable type: **ETHERLINE Y CAT5 2X2XAWG22** No. of conn., diameter, length: **/**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
X150	=4LKF001AR+4LKF006AR/621.12	=4LKF001AR+4LKF006AR-TA 519 08	P1	**IE**	=4FGO101CR+4FGO101CR-AF2	P?:ETH	=4LKF001AR+4LKF006AR/621.12	

Cable name: **4FGO101CR/ 4LKF006AR-S-02**

Cable type: **ETHERLINE Y CAT5 2X2XAWG22** No. of conn., diameter, length: **/**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
X150	=4LKF001AR+4LKF006AR/622.12	=4LKF001AR+4LKF006AR-TA 520 08	P1	**IE**	=4FGO101CR+4FGO101CR-AF2	P?:ETH	=4LKF001AR+4LKF006AR/622.12	

Cable name: **4KLD002CQ/ 4LKF006AR-M-03**

Cable type: No. of conn., diameter, length: **/**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
VFD GROUP 2	=4LKF001AR+4LKF006AR/553.12	=4KLD002CQ+4KLD002CQ-X 044 03	A	**1RD**	=4LKF001AR+4LKF006AR-X 611 03	1:A	=4LKF001AR+4LKF006AR/553.12	VFD GROUP 2
4 FGO 003 MO LIGHT FUEL OIL PUMP 1	=4LKF001AR+4LKF006AR/553.13	=4KLD002CQ+4KLD002CQ-X 044 03	A	**1WH**	=4LKF001AR+4LKF006AR-X 611 03	2:A	=4LKF001AR+4LKF006AR/553.13	4 FGO 003 MO LIGHT FUEL OIL PUMP 1
4 CTE 064 PO COOLING WATER PUMP 2	=4LKF001AR+4LKF006AR/554.12	=4KLD002CQ+4KLD002CQ-X 044 07	A	**2RD**	=4LKF001AR+4LKF006AR-X 611 03	3:A	=4LKF001AR+4LKF006AR/554.12	4 CTE 064 PO COOLING WATER PUMP 2
4 FGO 004 MO LIGHT FUEL OIL PUMP 2	=4LKF001AR+4LKF006AR/554.13	=4KLD002CQ+4KLD002CQ-X 044 07	A	**2WH**	=4LKF001AR+4LKF006AR-X 611 03	4:A	=4LKF001AR+4LKF006AR/554.13	4 FGO 004 MO LIGHT FUEL OIL PUMP 2
	=4LKF001AR+4LKF006AR/557.9			**3RD**	=4LKF001AR+4LKF006AR-X 557 09	1:A	=4LKF001AR+4LKF006AR/557.9	
	=4LKF001AR+4LKF006AR/557.9			**3WH**	=4LKF001AR+4LKF006AR-X 557 09	2:A	=4LKF001AR+4LKF006AR/557.10	4 FGO 003 MO LIGHT FUEL OIL PUMP 1
	=4LKF001AR+4LKF006AR/560.9			**4RD**	=4LKF001AR+4LKF006AR-X 560 09	1:A	=4LKF001AR+4LKF006AR/560.9	
	=4LKF001AR+4LKF006AR/560.9			**4WH**	=4LKF001AR+4LKF006AR-X 560 09	2:A	=4LKF001AR+4LKF006AR/560.10	4 FGO 004 MO LIGHT FUEL OIL PUMP 2
4 FGO 003 MO LIGHT FUEL OIL PUMP 1	=4LKF001AR+4LKF006AR/553.13	4KLD002CQ/ 4LKF006AR-M-03			=4LKF001AR+4LKF006AR-PE		=4LKF001AR+4LKF006AR/553.13	
VFD GROUP 2	=4LKF001AR+4LKF006AR/553.12	4KLD002CQ/ 4LKF006AR-M-03			=4LKF001AR+4LKF006AR-PE		=4LKF001AR+4LKF006AR/560.10	

Cable name: **4LCA002CR/ 4LKF006AR-C-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **3G2.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
EMERG. MCC 6 VFD GROUP 1 24 VDC CONTROL VOLTAGE	=4LKF001AR+4LKF006AR/531.5	=4LKF001AR+4LKF006AR-X 531 05	1:A	**BN**	=4LCA002CR+4LCA002CR-X 021 12	1:A	=4LCA002CR+4LCA002CR/21.12	EMERG. MCC 6 VFD GROUP 1 24 VDC CONTROL VOLTAGE
24 VDC AUXILIARY POWER SUPPLY	=4LKF001AR+4LKF006AR/531.5	=4LKF001AR+4LKF006AR-X 531 05	5:A	**BU**	=4LCA002CR+4LCA002CR-X 021 12	3:A	=4LCA002CR+4LCA002CR/21.12	=
	=4LKF001AR+4LKF006AR/531.6	=4LKF001AR+4LKF006AR-PE		**GNYE**	=4LCA002CR+4LCA002CR-PE		=4LKF001AR+4LKF006AR/531.6	

Cable name: **4LCA002CR/ 4LKF006AR-C-02**

Cable type: **U1000R2V** No. of conn., diameter, length: **3G2.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
EMERG. MCC 6 VFD GROUP 2 24 VDC CONTROL VOLTAGE	=4LKF001AR+4LKF006AR/532.5	=4LKF001AR+4LKF006AR-X 532 05	1:A	**BN**	=4LCA002CR+4LCA002CR-X 021 14	1:A	=4LCA002CR+4LCA002CR/21.14	EMERG. MCC 6 VFD GROUP 2 24 VDC CONTROL VOLTAGE
24 VDC AUXILIARY POWER SUPPLY	=4LKF001AR+4LKF006AR/532.5	=4LKF001AR+4LKF006AR-X 532 05	5:A	**BU**	=4LCA002CR+4LCA002CR-X 021 14	3:A	=4LCA002CR+4LCA002CR/21.15	=
	=4LKF001AR+4LKF006AR/532.6	=4LKF001AR+4LKF006AR-PE		**GNYE**	=4LCA002CR+4LCA002CR-PE		=4LKF001AR+4LKF006AR/532.6	

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Cable name: **4LKF006AR/ 4CTE063PO-B-01**

Remark:

Cable type: **2XSLCYK-JB EMV-UV** No. of conn., diameter, length: **3x6+3x1 mm² /**

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF006AR/512.9	=4LKF001AR+4LKF006AR-TA 512 08	U2	**BN**	=4CTE063PO+4CTE063PO-M1	U1	=4LKF001AR+4LKF006AR/512.9	
4 CTE 063 PO COOLING WATER PUMP 1	=4LKF001AR+4LKF006AR/512.9	=4LKF001AR+4LKF006AR-TA 512 08	V2	**BK**	=4CTE063PO+4CTE063PO-M1	V1	=4LKF001AR+4LKF006AR/512.9	
	=4LKF001AR+4LKF006AR/512.9	=4LKF001AR+4LKF006AR-TA 512 08	W2	**GY**	=4CTE063PO+4CTE063PO-M1	W1	=4LKF001AR+4LKF006AR/512.9	
				GNYE				
				GNYE				
				GNYE				
4 CTE 063 PO COOLING WATER PUMP 1	=4LKF001AR+4LKF006AR/512.9			**SH**	=4CTE063PO+4CTE063PO-M1	PE	=4LKF001AR+4LKF006AR/512.9	

Cable name: **4LKF006AR/ 4CTE063PO-C-01**

Remark:

Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF006AR/563.5	=4LKF001AR+4LKF006AR-X 516 05	5:A	**BN**	=4CTE063PO+4CTE063PO-X?	?:B	=4LKF001AR+4LKF006AR/563.5	
	=4LKF001AR+4LKF006AR/563.5	=4LKF001AR+4LKF006AR-X 516 05	29:A	**BK**	=4CTE063PO+4CTE063PO-X?	?:A	=4LKF001AR+4LKF006AR/563.5	
	=4LKF001AR+4LKF006AR/564.8	=4LKF001AR+4LKF006AR-X 516 05	33:A	**GY**	=4CTE063PO+4CTE063PO-X?	?:B	=4LKF001AR+4LKF006AR/564.8	
	=4LKF001AR+4LKF006AR/564.8	=4LKF001AR+4LKF006AR-X 516 05	32:A	**BU**	=4CTE063PO+4CTE063PO-X?	?:A	=4LKF001AR+4LKF006AR/564.8	
	=4LKF001AR+4LKF006AR/611.7	=4LKF001AR+4LKF006AR-PE		**GNYE**	=4ERF264CA+4ERF264CA-PE		=4LKF001AR+4LKF006AR/611.7	

Cable name: **4LKF006AR/ 4CTE064PO-B-01**

Remark:

Cable type: **2XSLCYK-JB EMV-UV** No. of conn., diameter, length: **3x6+3x1 mm² /**

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF006AR/514.9	=4LKF001AR+4LKF006AR-TA 514 08	U2	**BN**	=4CTE064PO+4CTE064PO-M1	U1	=4LKF001AR+4LKF006AR/514.9	
4 CTE 064 PO COOLING WATER PUMP 2	=4LKF001AR+4LKF006AR/514.9	=4LKF001AR+4LKF006AR-TA 514 08	V2	**BK**	=4CTE064PO+4CTE064PO-M1	V1	=4LKF001AR+4LKF006AR/514.9	
	=4LKF001AR+4LKF006AR/514.9	=4LKF001AR+4LKF006AR-TA 514 08	W2	**GY**	=4CTE064PO+4CTE064PO-M1	W1	=4LKF001AR+4LKF006AR/514.9	
				GNYE				
				GNYE				
				GNYE				
4 CTE 064 PO COOLING WATER PUMP 2	=4LKF001AR+4LKF006AR/514.9			**SH**	=4CTE064PO+4CTE064PO-M1	PE	=4LKF001AR+4LKF006AR/514.9	

Cable name: **4LKF006AR/ 4CTE064PO-C-01**

Remark:

Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF006AR/567.5	=4LKF001AR+4LKF006AR-X 518 05	5:A	**BN**	=4CTE064PO+4CTE064PO-X?	?:B	=4LKF001AR+4LKF006AR/567.5	
	=4LKF001AR+4LKF006AR/567.5	=4LKF001AR+4LKF006AR-X 518 05	29:A	**BK**	=4CTE064PO+4CTE064PO-X?	?:A	=4LKF001AR+4LKF006AR/567.5	
	=4LKF001AR+4LKF006AR/568.8	=4LKF001AR+4LKF006AR-X 518 05	33:A	**GY**	=4CTE064PO+4CTE064PO-X?	?:B	=4LKF001AR+4LKF006AR/568.8	
	=4LKF001AR+4LKF006AR/568.8	=4LKF001AR+4LKF006AR-X 518 05	32:A	**BU**	=4CTE064PO+4CTE064PO-X?	?:A	=4LKF001AR+4LKF006AR/568.8	
	=4LKF001AR+4LKF006AR/612.10	=4LKF001AR+4LKF006AR-PE		**GNYE**	=4ERF269CA+4ERF269CA-PE		=4LKF001AR+4LKF006AR/612.10	

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Cable name: **4LKF006AR/ 4FGO003CA-C-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
VFD GROUP 2	=4LKF001AR+4LKF006AR/562.12	=4LKF001AR+4LKF006AR-X 516 05	4:B	**BN**	=4FGO003CA+4FGO003CA-X?	?:B	=4LKF001AR+4LKF006AR/569.5	
	=4LKF001AR+4LKF006AR/569.5	=4LKF001AR+4LKF006AR-X 569 05	1:A	**BK**	=4FGO003CA+4FGO003CA-X?	?:A	=4LKF001AR+4LKF006AR/569.5	
4 FGO 003 MO LIGHT FUEL OIL PUMP 1	=4LKF001AR+4LKF006AR/570.8	=4LKF001AR+4LKF006AR-X 569 05	5:A	**GY**	=4FGO003CA+4FGO003CA-X?	?:B	=4LKF001AR+4LKF006AR/570.8	4 FGO 003 MO LIGHT FUEL OIL PUMP 1
=	=4LKF001AR+4LKF006AR/570.8	=4LKF001AR+4LKF006AR-X 569 05	4:A	**BU**	=4FGO003CA+4FGO003CA-X?	?:A	=4LKF001AR+4LKF006AR/570.8	=
	=4LKF001AR+4LKF006AR/611.11	=4LKF001AR+4LKF006AR-PE		**GNYE**	=4FGO003CA+4FGO003CA-PE		=4LKF001AR+4LKF006AR/611.10	

Cable name: **4LKF006AR/ 4FGO003MO-B-01**

Cable type: **2XSLCYK-JB EMV-UV** No. of conn., diameter, length: **3x6+3x1 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF006AR/519.9	=4LKF001AR+4LKF006AR-TA 519 08	U2	**BN**	=4FGO003MO+4FGO003MO-M1	U1	=4LKF001AR+4LKF006AR/519.9	LIGHT FUEL OIL PUMP 1
4 FGO 003 MO LIGHT FUEL OIL PUMP 1	=4LKF001AR+4LKF006AR/519.9	=4LKF001AR+4LKF006AR-TA 519 08	V2	**BK**	=4FGO003MO+4FGO003MO-M1	V1	=4LKF001AR+4LKF006AR/519.9	=
	=4LKF001AR+4LKF006AR/519.9	=4LKF001AR+4LKF006AR-TA 519 08	W2	**GY**	=4FGO003MO+4FGO003MO-M1	W1	=4LKF001AR+4LKF006AR/519.9	=
				GNYE				
				GNYE				
				GNYE				
4 FGO 003 MO LIGHT FUEL OIL PUMP 1	=4LKF001AR+4LKF006AR/519.9			**SH**	=4FGO003MO+4FGO003MO-M1	PE	=4LKF001AR+4LKF006AR/519.9	LIGHT FUEL OIL PUMP 1

Cable name: **4LKF006AR/ 4FGO004CA-C-01**

Cable type: **U1000R2V** No. of conn., diameter, length: **5G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
VFD GROUP 2	=4LKF001AR+4LKF006AR/566.12	=4LKF001AR+4LKF006AR-X 518 05	4:B	**BN**	=4FGO004CA+4FGO004CA-X?	?:B	=4LKF001AR+4LKF006AR/571.5	
	=4LKF001AR+4LKF006AR/571.5	=4LKF001AR+4LKF006AR-X 571 05	1:A	**BK**	=4FGO004CA+4FGO004CA-X?	?:A	=4LKF001AR+4LKF006AR/571.5	
4 FGO 004 MO LIGHT FUEL OIL PUMP 2	=4LKF001AR+4LKF006AR/572.8	=4LKF001AR+4LKF006AR-X 571 05	5:A	**GY**	=4FGO004CA+4FGO004CA-X?	?:B	=4LKF001AR+4LKF006AR/572.8	4 FGO 004 MO LIGHT FUEL OIL PUMP 2
=	=4LKF001AR+4LKF006AR/572.8	=4LKF001AR+4LKF006AR-X 571 05	4:A	**BU**	=4FGO004CA+4FGO004CA-X?	?:A	=4LKF001AR+4LKF006AR/572.8	=
	=4LKF001AR+4LKF006AR/612.13	=4LKF001AR+4LKF006AR-PE		**GNYE**	=4FGO004CA+4FGO004CA-PE		=4LKF001AR+4LKF006AR/612.13	

Cable name: **4LKF006AR/ 4FGO004MO-B-01**

Cable type: **2XSLCYK-JB EMV-UV** No. of conn., diameter, length: **3x6+3x1 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF006AR/520.9	=4LKF001AR+4LKF006AR-TA 520 08	U2	**BN**	=4FGO004MO+4FGO004MO-M1	U1	=4LKF001AR+4LKF006AR/520.9	LIGHT FUEL OIL PUMP 2
4 FGO 004 MO LIGHT FUEL OIL PUMP 2	=4LKF001AR+4LKF006AR/520.9	=4LKF001AR+4LKF006AR-TA 520 08	V2	**BK**	=4FGO004MO+4FGO004MO-M1	V1	=4LKF001AR+4LKF006AR/520.9	=
	=4LKF001AR+4LKF006AR/520.9	=4LKF001AR+4LKF006AR-TA 520 08	W2	**GY**	=4FGO004MO+4FGO004MO-M1	W1	=4LKF001AR+4LKF006AR/520.9	=
				GNYE				
				GNYE				
				GNYE				
4 FGO 004 MO LIGHT FUEL OIL PUMP 2	=4LKF001AR+4LKF006AR/520.9			**SH**	=4FGO004MO+4FGO004MO-M1	PE	=4LKF001AR+4LKF006AR/520.9	LIGHT FUEL OIL PUMP 2

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Cable name: **4LKF006AR/ 4KLD002CQ-C-05**

Cable type: **U1000R2V** No. of conn., diameter, length: **7G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
4 FGO 003 MO LIGHT FUEL OIL PUMP 1	=4LKF001AR+4LKF006AR/570.5	=4KLD002CQ+4KLD002CQ-X?	?:B	**1**	=4LKF001AR+4LKF006AR-X 569 05	2:A	=4LKF001AR+4LKF006AR/570.5	4 FGO 003 MO LIGHT FUEL OIL PUMP 1
=	=4LKF001AR+4LKF006AR/570.5	=4KLD002CQ+4KLD002CQ-X?	?:A	**2**	=4LKF001AR+4LKF006AR-X 569 05	3:A	=4LKF001AR+4LKF006AR/570.5	=
4 FGO 004 MO LIGHT FUEL OIL PUMP 2	=4LKF001AR+4LKF006AR/572.5	=4KLD002CQ+4KLD002CQ-X?	?:B	**3**	=4LKF001AR+4LKF006AR-X 571 05	2:A	=4LKF001AR+4LKF006AR/572.5	4 FGO 004 MO LIGHT FUEL OIL PUMP 2
=	=4LKF001AR+4LKF006AR/572.5	=4KLD002CQ+4KLD002CQ-X?	?:A	**4**	=4LKF001AR+4LKF006AR-X 571 05	3:A	=4LKF001AR+4LKF006AR/572.5	=
	=4KLD002CQ+4KLD002CQ/255.10	=4KLD002CQ+4KLD002CQ-X 251 03	135:A	**5**	=4LKF001AR+4LKF006AR-X 611 04	5:A	=4LKF001AR+4LKF006AR/611.12	
	=4KLD002CQ+4KLD002CQ/255.11	=4KLD002CQ+4KLD002CQ-X 251 03	136:A	**6**	=4LKF001AR+4LKF006AR-X 611 04	6:A	=4LKF001AR+4LKF006AR/611.13	
	=4LKF001AR+4LKF006AR/611.14	=4KLD002CQ+4KLD002CQ-PE		**GNYE**	=4LKF001AR+4LKF006AR-PE		=4LKF001AR+4LKF006AR/611.14	

Cable name: **4LKF006AR/ 4KLD002CQ-C-06**

Cable type: **U1000R2V** No. of conn., diameter, length: **7G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
4 FGO 003 MO LIGHT FUEL OIL PUMP 1	=4LKF001AR+4LKF006AR/555.12	=4KLD002CQ+4KLD002CQ-X?	?:B	**1**	=4LKF001AR+4LKF006AR-X 555 04	4:A	=4LKF001AR+4LKF006AR/555.12	4 FGO 003 MO LIGHT FUEL OIL PUMP 1
=	=4LKF001AR+4LKF006AR/555.12	=4KLD002CQ+4KLD002CQ-X?	?:A	**2**	=4LKF001AR+4LKF006AR-X 555 04	7:A	=4LKF001AR+4LKF006AR/555.12	=
VFD GROUP 2	=4LKF001AR+4LKF006AR/558.12	=4KLD002CQ+4KLD002CQ-X?	?:B	**3**	=4LKF001AR+4LKF006AR-X 558 04	4:A	=4LKF001AR+4LKF006AR/558.12	VFD GROUP 2
=	=4LKF001AR+4LKF006AR/558.12	=4KLD002CQ+4KLD002CQ-X?	?:A	**4**	=4LKF001AR+4LKF006AR-X 558 04	7:A	=4LKF001AR+4LKF006AR/558.12	=
	=4KLD002CQ+4KLD002CQ/255.15	=4KLD002CQ+4KLD002CQ-X 251 03	137:A	**5**	=4LKF001AR+4LKF006AR-X 611 04	7:A	=4LKF001AR+4LKF006AR/611.3	
	=4KLD002CQ+4KLD002CQ/255.15	=4KLD002CQ+4KLD002CQ-X 251 03	138:A	**6**	=4LKF001AR+4LKF006AR-X 611 04	8:A	=4LKF001AR+4LKF006AR/611.4	
	=4LKF001AR+4LKF006AR/611.4	=4KLD002CQ+4KLD002CQ-PE		**GNYE**	=4LKF001AR+4LKF006AR-PE		=4LKF001AR+4LKF006AR/611.5	

Cable name: **4LKF006AR/ 4SDX001PO-B-01**

Cable type: **2XSLCYK-JB EMV-UV** No. of conn., diameter, length: **3x6+3x1 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF006AR/511.9	=4LKF001AR+4LKF006AR-TA 511 08	U2	**BN**	=4SDX001PO+4SDX001PO-M1	U1	=4LKF001AR+4LKF006AR/511.9	
	=4LKF001AR+4LKF006AR/511.9	=4LKF001AR+4LKF006AR-TA 511 08	V2	**BK**	=4SDX001PO+4SDX001PO-M1	V1	=4LKF001AR+4LKF006AR/511.9	
	=4LKF001AR+4LKF006AR/511.9	=4LKF001AR+4LKF006AR-TA 511 08	W2	**GY**	=4SDX001PO+4SDX001PO-M1	W1	=4LKF001AR+4LKF006AR/511.9	
				GNYE				
				GNYE				
				GNYE				
	=4LKF001AR+4LKF006AR/511.9			**SH**	=4SDX001PO+4SDX001PO-M1	PE	=4LKF001AR+4LKF006AR/511.9	

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Cable name: **4LKF006AR/ 4SDX001PO-C-01**

Cable type: **U1000R2V** — No. of conn., diameter, length: **5G1.5 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF006AR/561.5	=4LKF001AR+4LKF006AR-X 516 05	2:A	**BN**	=4SDX001PO+4SDX001PO-X?	?:B	=4LKF001AR+4LKF006AR/561.5	
	=4LKF001AR+4LKF006AR/561.5	=4LKF001AR+4LKF006AR-X 516 05	23:A	**BK**	=4SDX001PO+4SDX001PO-X?	?:A	=4LKF001AR+4LKF006AR/561.5	
	=4LKF001AR+4LKF006AR/562.8	=4LKF001AR+4LKF006AR-X 516 05	27:A	**GY**	=4SDX001PO+4SDX001PO-X?	?:B	=4LKF001AR+4LKF006AR/562.8	
	=4LKF001AR+4LKF006AR/562.8	=4LKF001AR+4LKF006AR-X 516 05	26:A	**BU**	=4SDX001PO+4SDX001PO-X?	?:A	=4LKF001AR+4LKF006AR/562.8	
	=4LKF001AR+4LKF006AR/611.4	=4LKF001AR+4LKF006AR-PE		**GNYE**	=4SEO209CA+4SEO209CA-PE		=4LKF001AR+4LKF006AR/611.3	

Cable name: **4LKF006AR/ 4SDX001PO-M-01**

Cable type: **04IP09EISF BU** — No. of conn., diameter, length: **4x2x0.88 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
VFD GROUP 2	=4LKF001AR+4LKF006AR/543.12		2R1:A	**1RD**	=4LKF001AR+4LKF006AR-X 543 05	3:A	=4LKF001AR+4LKF006AR/543.12	VFD GROUP 2
=	=4LKF001AR+4LKF006AR/543.12		2R2:A	**1WH**	=4LKF001AR+4LKF006AR-X 543 05	4:A	=4LKF001AR+4LKF006AR/543.12	=
				2RD				
				2WH				
				3RD				
				3WH				
				4RD				
				4WH				

Cable name: **4LKF006AR/ TA 511 08-A**

Cable type: **U1000R2V** — No. of conn., diameter, length: **4G6 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF006AR/511.9	=4LKF001AR+4LKF006AR-QB 511 09	2	**BN**	=4LKF001AR+4LKF006AR-TA 511 08	L1	=4LKF001AR+4LKF006AR/511.9	
	=4LKF001AR+4LKF006AR/511.9	=4LKF001AR+4LKF006AR-QB 511 09	4	**BK**	=4LKF001AR+4LKF006AR-TA 511 08	L2	=4LKF001AR+4LKF006AR/511.9	
	=4LKF001AR+4LKF006AR/511.9	=4LKF001AR+4LKF006AR-QB 511 09	6	**GY**	=4LKF001AR+4LKF006AR-TA 511 08	L3	=4LKF001AR+4LKF006AR/511.9	
				GNYE				
	=4LKF001AR+4LKF006AR/511.12	=4LKF001AR+4LKF006AR-PE		**GNYE**	=4LKF001AR+4LKF006AR-TA 511 08	SH(1)	=4LKF001AR+4LKF006AR/511.10	

Cable name: **4LKF006AR/ TA 512 08-A**

Cable type: **U1000R2V** — No. of conn., diameter, length: **4G6 mm² /**

Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF006AR/512.9	=4LKF001AR+4LKF006AR-QB 512 09	2	**BN**	=4LKF001AR+4LKF006AR-TA 512 08	L1	=4LKF001AR+4LKF006AR/512.9	
	=4LKF001AR+4LKF006AR/512.9	=4LKF001AR+4LKF006AR-QB 512 09	4	**BK**	=4LKF001AR+4LKF006AR-TA 512 08	L2	=4LKF001AR+4LKF006AR/512.9	4 CTE 063 PO COOLING WATER PUMP 1
	=4LKF001AR+4LKF006AR/512.9	=4LKF001AR+4LKF006AR-QB 512 09	6	**GY**	=4LKF001AR+4LKF006AR-TA 512 08	L3	=4LKF001AR+4LKF006AR/512.9	
				GNYE				
	=4LKF001AR+4LKF006AR/512.12	=4LKF001AR+4LKF006AR-PE		**GNYE**	=4LKF001AR+4LKF006AR-TA 512 08	SH(1)	=4LKF001AR+4LKF006AR/512.10	

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Cable name: **4LKF006AR/ TA 513 08-A**
Cable type: **U1000R2V** No. of conn., diameter, length: **4G6 mm² /**
Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF006AR/513.9	=4LKF001AR+4LKF006AR-QB 513 09	2	**BN**	=4LKF001AR+4LKF006AR-TA 513 08	L1	=4LKF001AR+4LKF006AR/513.9	
	=4LKF001AR+4LKF006AR/513.9	=4LKF001AR+4LKF006AR-QB 513 09	4	**BK**	=4LKF001AR+4LKF006AR-TA 513 08	L2	=4LKF001AR+4LKF006AR/513.9	SPARE
	=4LKF001AR+4LKF006AR/513.9	=4LKF001AR+4LKF006AR-QB 513 09	6	**GY**	=4LKF001AR+4LKF006AR-TA 513 08	L3	=4LKF001AR+4LKF006AR/513.9	
				GNYE				
	=4LKF001AR+4LKF006AR/513.12	=4LKF001AR+4LKF006AR-PE		**GNYE**	=4LKF001AR+4LKF006AR-TA 513 08	SH(1)	=4LKF001AR+4LKF006AR/513.10	

Cable name: **4LKF006AR/ TA 514 08-A**
Cable type: **U1000R2V** No. of conn., diameter, length: **4G6 mm² /**
Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF006AR/514.9	=4LKF001AR+4LKF006AR-QB 514 09	2	**BN**	=4LKF001AR+4LKF006AR-TA 514 08	L1	=4LKF001AR+4LKF006AR/514.9	
	=4LKF001AR+4LKF006AR/514.9	=4LKF001AR+4LKF006AR-QB 514 09	4	**BK**	=4LKF001AR+4LKF006AR-TA 514 08	L2	=4LKF001AR+4LKF006AR/514.9	4 CTE 064 PO COOLING WATER PUMP 2
	=4LKF001AR+4LKF006AR/514.9	=4LKF001AR+4LKF006AR-QB 514 09	6	**GY**	=4LKF001AR+4LKF006AR-TA 514 08	L3	=4LKF001AR+4LKF006AR/514.9	
				GNYE				
	=4LKF001AR+4LKF006AR/514.12	=4LKF001AR+4LKF006AR-PE		**GNYE**	=4LKF001AR+4LKF006AR-TA 514 08	SH(1)	=4LKF001AR+4LKF006AR/514.10	

Cable name: **4LKF006AR/ TA 519 08-A**
Cable type: **U1000R2V** No. of conn., diameter, length: **4G6 mm² /**
Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF006AR/519.9	=4LKF001AR+4LKF006AR-QB 519 09	2	**BN**	=4LKF001AR+4LKF006AR-TA 519 08	L1	=4LKF001AR+4LKF006AR/519.9	
	=4LKF001AR+4LKF006AR/519.9	=4LKF001AR+4LKF006AR-QB 519 09	4	**BK**	=4LKF001AR+4LKF006AR-TA 519 08	L2	=4LKF001AR+4LKF006AR/519.9	4 FGO 003 MO LIGHT FUEL OIL PUMP 1
	=4LKF001AR+4LKF006AR/519.9	=4LKF001AR+4LKF006AR-QB 519 09	6	**GY**	=4LKF001AR+4LKF006AR-TA 519 08	L3	=4LKF001AR+4LKF006AR/519.9	
				GNYE				
	=4LKF001AR+4LKF006AR/519.12	=4LKF001AR+4LKF006AR-PE		**GNYE**	=4LKF001AR+4LKF006AR-TA 519 08	SH(1)	=4LKF001AR+4LKF006AR/519.10	

Cable name: **4LKF006AR/ TA 520 08-A**
Cable type: **U1000R2V** No. of conn., diameter, length: **4G6 mm² /**
Remark:

Function text	Page / Column	FROM	Terminal	Conductor	TO	Terminal	Page / Column	Function text
	=4LKF001AR+4LKF006AR/520.9	=4LKF001AR+4LKF006AR-QB 520 09	2	**BN**	=4LKF001AR+4LKF006AR-TA 520 08	L1	=4LKF001AR+4LKF006AR/520.9	
	=4LKF001AR+4LKF006AR/520.9	=4LKF001AR+4LKF006AR-QB 520 09	4	**BK**	=4LKF001AR+4LKF006AR-TA 520 08	L2	=4LKF001AR+4LKF006AR/520.9	4 FGO 004 MO LIGHT FUEL OIL PUMP 2
	=4LKF001AR+4LKF006AR/520.9	=4LKF001AR+4LKF006AR-QB 520 09	6	**GY**	=4LKF001AR+4LKF006AR-TA 520 08	L3	=4LKF001AR+4LKF006AR/520.9	
				GNYE				
	=4LKF001AR+4LKF006AR/520.12	=4LKF001AR+4LKF006AR-PE		**GNYE**	=4LKF001AR+4LKF006AR-TA 520 08	SH(1)	=4LKF001AR+4LKF006AR/520.10	

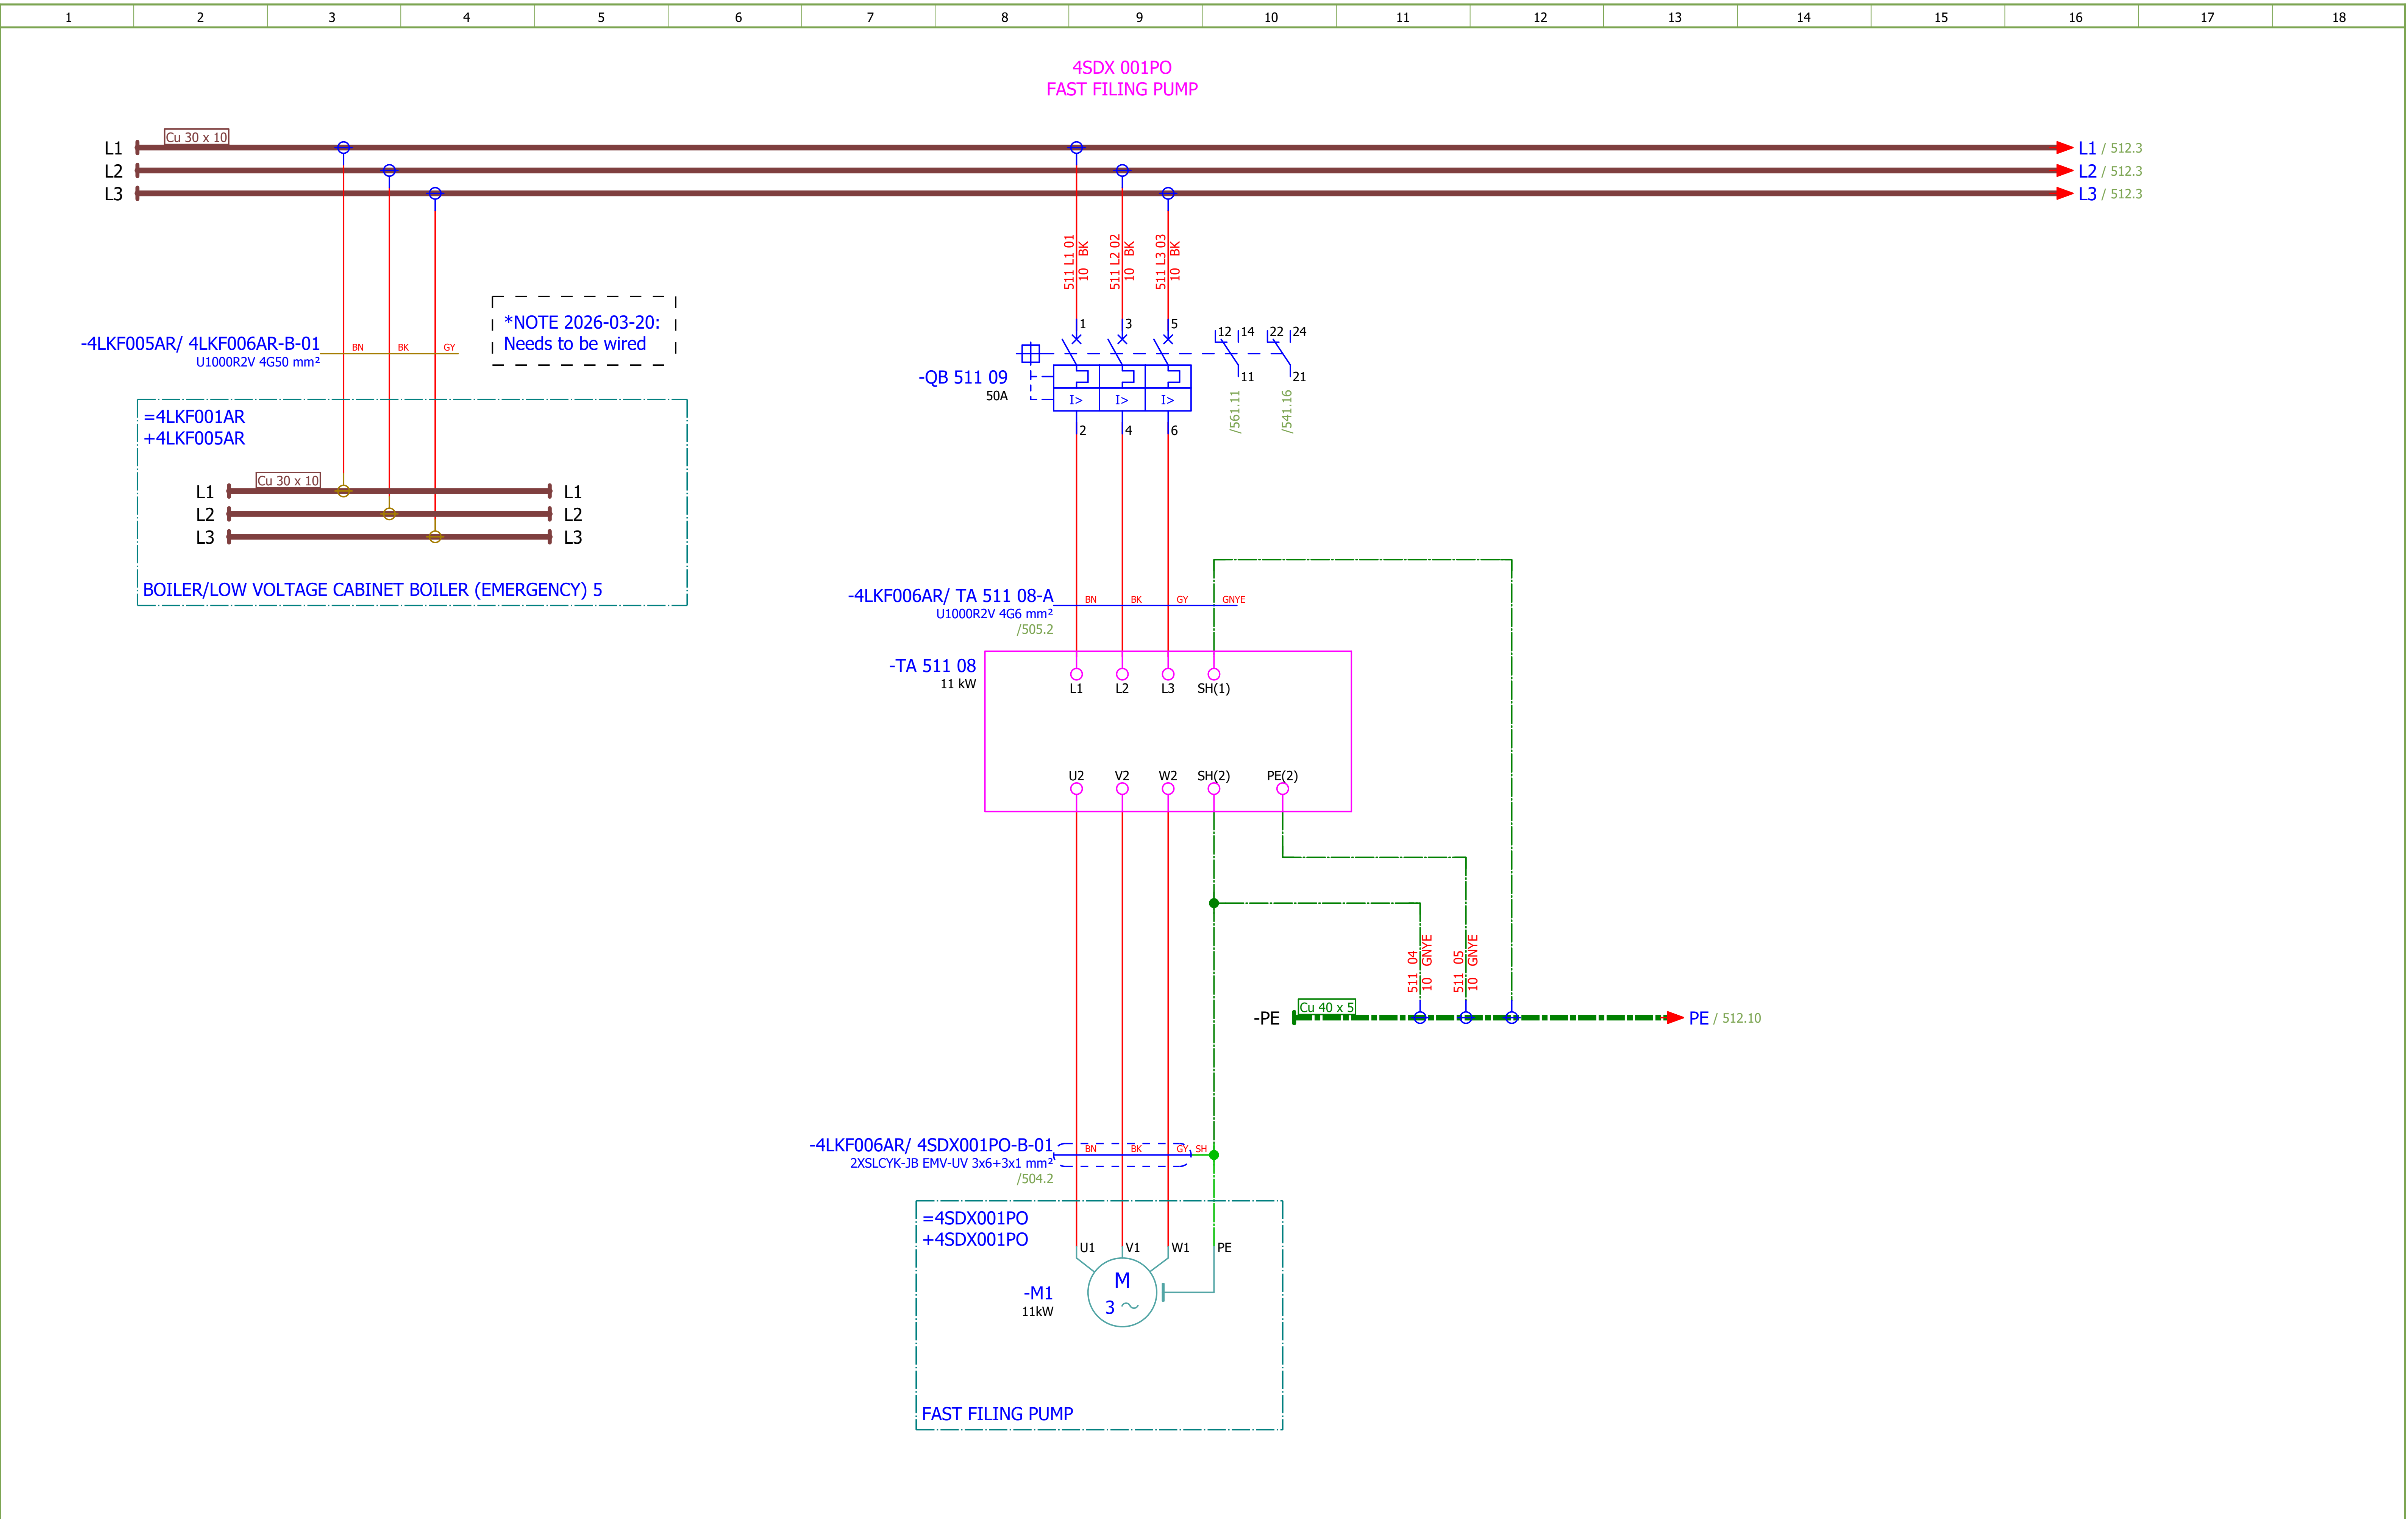

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F	#D
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: FAST FILING PUMP - MAIN POWER SUPPLY	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 511
Format:	A3								+4LKF006AR	Next: 512

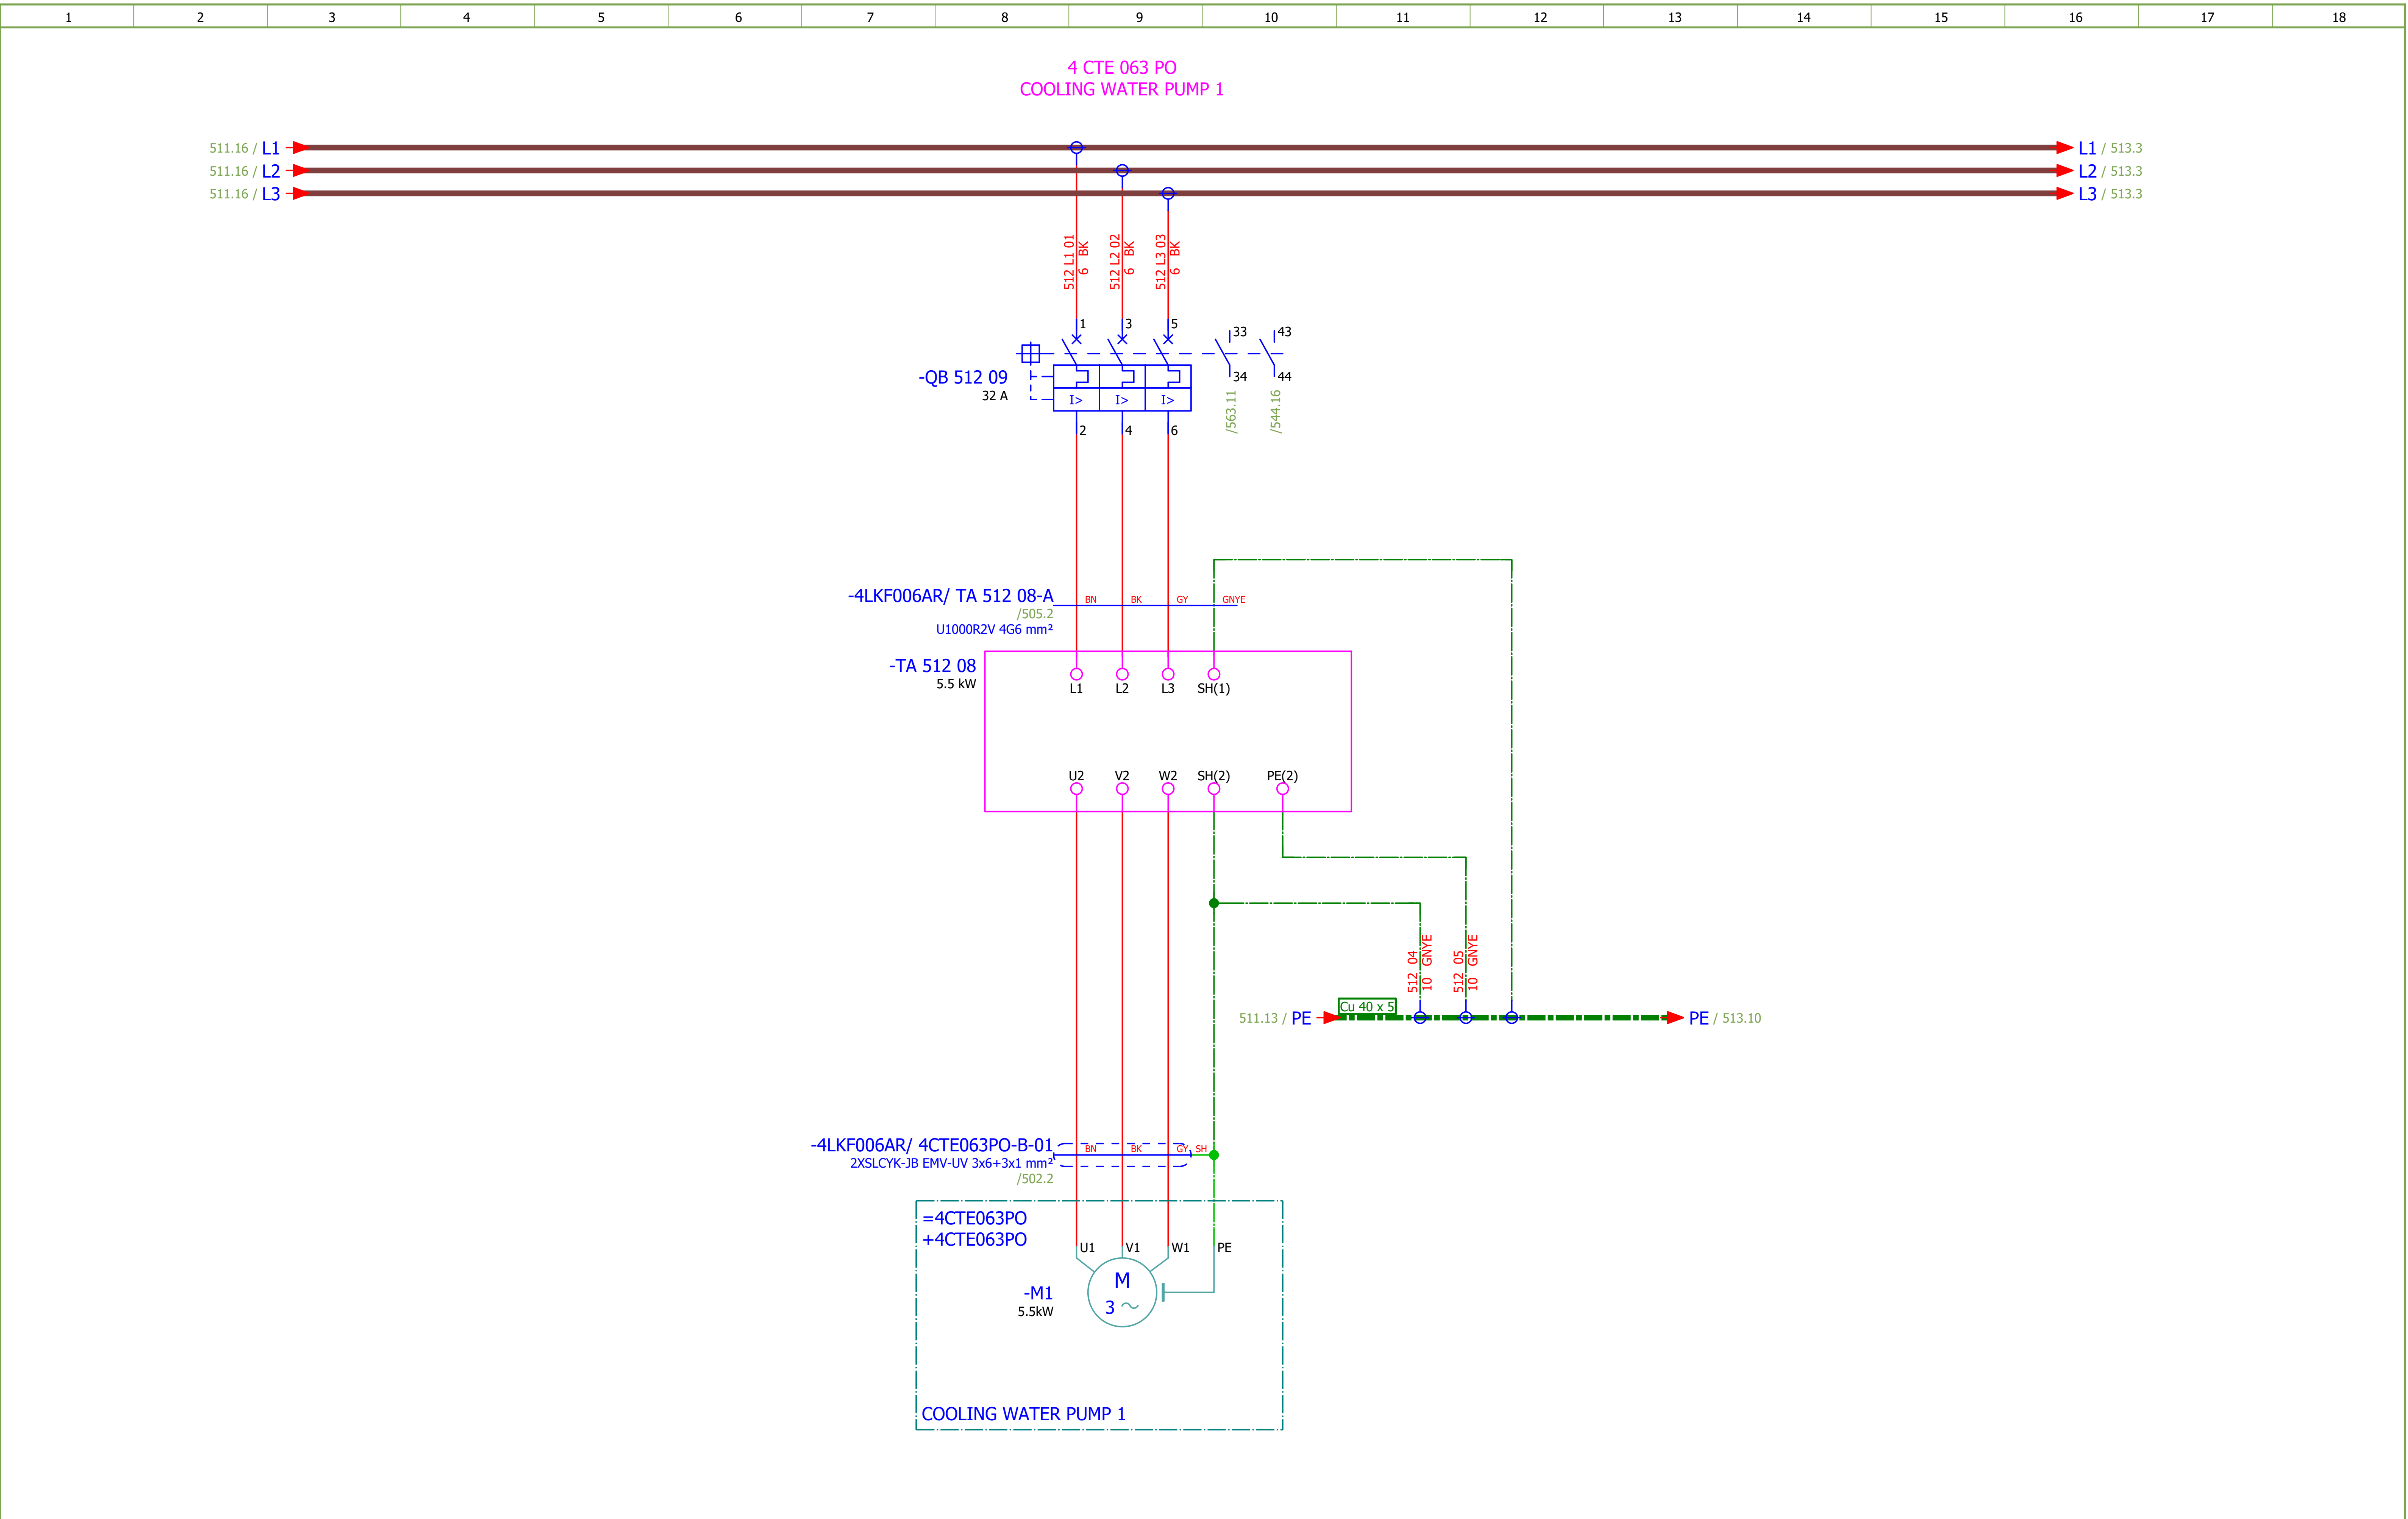

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević								#D
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 1 - MAIN POWER SUPPLY	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 512
Format:	A3							+4LKF006AR	Next: 513

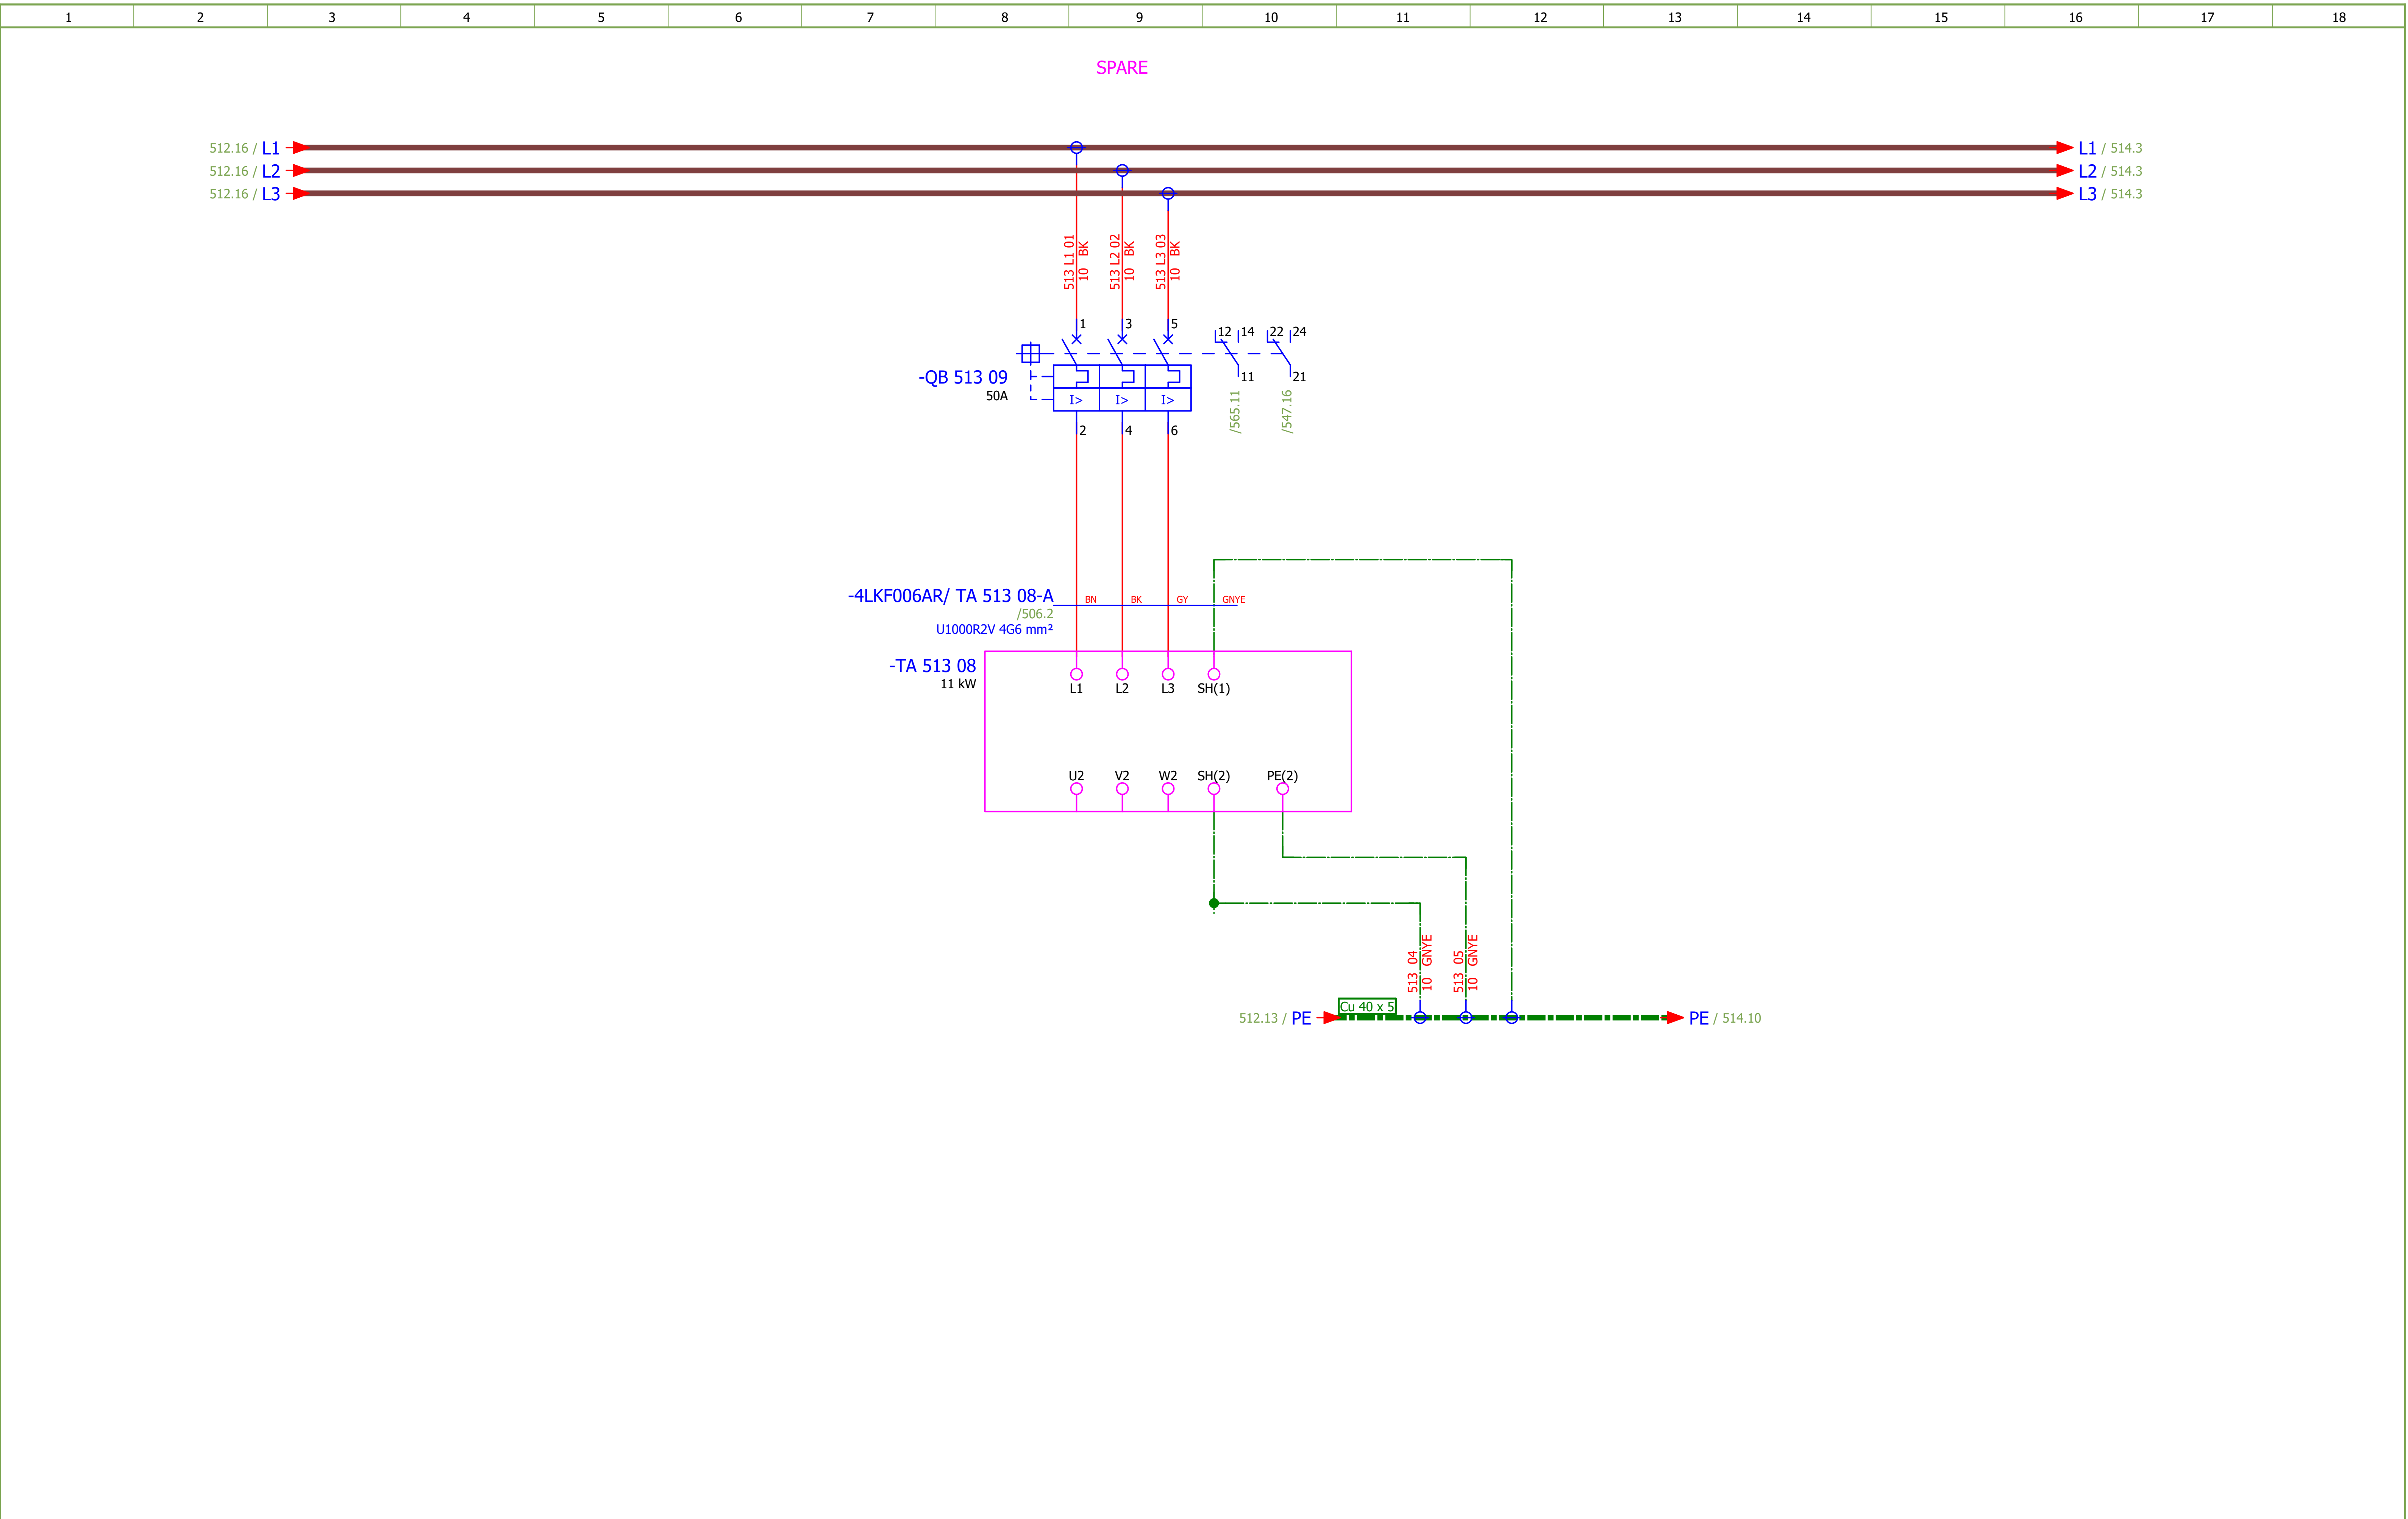

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F	#D
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 513
Format:	A3								+4LKF006AR	Next: 514

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

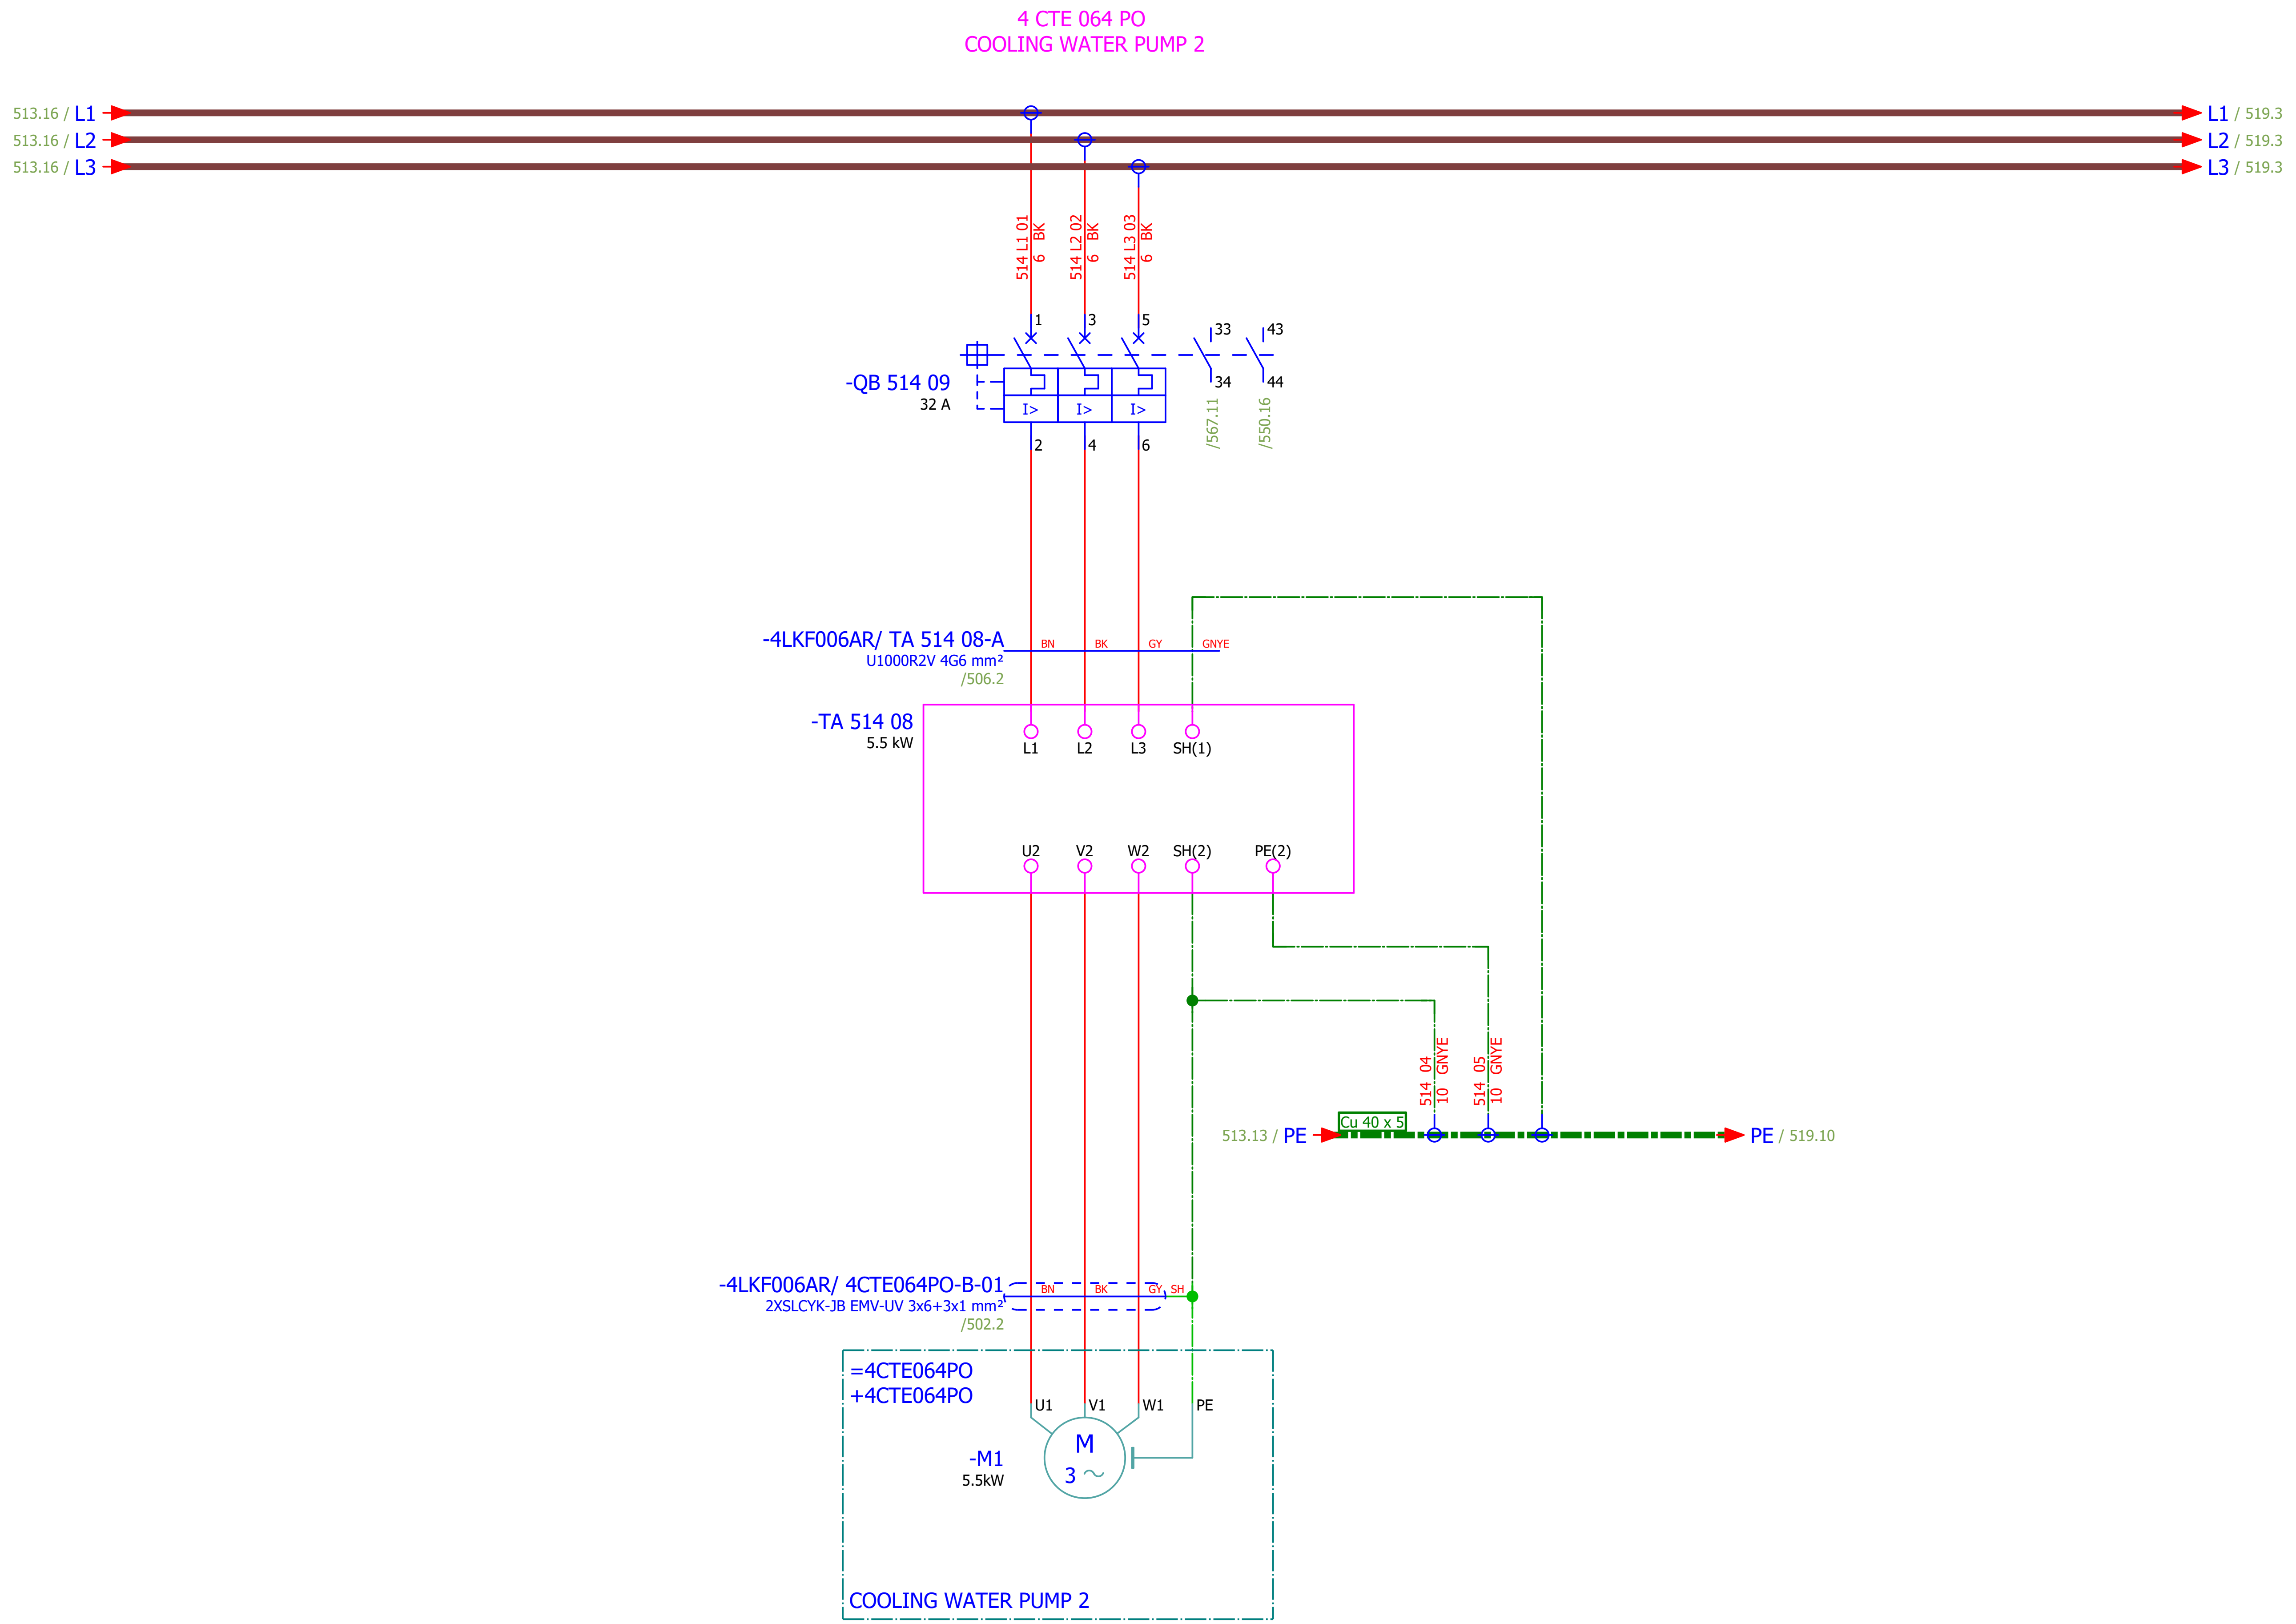

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F	#D
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 2 - MAIN POWER SUPPLY	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 514
Format:	A3								+4LKF006AR	Next: 515

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

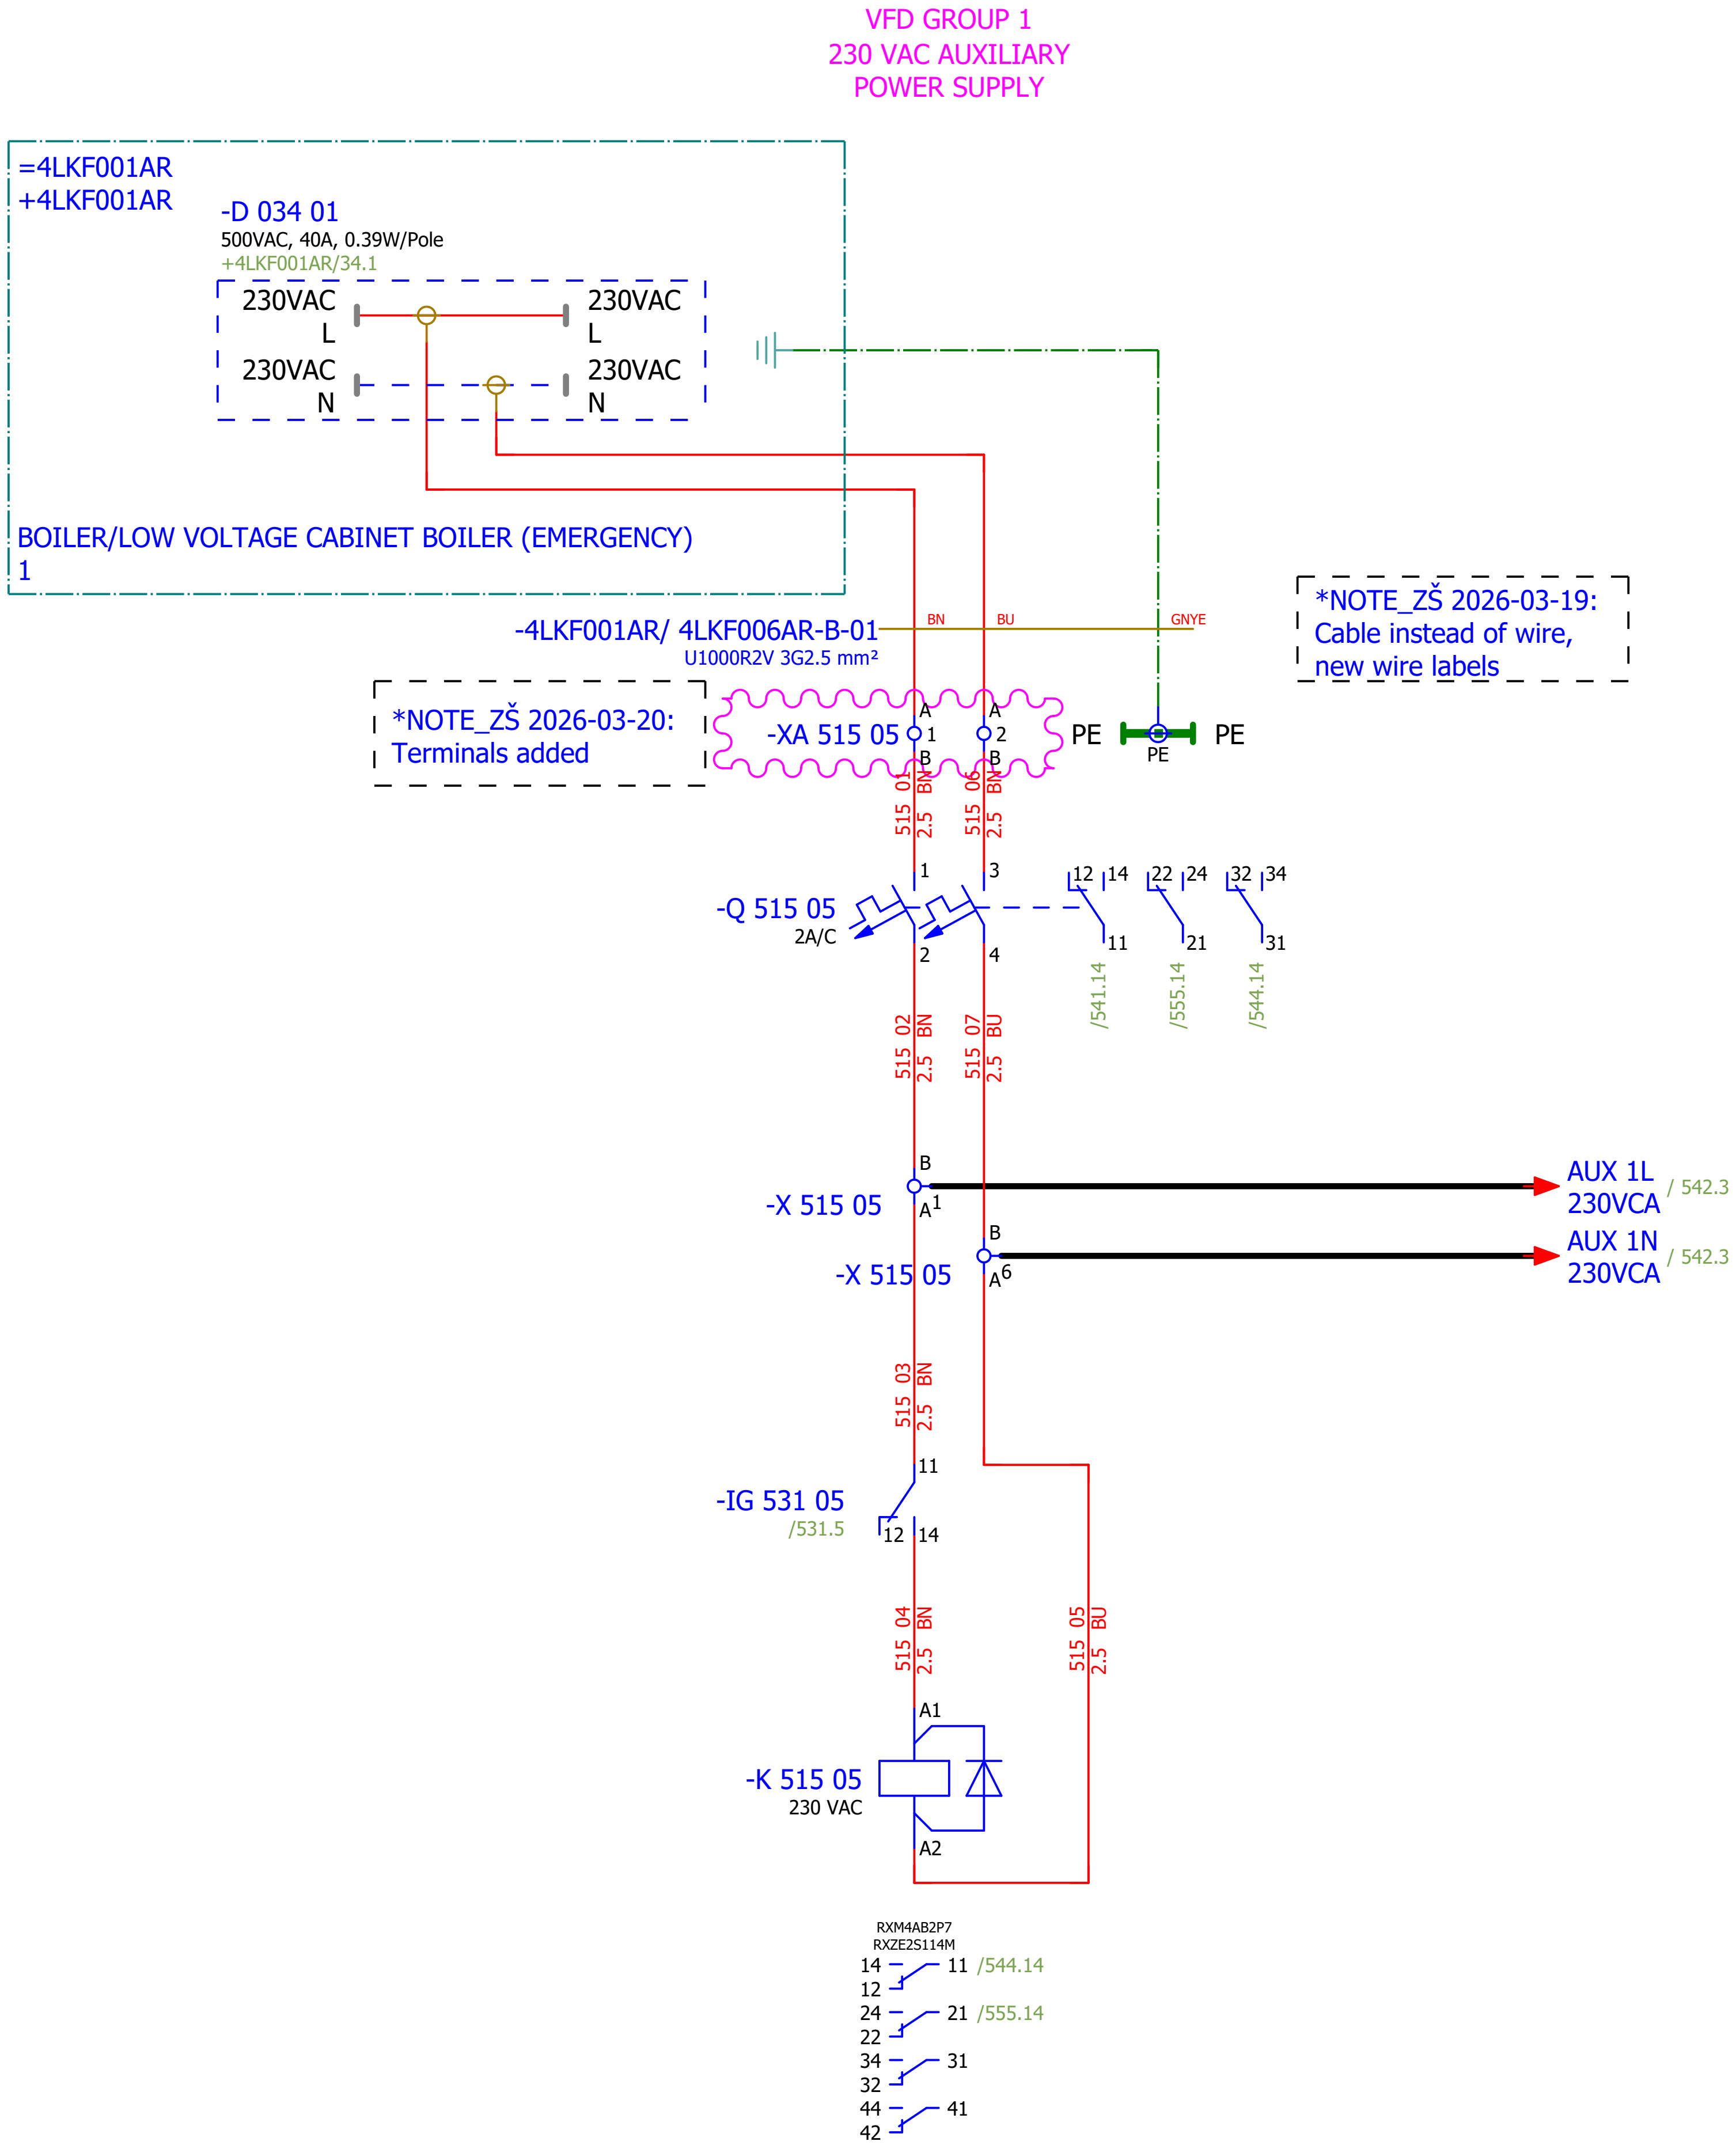

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F	#D
Drawn:	Luka Božičević										
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	VFD GROUP 1 - 230 VAC AUXILIARY POWER SUPPLY	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 515
Format:	A3									+4LKF006AR	Next: 516

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

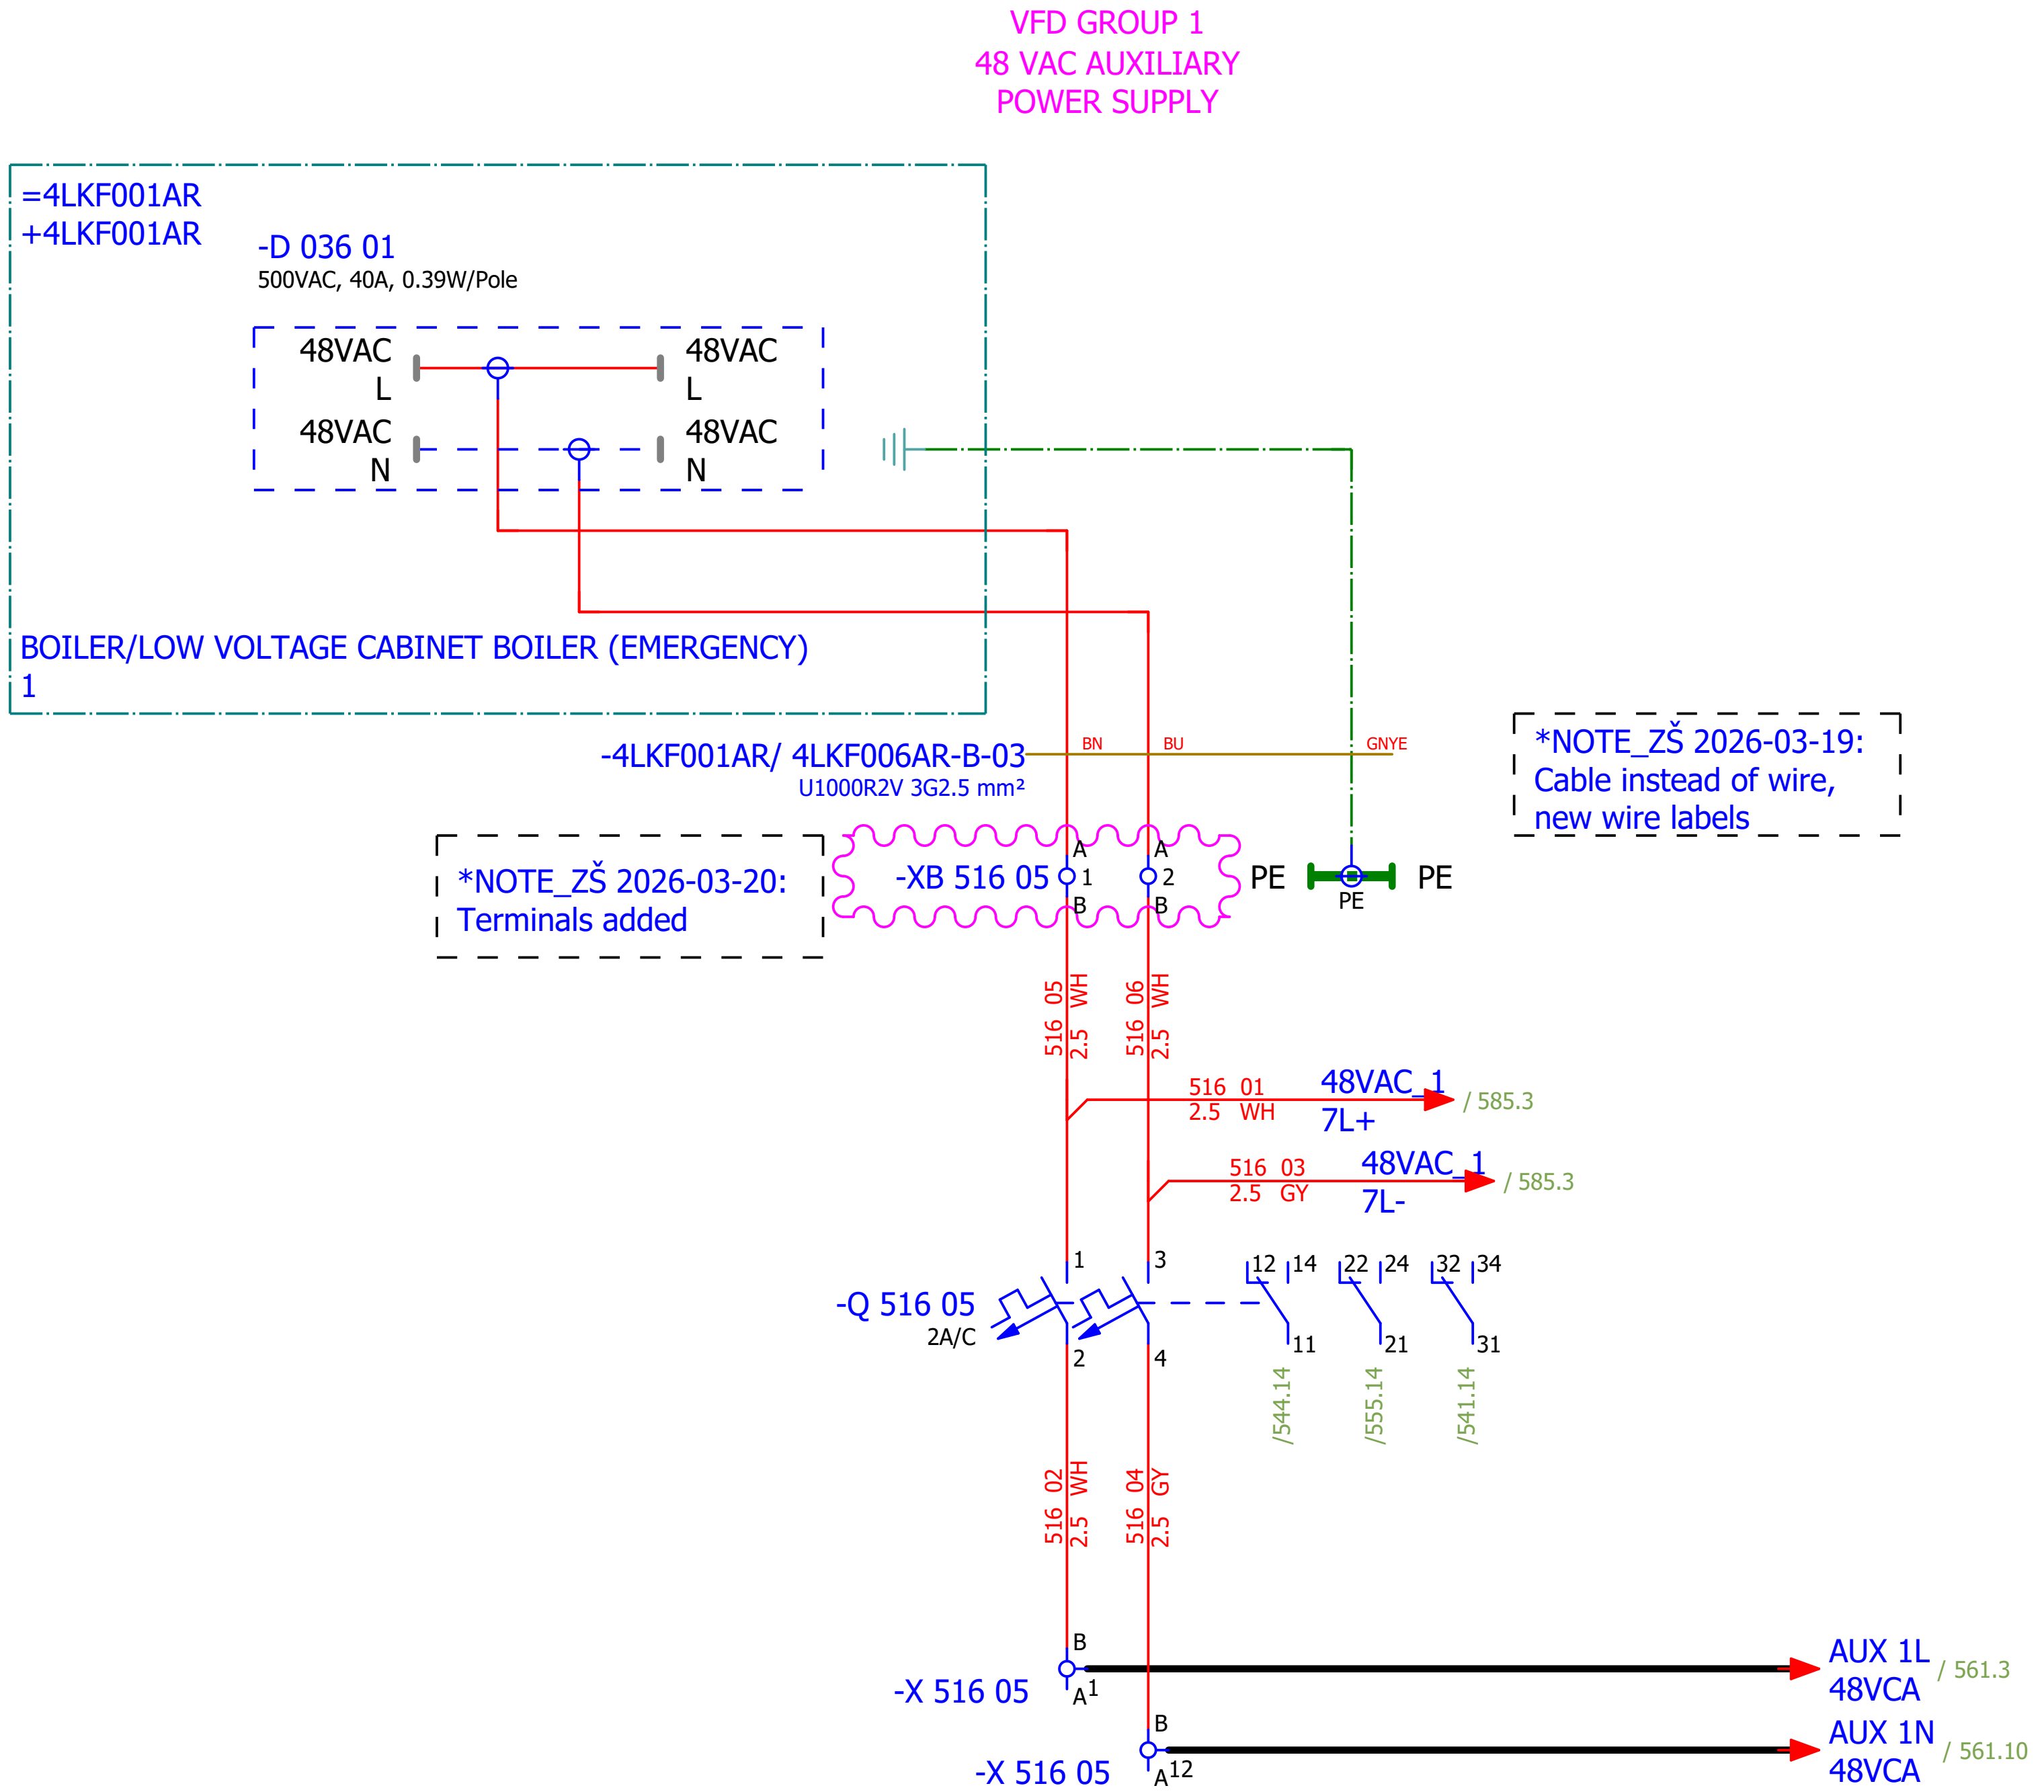

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević								#D
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: VFD GROUP 1 - 48 VAC AUXILIARY POWER SUPPLY	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 516
Format:	A3							+4LKF006AR	Next: 517

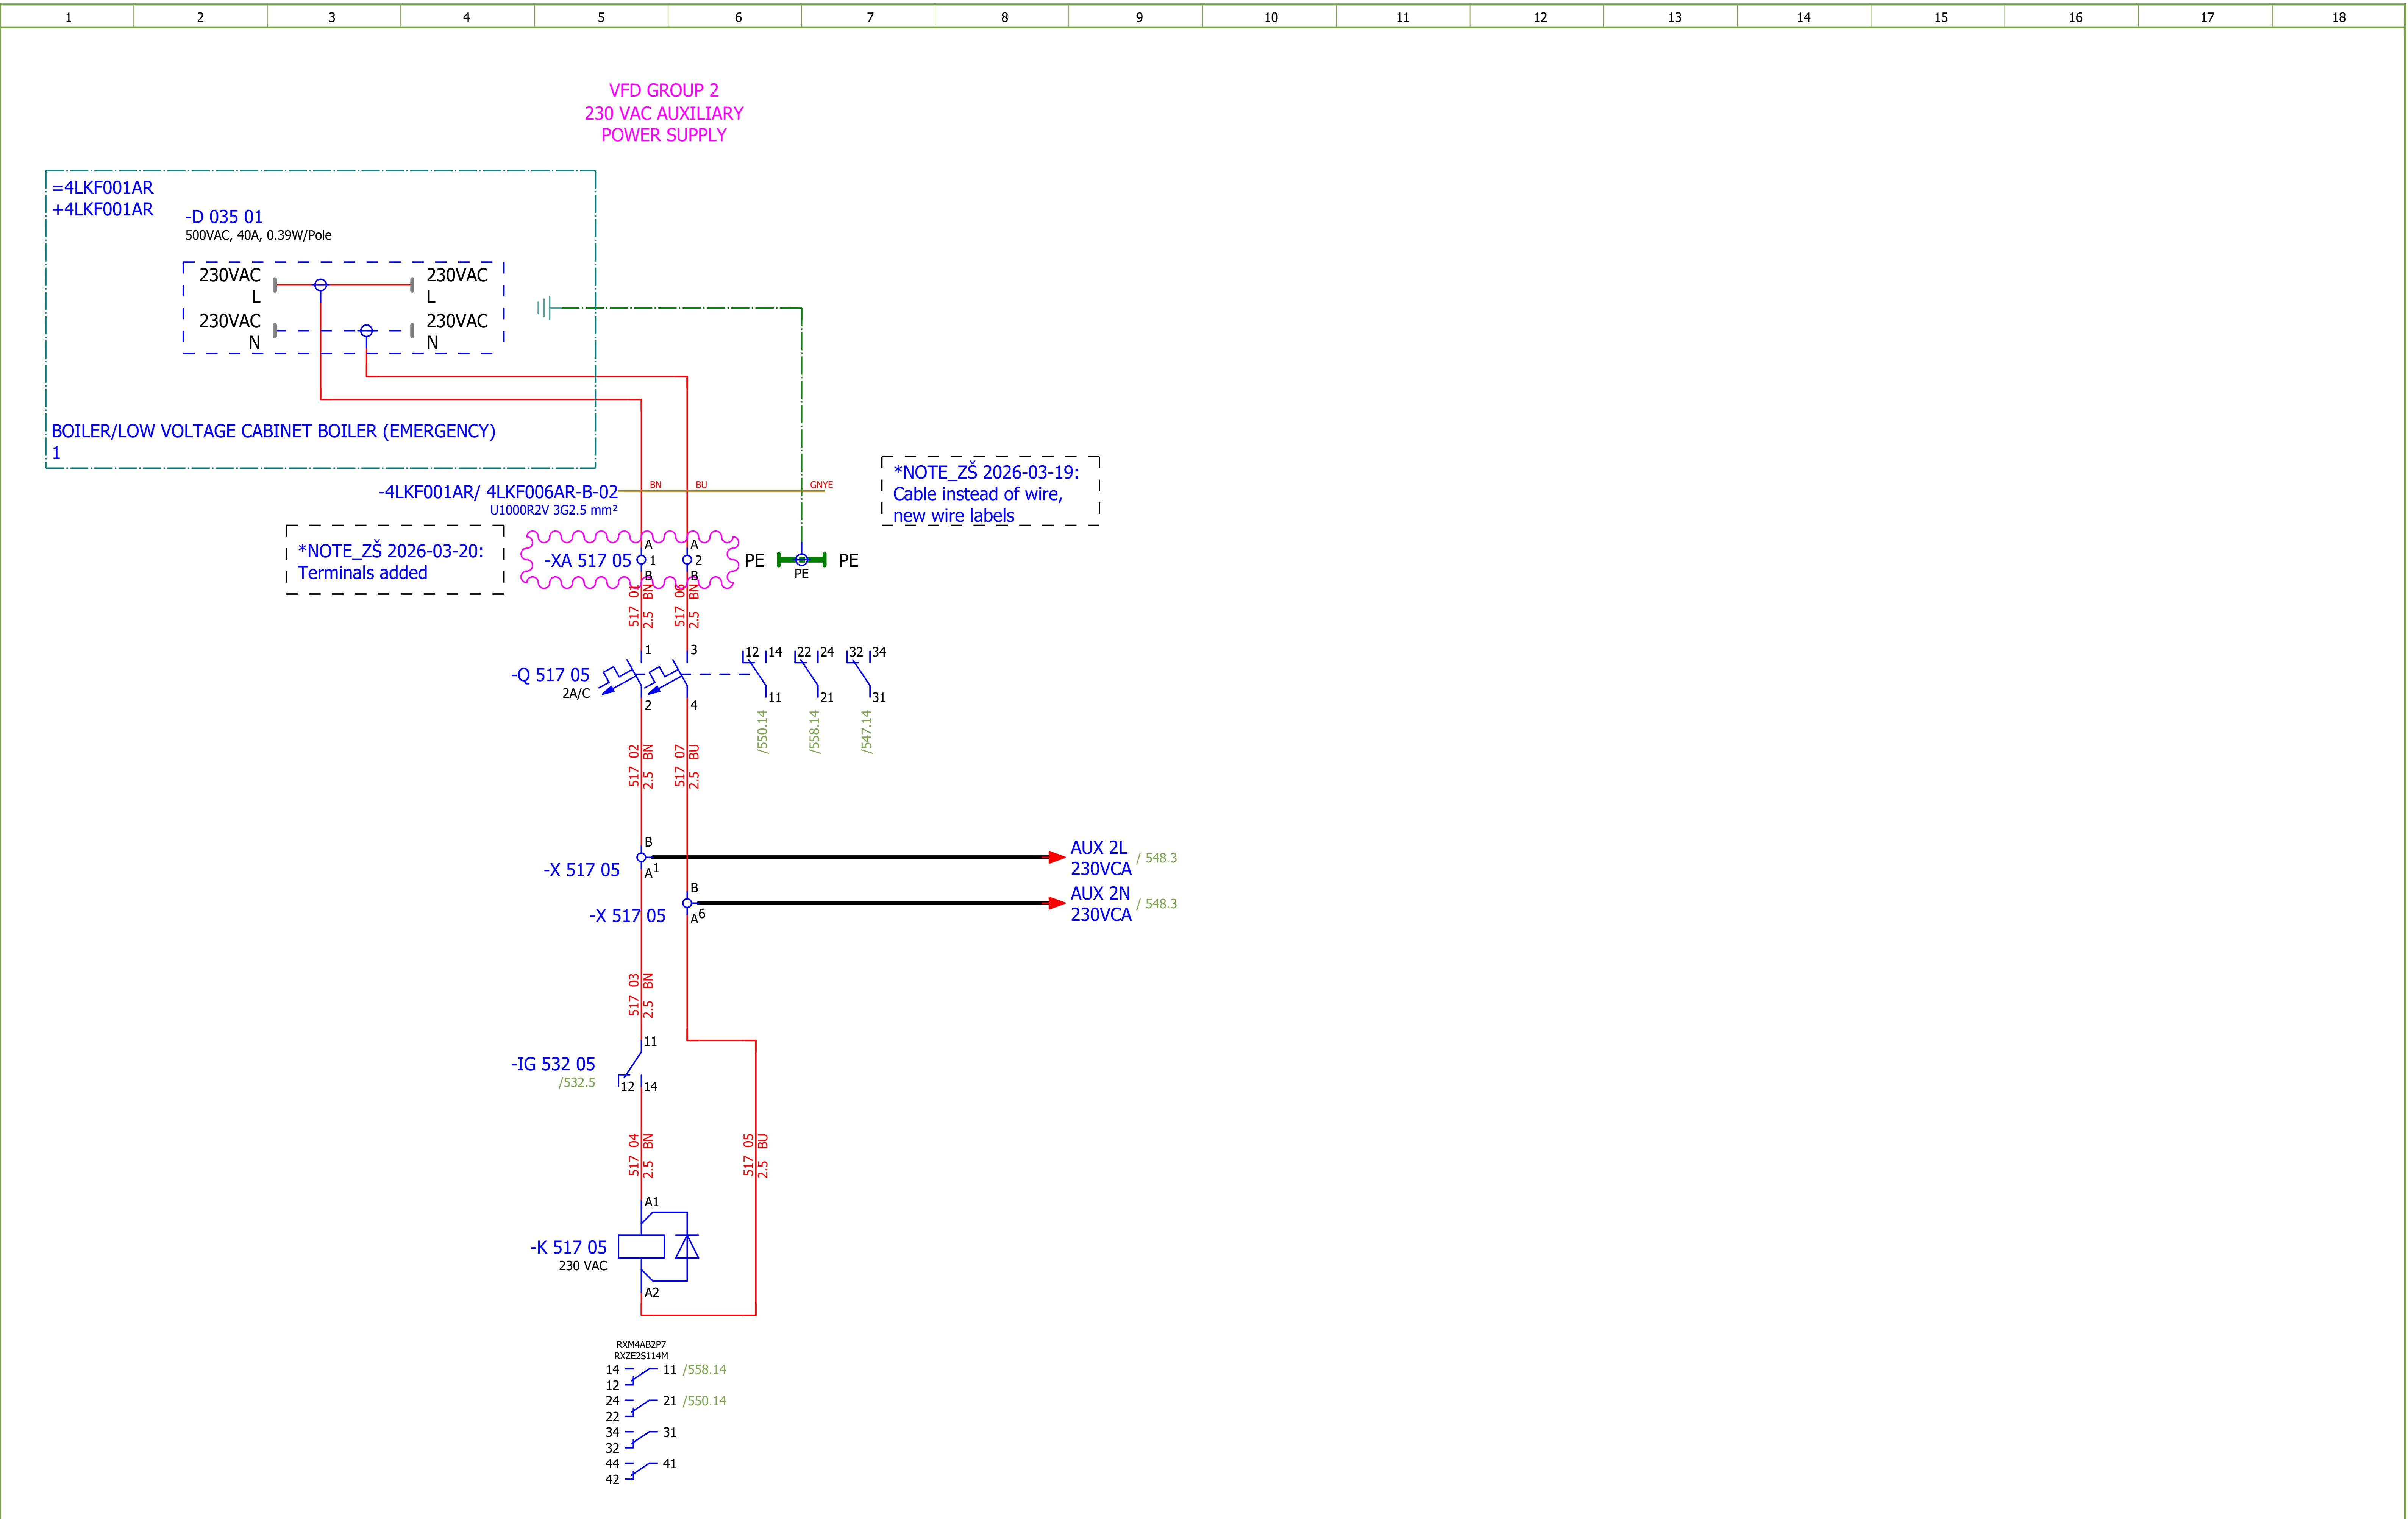

Date:	17.03.2026.	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia
Drawn:	Luka Božičević	Object:	RDF Albioma Les Bois Rouge Reunion - France
Approved:	Grga Kolić	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6
Format:	A3	Content:	VFD GROUP 2 - 230 VAC AUXILIARY POWER SUPPLY

SINTAKSA
A Voith Company

Project:	Unit & Issuer:	Number:	Revision:	
BRC-4	ATEP0	1874	F	#D
Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 517
			+4LKF006AR	Next: 518

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

VFD GROUP 2
48 VAC AUXILIARY
POWER SUPPLY

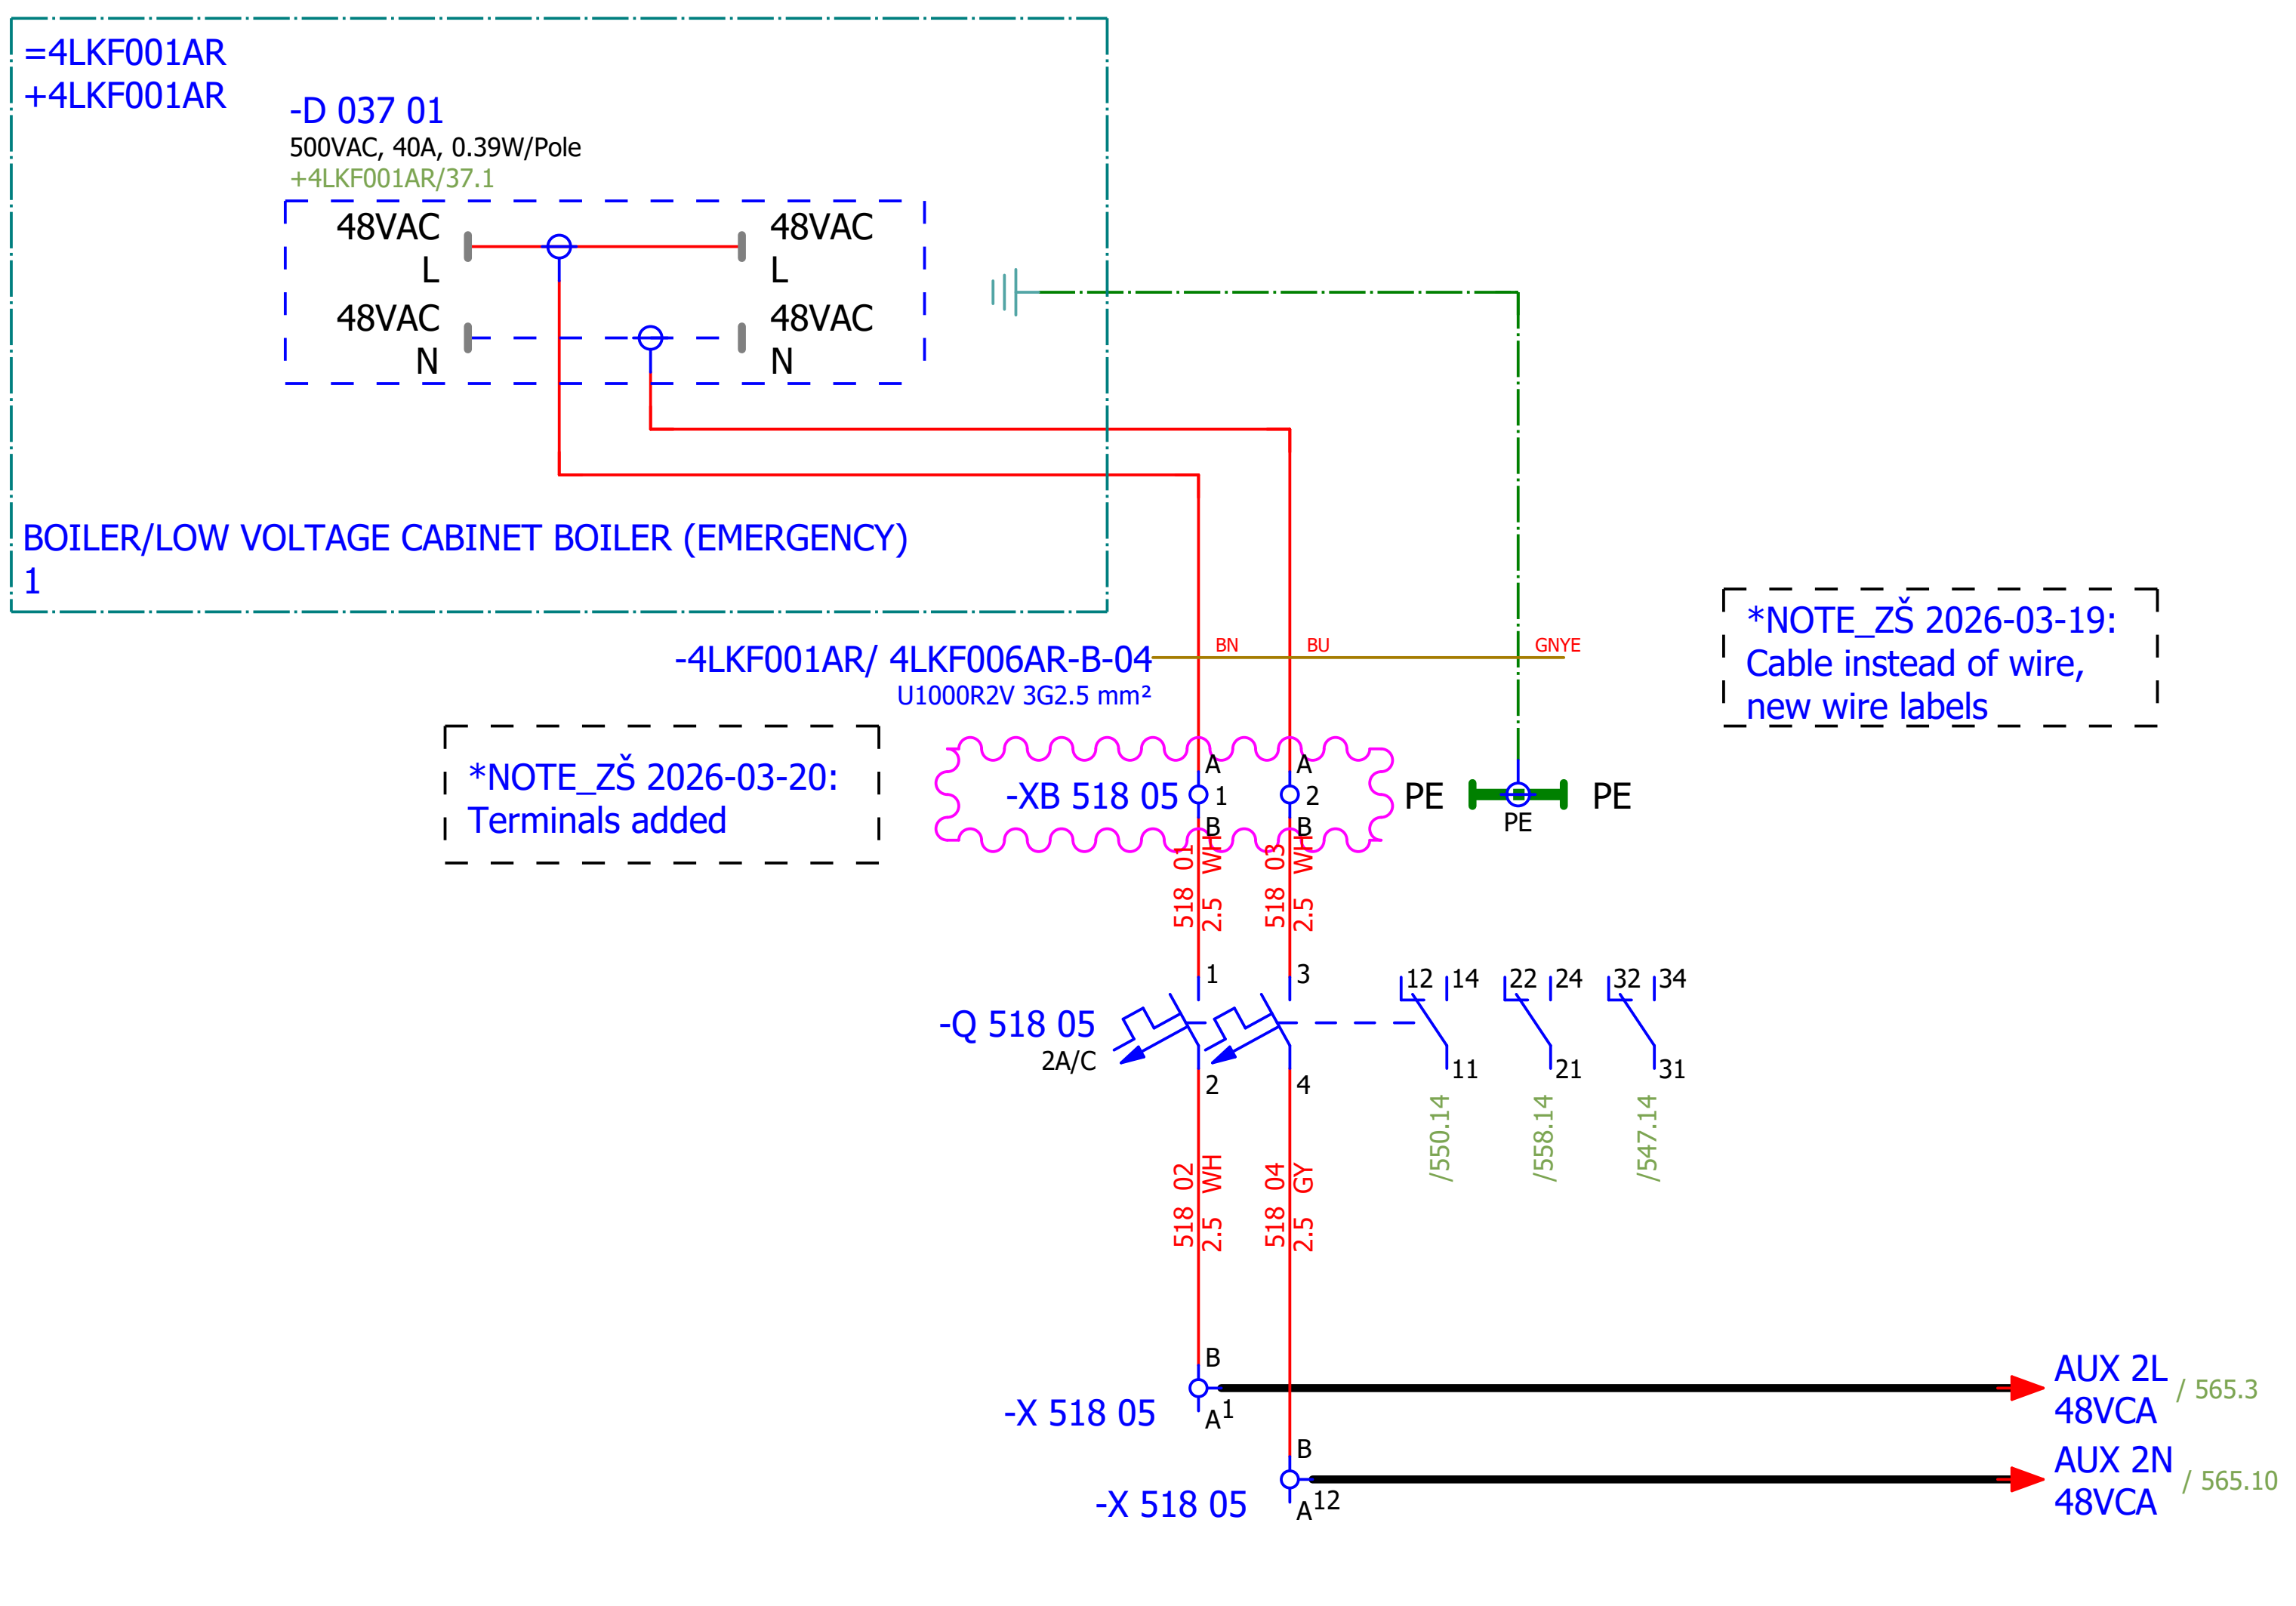

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević								#D
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: VFD GROUP 2 - 48 VAC AUXILIARY POWER SUPPLY	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 518
Format:	A3							+4LKF006AR	Next: 519

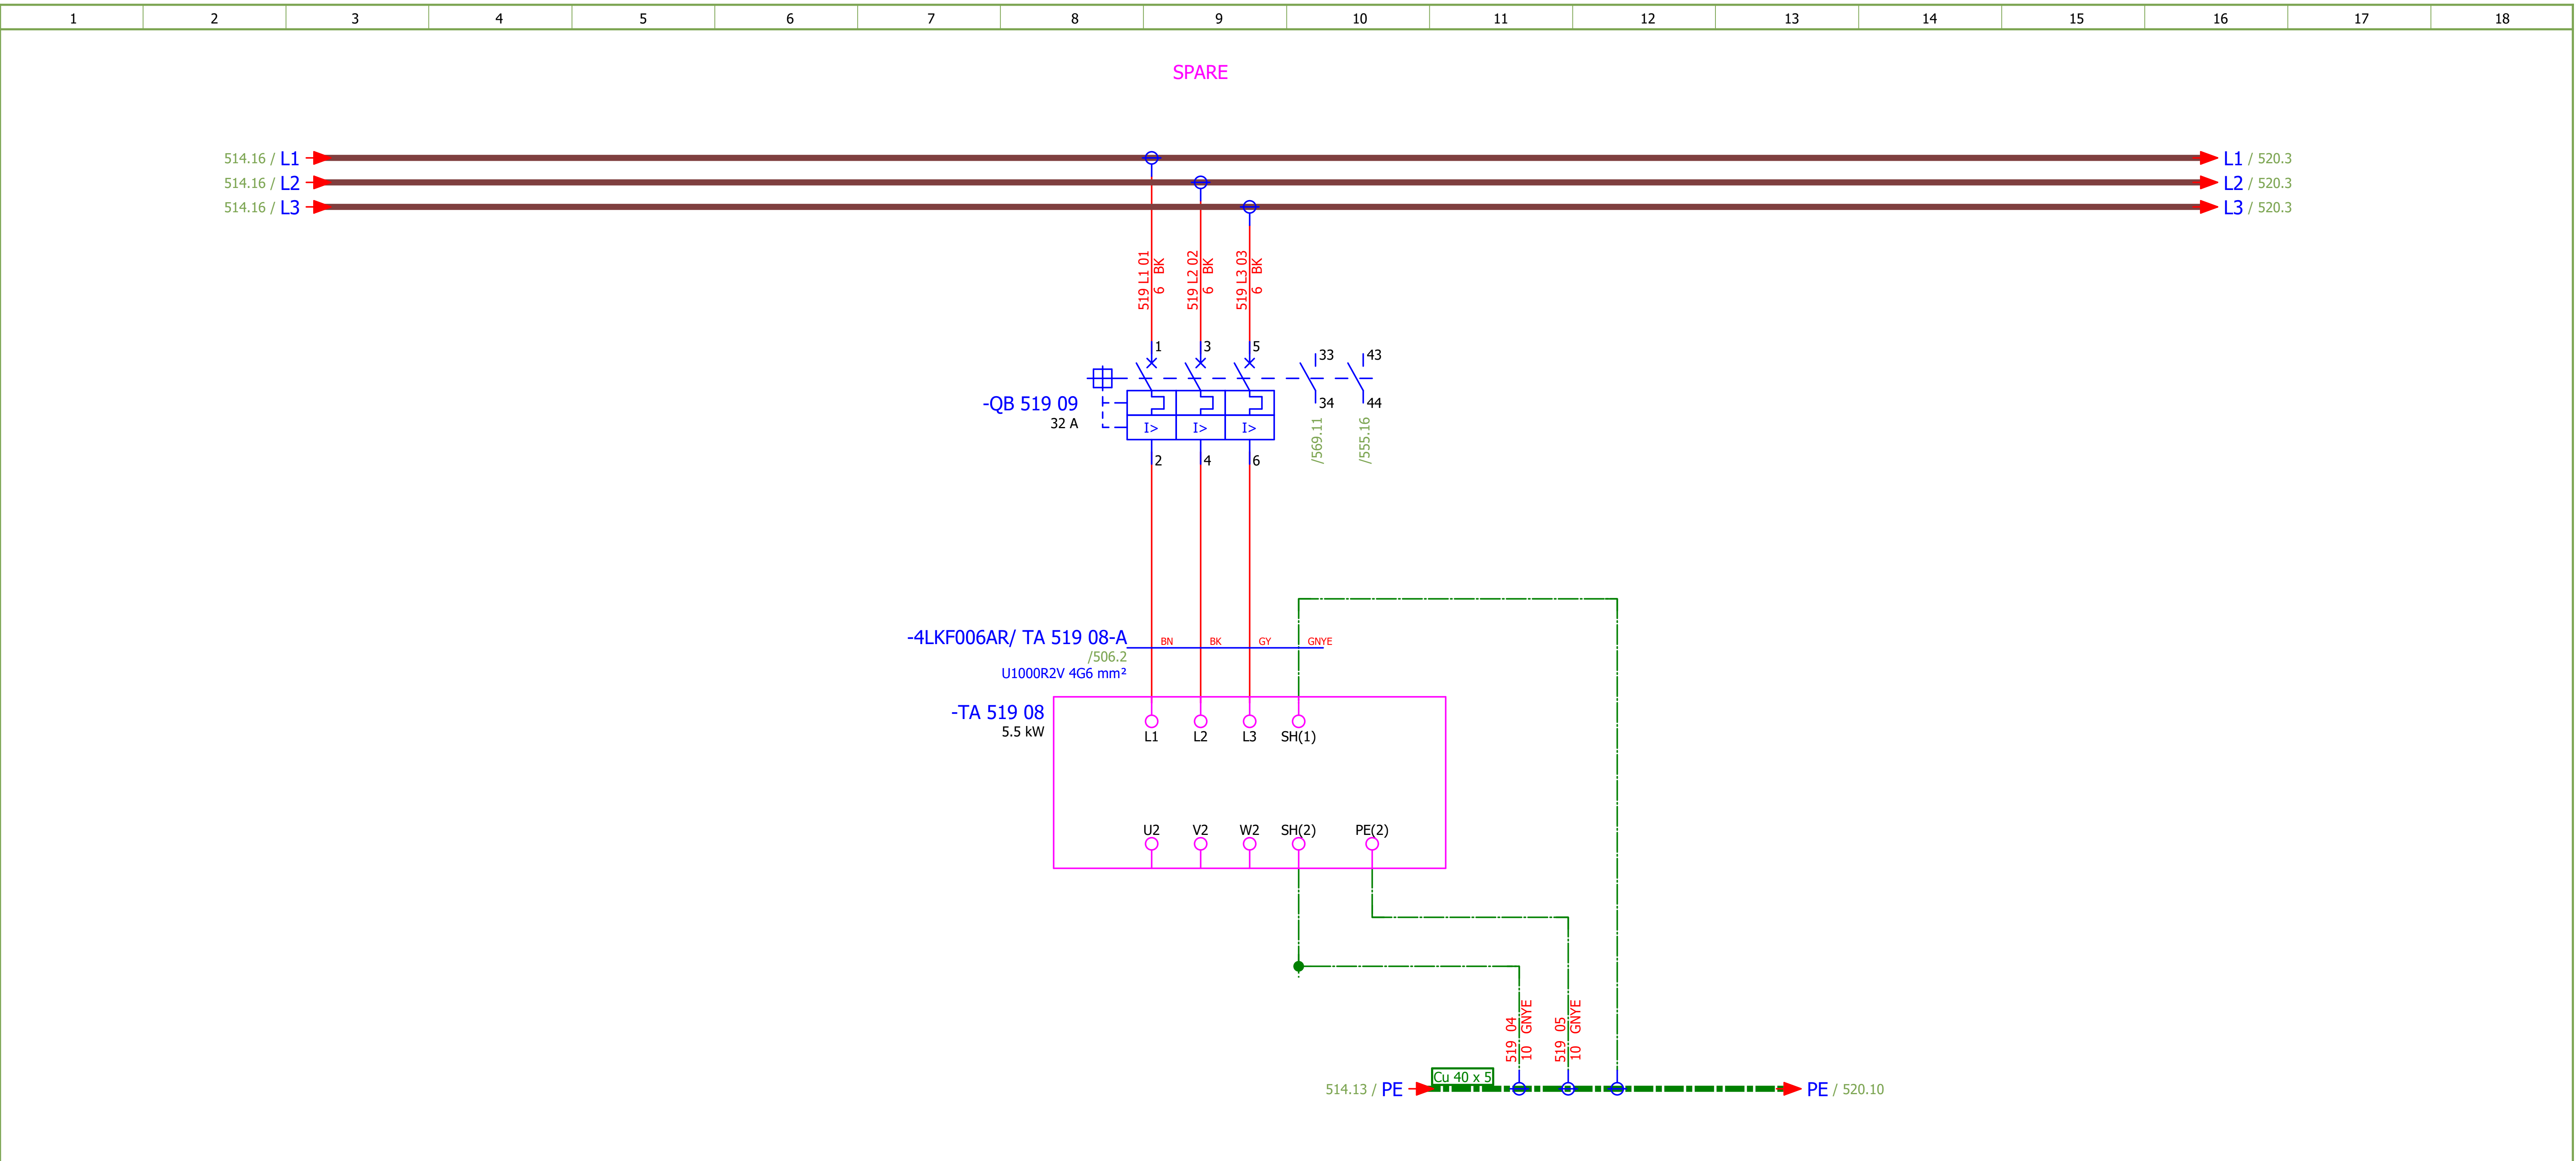

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević								#D
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 519
Format:	A3							+4LKF006AR	Next: 520

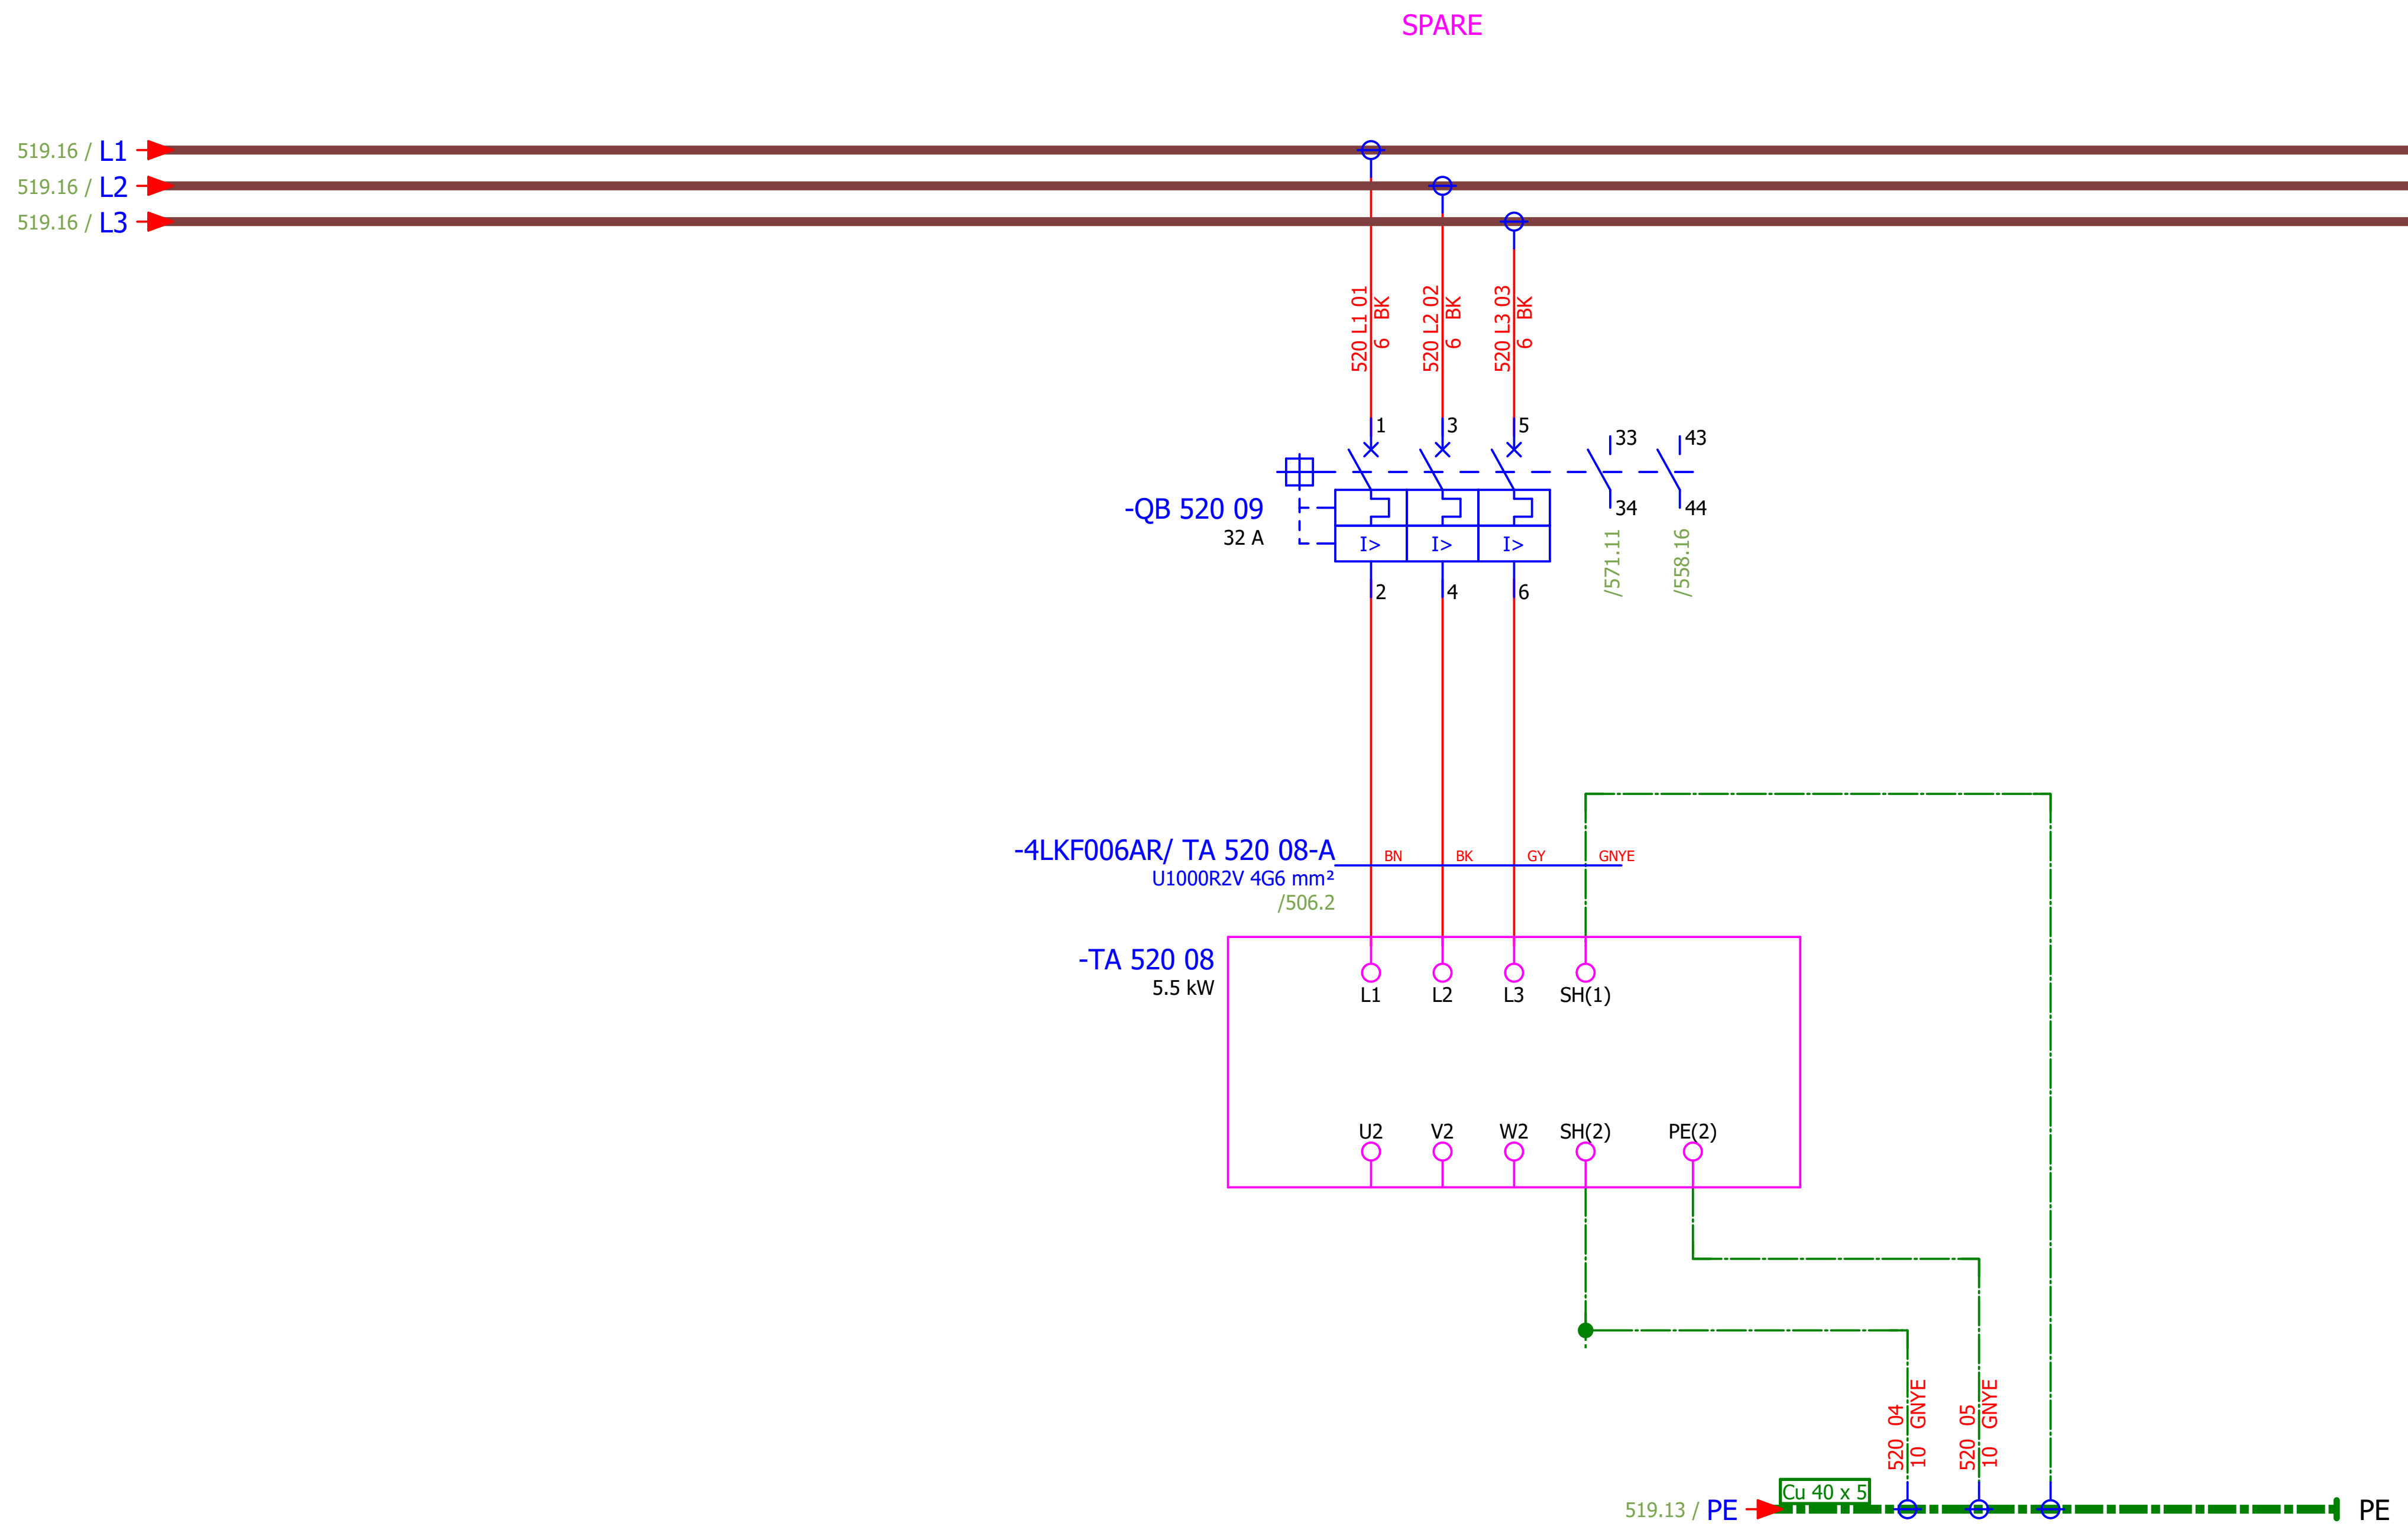

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F	#D
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 520
Format:	A3								+4LKF006AR	Next: 531

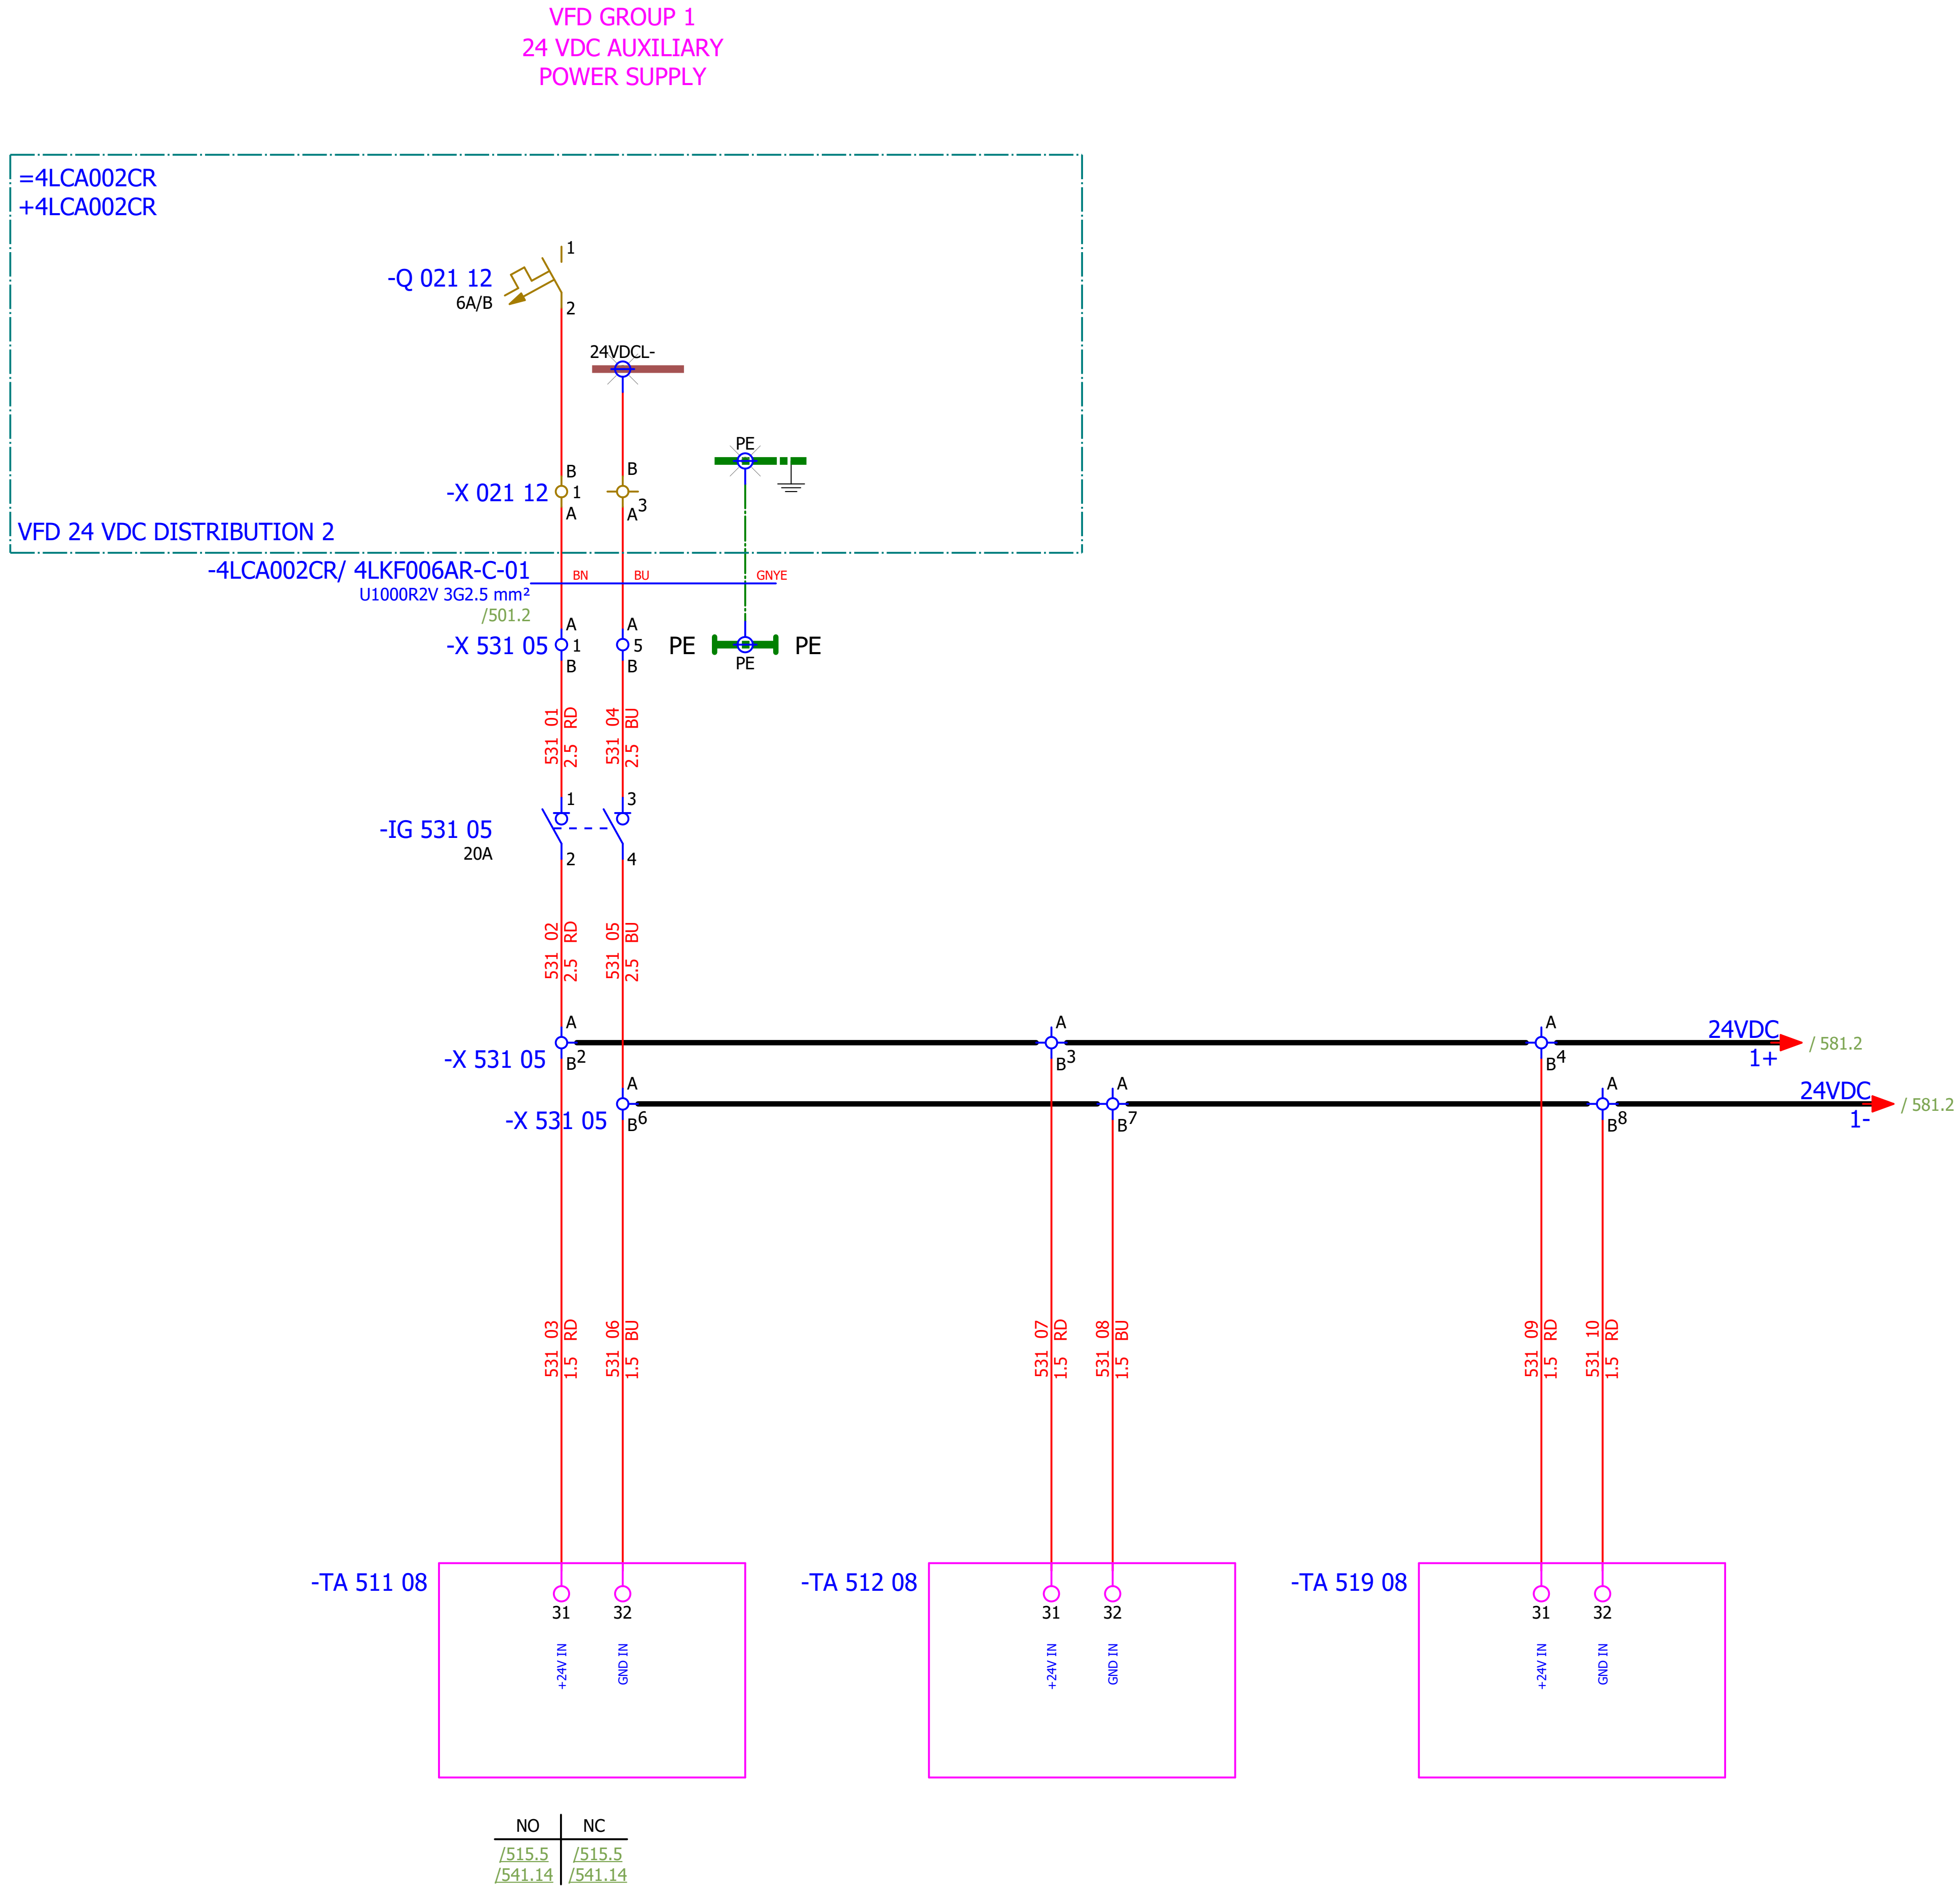

Date:	17.03.2026.	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia
Drawn:	Luka Božičević		
Approved:	Grga Kolić	Object:	RDF Albioma Les Bois Rouge Reunion - France
Format:	A3		

SINTAKSA
A Voith Company

Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Content:	VFD GROUP 1 - 24 VDC AUXILIARY POWER SUPPLY	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR +4LKF006AR	#G Sheet: 531 Next: 532

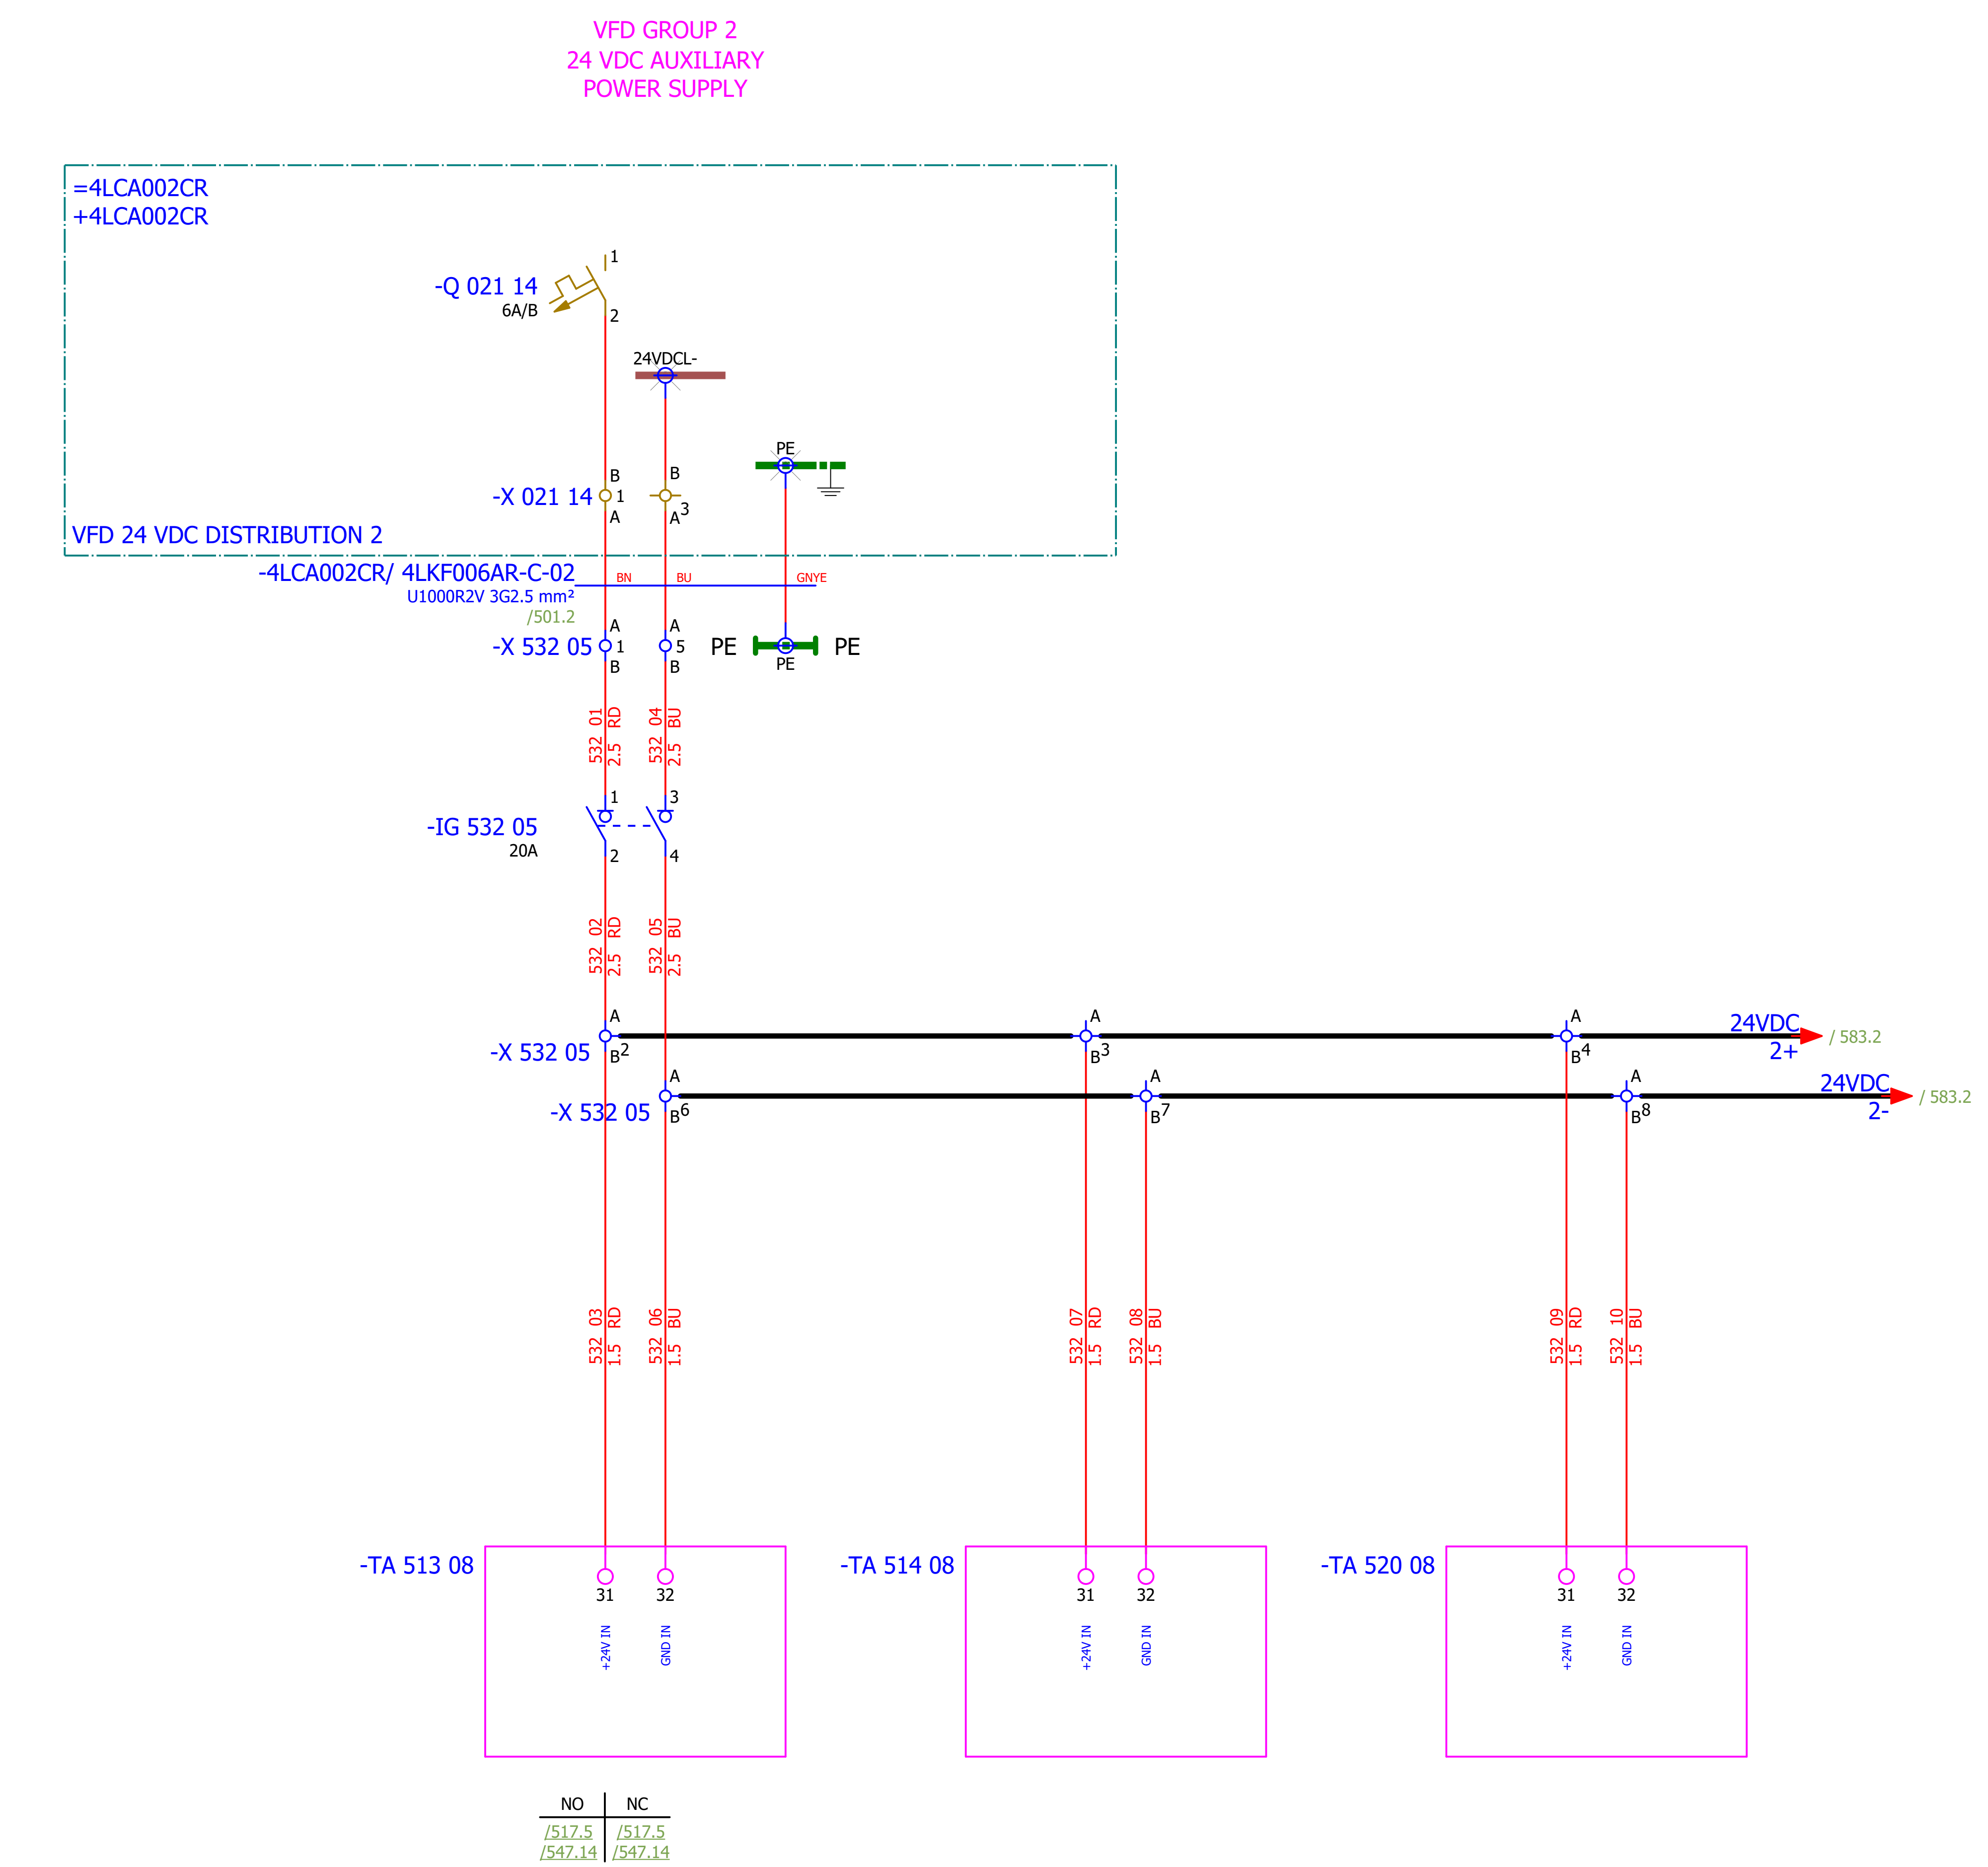

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević									#G
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	VFD GROUP 2 - 24 VDC AUXILIARY POWER SUPPLY	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 532
Format:	A3								+4LKF006AR	Next: 541

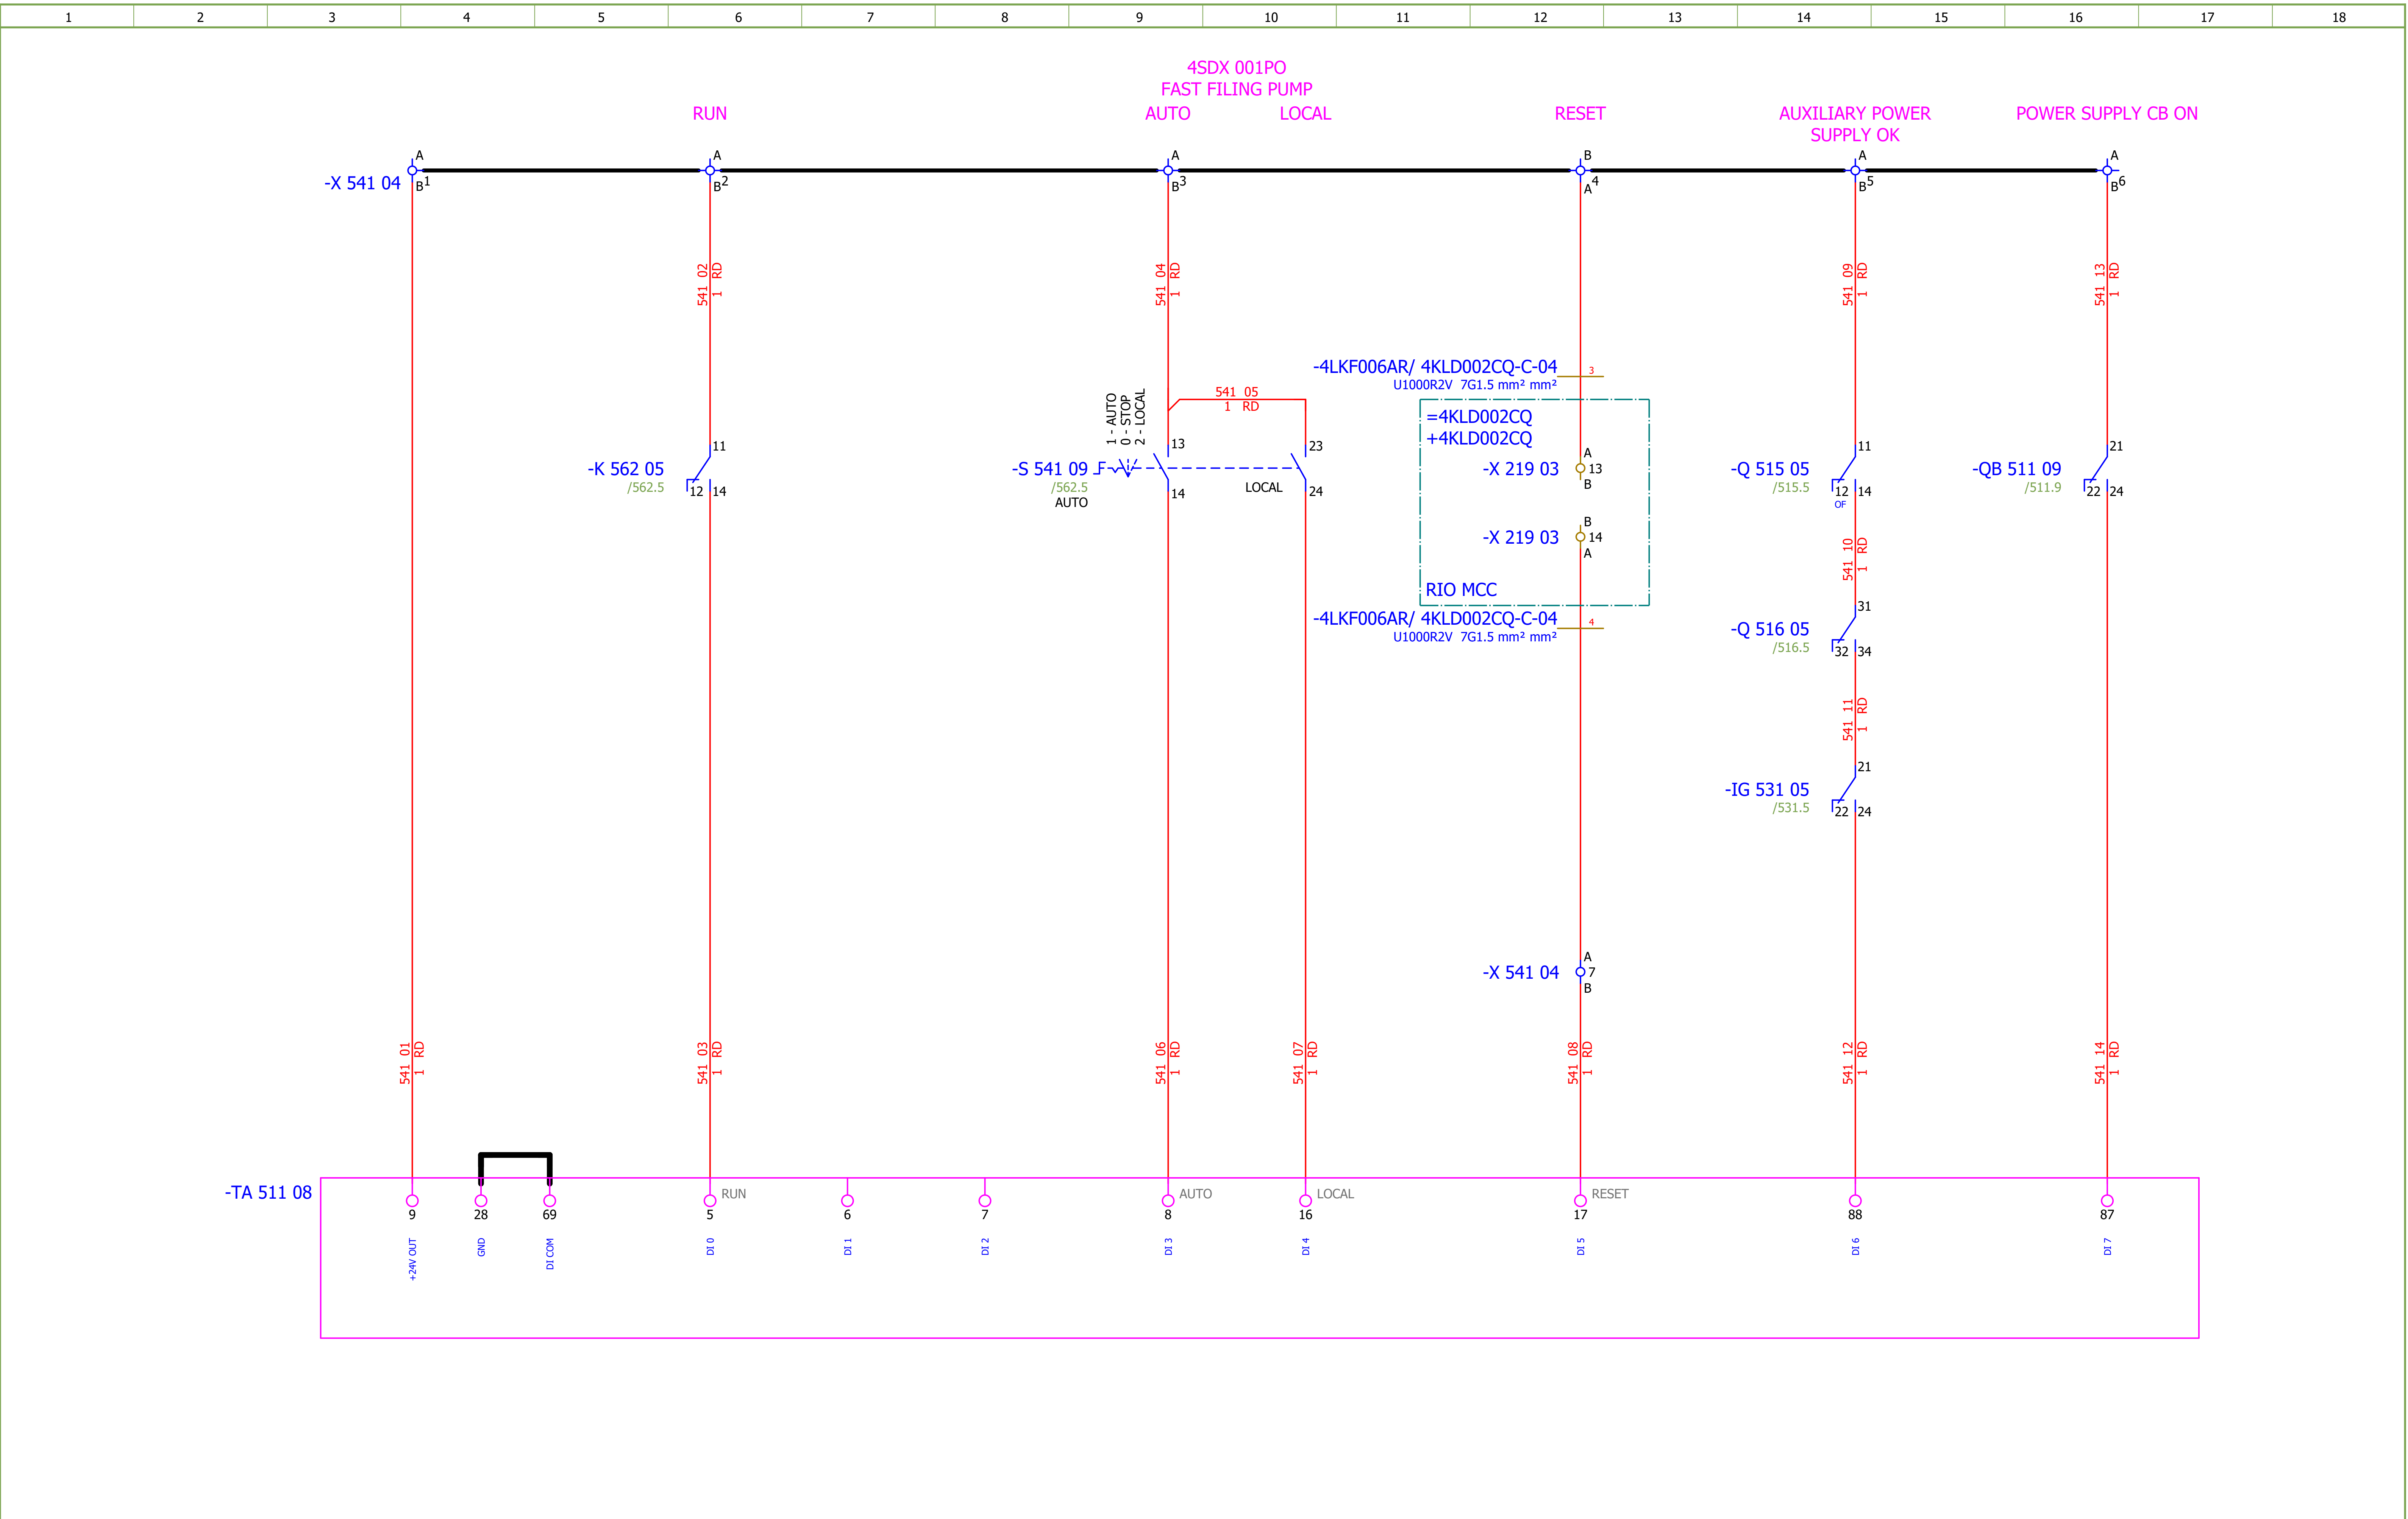

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F	#MB
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: FAST FILING PUMP - DIGITAL INPUTS	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 541
Format:	A3								+4LKF006AR	Next: 542

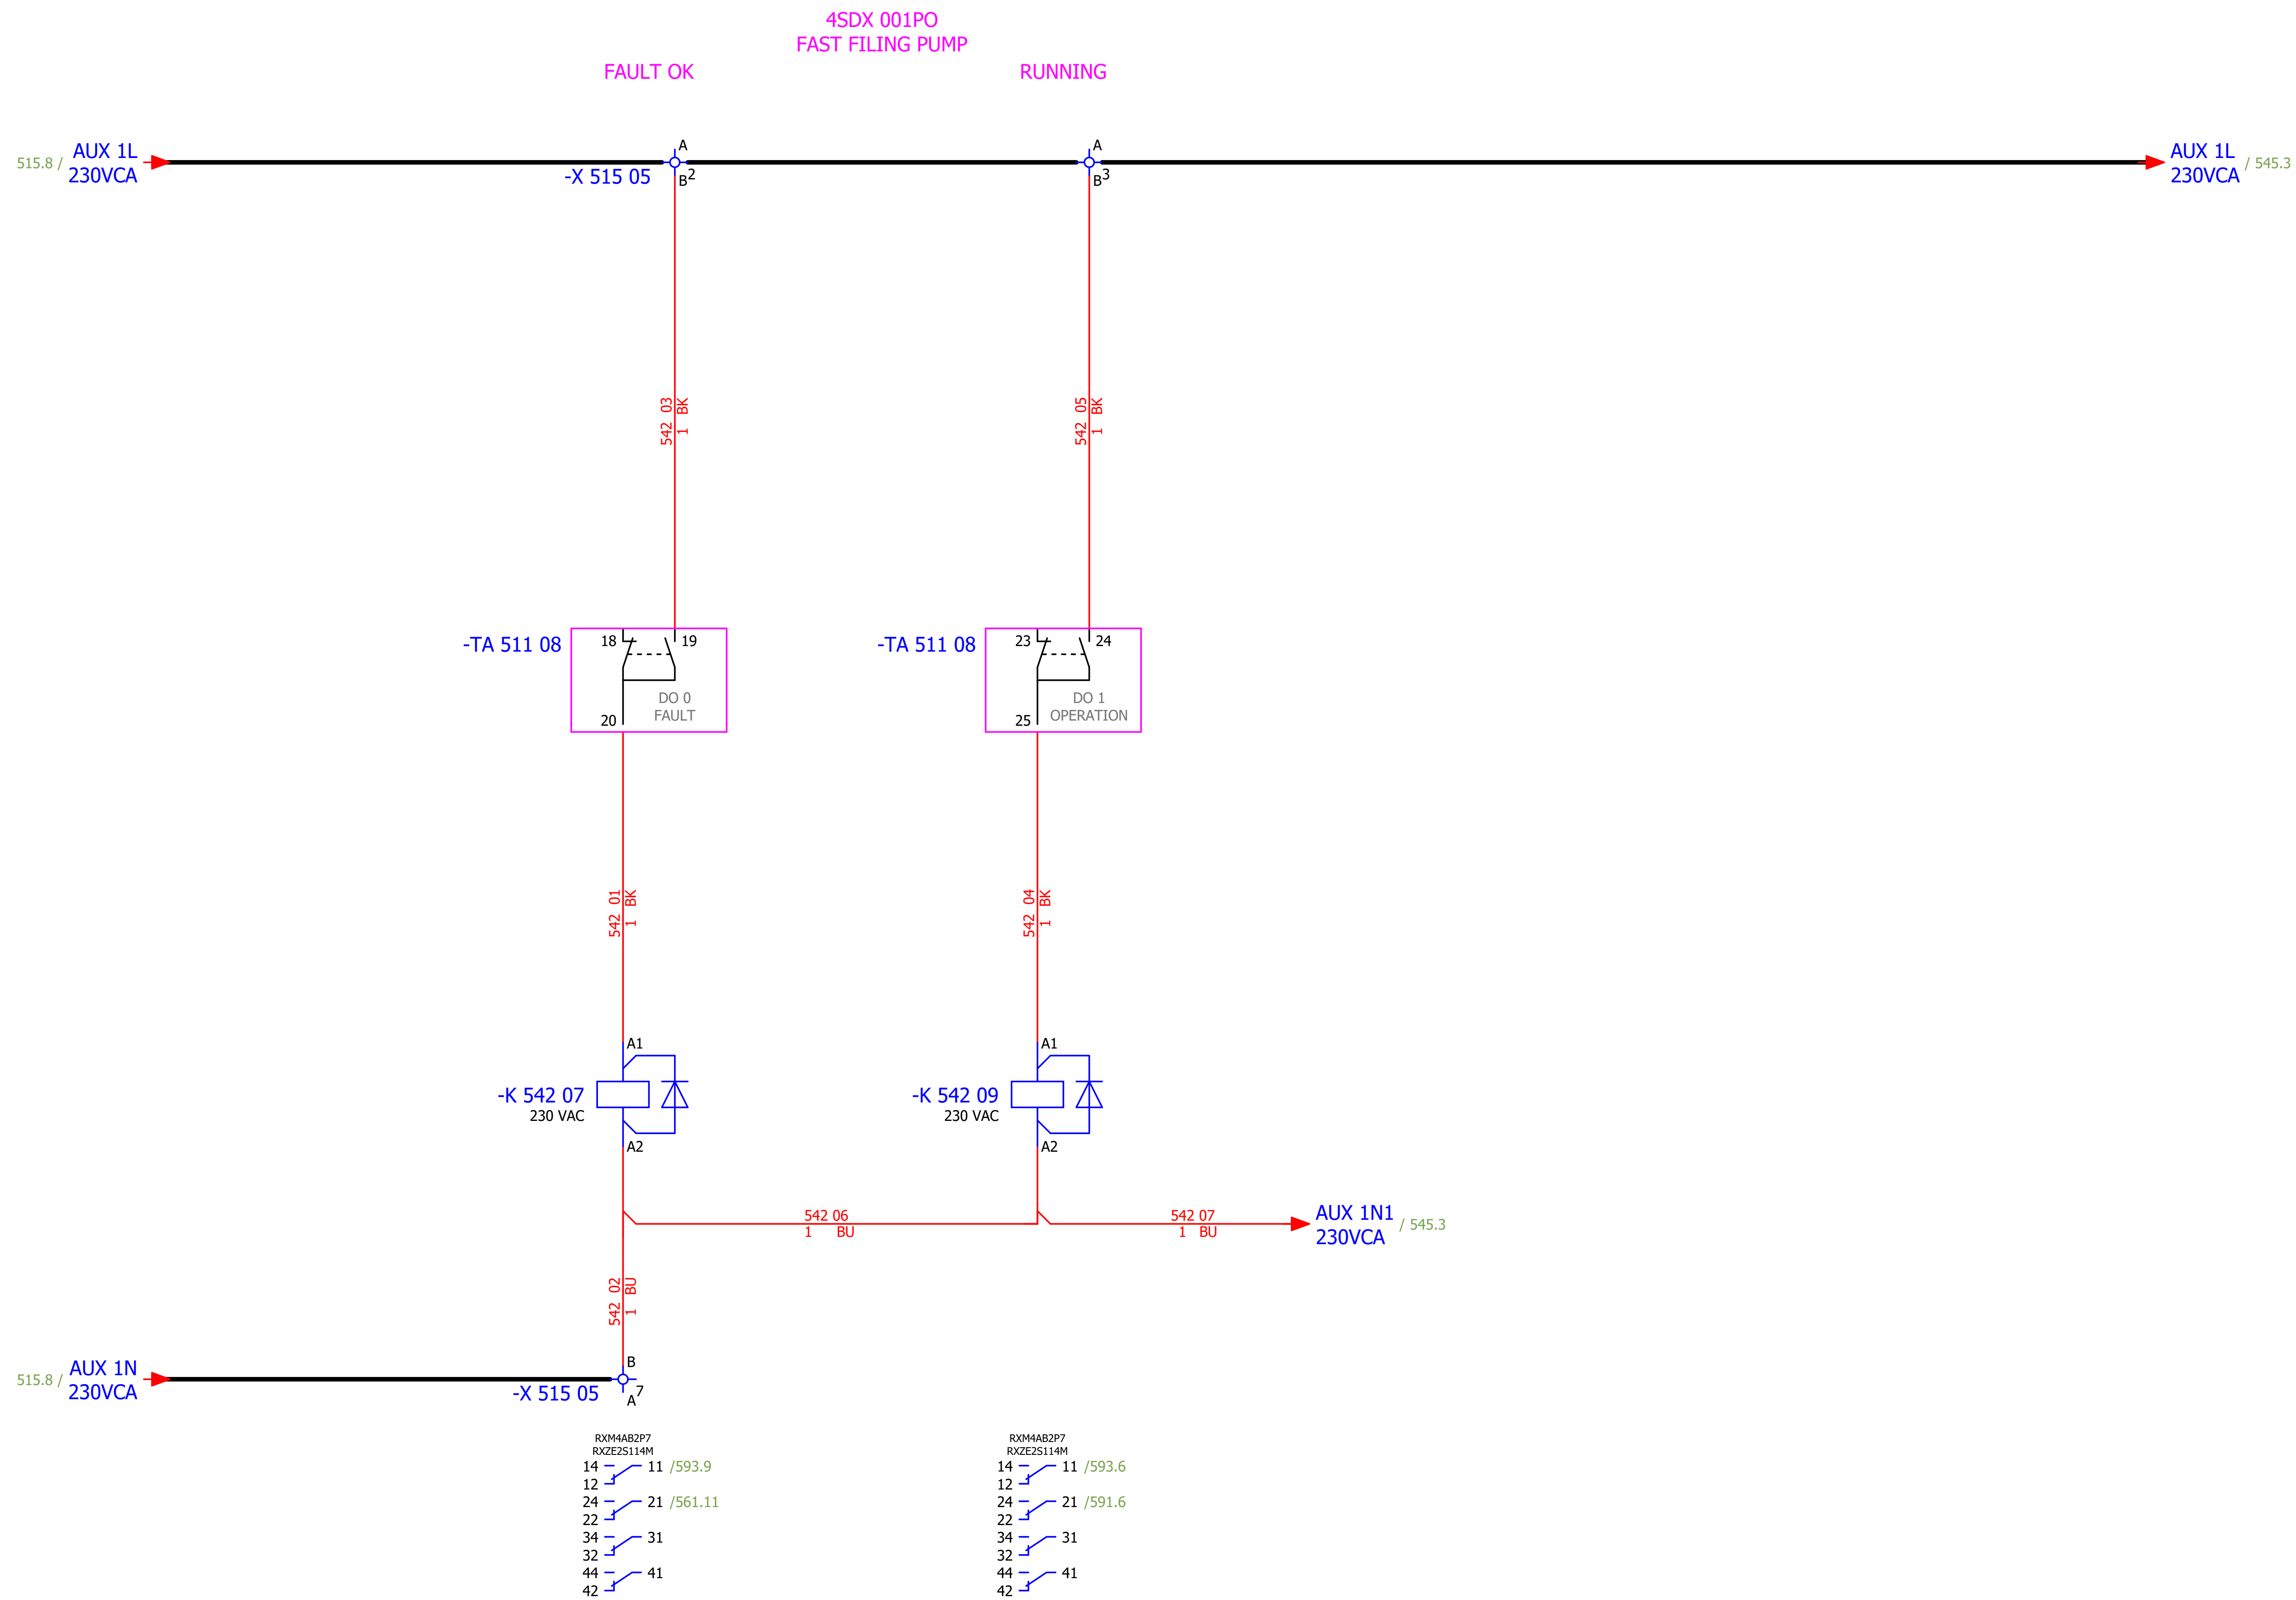

Date:	17.03.2026.	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia
Drawn:	Luka Božičević		
Approved:	Grga Kolić	Object:	RDF Albioma Les Bois Rouge Reunion - France
Format:	A3		

SINTAKSA
A Voith Company

Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Content:	FAST FILING PUMP - DIGITAL OUTPUTS	Drawing designation: BRC-4-ATEP0-1870-F			

#MB	
=4LKF001AR	Sheet: 542
+4LKF006AR	Next: 543

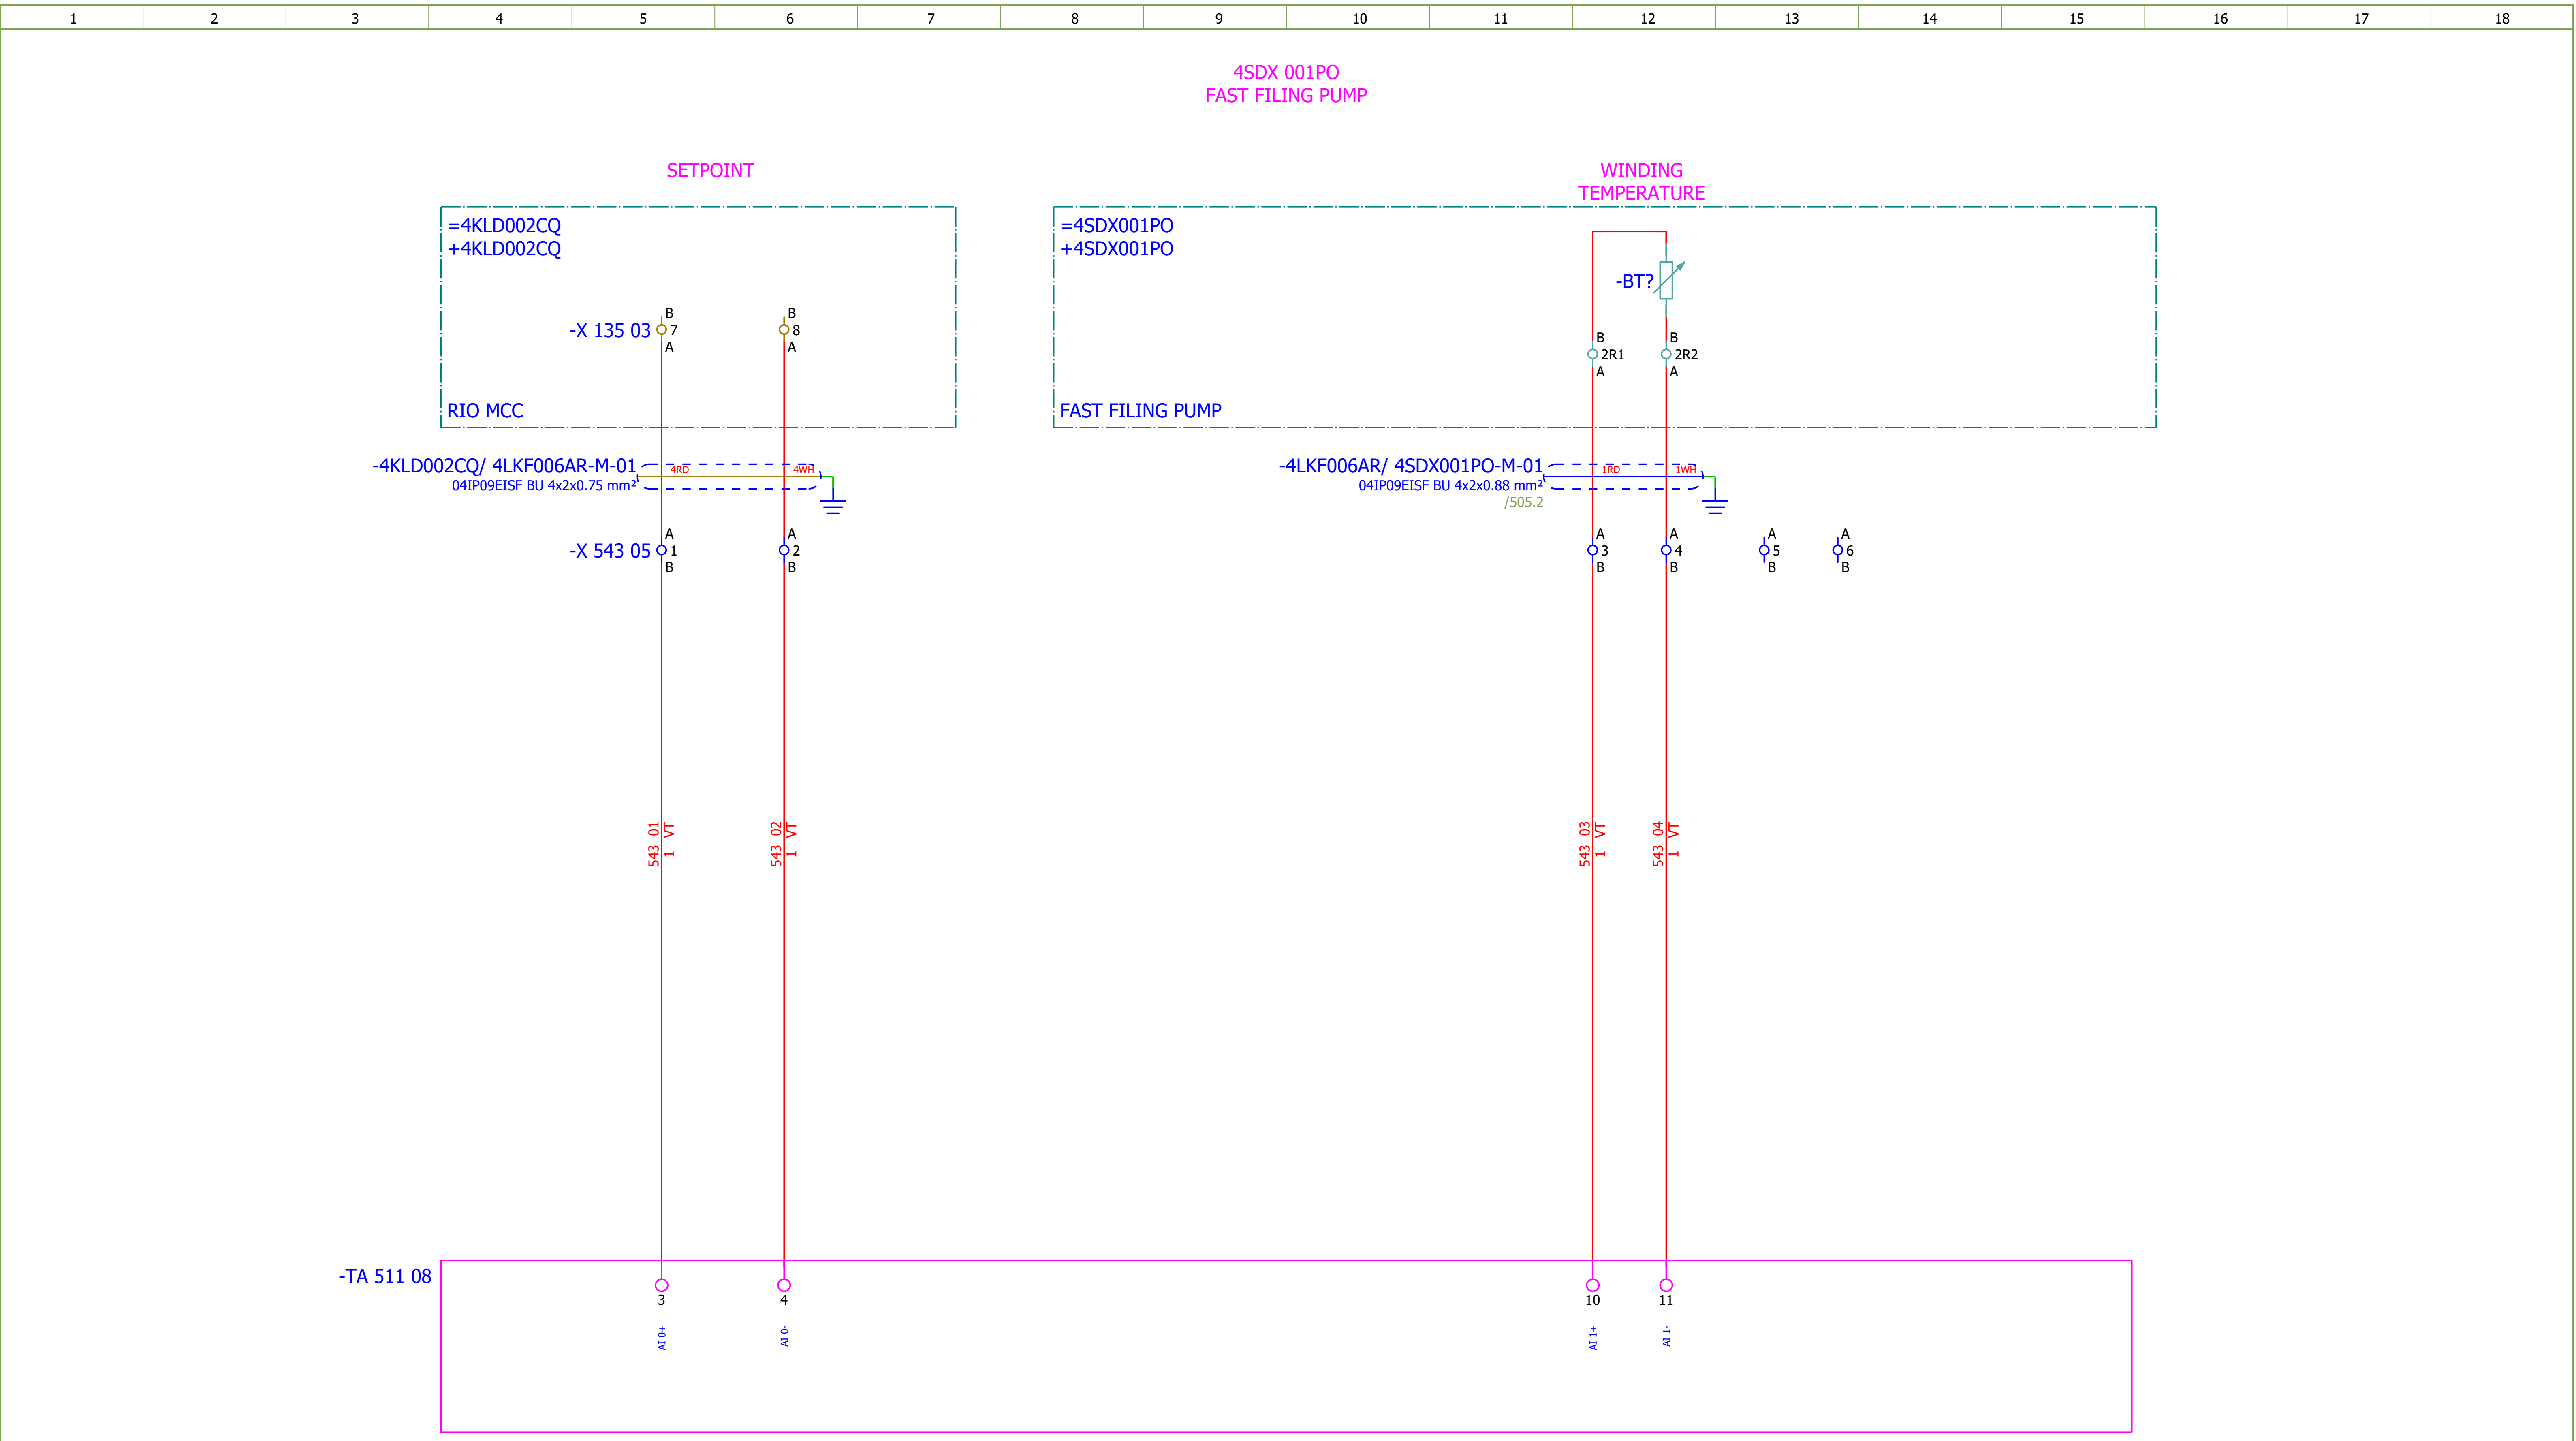

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874
Drawn:	Luka Božičević							Revision: F
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: FAST FILING PUMP - ANALOG INPUTS	Drawing designation: BRC-4-ATEP0-1870-F	=4LKF001AR	Sheet: 543
Format:	A3						+4LKF006AR	Next: 544

#MB

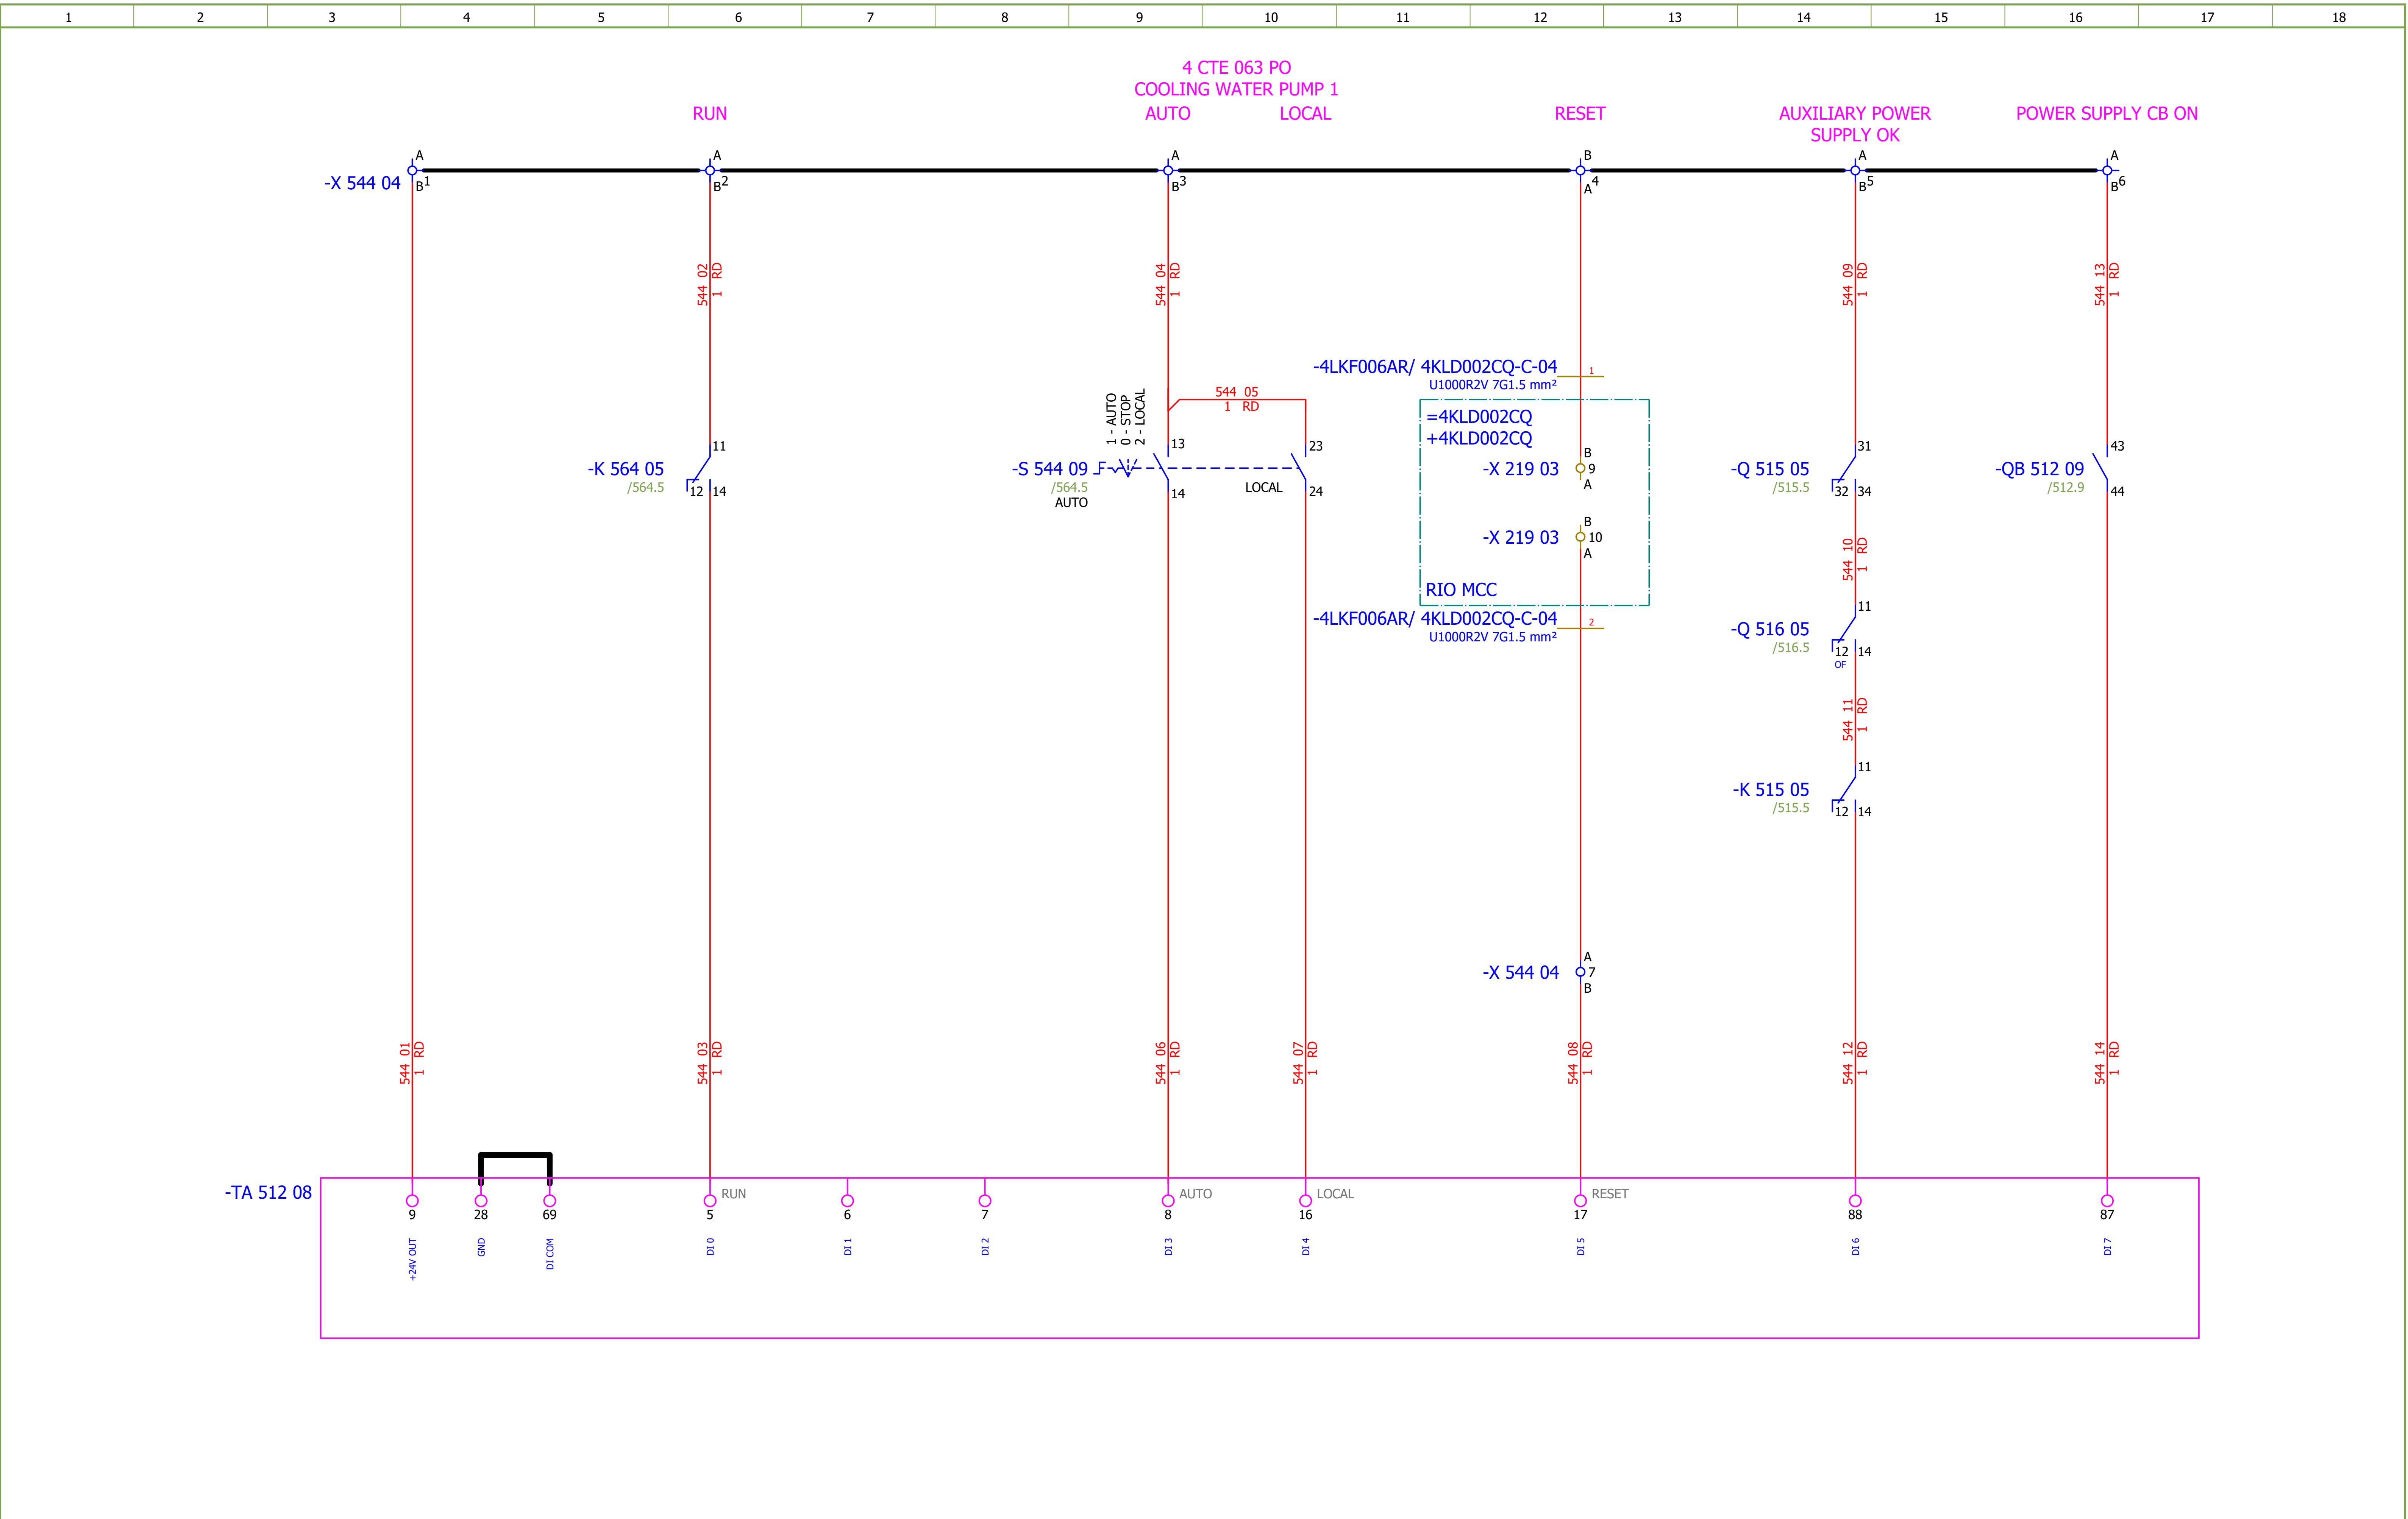

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević								#MB
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 1 - DIGITAL INPUTS	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 544
Format:	A3							+4LKF006AR	Next: 545

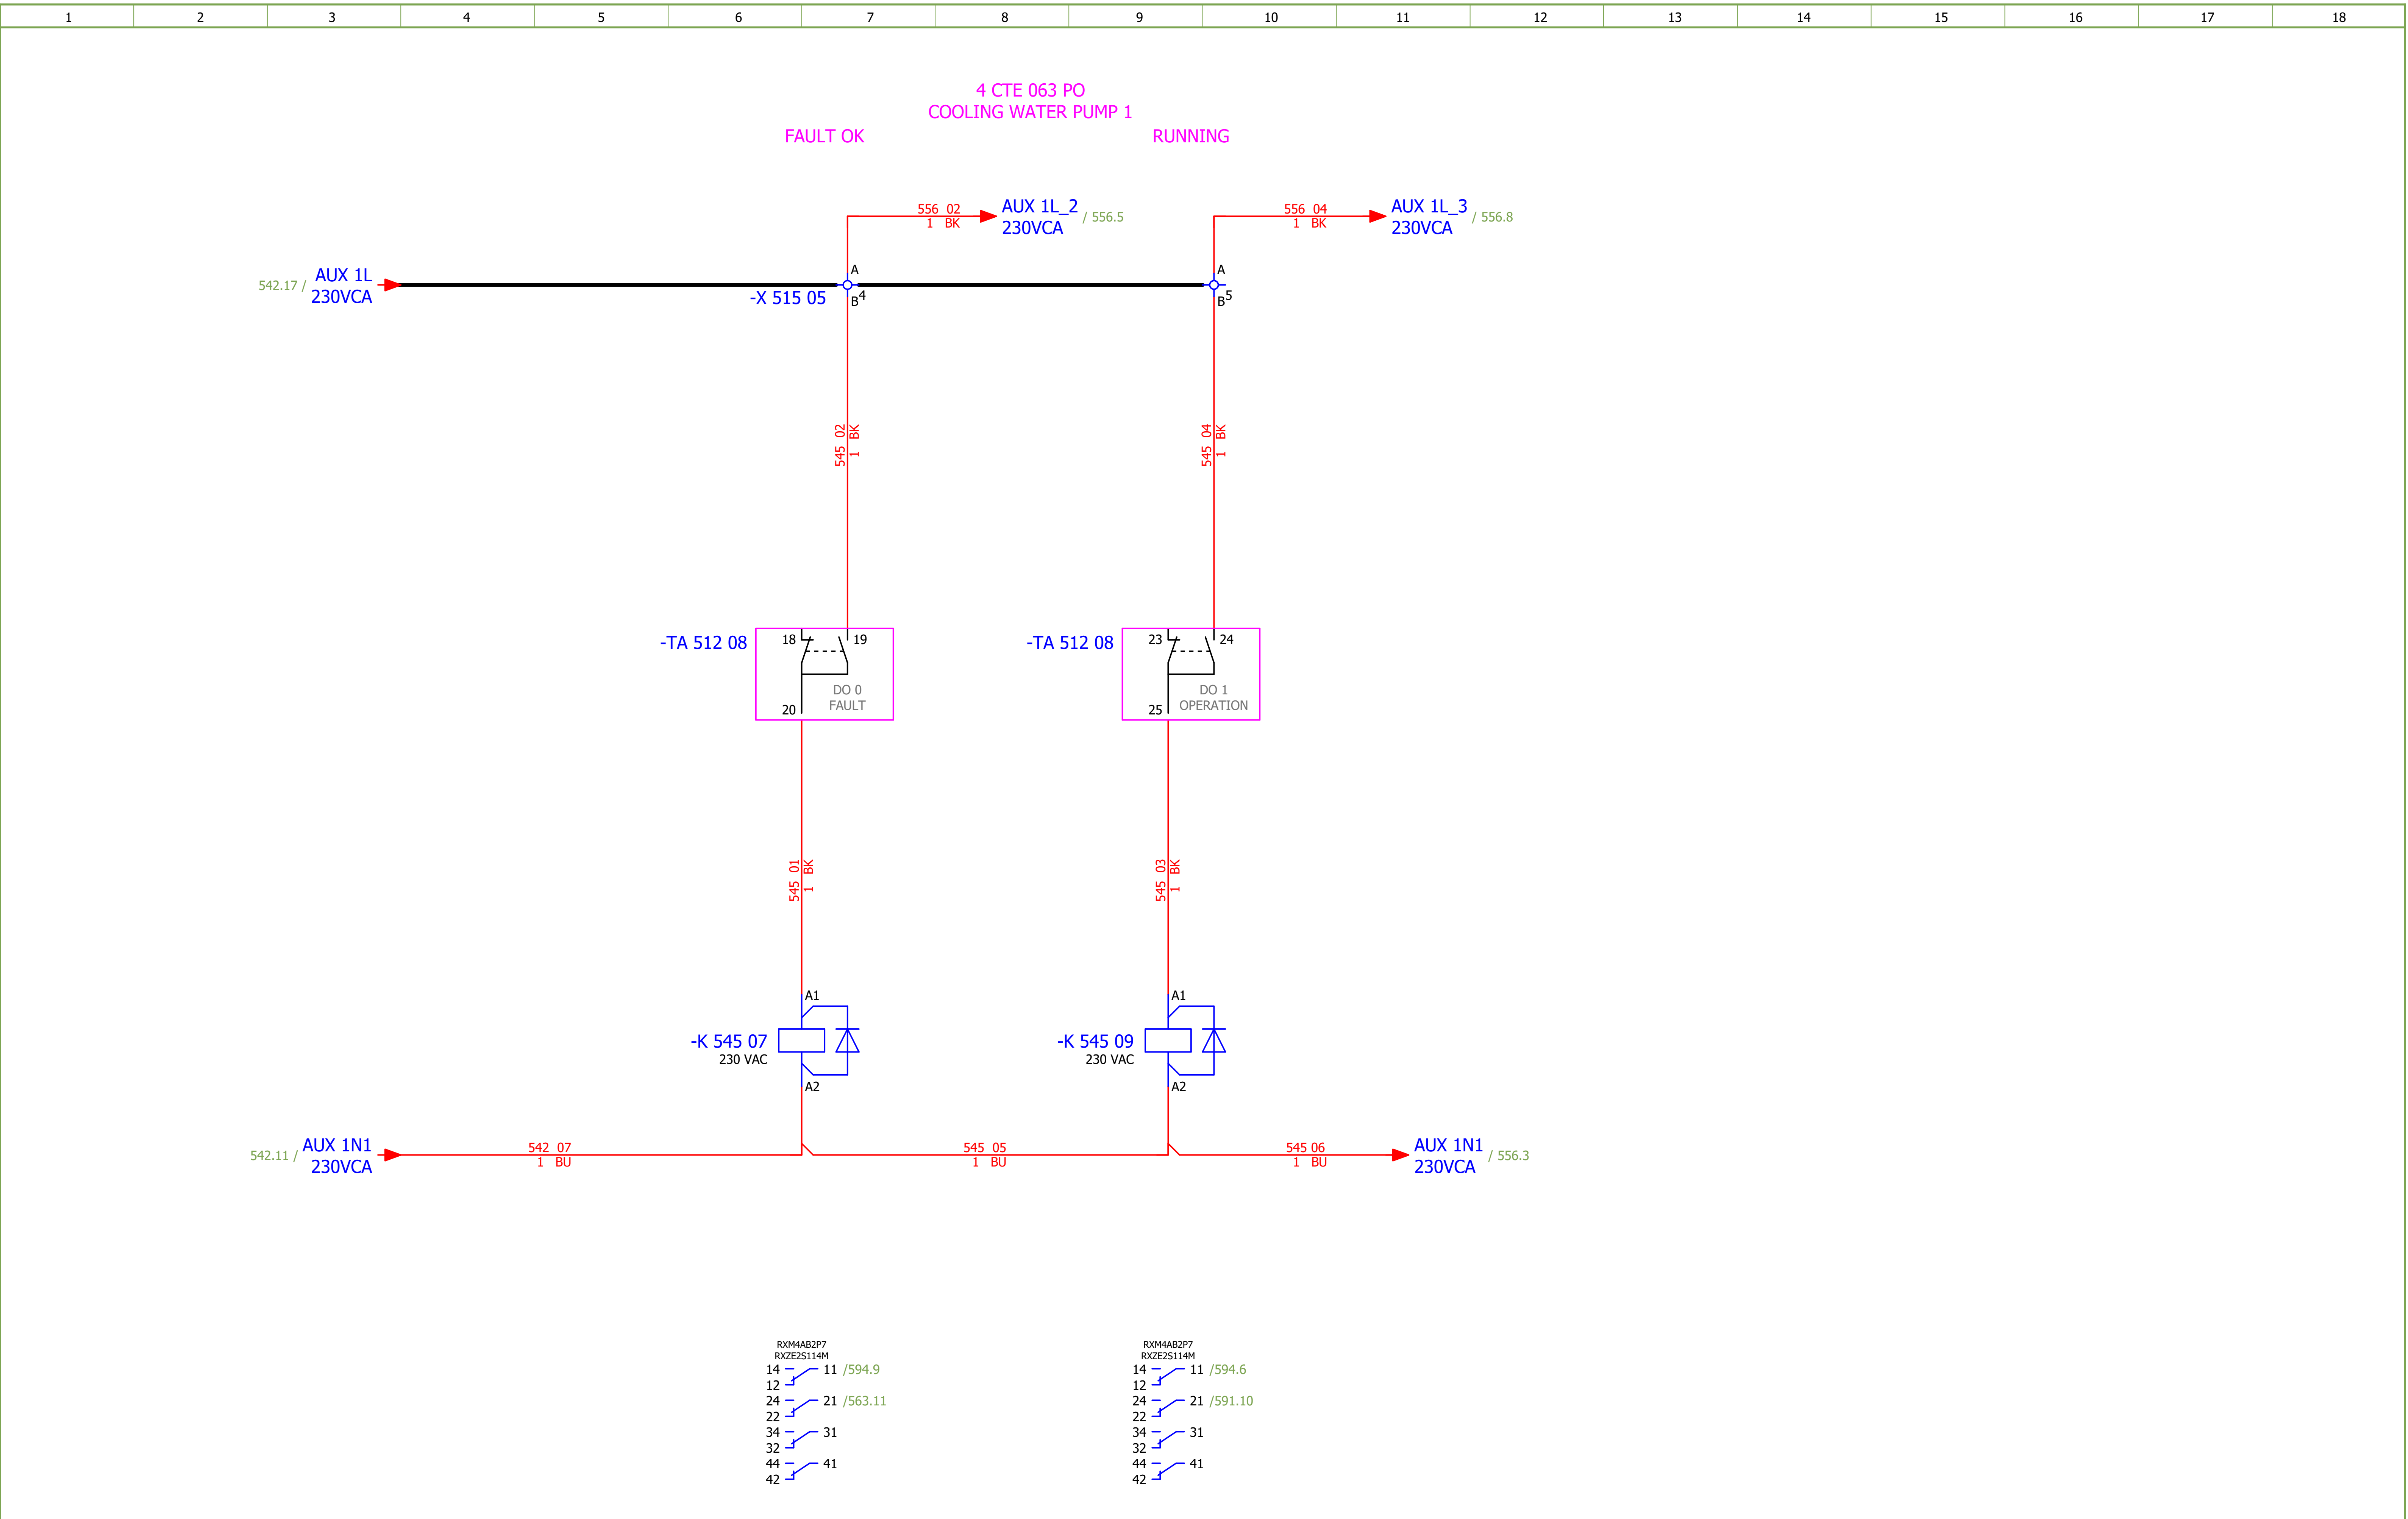

Date:	17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0
Drawn:	Luka Božičević				Number: 1874	Revision: F
Approved:	Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 1 - DIGITAL OUTPUTS	Drawing designation: BRC-4-ATEP0-1870-F	#MB
Format:	A3				=4LKF001AR +4LKF006AR	Sheet: 545 Next: 546

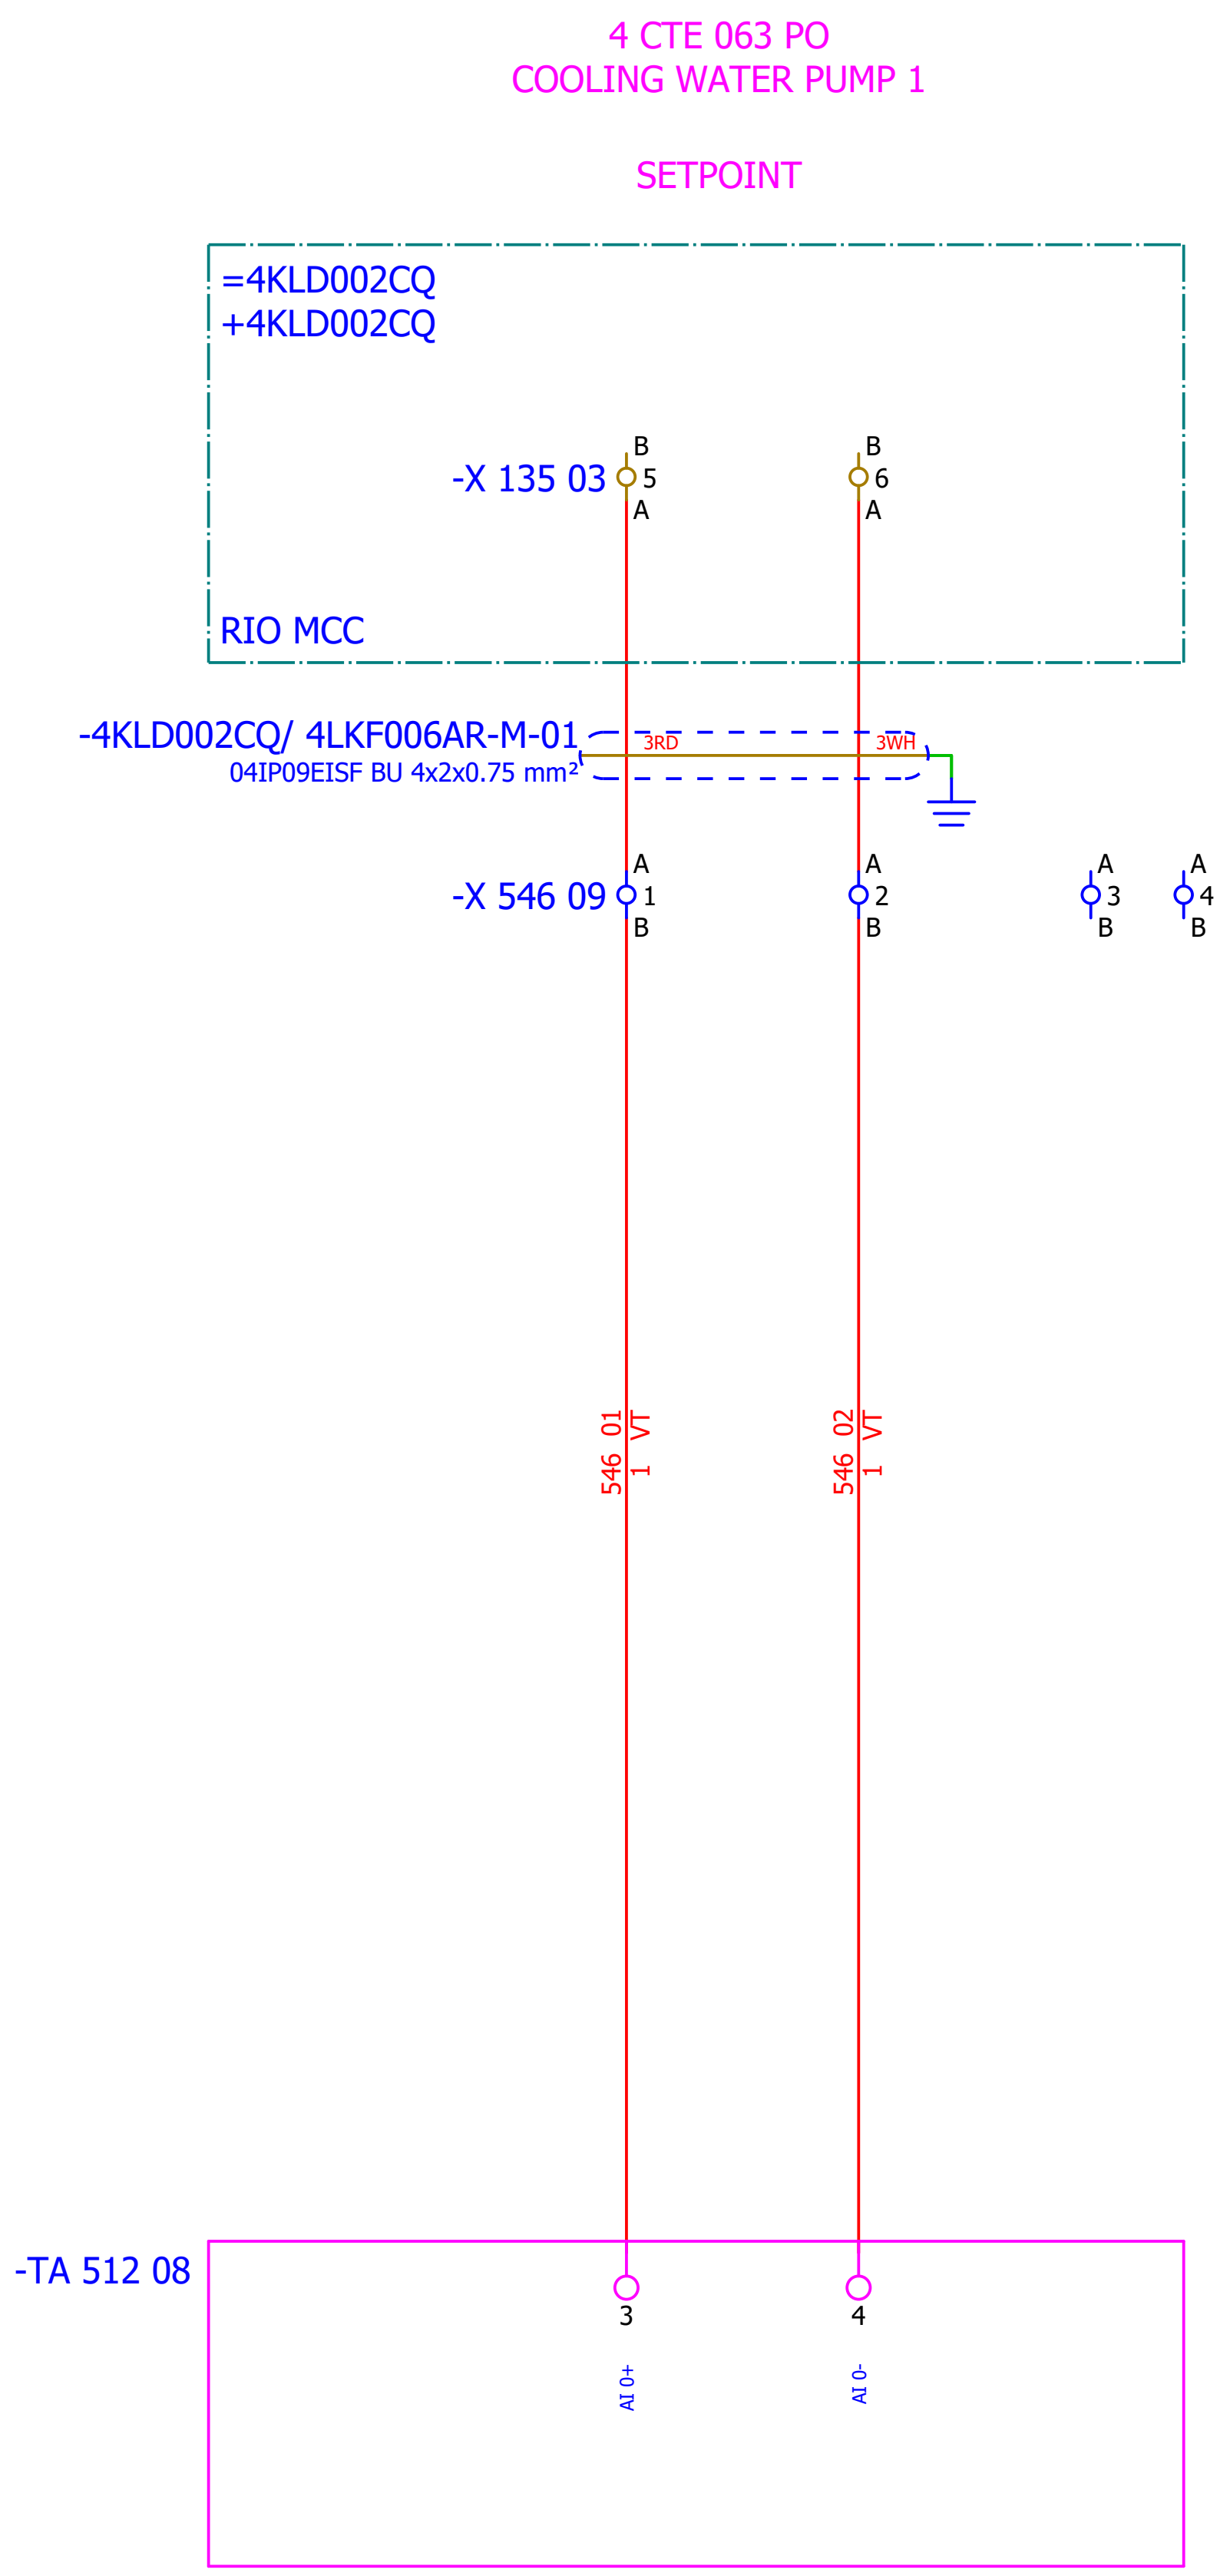

4 CTE 063 PO
COOLING WATER PUMP 1
SETPOINT
=4KLD002CQ
+4KLD002CQ
-X 135 03
B 5 A
B 6 A
RIO MCC
-4KLD002CQ/ 4LKF006AR-M-01
04IP09EISF BU 4x2x0.75 mm²
3RD
3WH
-X 546 09
A 1 B
A 2 B
A 3 B
A 4 B
546 01 1 VT
546 02 1 VT
-TA 512 08
3
4
AI 0+
AI 0-

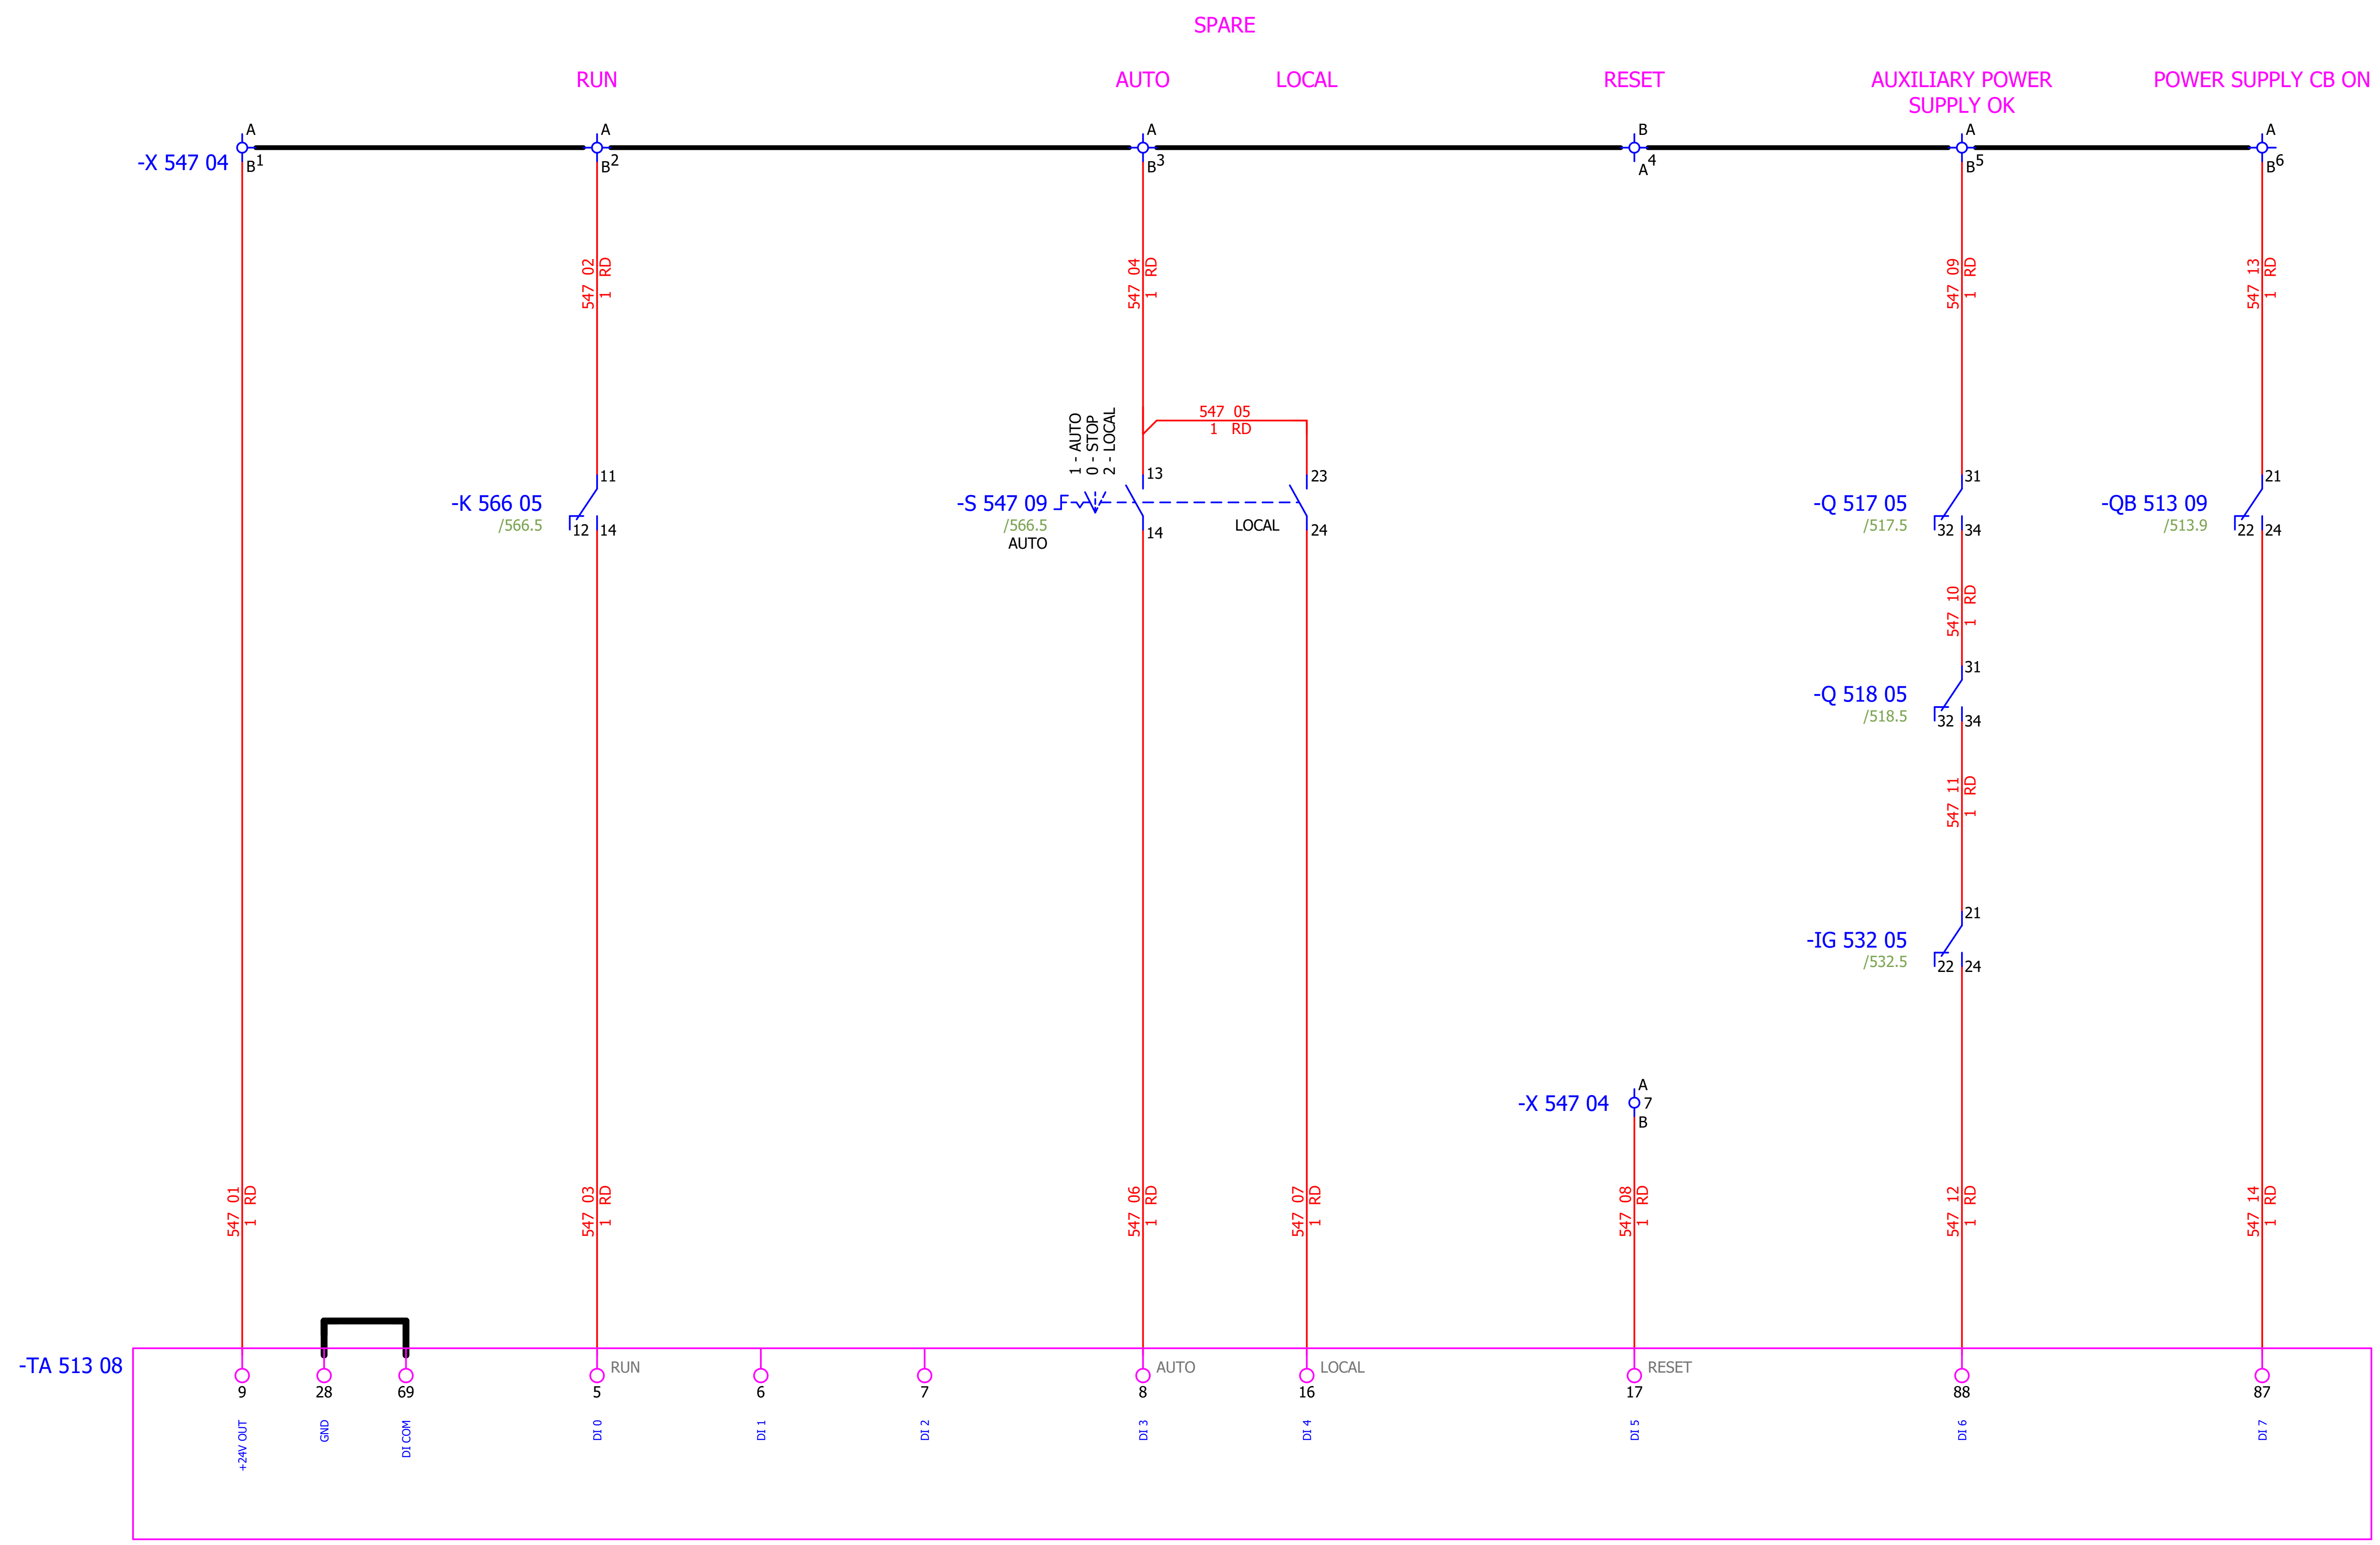

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F	#MB
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE - DIGITAL INPUTS	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 547
Format:	A3								+4LKF006AR	Next: 548

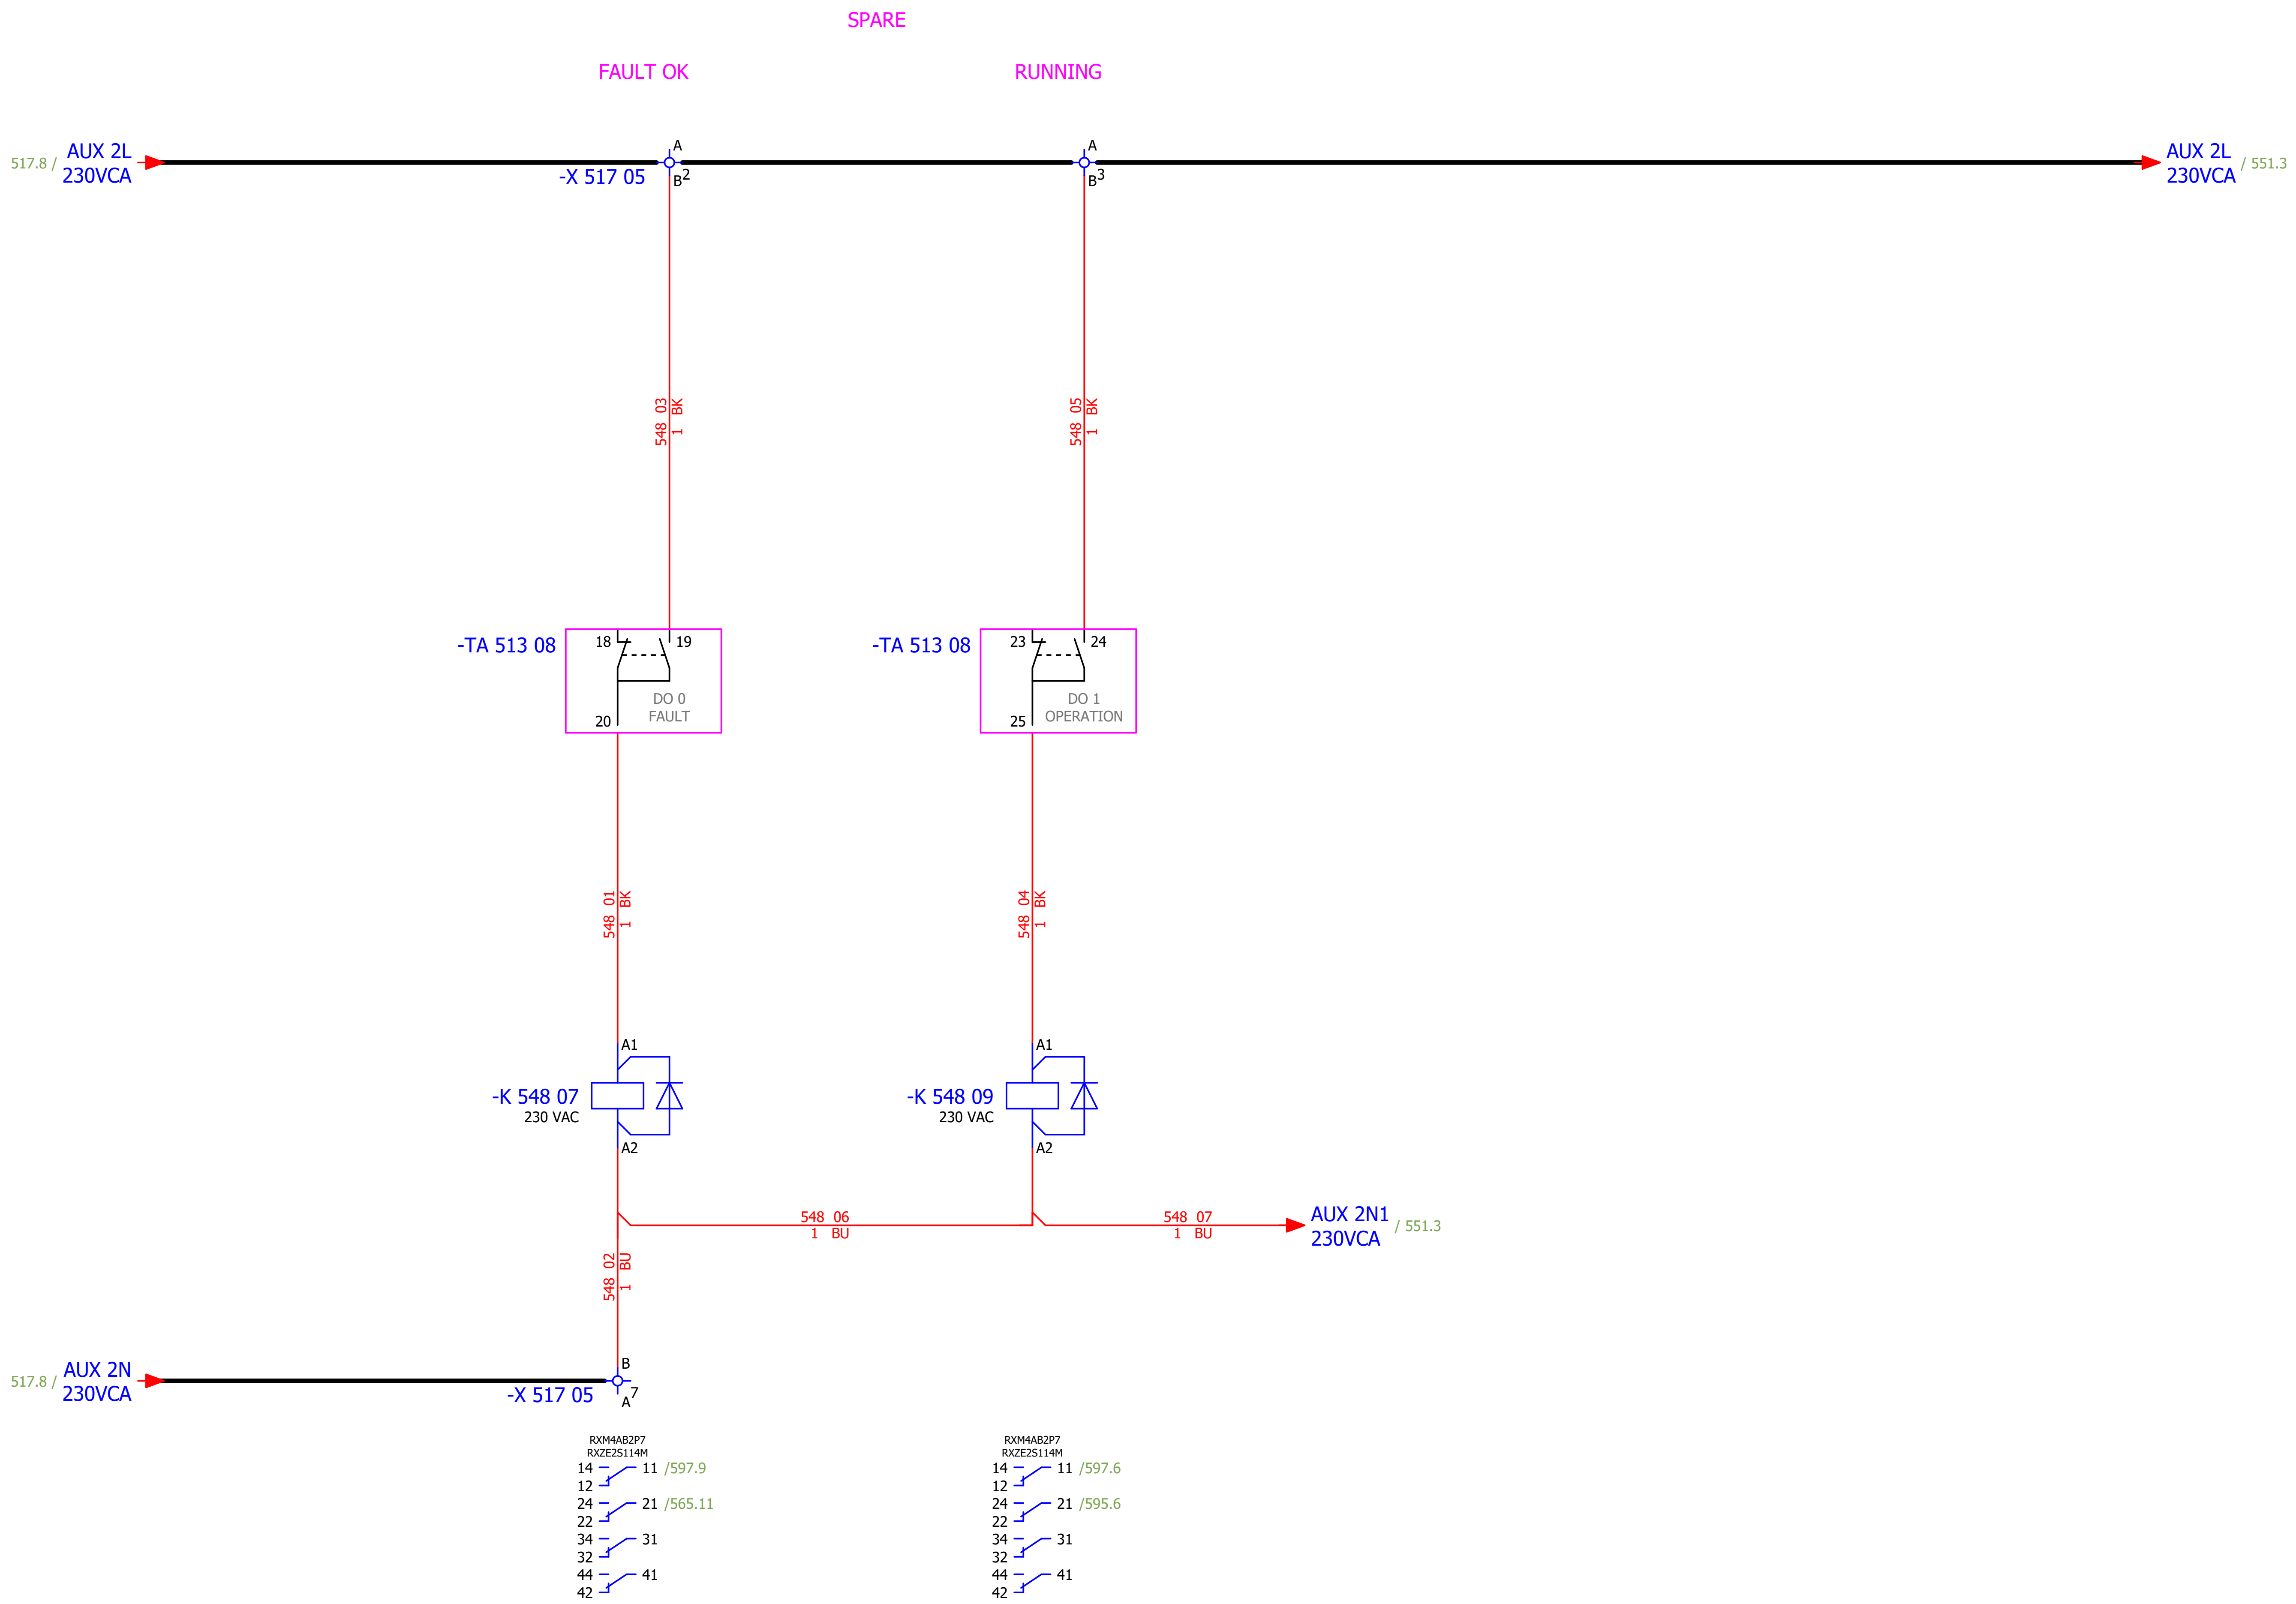

Date: 17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn: Luka Božičević								#MB
Approved: Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE - DIGITAL OUTPUTS	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 548
Format: A3							+4LKF006AR	Next: 549

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

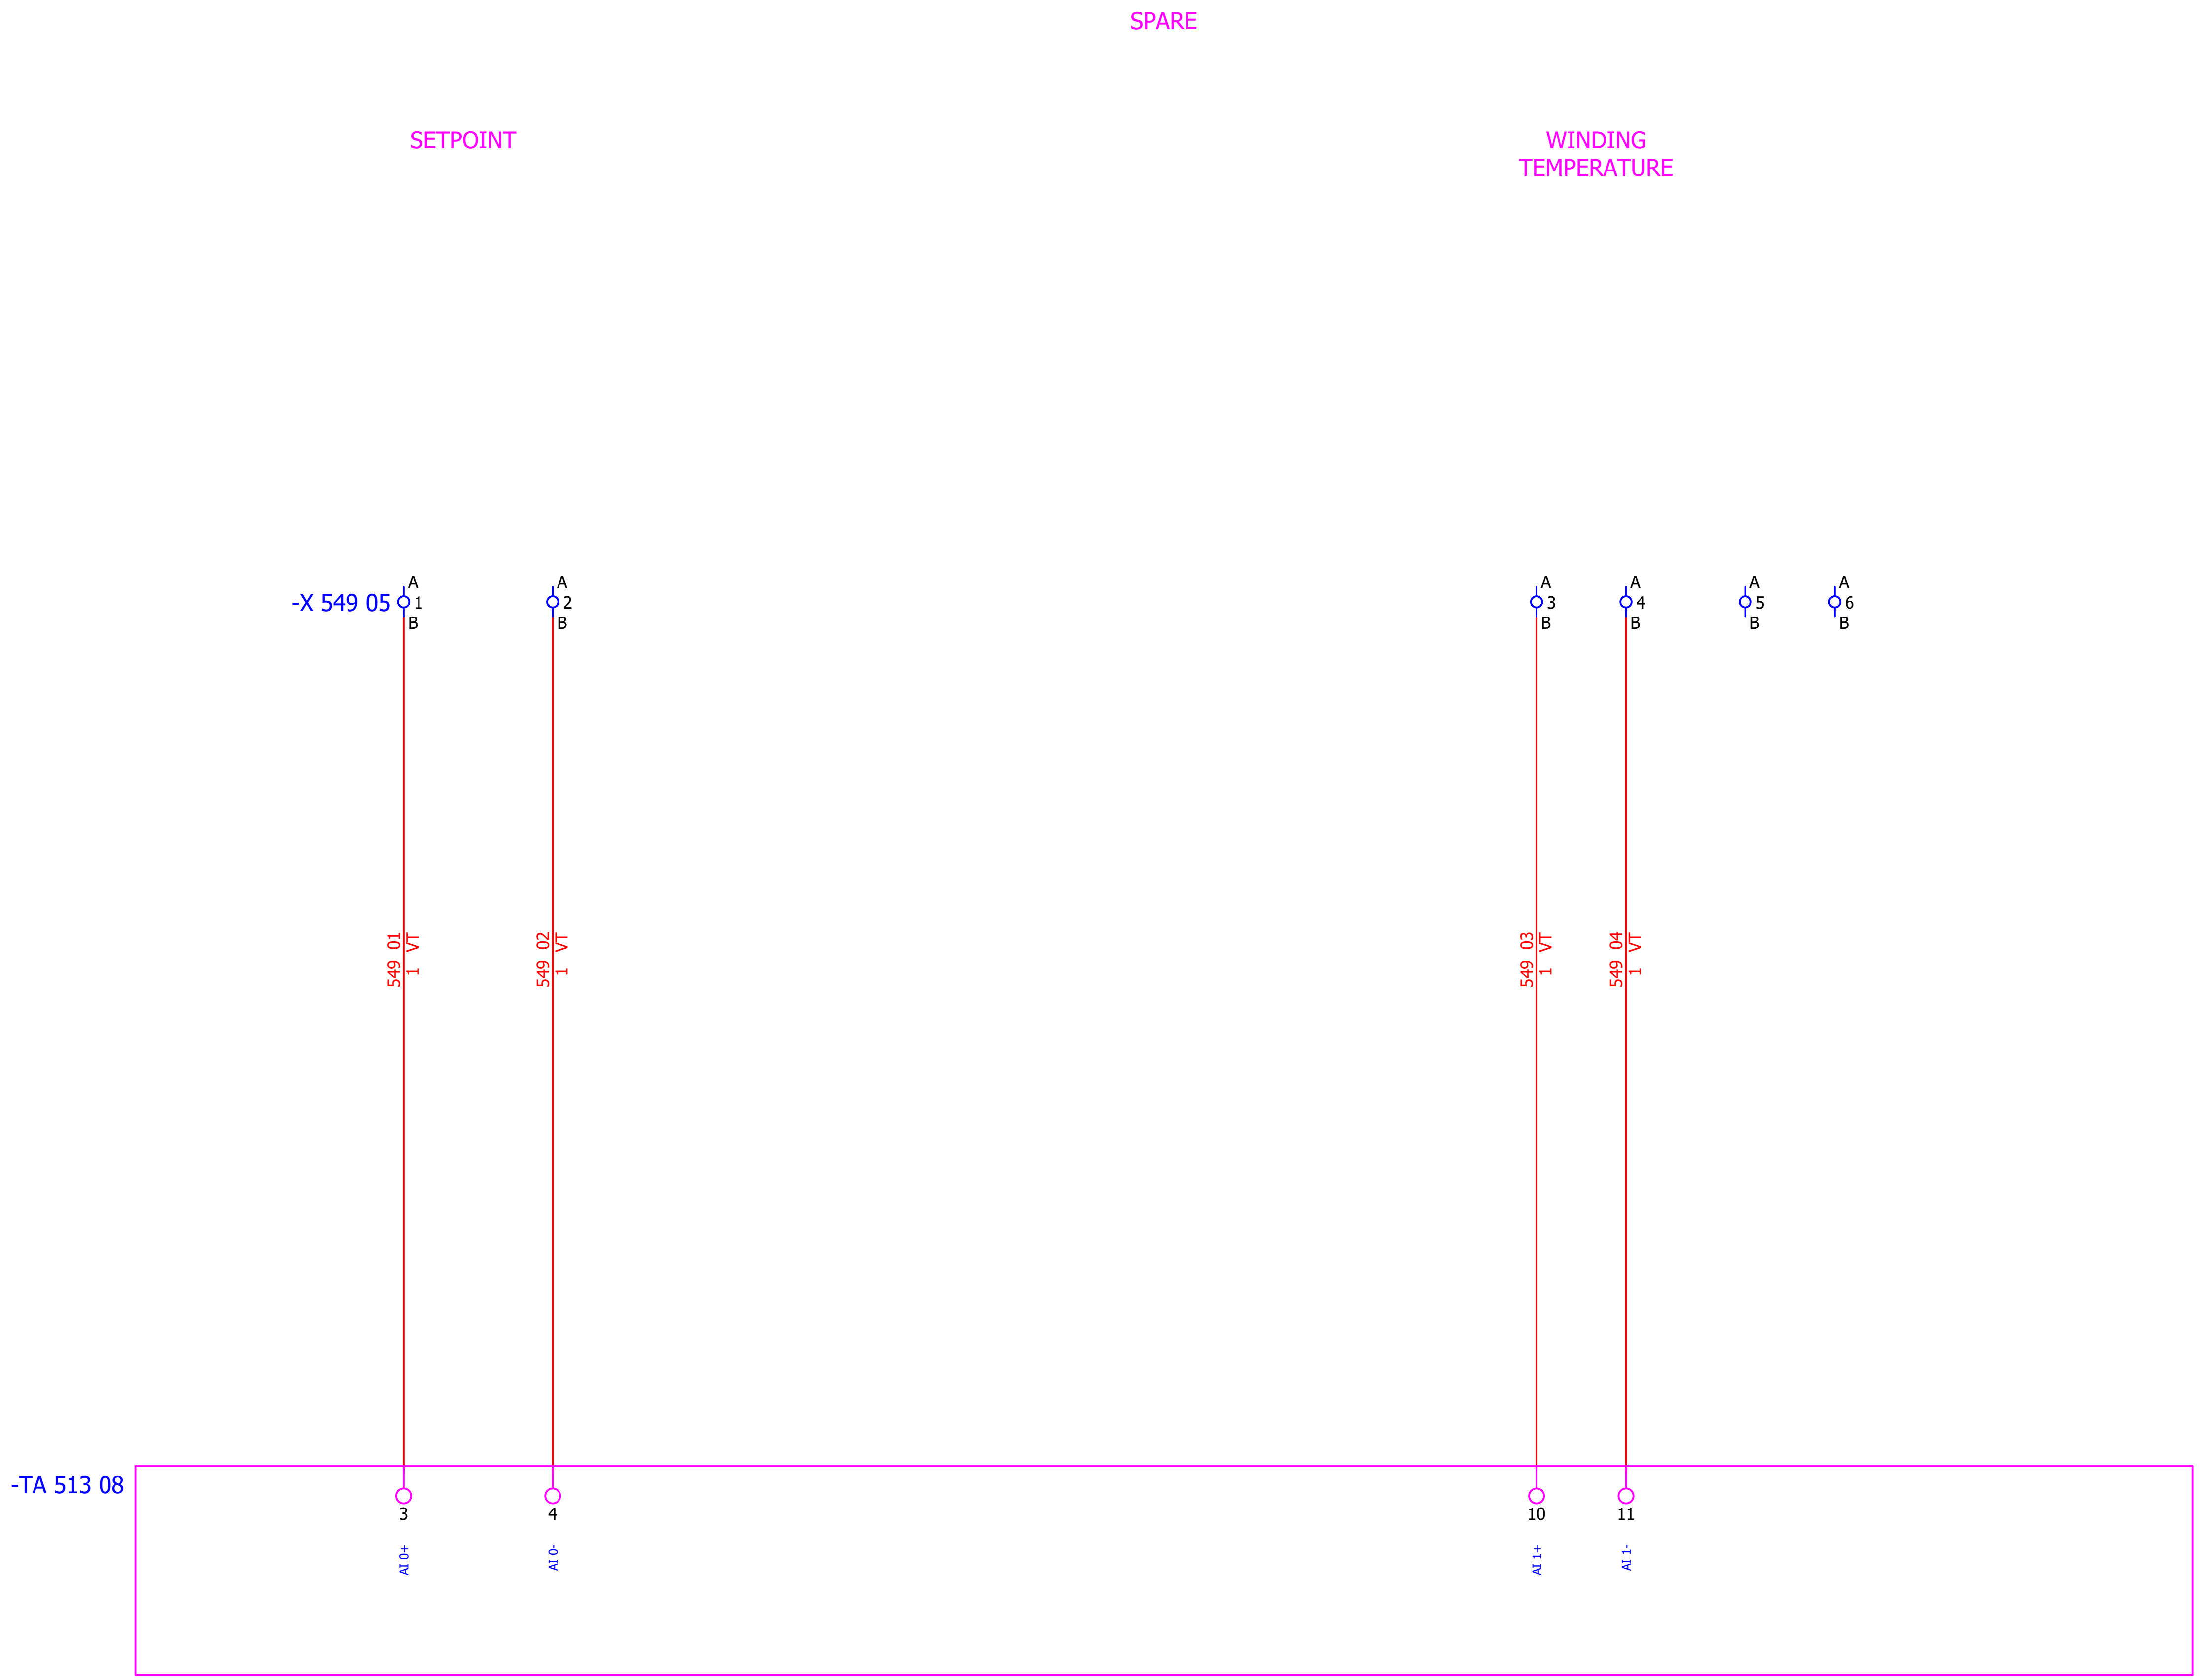

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874
Drawn:	Luka Božičević							
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE - ANALOG INPUTS	Drawing designation: BRC-4-ATEP0-1870-F		
Format:	A3							

Revision:	F
	#MB
=4LKF001AR	Sheet: 549
+4LKF006AR	Next: 550

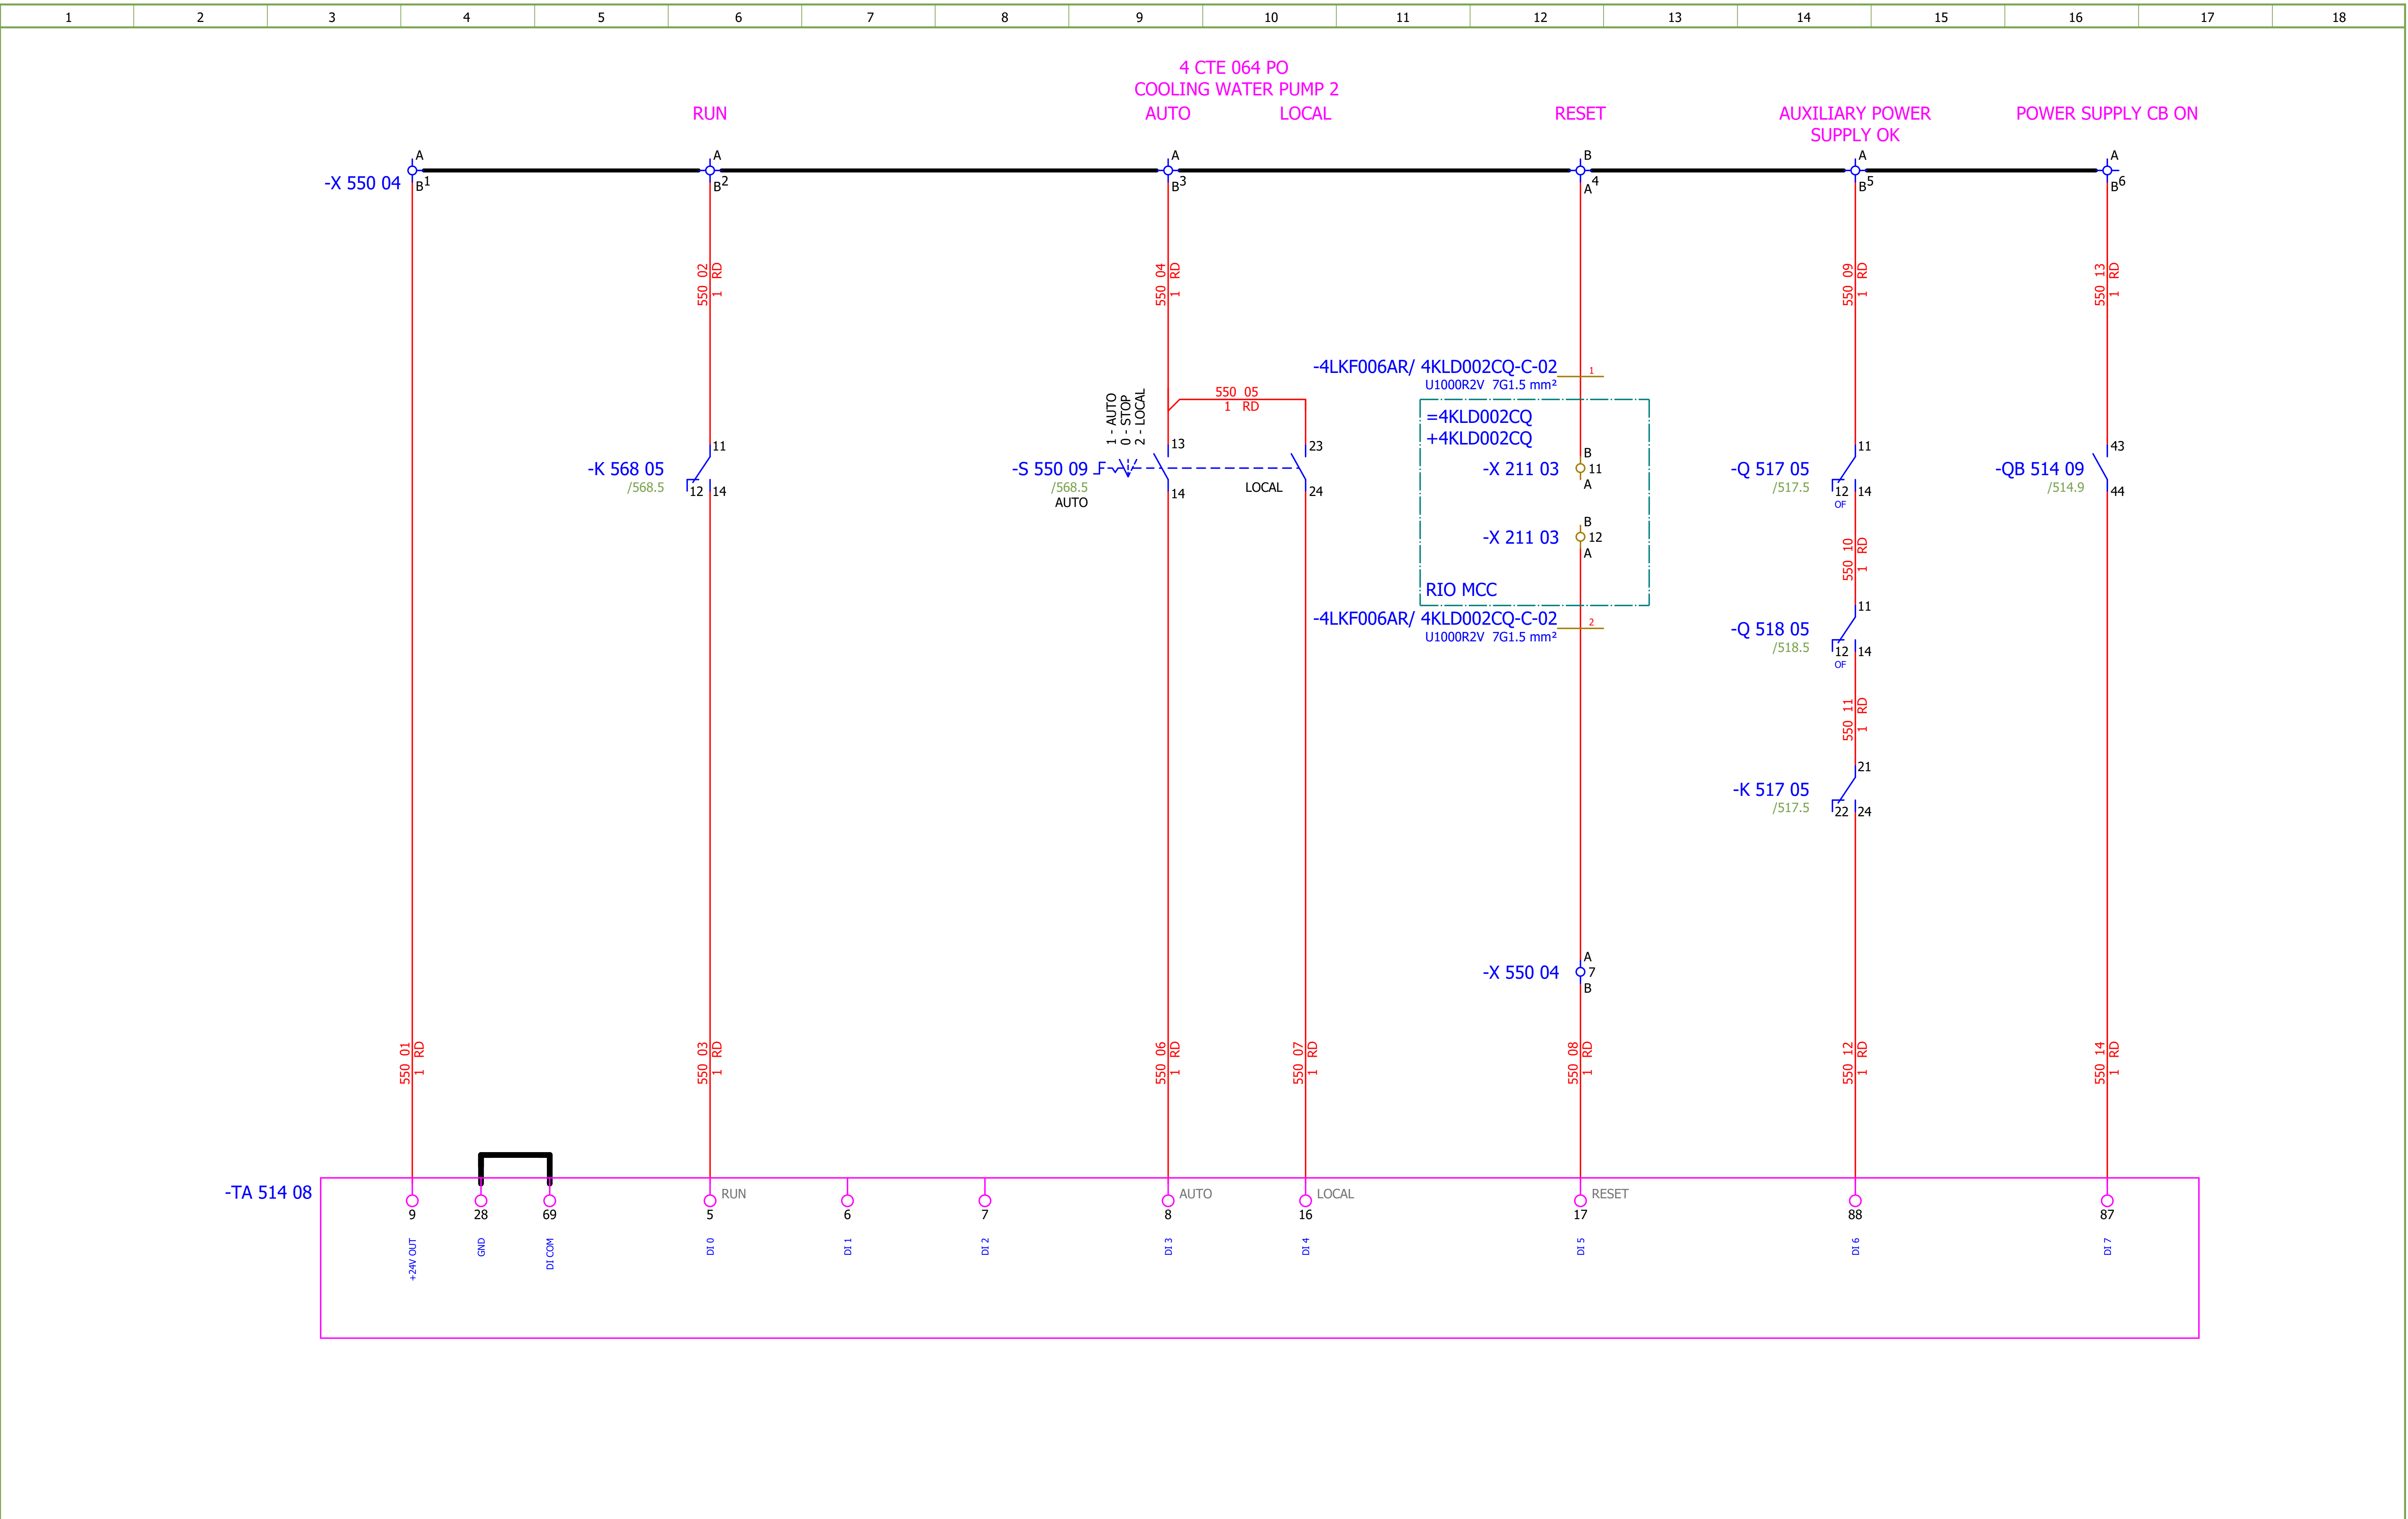

Date: 17.03.2026.	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0
Drawn: Luka Božičević			Number: 1874	Revision: F
Approved: Grga Kolić	Object: RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 2 - DIGITAL INPUTS	Drawing designation: BRC-4-ATEP0-1870-F	#MB
Format: A3			=4LKF001AR +4LKF006AR	Sheet: 550 Next: 551

SINTAKSA A Voith Company

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

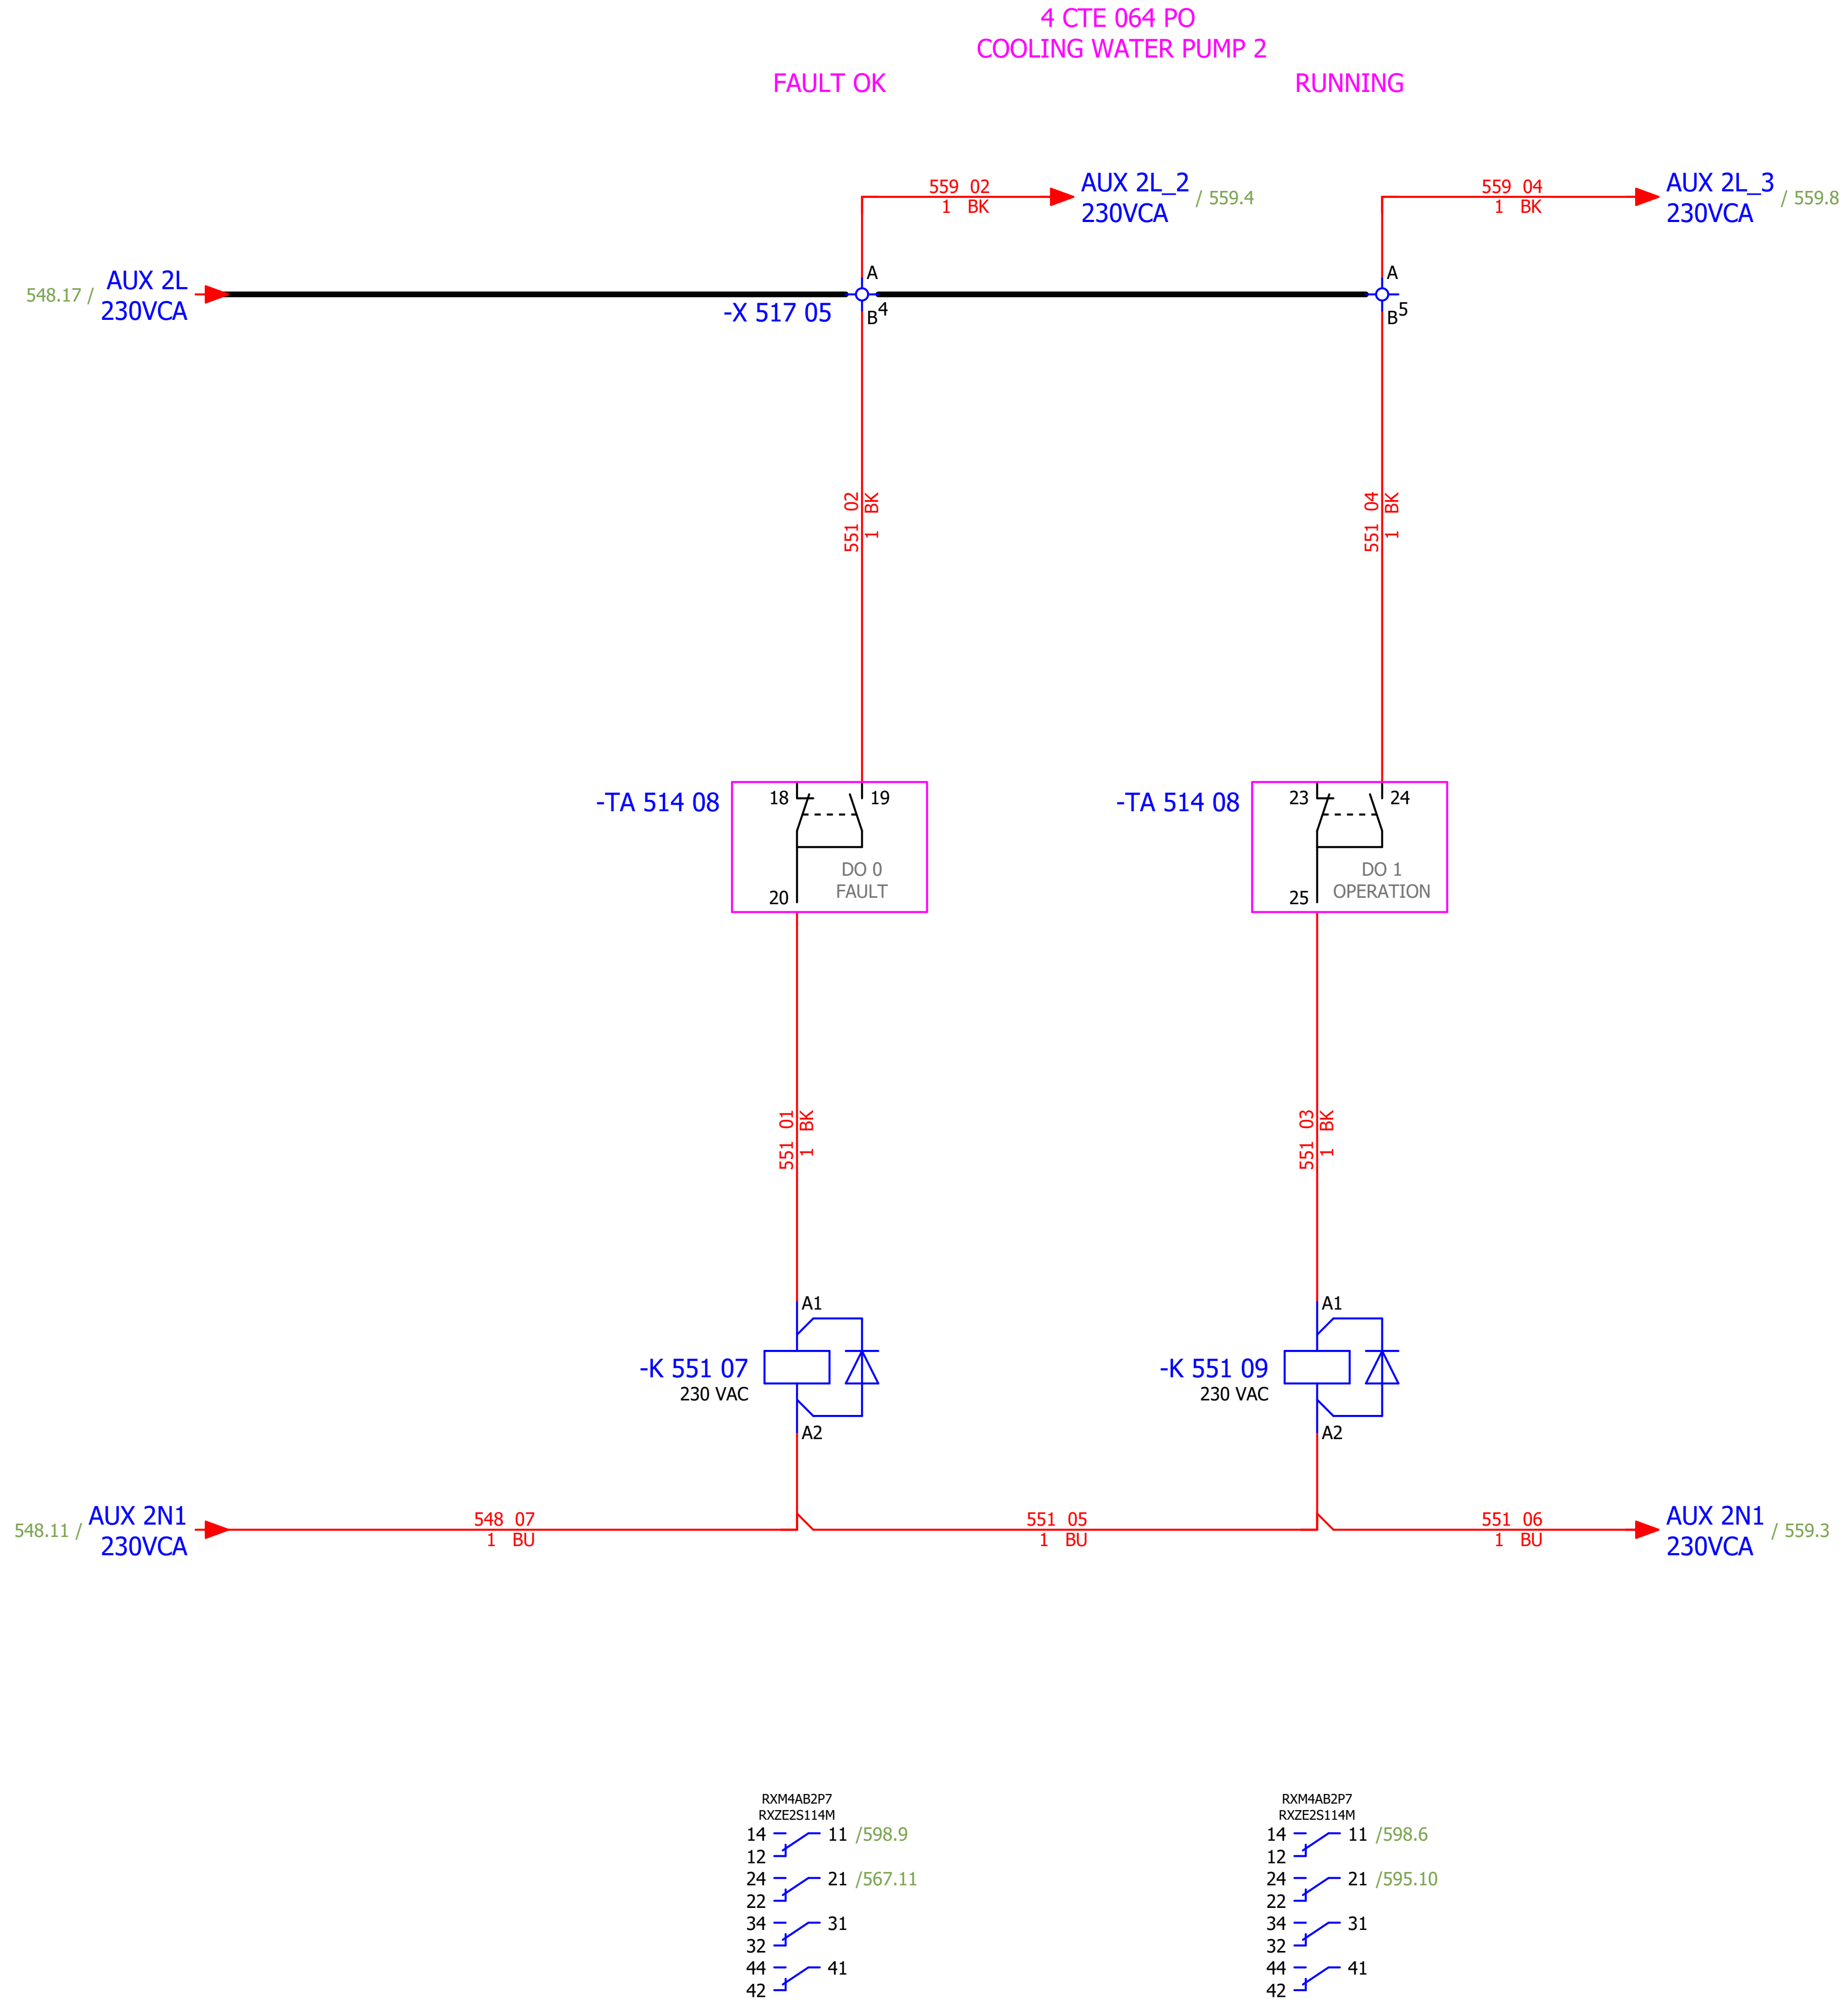

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F	#MB
Drawn:	Luka Božičević										
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	COOLING WATER PUMP 2 - DIGITAL OUTPUTS	Drawing designation:	BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 551
Format:	A3									+4LKF006AR	Next: 552

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

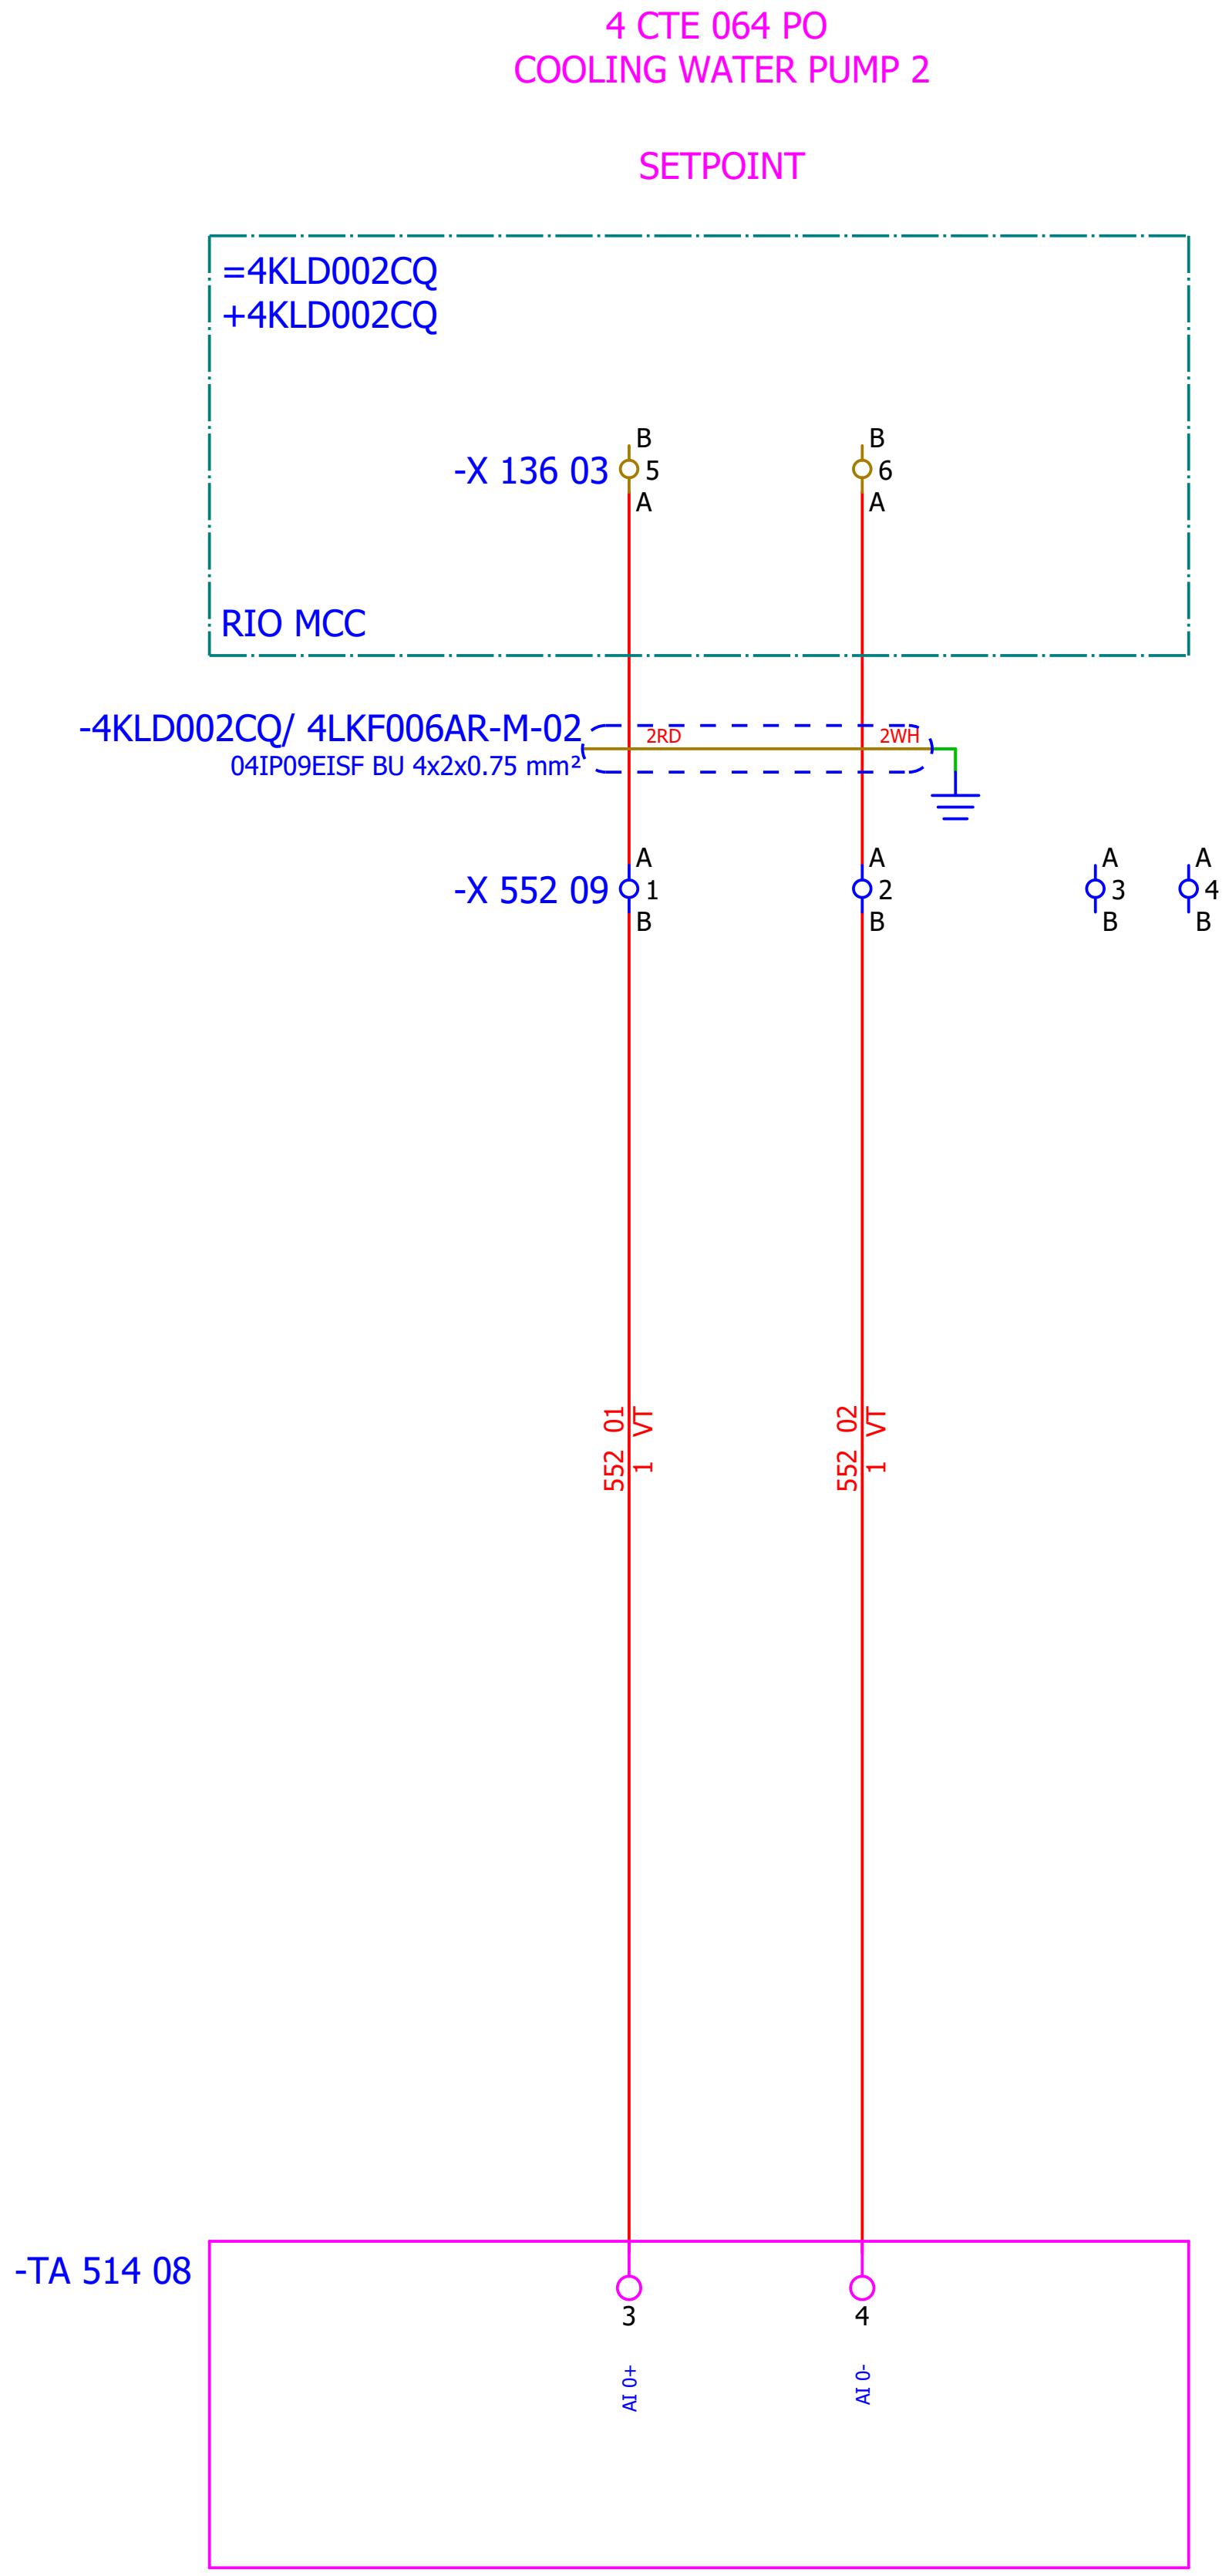

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević									#MB
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	COOLING WATER PUMP 2 - ANALOG INPUTS	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 552
Format:	A3								+4LKF006AR	Next: 553

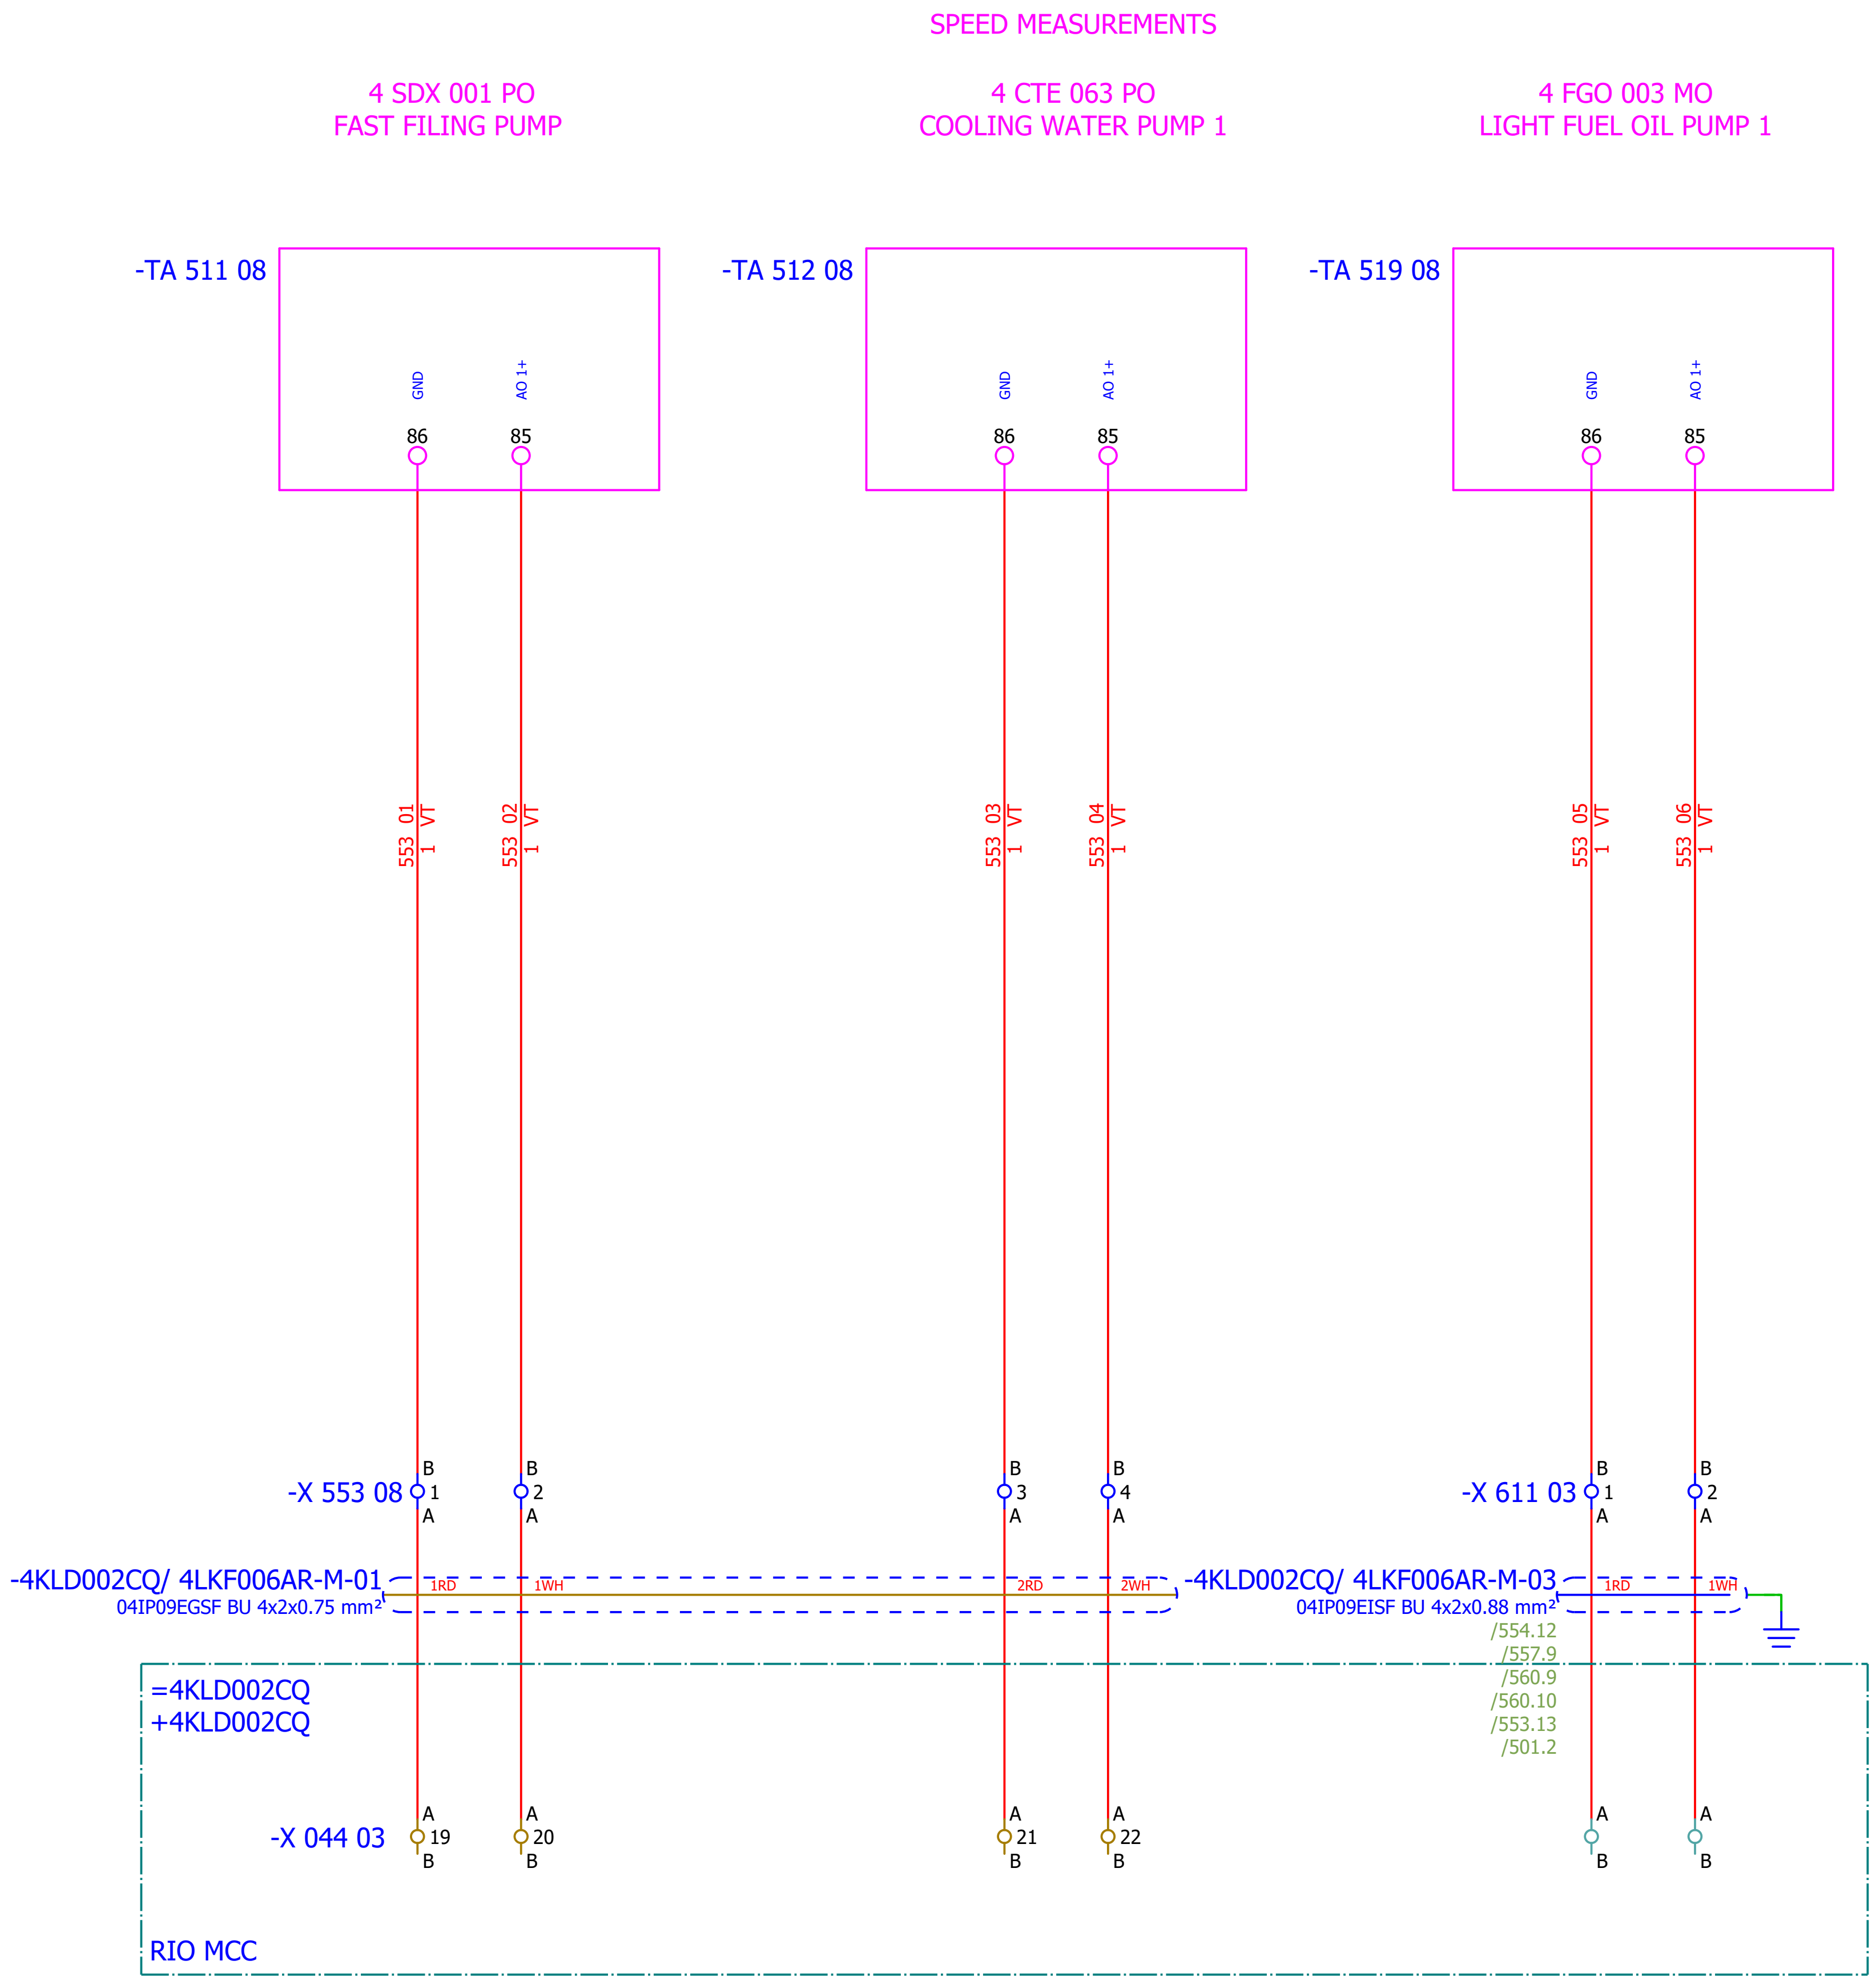

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević								#MB
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: VFD GROUP 1 - ANALOG OUTPUTS	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 553
Format:	A3							+4LKF006AR	Next: 554

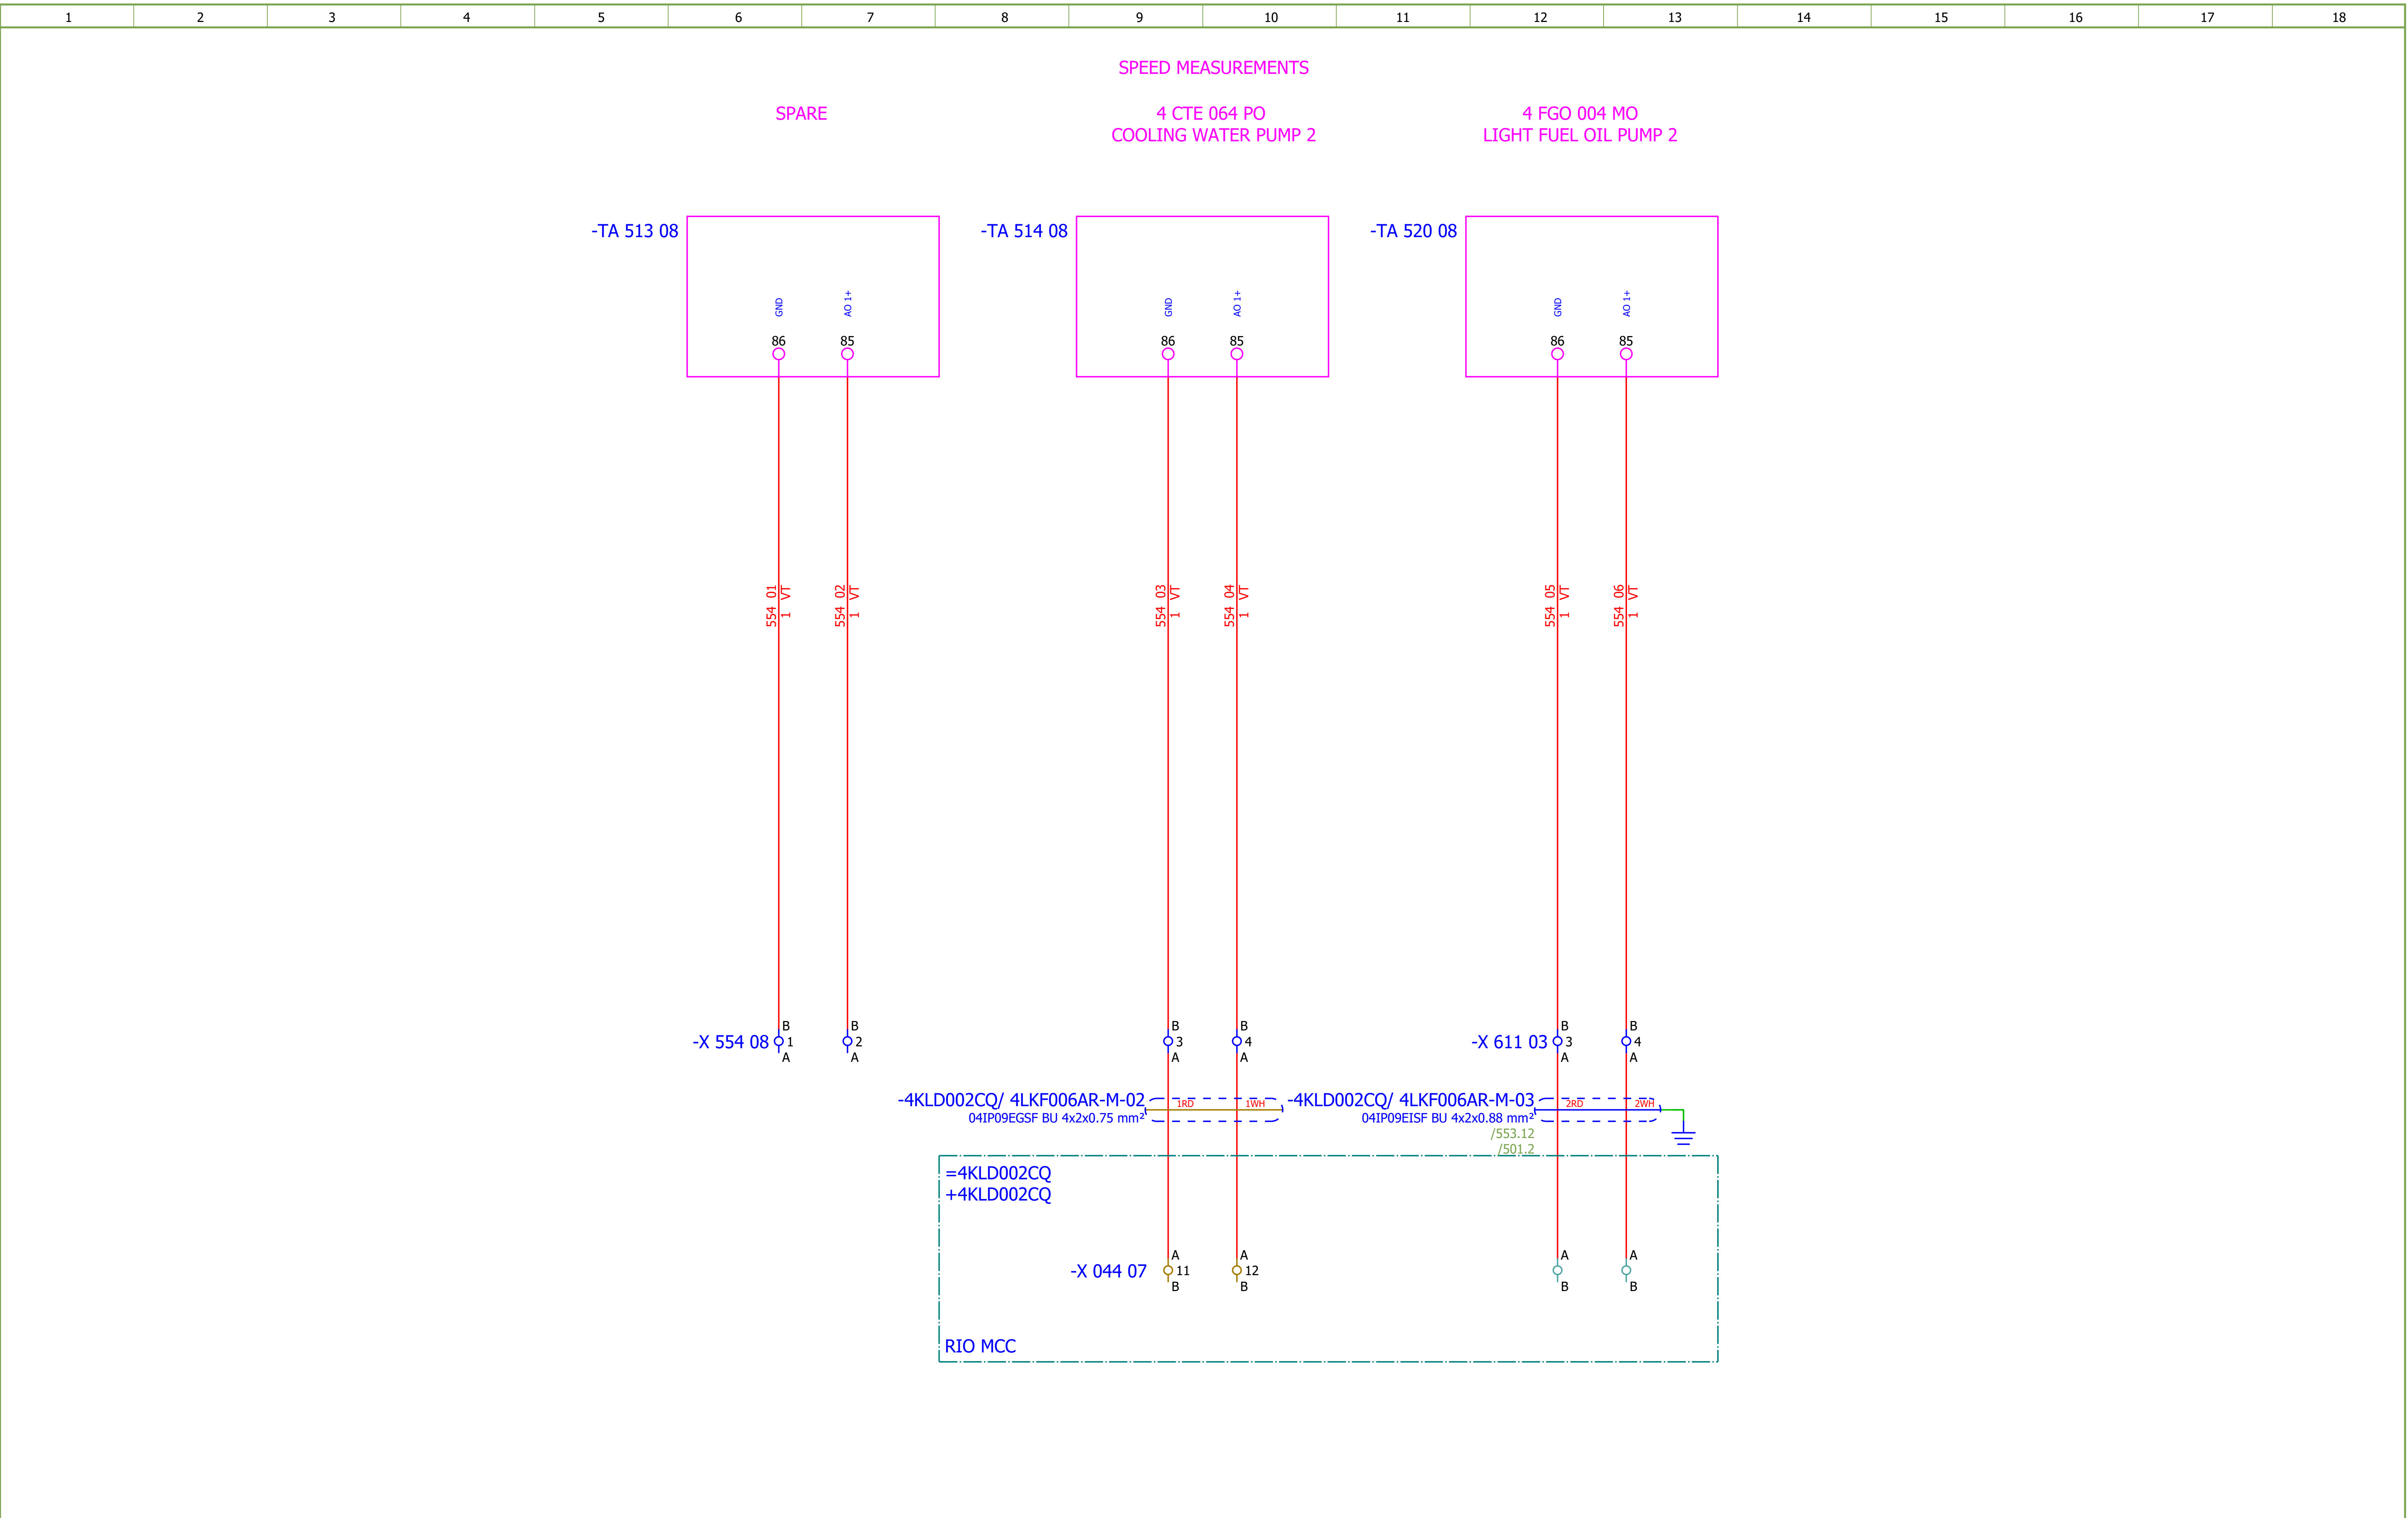

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4 · Unit & Issuer: ATEP0 · Number: 1874	Revision: F · #MB
Drawn:	Luka Božičević						
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: VFD GROUP 2 - ANALOG OUTPUTS	Drawing designation: BRC-4-ATEP0-1870-F	=4LKF001AR · Sheet: 554
Format:	A3						+4LKF006AR · Next: 555

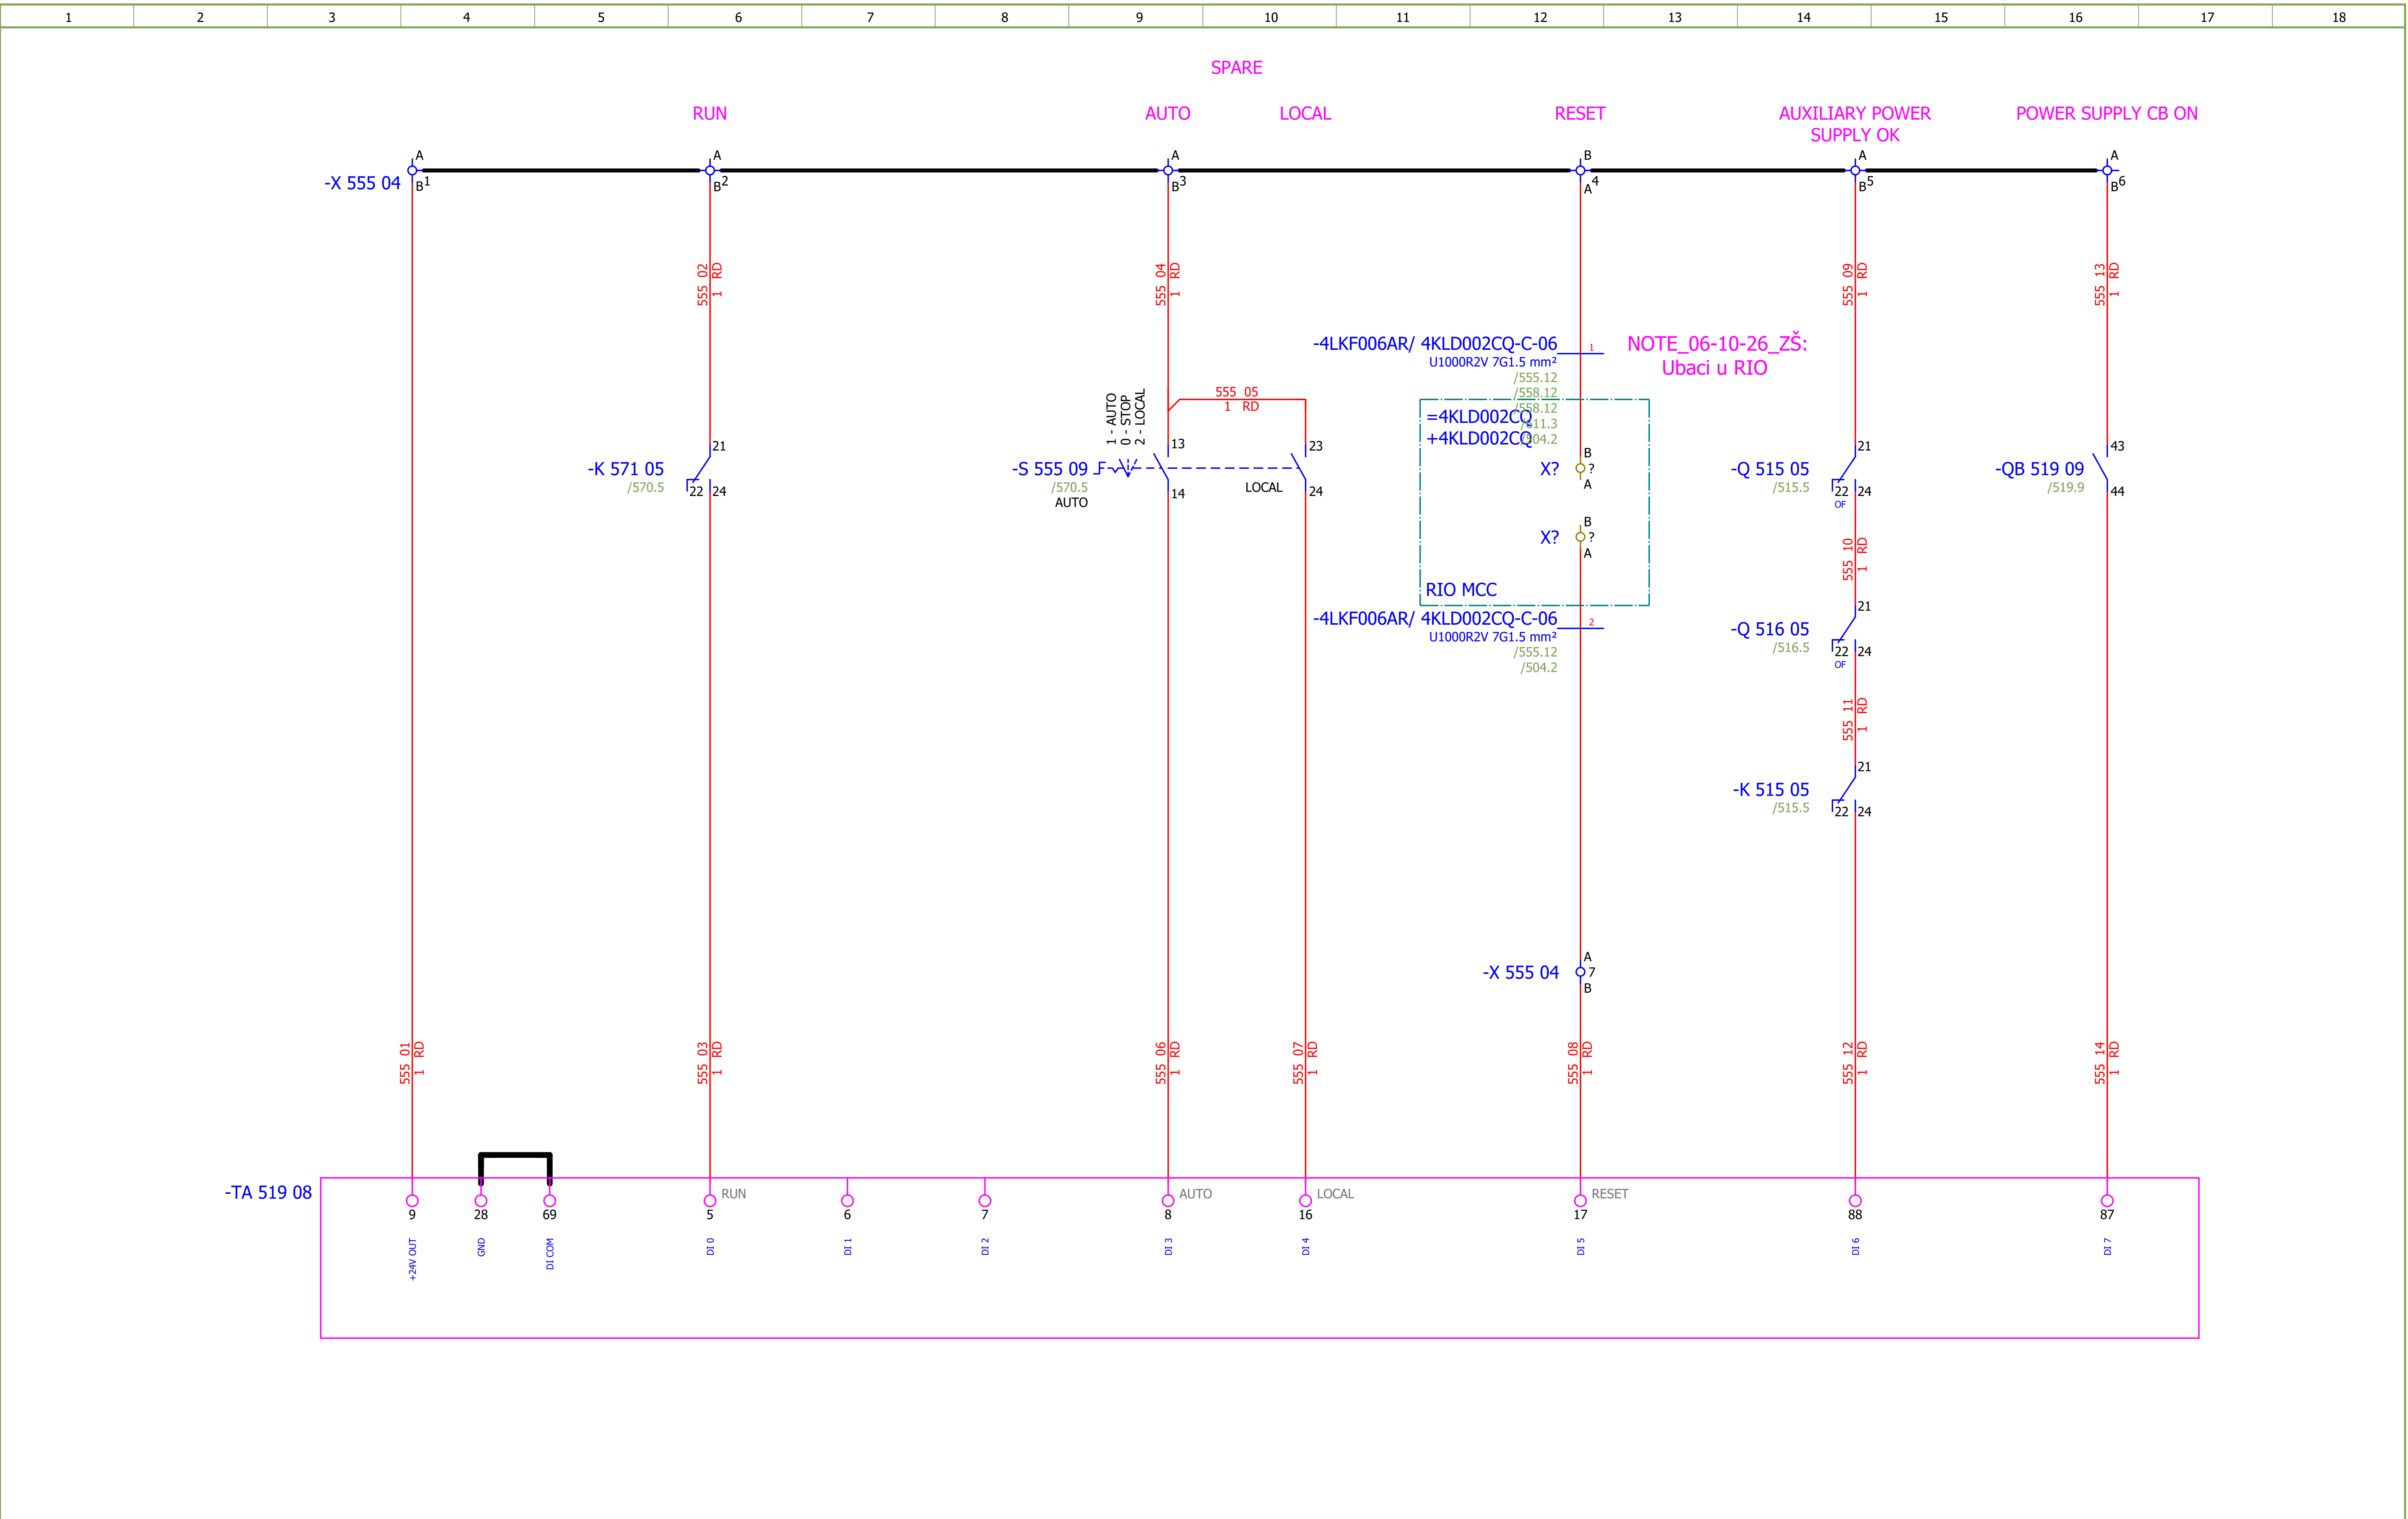

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F	#MB
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE - DIGITAL INPUTS	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 555
Format:	A3								+4LKF006AR	Next: 556

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

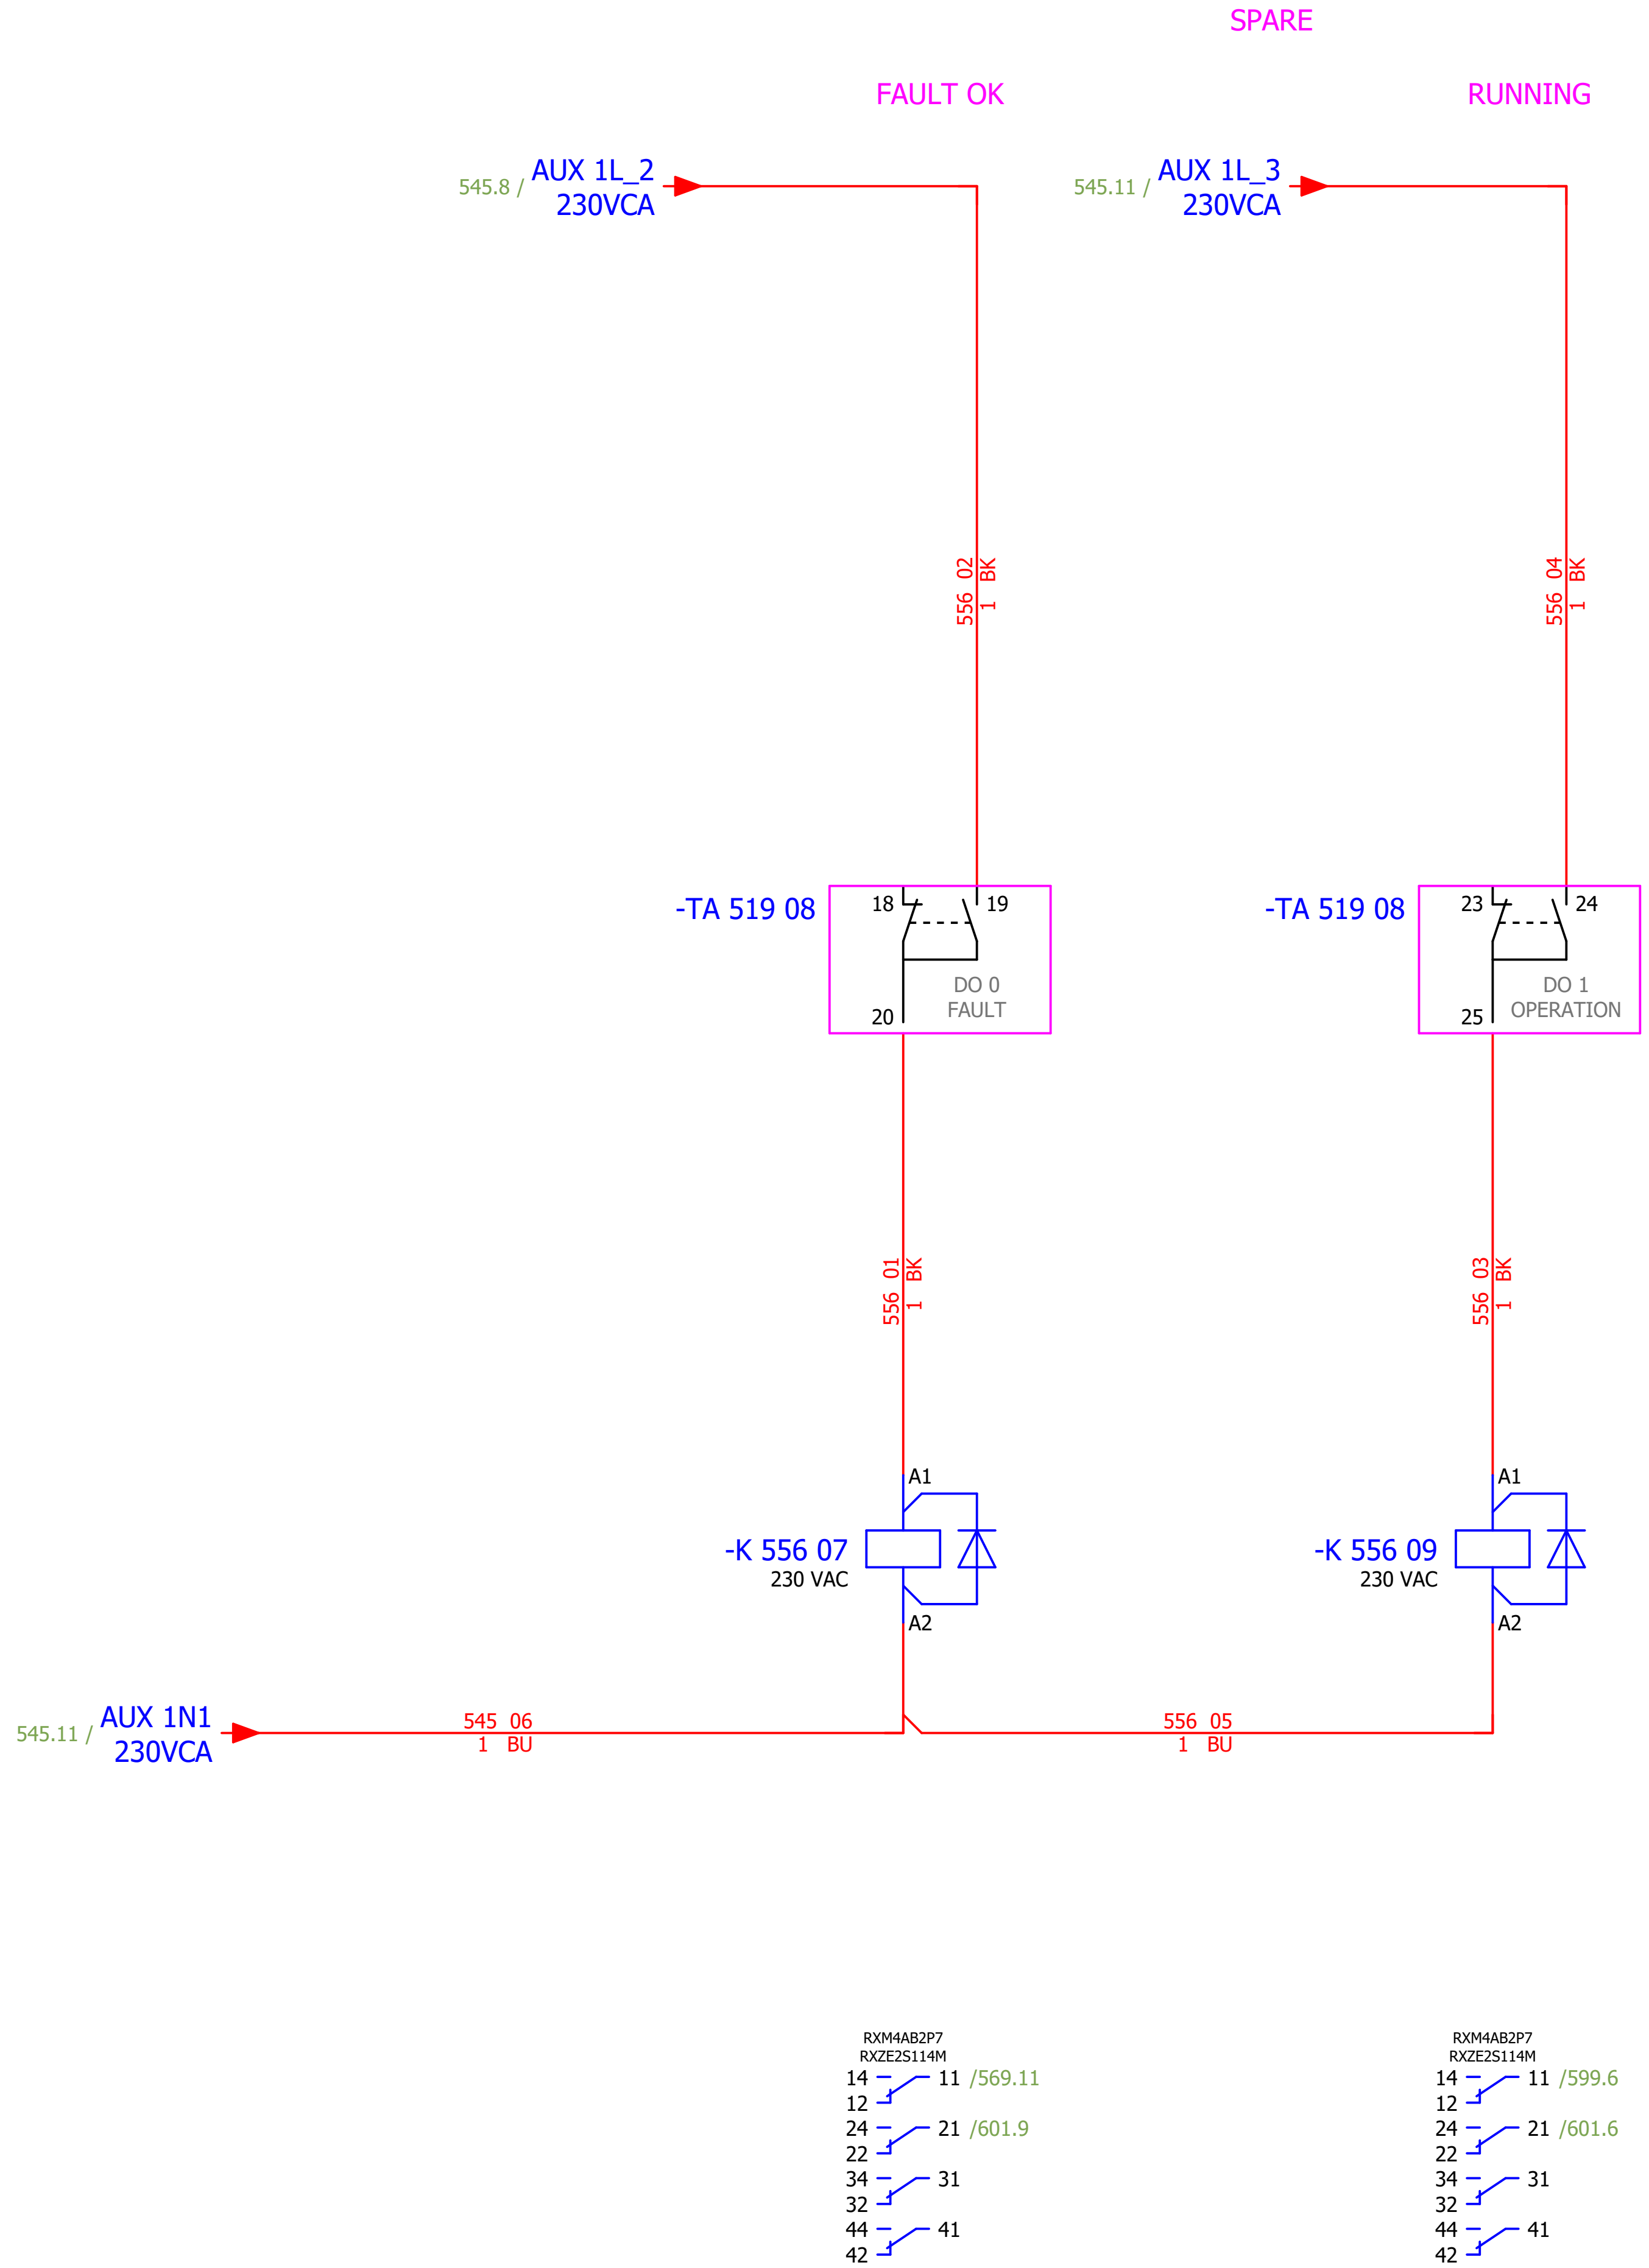

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević								#MB
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE - DIGITAL OUTPUTS	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 556
Format:	A3							+4LKF006AR	Next: 557

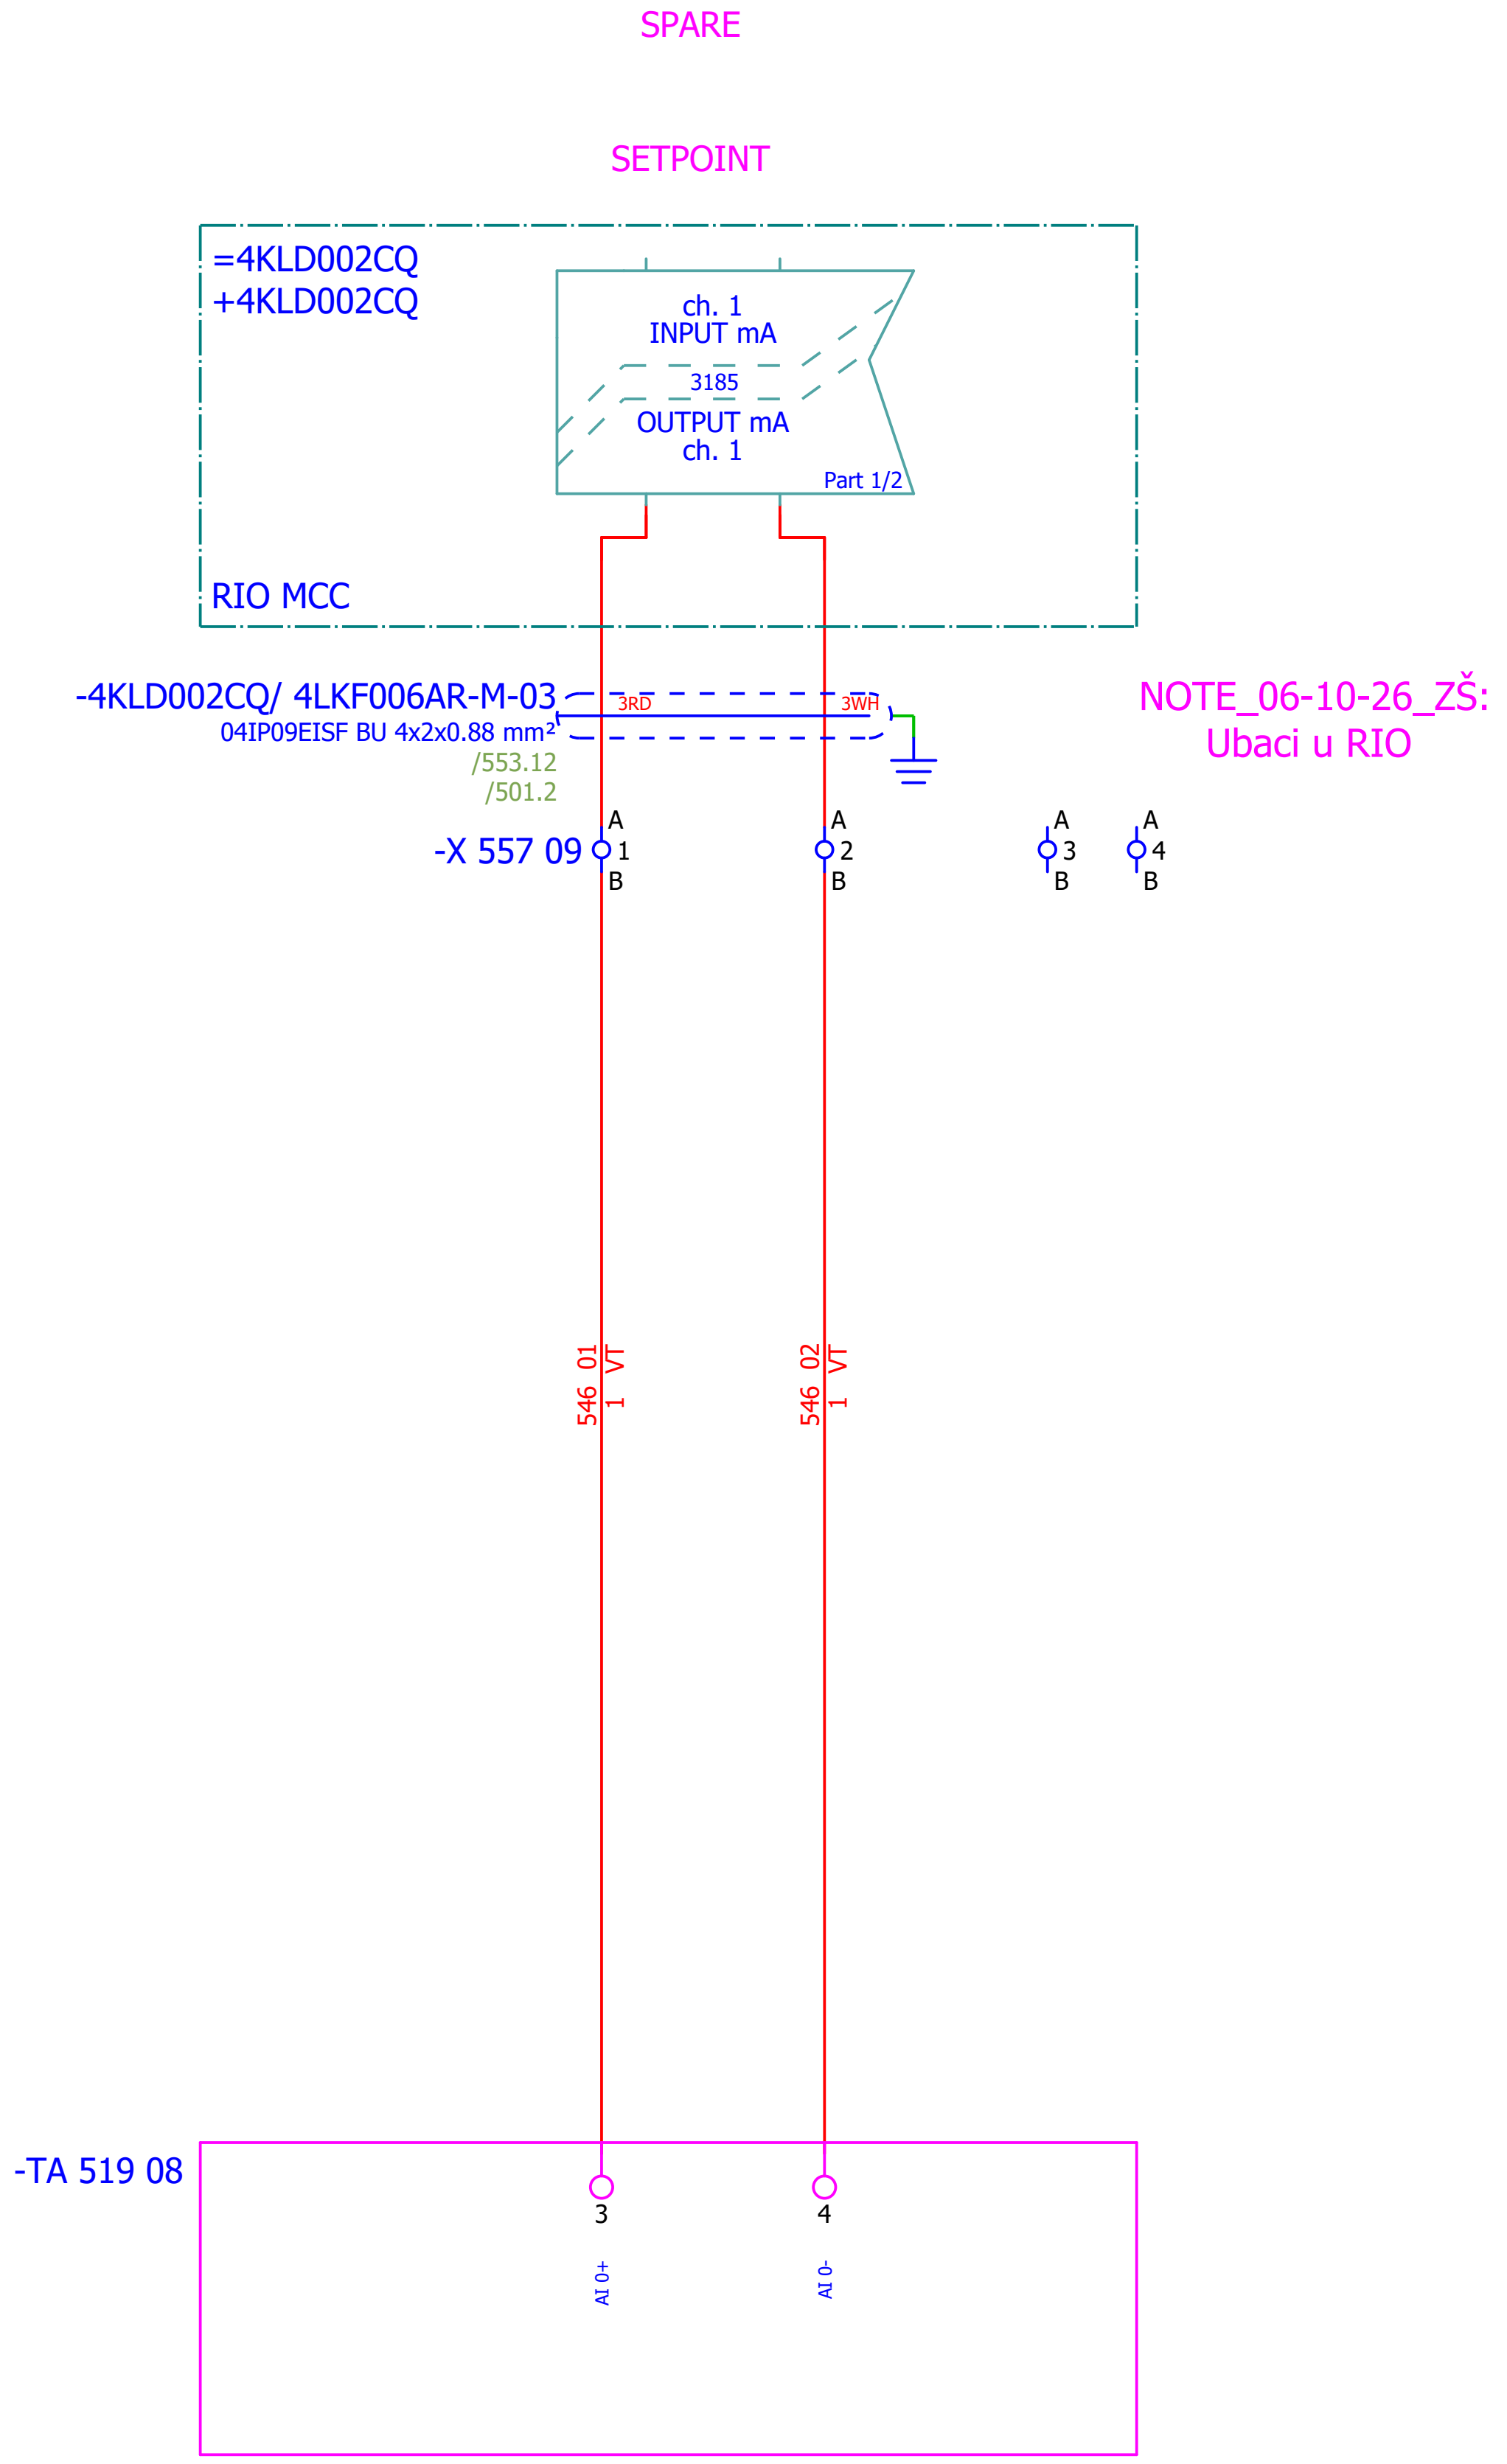

Date: 17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0
Drawn: Luka Božičević				Number: 1874	Revision: F
Approved: Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE - ANALOG INPUTS	Drawing designation: BRC-4-ATEP0-1870-F	#MB
Format: A3				=4LKF001AR +4LKF006AR	Sheet: 557 Next: 558

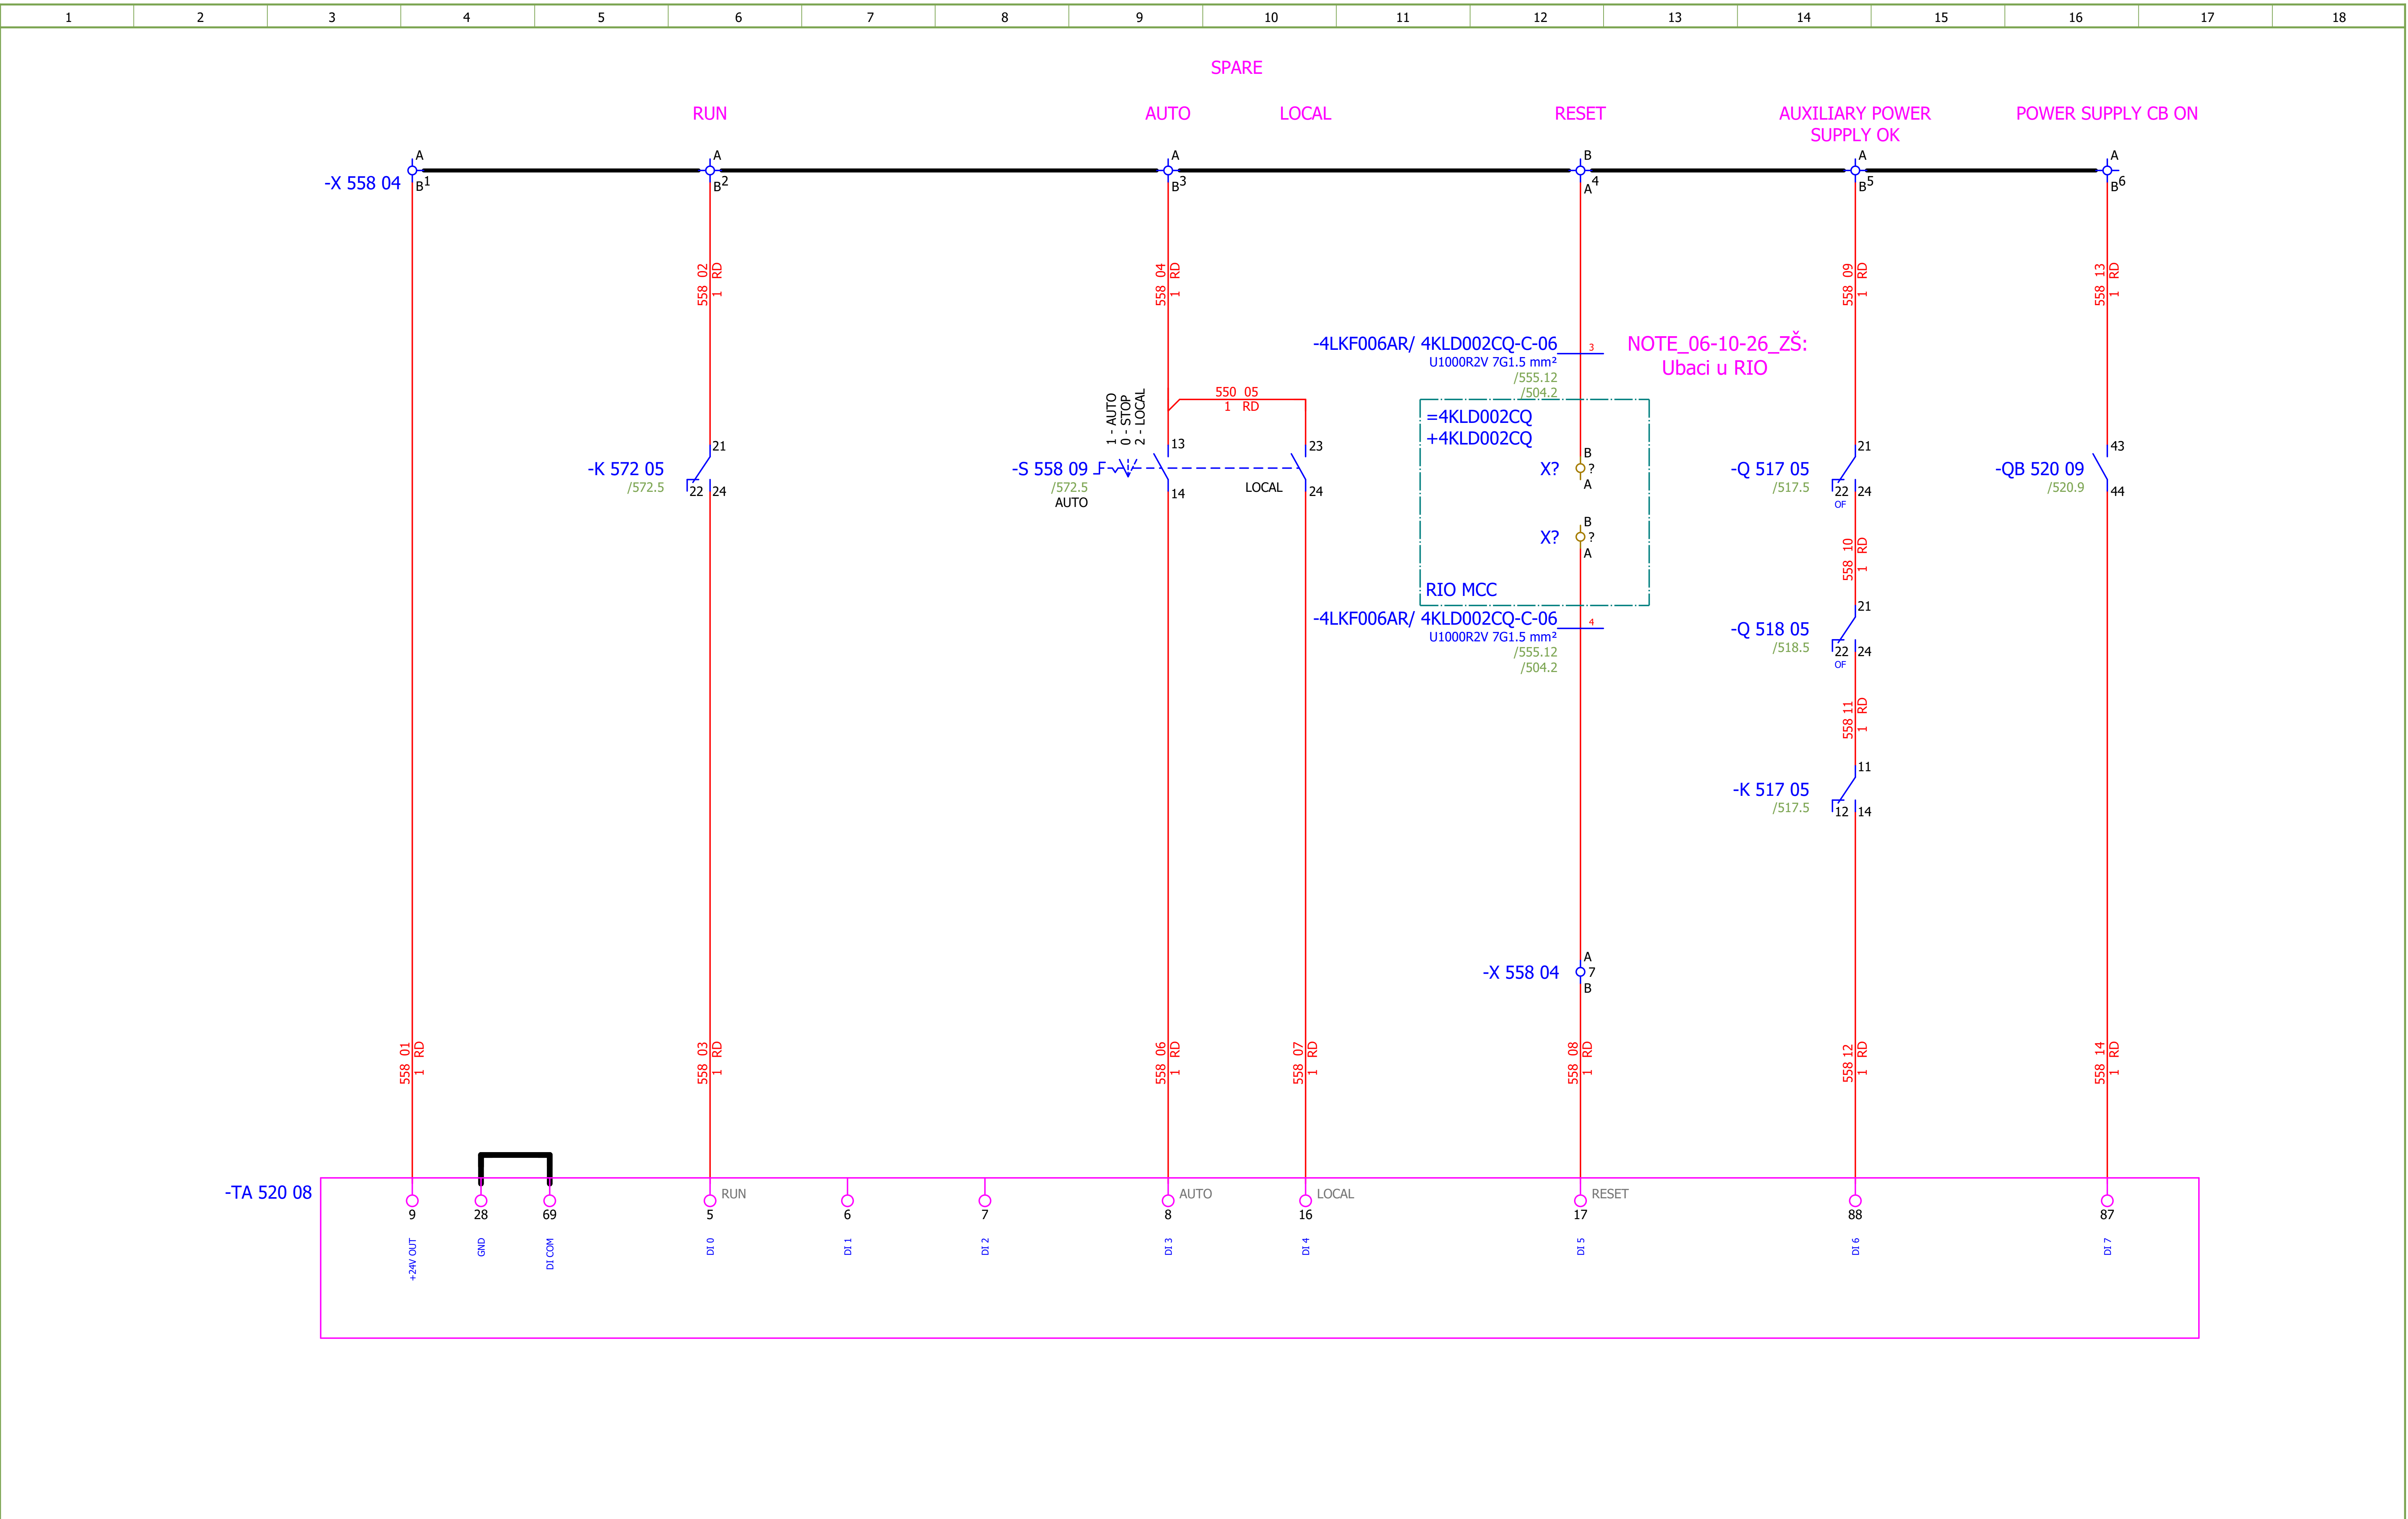

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0
Drawn:	Luka Božičević					Number: 1874	Revision: F
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE - DIGITAL INPUTS	Drawing designation: BRC-4-ATEP0-1870-F	#MB
Format:	A3					=4LKF001AR +4LKF006AR	Sheet: 558 Next: 559

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

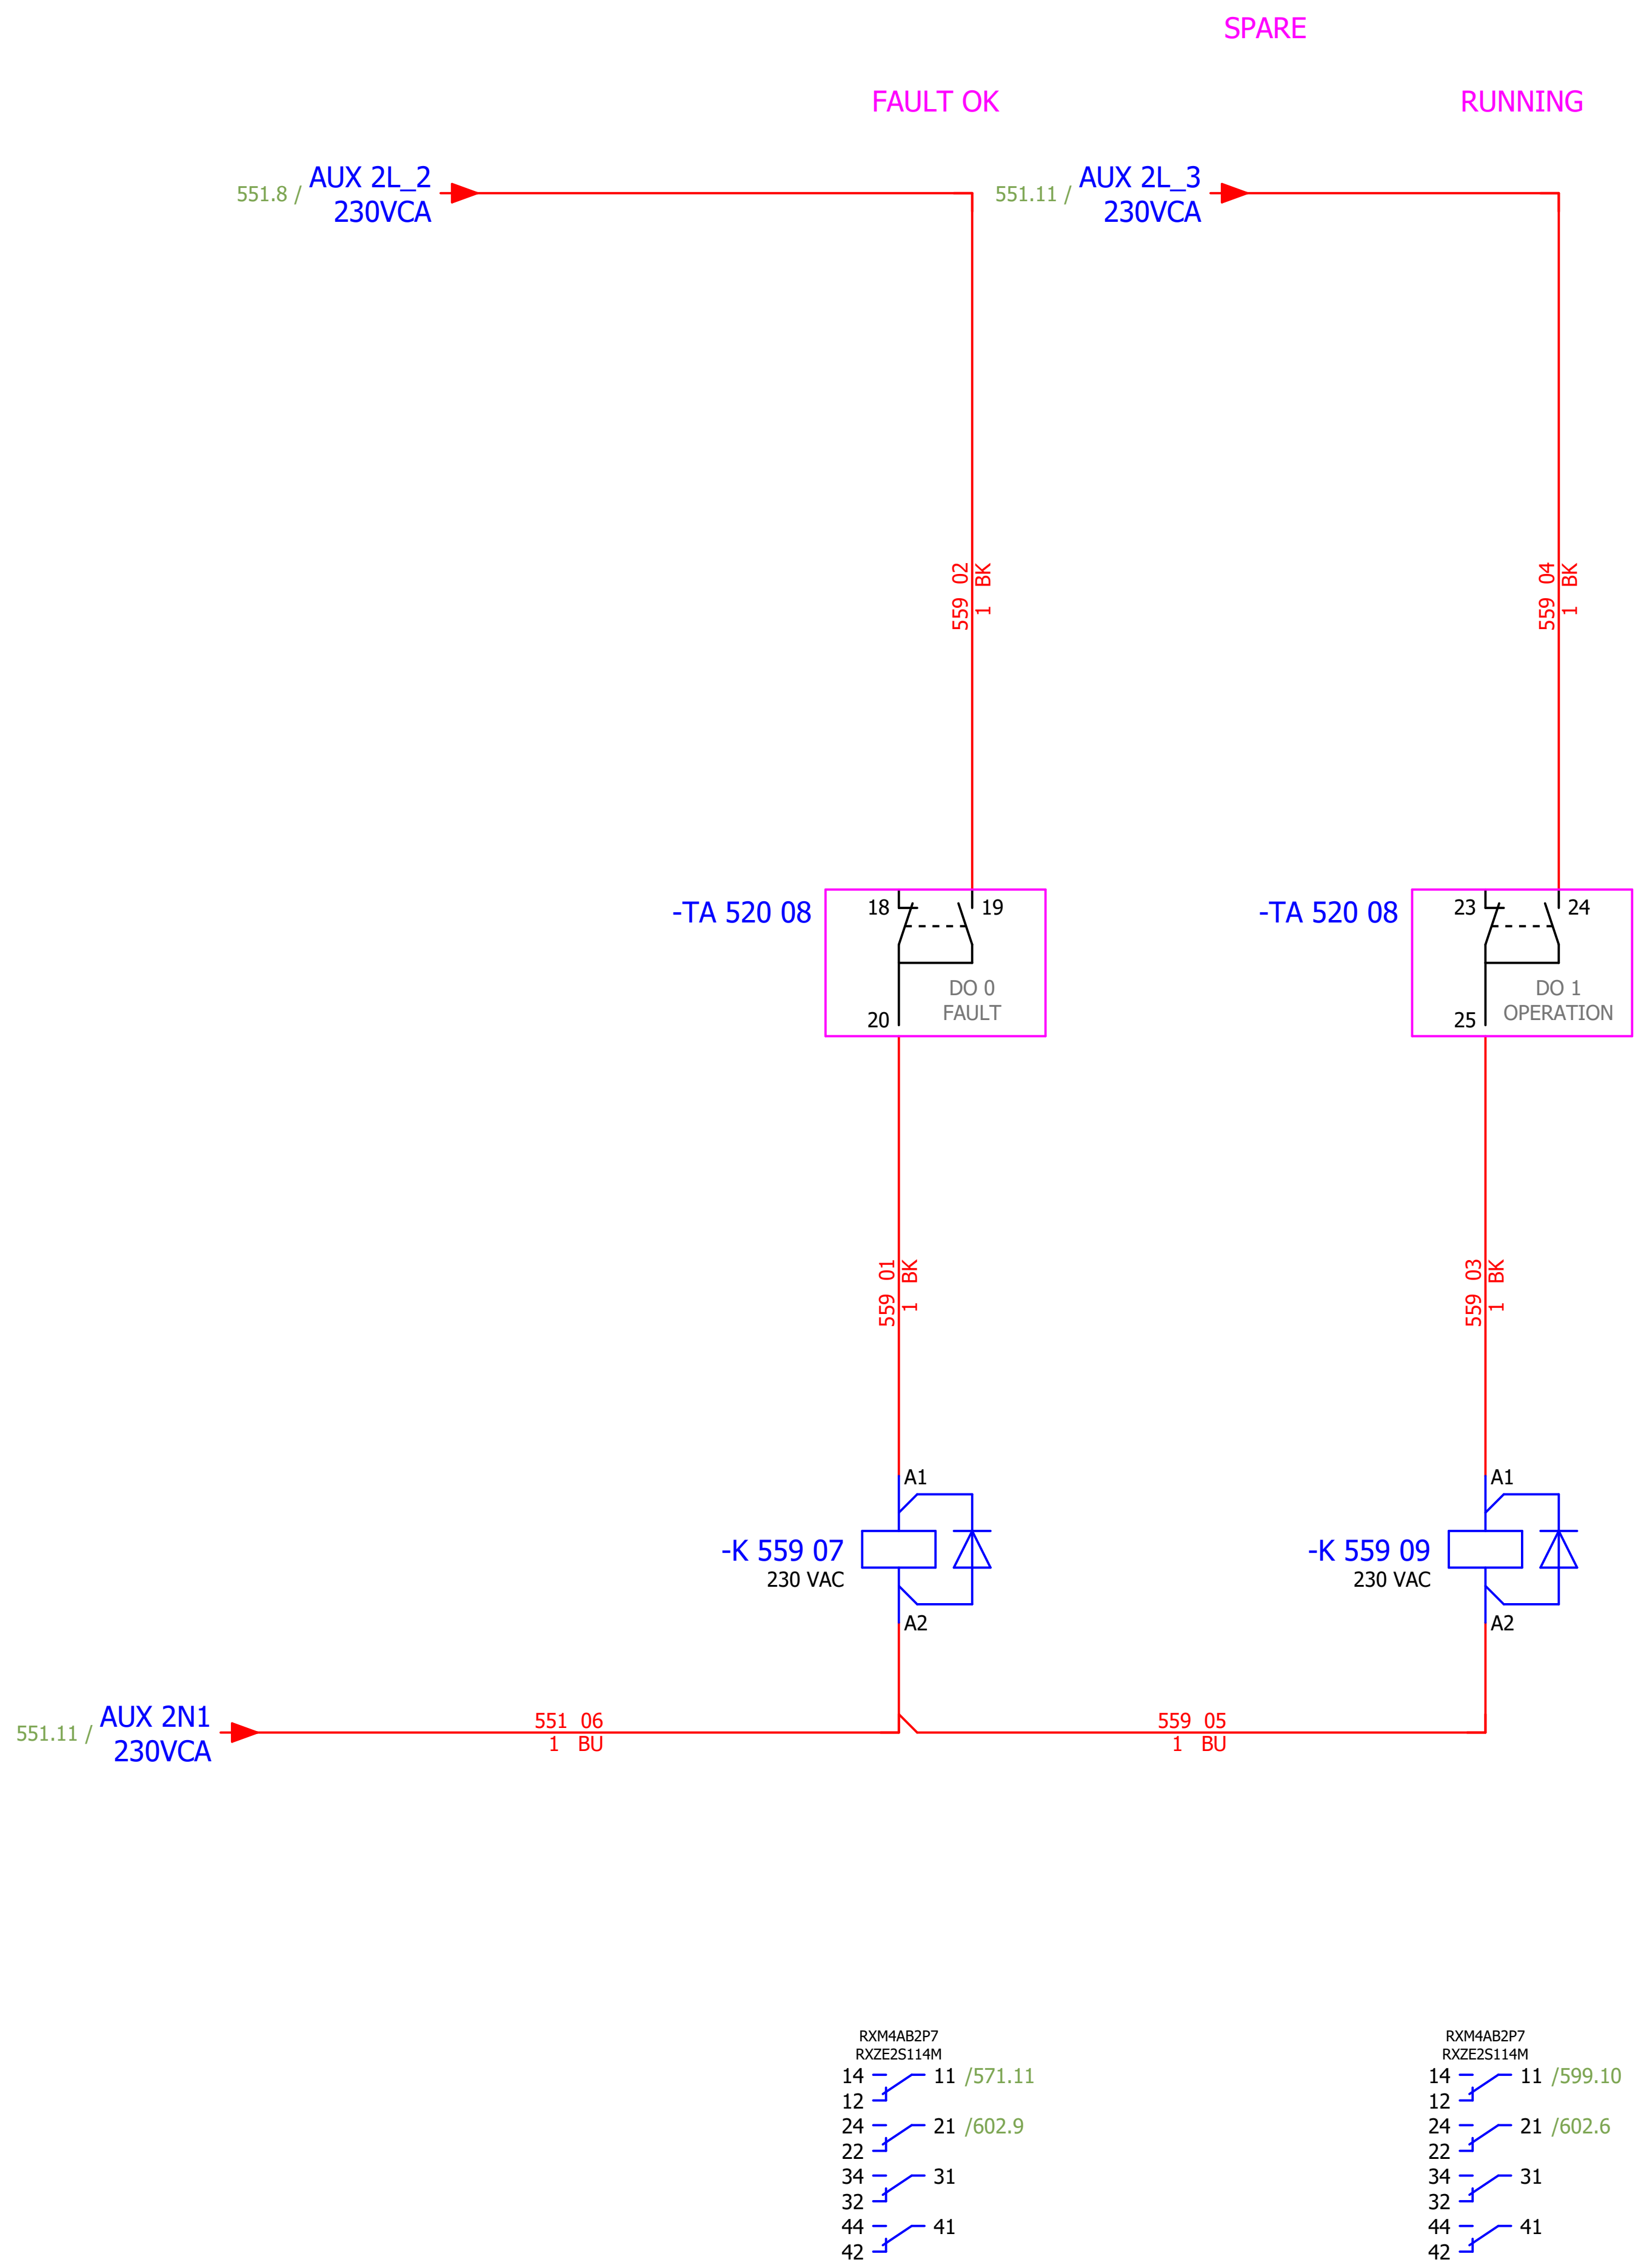

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević								#MB
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE - DIGITAL OUTPUTS	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 559
Format:	A3							+4LKF006AR	Next: 560

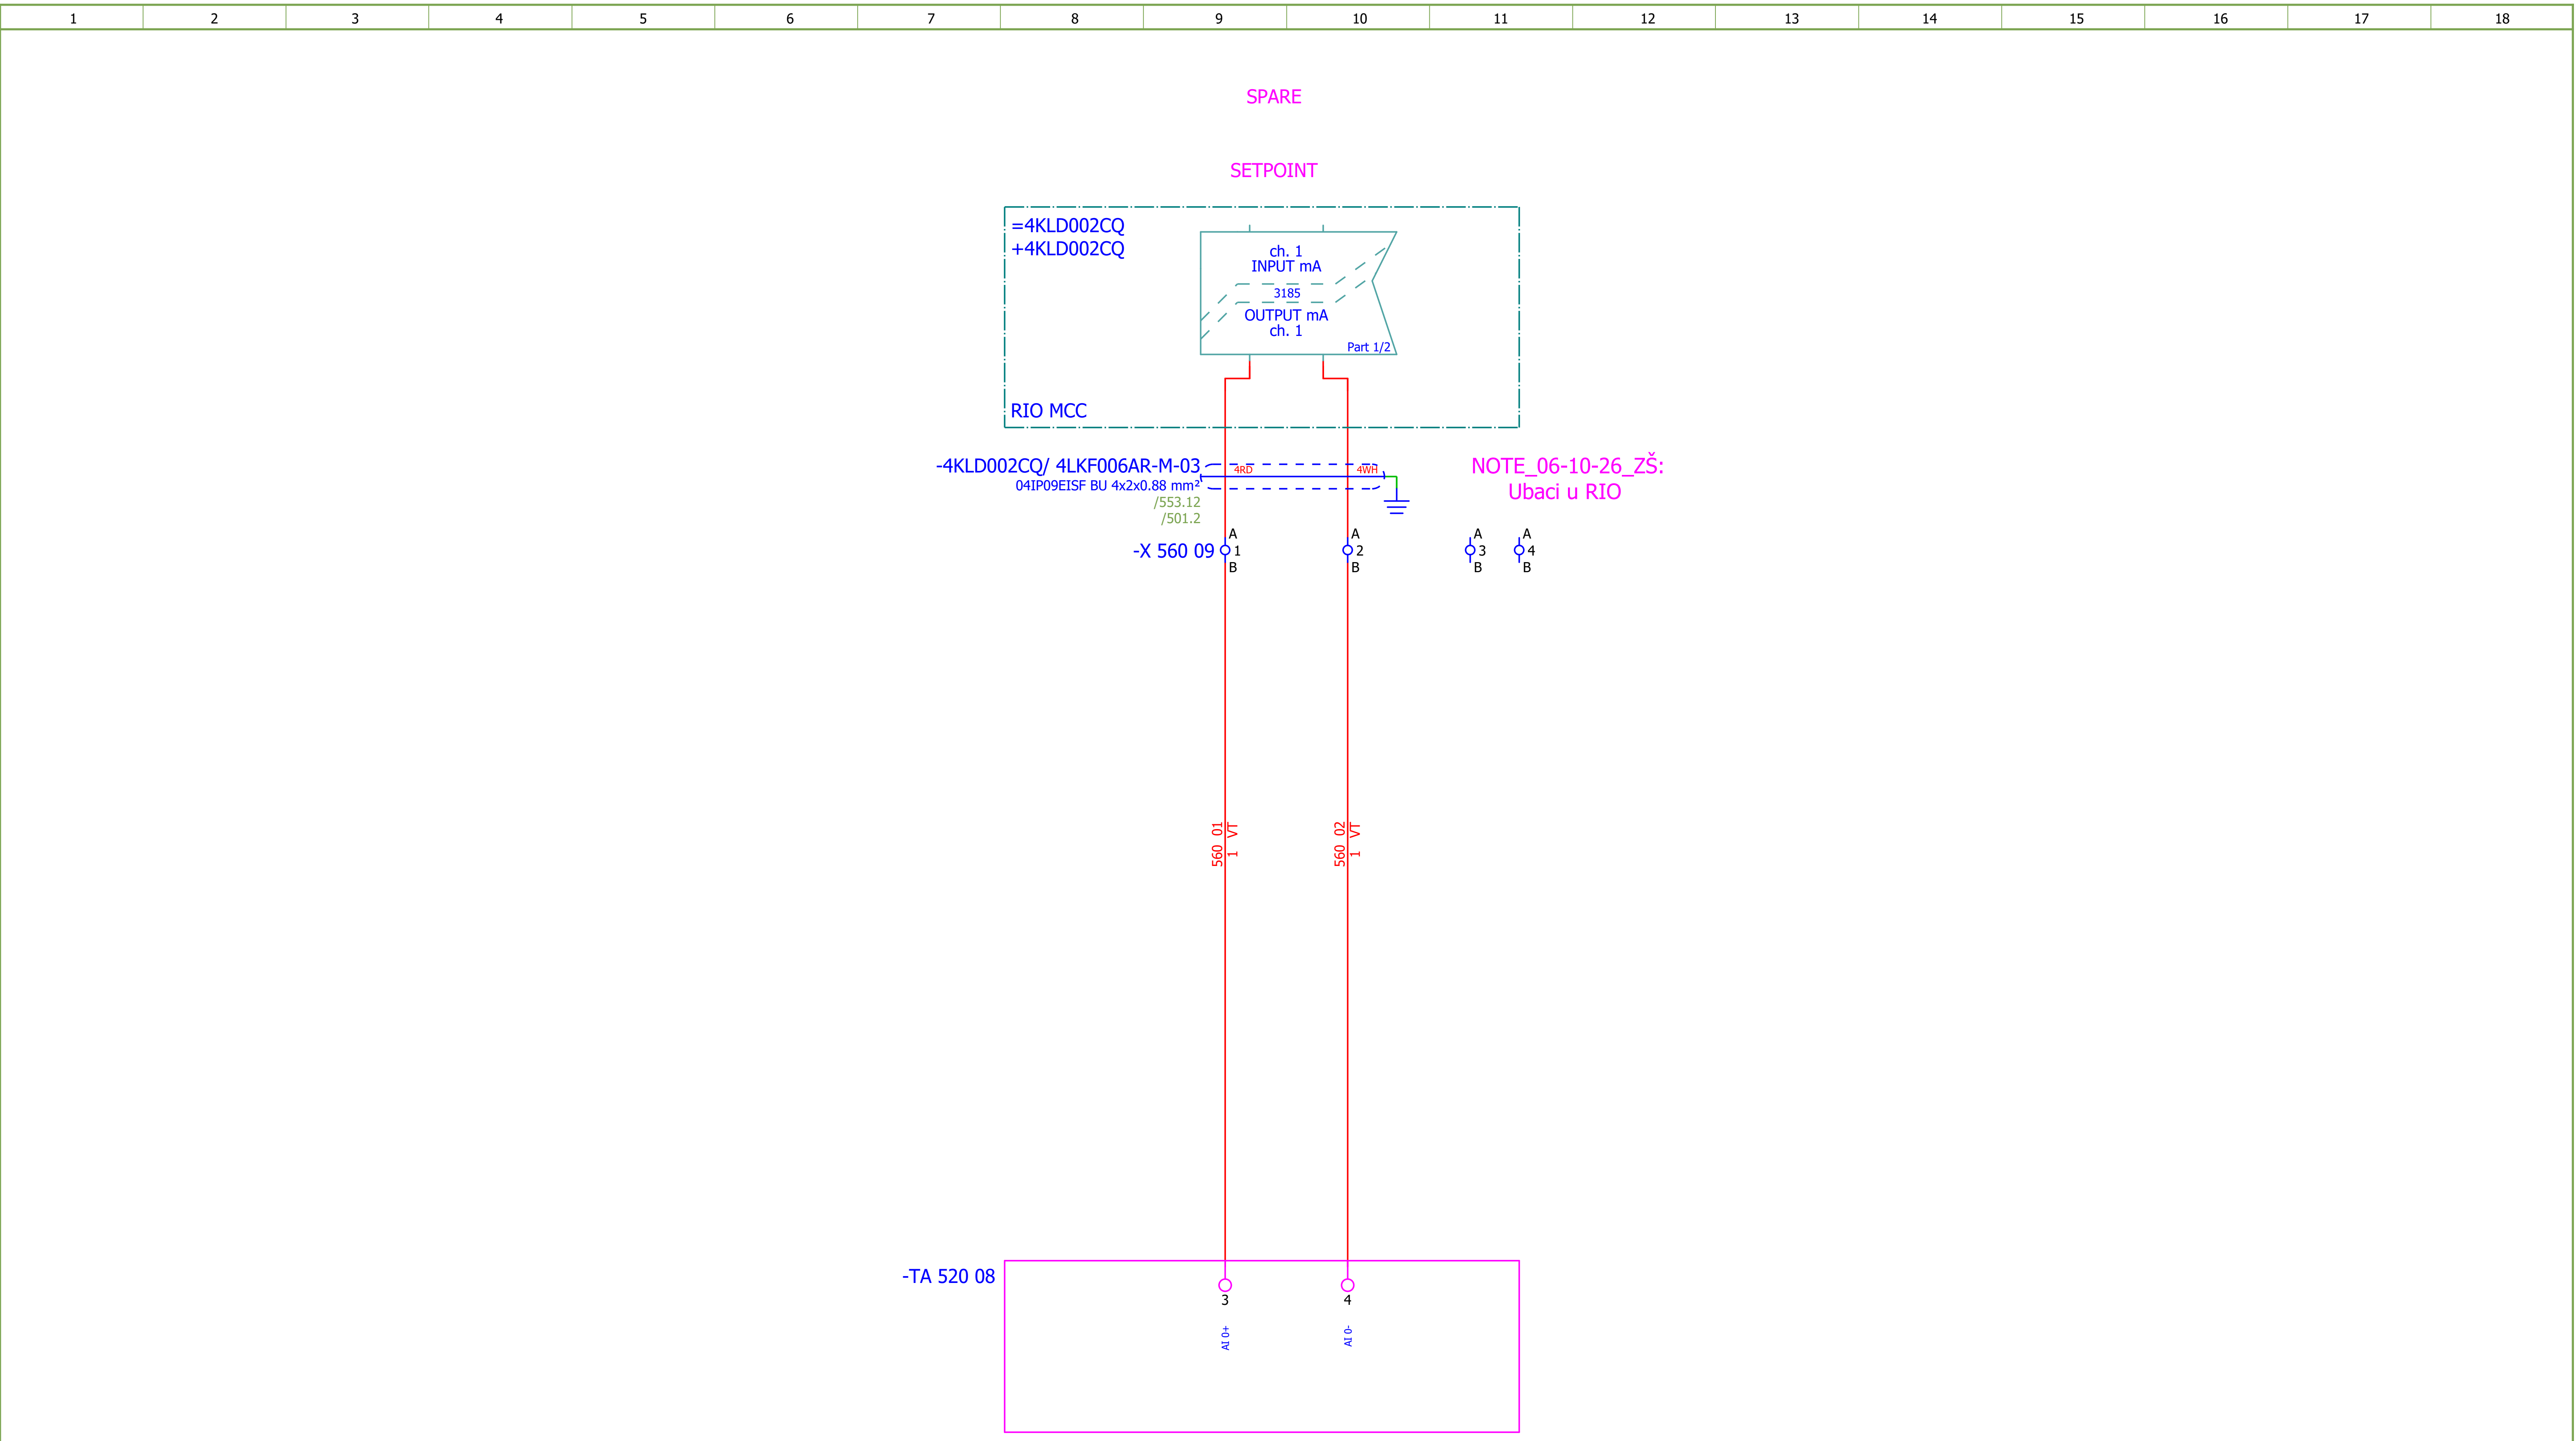

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević								#MB
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE - ANALOG INPUTS	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 560
Format:	A3							+4LKF006AR	Next: 561

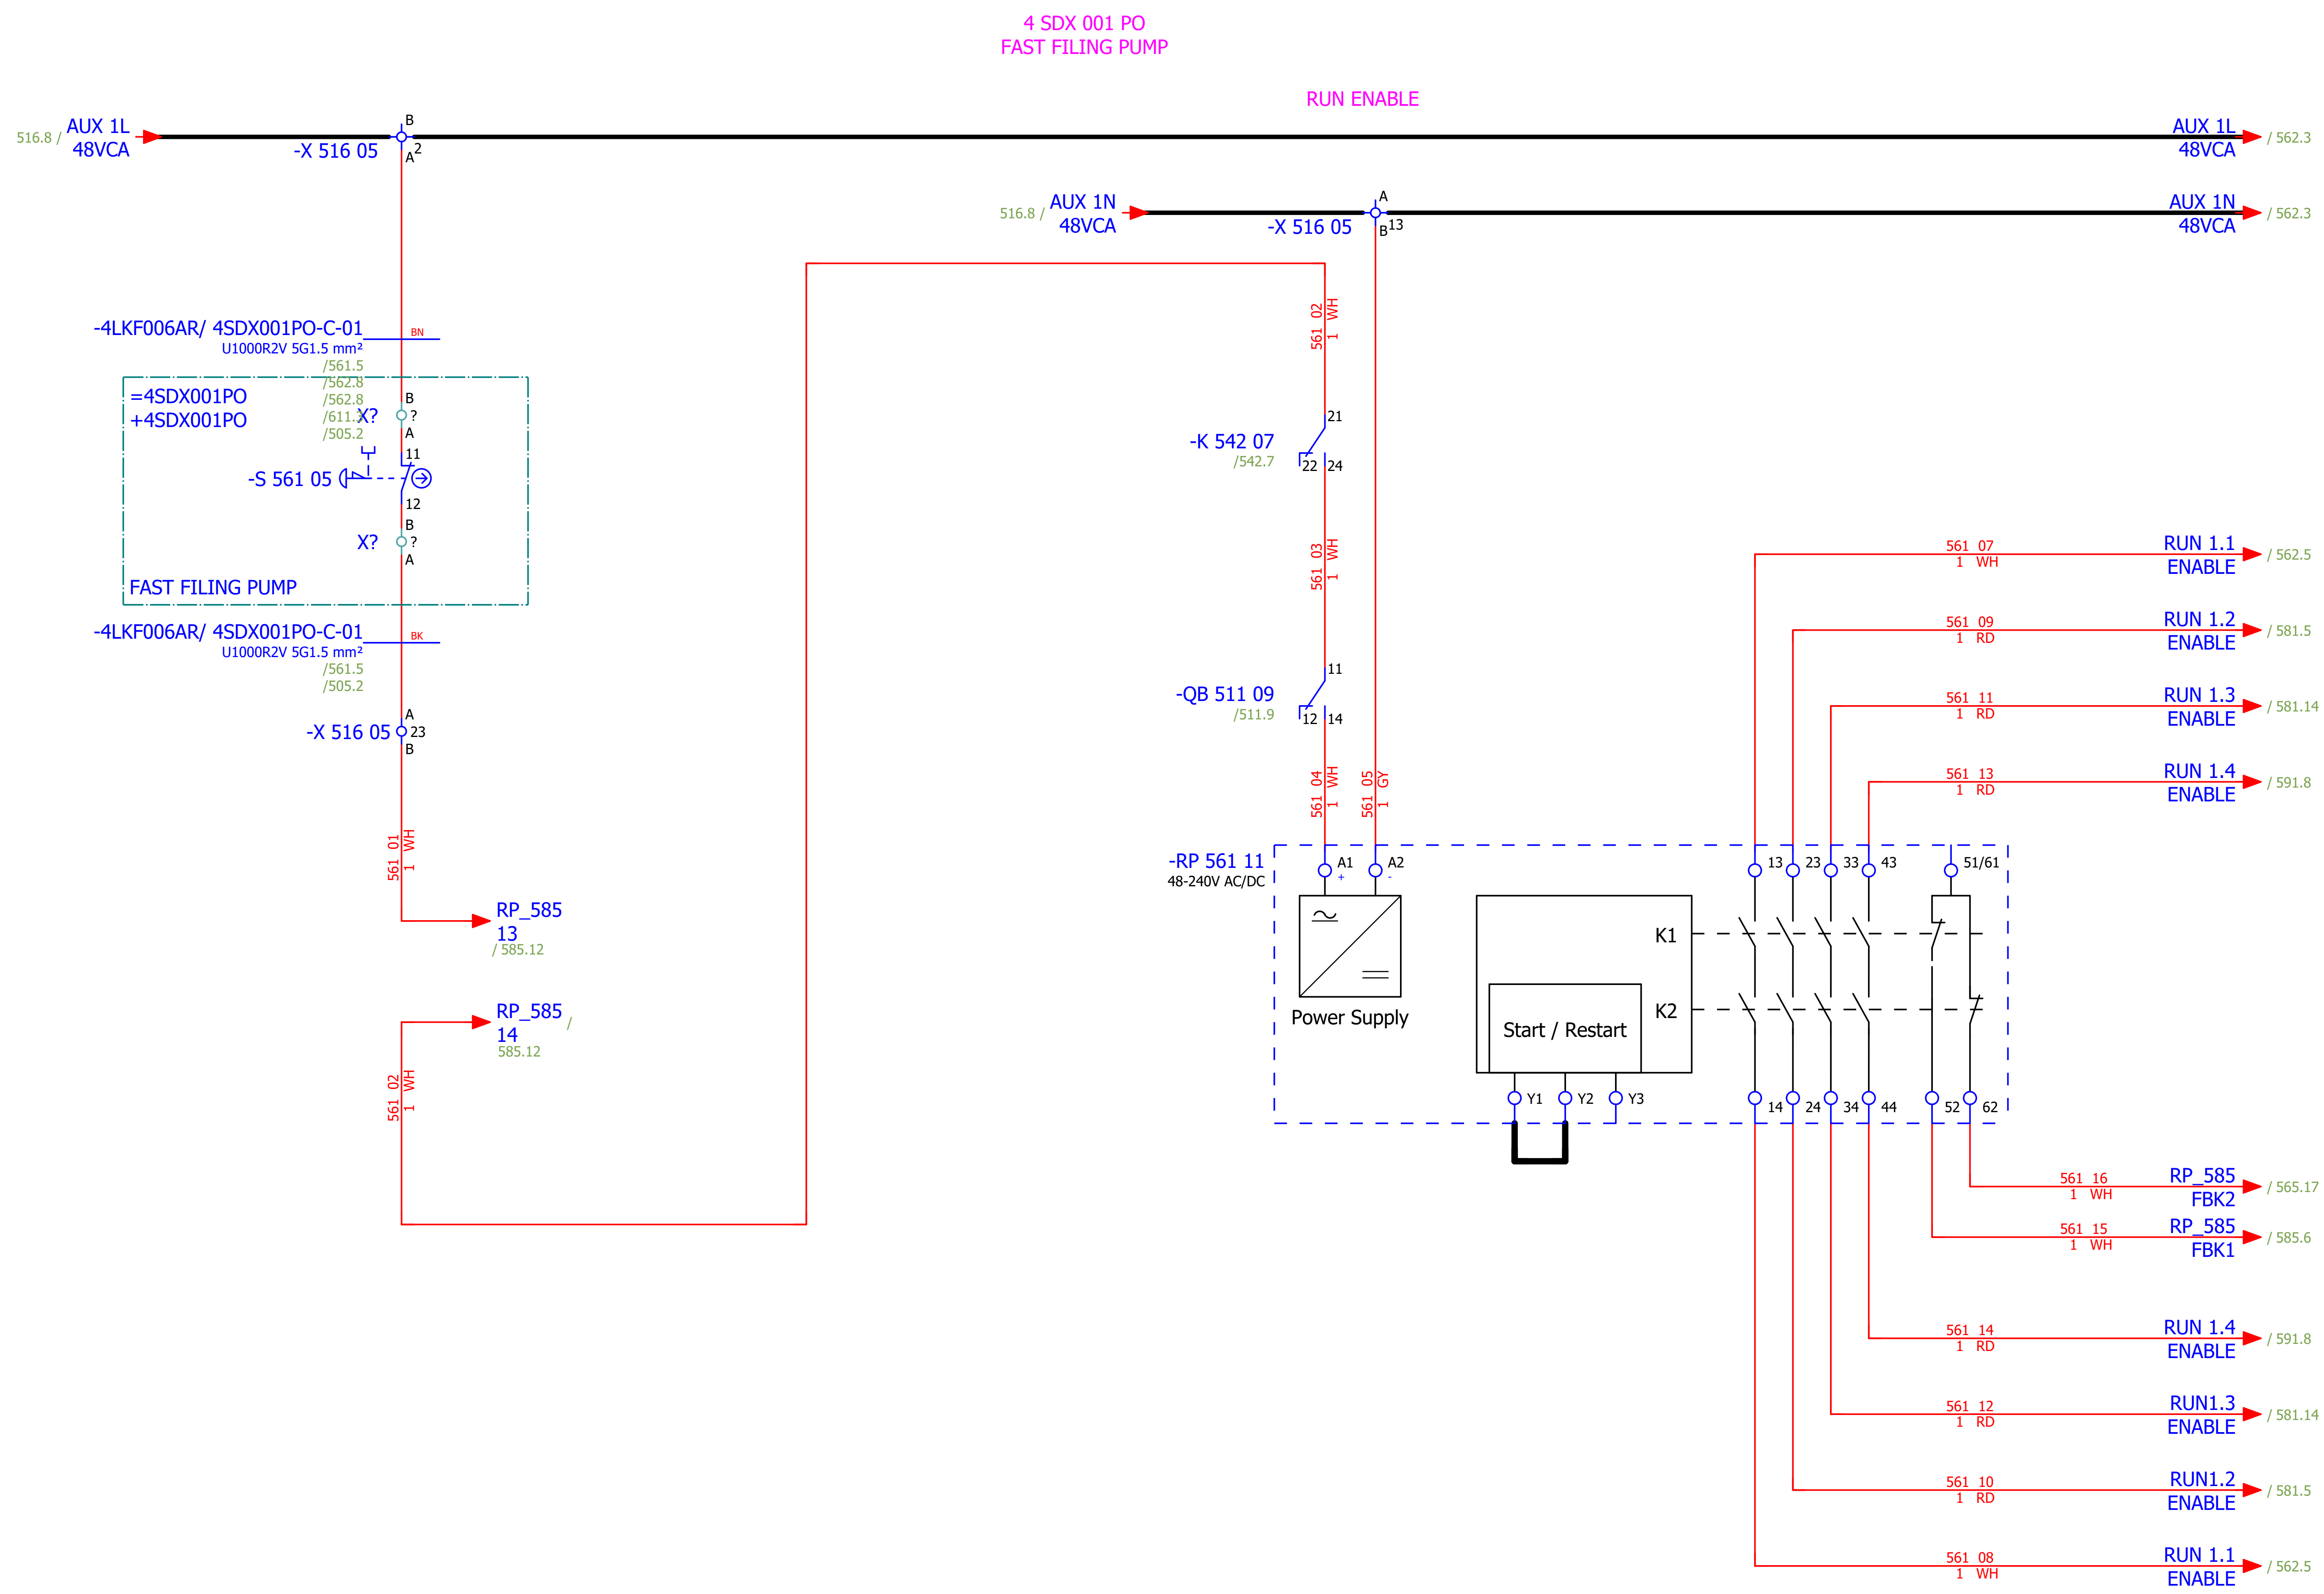

Date: 17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0
Drawn: Luka Božičević				Number: 1874	Revision: F
Approved: Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: FAST FILING PUMP - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F	=4LKF001AR
Format: A3				#MC	+4LKF006AR
				Sheet: 561	Next: 562

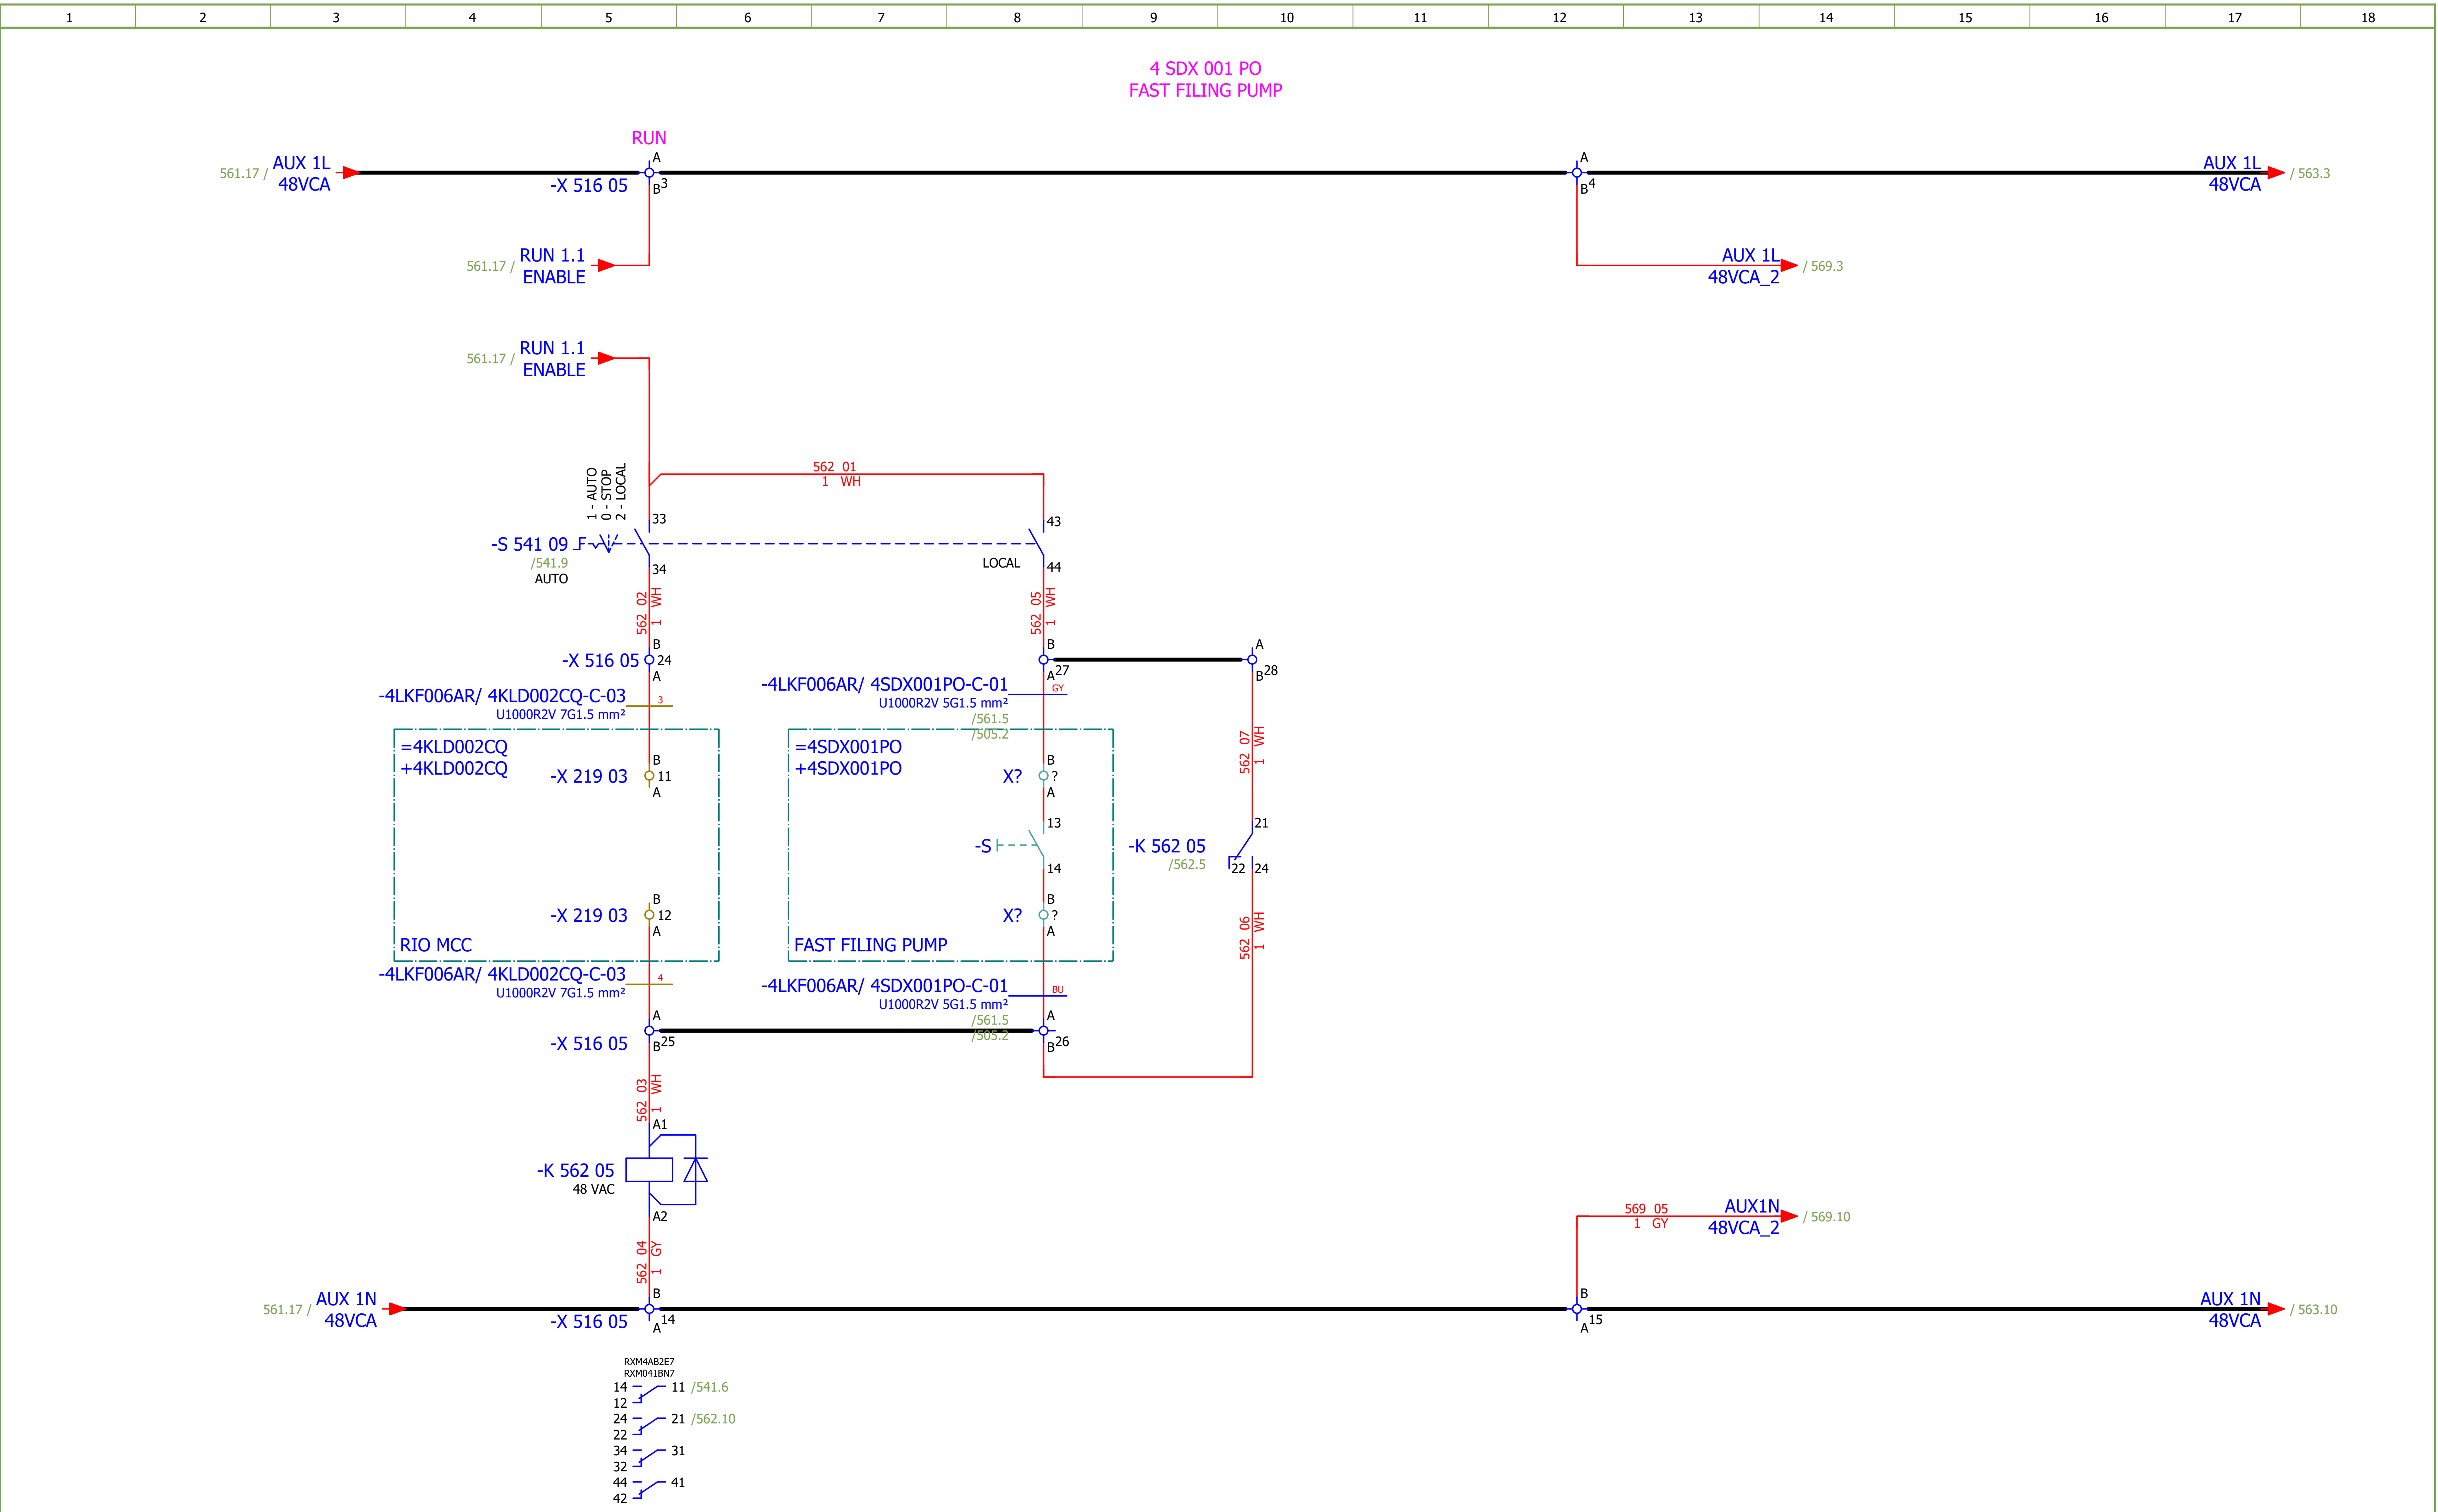

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F	#MC
Drawn:	Luka Božičević										
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	FAST FILING PUMP - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 562
Format:	A3									+4LKF006AR	Next: 563

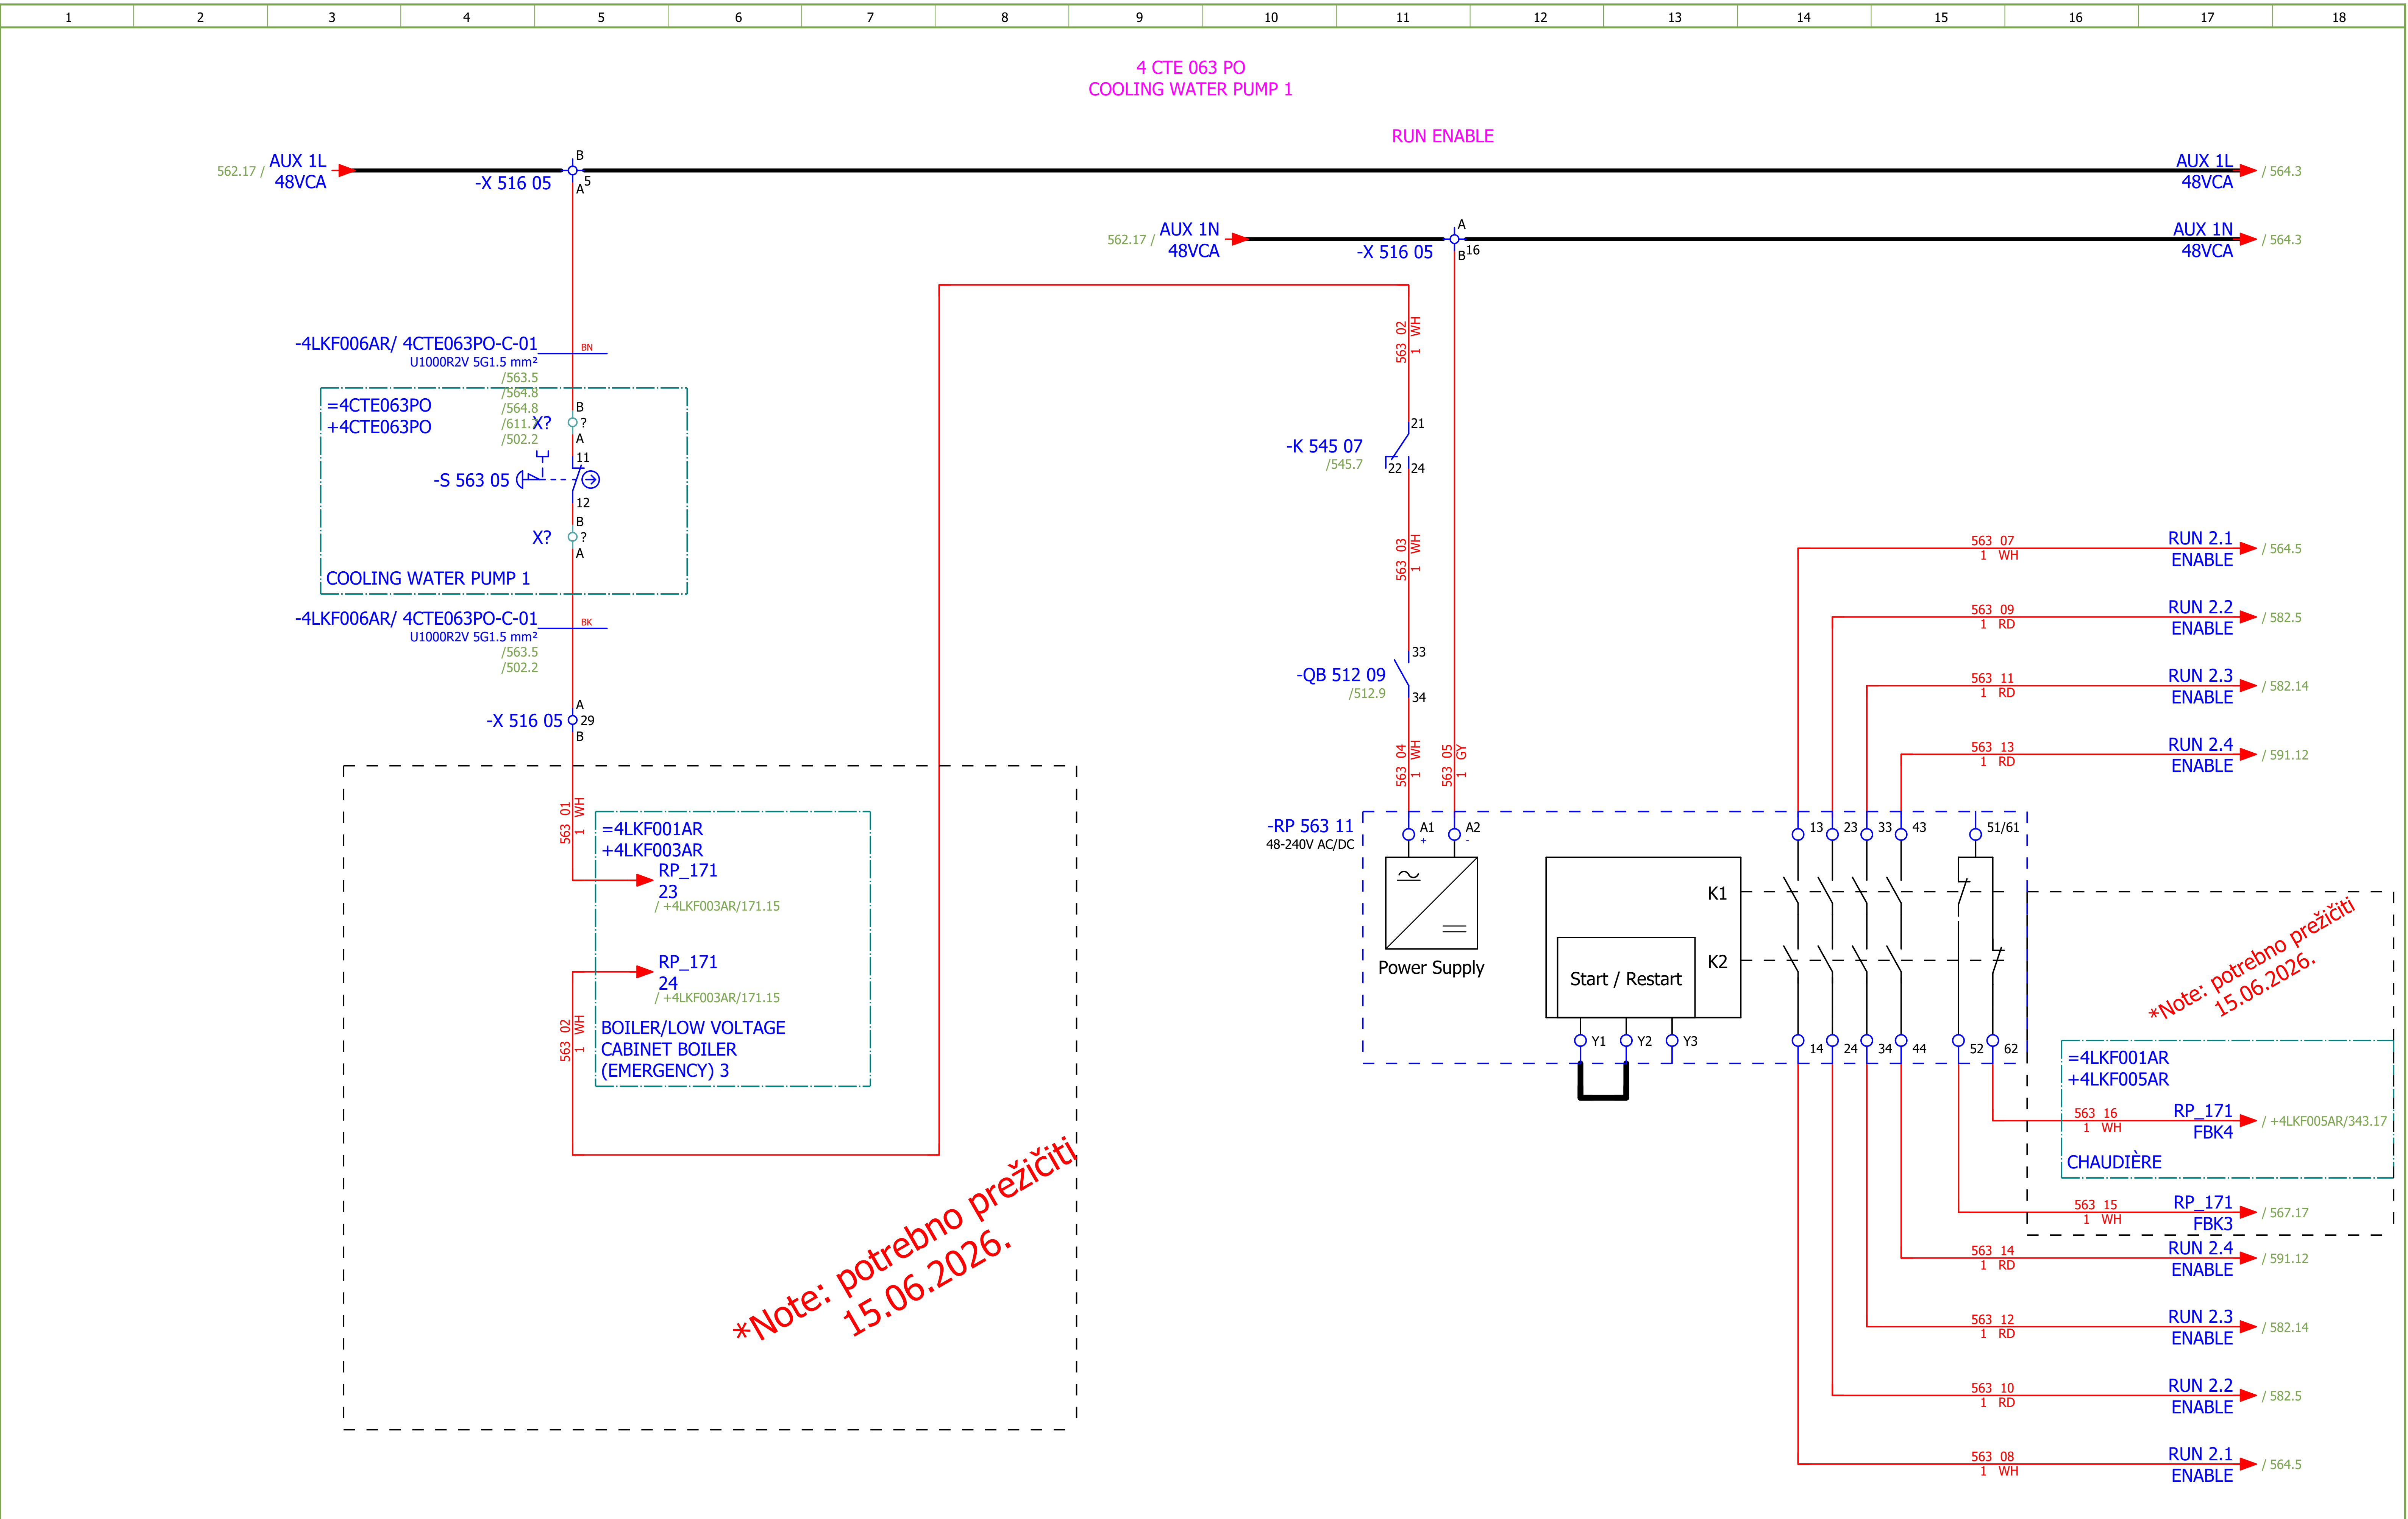

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F	#MC
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 1 - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 563
Format:	A3								+4LKF006AR	Next: 564

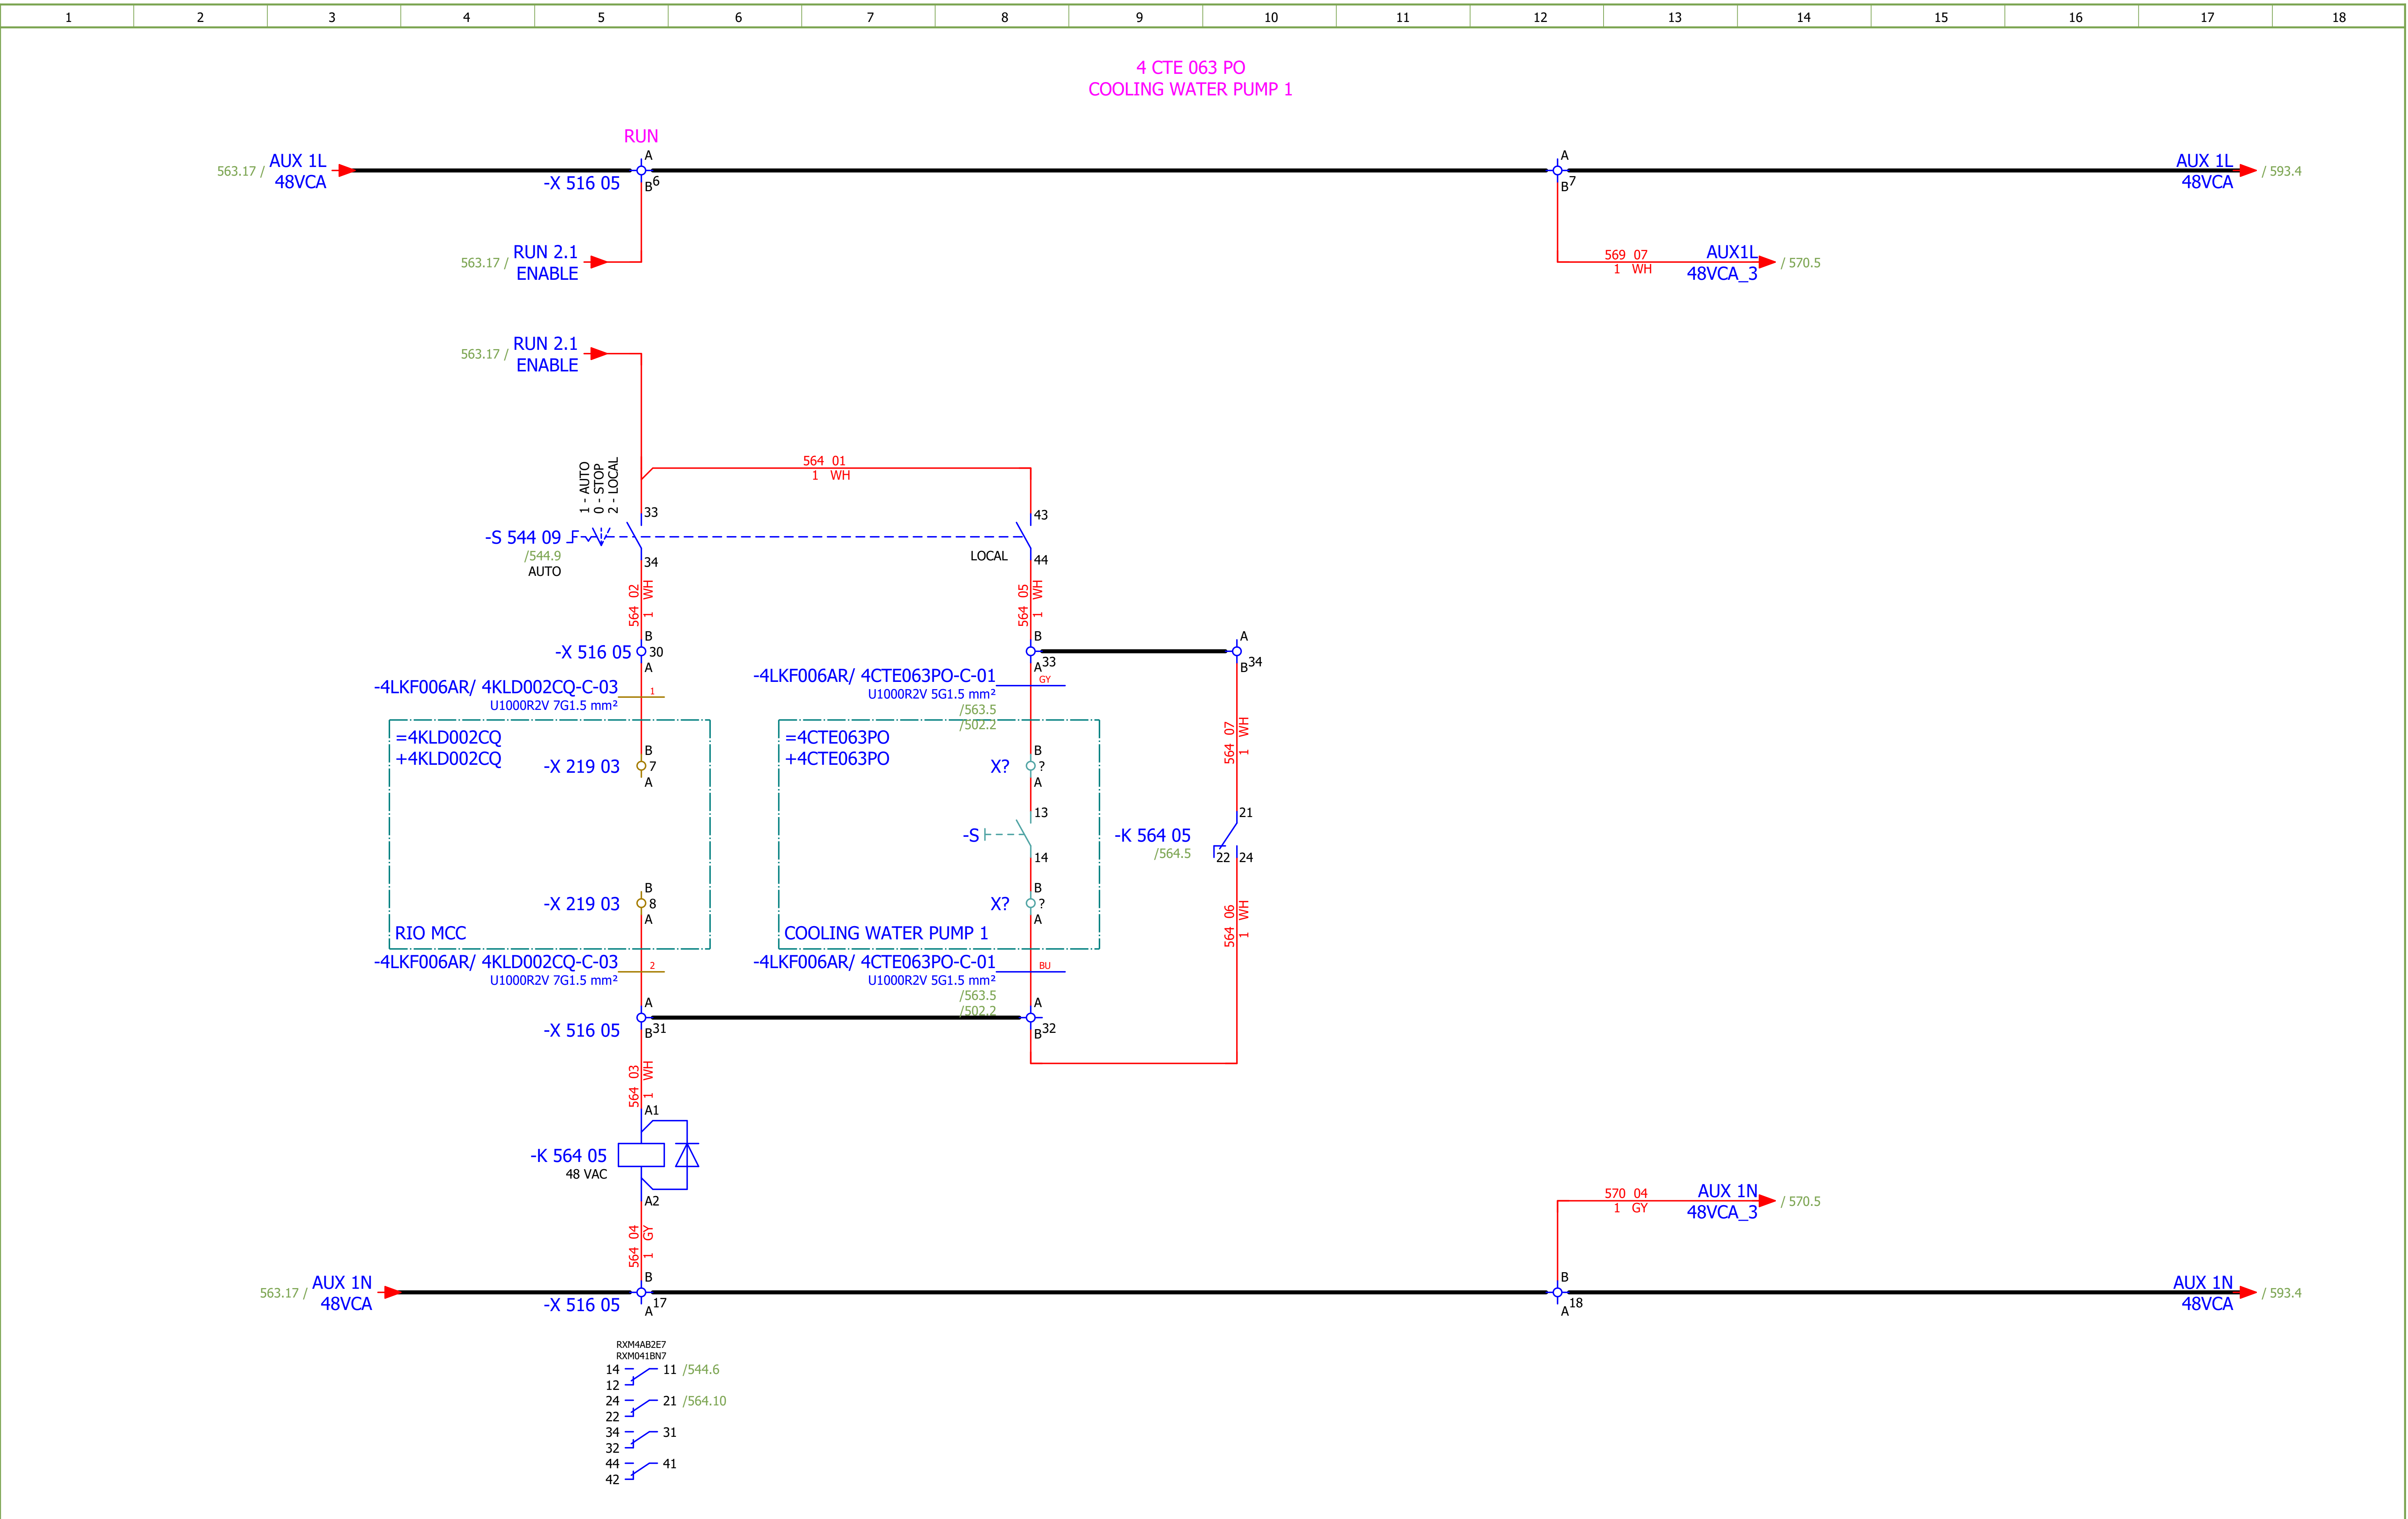

Date: 17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F	#MC
Drawn: Luka Božičević									
Approved: Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 1 - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 564
Format: A3								+4LKF006AR	Next: 565

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

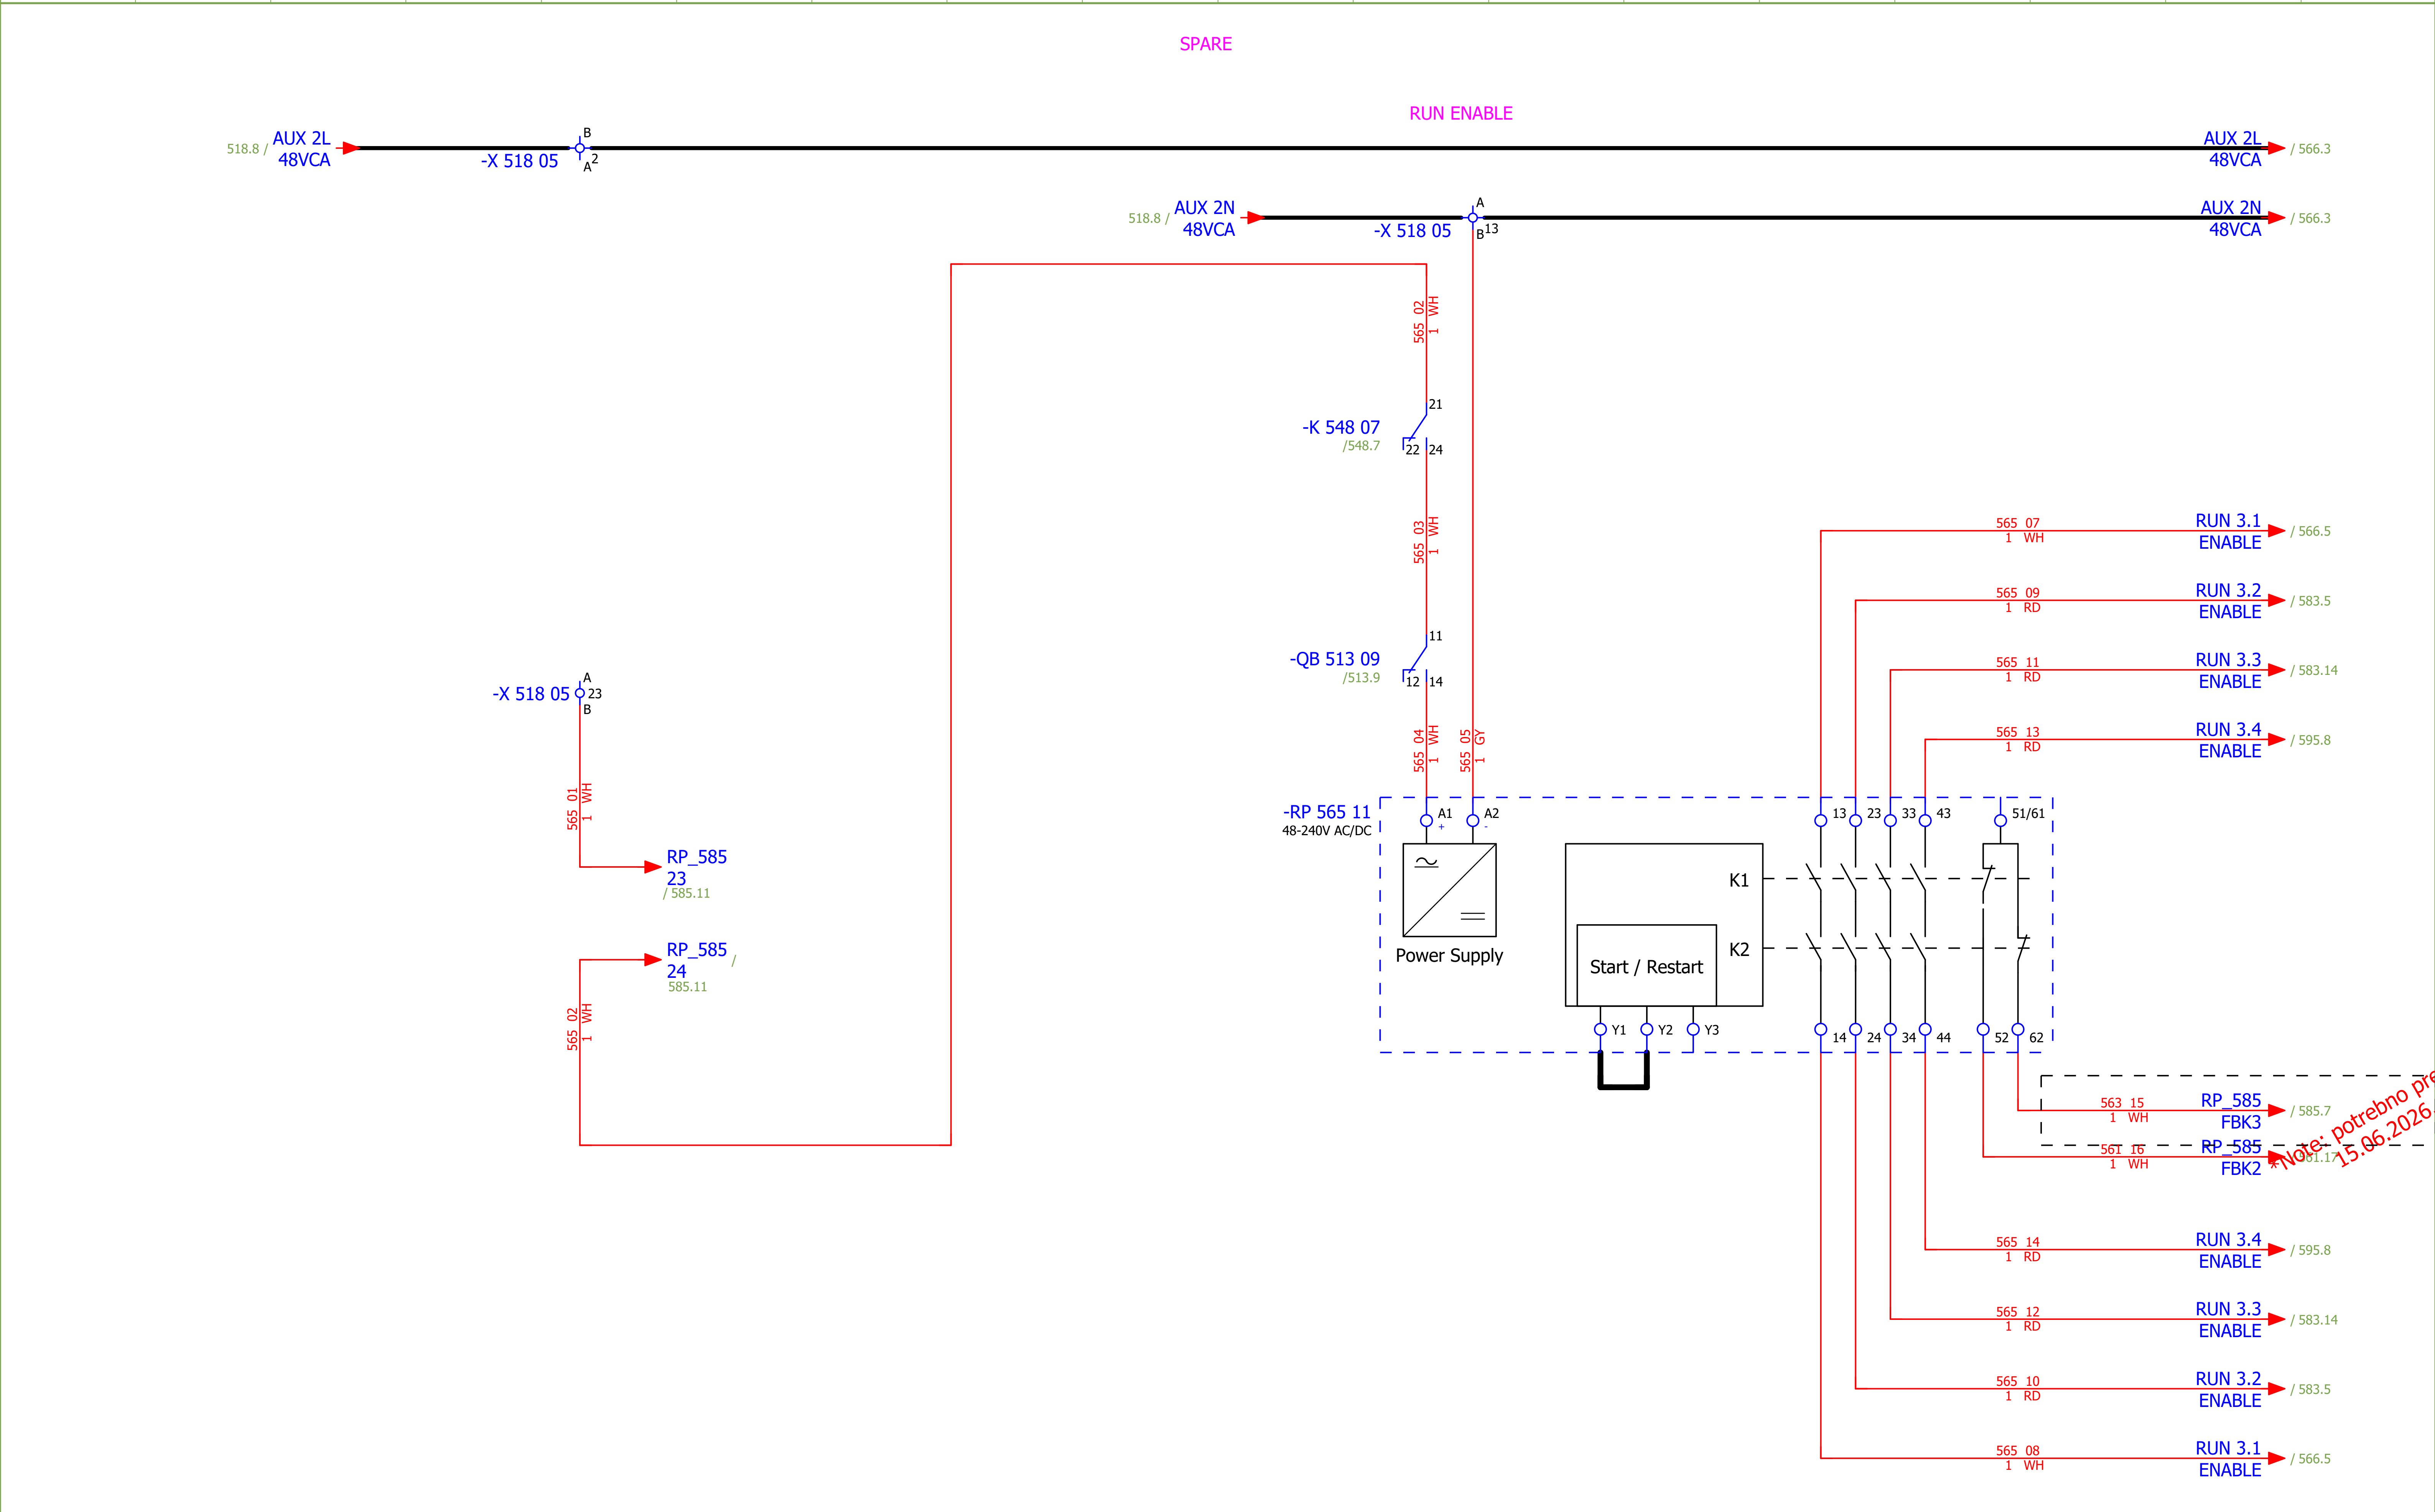

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević								#MC
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 565
Format:	A3							+4LKF006AR	Next: 566

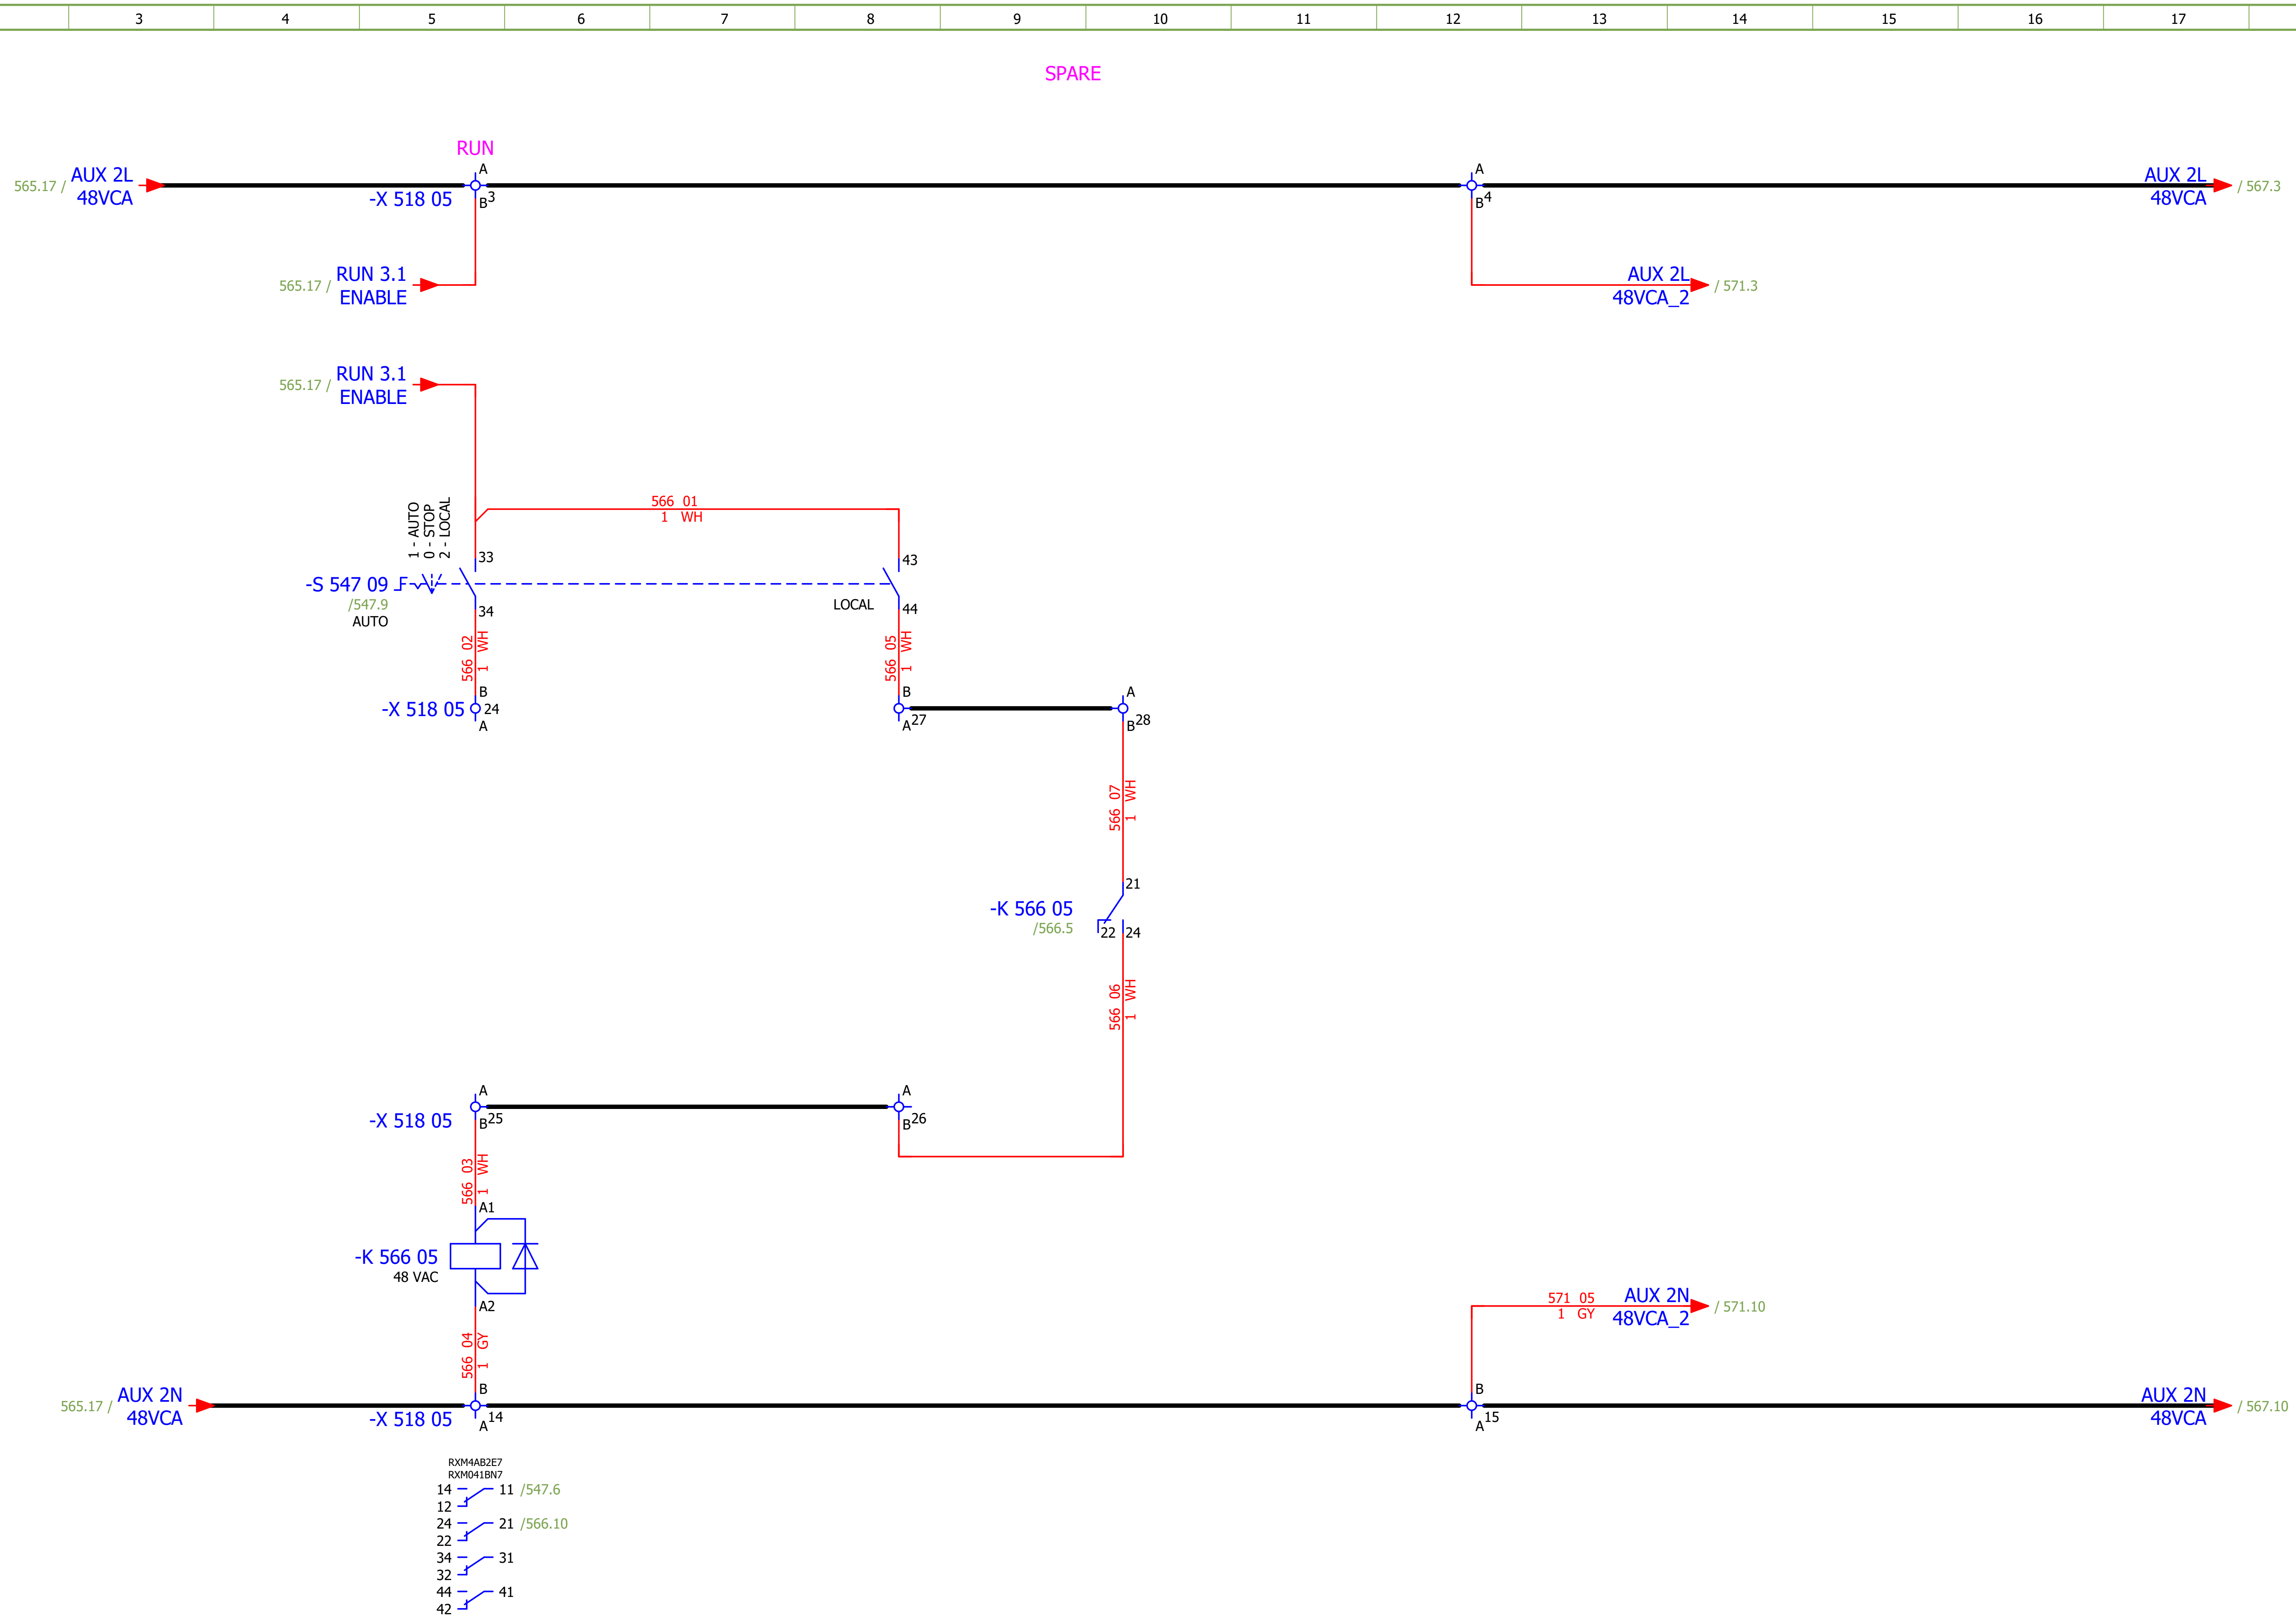

Date:	17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874
Drawn:	Luka Božičević						Revision: F
Approved:	Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F	=4LKF001AR +4LKF006AR	#MC Sheet: 566 Next: 567
Format:	A3						

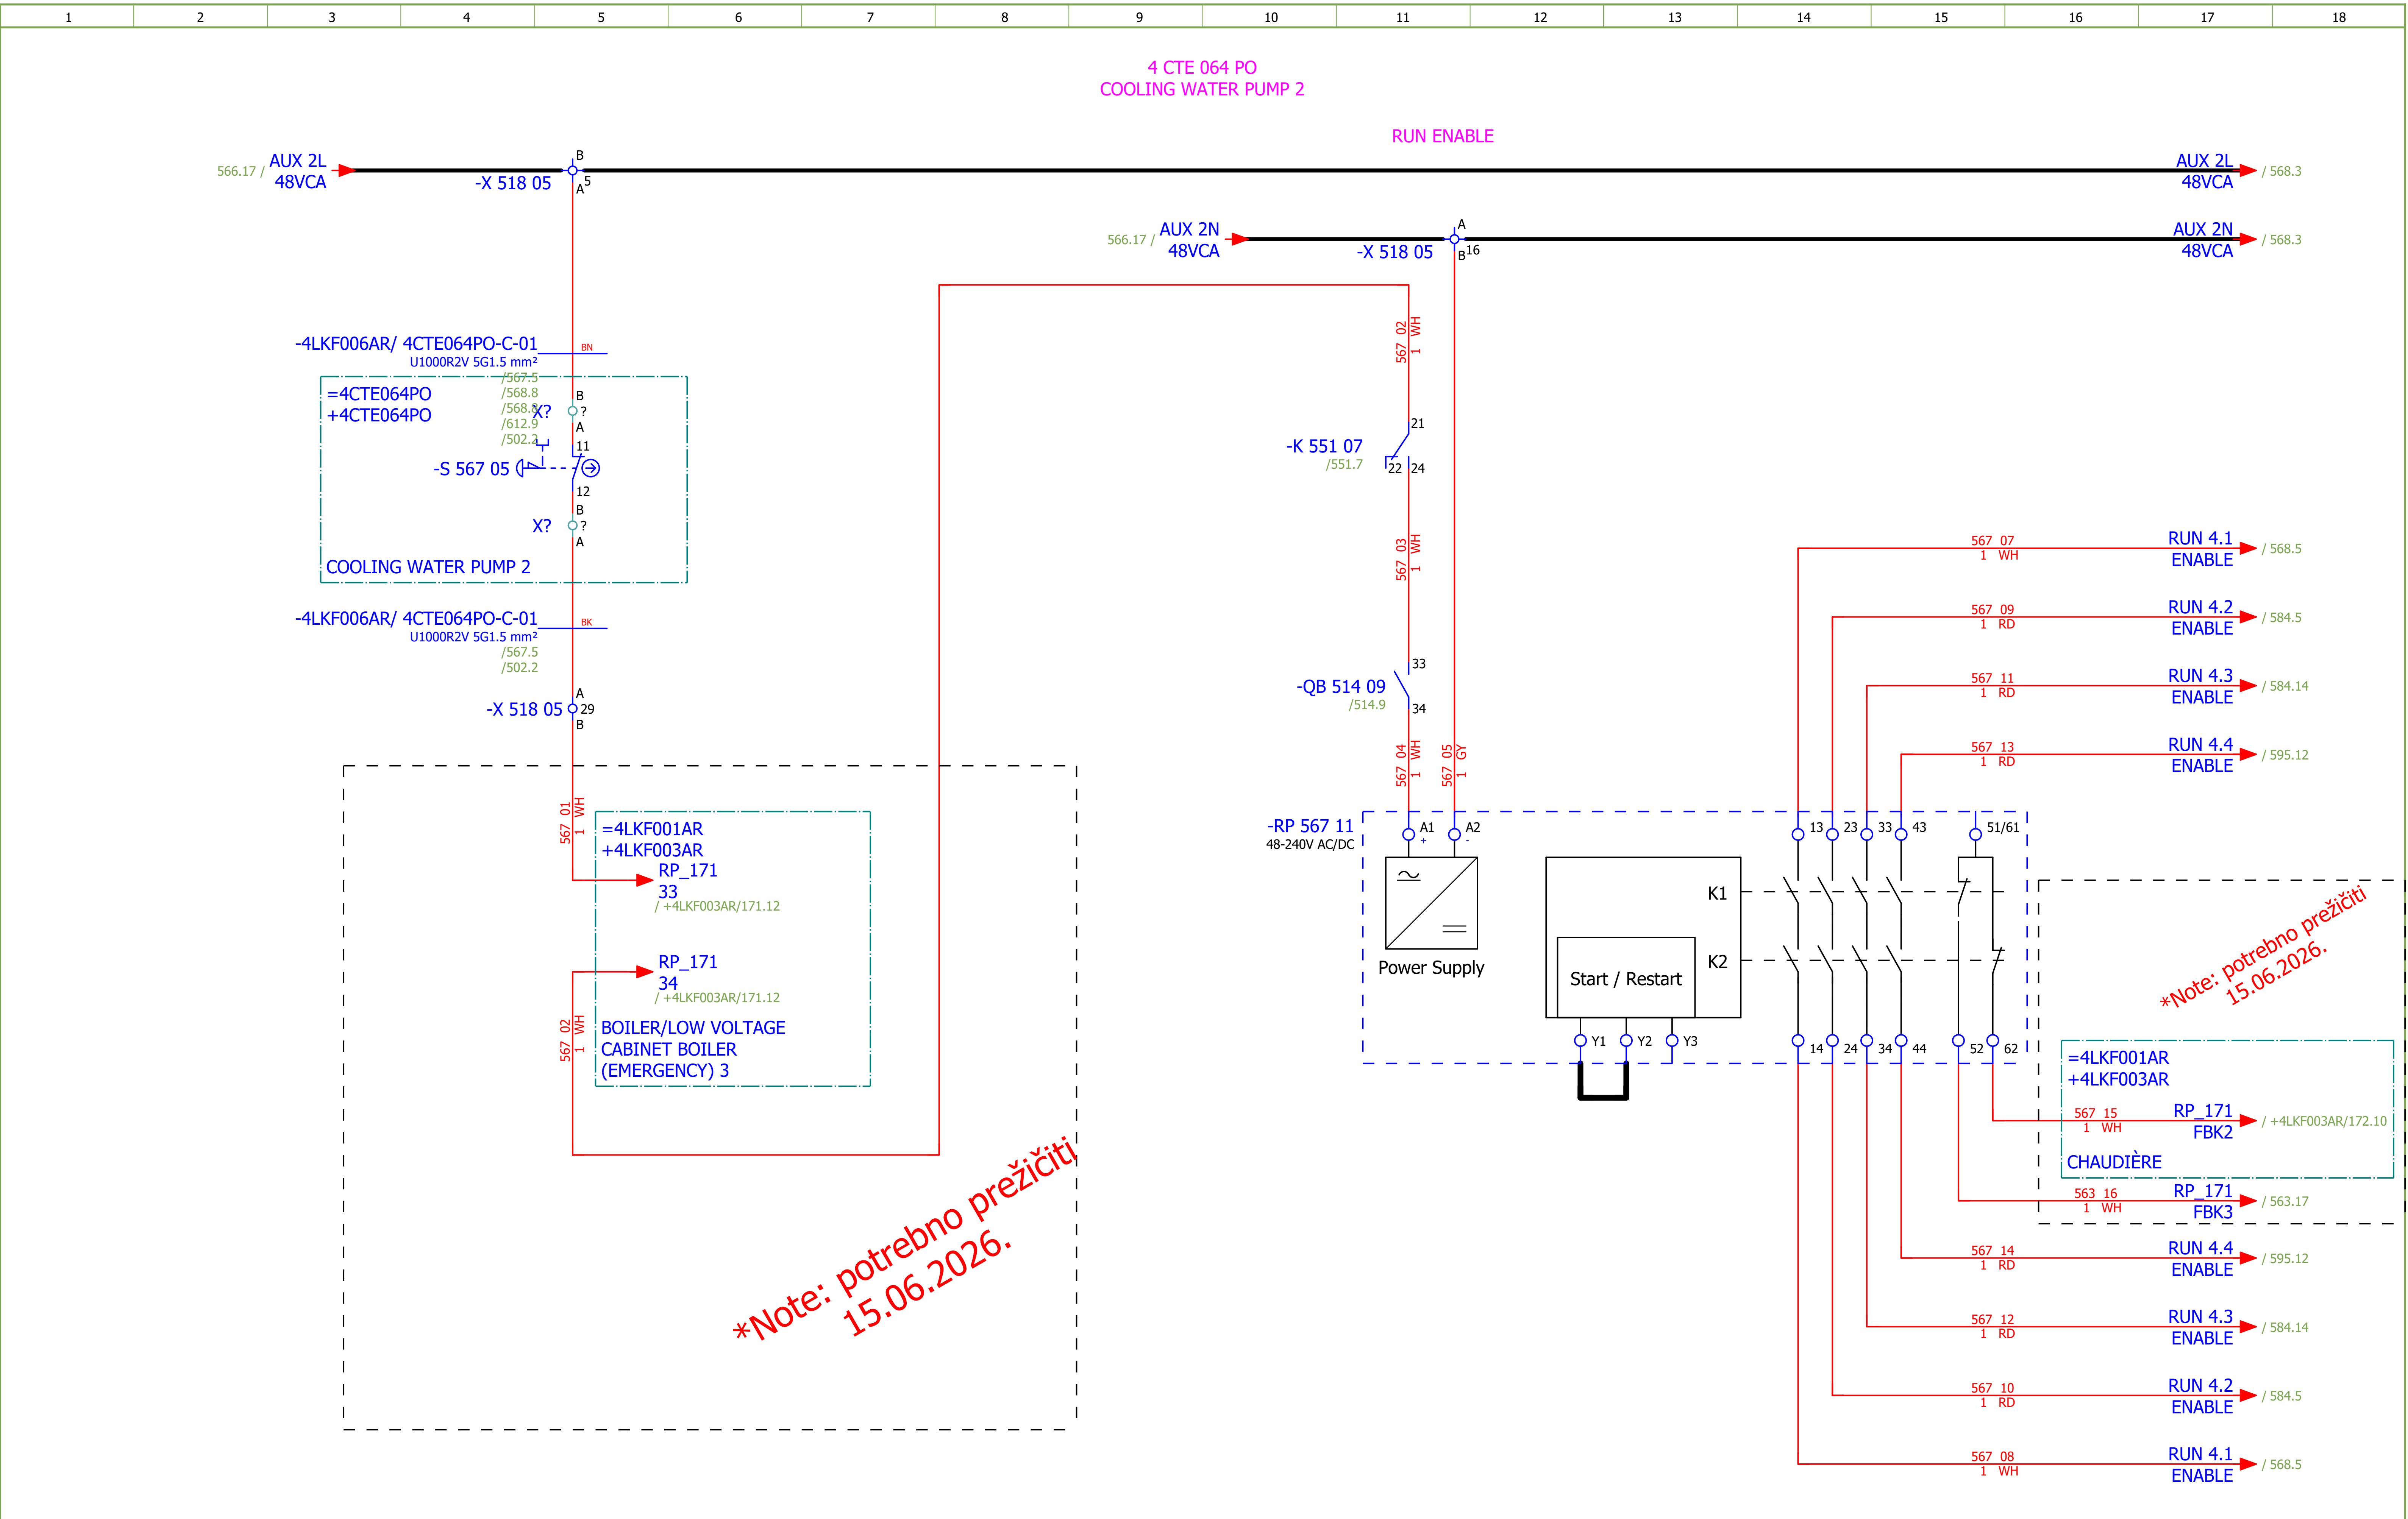

Date: 17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F	#MC
Drawn: Luka Božičević								
Approved: Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 2 - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 567
Format: A3							+4LKF006AR	Next: 568

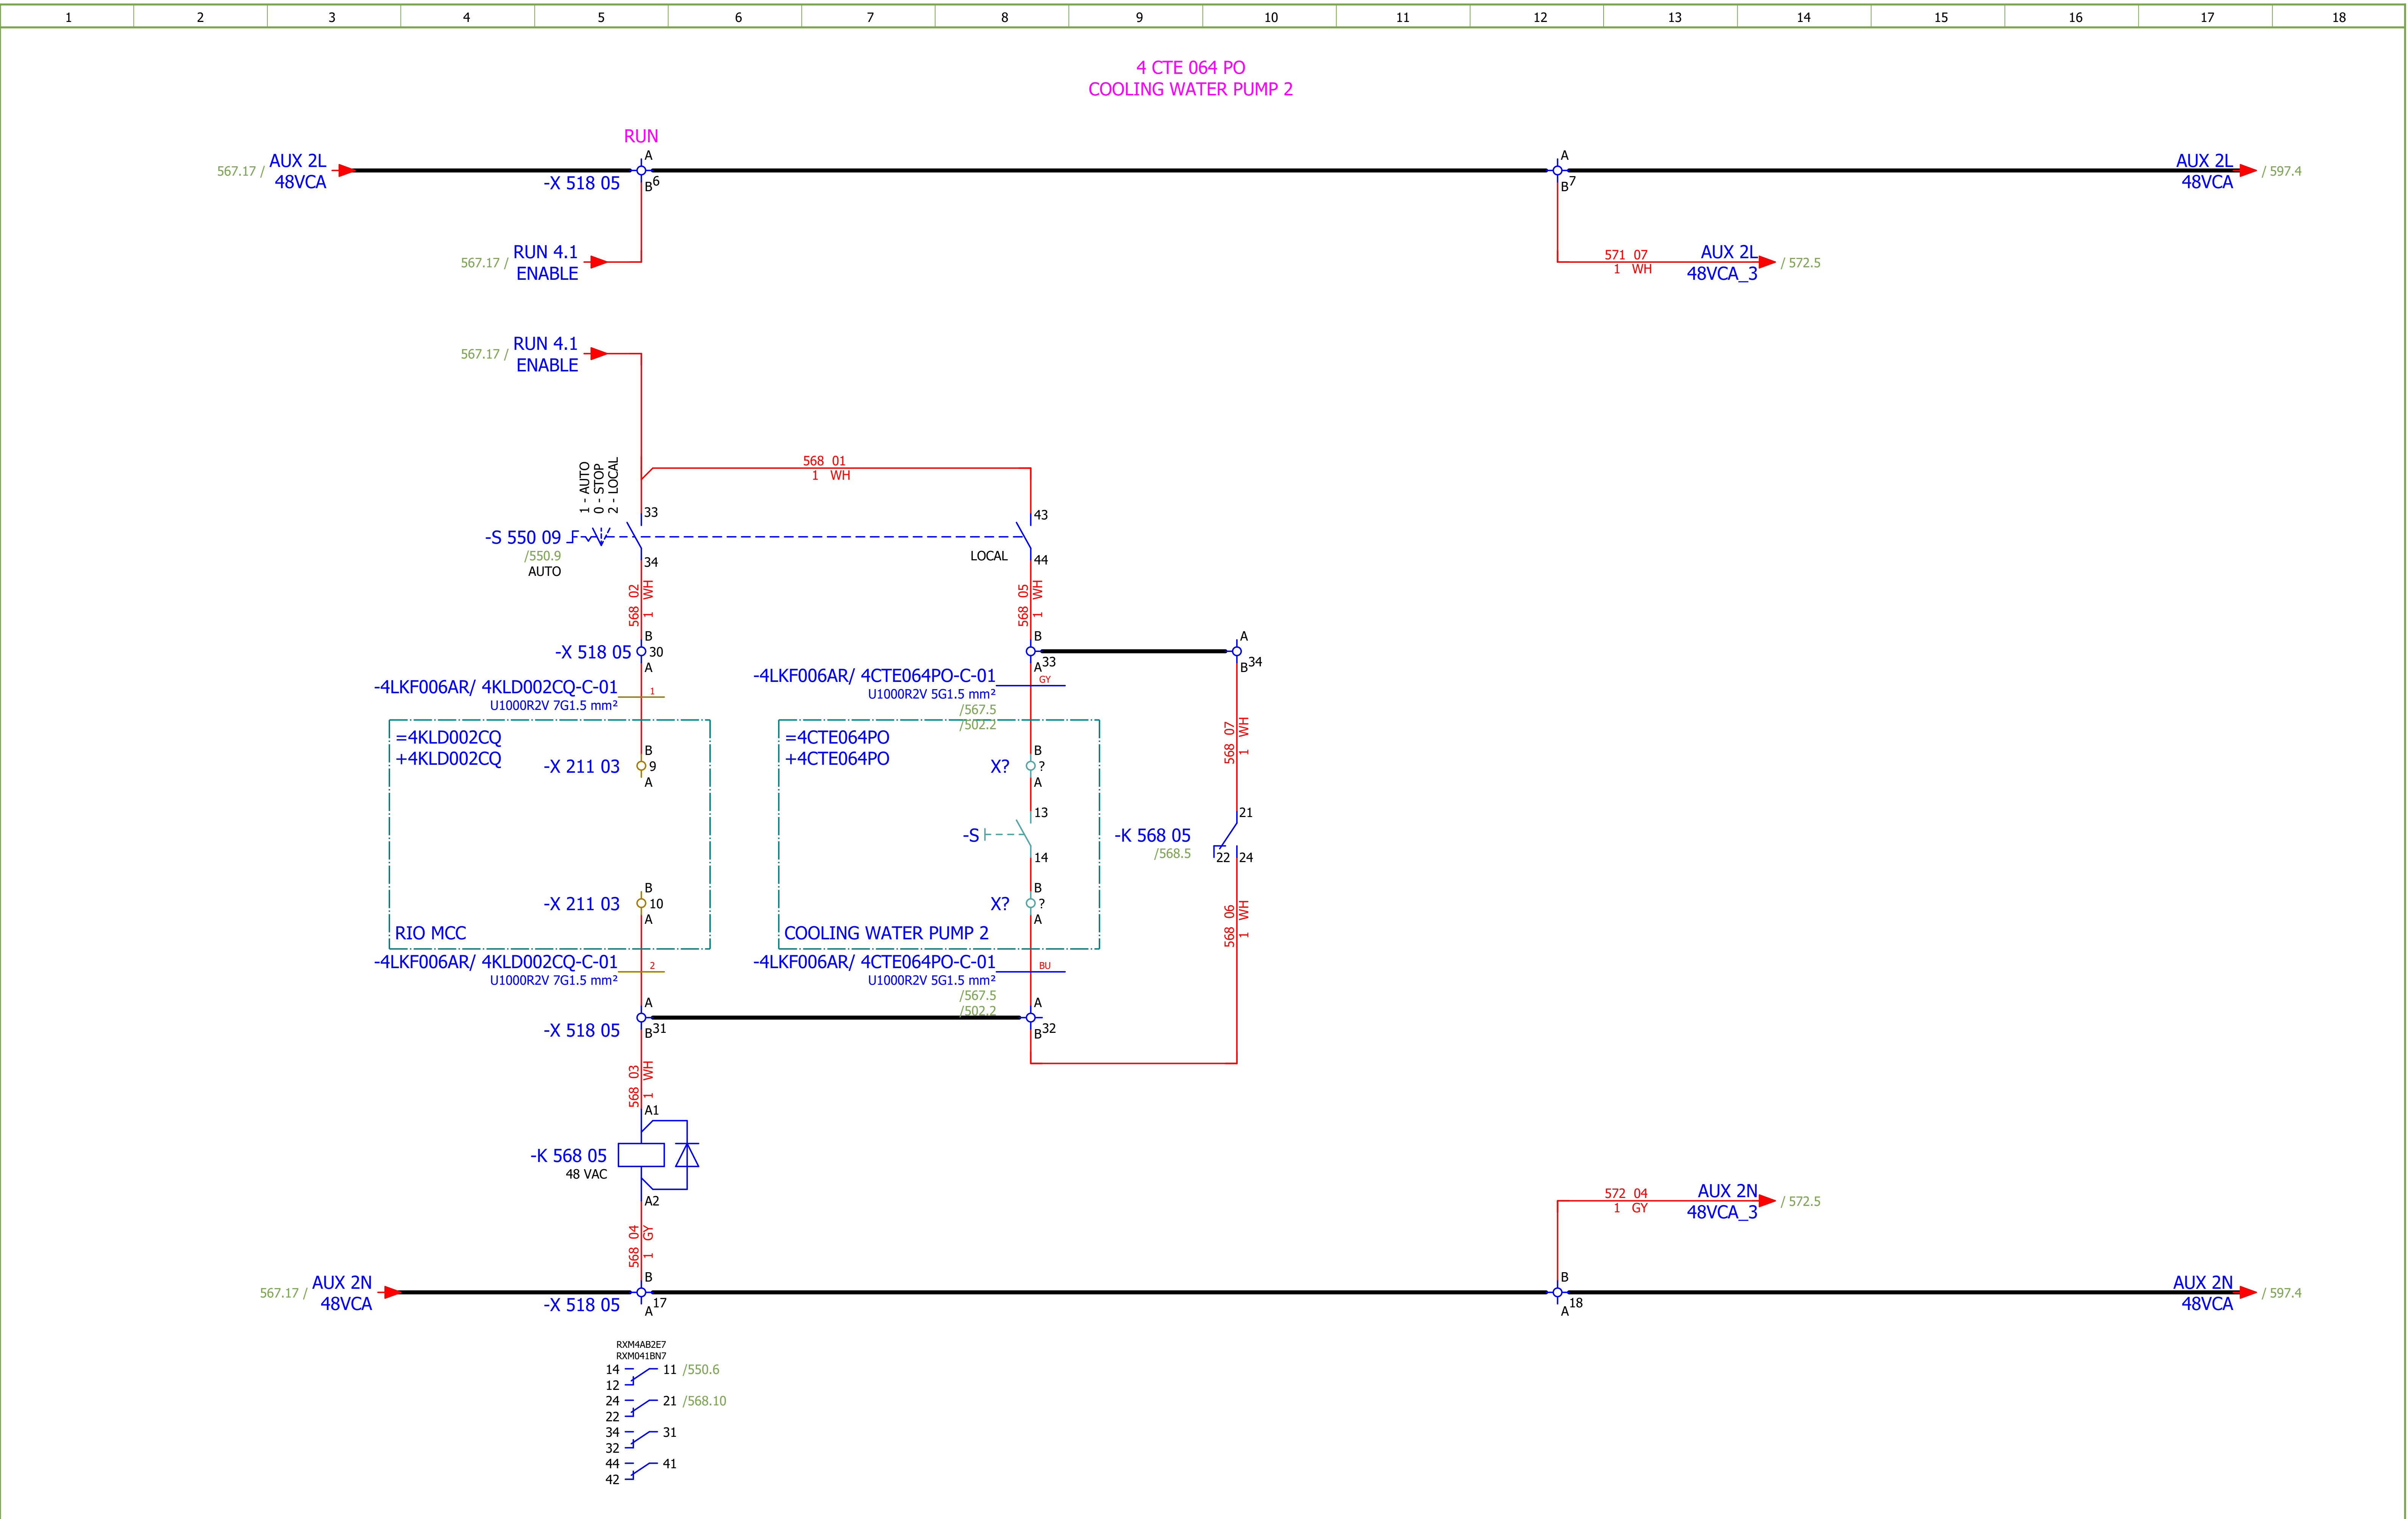

Date: 17.03.2026.	SINTAKSA A Voith Company	Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F	#MC
Drawn: Luka Božičević								
Approved: Grga Kolić		Object: RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 2 - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 568
Format: A3							+4LKF006AR	Next: 569

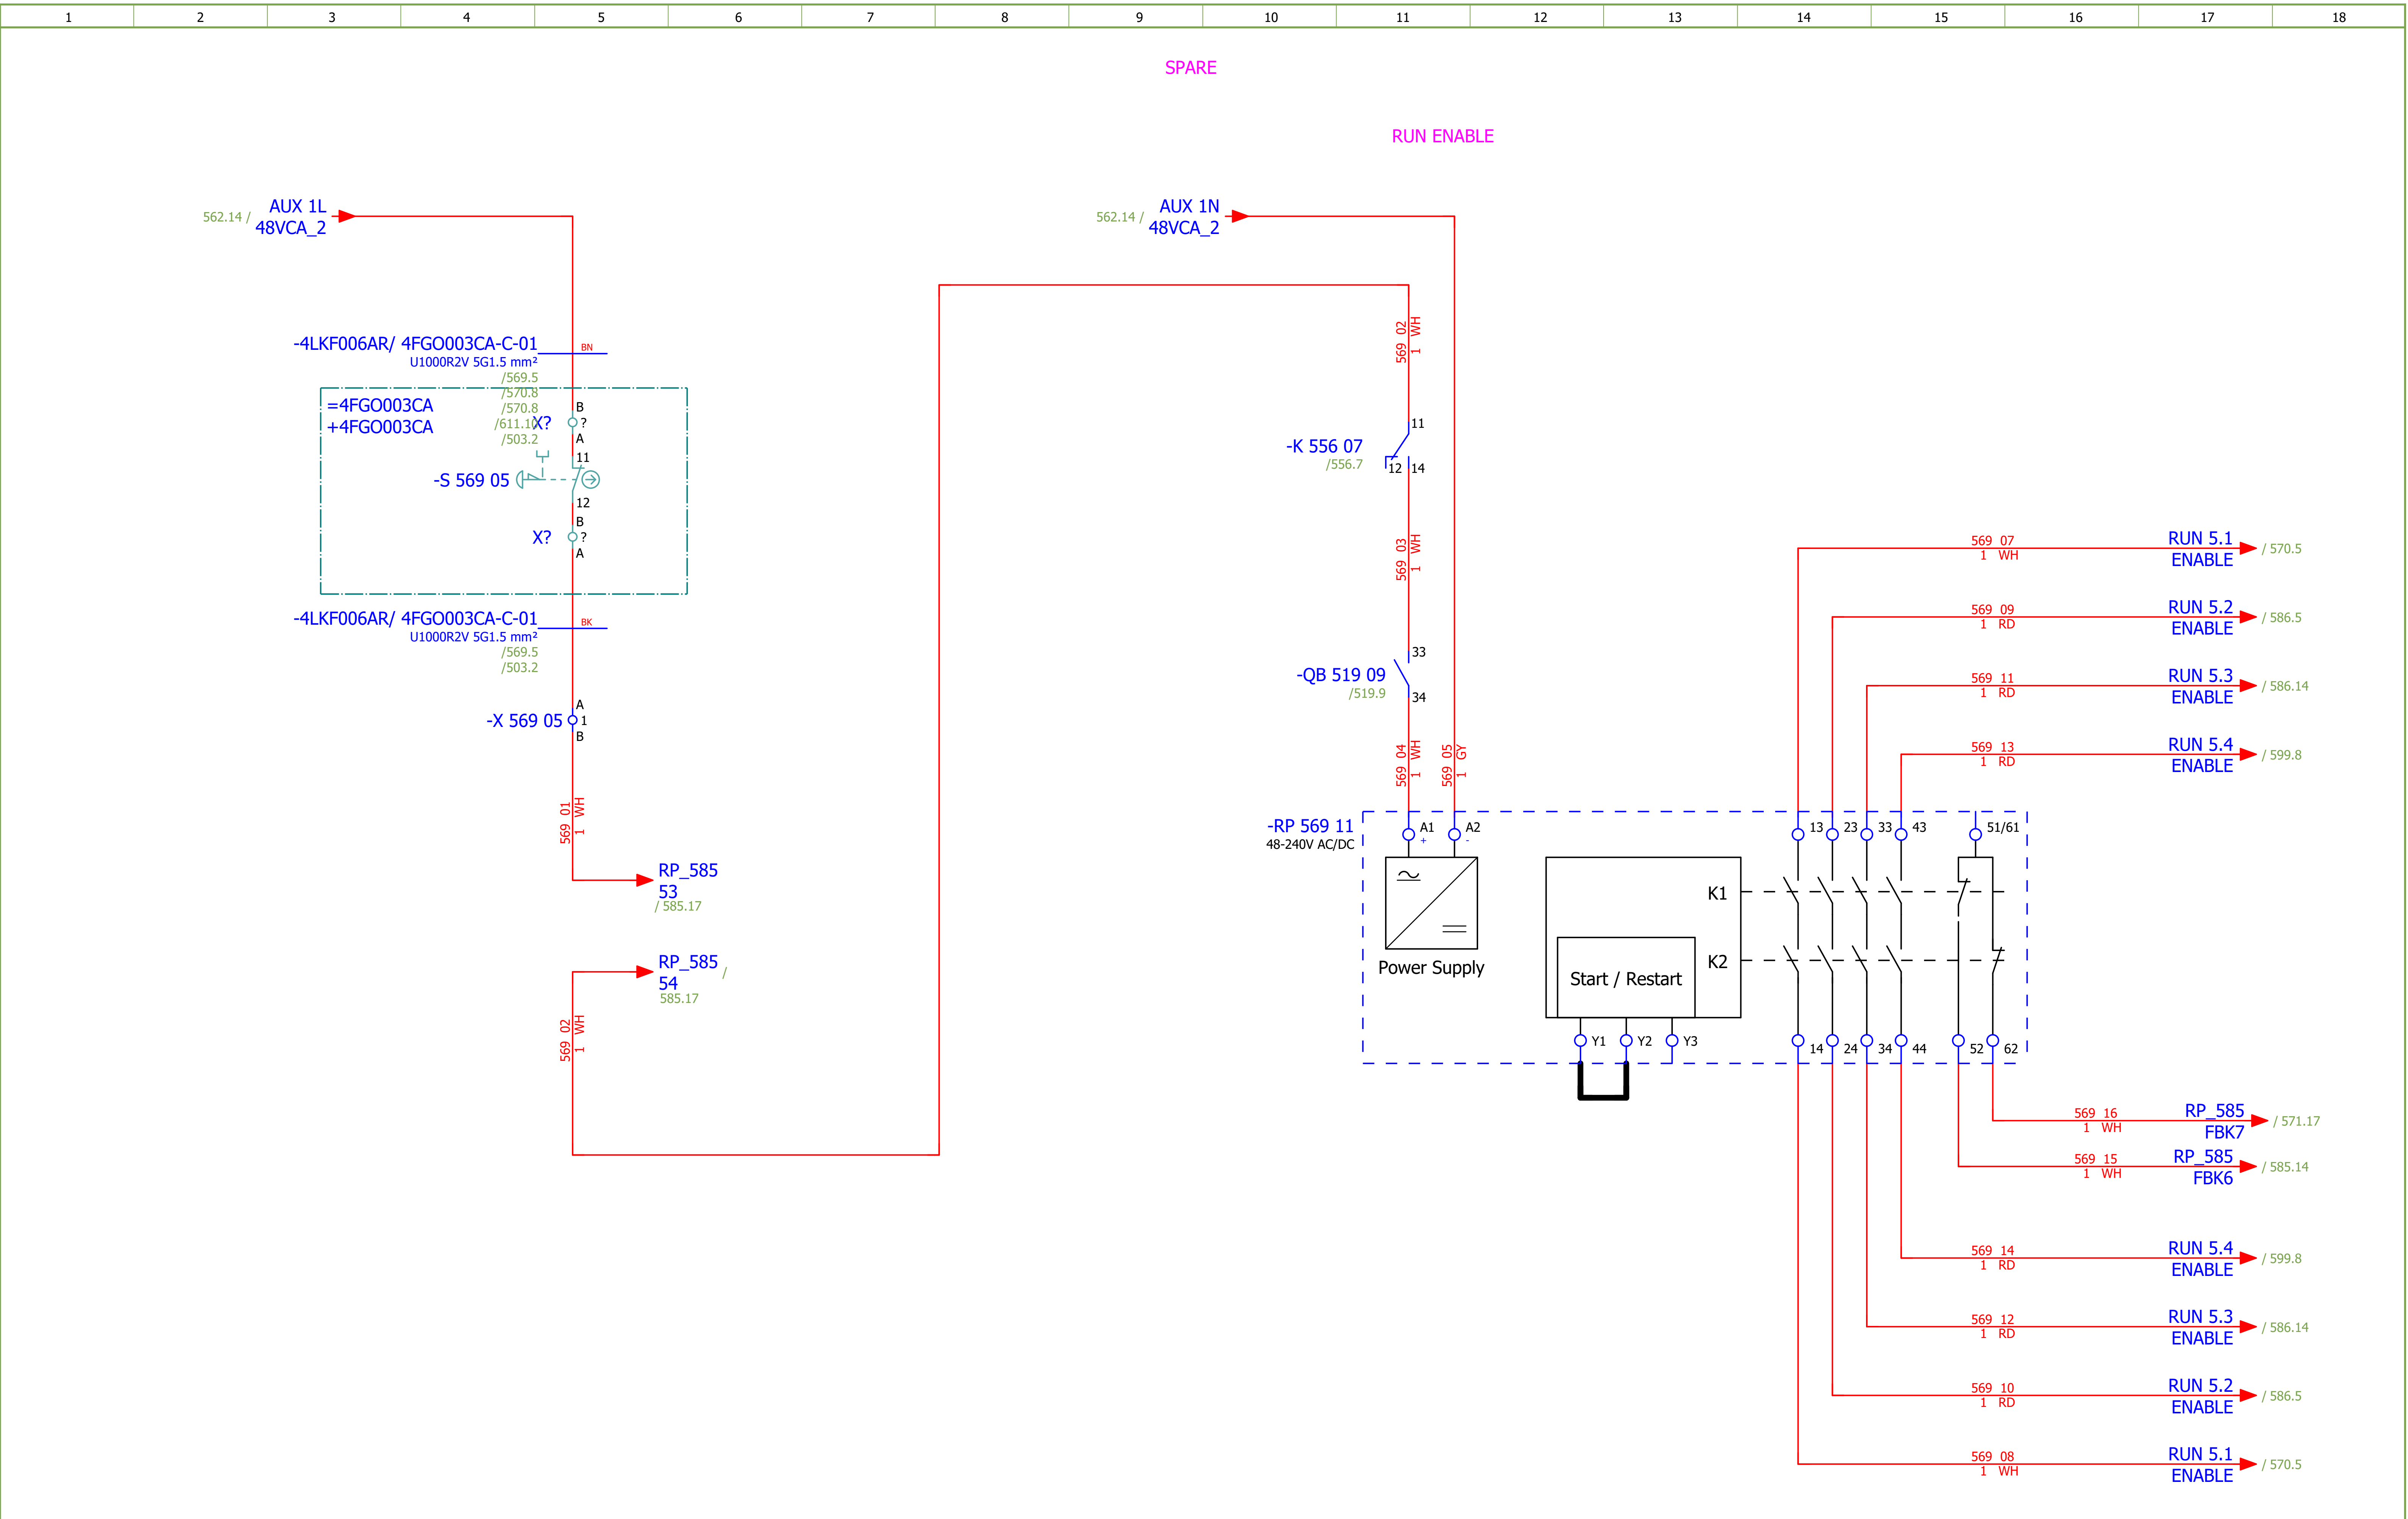

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević								#MC
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 569
Format:	A3							+4LKF006AR	Next: 570

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

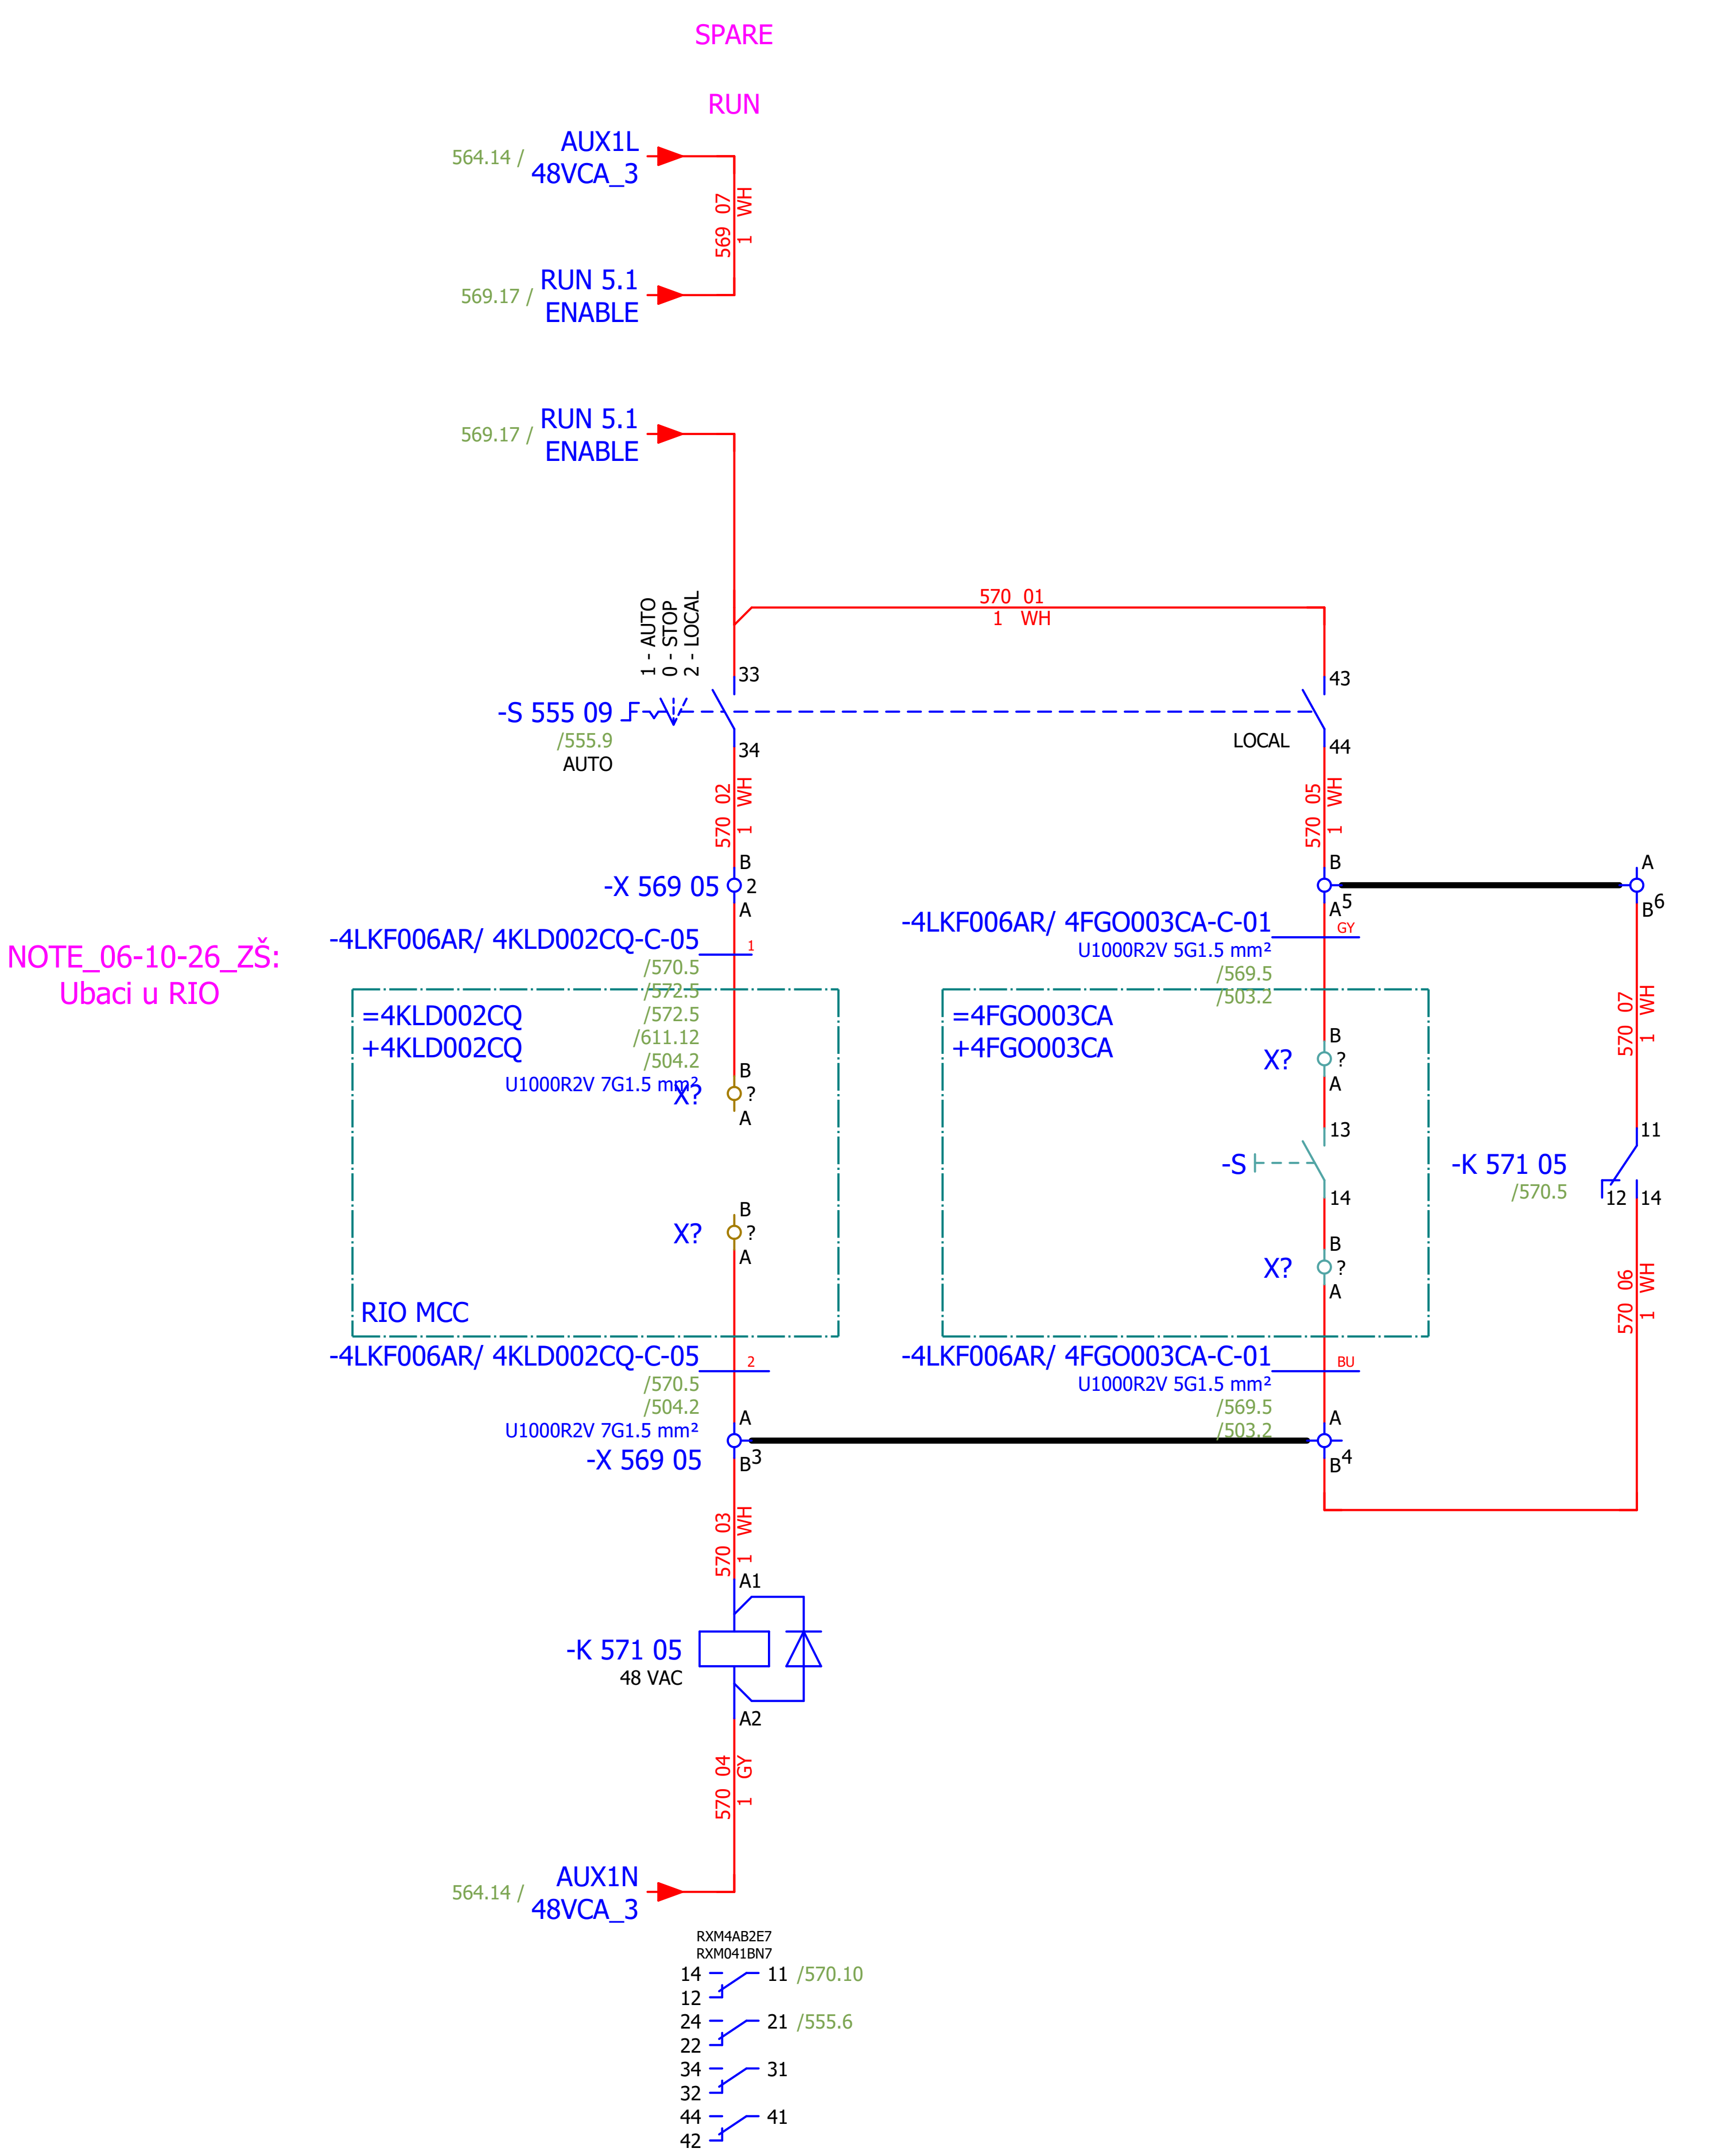

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F	#MC
Drawn:	Luka Božičević										
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	SPARE - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 570
Format:	A3									+4LKF006AR	Next: 571

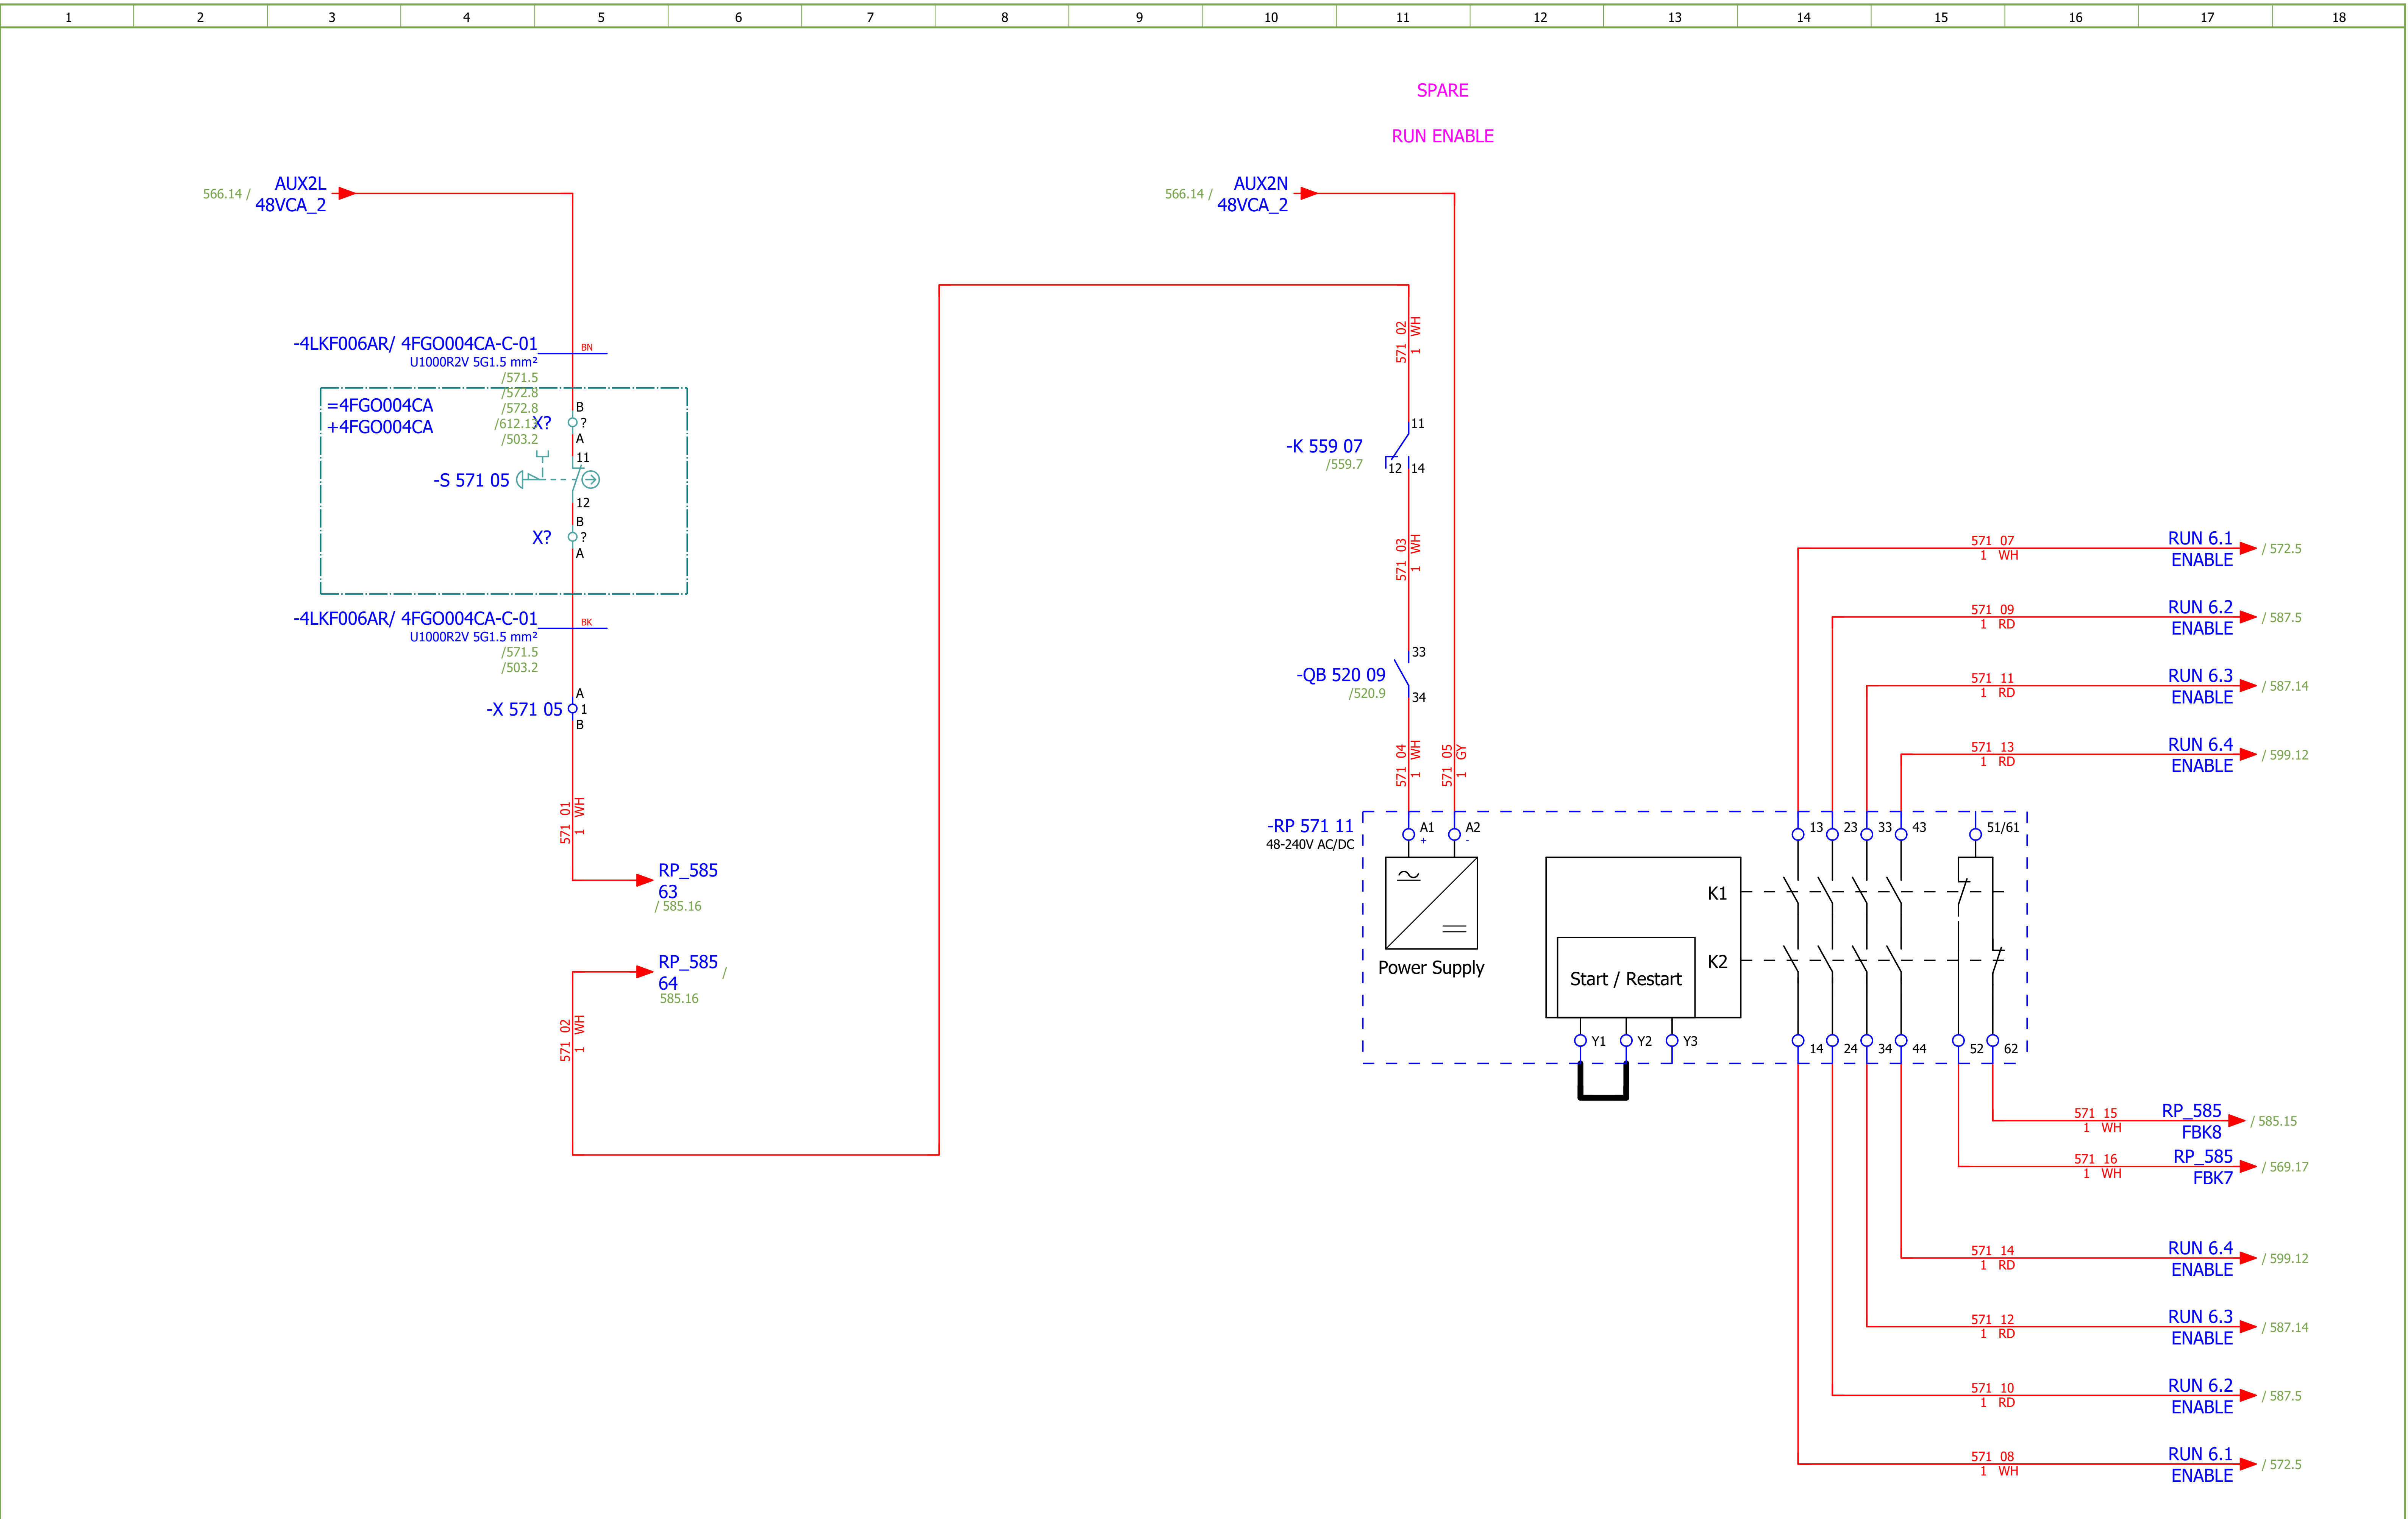

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874
Drawn:	Luka Božičević							Revision: F
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F	=4LKF001AR	#MC Sheet: 571
Format:	A3						+4LKF006AR	Next: 572

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

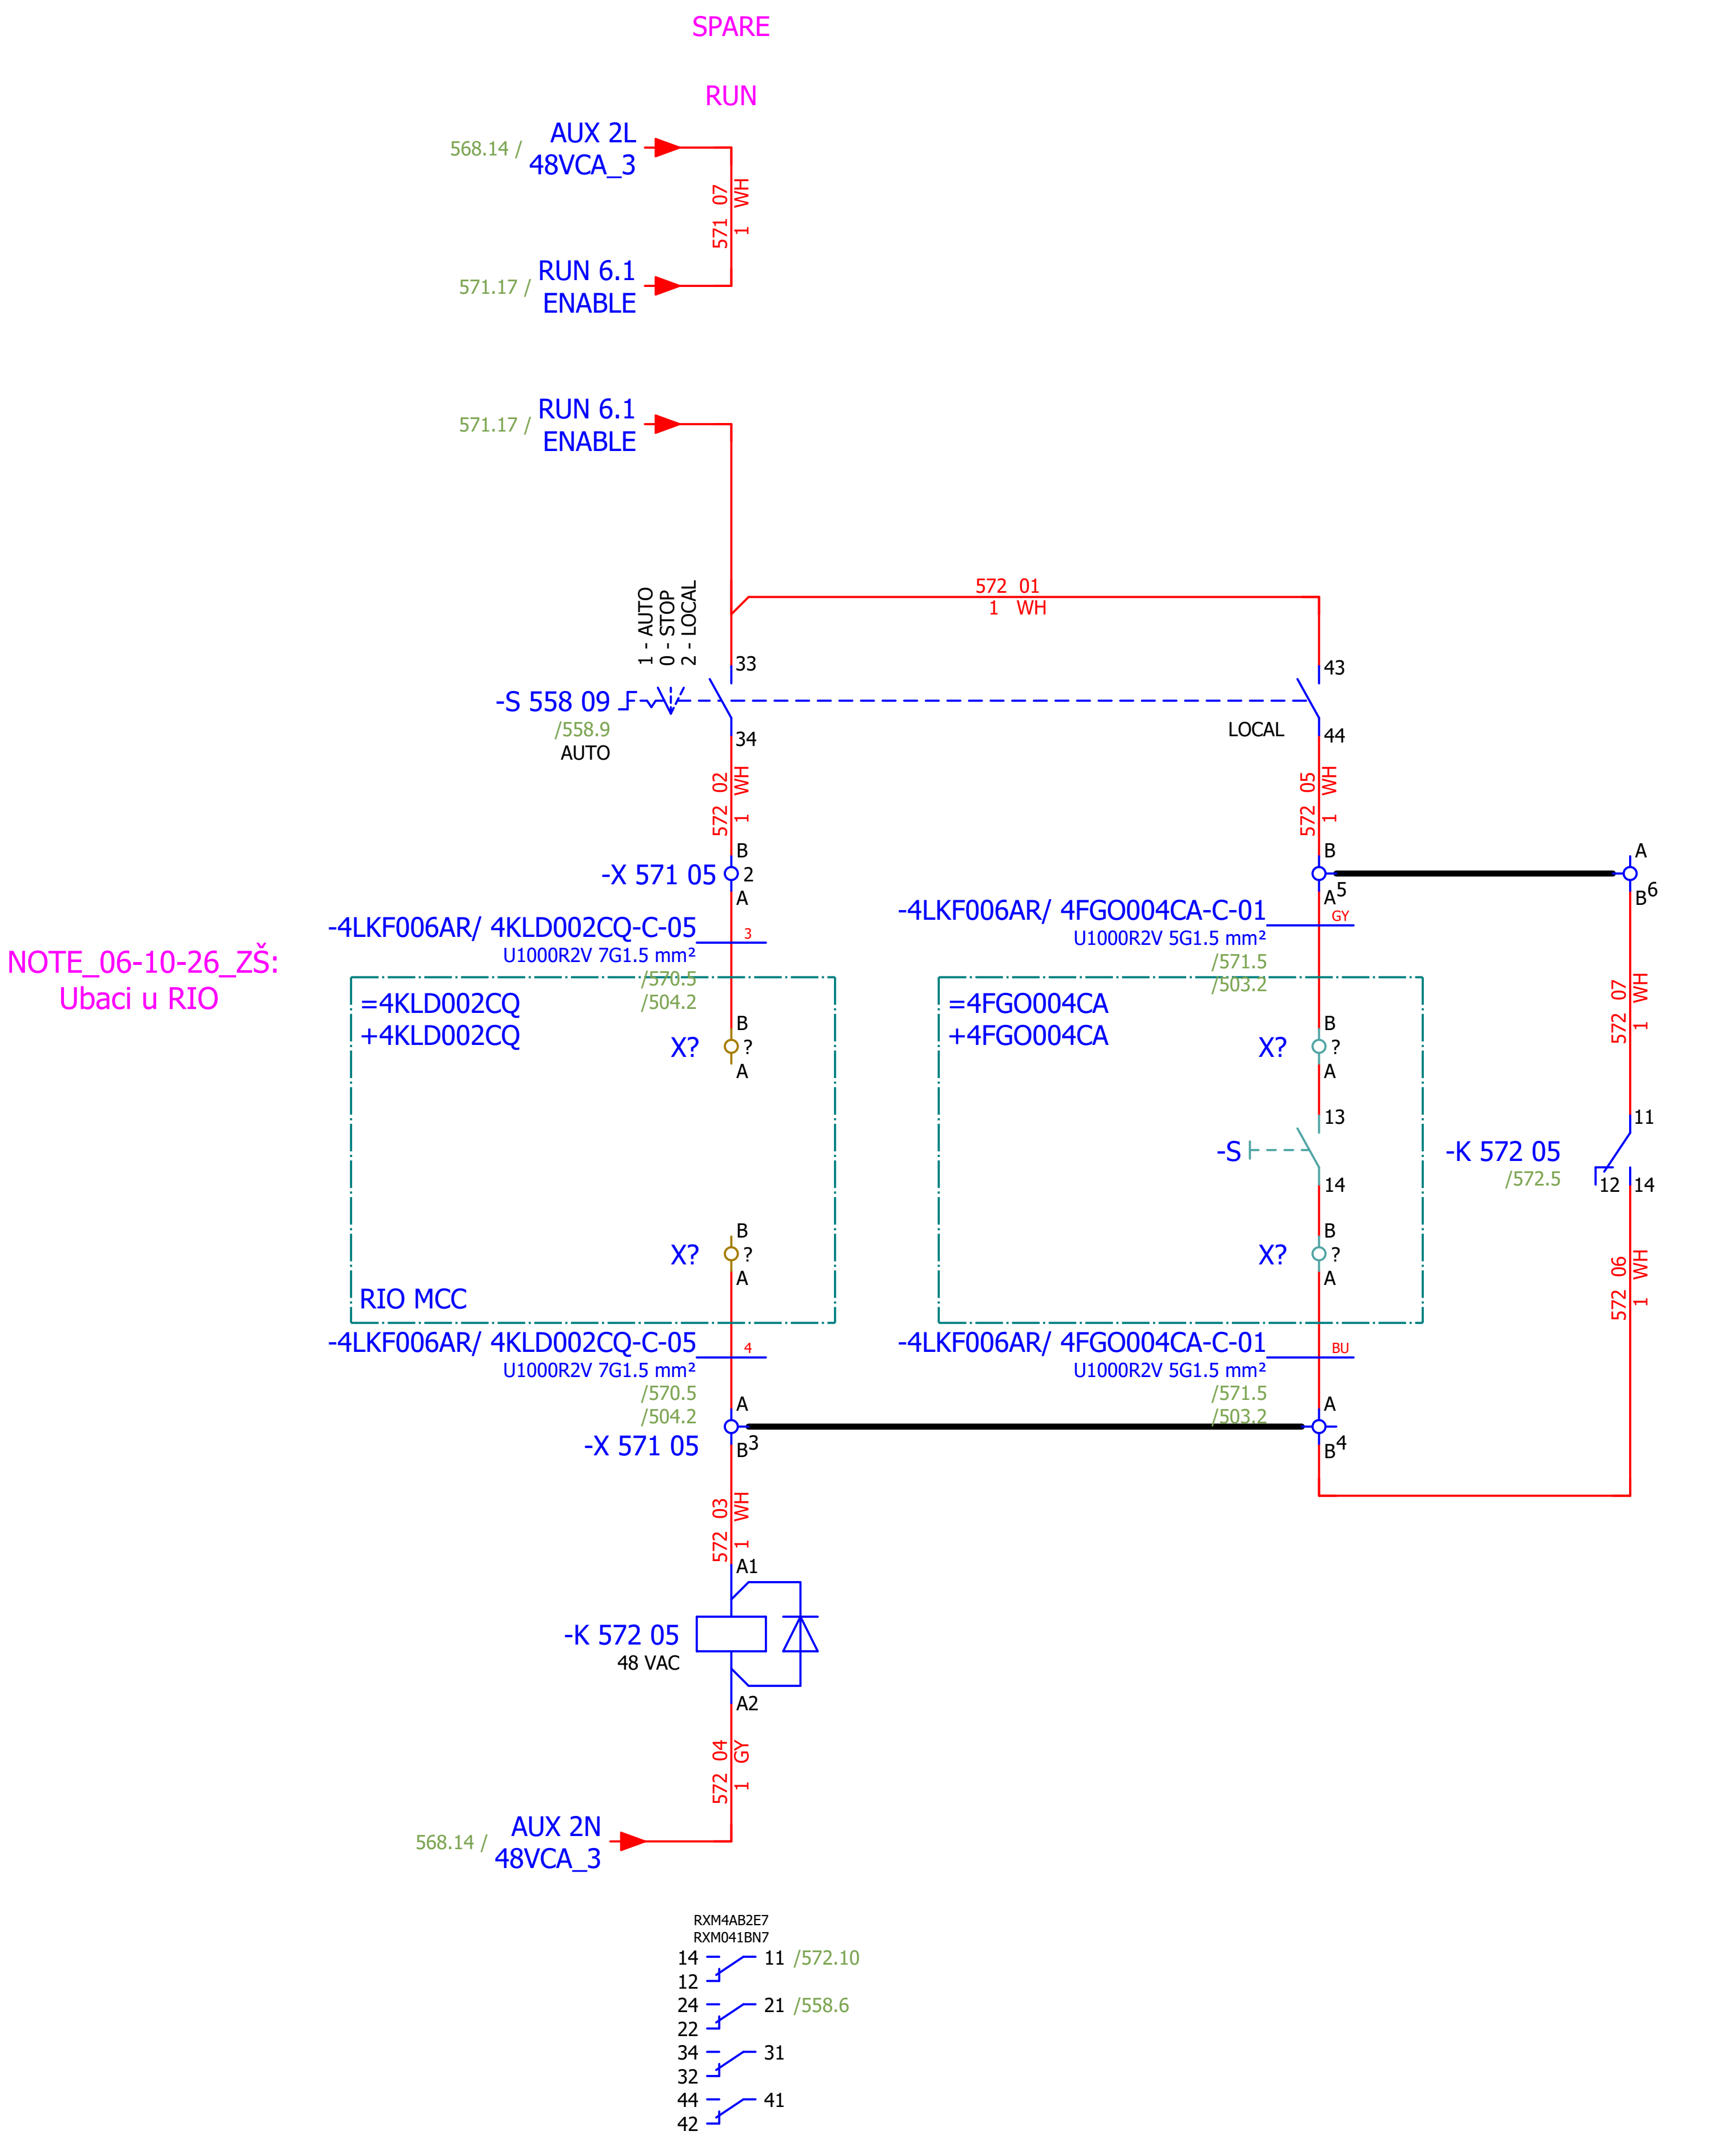

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević									#MC
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	SPARE - CONTROL	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 572
Format:	A3								+4LKF006AR	Next: 581

4 SDX 001 PO
FAST FILING PUMP

SAFE TORQUE OFF

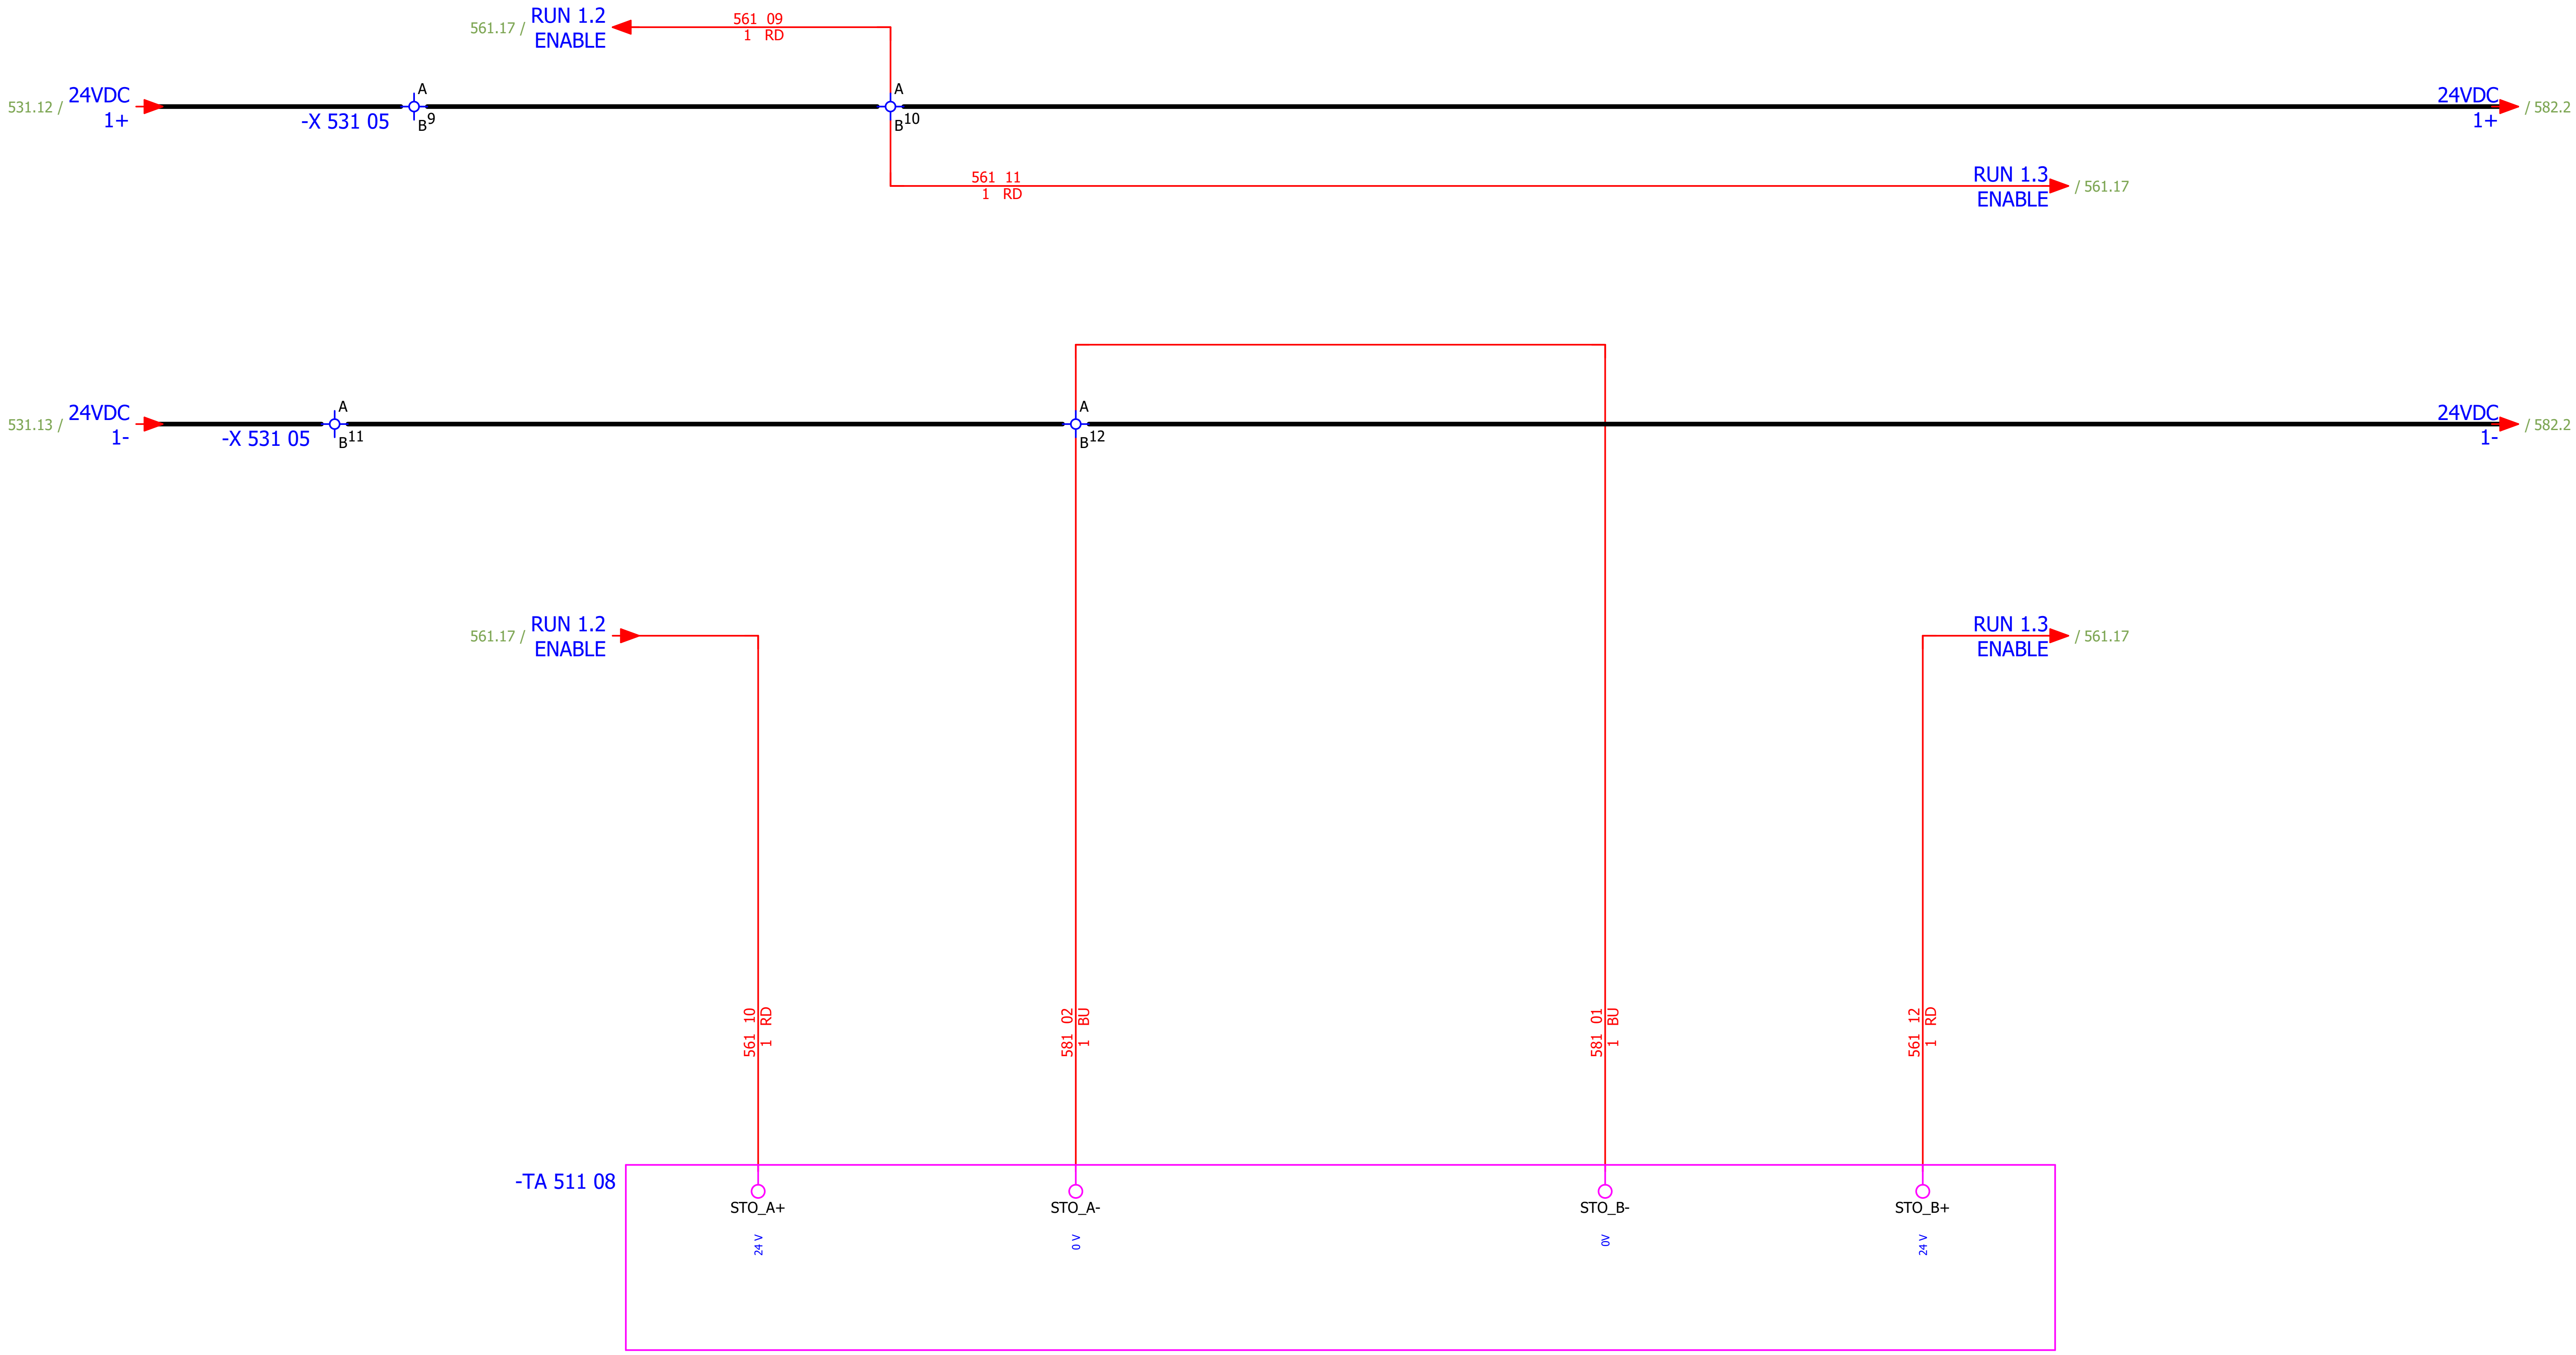

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F	#NA
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: FAST FILING PUMP - SAFE TORQUE OFF	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 581
Format:	A3							+4LKF006AR	Next: 582

4 CTE 063 PO
COOLING WATER PUMP 1
SAFE TORQUE OFF

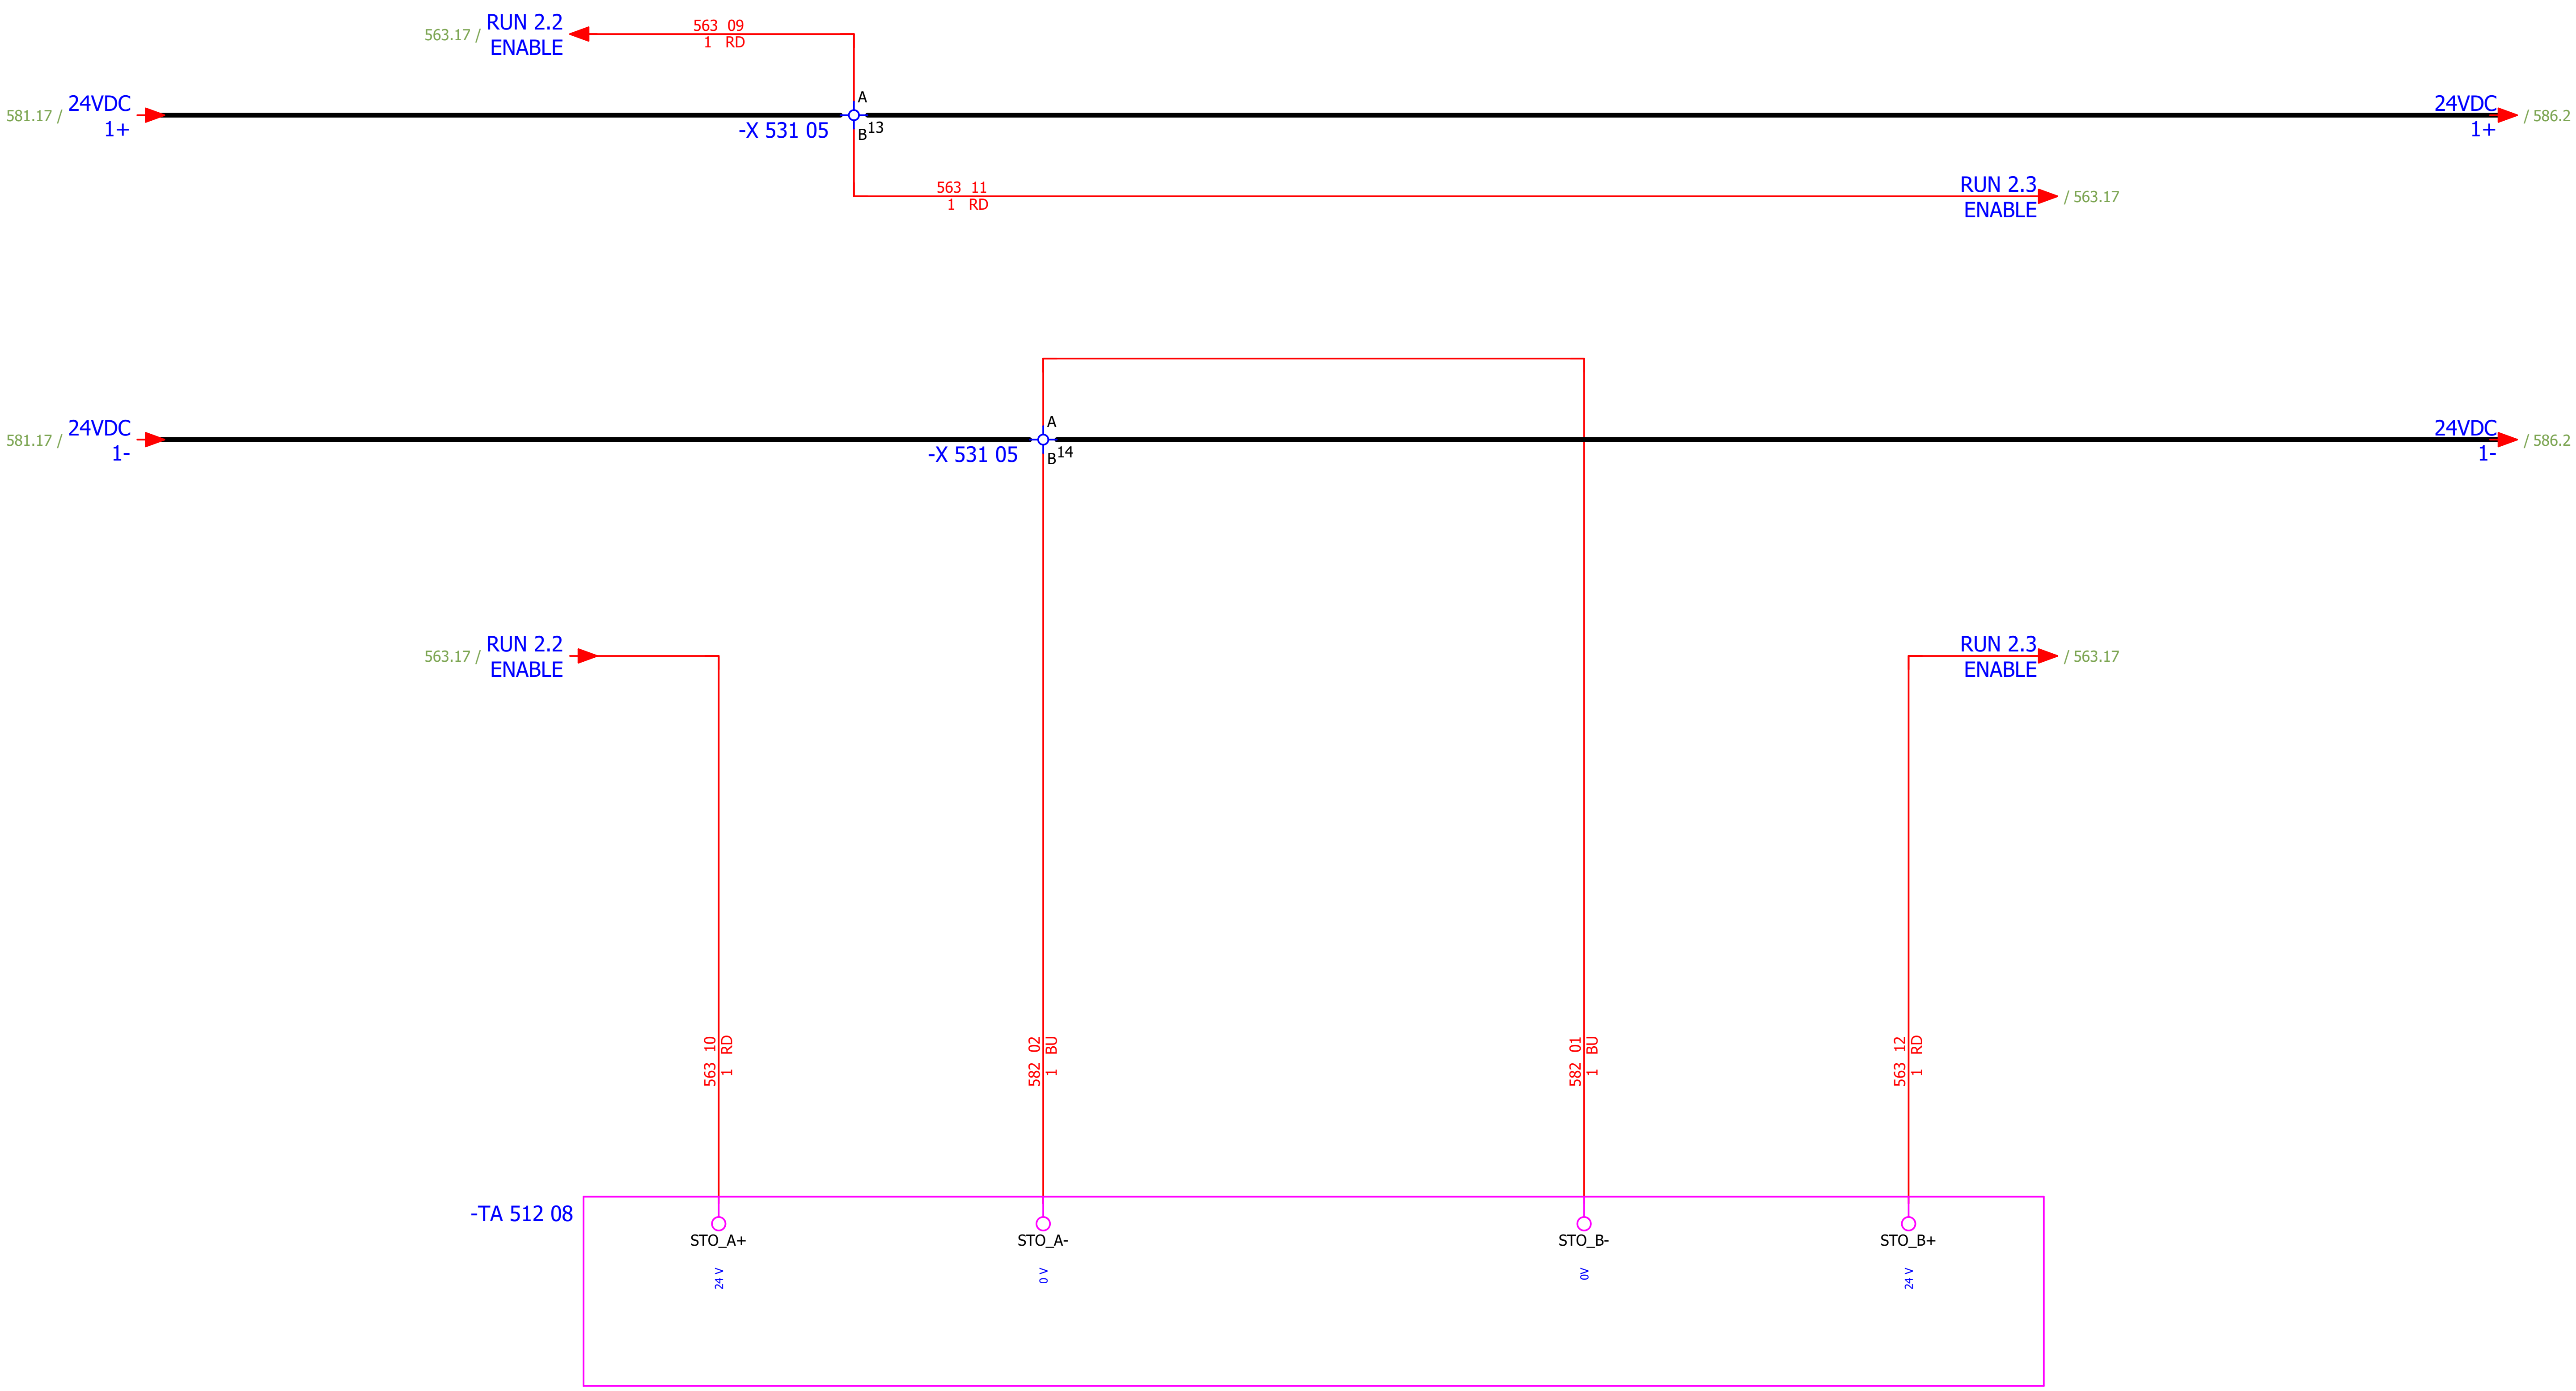

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević								#NA
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 1 - SAFE TORQUE OFF	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 582
Format:	A3							+4LKF006AR	Next: 583

SPARE

SAFE TORQUE OFF

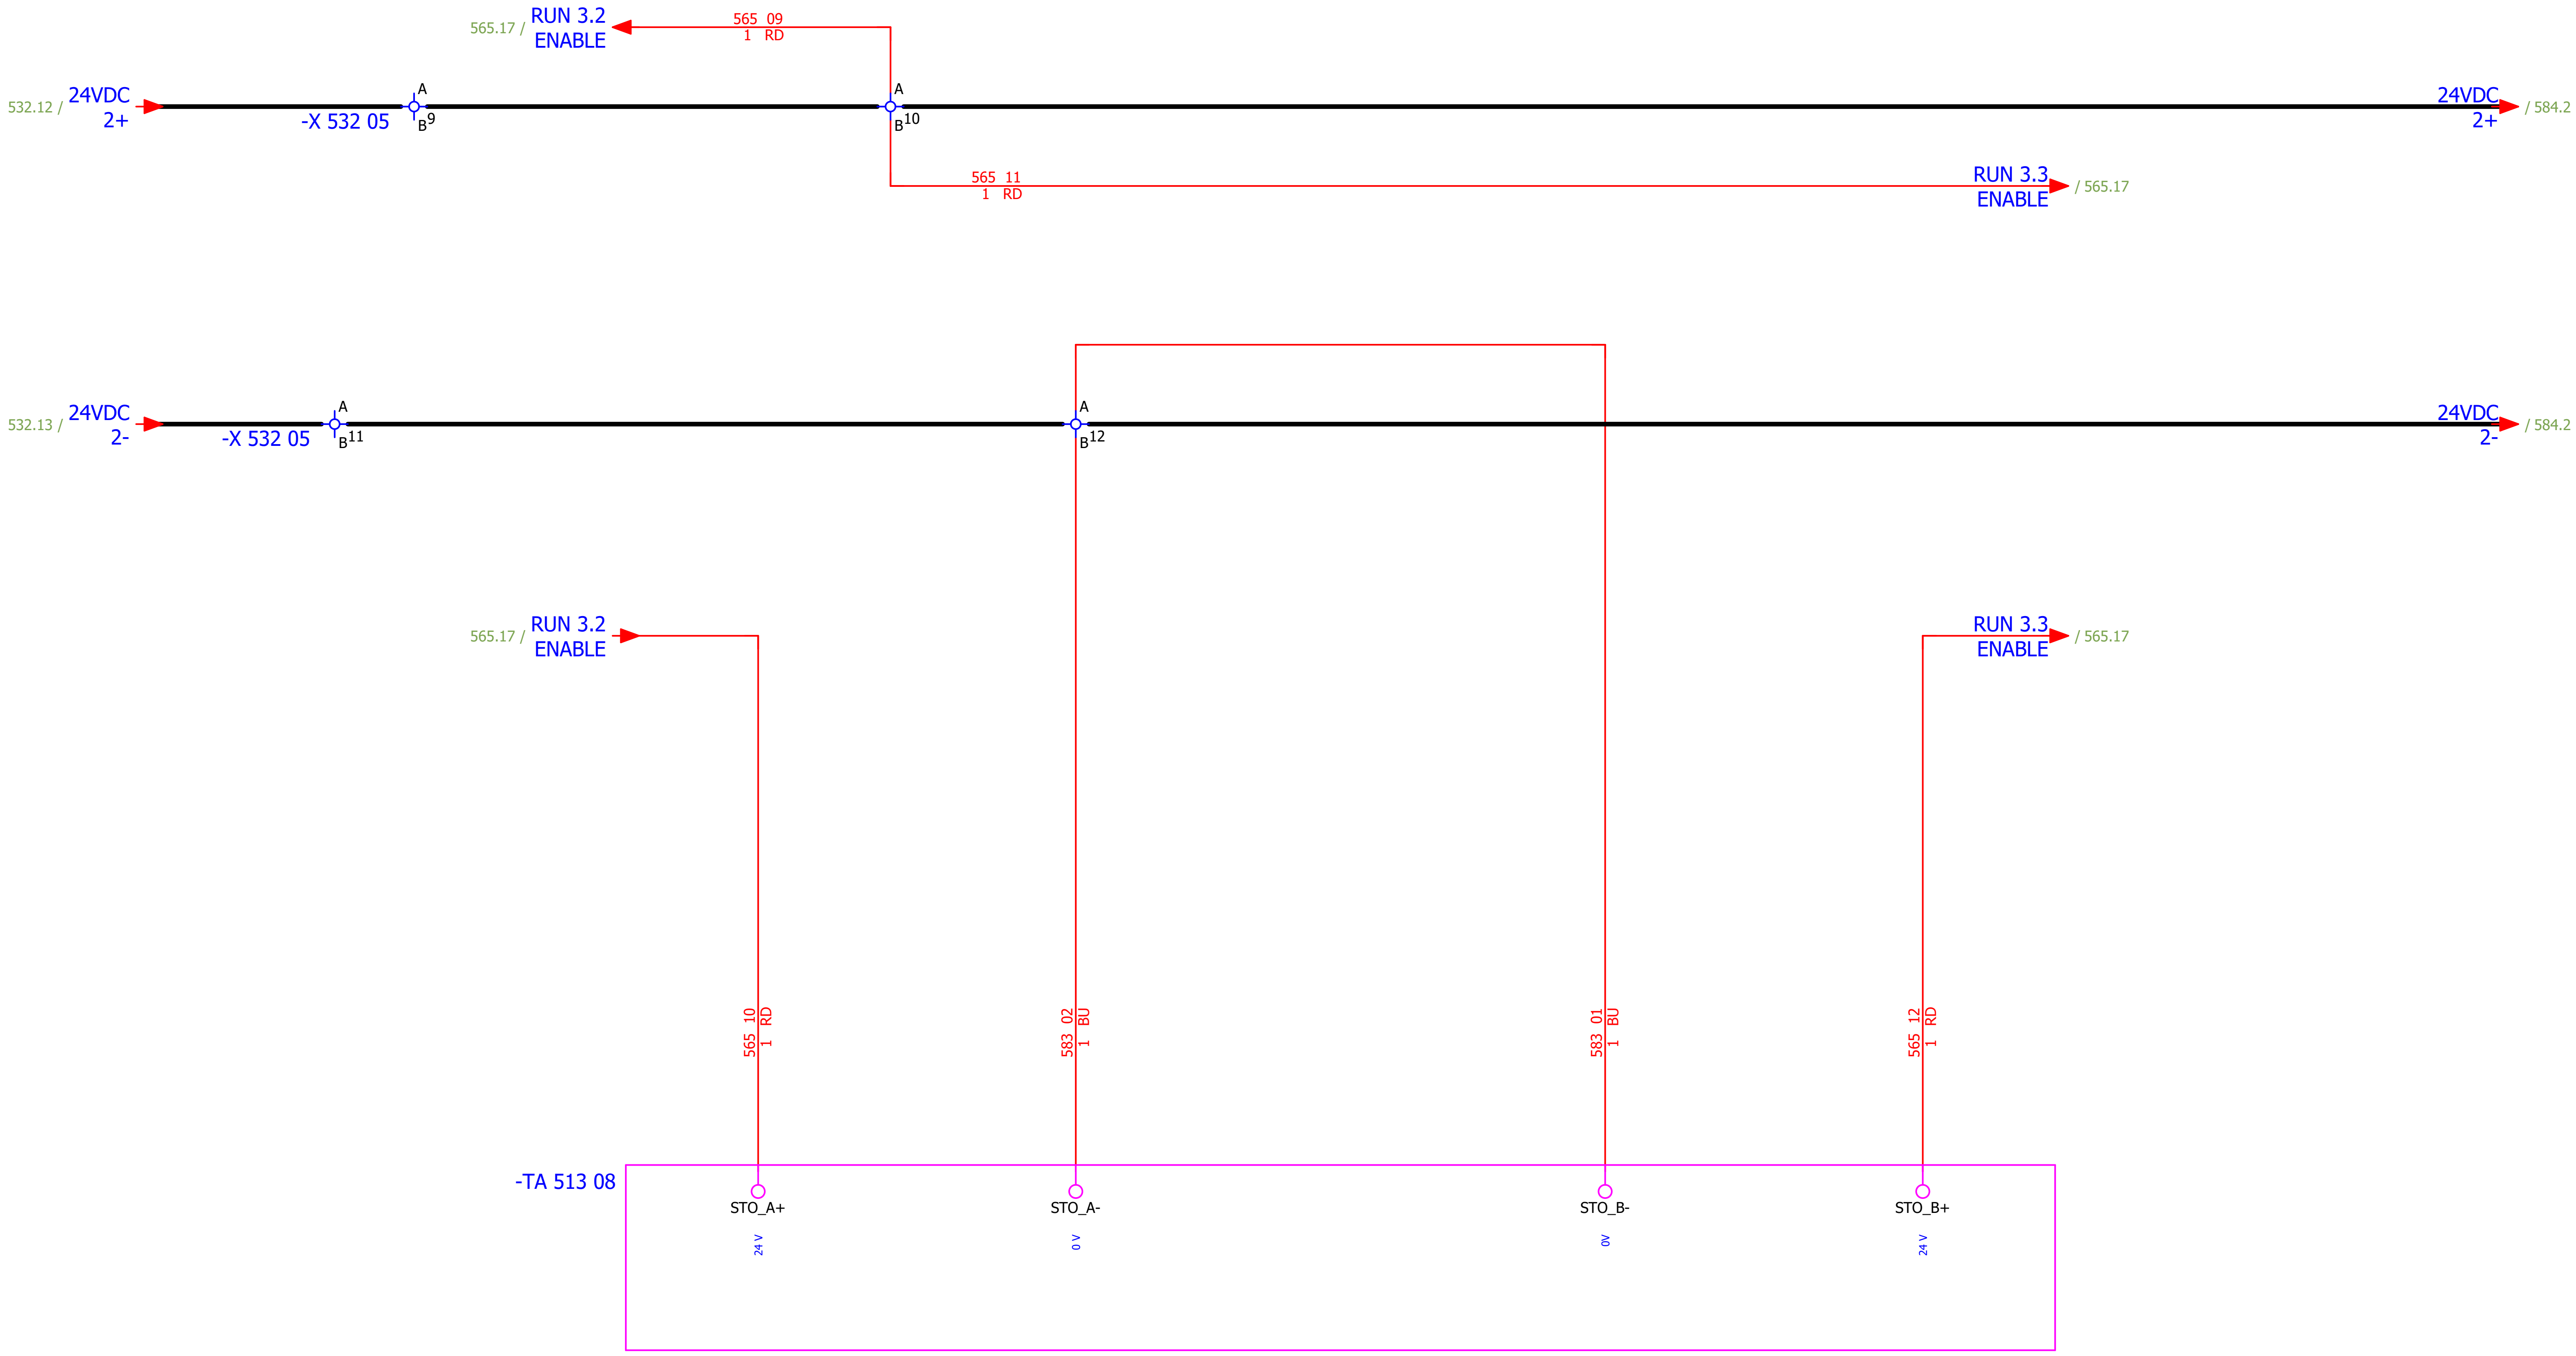

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F	#NA
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE - SAFE TORQUE OFF	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 583
Format:	A3								+4LKF006AR	Next: 584

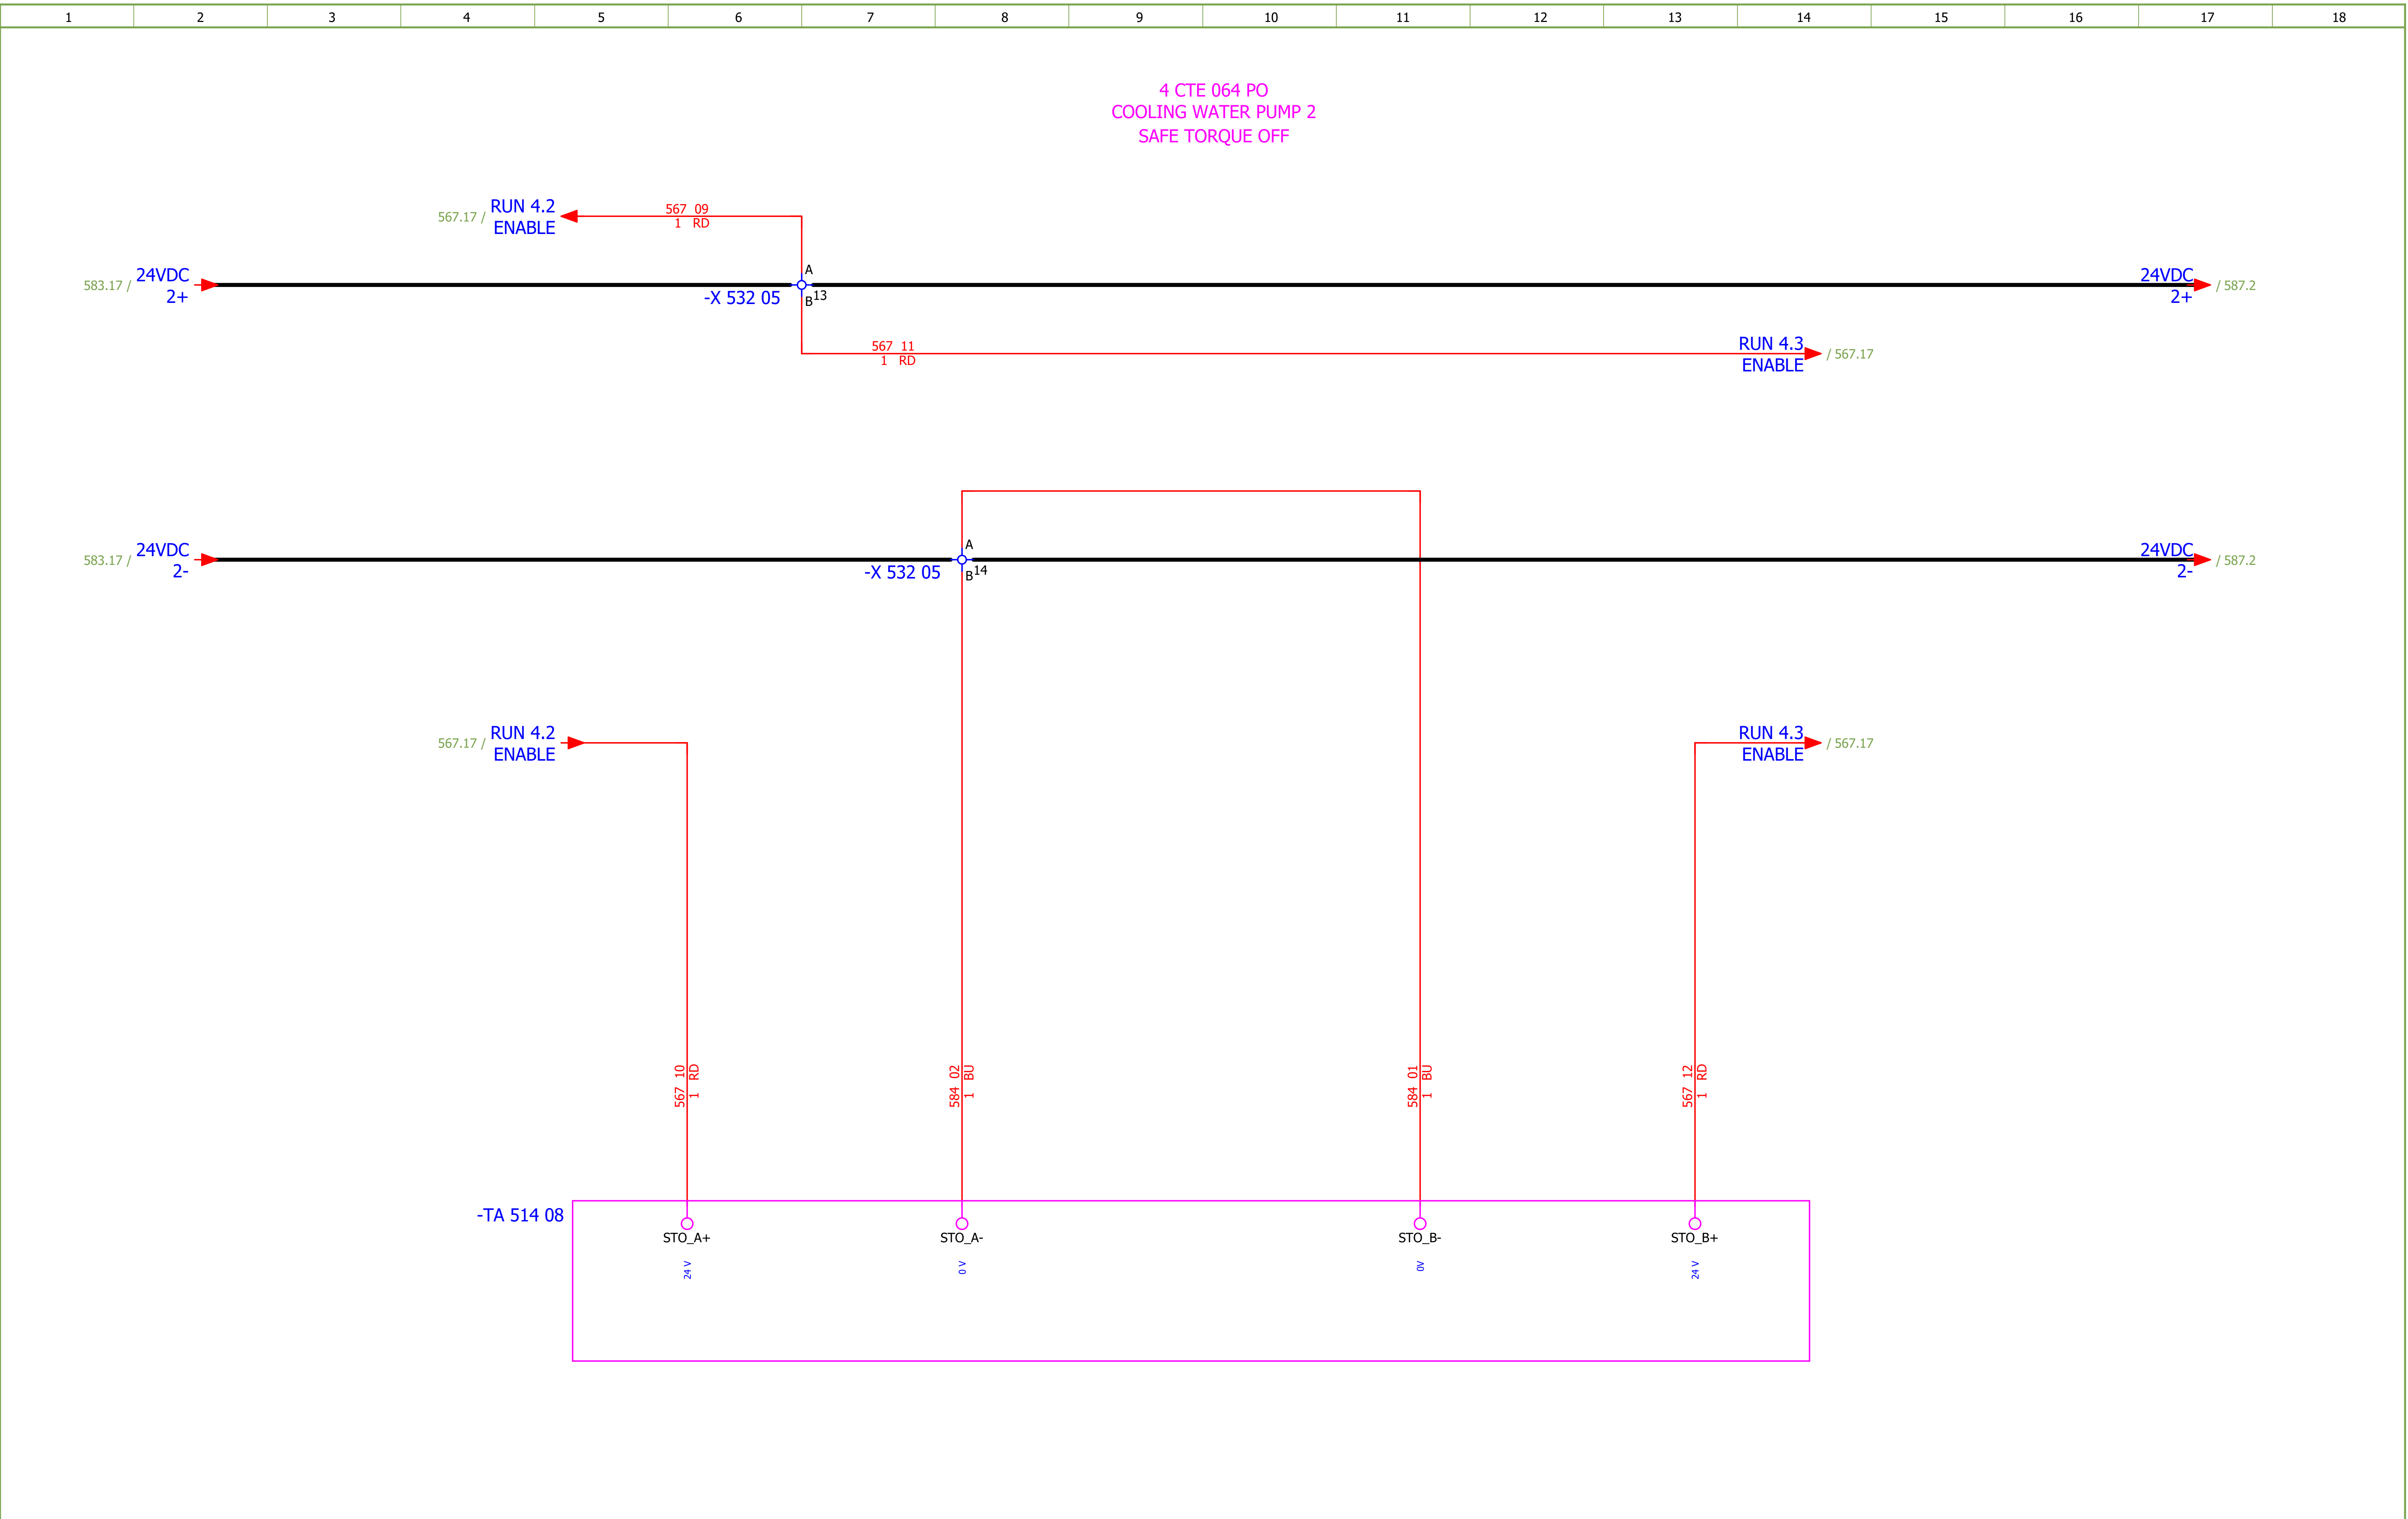

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević								#NA
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 2 - SAFE TORQUE OFF	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 584
Format:	A3							+4LKF006AR	Next: 585

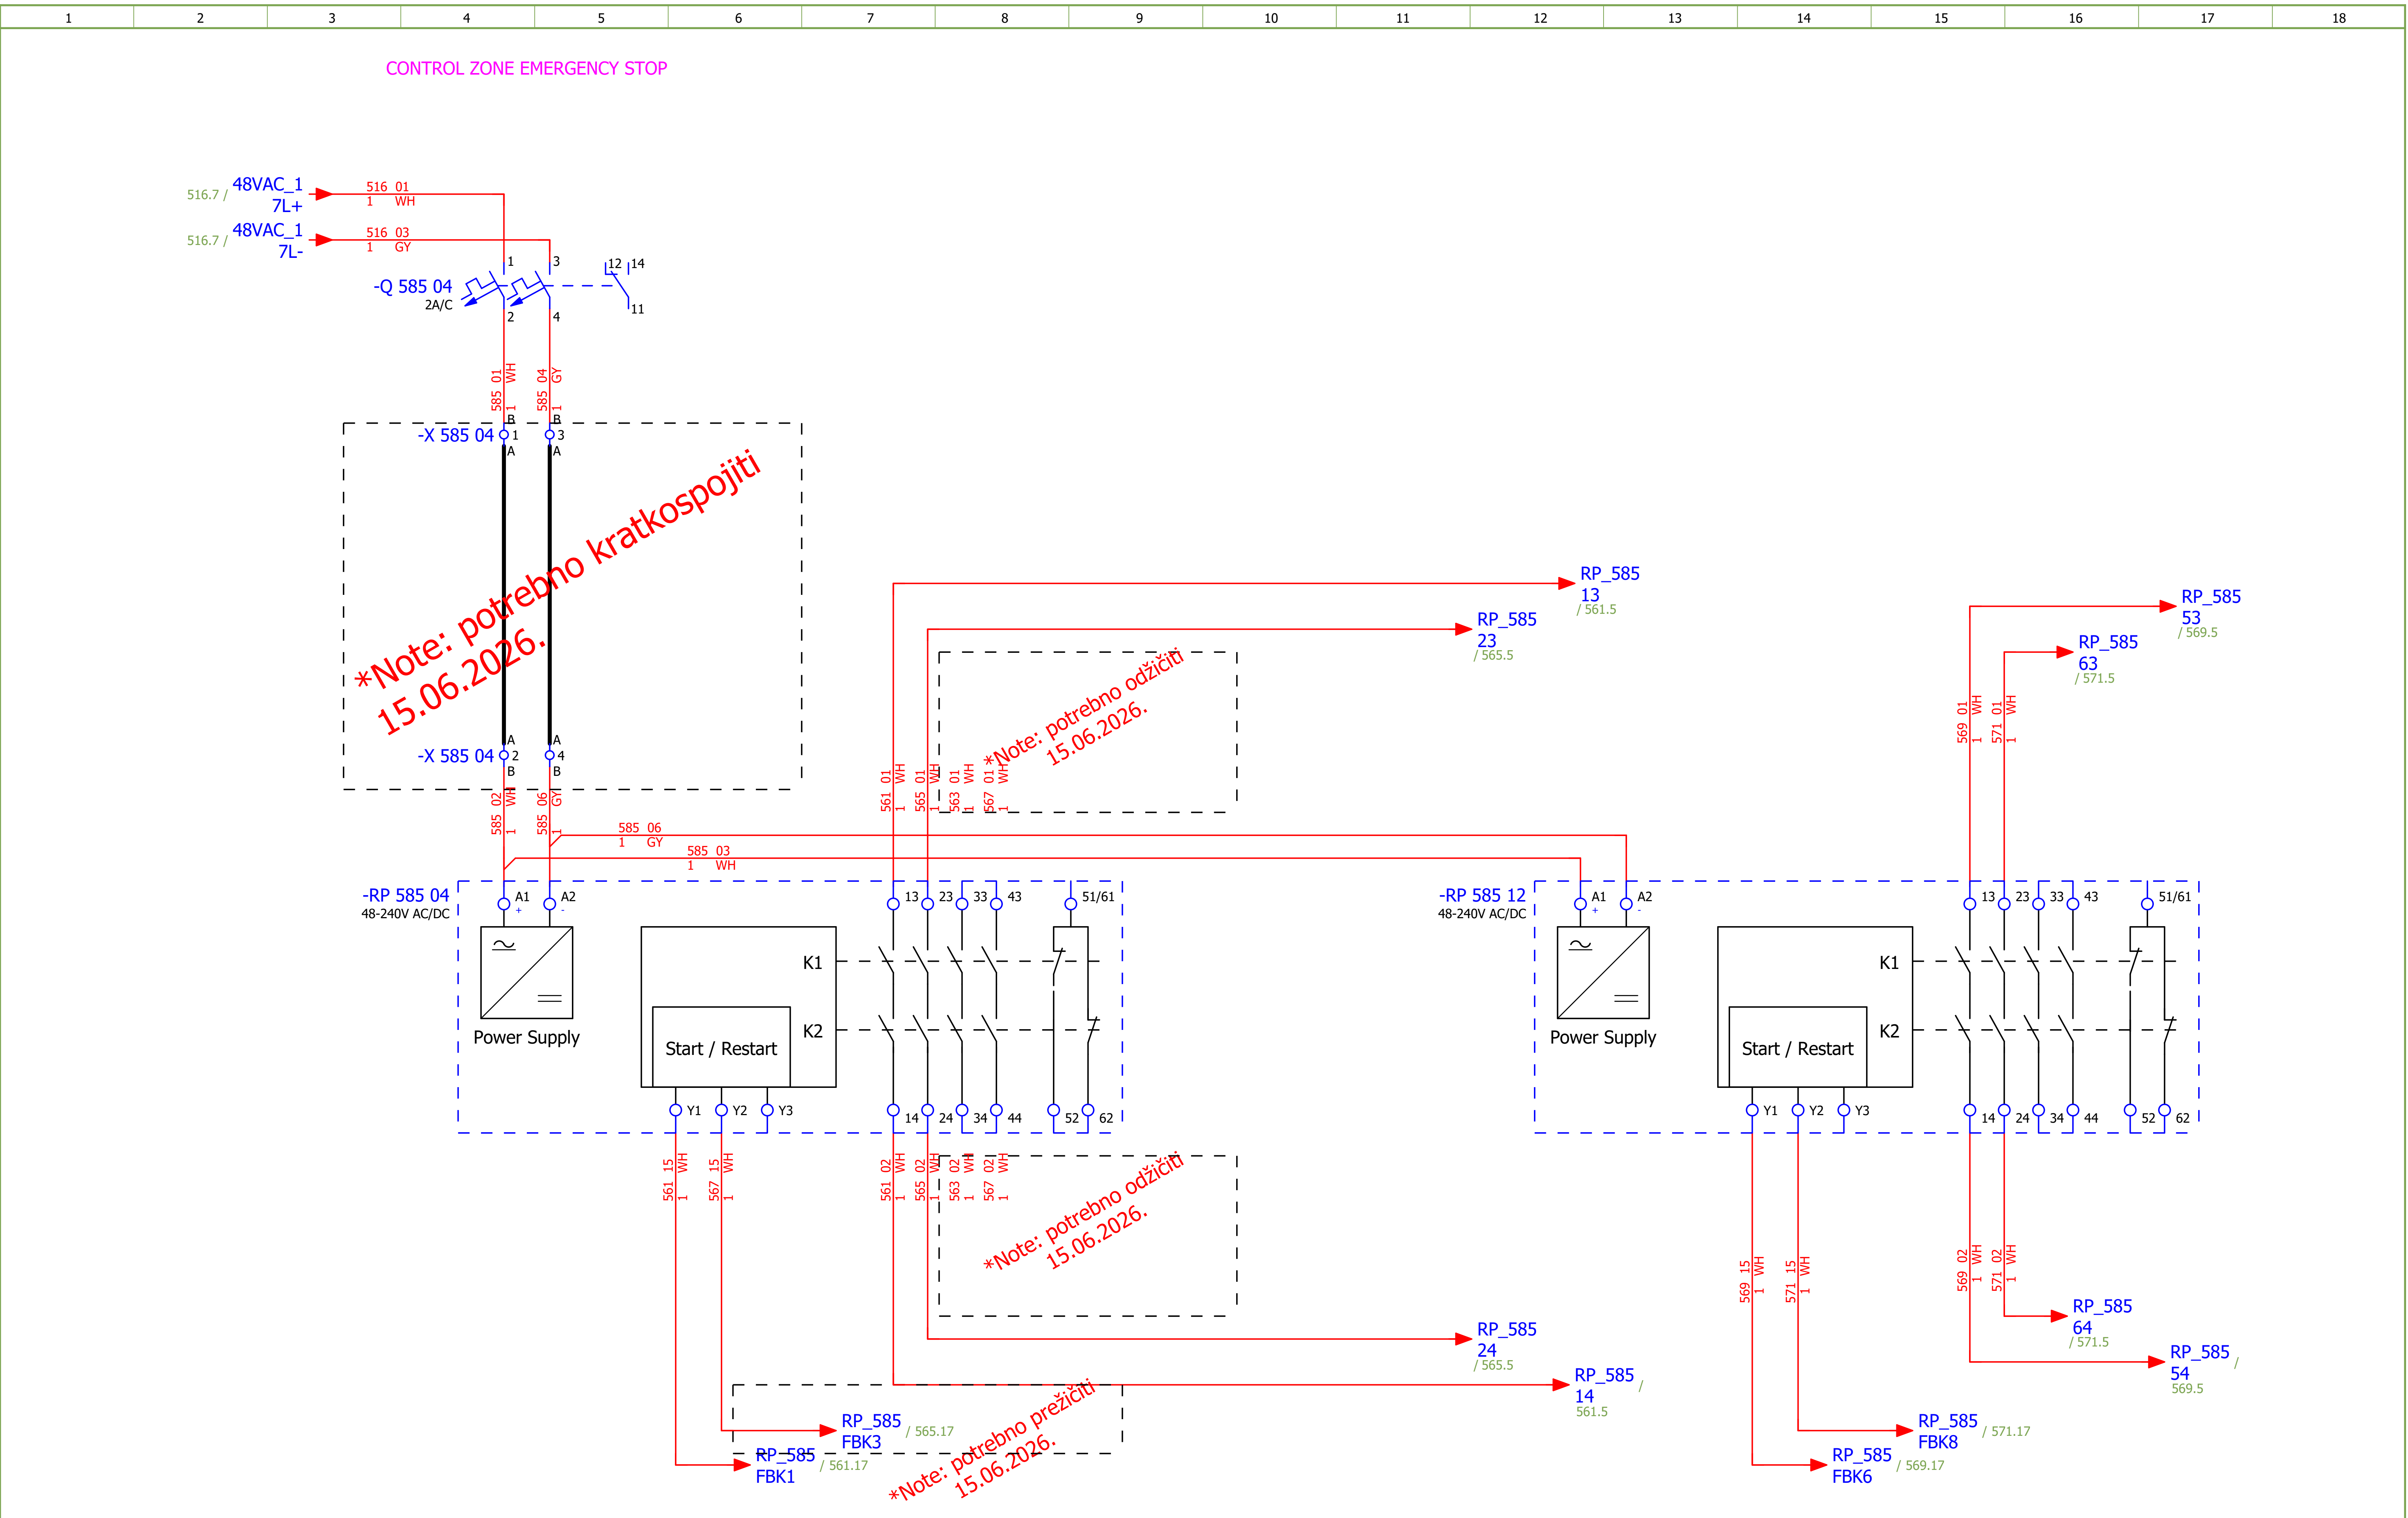

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević								#NA
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: EMERGENCY SHUTDOWN	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 585
Format:	A3							+4LKF006AR	Next: 586

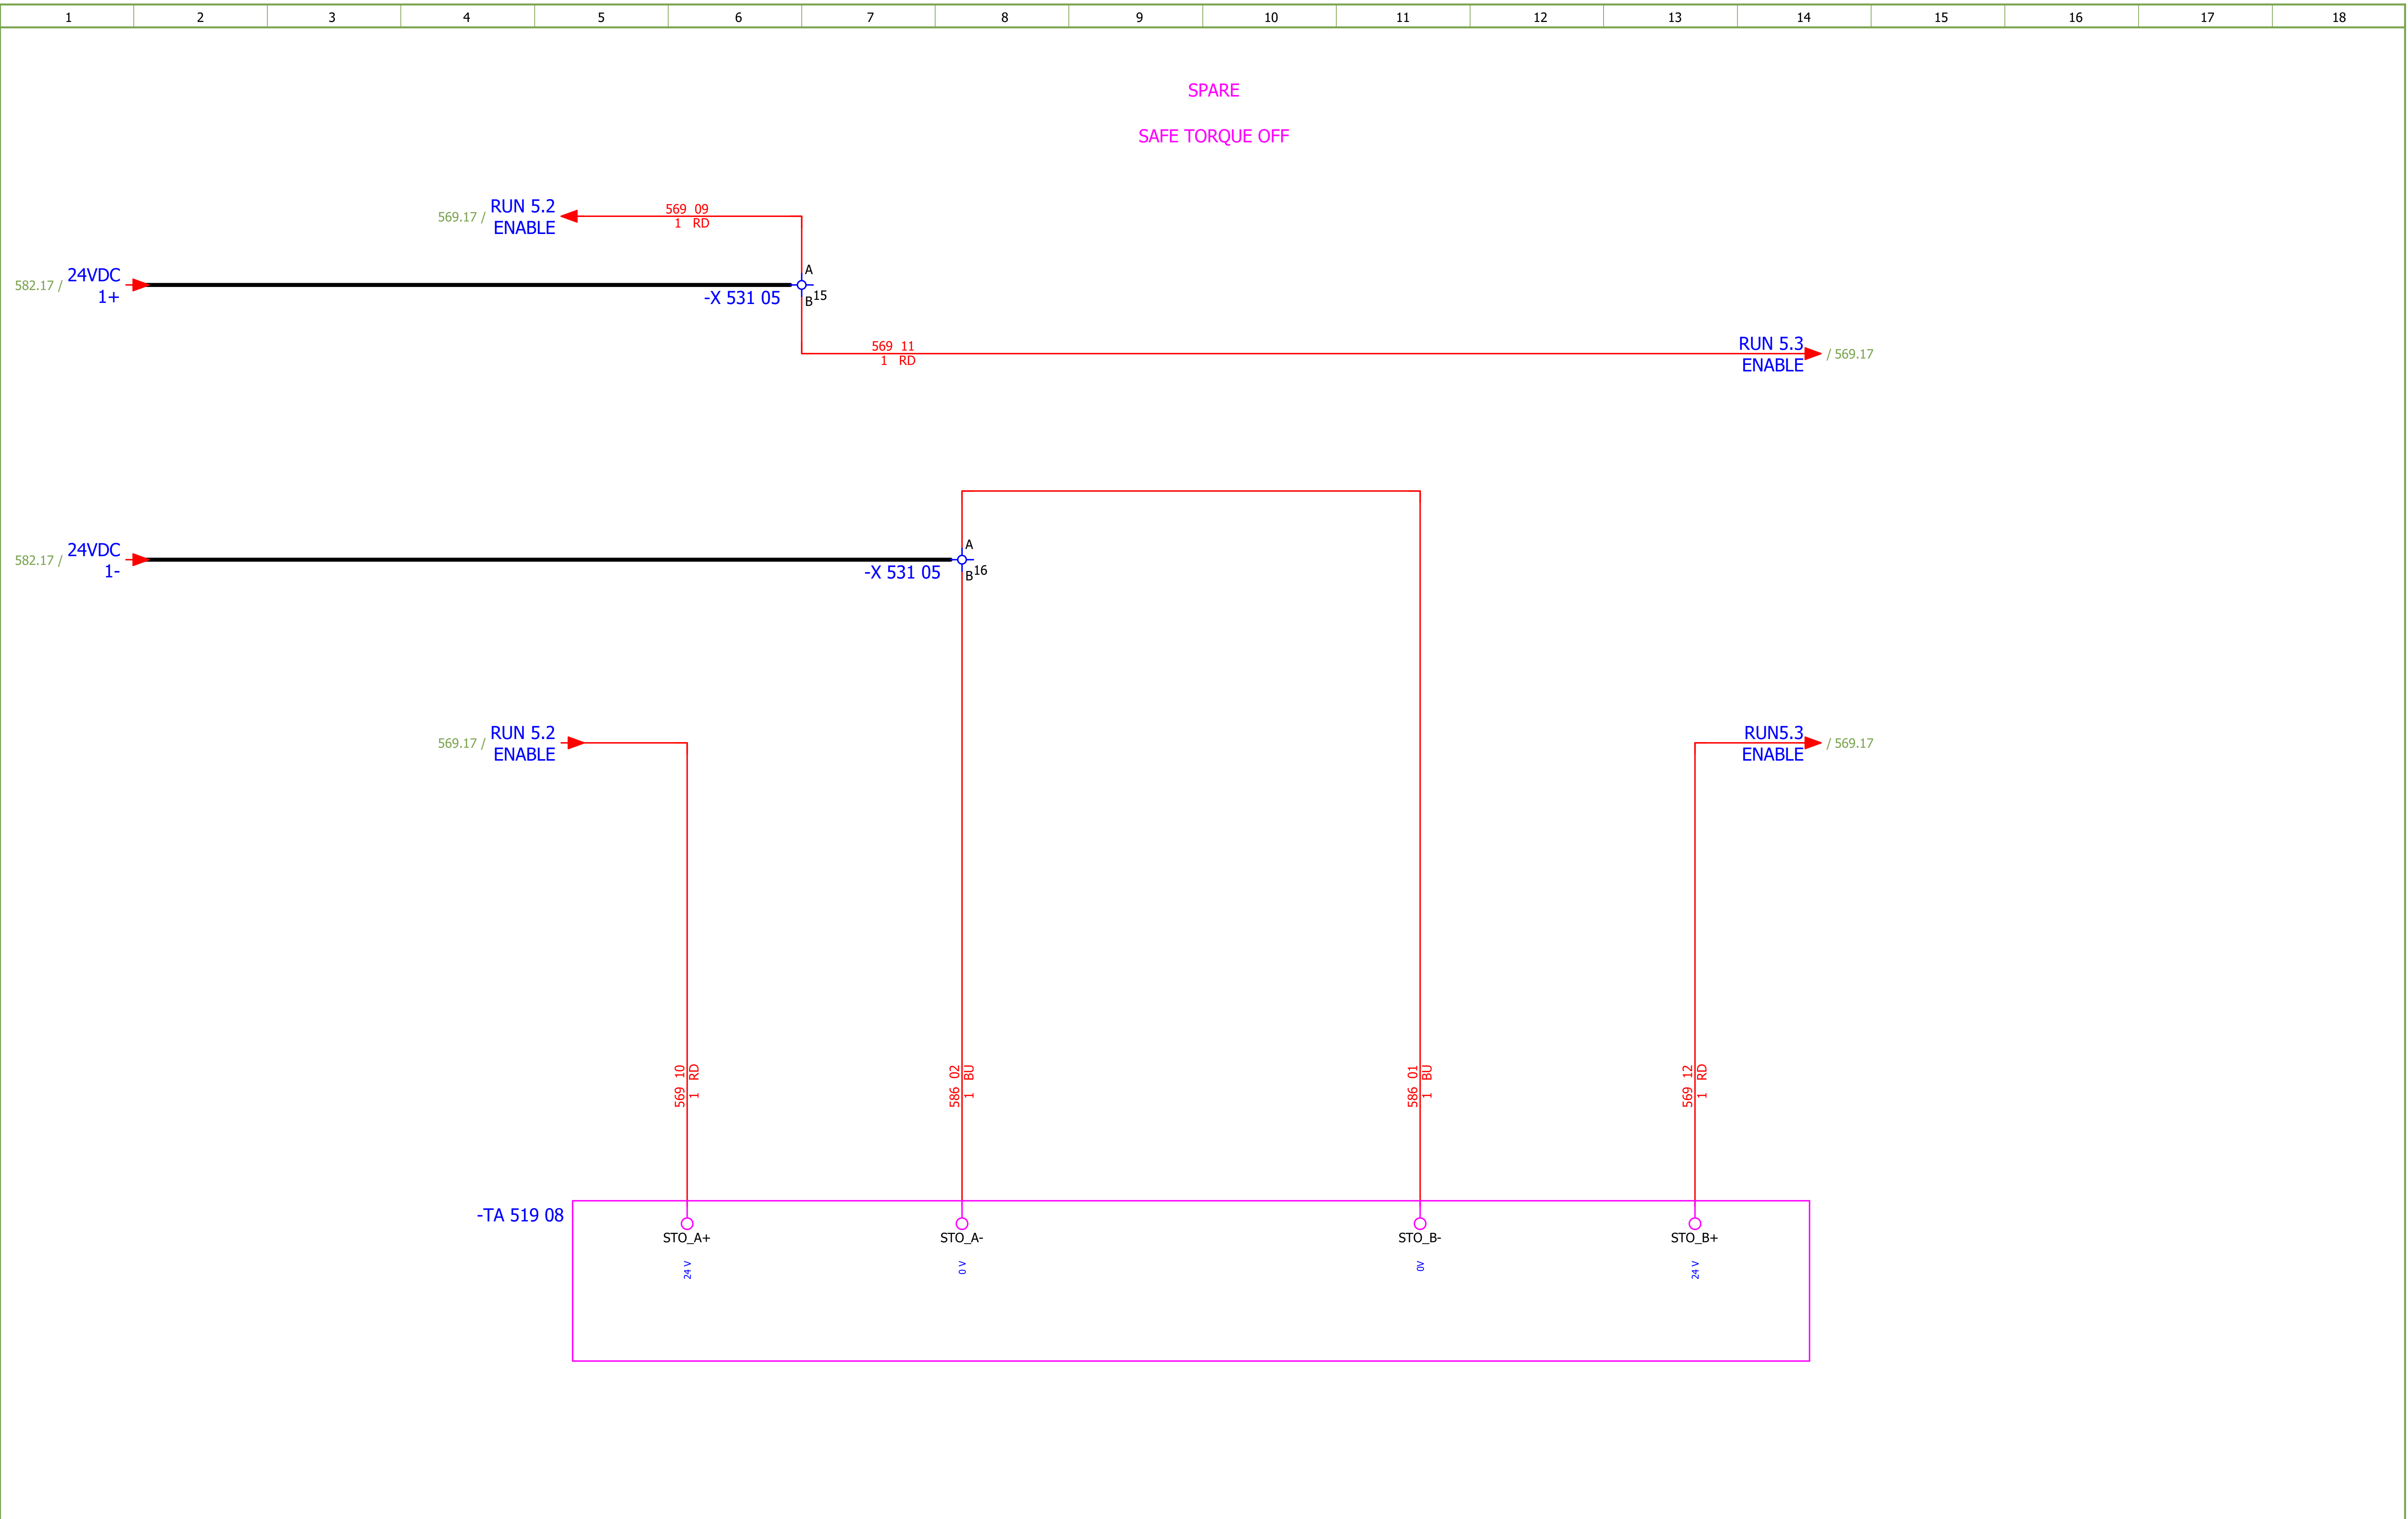

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević								#NA
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE - SAFE TORQUE OFF	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 586
Format:	A3							+4LKF006AR	Next: 587

SPARE

SAFE TORQUE OFF

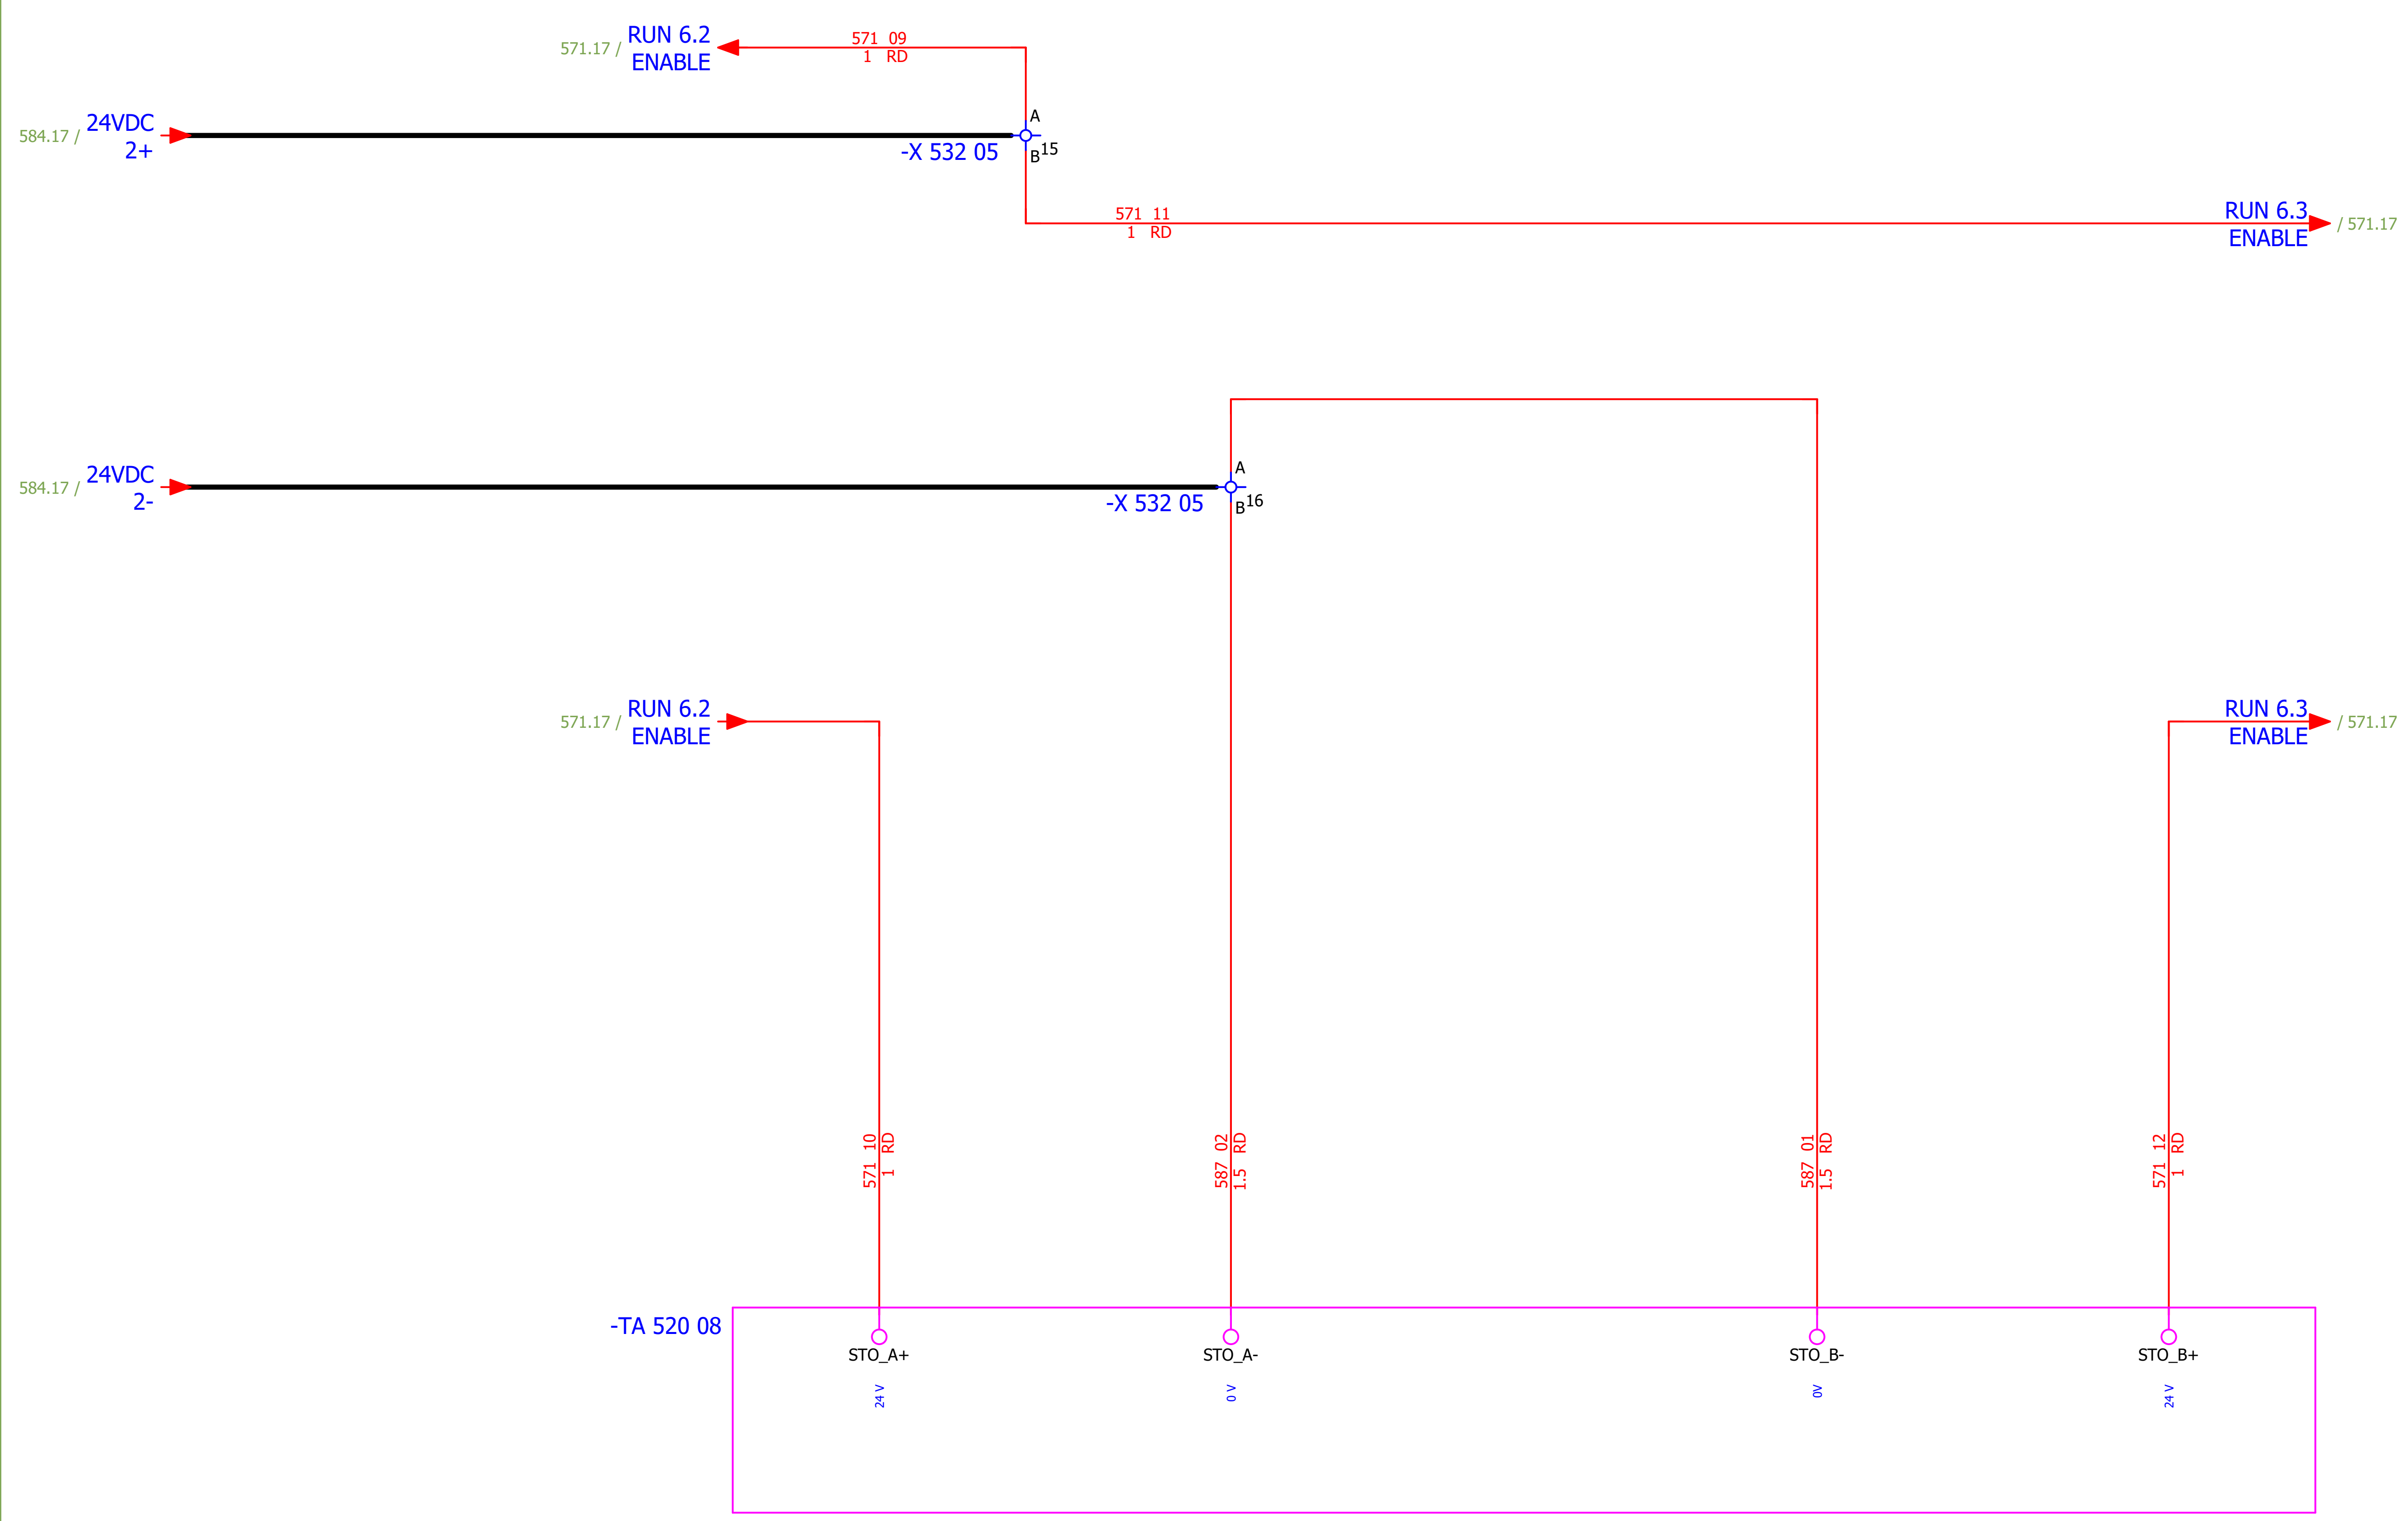

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević								#NA
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE - SAFE TORQUE OFF	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 587
Format:	A3							+4LKF006AR	Next: 591

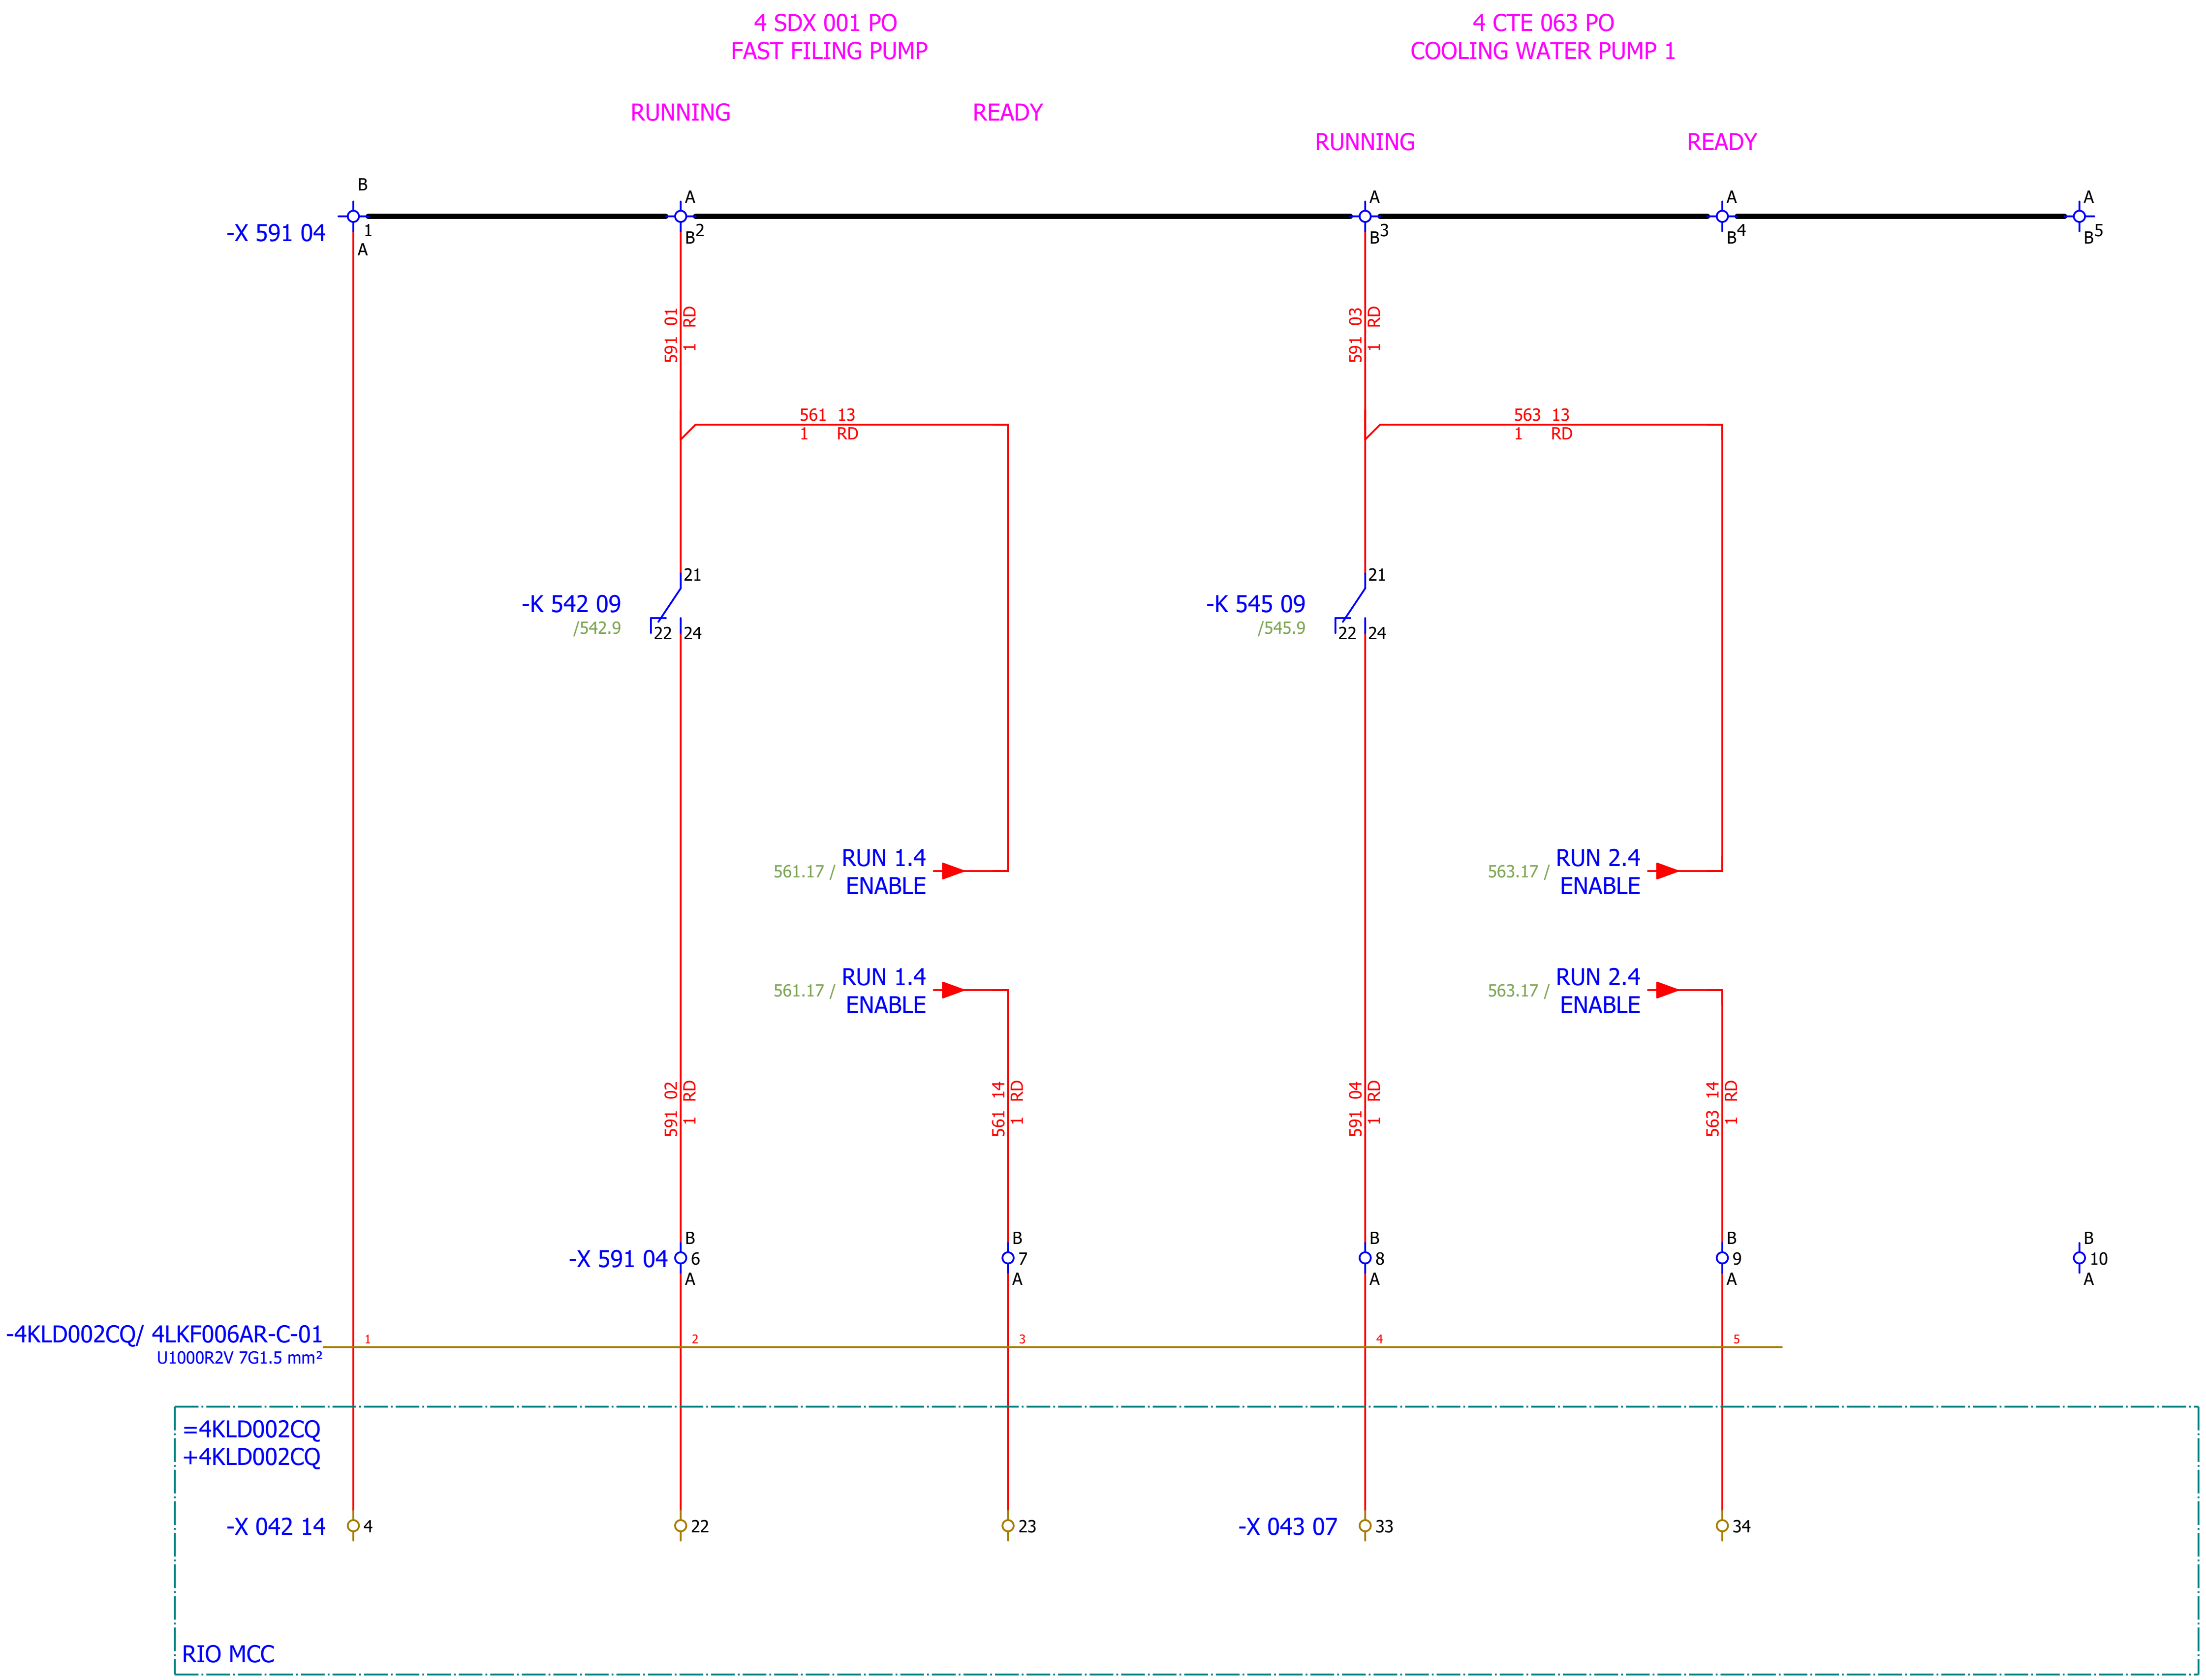

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F	#QA
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: VFD GROUP 1 - SIGNALIZATION TO PLC	Drawing designation: BRC-4-ATEP0-1870-F	=4LKF001AR	Sheet: 591
Format:	A3						+4LKF006AR	Next: 592

VFD GROUP 1

LAMP TEST

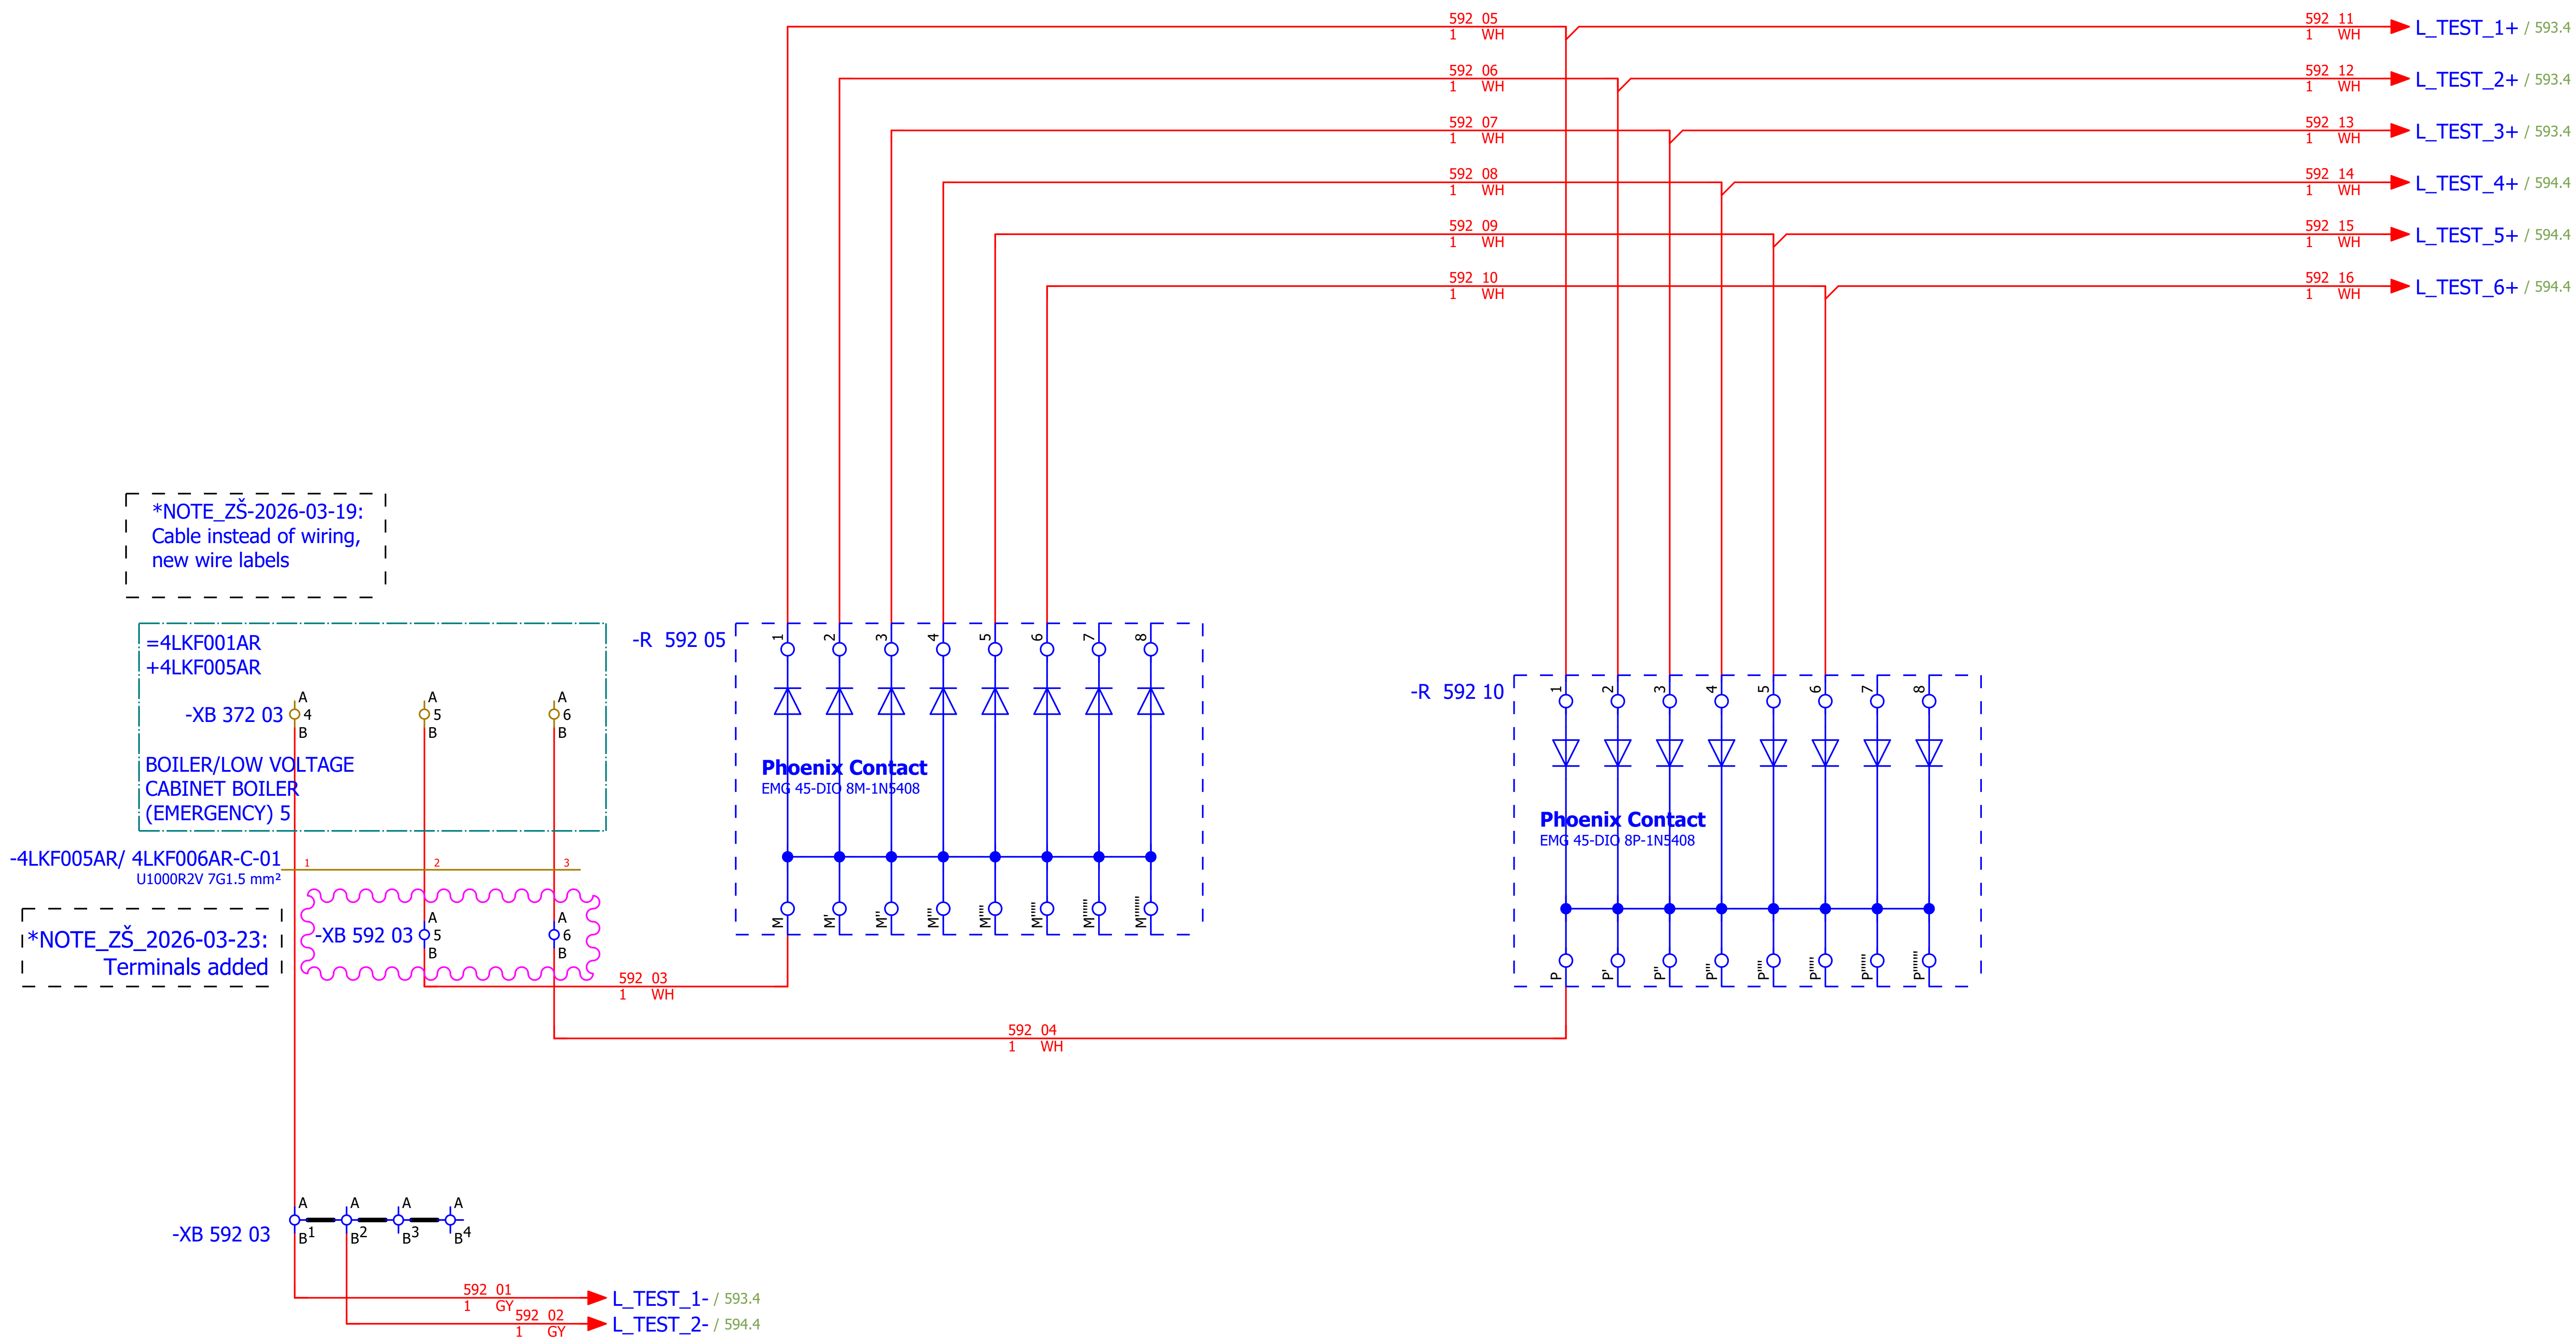

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F	#QA
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: VFD GROUP 1 - LAMP TEST	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 592
Format:	A3								+4LKF006AR	Next: 593

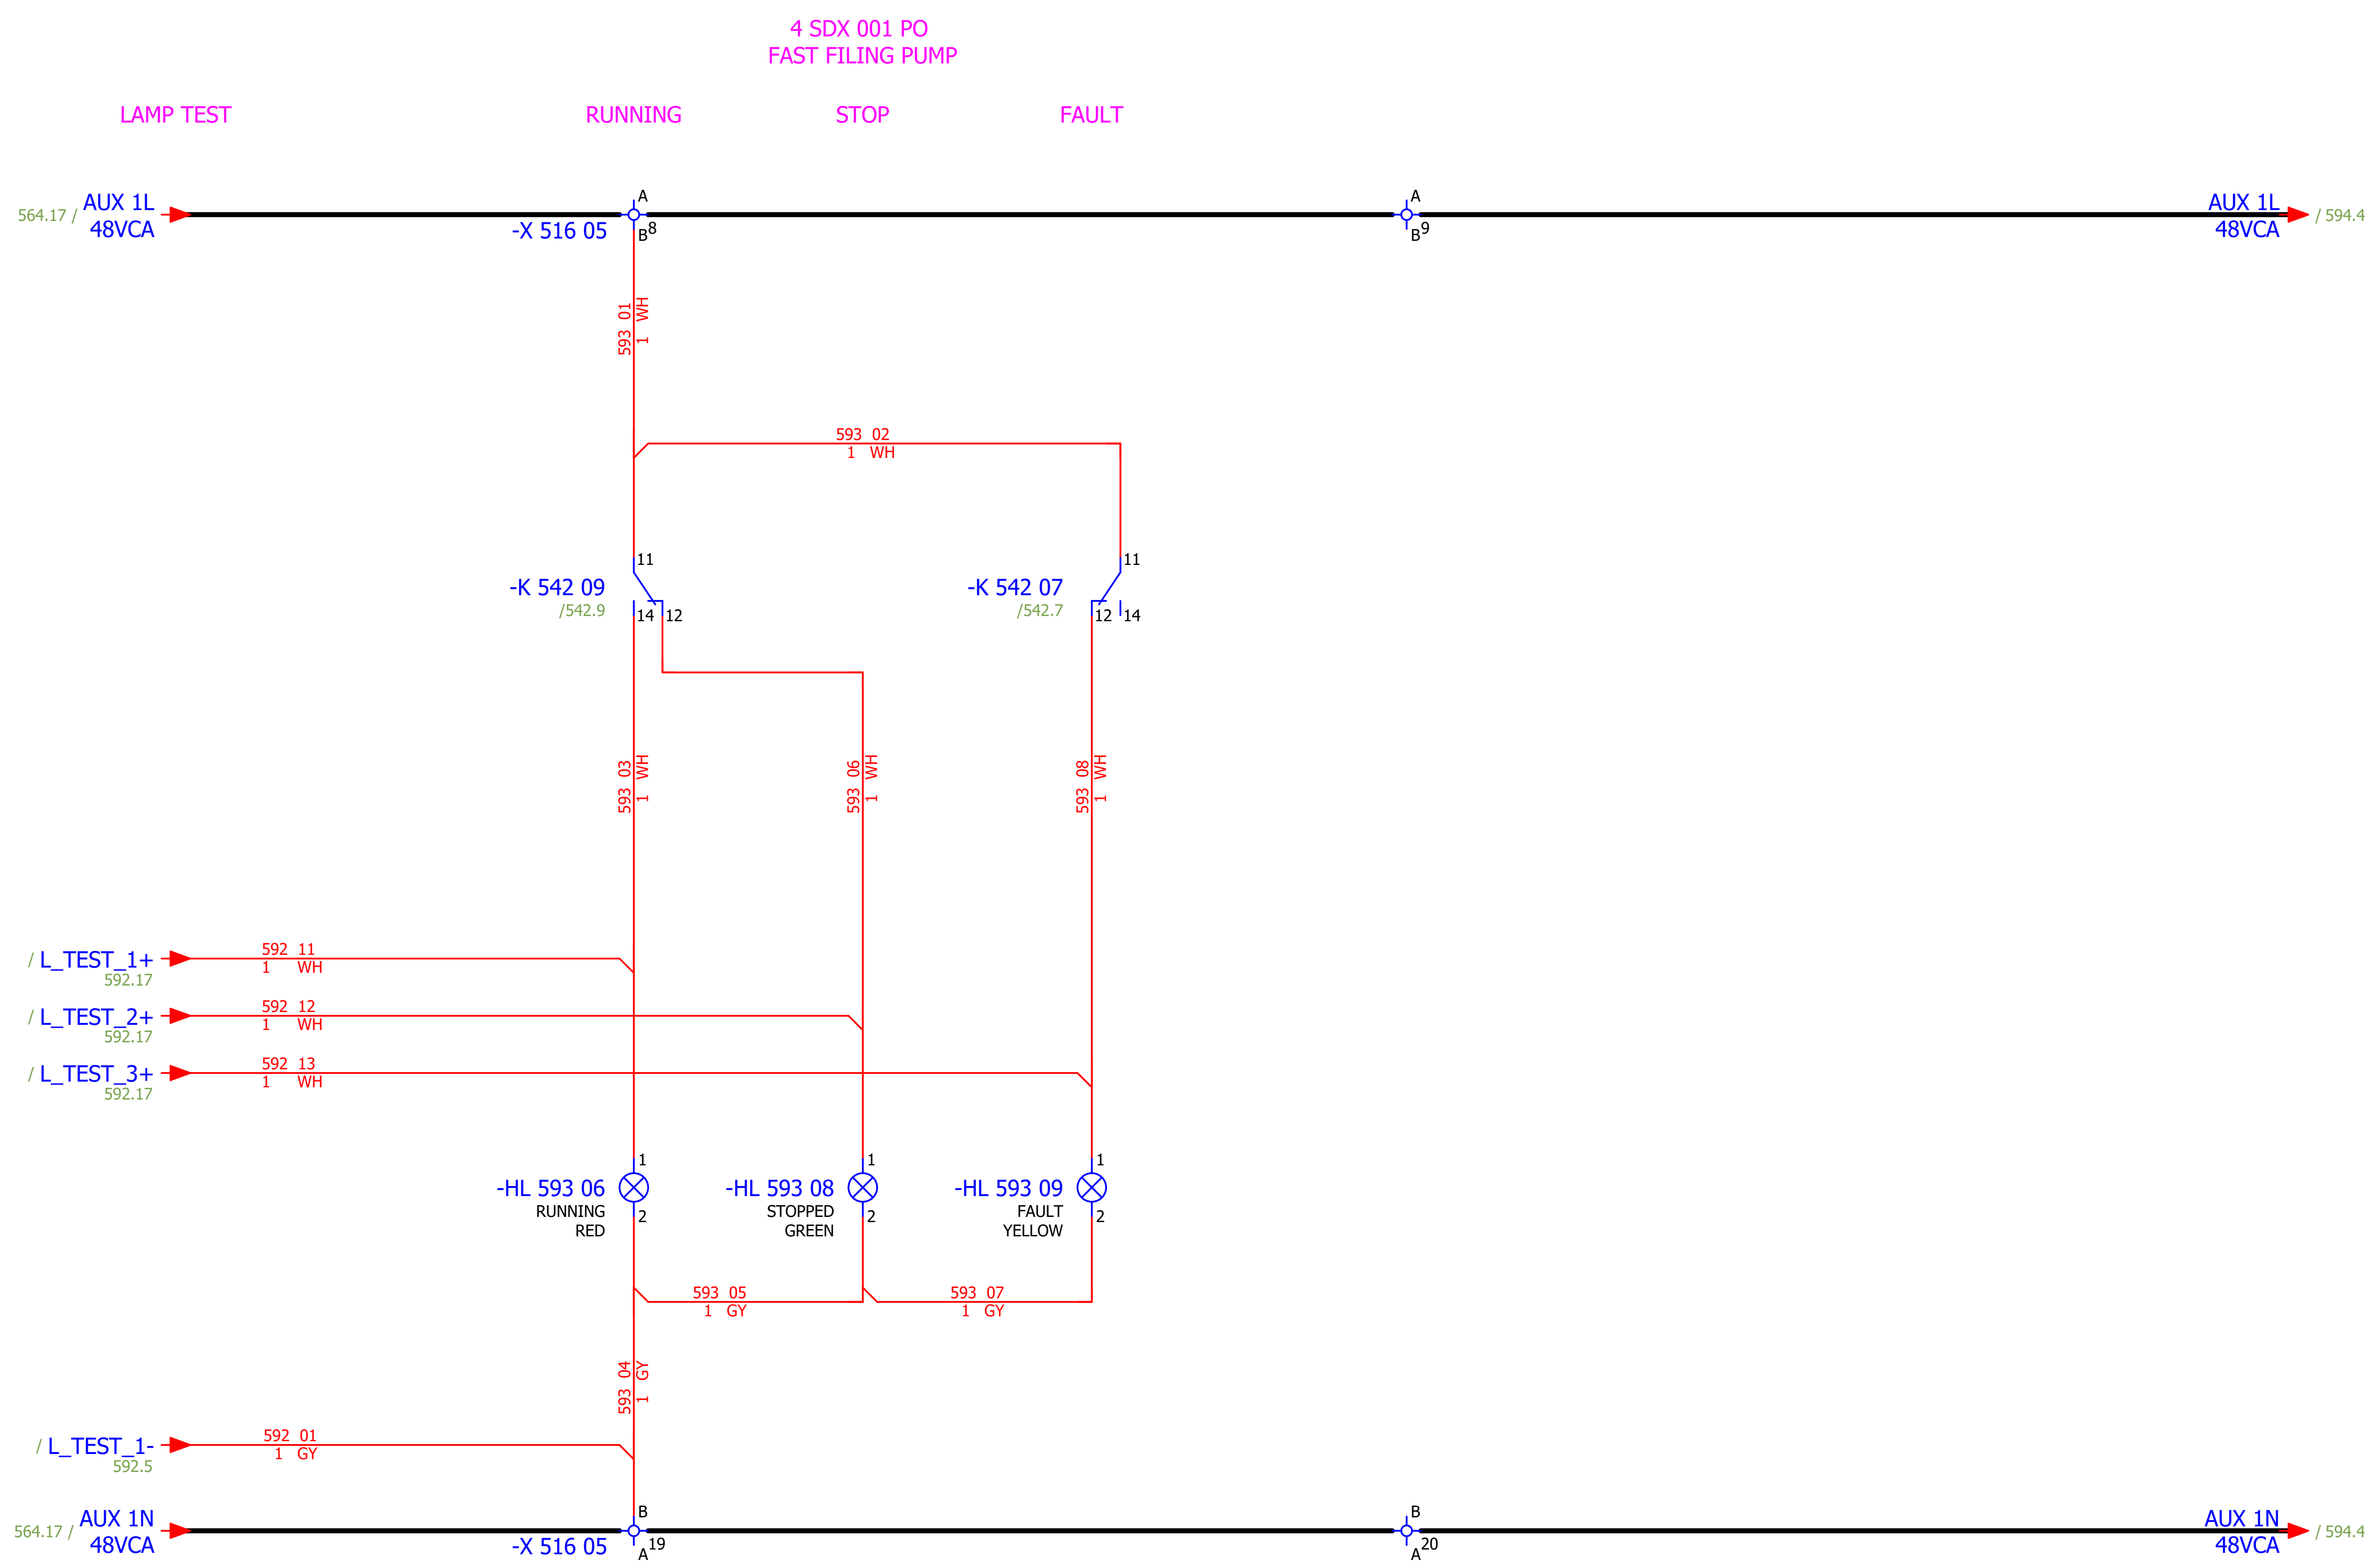

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević								#QA
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: FAST FILING PUMP - SIGNALIZATION LAMPS	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 593
Format:	A3							+4LKF006AR	Next: 594

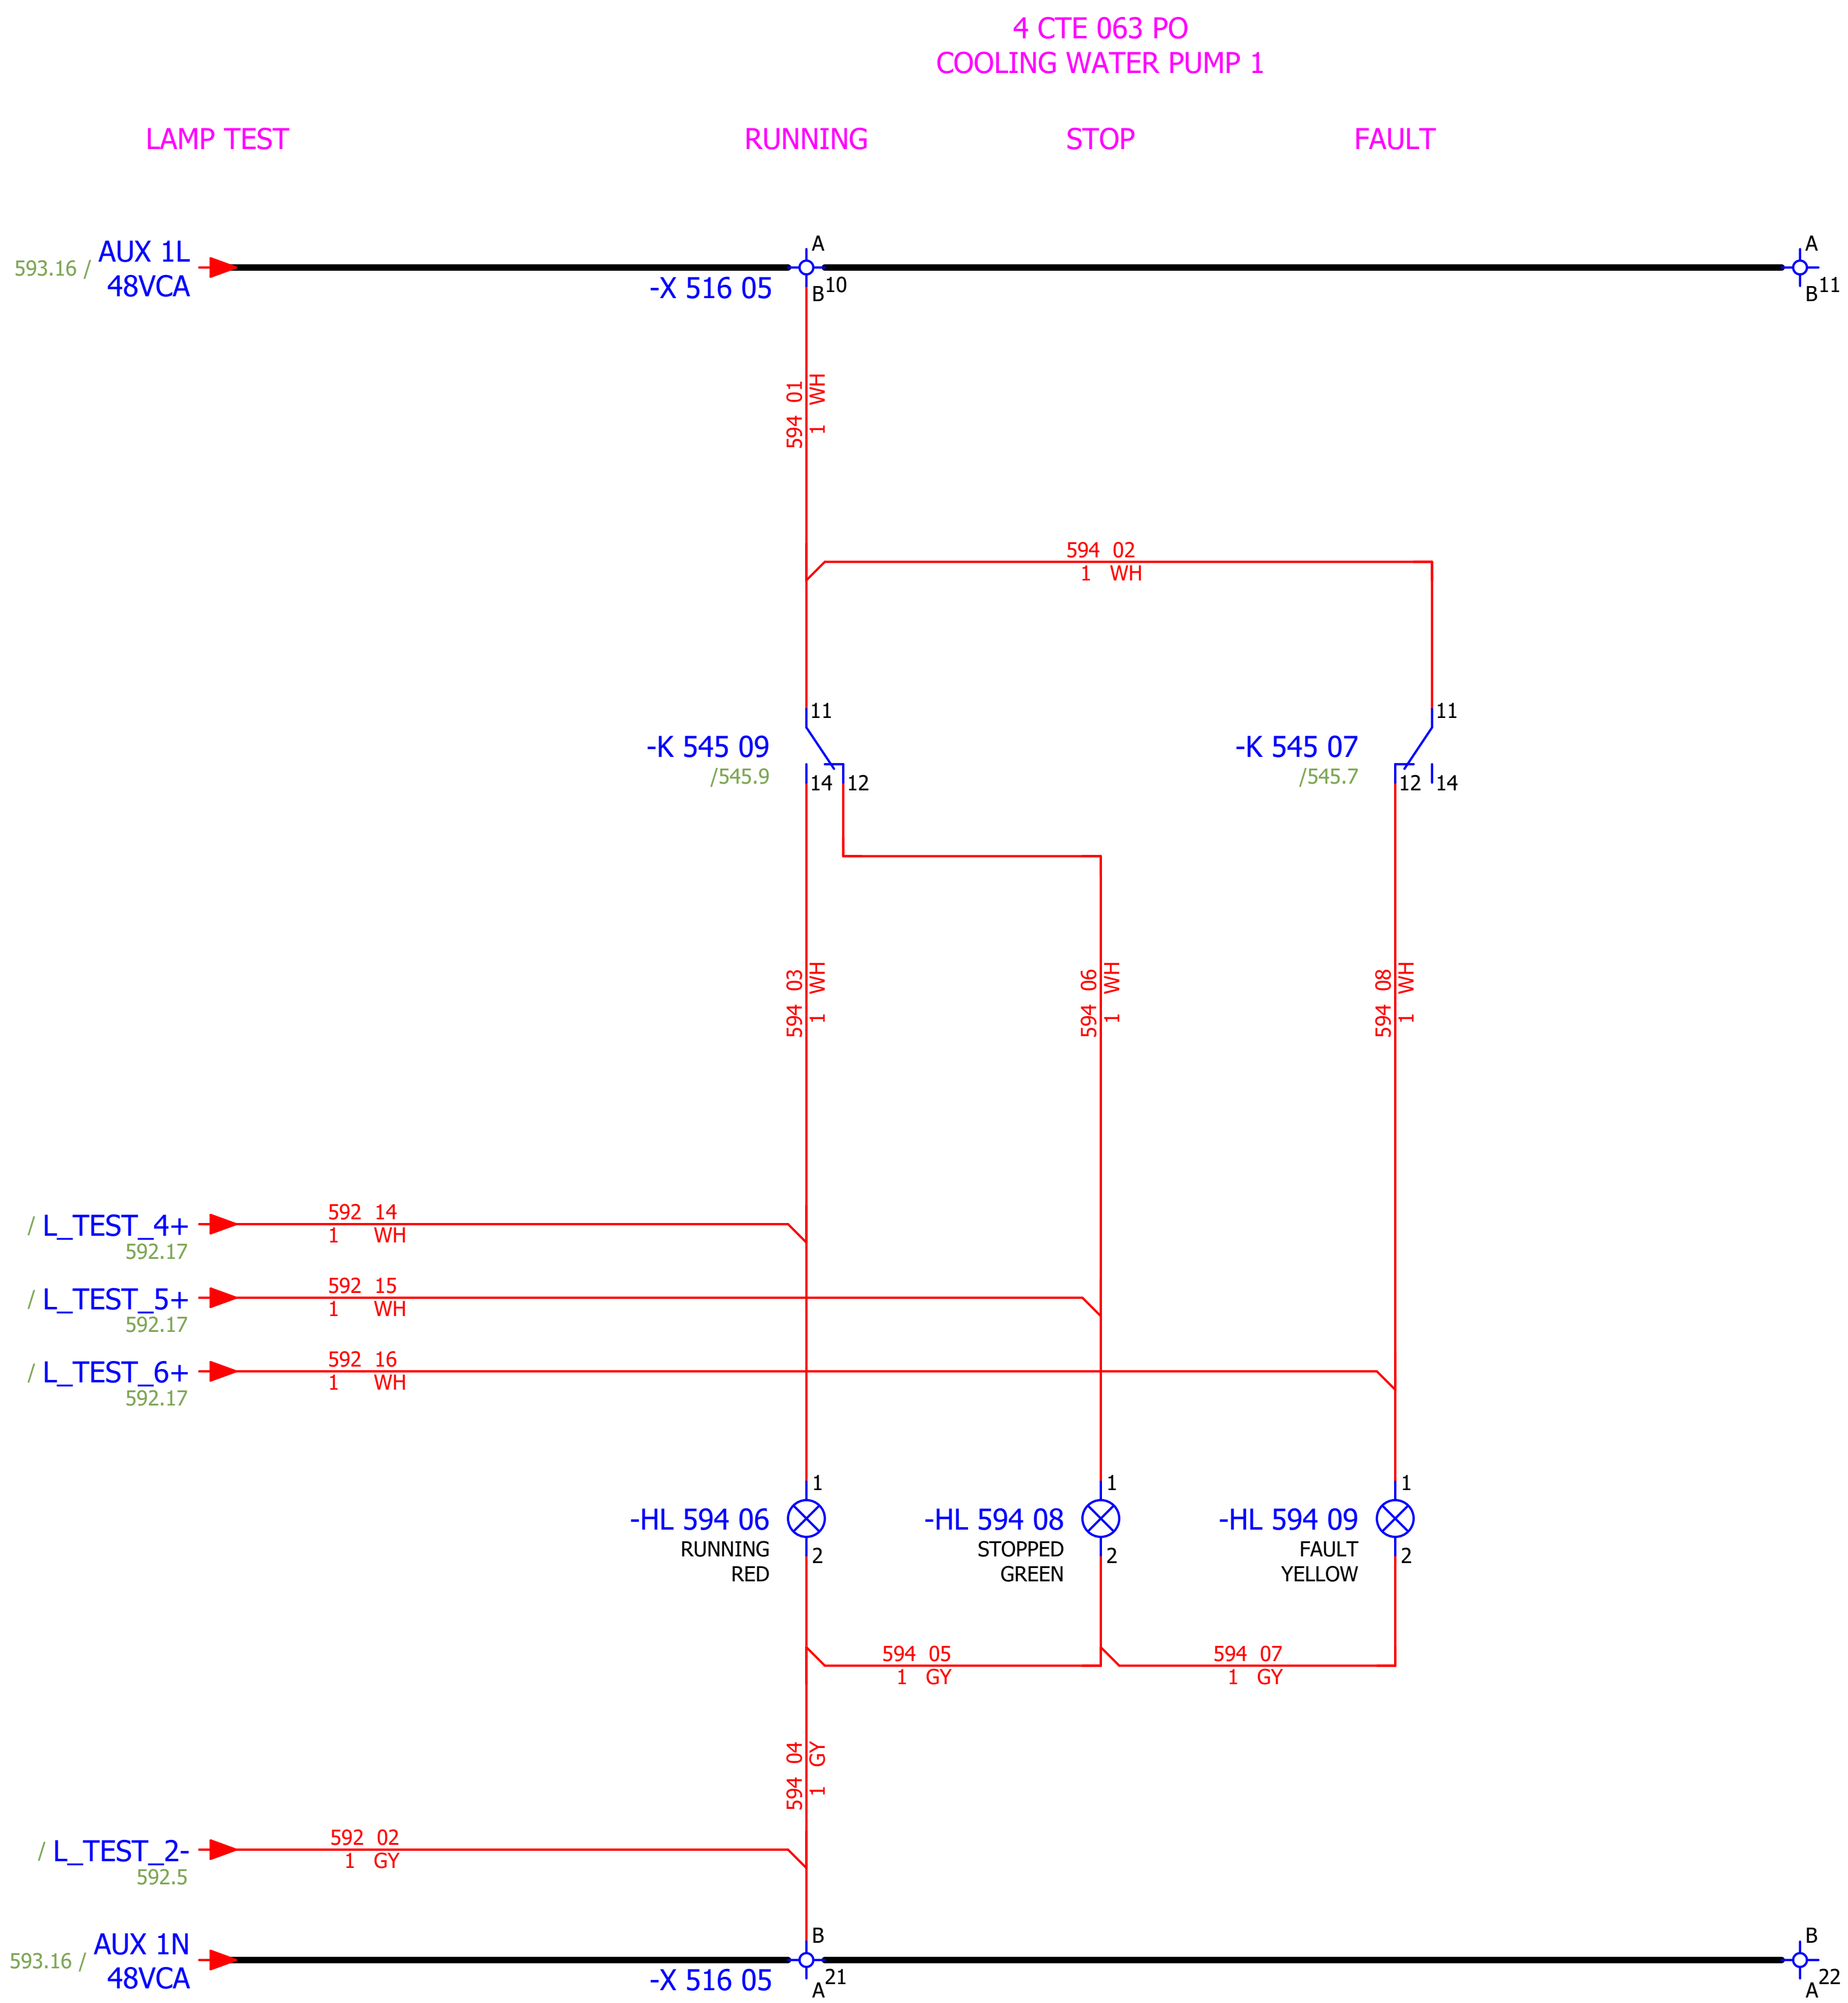

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević									#QA
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	COOLING WATER PUMP 1 - SIGNALIZATION LAMPS	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 594
Format:	A3								+4LKF006AR	Next: 595

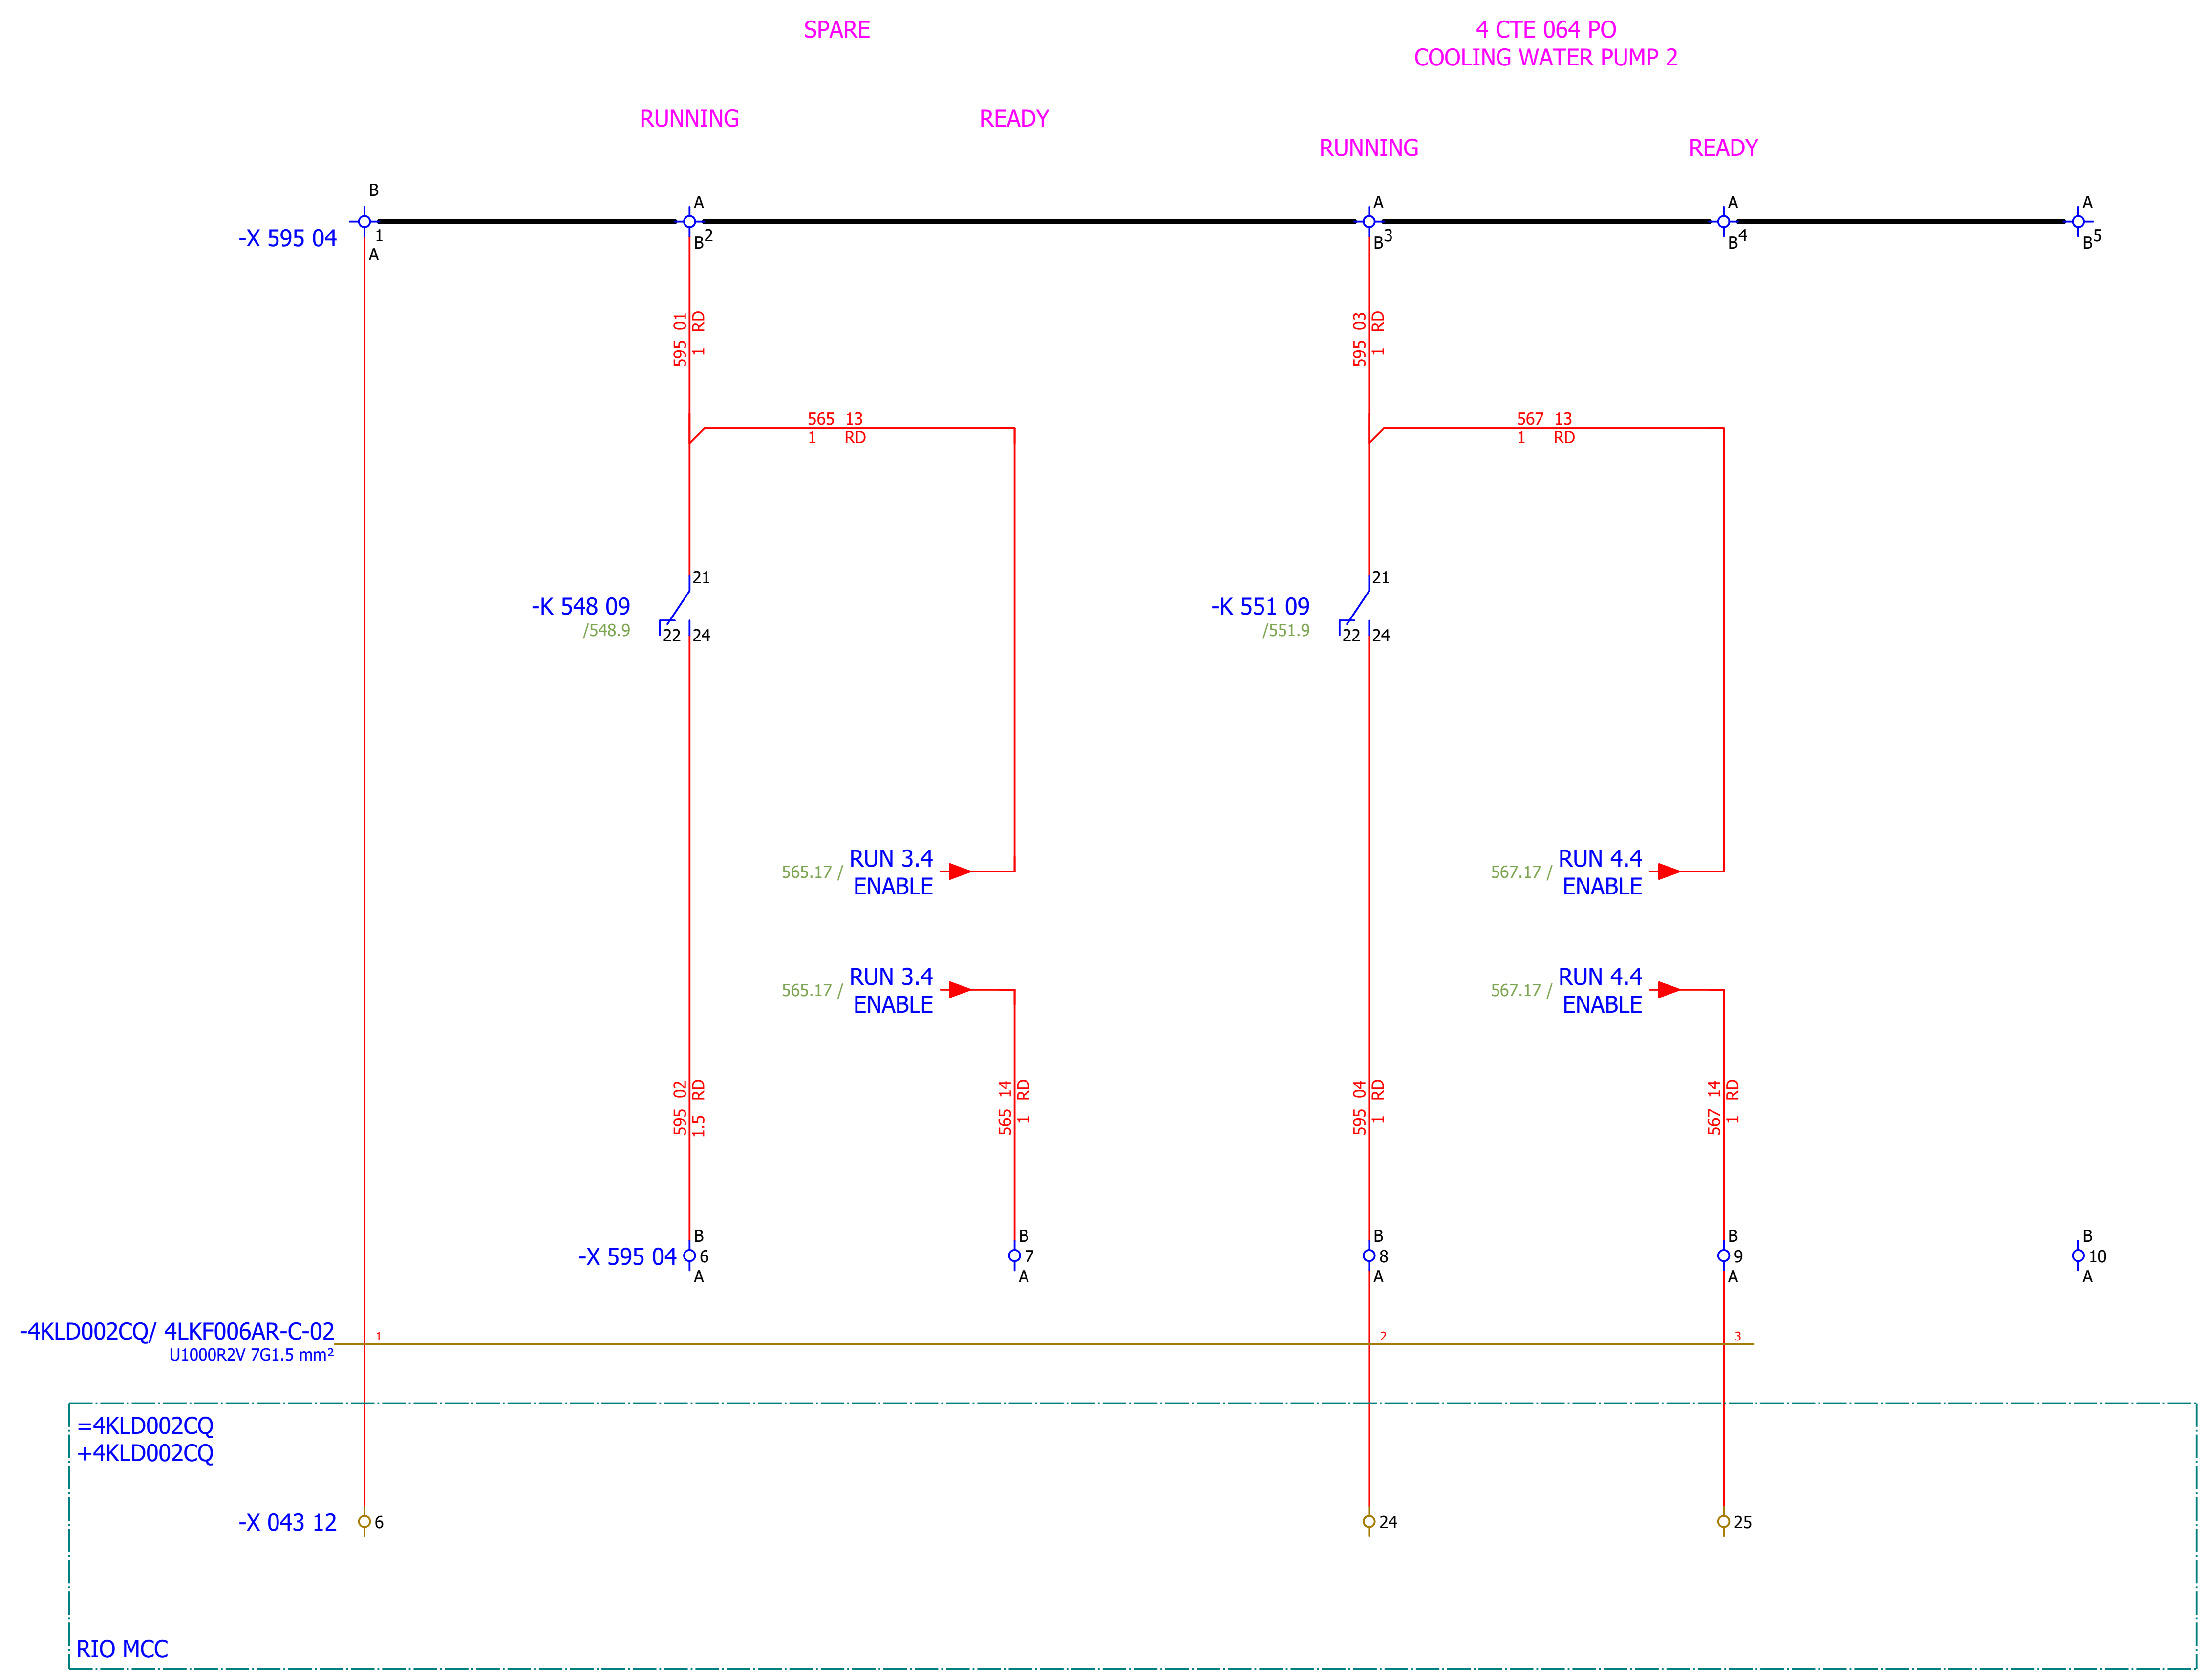

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević								#QA
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: VFD GROUP 2 - SIGNALIZATION TO PLC	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 595
Format:	A3							+4LKF006AR	Next: 596

VFD GROUP 2

LAMP TEST

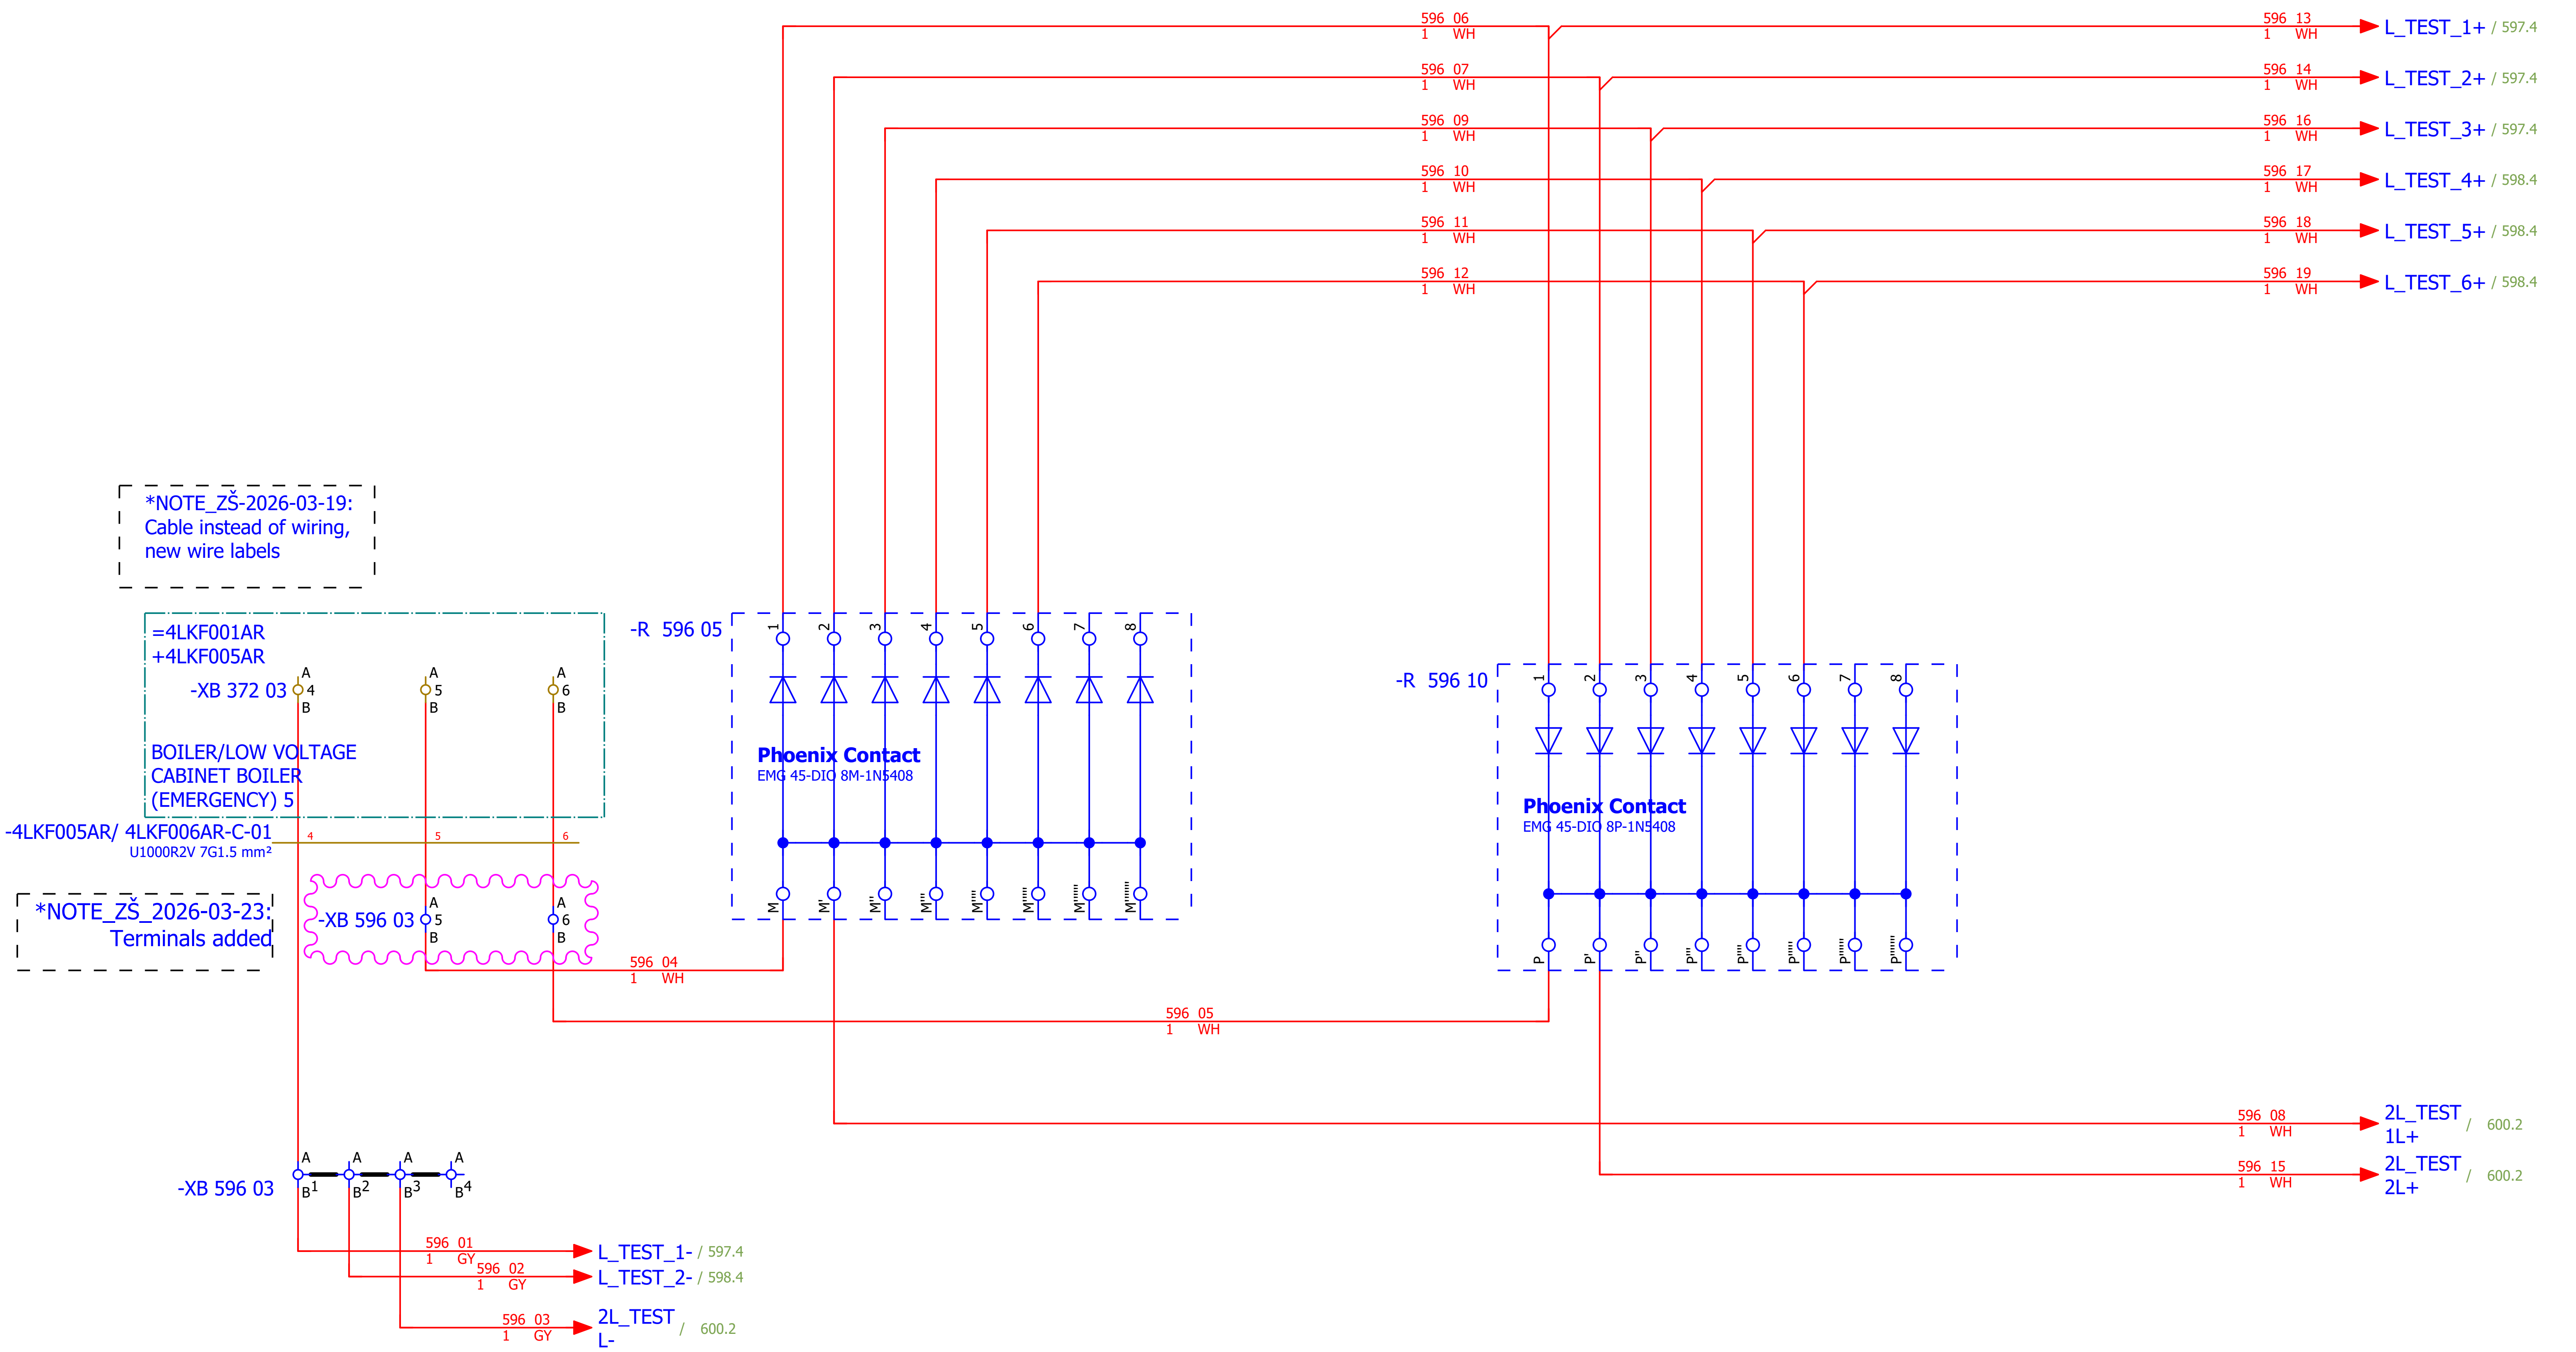

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F	#QA
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: VFD GROUP 2 - LAMP TEST	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 596
Format:	A3								+4LKF006AR	Next: 597

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

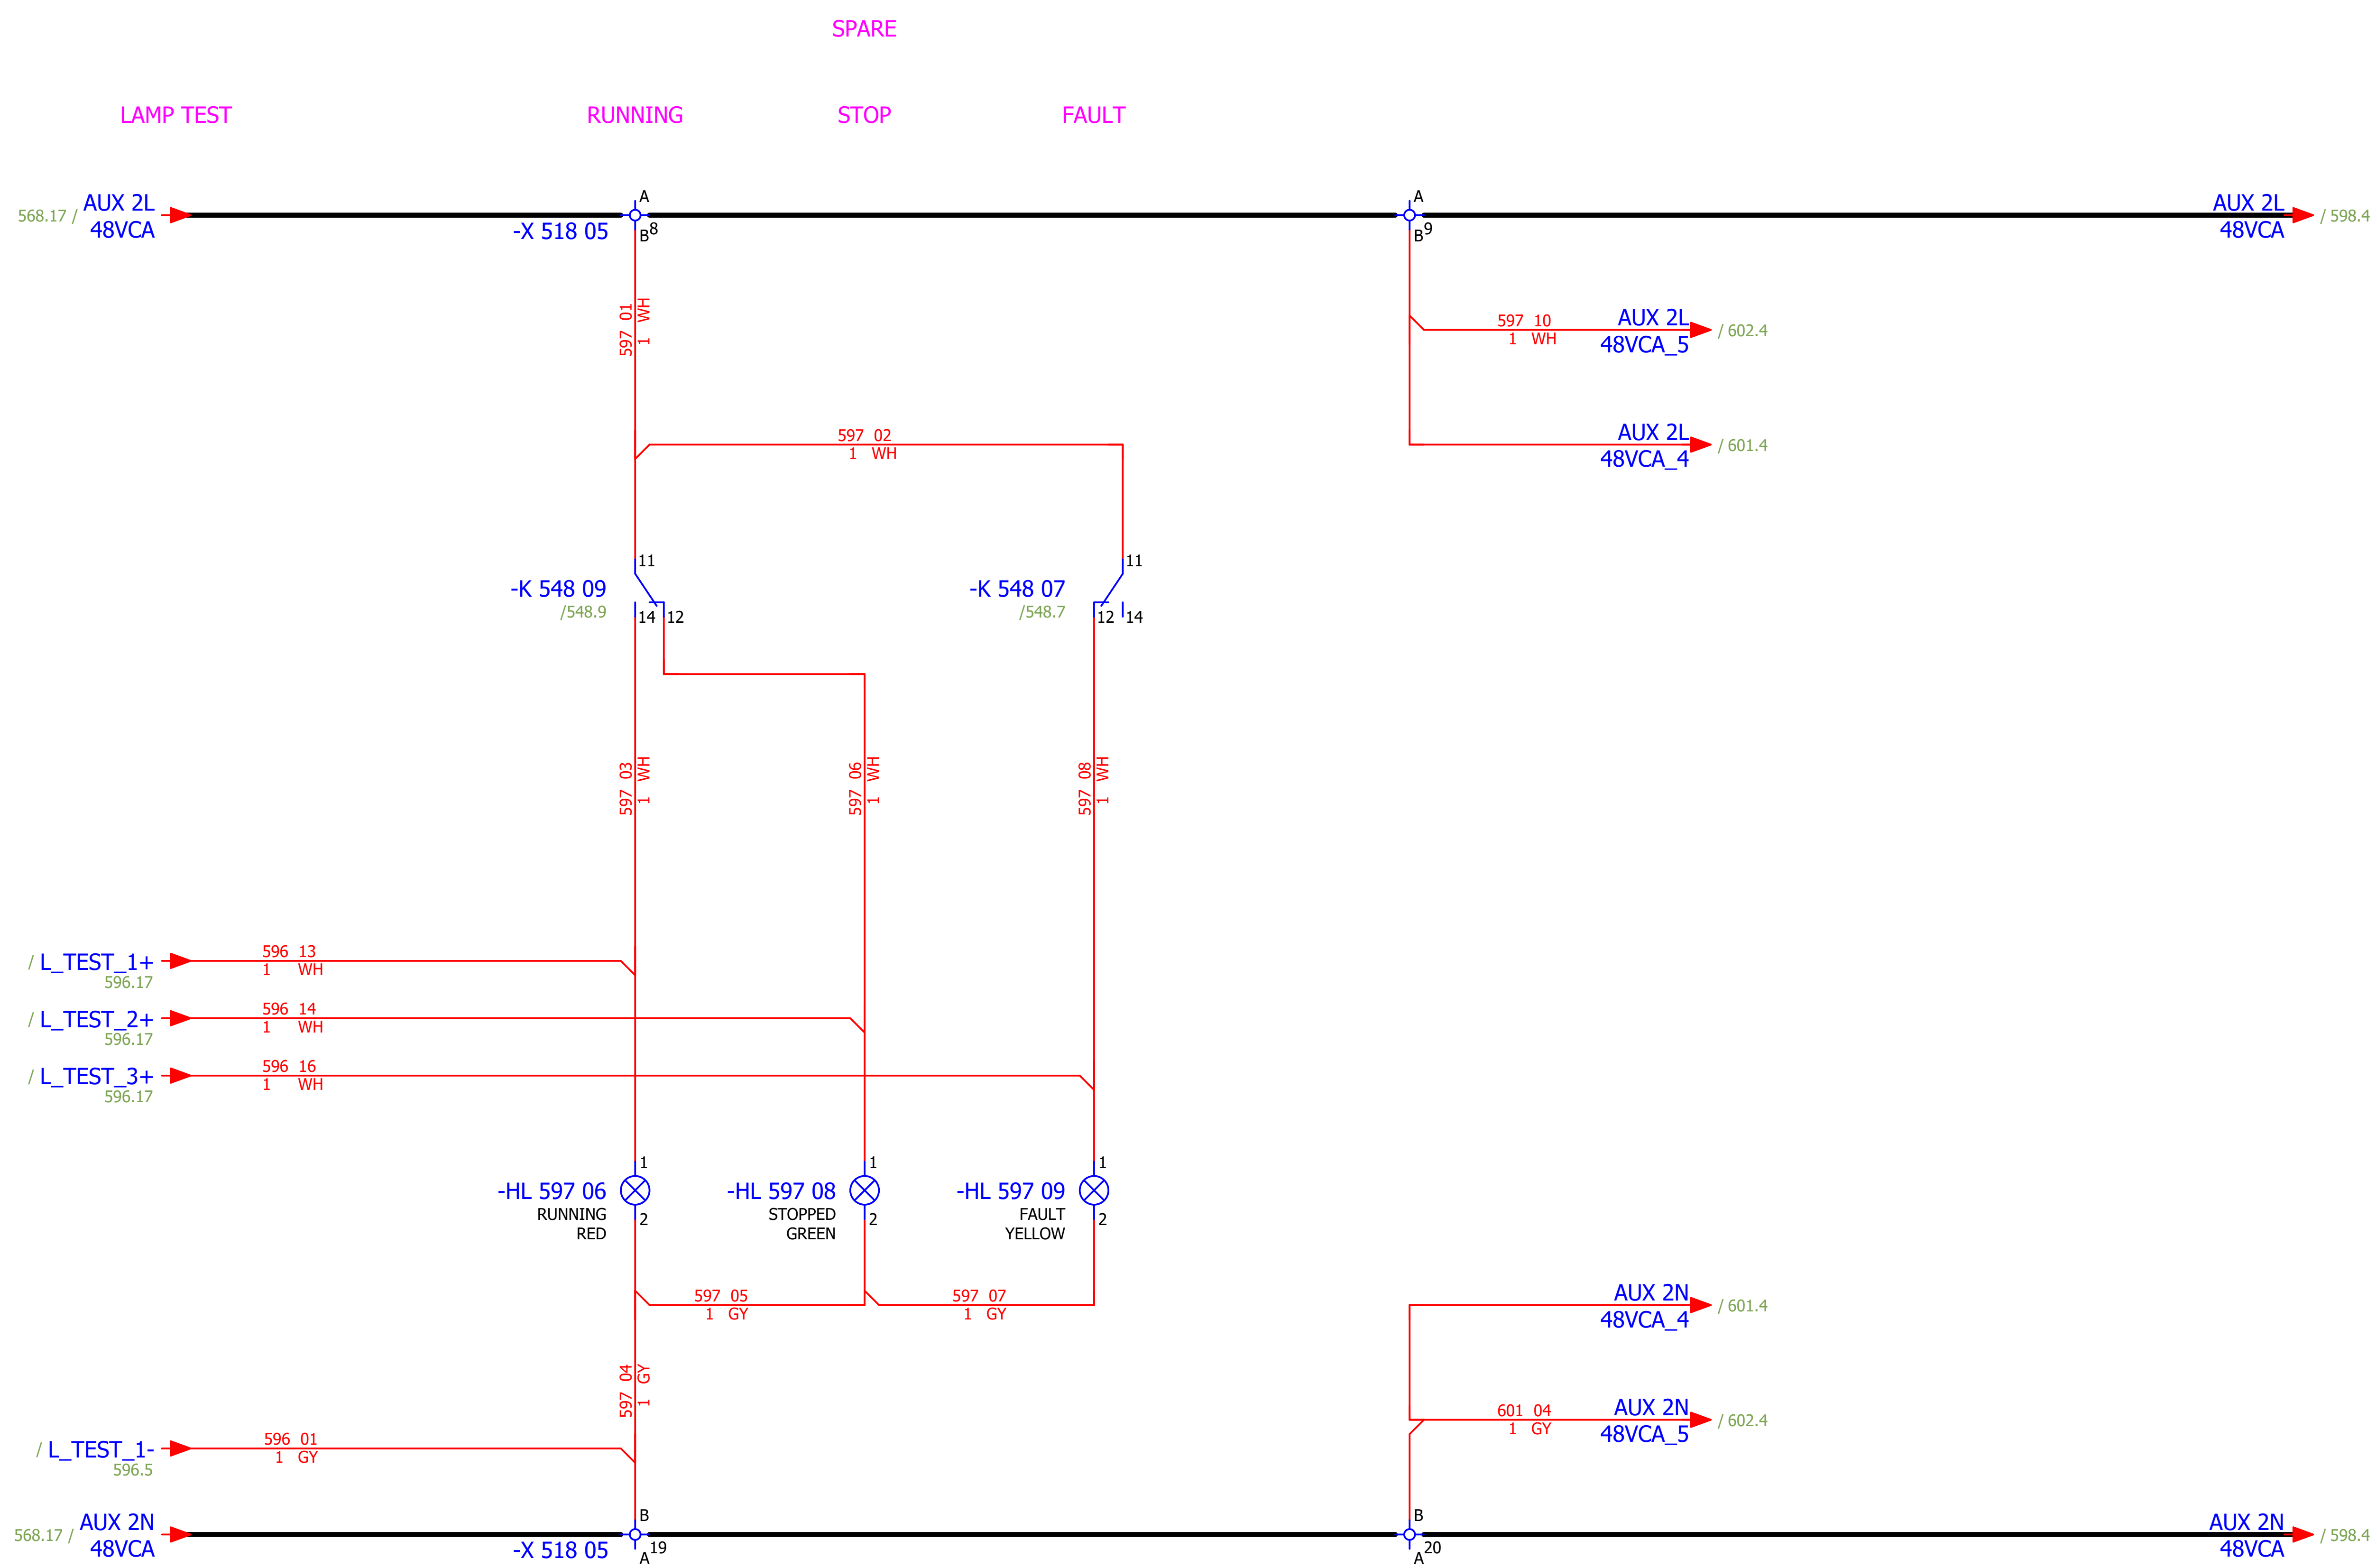

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević								#QA
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE - SIGNALIZATION LAMPS	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 597
Format:	A3							+4LKF006AR	Next: 598

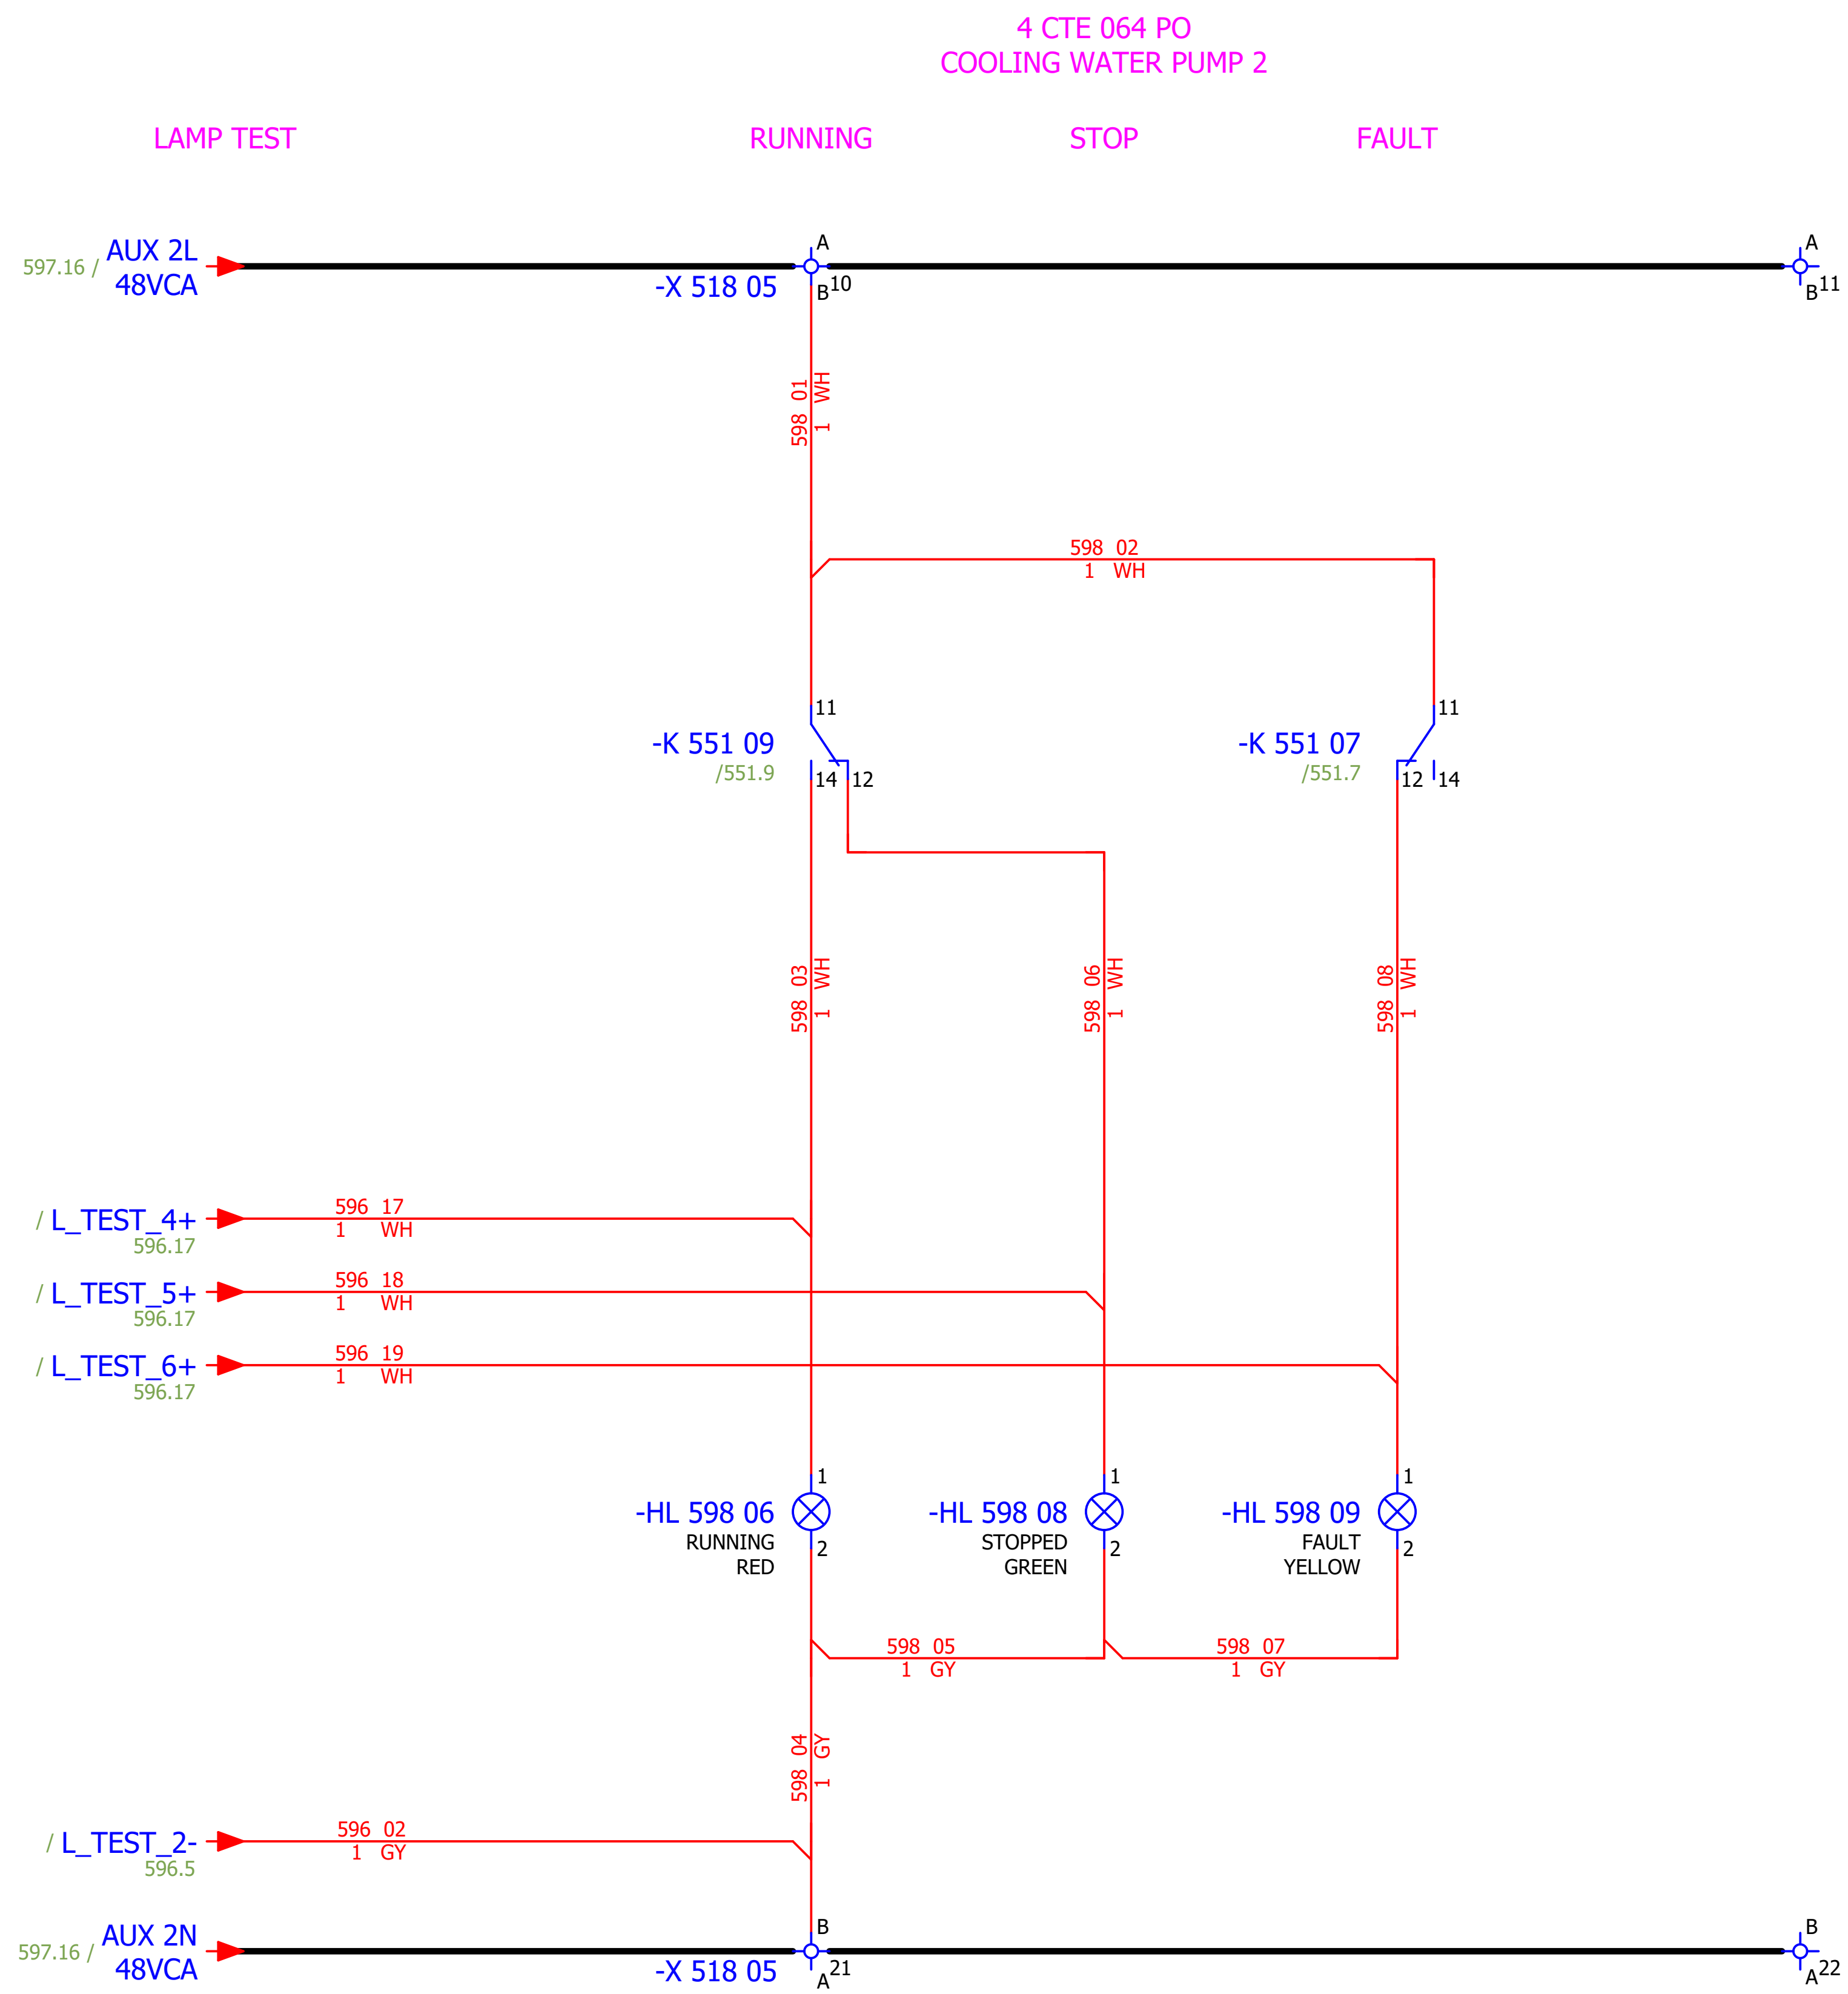

Date: 17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F	#QA
Drawn: Luka Božičević									
Approved: Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING WATER PUMP 2 - SIGNALIZATION LAMPS	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 598
Format: A3								+4LKF006AR	Next: 599

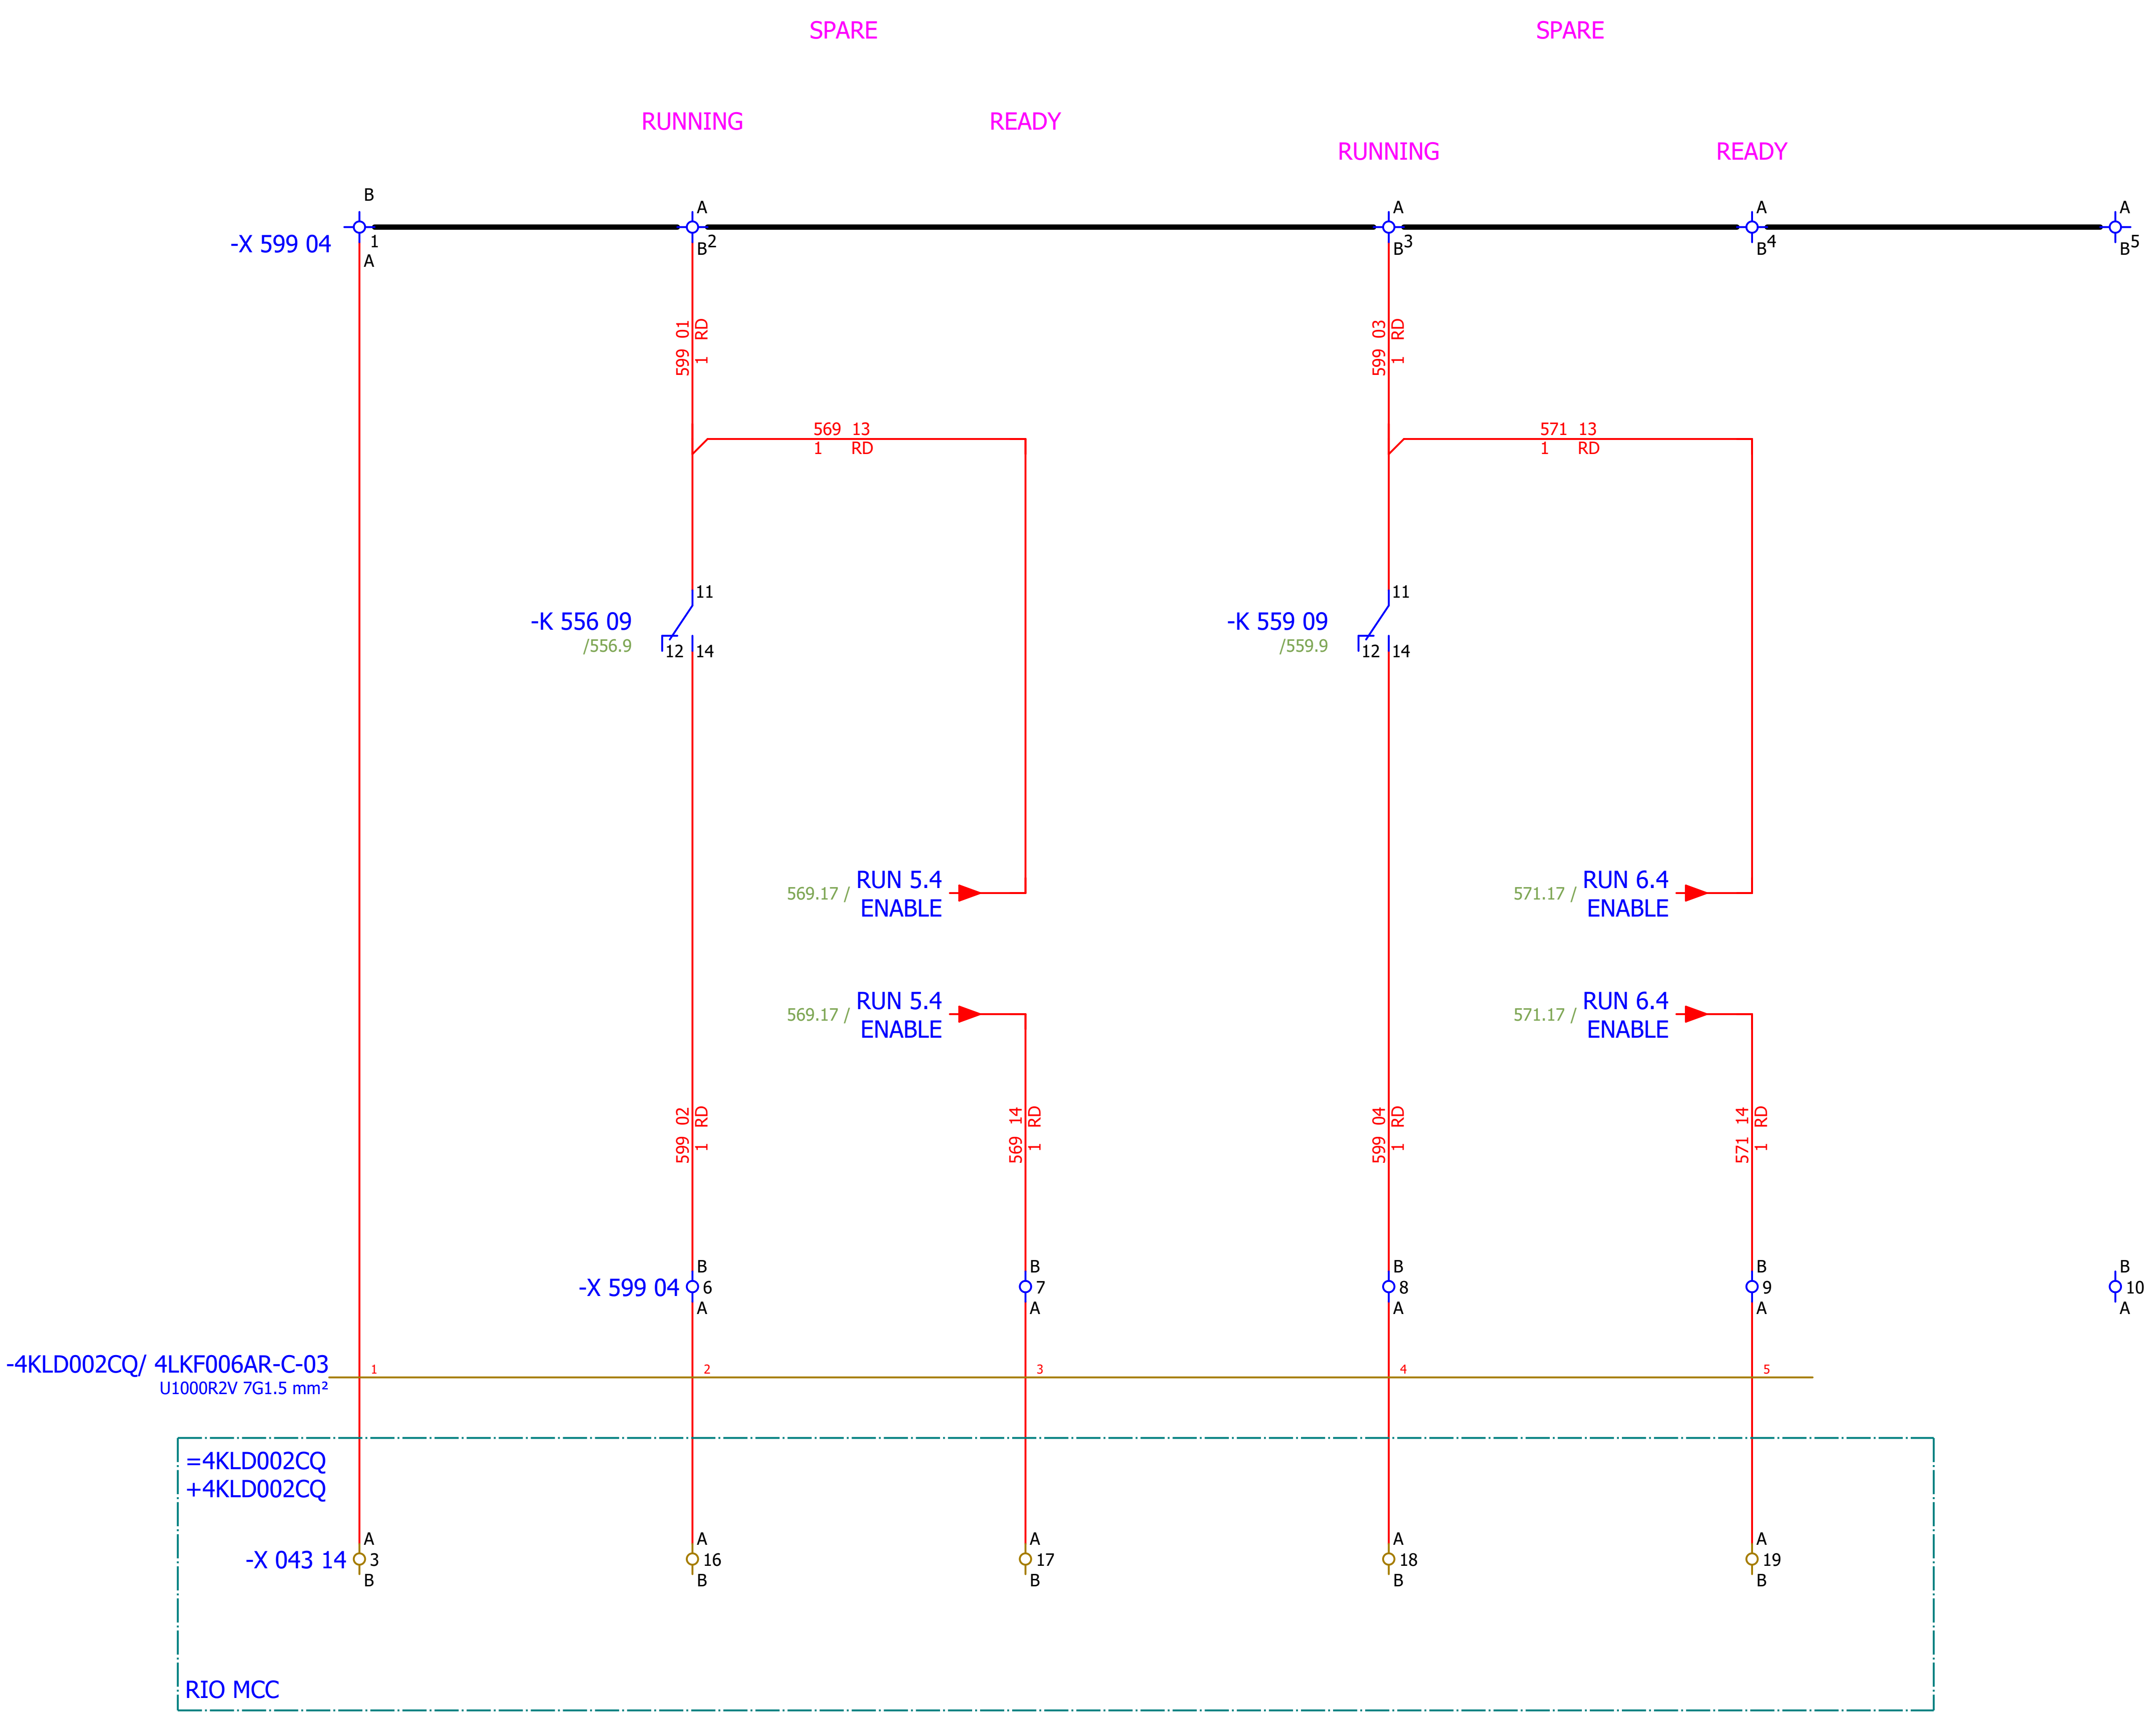

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874
Drawn:	Luka Božičević							Revision: F
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE - SIGNALIZATION TO PLC	Drawing designation: BRC-4-ATEP0-1870-F	=4LKF001AR +4LKF006AR	#QA Sheet: 599 Next: 600
Format:	A3							

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

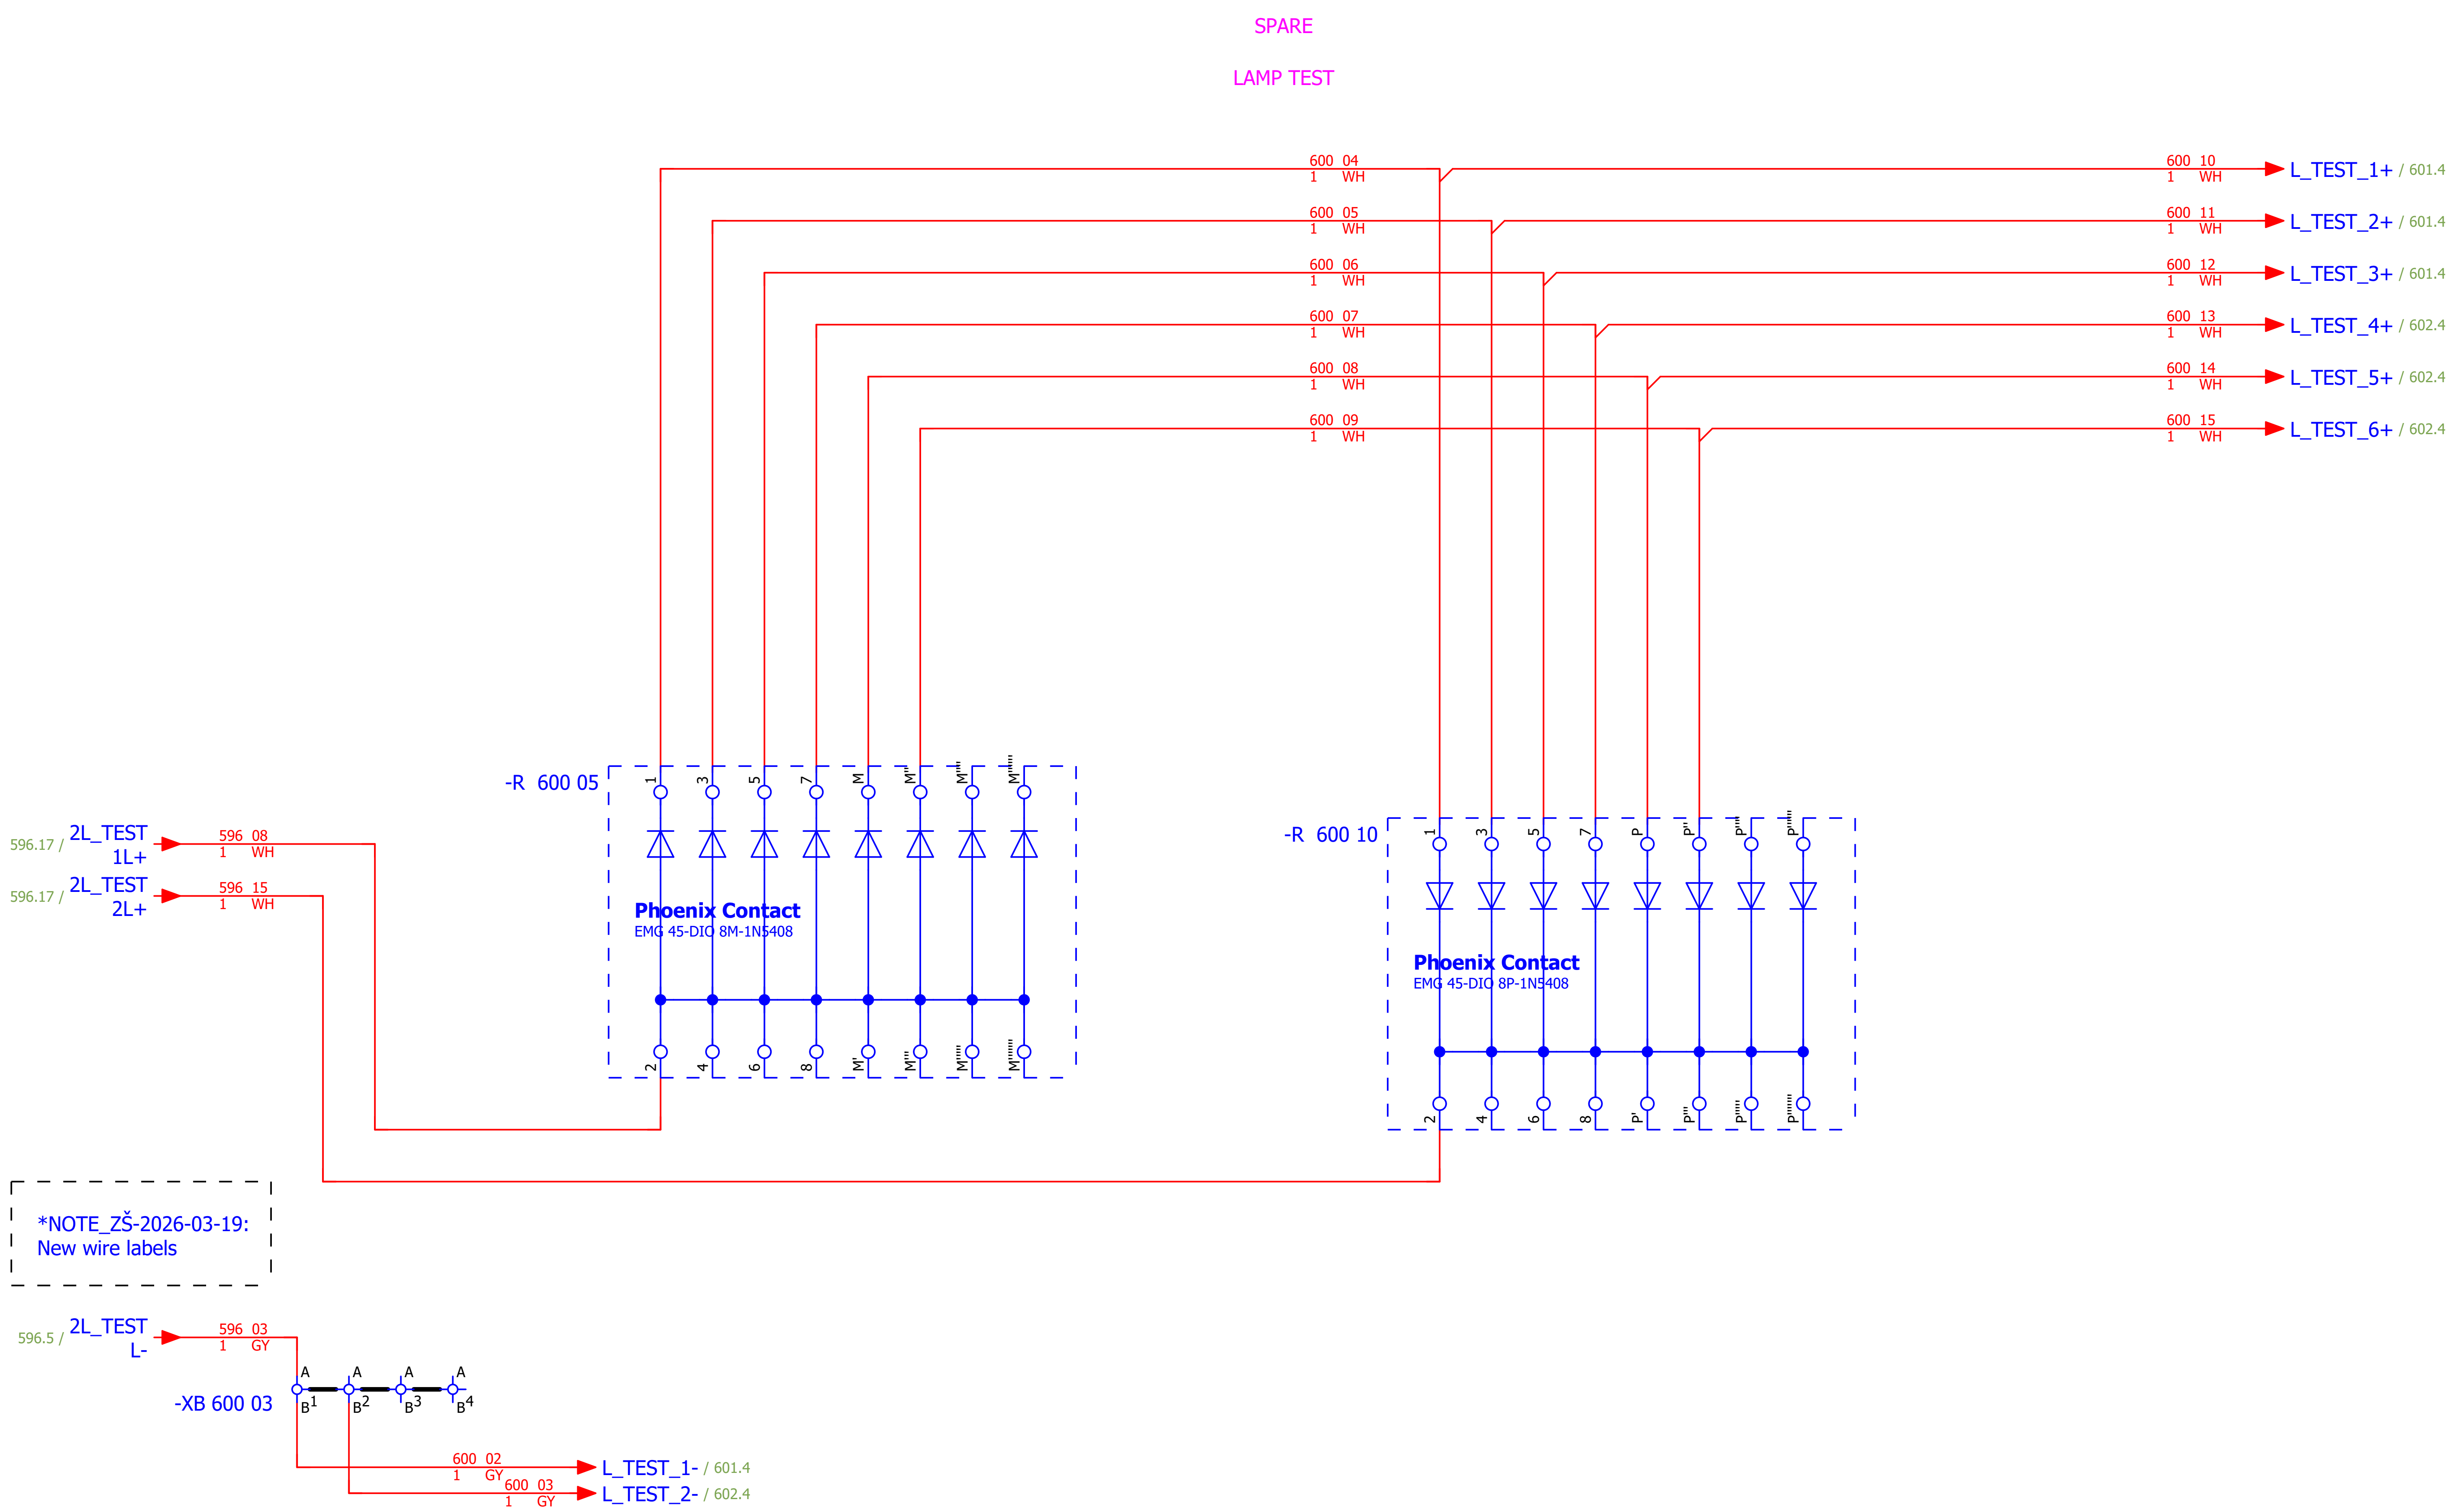

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F	#QA
Drawn:	Luka Božičević									
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE - LAMP TEST	Drawing designation: BRC-4-ATEP0-1870-F			=4LKF001AR	Sheet: 600
Format:	A3								+4LKF006AR	Next: 601

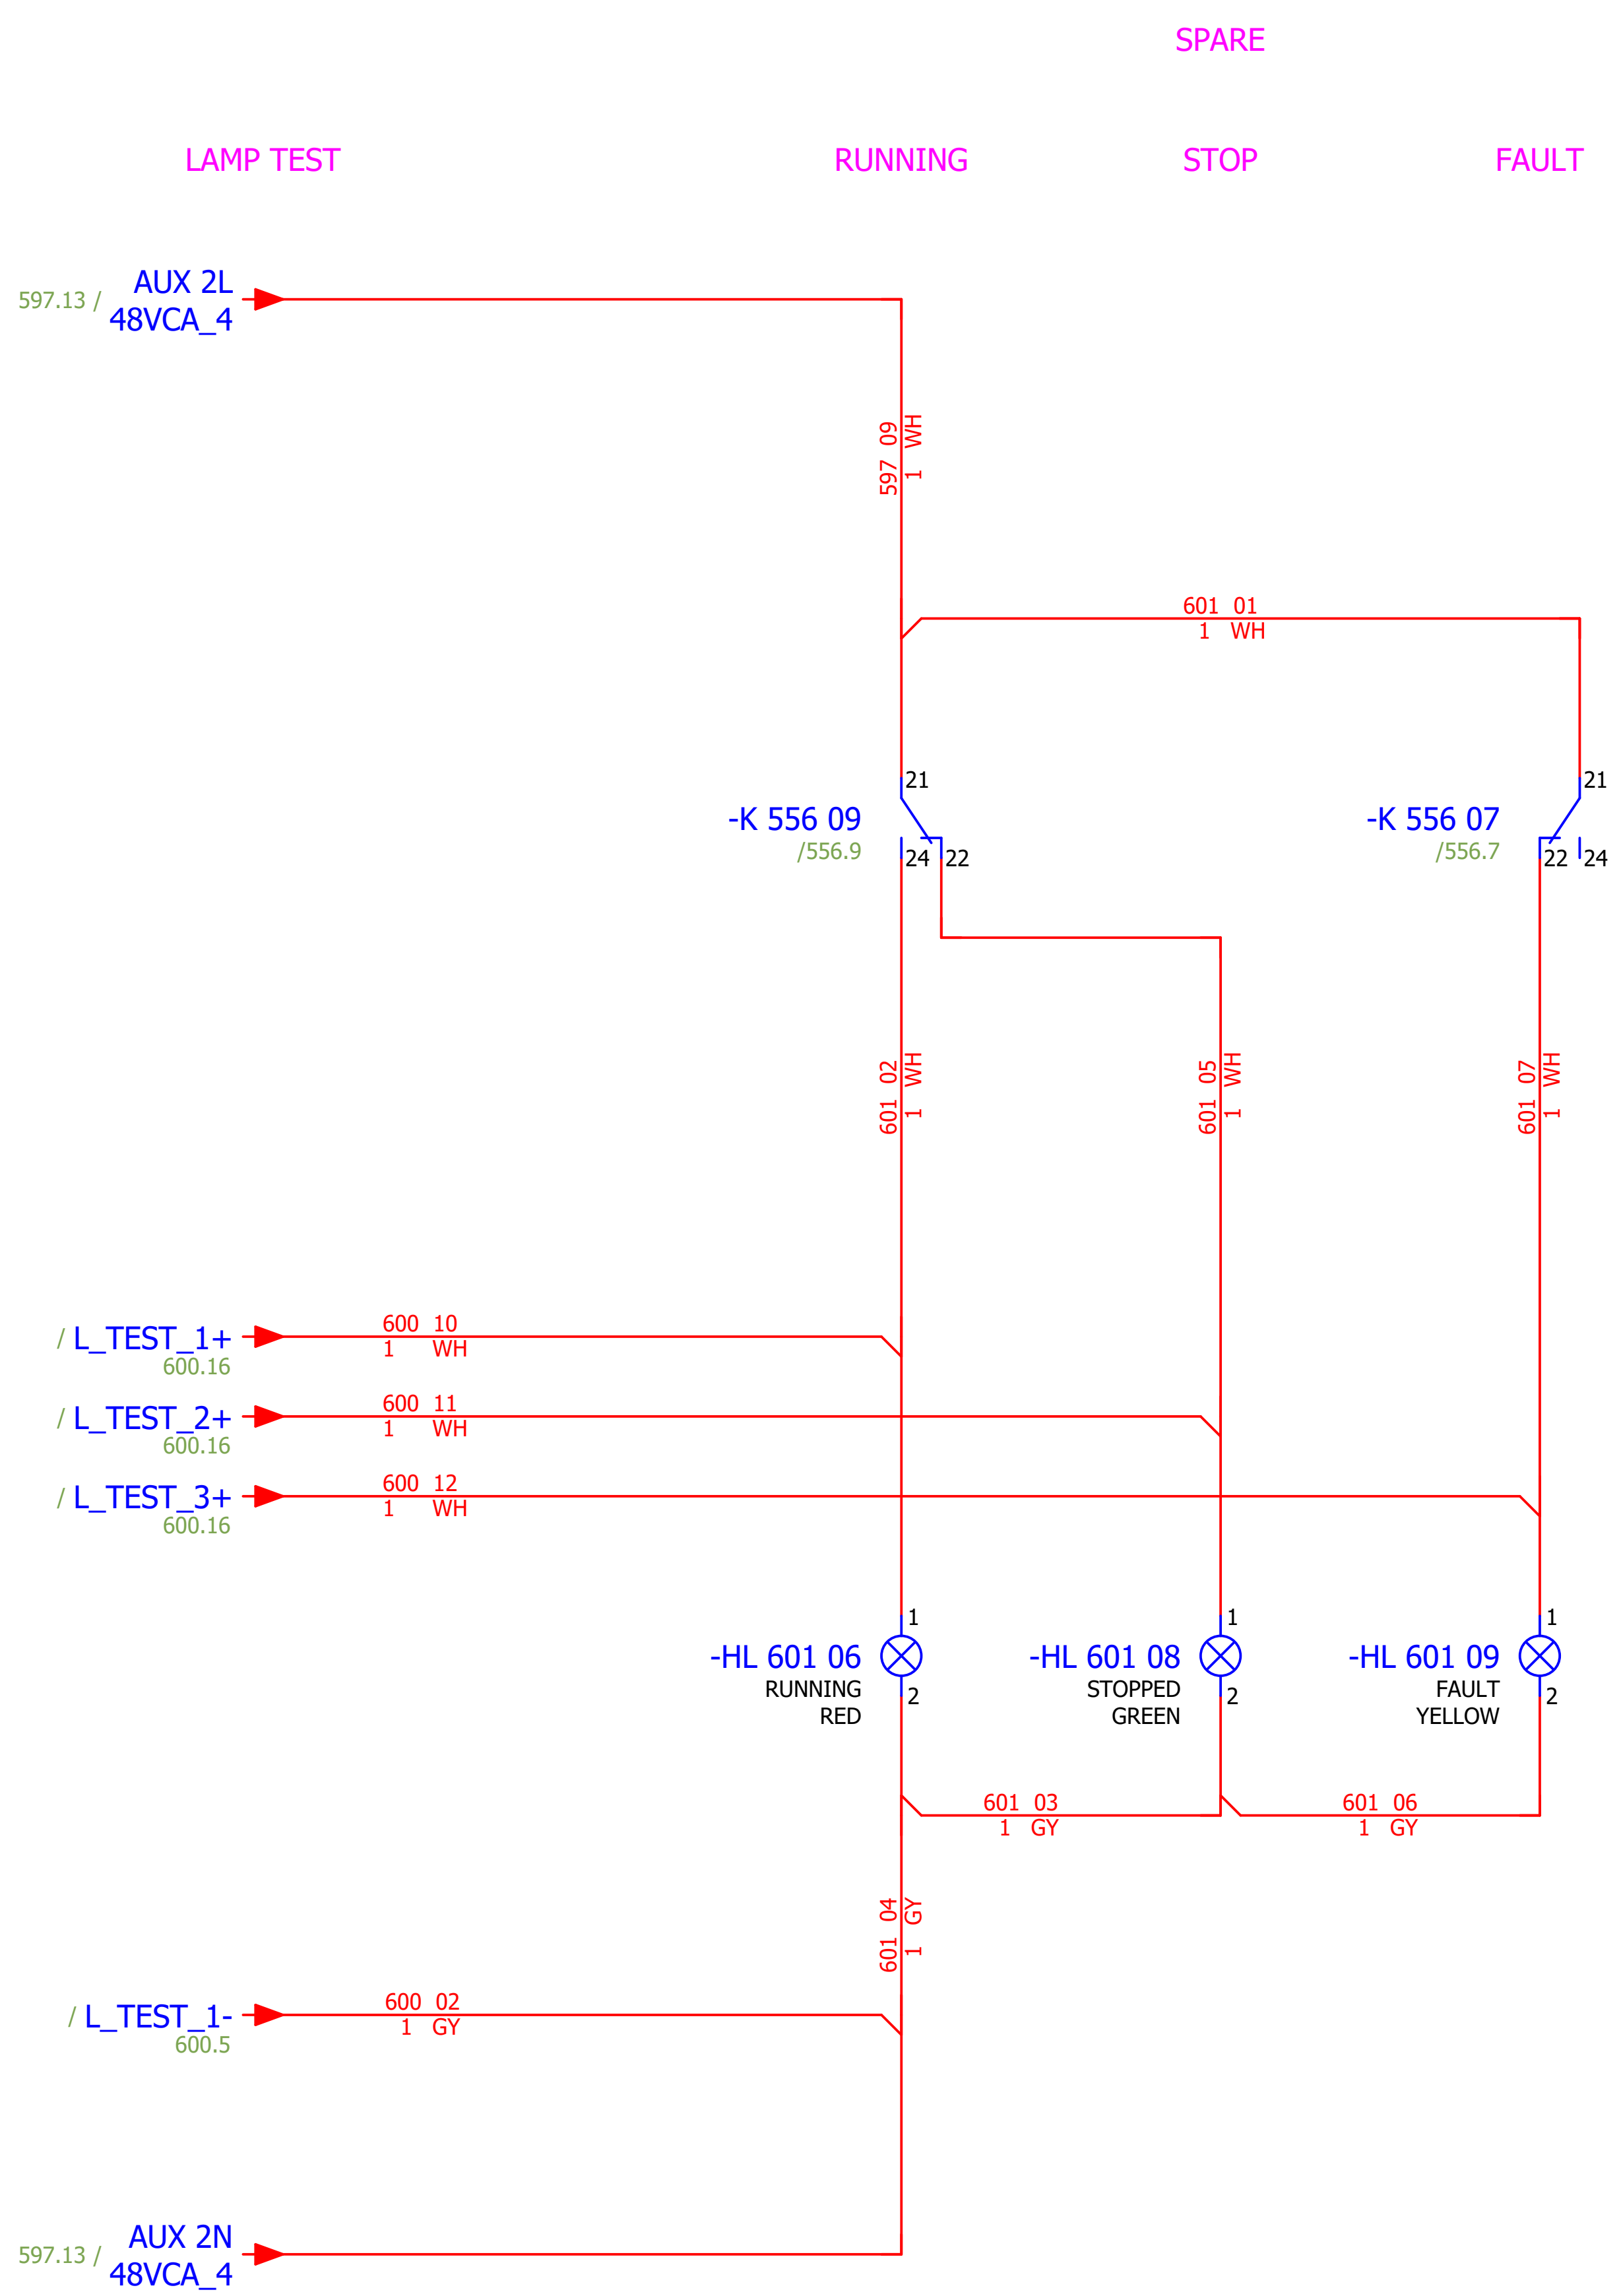

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0
Drawn:	Luka Božičević						Number: 1874	Revision: F
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	SPARE - SIGNALIZATION LAMPS	Drawing designation: BRC-4-ATEP0-1870-F	#QA
Format:	A3						=4LKF001AR +4LKF006AR	Sheet: 601 Next: 602

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

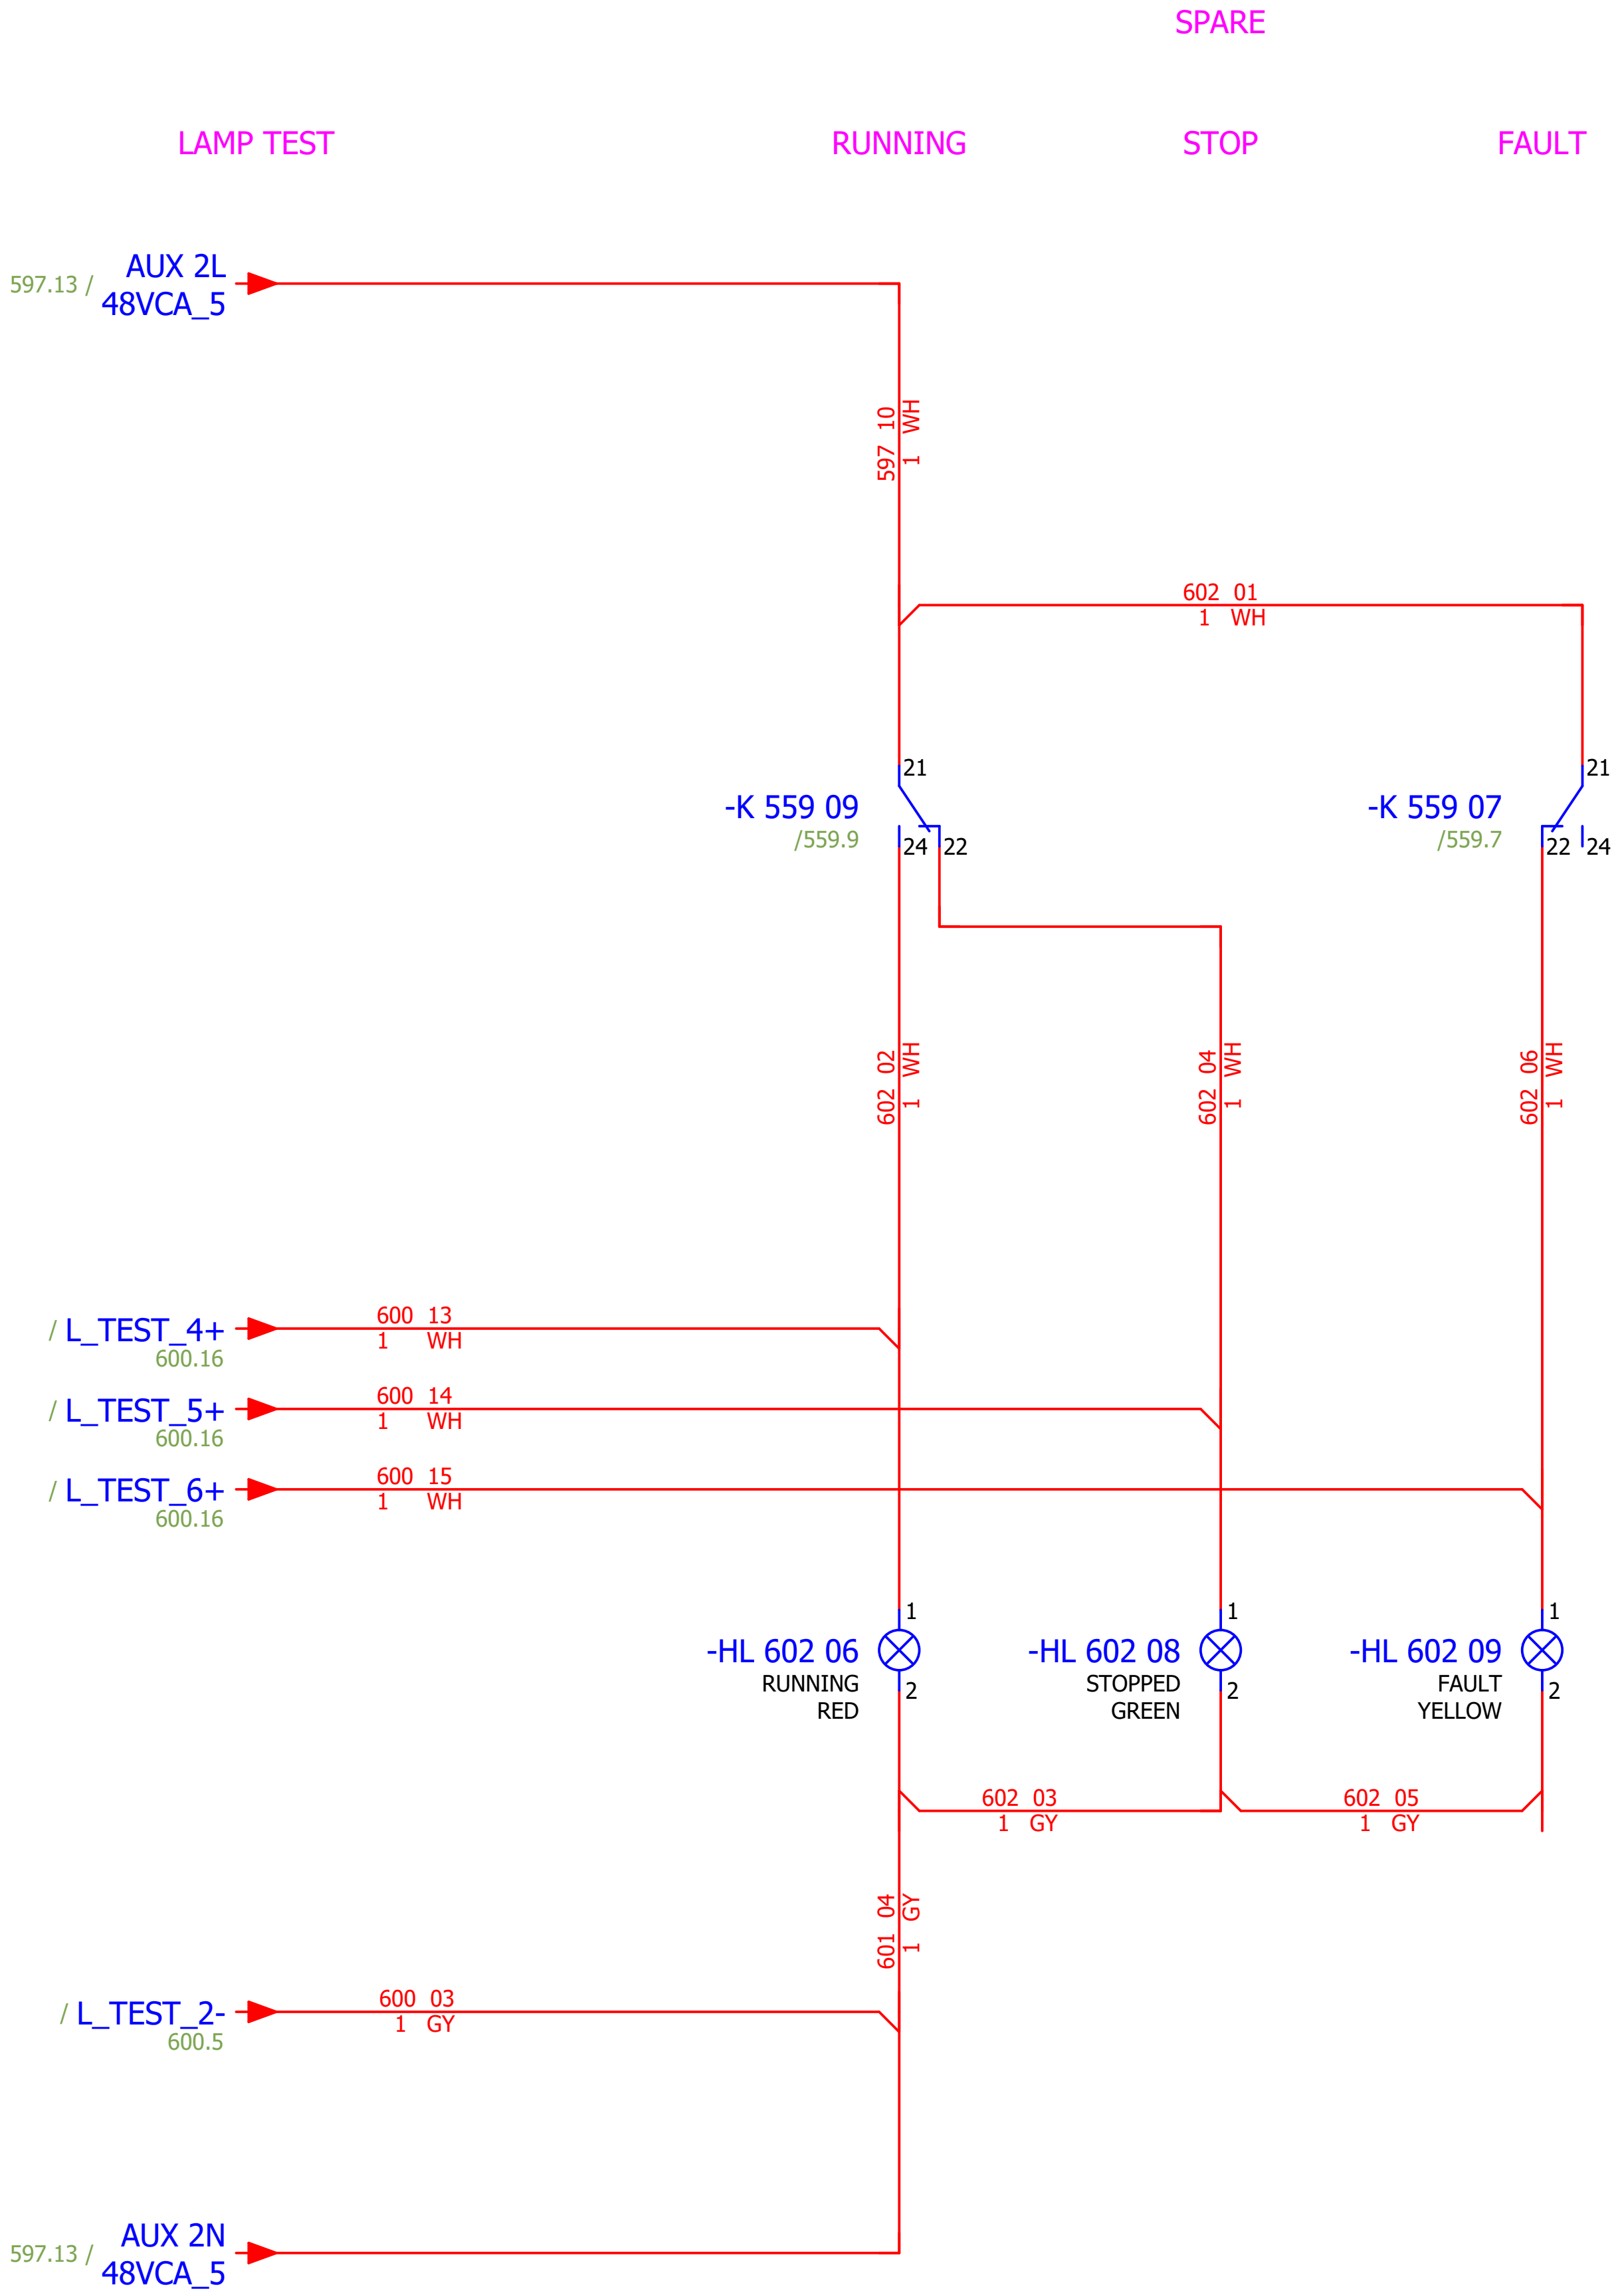

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	
Drawn:	Luka Božičević						
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	SPARE - SIGNALIZATION LAMPS	
Format:	A3						

Project:	Unit & Issuer:	Number:	Revision:	
BRC-4	ATEP0	1874	F	#QA
Drawing designation:			=4LKF001AR	Sheet: 602
BRC-4-ATEP0-1870-F			+4LKF006AR	Next: 603

Terminal diagram

A SIDE

Strip
=4LKF001AR+4LKF006AR-X 391 03

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Wiring	Target designation
				'	10		

Terminal diagram

Strip

=4LKF001AR+4LKF006AR-X 515 05

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/515.5	-IG 531 05:11		BN 2.5 mm²		1	BN 2.5 mm²	-Q 515 05:2
					2	BK 1 mm²	-TA 511 08:19
					3	BK 1 mm²	-TA 511 08:24
/556.7	-TA 519 08:19		BK 1 mm²		4	BK 1 mm²	-TA 512 08:19
/556.10	-TA 519 08:24		BK 1 mm²		5	BK 1 mm²	-TA 512 08:24
/515.5	-K 515 05:A2		BU 2.5 mm²		6	BU 2.5 mm²	-Q 515 05:4
					7	BU 1 mm²	-K 542 07:A2

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF006AR-X 516 05

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1	WH 2.5 mm²	-Q 516 05:2
/561.5	=4SEO209CA+4SEO209CA-X?:?:B	4LKF006AR/ 4SEO209CA-C-01 U1000R2V 5G1.5 mm²	BN 1.5 mm²		2		
					3	WH 1 mm²	-RP 561 11:13
					4	BN 1.5 mm²	=4FGO003CA+4FGO003CA-X?:?:B
/563.5	=4ERF264CA+4ERF264CA-X?:?:B	4LKF006AR/ 4ERF264CA-C-01 U1000R2V 5G1.5 mm²	BN 1.5 mm²		5		
					6	WH 1 mm²	-RP 563 11:13
					7	WH 1 mm²	-RP 569 11:13
					8	WH 1 mm²	-K 542 09:11
					9		
					10	WH 1 mm²	-K 545 09:11
					11		
					12	GY 2.5 mm²	-Q 516 05:4
					13	GY 1 mm²	-RP 561 11:A2
					14	GY 1 mm²	-K 562 05:A2
					15	GY 1 mm²	-RP 569 11:A2
					16	GY 1 mm²	-RP 563 11:A2
					17	GY 1 mm²	-K 564 05:A2
					18	GY 1 mm²	-K 571 05:A2
					19	GY 1 mm²	-HL 593 06:2
						GY 1 mm²	-XB 592 03:1:B
					20		
					21	GY 1 mm²	-HL 594 06:2
						GY 1 mm²	-XB 592 03:2:B
					22		
/561.5	=4SEO209CA+4SEO209CA-X?:?:A	4LKF006AR/ 4SEO209CA-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²		23	WH 1 mm²	-RP 585 04:13

Terminal diagram

Strip

=4LKF001AR+4LKF006AR-X 516 05

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					24	WH 1 mm²	-S 541 09:34
					25	WH 1 mm²	-K 562 05:A1
/562.8	=4SEO209CA+4SEO209CA-X?:?:A	4LKF006AR/ 4SEO209CA-C-01 U1000R2V 5G1.5 mm²	BU 1.5 mm²		26	WH 1 mm²	-K 562 05:24
/562.8	=4SEO209CA+4SEO209CA-X?:?:B	4LKF006AR/ 4SEO209CA-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²		27	WH 1 mm²	-S 541 09:44
					28	WH 1 mm²	-K 562 05:21
/563.5	=4ERF264CA+4ERF264CA-X?:?:A	4LKF006AR/ 4ERF264CA-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²		29	WH 1 mm²	+4LKF003AR-RP 171 04:23
					30	WH 1 mm²	-S 544 09:34
					31	WH 1 mm²	-K 564 05:A1
/564.8	=4ERF264CA+4ERF264CA-X?:?:A	4LKF006AR/ 4ERF264CA-C-01 U1000R2V 5G1.5 mm²	BU 1.5 mm²		32	WH 1 mm²	-K 564 05:24
/564.8	=4ERF264CA+4ERF264CA-X?:?:B	4LKF006AR/ 4ERF264CA-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²		33	WH 1 mm²	-S 544 09:44
					34	WH 1 mm²	-K 564 05:21

Terminal diagram

Strip

=4LKF001AR+4LKF006AR-X 517 05

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/517.5	-IG 532 05:11		BN 2.5 mm²	•	1	BN 2.5 mm²	-Q 517 05:2
				•	2	BK 1 mm²	-TA 513 08:19
				•	3	BK 1 mm²	-TA 513 08:24
/559.7	-TA 520 08:19		BK 1 mm²	•	4	BK 1 mm²	-TA 514 08:19
/559.10	-TA 520 08:24		BK 1 mm²	•	5	BK 1 mm²	-TA 514 08:24
/517.5	-K 517 05:A2		BU 2.5 mm²	•	6	BU 2.5 mm²	-Q 517 05:4
				•	7	BU 1 mm²	-K 548 07:A2

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF006AR-X 518 05

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					30		
					31		
					1	WH 2.5 mm²	-Q 518 05:2
					2		
					3	WH 1 mm²	-RP 565 11:13
					4	BN 1.5 mm²	=4FGO004CA+4FGO004CA-X?:?:B
/567.5	=4ERF269CA+4ERF269CA-X?:?:B	4LKF006AR/ 4ERF269CA-C-01 U1000R2V 5G1.5 mm²	BN 1.5 mm²		5		
					6	WH 1 mm²	-RP 567 11:13
					7	WH 1 mm²	-RP 571 11:13
					8	WH 1 mm²	-K 548 09:11
					9	WH 1 mm²	-K 556 09:21
						WH 1 mm²	-K 559 09:21
					10	WH 1 mm²	-K 551 09:11
					11		
					12	GY 2.5 mm²	-Q 518 05:4
					13	GY 1 mm²	-RP 565 11:A2
					14	GY 1 mm²	-K 566 05:A2
					15	GY 1 mm²	-RP 571 11:A2
					16	GY 1 mm²	-RP 567 11:A2
					17	GY 1 mm²	-K 568 05:A2
					18	GY 1 mm²	-K 572 05:A2
					19	GY 1 mm²	-HL 597 06:2
						GY 1 mm²	-XB 596 03:1:B
					20	GY 1 mm²	-HL 602 06:2
						GY 1 mm²	-XB 600 03:2:B

Terminal diagram

Strip

A SIDE — =4LKF001AR+4LKF006AR-X 518 05 — B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					21	GY 1 mm²	-HL 598 06:2
						GY 1 mm²	-XB 596 03:2:B
					22		
					23	WH 1 mm²	-RP 585 04:23
					24	WH 1 mm²	-S 547 09:34
					25	WH 1 mm²	-K 566 05:A1
					26	WH 1 mm²	-K 566 05:24
					27	WH 1 mm²	-S 547 09:44
					28	WH 1 mm²	-K 566 05:21
/567.5	=4ERF269CA+4ERF269CA-X?:?:A	4LKF006AR/ 4ERF269CA-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²		29	WH 1 mm²	+4LKF003AR-RP 171 04:33
					30	WH 1 mm²	-S 550 09:34
					31	WH 1 mm²	-K 568 05:A1
/568.8	=4ERF269CA+4ERF269CA-X?:?:A	4LKF006AR/ 4ERF269CA-C-01 U1000R2V 5G1.5 mm²	BU 1.5 mm²		32	WH 1 mm²	-K 568 05:24
/568.8	=4ERF269CA+4ERF269CA-X?:?:B	4LKF006AR/ 4ERF269CA-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²		33	WH 1 mm²	-S 550 09:44
					34	WH 1 mm²	-K 568 05:21

Terminal diagram

Strip

A SIDE | =4LKF001AR+4LKF006AR-X 531 05 | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
=4LCA002CR+4LCA002CR/21.12	=4LCA002CR+4LCA002CR-X 021 12:1:A	4LCA002CR/ 4LKF006AR-C-01 U1000R2V 3G2.5 mm²	BN 2.5 mm²		1	RD 2.5 mm²	-IG 531 05:1
					1		
					5		
					9		
					11		
/531.5	-IG 531 05:2		RD 2.5 mm²		2	RD 1.5 mm²	-TA 511 08:31
/561.14	-RP 561 11:23		RD 1 mm²		10	RD 1 mm²	-RP 561 11:33
/581.11	-TA 511 08:STO_B-		BU 1 mm²		12	BU 1 mm²	-TA 511 08:STO_A-
					3	RD 1.5 mm²	-TA 512 08:31
					4	RD 1.5 mm²	-TA 519 08:31
					8	RD 1.5 mm²	-TA 519 08:32
/563.14	-RP 563 11:23		RD 1 mm²		13	RD 1 mm²	-RP 563 11:33
/582.11	-TA 512 08:STO_B-		BU 1 mm²		14	BU 1 mm²	-TA 512 08:STO_A-
/569.14	-RP 569 11:23		RD 1 mm²		15	RD 1 mm²	-RP 569 11:33
/586.11	-TA 519 08:STO_B-		BU 1 mm²		16	BU 1 mm²	-TA 519 08:STO_A-
/531.5	=4LCA002CR+4LCA002CR-X 021 12:6:A	4LCA002CR/ 4LKF006AR-C-01 U1000R2V 3G2.5 mm²	BU 2.5 mm²		5	BU 2.5 mm²	-IG 531 05:3
/531.5	-IG 531 05:4		BU 2.5 mm²		6	BU 1.5 mm²	-TA 511 08:32
					7	BU 1.5 mm²	-TA 512 08:32

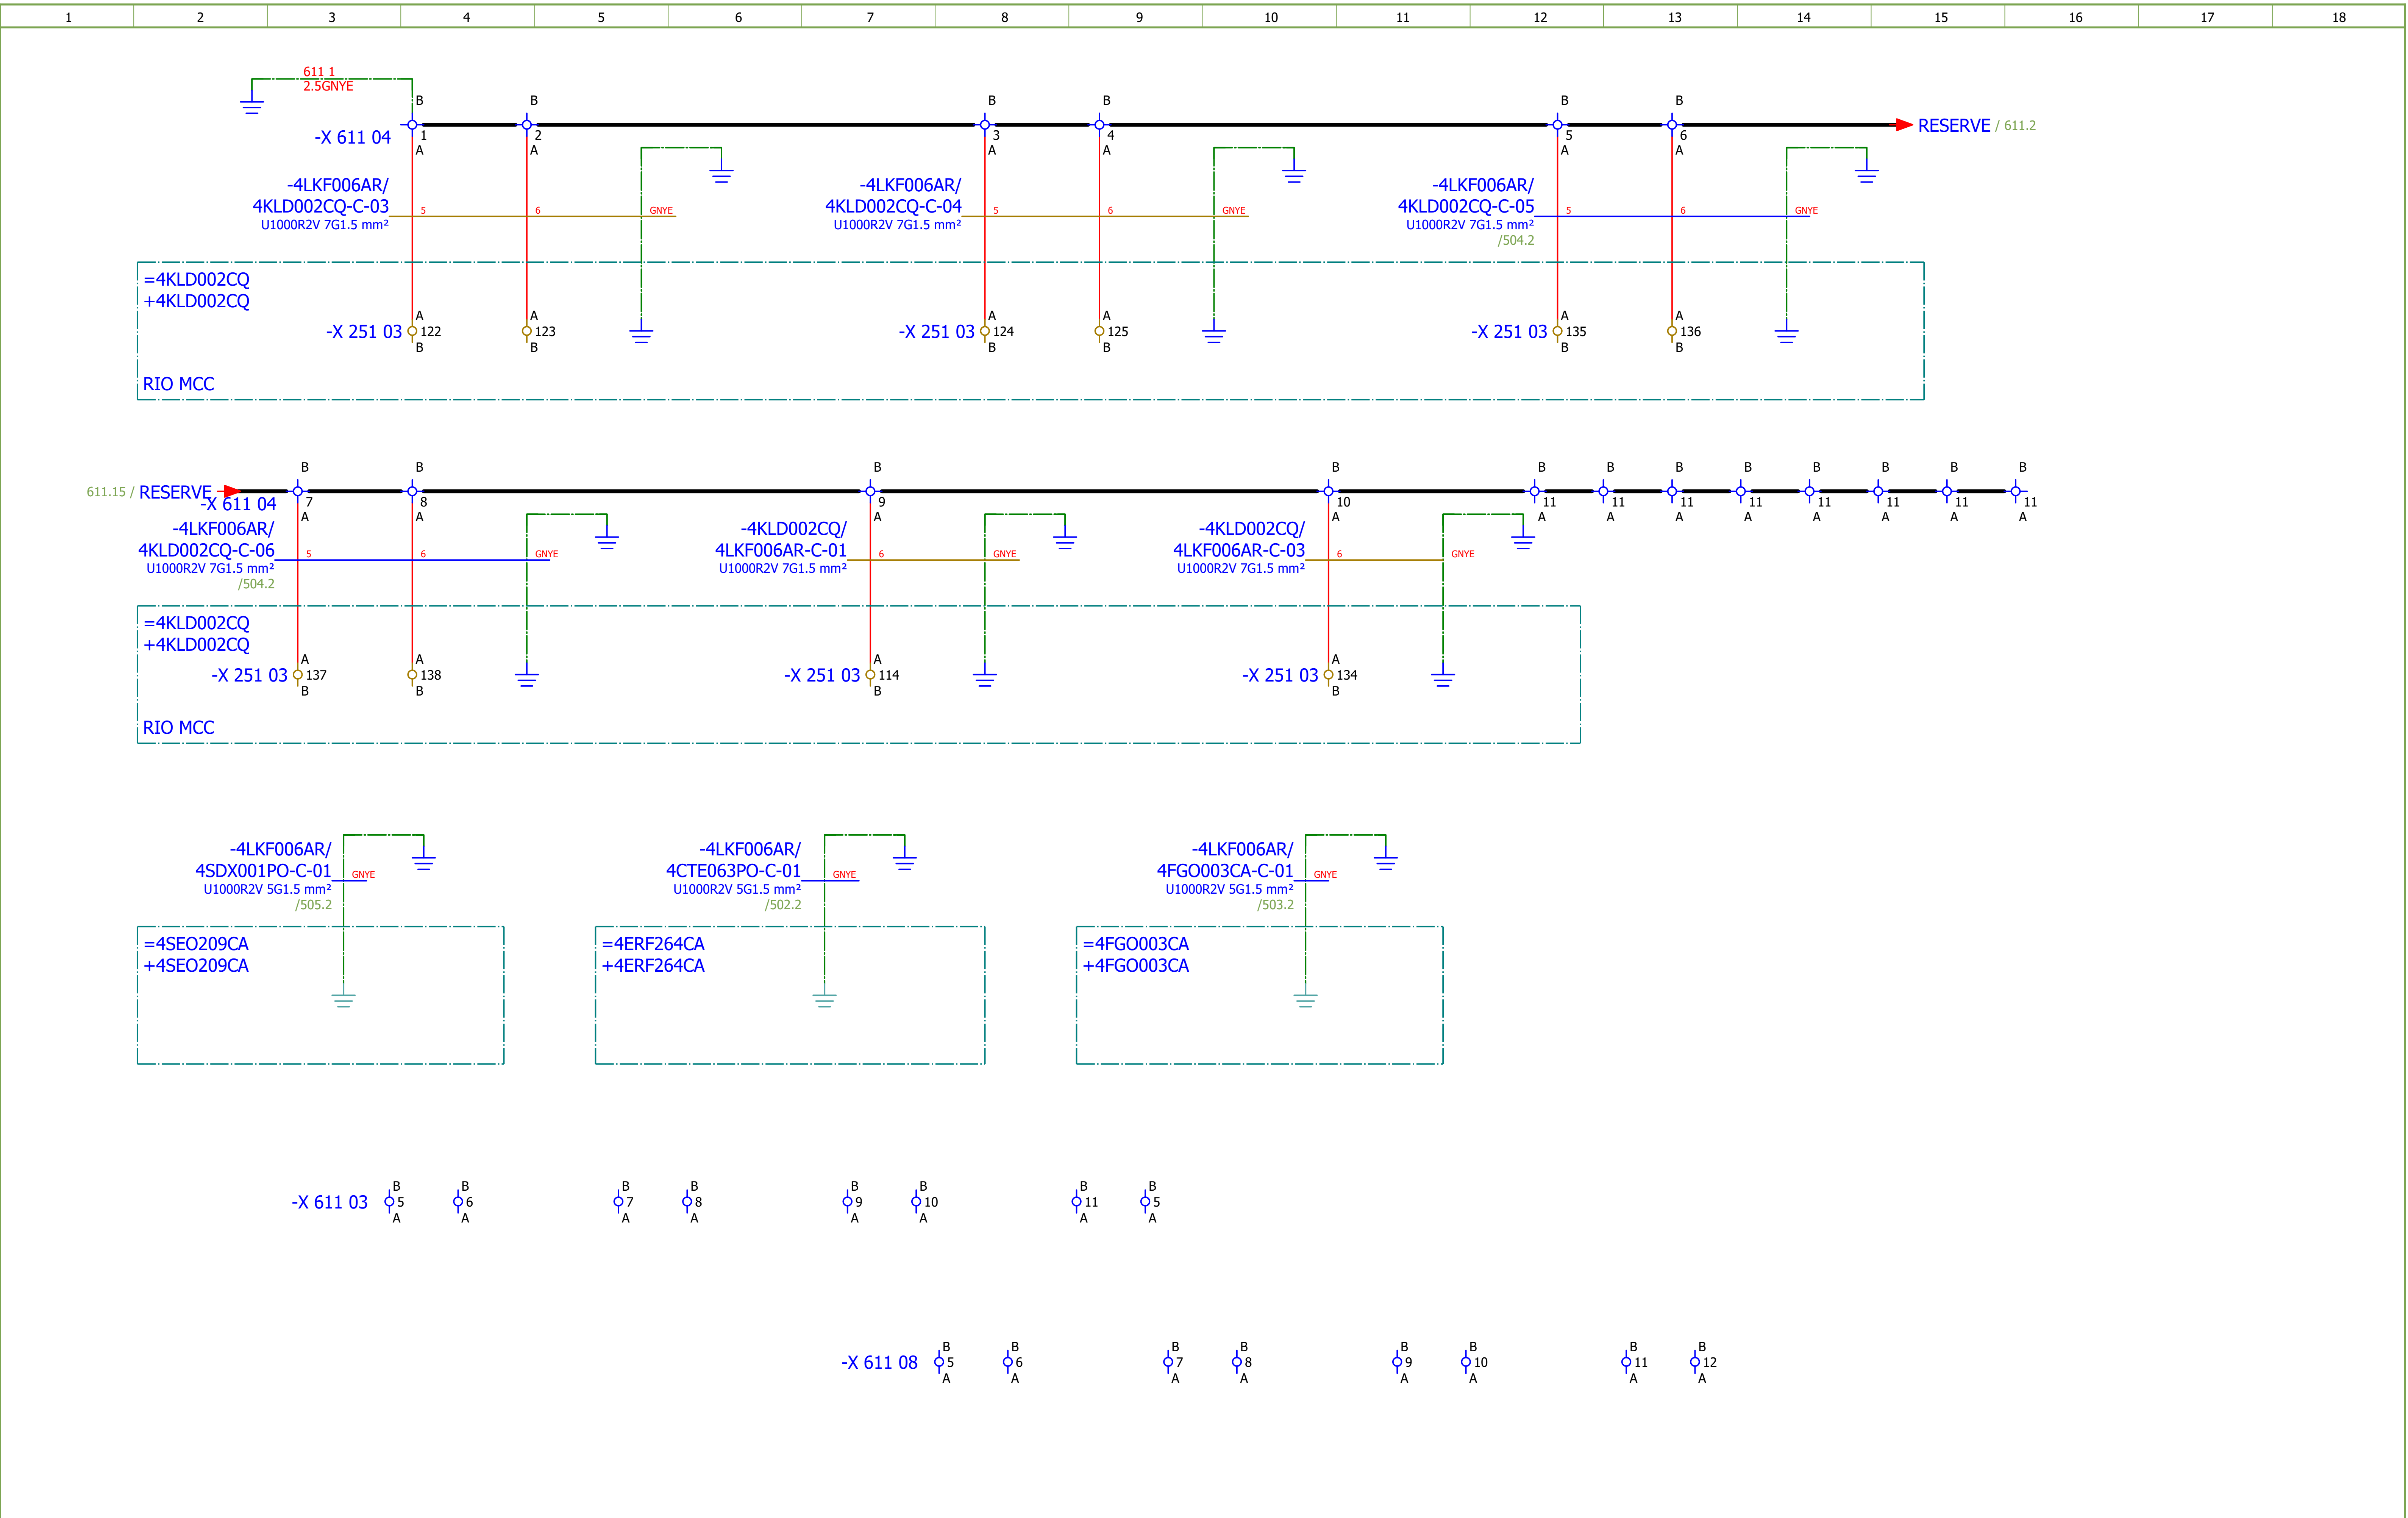

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F	#QB
Drawn:	Luka Božičević										
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	SPARE CONTACTS	Drawing designation:	BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 611
Format:	A3									+4LKF006AR	Next: 612

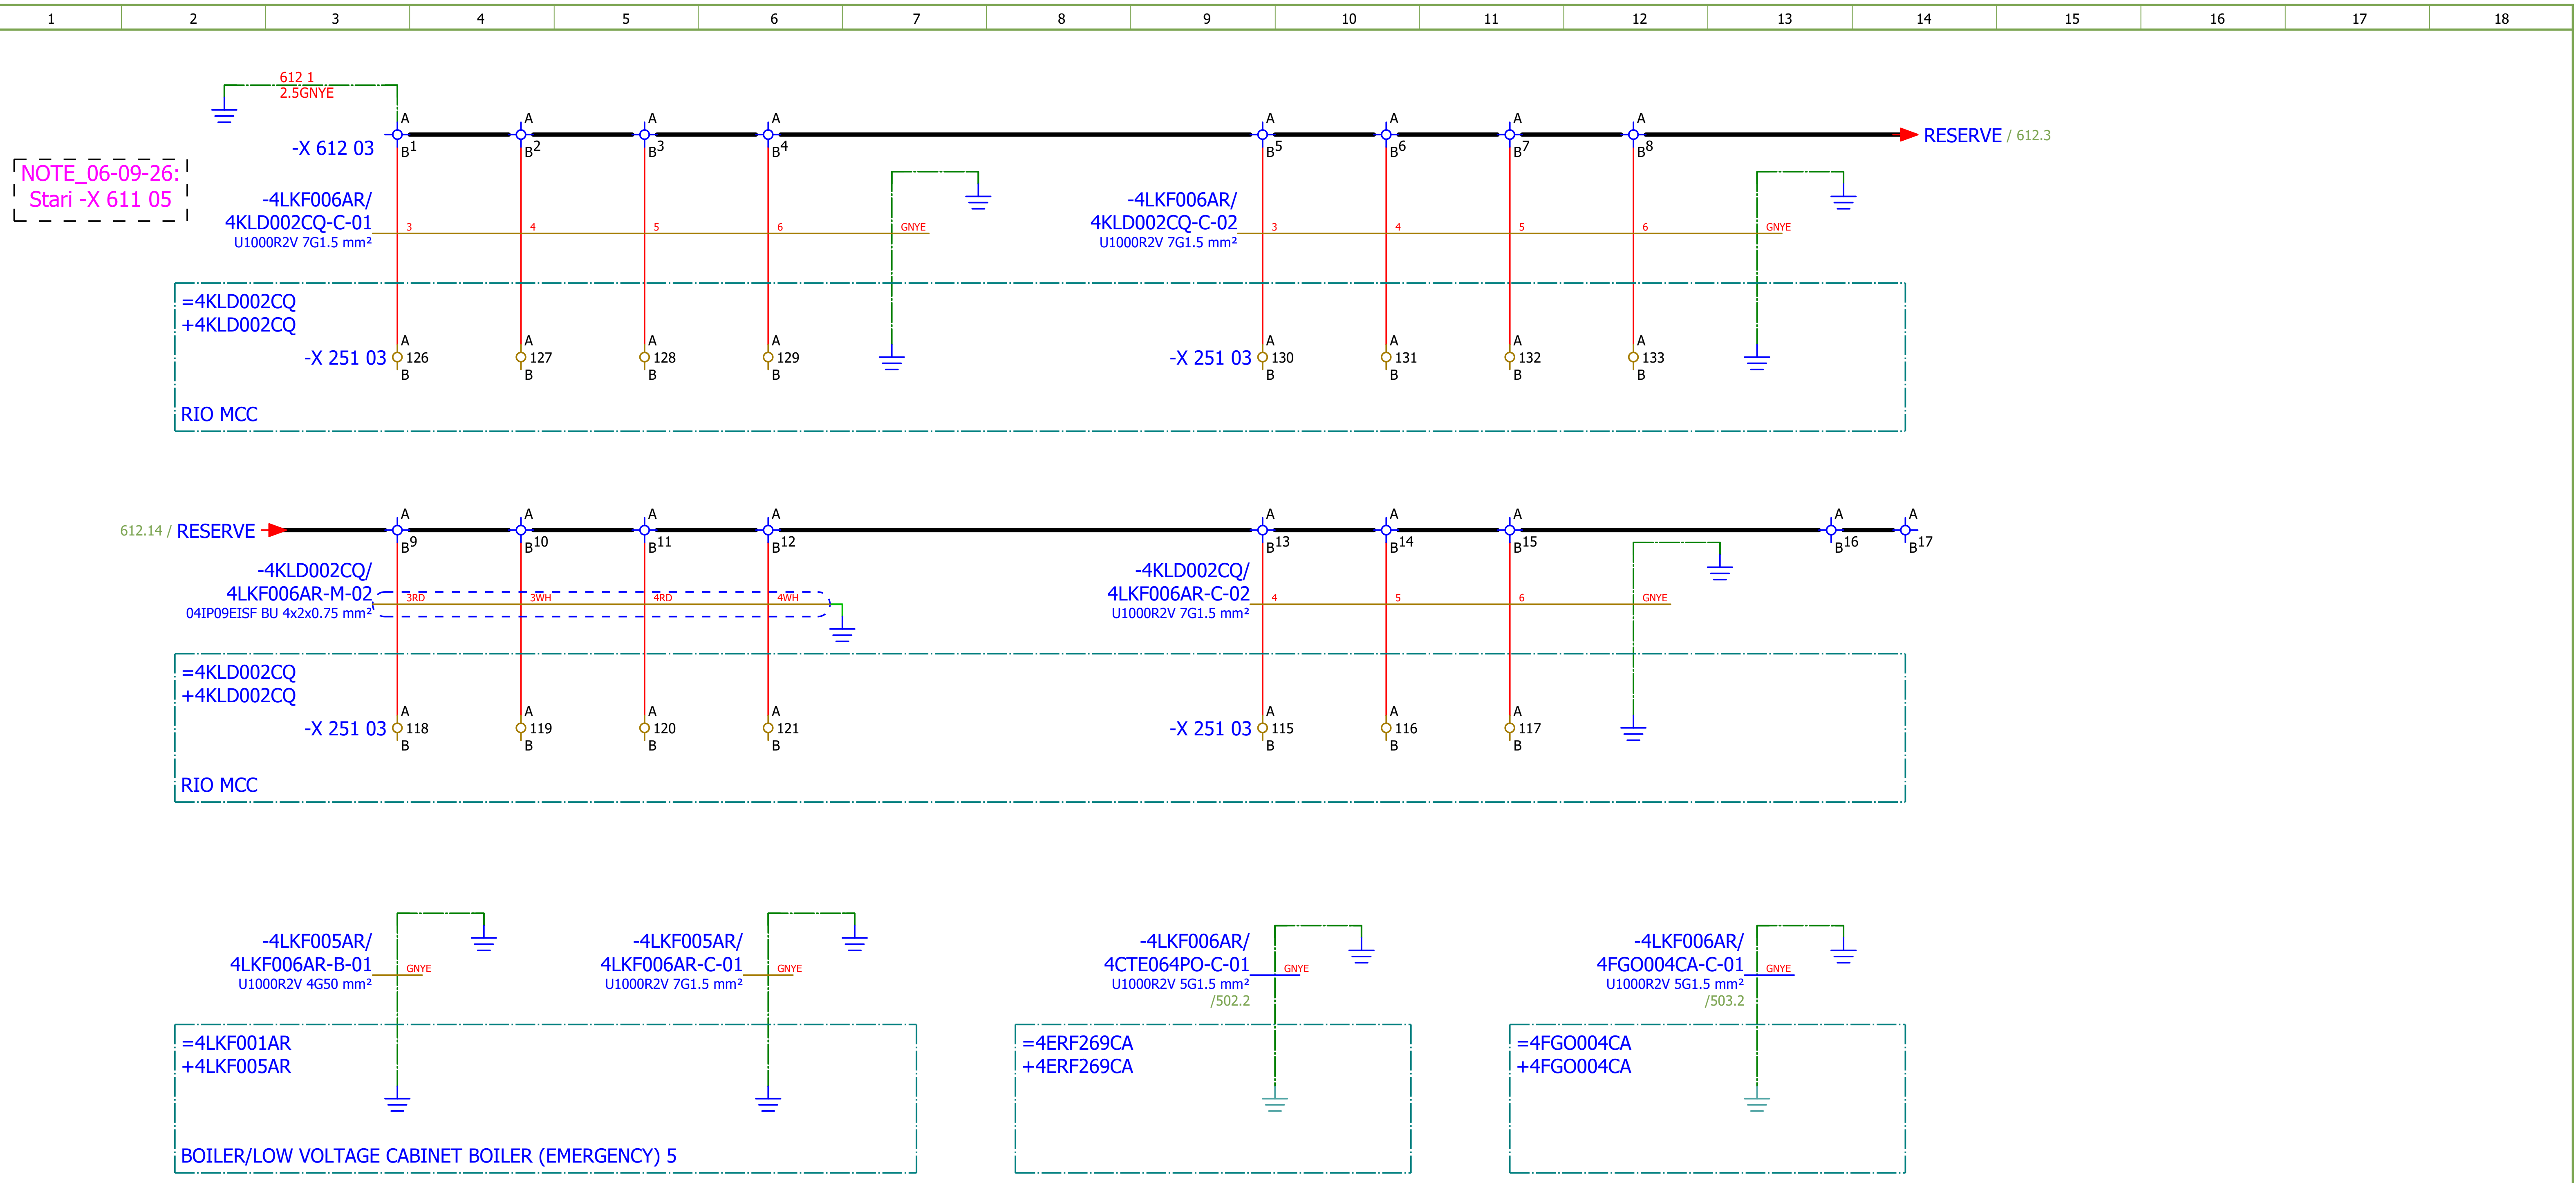

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević								#QB
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: SPARE CONTACTS	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 612
Format:	A3							+4LKF006AR	Next: 613

Terminal diagram

Strip

=4LKF001AR+4LKF006AR-X 532 05

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Terminal	Wiring	Target designation
=4LCA002CR+4LCA002CR/21.14	=4LCA002CR+4LCA002CR-X 021 14:1:A	4LCA002CR/ 4LKF006AR-C-02 U1000R2V 3G2.5 mm²	BN 2.5 mm²	1	RD 2.5 mm²	-IG 532 05:1
				1		
				5		
				9		
				11		
/532.5	-IG 532 05:2		RD 2.5 mm²	2	RD 1.5 mm²	-TA 513 08:31
/565.14	-RP 565 11:23		RD 1 mm²	10	RD 1 mm²	-RP 565 11:33
/583.11	-TA 513 08:STO_B-		BU 1 mm²	12	BU 1 mm²	-TA 513 08:STO_A-
				3	RD 1.5 mm²	-TA 514 08:31
/567.14	-RP 567 11:23		RD 1 mm²	13	RD 1 mm²	-RP 567 11:33
/584.11	-TA 514 08:STO_B-		BU 1 mm²	14	BU 1 mm²	-TA 514 08:STO_A-
/571.14	-RP 571 11:23		RD 1 mm²	15	RD 1 mm²	-RP 571 11:33
/587.11	-TA 520 08:STO_B-		RD 1.5 mm²	16	RD 1.5 mm²	-TA 520 08:STO_A-
/532.5	=4LCA002CR+4LCA002CR-X 021 14:6:A	4LCA002CR/ 4LKF006AR-C-02 U1000R2V 3G2.5 mm²	BU 2.5 mm²	5	BU 2.5 mm²	-IG 532 05:3
/532.5	-IG 532 05:4		BU 2.5 mm²	6	BU 1.5 mm²	-TA 513 08:32
				4	RD 1.5 mm²	-TA 520 08:31
				7	BU 1.5 mm²	-TA 514 08:32
				8	BU 1.5 mm²	-TA 520 08:32

Jumper

Terminal diagram

Strip

=4LKF001AR+4LKF006AR-X 541 04

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1	RD 1 mm²	-TA 511 08:9
					2	RD 1 mm²	-K 562 05:11
					3	RD 1 mm²	-S 541 09:13
					4		
					5	RD 1 mm²	-Q 515 05:11
					6	RD 1 mm²	-QB 511 09:21
					7	RD 1 mm²	-TA 511 08:17

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF006AR-X 543 05

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
				'	1	VT 1 mm²	-TA 511 08:3
				'	2	VT 1 mm²	-TA 511 08:4
/543.12	2R1:A	4LKF006AR/ 4SEO209PO-M-01 02IP09EISF BU 2x2x0.75 mm²	1RD 0.75 mm²	'	3	VT 1 mm²	-TA 511 08:10
/543.12	2R2:A	4LKF006AR/ 4SEO209PO-M-01 02IP09EISF BU 2x2x0.75 mm²	1WH 0.75 mm²	'	4	VT 1 mm²	-TA 511 08:11
				'	5		
				'	6		

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF006AR-X 544 04

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1	RD 1 mm²	-TA 512 08:9
					2	RD 1 mm²	-K 564 05:11
					3	RD 1 mm²	-S 544 09:13
					4		
					5	RD 1 mm²	-Q 515 05:31
					6	RD 1 mm²	-QB 512 09:43
					7	RD 1 mm²	-TA 512 08:17

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF006AR-X 546 09

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Terminal	Wiring	Target designation
				'		1	VT 1 mm²	-TA 512 08:3
				'		2	VT 1 mm²	-TA 512 08:4
				'		3		
				'		4		

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF006AR-X 547 04

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1	RD 1 mm²	-TA 513 08:9
					2	RD 1 mm²	-K 566 05:11
					3	RD 1 mm²	-S 547 09:13
					4		
					5	RD 1 mm²	-Q 517 05:31
					6	RD 1 mm²	-QB 513 09:21
					7	RD 1 mm²	-TA 513 08:17

Terminal diagram

Strip

=4LKF001AR+4LKF006AR-X 549 05

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
				'	1	VT 1 mm²	-TA 513 08:3
				'	2	VT 1 mm²	-TA 513 08:4
				'	3	VT 1 mm²	-TA 513 08:10
				'	4	VT 1 mm²	-TA 513 08:11
				'	5		
				'	6		

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF006AR-X 550 04

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1	RD 1 mm²	-TA 514 08:9
					2	RD 1 mm²	-K 568 05:11
					3	RD 1 mm²	-S 550 09:13
					4		
					5	RD 1 mm²	-Q 517 05:11
					6	RD 1 mm²	-QB 514 09:43
					7	RD 1 mm²	-TA 514 08:17

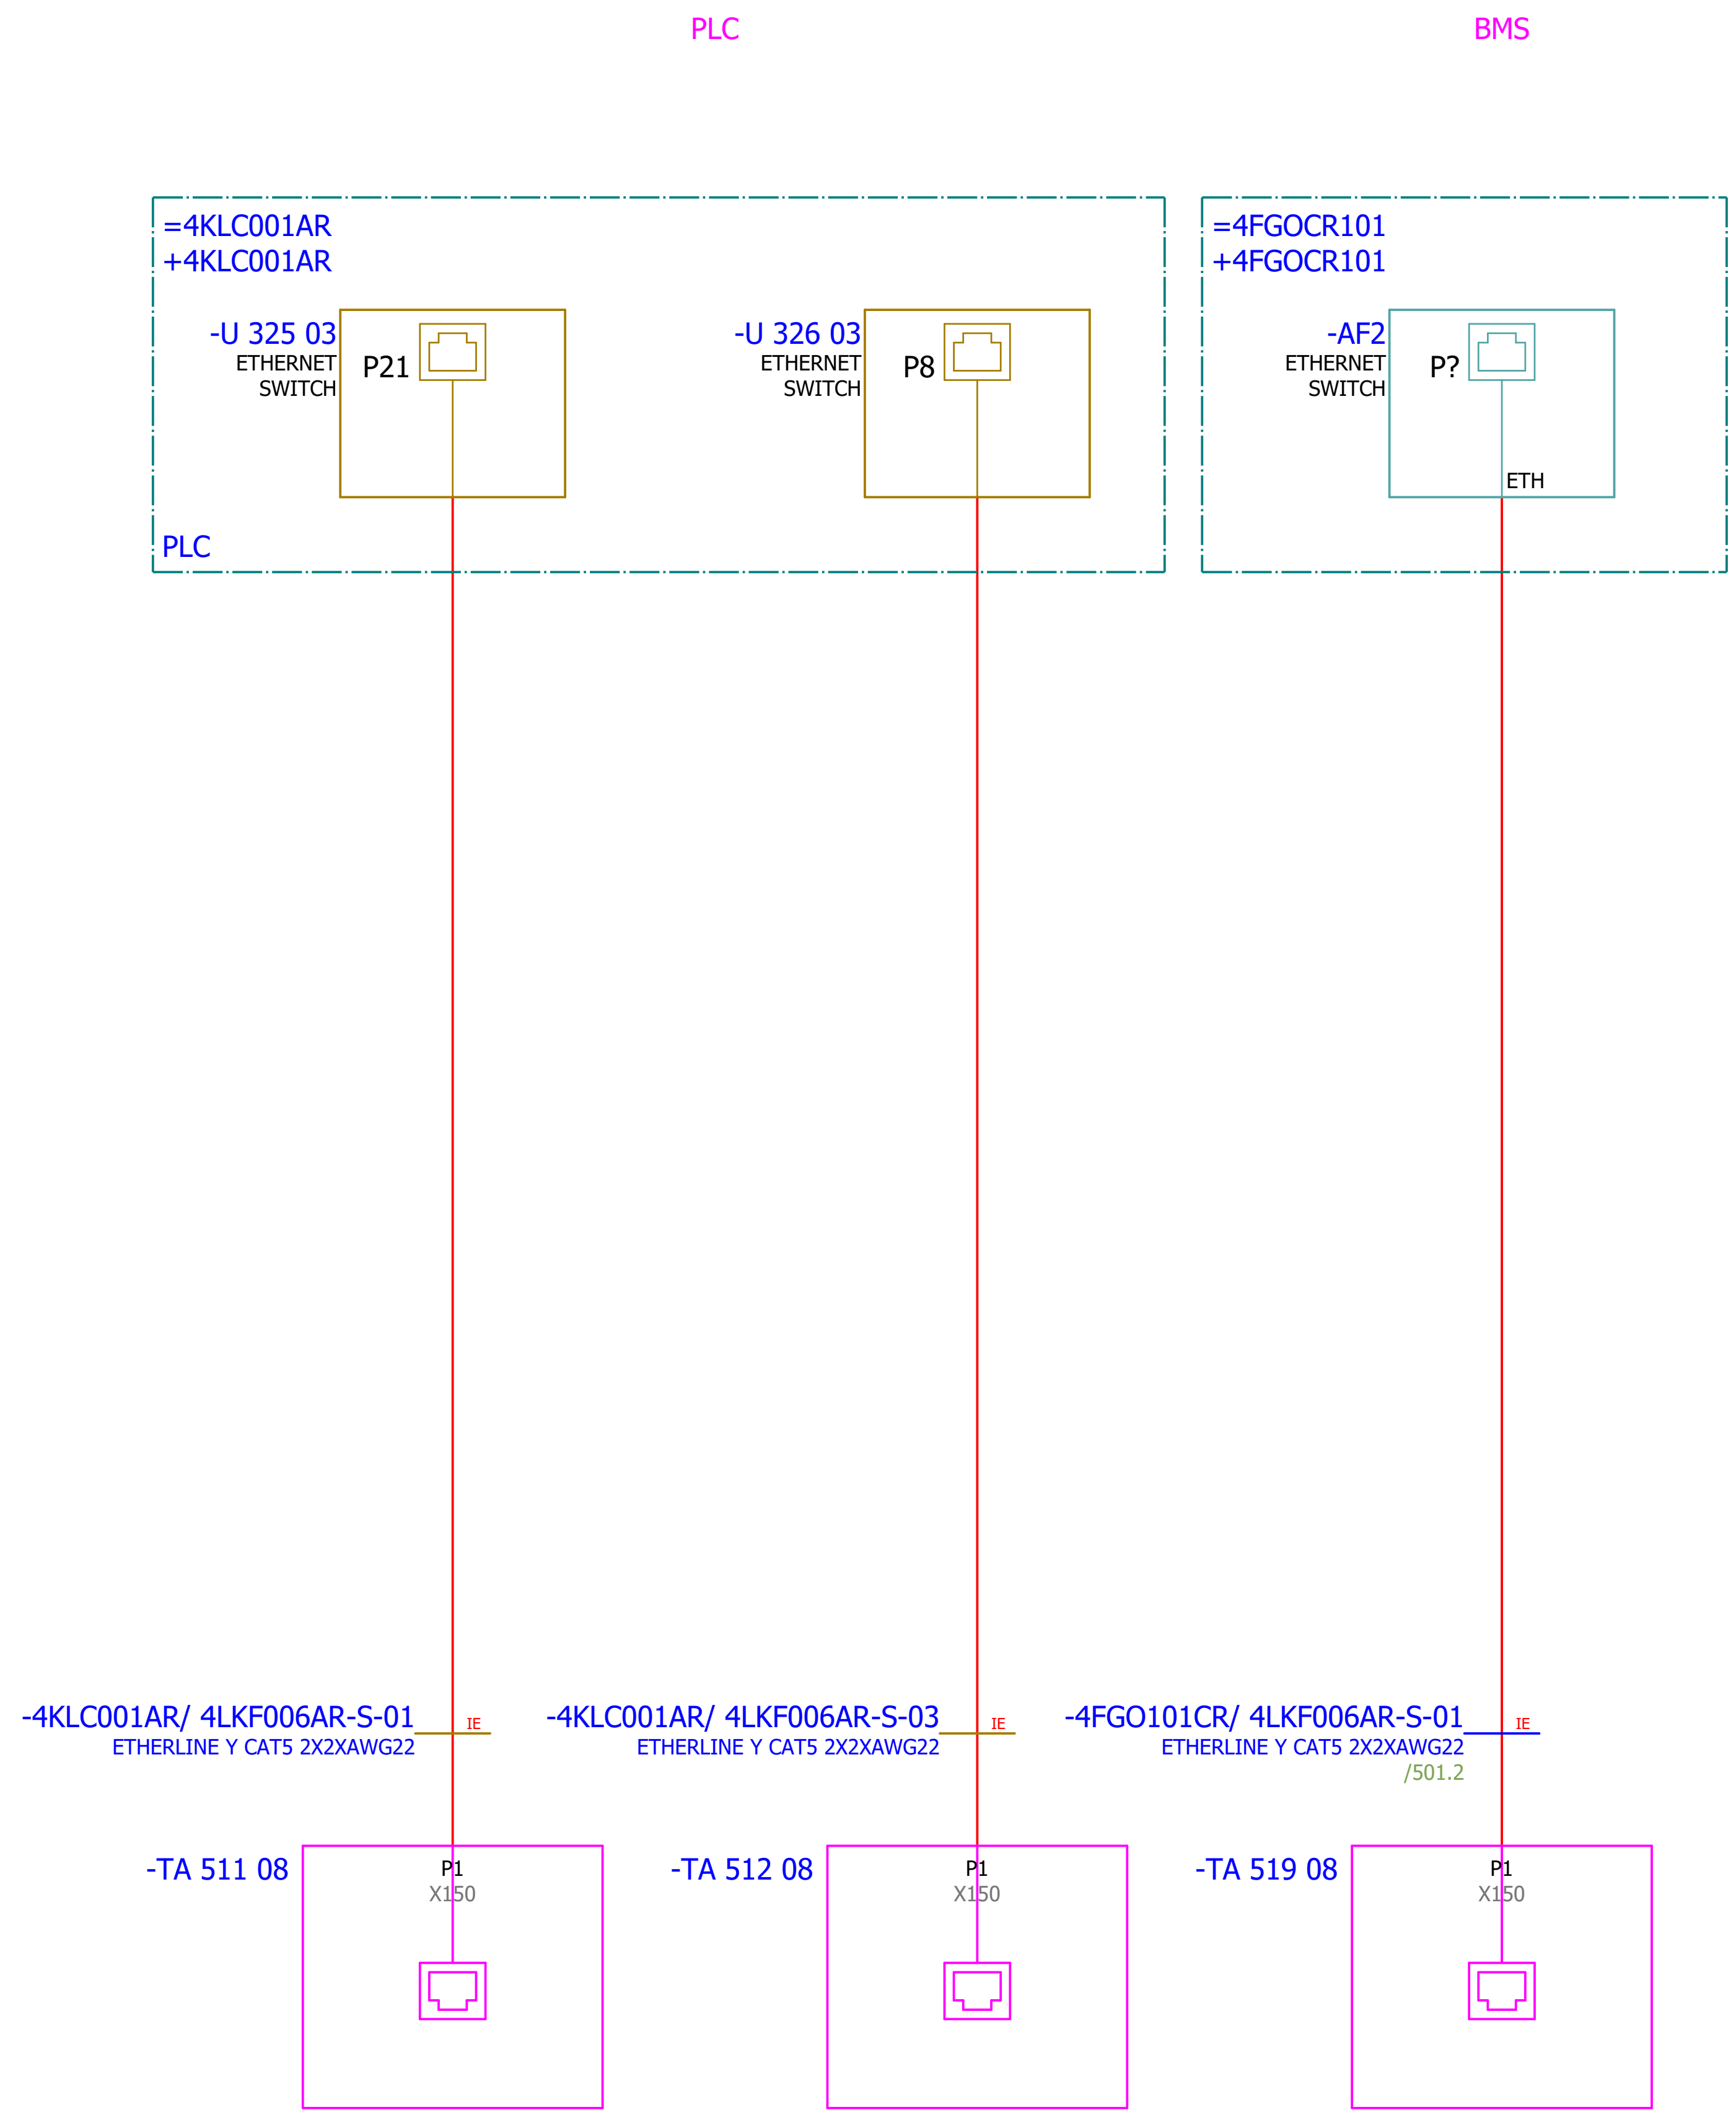

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević								#V
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content: VFD GROUP 1 - COMMUNICATION	Drawing designation: BRC-4-ATEP0-1870-F		=4LKF001AR	Sheet: 621
Format:	A3							+4LKF006AR	Next: 622

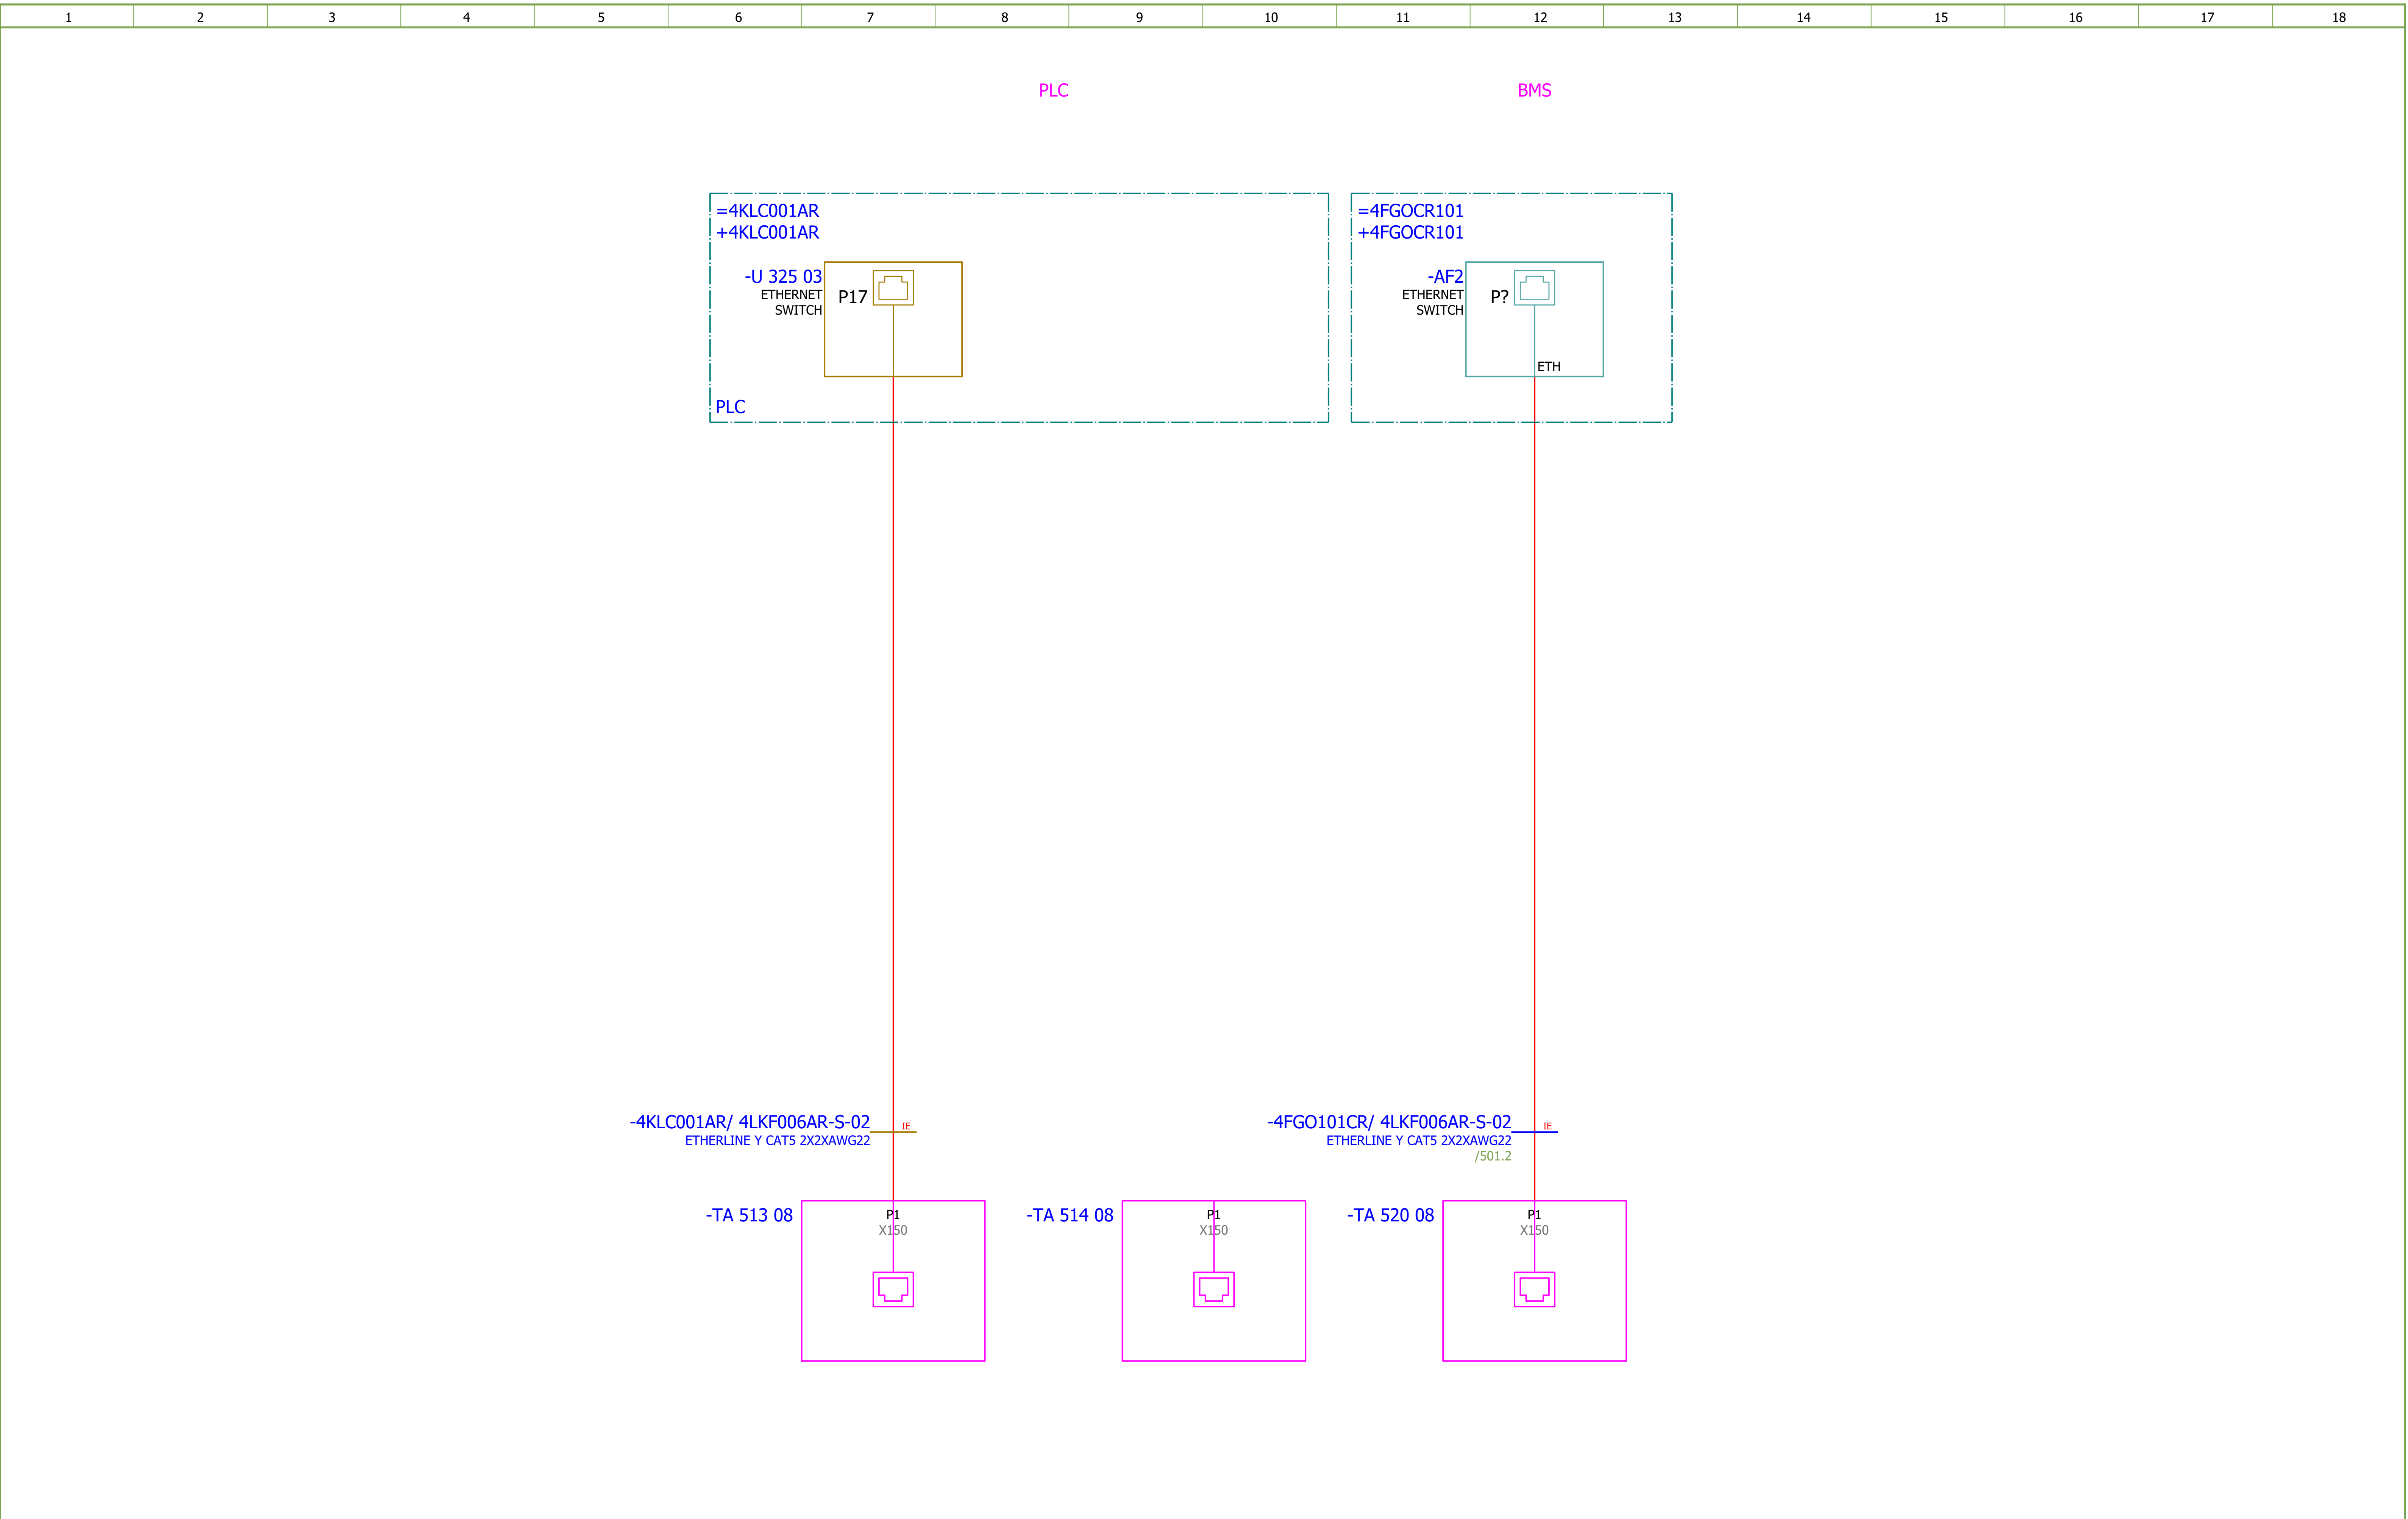

Date:	17.03.2026.	SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER/LOW VOLTAGE CABINET BOILER (EMERGENCY) 6	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1874	Revision: F
Drawn:	Luka Božičević									#V
Approved:	Grga Kolić		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	VFD GROUP 2 - COMMUNICATION	Drawing designation:	BRC-4-ATEP0-1870-F	=4LKF001AR	Sheet: 622
Format:	A3								+4LKF006AR	Next: 623

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF006AR-X 552 09

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Terminal	Wiring	Target designation
				'		1	VT 1 mm²	-TA 514 08:3
				'		2	VT 1 mm²	-TA 514 08:4
				'		3		
				'		4		

Terminal diagram

Strip

=4LKF001AR+4LKF006AR-X 553 08

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1	VT 1 mm²	-TA 511 08:86
					2	VT 1 mm²	-TA 511 08:85
					3	VT 1 mm²	-TA 512 08:86
					4	VT 1 mm²	-TA 512 08:85

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF006AR-X 554 08

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Terminal	Wiring	Target designation
				'		1		
				'		2		
				'		1	VT 1 mm²	-TA 513 08:86
				'		2	VT 1 mm²	-TA 513 08:85
				'		3	VT 1 mm²	-TA 514 08:86
				'		4	VT 1 mm²	-TA 514 08:85

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF006AR-X 555 04

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1	RD 1 mm²	-TA 519 08:9
					2	RD 1 mm²	-K 571 05:21
					3	RD 1 mm²	-S 555 09:13
/555.12	=4KLD002CQ+4KLD002CQ-X?:?:B	4LKF006AR/ 4KLD002CQ-C-06 U1000R2V 7G1.5 mm²	1 1.5 mm²		4		
					5	RD 1 mm²	-Q 515 05:21
					6	RD 1 mm²	-QB 519 09:43
/555.12	=4KLD002CQ+4KLD002CQ-X?:?:A	4LKF006AR/ 4KLD002CQ-C-06 U1000R2V 7G1.5 mm²	2 1.5 mm²		7	RD 1 mm²	-TA 519 08:17

Terminal diagram

Strip

A SIDE =4LKF001AR+4LKF006AR-X 557 09 B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/557.9		4KLD002CQ/ 4LKF006AR-M-03 04IP09EISF BU 4x2x0.88 mm²	3RD 0.88 mm²		1	VT 1 mm²	-TA 519 08:3
/557.9		4KLD002CQ/ 4LKF006AR-M-03 04IP09EISF BU 4x2x0.88 mm²	3WH 0.88 mm²		2	VT 1 mm²	-TA 519 08:4
					3		
					4		

Terminal diagram

A SIDE

Strip
=4LKF001AR+4LKF006AR-X 558 04

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1	RD 1 mm²	-TA 520 08:9
					2	RD 1 mm²	-K 572 05:21
					3	RD 1 mm²	-S 558 09:13
/558.12	=4KLD002CQ+4KLD002CQ-X?:?:B	4LKF006AR/ 4KLD002CQ-C-06 U1000R2V 7G1.5 mm²	3 1.5 mm²		4		
					5	RD 1 mm²	-Q 517 05:21
					6	RD 1 mm²	-QB 520 09:43
/558.12	=4KLD002CQ+4KLD002CQ-X?:?:A	4LKF006AR/ 4KLD002CQ-C-06 U1000R2V 7G1.5 mm²	4 1.5 mm²		7	RD 1 mm²	-TA 520 08:17

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF006AR-X 560 09

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Wiring	Target designation
/560.9		4KLD002CQ/ 4LKF006AR-M-03 04IP09EISF BU 4x2x0.88 mm²	4RD 0.88 mm²	'	1	VT 1 mm²	-TA 520 08:3
/560.9		4KLD002CQ/ 4LKF006AR-M-03 04IP09EISF BU 4x2x0.88 mm²	4WH 0.88 mm²	'	2	VT 1 mm²	-TA 520 08:4
				'	3		
				'	4		

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF006AR-X 569 05

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/569.5	=4FGO003CA+4FGO003CA-X?:?:A	4LKF006AR/ 4FGO003CA-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²		1	WH 1 mm²	-RP 585 12:13
/570.5	=4KLD002CQ+4KLD002CQ-X?:?:B	4LKF006AR/ 4KLD002CQ-C-05 U1000R2V 7G1.5 mm²	1 1.5 mm²		2	WH 1 mm²	-S 555 09:34
/570.5	=4KLD002CQ+4KLD002CQ-X?:?:A	4LKF006AR/ 4KLD002CQ-C-05 U1000R2V 7G1.5 mm²	2 1.5 mm²		3	WH 1 mm²	-K 571 05:A1
/570.8	=4FGO003CA+4FGO003CA-X?:?:A	4LKF006AR/ 4FGO003CA-C-01 U1000R2V 5G1.5 mm²	BU 1.5 mm²		4	WH 1 mm²	-K 571 05:14
/570.8	=4FGO003CA+4FGO003CA-X?:?:B	4LKF006AR/ 4FGO003CA-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²		5	WH 1 mm²	-S 555 09:44
					6	WH 1 mm²	-K 571 05:11

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF006AR-X 571 05

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/571.5	=4FGO004CA+4FGO004CA-X?:?:A	4LKF006AR/ 4FGO004CA-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²		1	WH 1 mm²	-RP 585 12:23
/572.5	=4KLD002CQ+4KLD002CQ-X?:?:B	4LKF006AR/ 4KLD002CQ-C-05 U1000R2V 7G1.5 mm²	3 1.5 mm²		2	WH 1 mm²	-S 558 09:34
/572.5	=4KLD002CQ+4KLD002CQ-X?:?:A	4LKF006AR/ 4KLD002CQ-C-05 U1000R2V 7G1.5 mm²	4 1.5 mm²		3	WH 1 mm²	-K 572 05:A1
/572.8	=4FGO004CA+4FGO004CA-X?:?:A	4LKF006AR/ 4FGO004CA-C-01 U1000R2V 5G1.5 mm²	BU 1.5 mm²		4	WH 1 mm²	-K 572 05:14
/572.8	=4FGO004CA+4FGO004CA-X?:?:B	4LKF006AR/ 4FGO004CA-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²		5	WH 1 mm²	-S 558 09:44
					6	WH 1 mm²	-K 572 05:11

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF006AR-X 585 04

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Wiring	Target designation
					1	WH 1 mm²	-Q 585 04:2
					2	WH 1 mm²	-RP 585 04:A1
					3	GY 1 mm²	-Q 585 04:4
					4	GY 1 mm²	-RP 585 04:A2

Terminal diagram

Strip

A SIDE =4LKF001AR+4LKF006AR-X 591 04 B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1		
					2	RD 1 mm²	-K 542 09:21
					3	RD 1 mm²	-K 545 09:21
					4		
					5		
					6	RD 1 mm²	-K 542 09:24
					7	RD 1 mm²	-RP 561 11:44
					8	RD 1 mm²	-K 545 09:24
					9	RD 1 mm²	-RP 563 11:44
					10		

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF006AR-X 595 04

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					1		
					2	RD 1 mm²	-K 548 09:21
					3	RD 1 mm²	-K 551 09:21
					4		
					5		
					6	RD 1.5 mm²	-K 548 09:24
					7	RD 1 mm²	-RP 565 11:44
					8	RD 1 mm²	-K 551 09:24
					9	RD 1 mm²	-RP 567 11:44
					10		

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Terminal diagram

Strip

=4LKF001AR+4LKF006AR-X 599 04

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
=4KLD002CQ+4KLD002CQ/109.2	=4KLD002CQ+4KLD002CQ-X 043 14:3:A	4KLD002CQ/ 4LKF006AR-C-03 U1000R2V 7G1.5 mm²	1 1.5 mm²		1		
					2	RD 1 mm²	-K 556 09:11
					3	RD 1 mm²	-K 559 09:11
					4		
					5		
=4KLD002CQ+4KLD002CQ/109.2	=4KLD002CQ+4KLD002CQ-X 043 14:16:A	4KLD002CQ/ 4LKF006AR-C-03 U1000R2V 7G1.5 mm²	2 1.5 mm²		6	RD 1 mm²	-K 556 09:14
=4KLD002CQ+4KLD002CQ/109.4	=4KLD002CQ+4KLD002CQ-X 043 14:17:A	4KLD002CQ/ 4LKF006AR-C-03 U1000R2V 7G1.5 mm²	3 1.5 mm²		7	RD 1 mm²	-RP 569 11:44
=4KLD002CQ+4KLD002CQ/109.6	=4KLD002CQ+4KLD002CQ-X 043 14:18:A	4KLD002CQ/ 4LKF006AR-C-03 U1000R2V 7G1.5 mm²	4 1.5 mm²		8	RD 1 mm²	-K 559 09:14
=4KLD002CQ+4KLD002CQ/109.8	=4KLD002CQ+4KLD002CQ-X 043 14:19:A	4KLD002CQ/ 4LKF006AR-C-03 U1000R2V 7G1.5 mm²	5 1.5 mm²		9	RD 1 mm²	-RP 571 11:44
					10		

Terminal diagram

Strip

A SIDE =4LKF001AR+4LKF006AR-X 611 03 B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/553.12	=4KLD002CQ+4KLD002CQ-X 044 03:A	4KLD002CQ/ 4LKF006AR-M-03 04IP09EISF BU 4x2x0.88 mm²	1RD 0.88 mm²	'	1	VT 1 mm²	-TA 519 08:86
/554.12	=4KLD002CQ+4KLD002CQ-X 044 07:A	4KLD002CQ/ 4LKF006AR-M-03 04IP09EISF BU 4x2x0.88 mm²	2RD 0.88 mm²	'	3	VT 1 mm²	-TA 520 08:86
				'	5		
/553.13	=4KLD002CQ+4KLD002CQ-X 044 03:A	4KLD002CQ/ 4LKF006AR-M-03 04IP09EISF BU 4x2x0.88 mm²	1WH 0.88 mm²	'	2	VT 1 mm²	-TA 519 08:85
/554.13	=4KLD002CQ+4KLD002CQ-X 044 07:A	4KLD002CQ/ 4LKF006AR-M-03 04IP09EISF BU 4x2x0.88 mm²	2WH 0.88 mm²	'	4	VT 1 mm²	-TA 520 08:85
				'	6		
				'	7		
				'	8		
				'	9		
				'	10		
				'	11		
				'	5		

Terminal diagram

Strip

=4LKF001AR+4LKF006AR-X 611 04

A SIDE | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					7		
					8		
					9		
/611.2	-PE		GNYE 2.5 mm²		1	5 1.5 mm²	=4KLD002CQ+4KLD002CQ-X
					2	6 1.5 mm²	=4KLD002CQ+4KLD002CQ-X
					3		
					4		
					5	5 1.5 mm²	=4KLD002CQ+4KLD002CQ-X
/611.3	7				6	6 1.5 mm²	=4KLD002CQ+4KLD002CQ-X

Terminal diagram

A SIDE

Strip
=4LKF001AR+4LKF006AR-X 611 08

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Terminal	Wiring	Target designation
				'		5		
				'		6		
				'		7		
				'		8		
				'		9		
				'		10		
				'		11		
				'		12		

Terminal diagram

A SIDE

Strip

=4LKF001AR+4LKF006AR-X 612 03

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					9		
					10		
					11		
					12		
					13		
					14		
					15		
/612.2	-PE		GNYE 2.5 mm²		1		
					2		
					3		
					4		
					5		
					6		
					7		
/612.3	9				8		

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF006AR-XA 515 05

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Terminal	Wiring	Target designation
				'		1	BN 2.5 mm²	-Q 515 05:1
				'		1		
				'		2	BN 2.5 mm²	-Q 515 05:3
				'		2		

Terminal diagram

Strip

A SIDE | =4LKF001AR+4LKF006AR-XA 517 05 | B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Terminal	Wiring	Target designation
				'		1	BN 2.5 mm²	-Q 517 05:1
				'		1		
				'		2	BN 2.5 mm²	-Q 517 05:3
				'		2		

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF006AR-XB 516 05

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper		Terminal	Wiring	Target designation
				'		1	WH 2.5 mm²	-Q 516 05:1
				'		1		
				'		2	WH 2.5 mm²	-Q 516 05:3
				'		2		

Terminal diagram

Strip

=4LKF001AR+4LKF006AR-XB 518 05

A SIDE

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
				'	1	WH 2.5 mm²	-Q 518 05:1
				'	1		
				'	2	WH 2.5 mm²	-Q 518 05:3
				'	2		

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF006AR-XB 592 03

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					5	WH 1 mm²	-R 592 05:M
					6	WH 1 mm²	-R 592 10:P
					1	GY 1 mm²	-X 516 05:19:B
					2	GY 1 mm²	-X 516 05:21:B
					3		
					4		

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF006AR-XB 596 03

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
					5	WH 1 mm²	-R 596 05:M
					6	WH 1 mm²	-R 596 10:P
					1	GY 1 mm²	-X 518 05:19:B
					2	GY 1 mm²	-X 518 05:21:B
					3	GY 1 mm²	-XB 600 03:1:A
					4		

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

Terminal diagram

Strip

A SIDE

=4LKF001AR+4LKF006AR-XB 600 03

B SIDE

Placement	Target designation	Cable name and type	Conductor	Jumper	Terminal	Wiring	Target designation
/596.3	-XB 596 03:3:B		GY 1 mm²	•	1	GY 1 mm²	-HL 602 06:2
				•	2	GY 1 mm²	-HL 601 06:2
						GY 1 mm²	-X 518 05:20:B
				•	3		
				•	4		