

Unit 2 Turbine Unit 2 TIV Unit 2 Cooling water system (Closed) Unit 2 Cooling water system (Open) Unit 2 Lubrication system Unit 2 HPU																
1	2	3	4	5	6	7	8									
13,8kV Auxiliary services feeder 13,8kV Unit 1 generator feeder 13,8kV Unit 2 generator feeder 13,8kV Step-up transformer feeder 13,8/115kV Step-up transformer																
Main auxiliary services transformer SYSTEM/EQUIPMENT Backup auxiliary services transformer Powerhouse diesel generator Auxiliary 480/208V transformer Intake step-up transformer		DEVICE		DOCUMENT		CIRCUIT DIAGRAM INDEX		WIRE AND CABLE COLOURS								
+0CJA01 Control Común +1CJA01 Unidad 1 Control Y Protección +2CJA01 Unidad 2 Control Y Protección +0CHG01 Cubículo De Protección De Subestación Exterior +0AYH01 Cubículo SCADA +0BFA01 Cubículo De Suministro CA Principal +0BFA11 Cubículo De Suministro CA Auxiliar +1BFA01 MCC Unidad 1 +2BFA01 MCC Unidad 2 +0BVB01 Cubículo De Suministro CC Auxiliar +1MKA10 Generador Unidad 1 +1MEA10 Turbina Unidad 1 +1MEB10 Válvula TIV Unidad 1 +1PAC10 Sistema De Agua De Enfriamiento Unidad 1 (Cerrado) +1MEW10 Sistema De Agua De Enfriamiento Unidad 1 (Abierto) +1MKV10 Sistema De Lubricación Unidad 1 +1MEX10 HPU Unidad 1 +2MKA10 Generador Unidad 2 +2MEA10 Turbina Unidad 2 +2MEB10 Válvula TIV Unidad 2 +2PAC10 Sistema De Agua De Enfriamiento Unidad 2 (Cerrado) +2MEW10 Sistema De Agua De Enfriamiento Unidad 2 (Abierto) +2MKV10 Sistema De Lubricación Unidad 2 +2MEX10 HPU Unidad 2 +0AKA01 Alimentador Servicios Auxiliares 13,8 kV +0AKA02 Alimentador Generador Unidad 1 13,8 kV +0AKA03 Alimentador Generador Unidad 2 13,8 kV +0AKA04 Alimentador Transformador Elevador 13,8 kV =0ATA01 Transformador Elevador 13,8/115 kV =0BFT01 Transformador Principal De Servicios Auxiliares =0BFT02 Transformador De Respaldo De Servicios Auxiliares =0XKA01 Generador Diésel De Casa De Máquinas =0BFT11 Transformador Auxiliar 480/208 V =0BFT21 Transformador Elevador De Toma De Agua		A - Assemblies, subassemblies B - Coniuntos, subconjuntos C - Transducers from non-electric to electric quantities or vice versa D - Transductores de magnitudes no eléctricas a eléctricas o viceversa E - Capacitors F - Binary elements G - Elementos binarios H - Miscellaneous I - Misceláneos J - Protective devices K - Generators, power supplies L - Dispositivos de protección M - Generadores, fuentes de alimentación N - Signaling devices O - Dispositivos de señalización P - Relays, contactors Q - Relés, contactores R - Inductors, reactors S - Inductores, reactores T - Motors U - Motores V - Amplifiers, controllers W - Amplificadores, controladores X - Measuring instruments, test equipment Y - Instrumentos de medición, equipos de prueba Z - Switching devices for power circuits 100..199 - Dispositivos de conmutación para circuitos de potencia 200..299 - Resistors 300..399 - Resistencias 400..499 - Switches for control circuits, selectors 500..599 - Interruptores para circuitos de control, selectores Transformers Moduladores Moduladores Tubes, semiconductors Transmission paths, cables, busbars, antennas Vías de transmisión, cables, barras colectoras, antenas Terminals, plugs, sockets Terminales, enchufes, tomas de corriente Electrically operated mechanical devices Terminales, enchufes, tomas de corriente Terminations, hybrid transformers, filters, equilizers, limiters Terminaciones, transformadores híbridos, filtros, ecualizadores, limitadores Station services Servicios de la estación Control Control Protection Protección Measuring Medición Freely disposable Libremente desechable		001...099 - Text documents, chapters 100...999 - Drawings: Block-diagrams, Single line diagrams, General arrangement drawings, Circuit diagrams, Cubicle layouts, Cable lists, cable core lists, Grounding and lightning, Unassigned drawings, Documents of text, capítulos Dibujos: Diagramas de bloques, Diagramas unifilares, Dibujos de disposición general, Diagramas de circuitos, Disposiciones de cubículos, Dibujos asignados a cubículos, Listas de cables, Listas de núcleos de cables, Conexión a tierra y pararrayos, Dibujos no asignados,		A - Indexes, title sheet, document list B - Índices, hoja de título, lista de documentos C - Function diagrams D - Diagramas de funciones E - Designation code F - Código de designación G - AC power supply (heating, lighting voltage distribution, fuses...) H - Alimentación CA (calefacción, distribución de tensión de iluminación, fusibles...) I - DC power supply (voltage distribution...) J - Fuente de alimentación CC (distribución de tensión...) K - Signaling devices L - Dispositivos de señalización M - Operating mechanisms for switching devices (circuit breakers, disconnectors...) N - Mecanismos de funcionamiento para dispositivos de conmutación (interruptores, seccionadores...) O - Control (local, remote, station...) P - Protection (local, remoto, estación...) Q - Interlocking R - Enclavamiento S - Position indication (local, remote, station...) T - Indicación de posición (local, remota, estación...) U - Alarm (signaling, monitoring...) V - Alarma (señalización, monitorización...) W - Instruments transformers circuits (measuring, protection...) X - Circuitos transformadores de instrumentación (medición, protección...) Y - station... unless under "S") Z - Medición (estación local, remota...) Feedback control (voltage regulator...) Control de retroalimentación (regulador de voltaje...) Communication Comunicación Wiring diagrams, terminal matrix Diagramas de cableado, matriz de terminales Cable list, cable core list Lista de cables, lista de núcleos de cables Equipment documents for "C" to "W" Documentos de equipo para "C" a "W"		BK - Black BN - Brown RD - Red OG - Orange YE - Yellow GN - Green BU - Blue VT - Violet GY - Grey WH - White PK - Pink TO - Turquoise GNYE - Green yellow BK - Negro BN - Marrón RD - Rojo OG - Naranja YE - Amarillo GN - Verde BU - Azul VT - Violeta GY - Gris WH - Blanco PK - Rosa TO - Turquesa GNYE - Verde amarillo								
System and equipment in this project are designated according to KKS process related identification: (Total plant+System code+ Equipment unit code+Component code) Los sistemas y equipos de este proyecto se designan según la identificación relacionada con el proceso KKS: (Planta total + Código del sistema + Código de la unidad del equipo + Código del componente)																
Date:	2026-03-11	 A Voith Company	Client:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Scope of design:	Unit 2 control and protection cubicle	Project:	24028-DD	Folder:	EE-06 EE-06	Drawing:	221 221	Revision:	00 00		
Drawn:	Karlo Čotić			Object:	PCH NARE Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia PCH NARE	Content:	DESIGNATION CODES	Drawn:	24028-DD-EE-06-221				=2CJA01		#C	
Approved:	Patrik Kovač															
Format:	A4													+2CJA01		Sheet: 2 Next: 3



LEYENDA DE SÍMBOLOS / SYMBOLS LEGEND								
Ident. Ident.	Símbolos Symbols	Descripción Description	Ident. Ident.	Símbolos Symbols	Descripción Description	Ident. Ident.	Símbolos Symbols	Descripción Description
-		Contactos auxiliares (símbolo genérico) <i>Auxiliary contacts (generic symbol)</i>	-FU	*	Dispositivo de protec. contra sobretensiones <i>Surge protection device</i>	-T		Transformador <i>Transformer</i>
-		Bobina (símbolo genérico) <i>Relay (generic symbol)</i>	-H		Luz piloto <i>Pilot light</i>	-U	*	Rectificador, amplificador de aislamiento, switch ethernet <i>Rectifier, isolation amplifier, ethernet switch</i>
-		Punto de conexión PLC <i>PLC connection point</i>	-K		Bobina, Relé <i>Coil, Relay</i>			Convertidor de señal <i>Signal converter</i>
-		Conector enchufable <i>Plug in bridge</i>			Relé de bloqueo rápido <i>Fast lockout relay</i>	-V	*	Módulo de diodos <i>Diode module</i>
-		Motor general (símbolo genérico) <i>Motor general (generic symbol)</i>		*	Relé de vigilancia <i>Monitoring relay</i>	-X		Toma de corriente para cuadro de distribución <i>Power outlet for distribution panel</i>
-A	*	Equipo PLC, dispositivo de control de transferencia <i>PLC equipment, transfer control device</i>	-P		Dispositivo de medición <i>Measuring device</i>			Terminal (símbolo genérico) <i>Terminal (generic symbol)</i>
-B		Higrostat <i>Hygrostat</i>	-PE		Punto de conexión de dispositivo PE <i>PE device connection point</i>	-XF		Borne interrump. para circ. medida <i>Test disconnect terminal</i>
	*	Batería recargable, sensores <i>Rechargeable battery, sensors</i>	-Q		Interruptor de potencia, tripolar (característica L, I) <i>Power switch, three-pole (characteristic L, I)</i>		*	Toma de prueba <i>Test socket</i>
		Termostato <i>Thermostat</i>						
			-R		Resistencia deslizante, resistencia variable, resistencia, calefactor <i>Sliding resistor, variable resistor, resistor, heater</i>			
-E		Iluminación de cubículos <i>Cubicle lighting</i>	-S		Interruptor de límite, contactos NA y NC <i>Limit switch, NO and NC contacts</i>			
-F		Disyuntor miniatura <i>Miniature circuit breaker</i>			Interruptor de llave / pulsador, contacto NA <i>Key switch / push button, NO contact</i>			
		Disyuntor de protección del motor <i>Motor Protection Circuit Breaker</i>			Interruptor de leva giratorio <i>Rotary cam switch</i>			
		Fusible <i>Fuse</i>			Interruptor de leva giratorio <i>Selector switch</i>			
	*	Dispositivo de protección <i>Protection devices</i>			Interruptor de apagado <i>Shut-off switch</i>			
		Interruptor diferencial con protección contra sobrecorriente <i>Residual current breaker with overcurrent protection</i>			Interruptor de accionamiento man., pulsador. <i>Switch manually operated, push-button</i>			
					Interruptor / pulsador, contacto NC <i>Switch / push button, NC contact</i>			
		Disyuntor de protección de transformador (símbolo genérico) <i>Transformer protection circuit breaker (generic symbol)</i>						

LEYENDA DE CONEXIONES / CONNECTIONS LEGEND	
Símbolos Symbols	Descripción Description
	Barra colectora de fase <i>Phase busbar</i>
	Barra neutra <i>Neutral busbar</i>
	Barra colectora de tierra <i>Ground busbar</i>
	Alambre <i>Wire</i>
	Conectar el puente <i>Wire ground</i>
	Cable <i>Cable</i>
	Shield <i>Shield</i>
	Cable con pantalla <i>Cable with shielding</i>

* Nota: Para estos dispositivos se utilizan símbolos diferentes a los de la norma IEC 60617.
* Note: Different symbols than IEC 60617 are used for these devices.


Según IEC 60617


According to IEC 60617

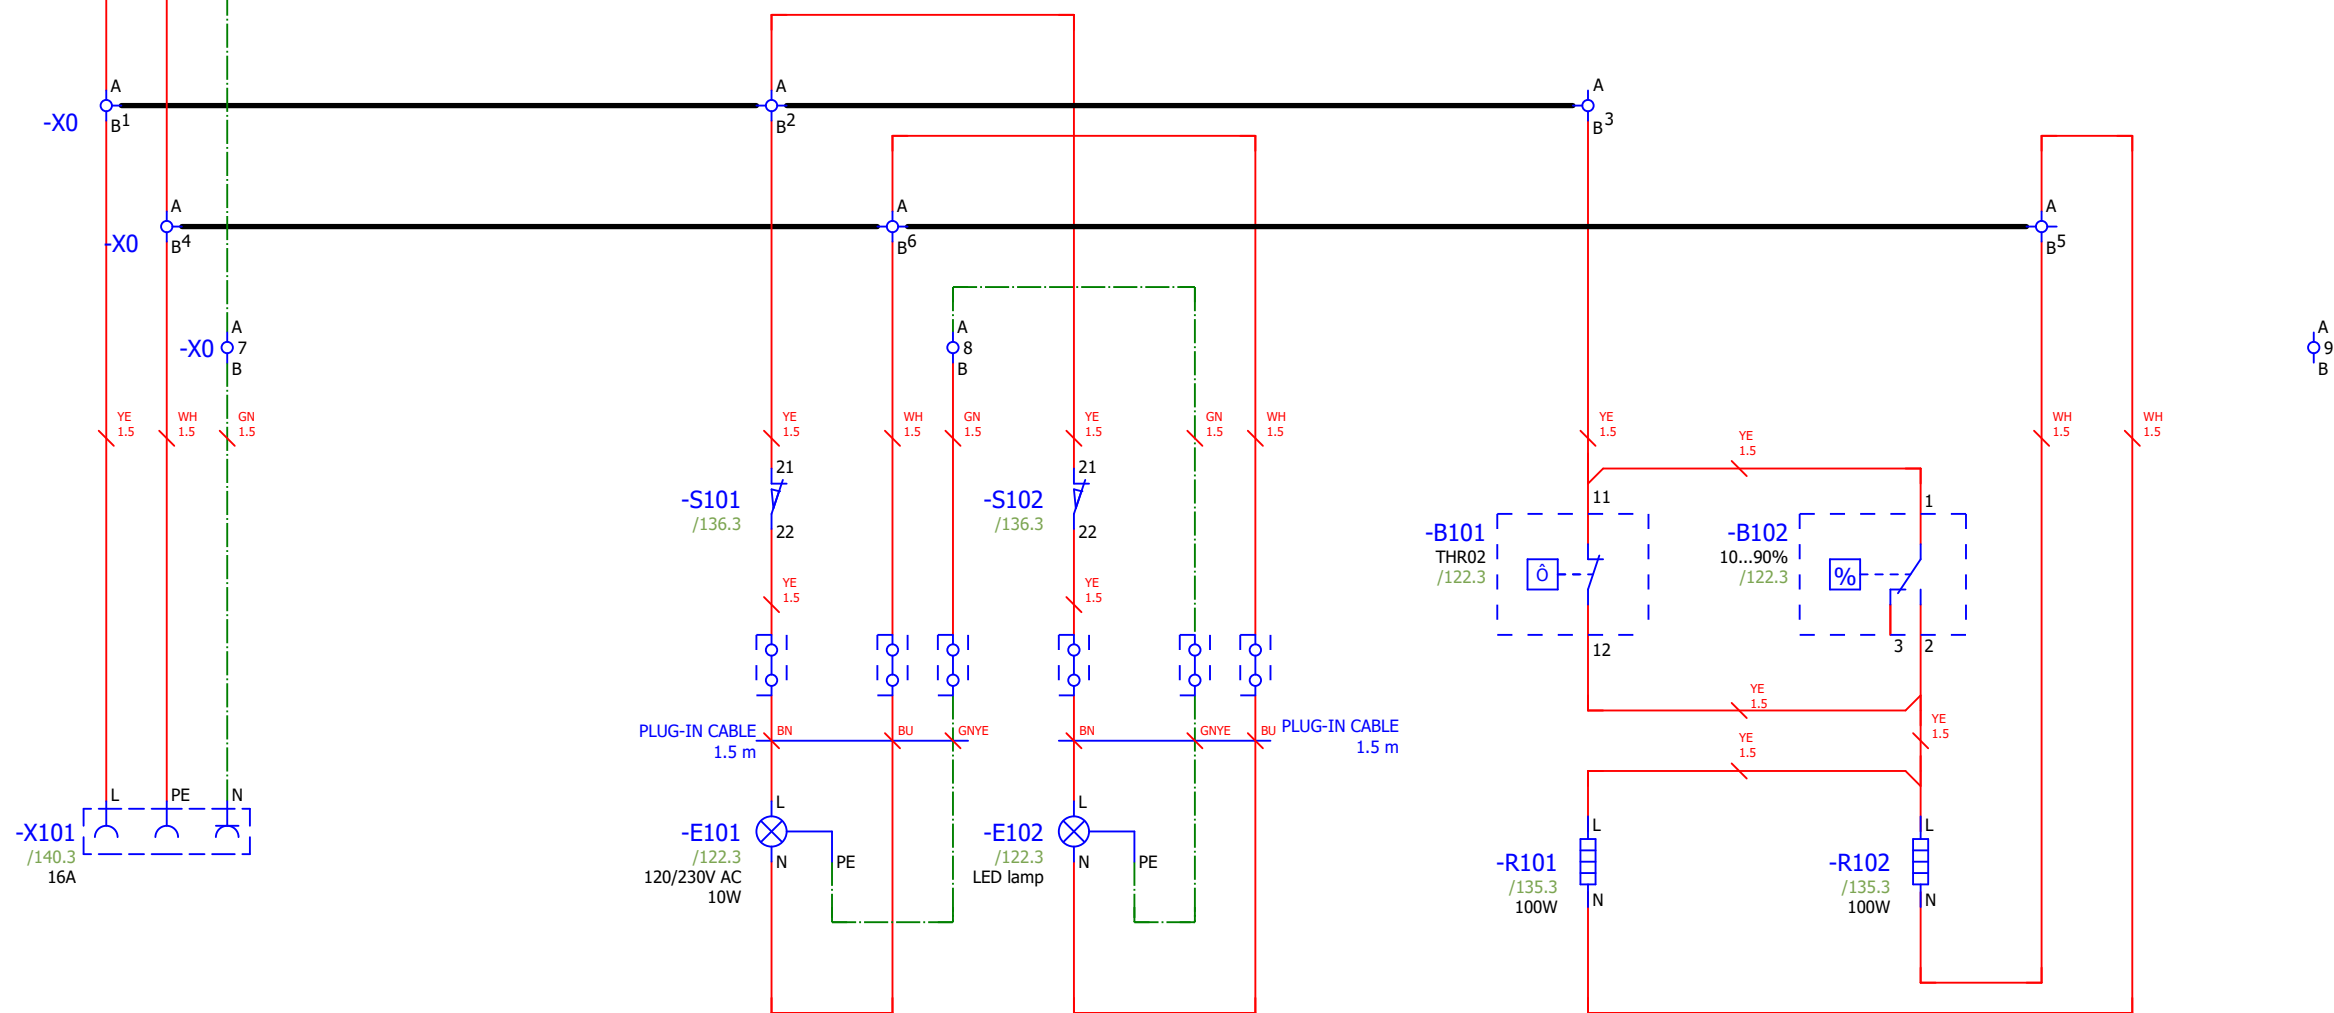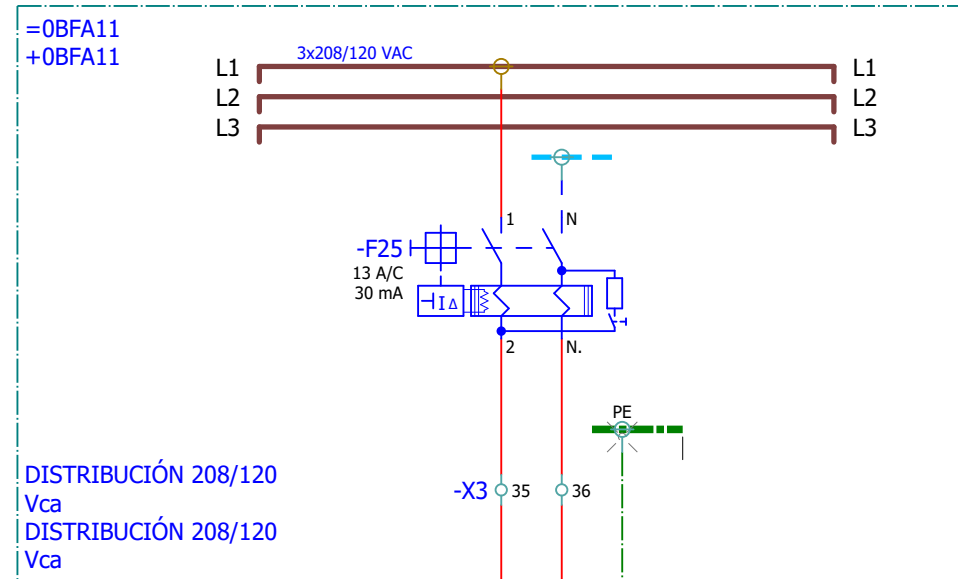



Thermostat setting: 15 °C


Hygrostat setting: 65 %

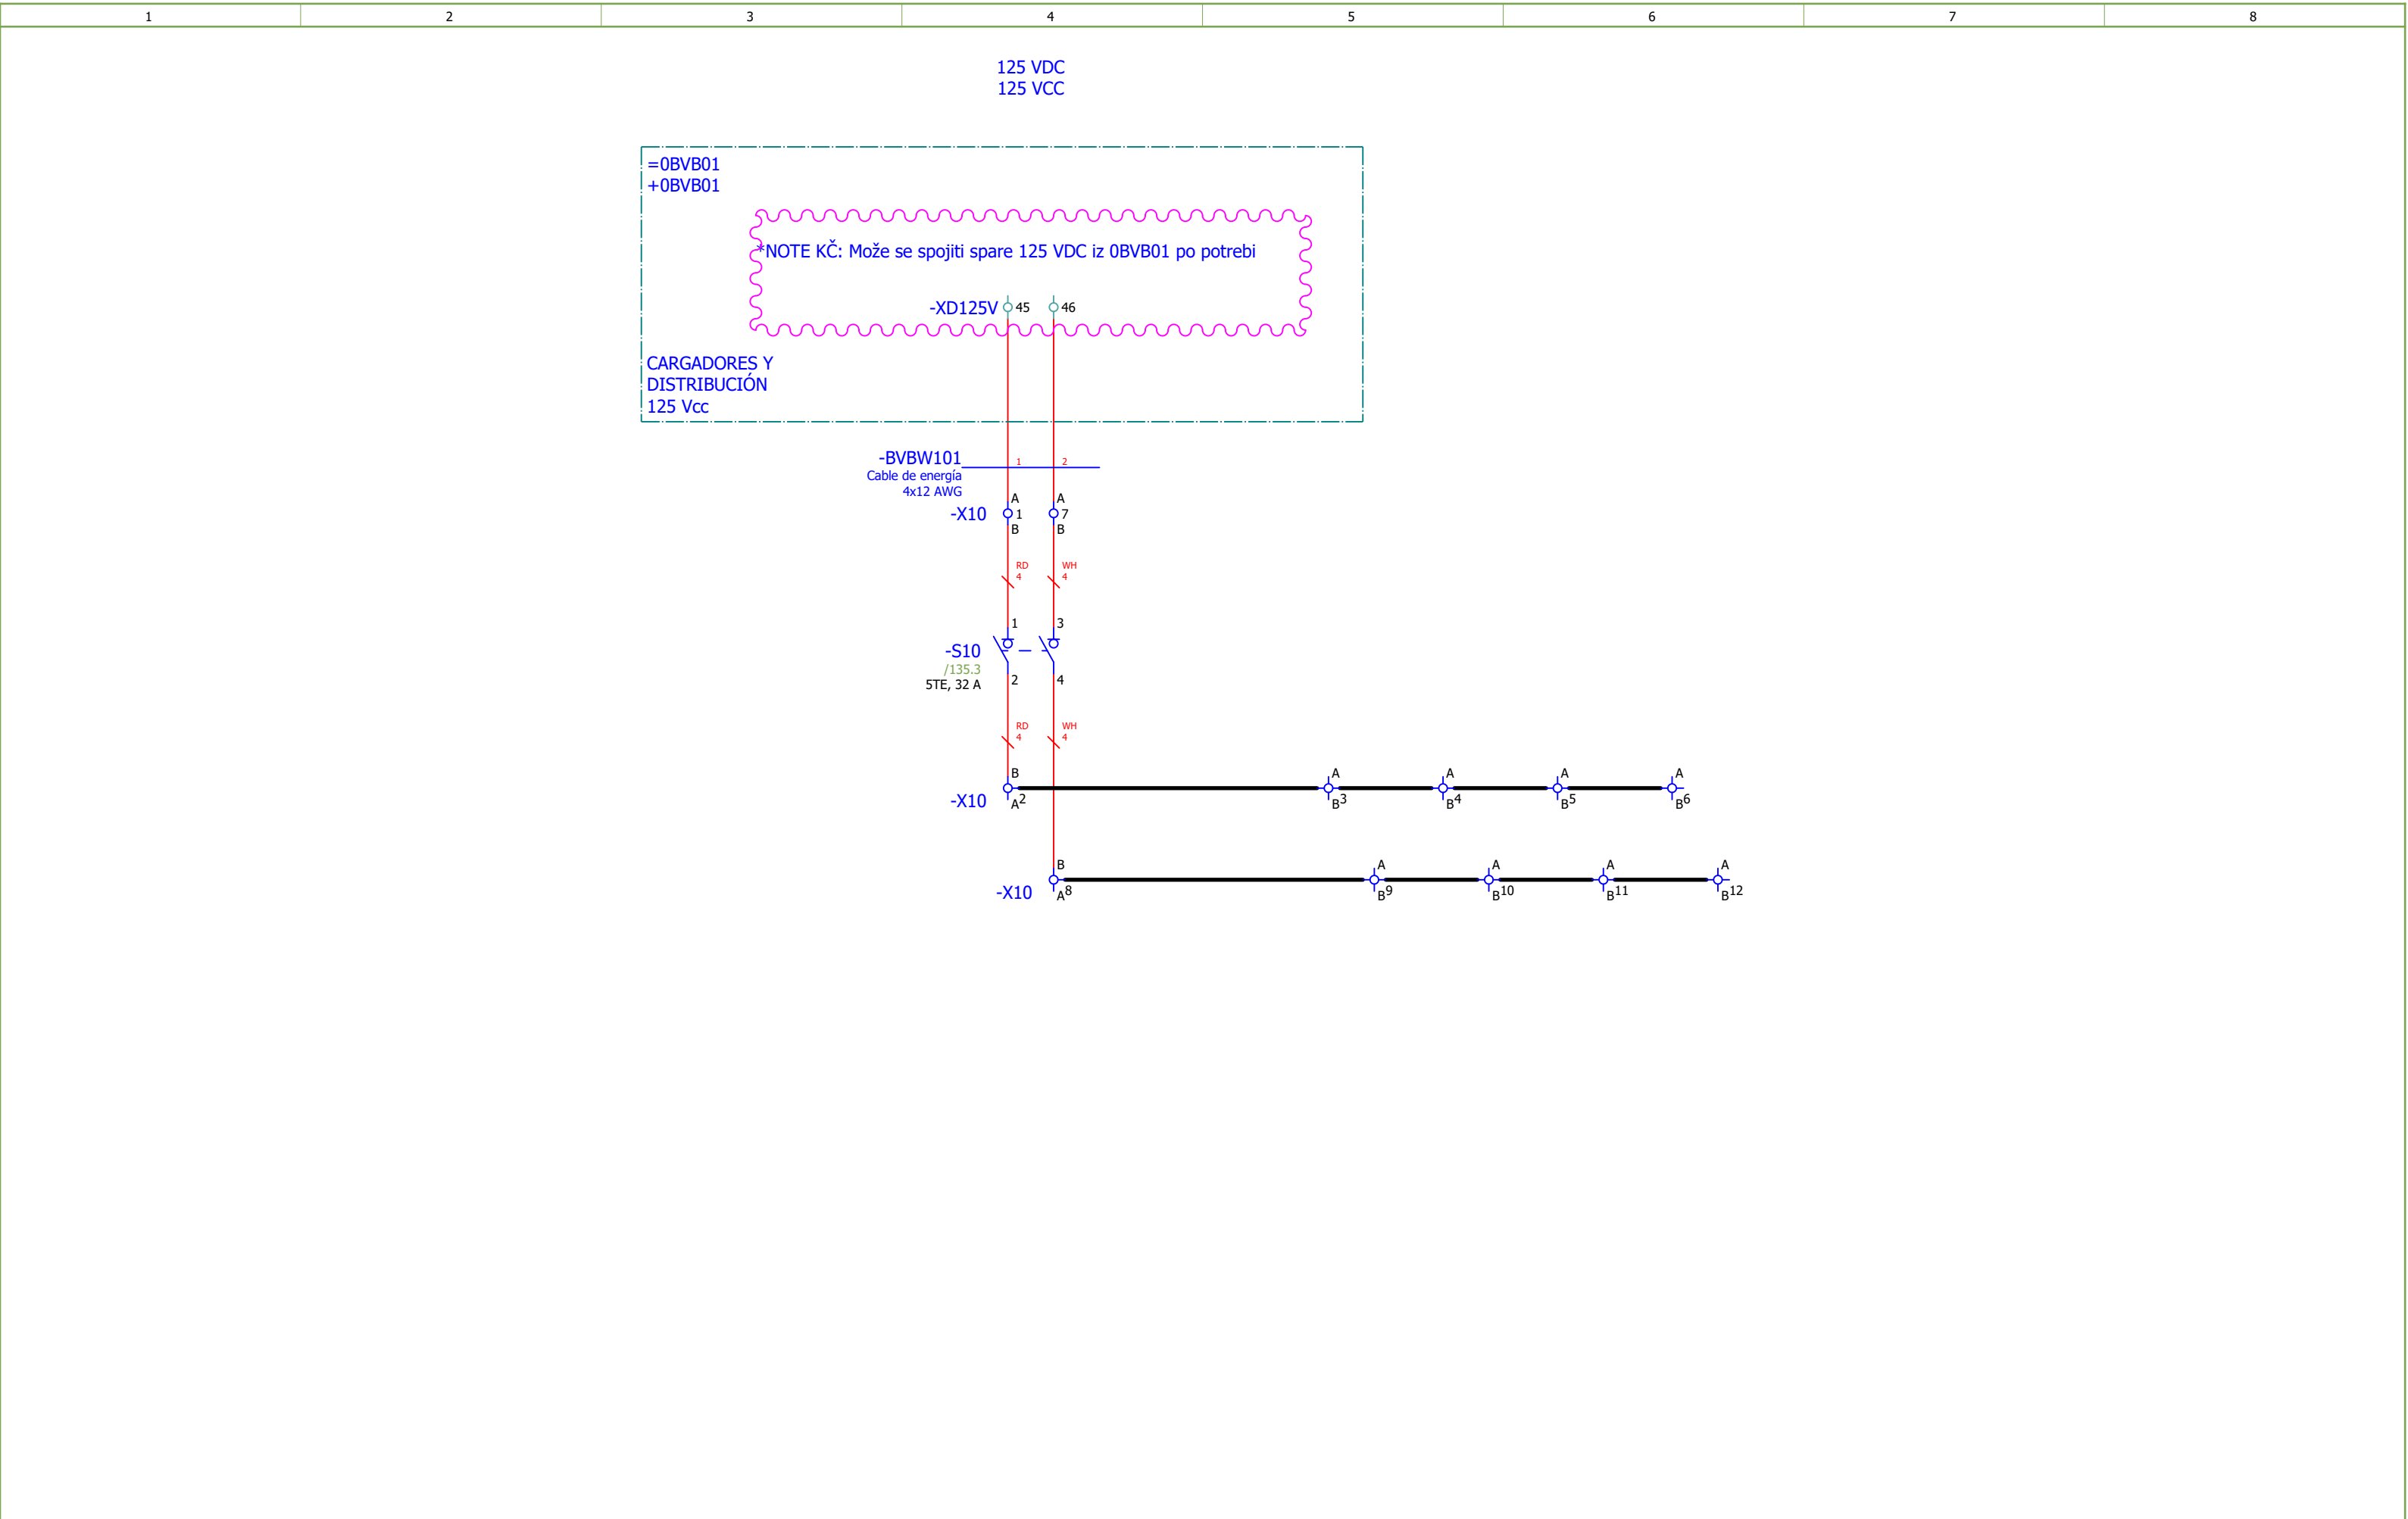


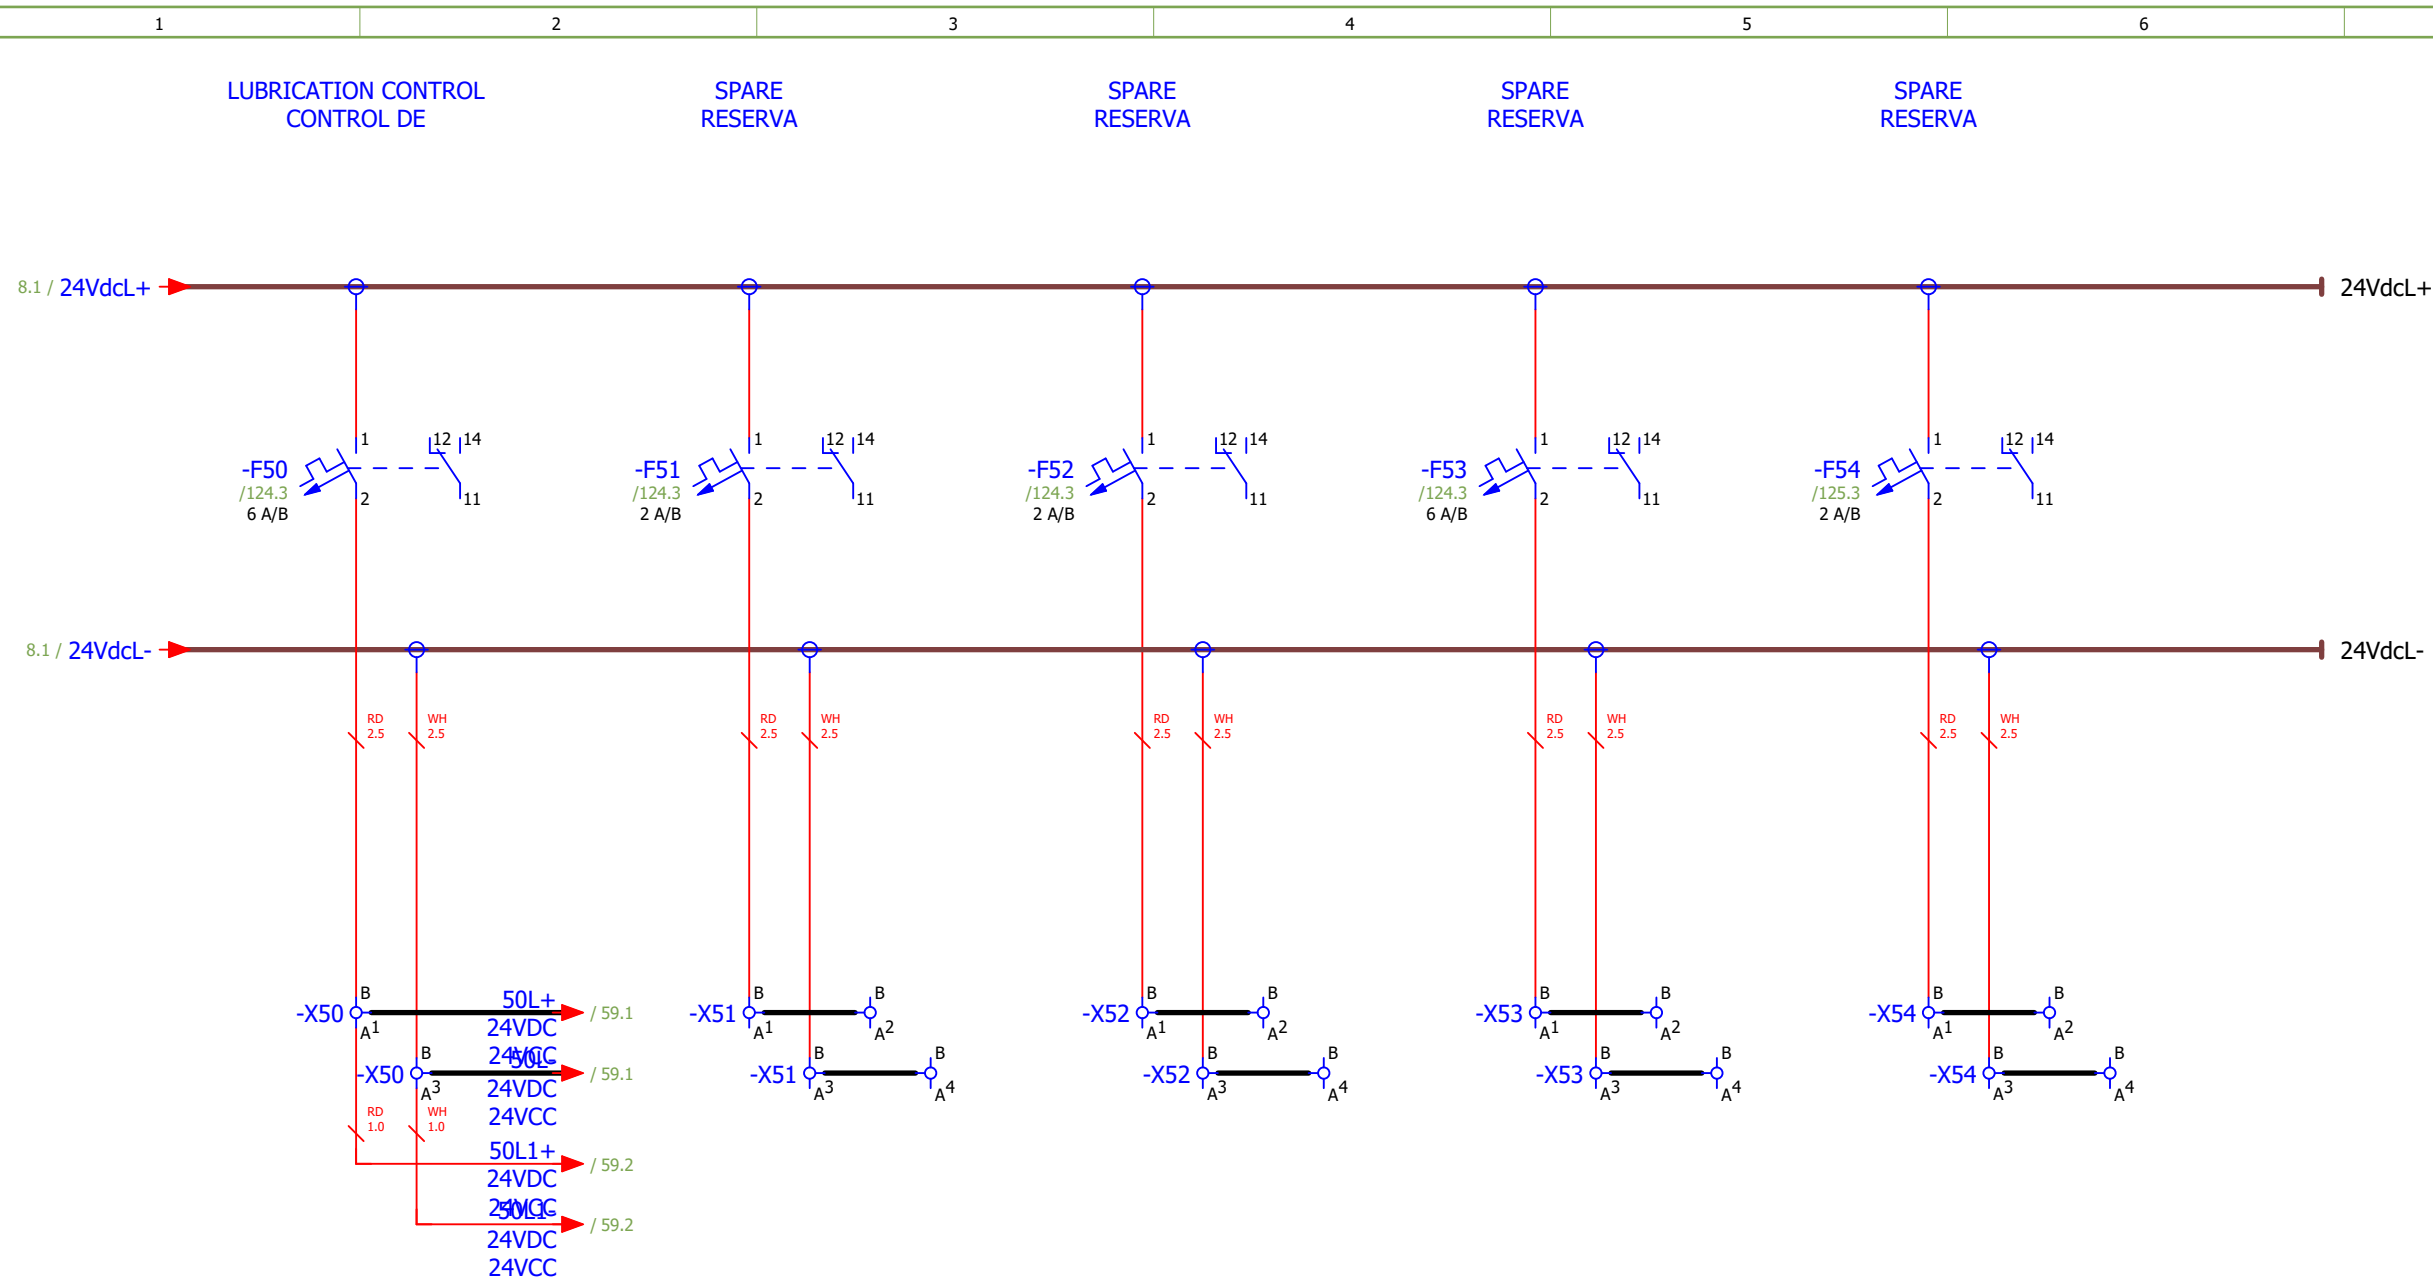


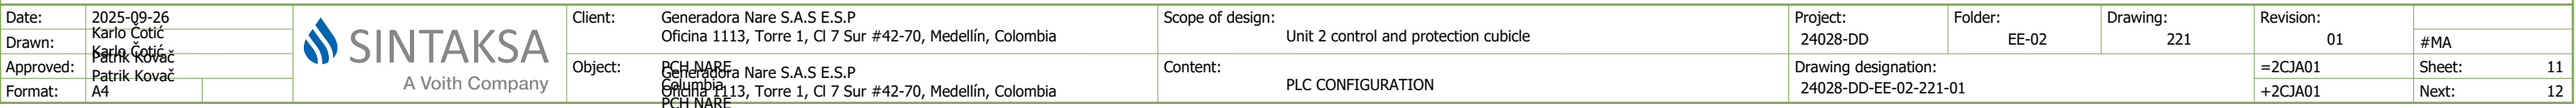





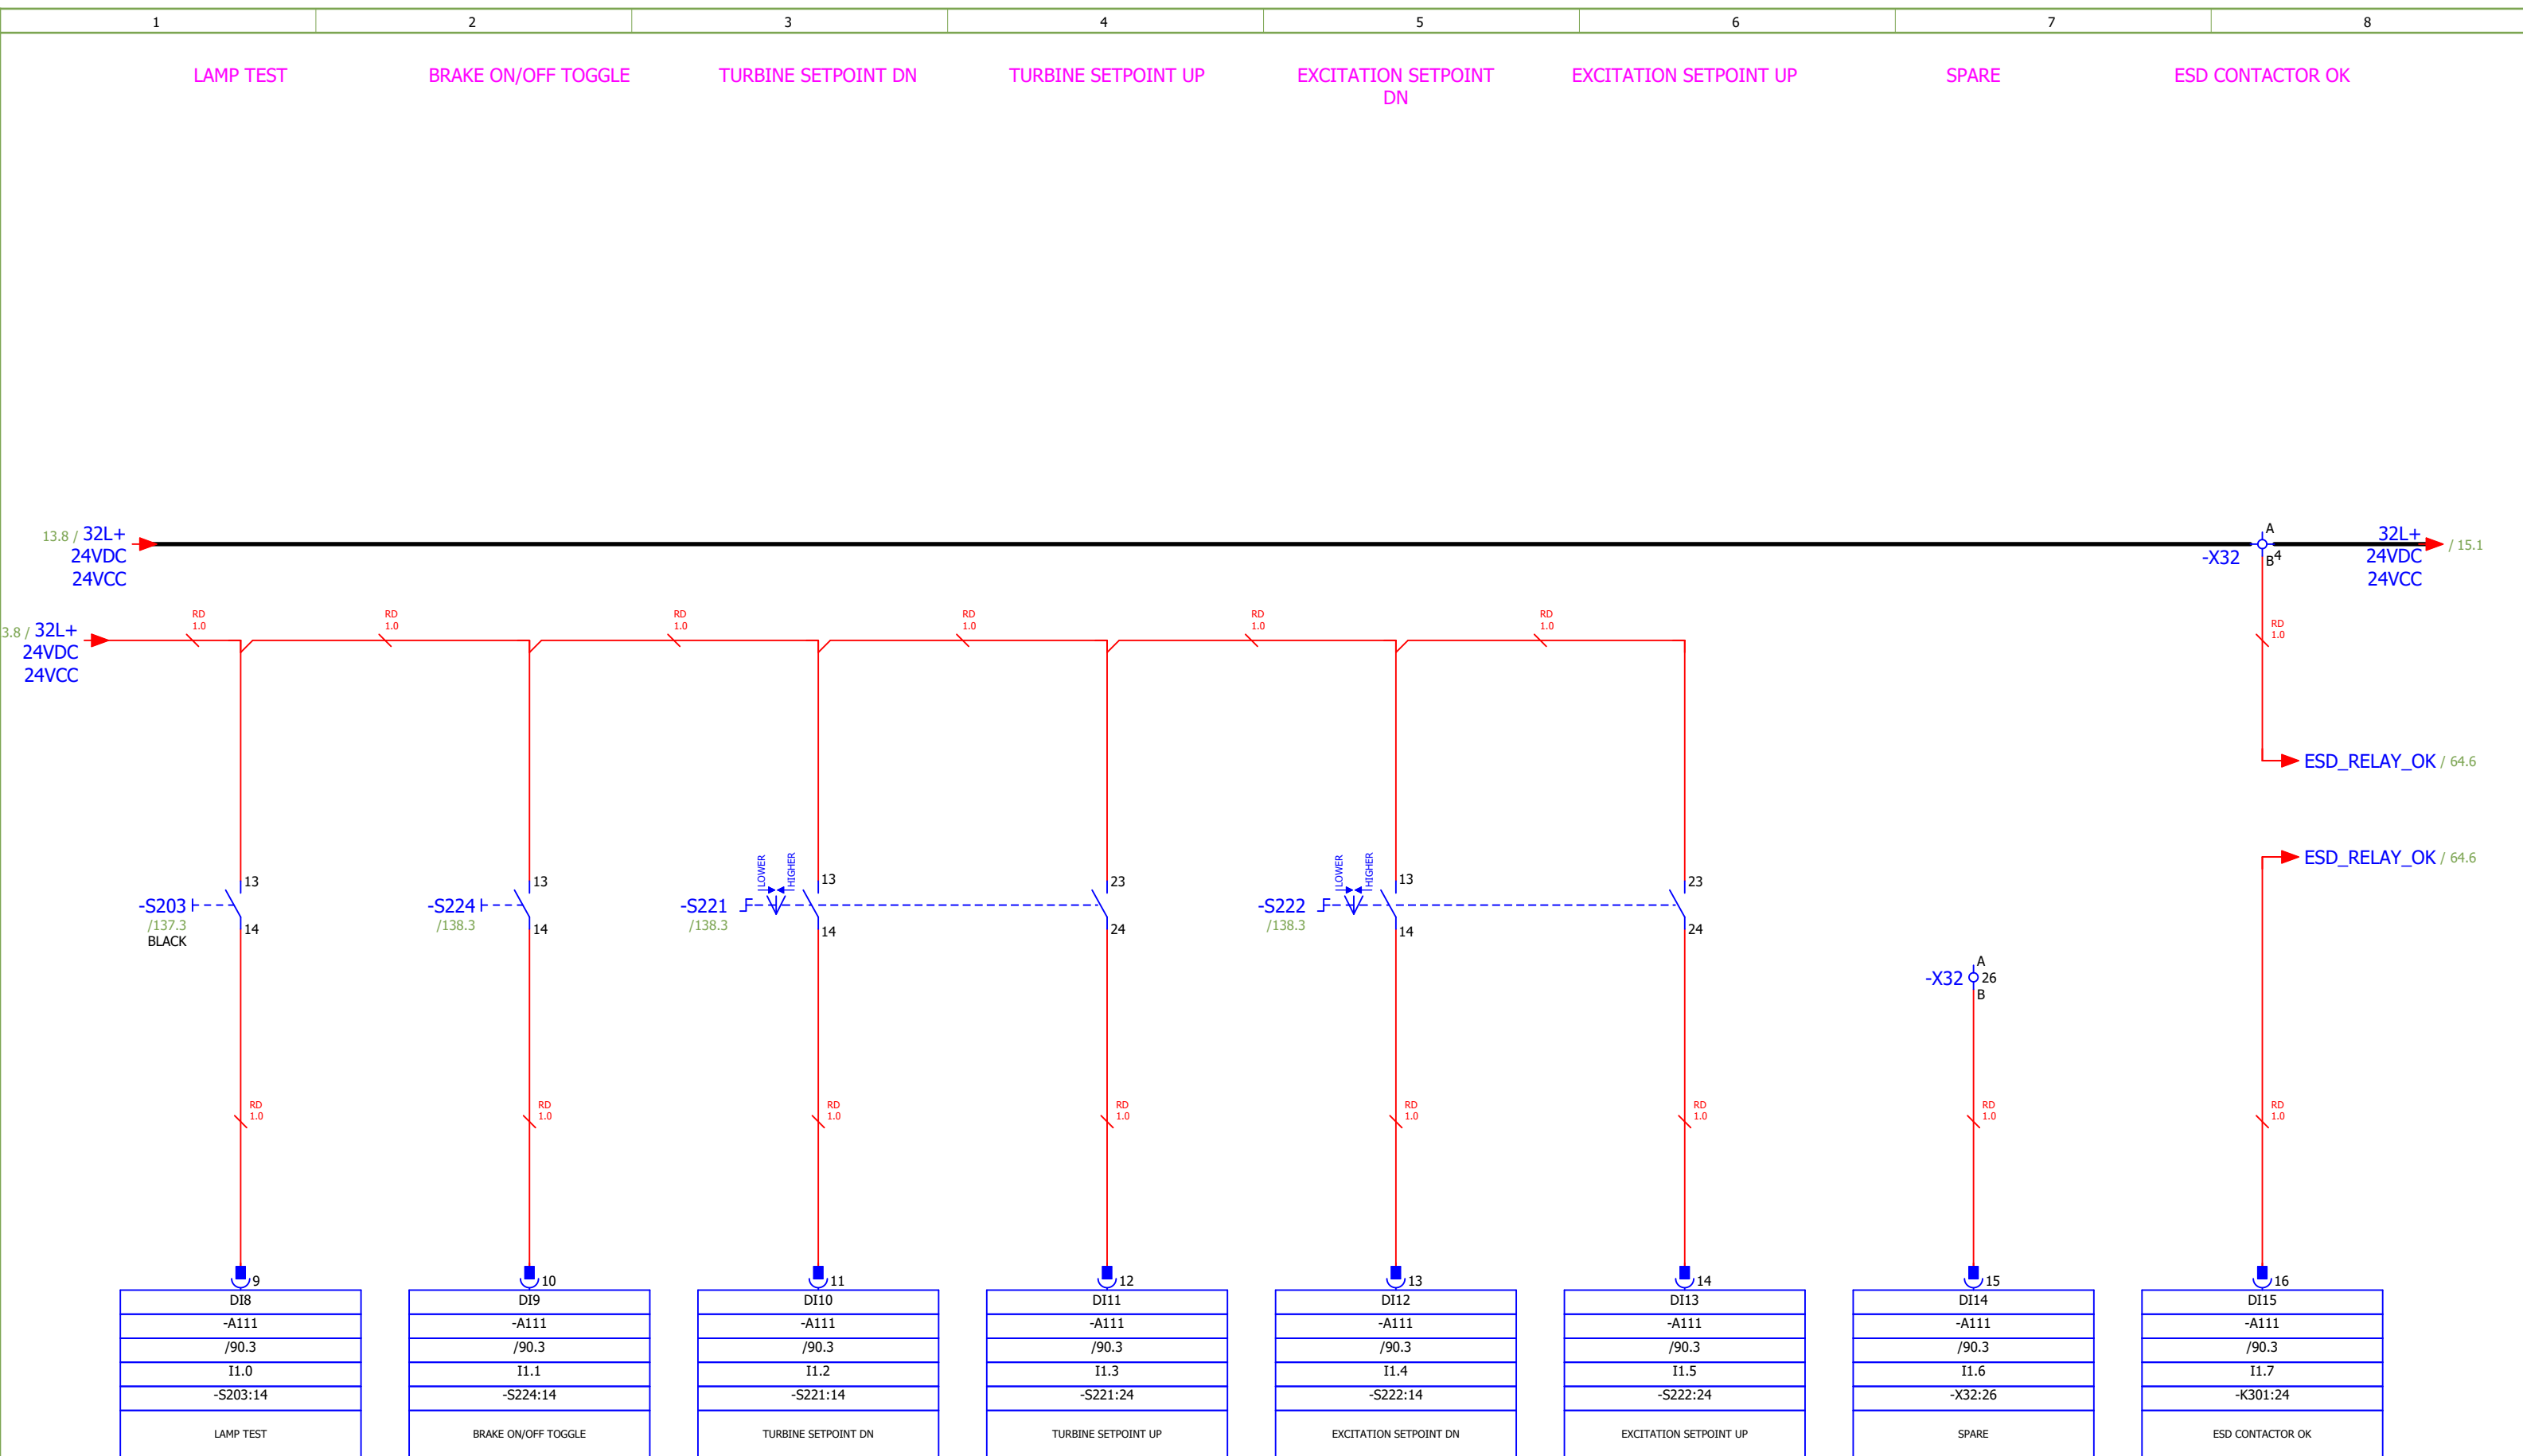


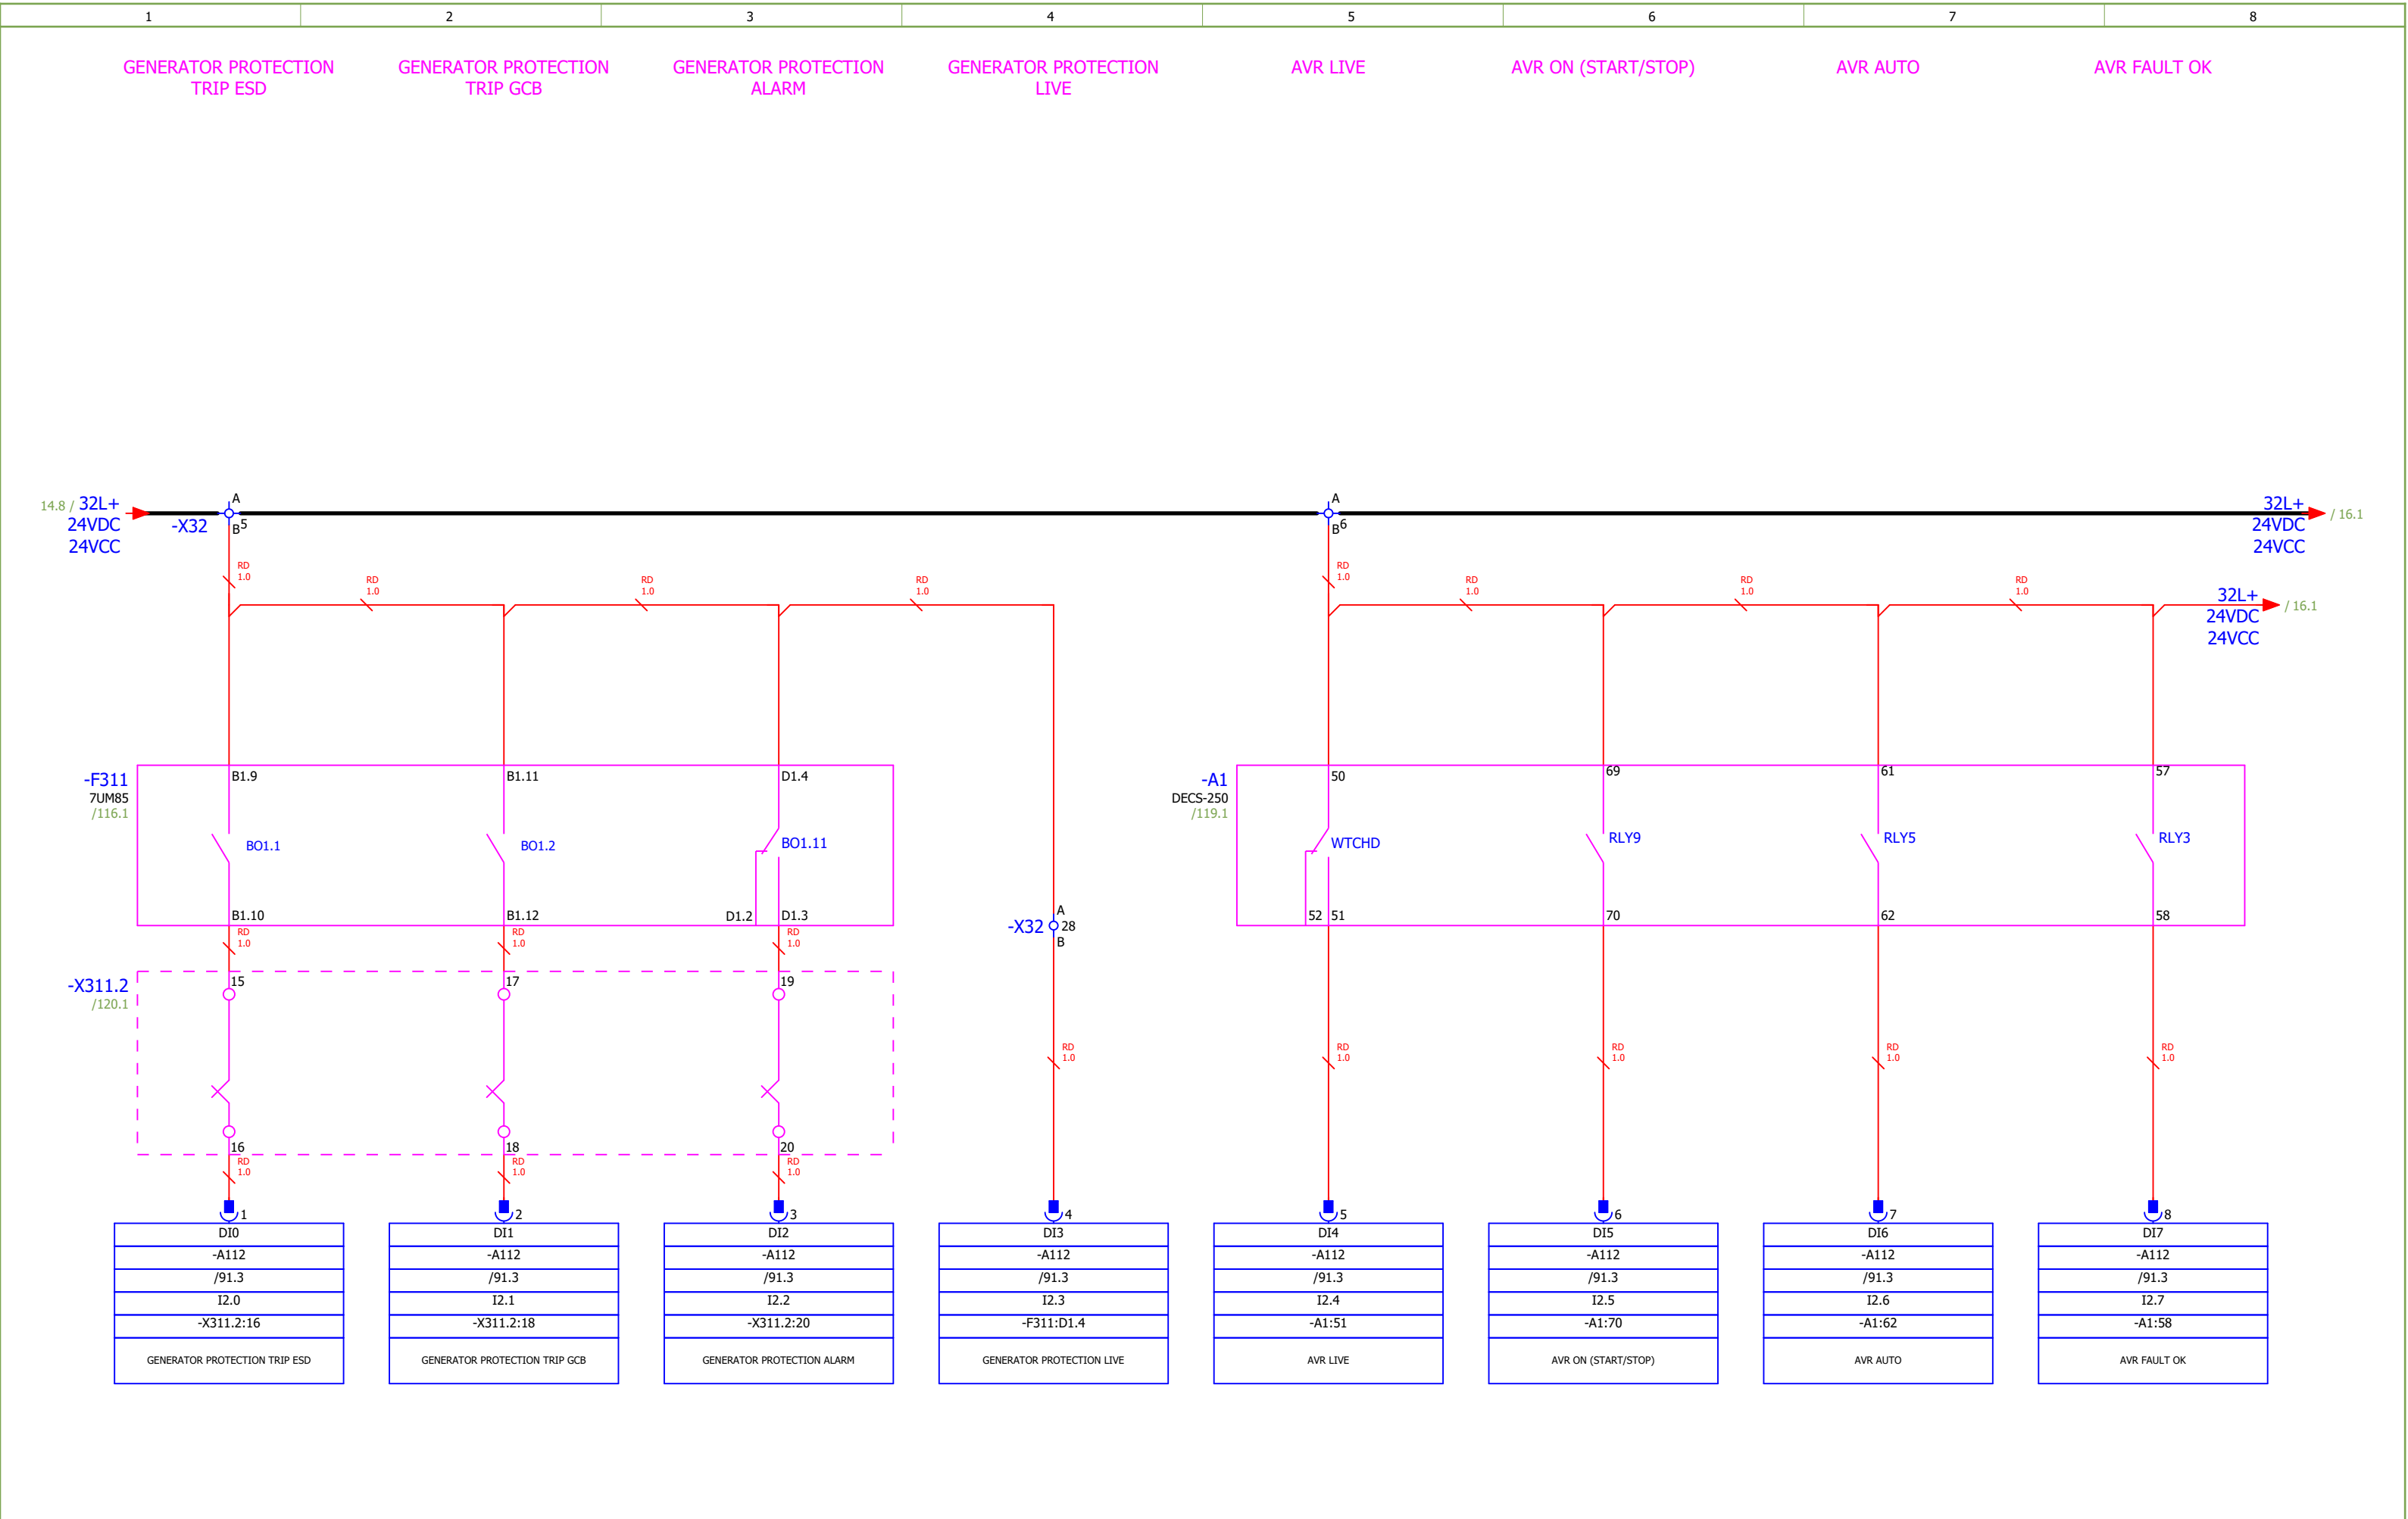

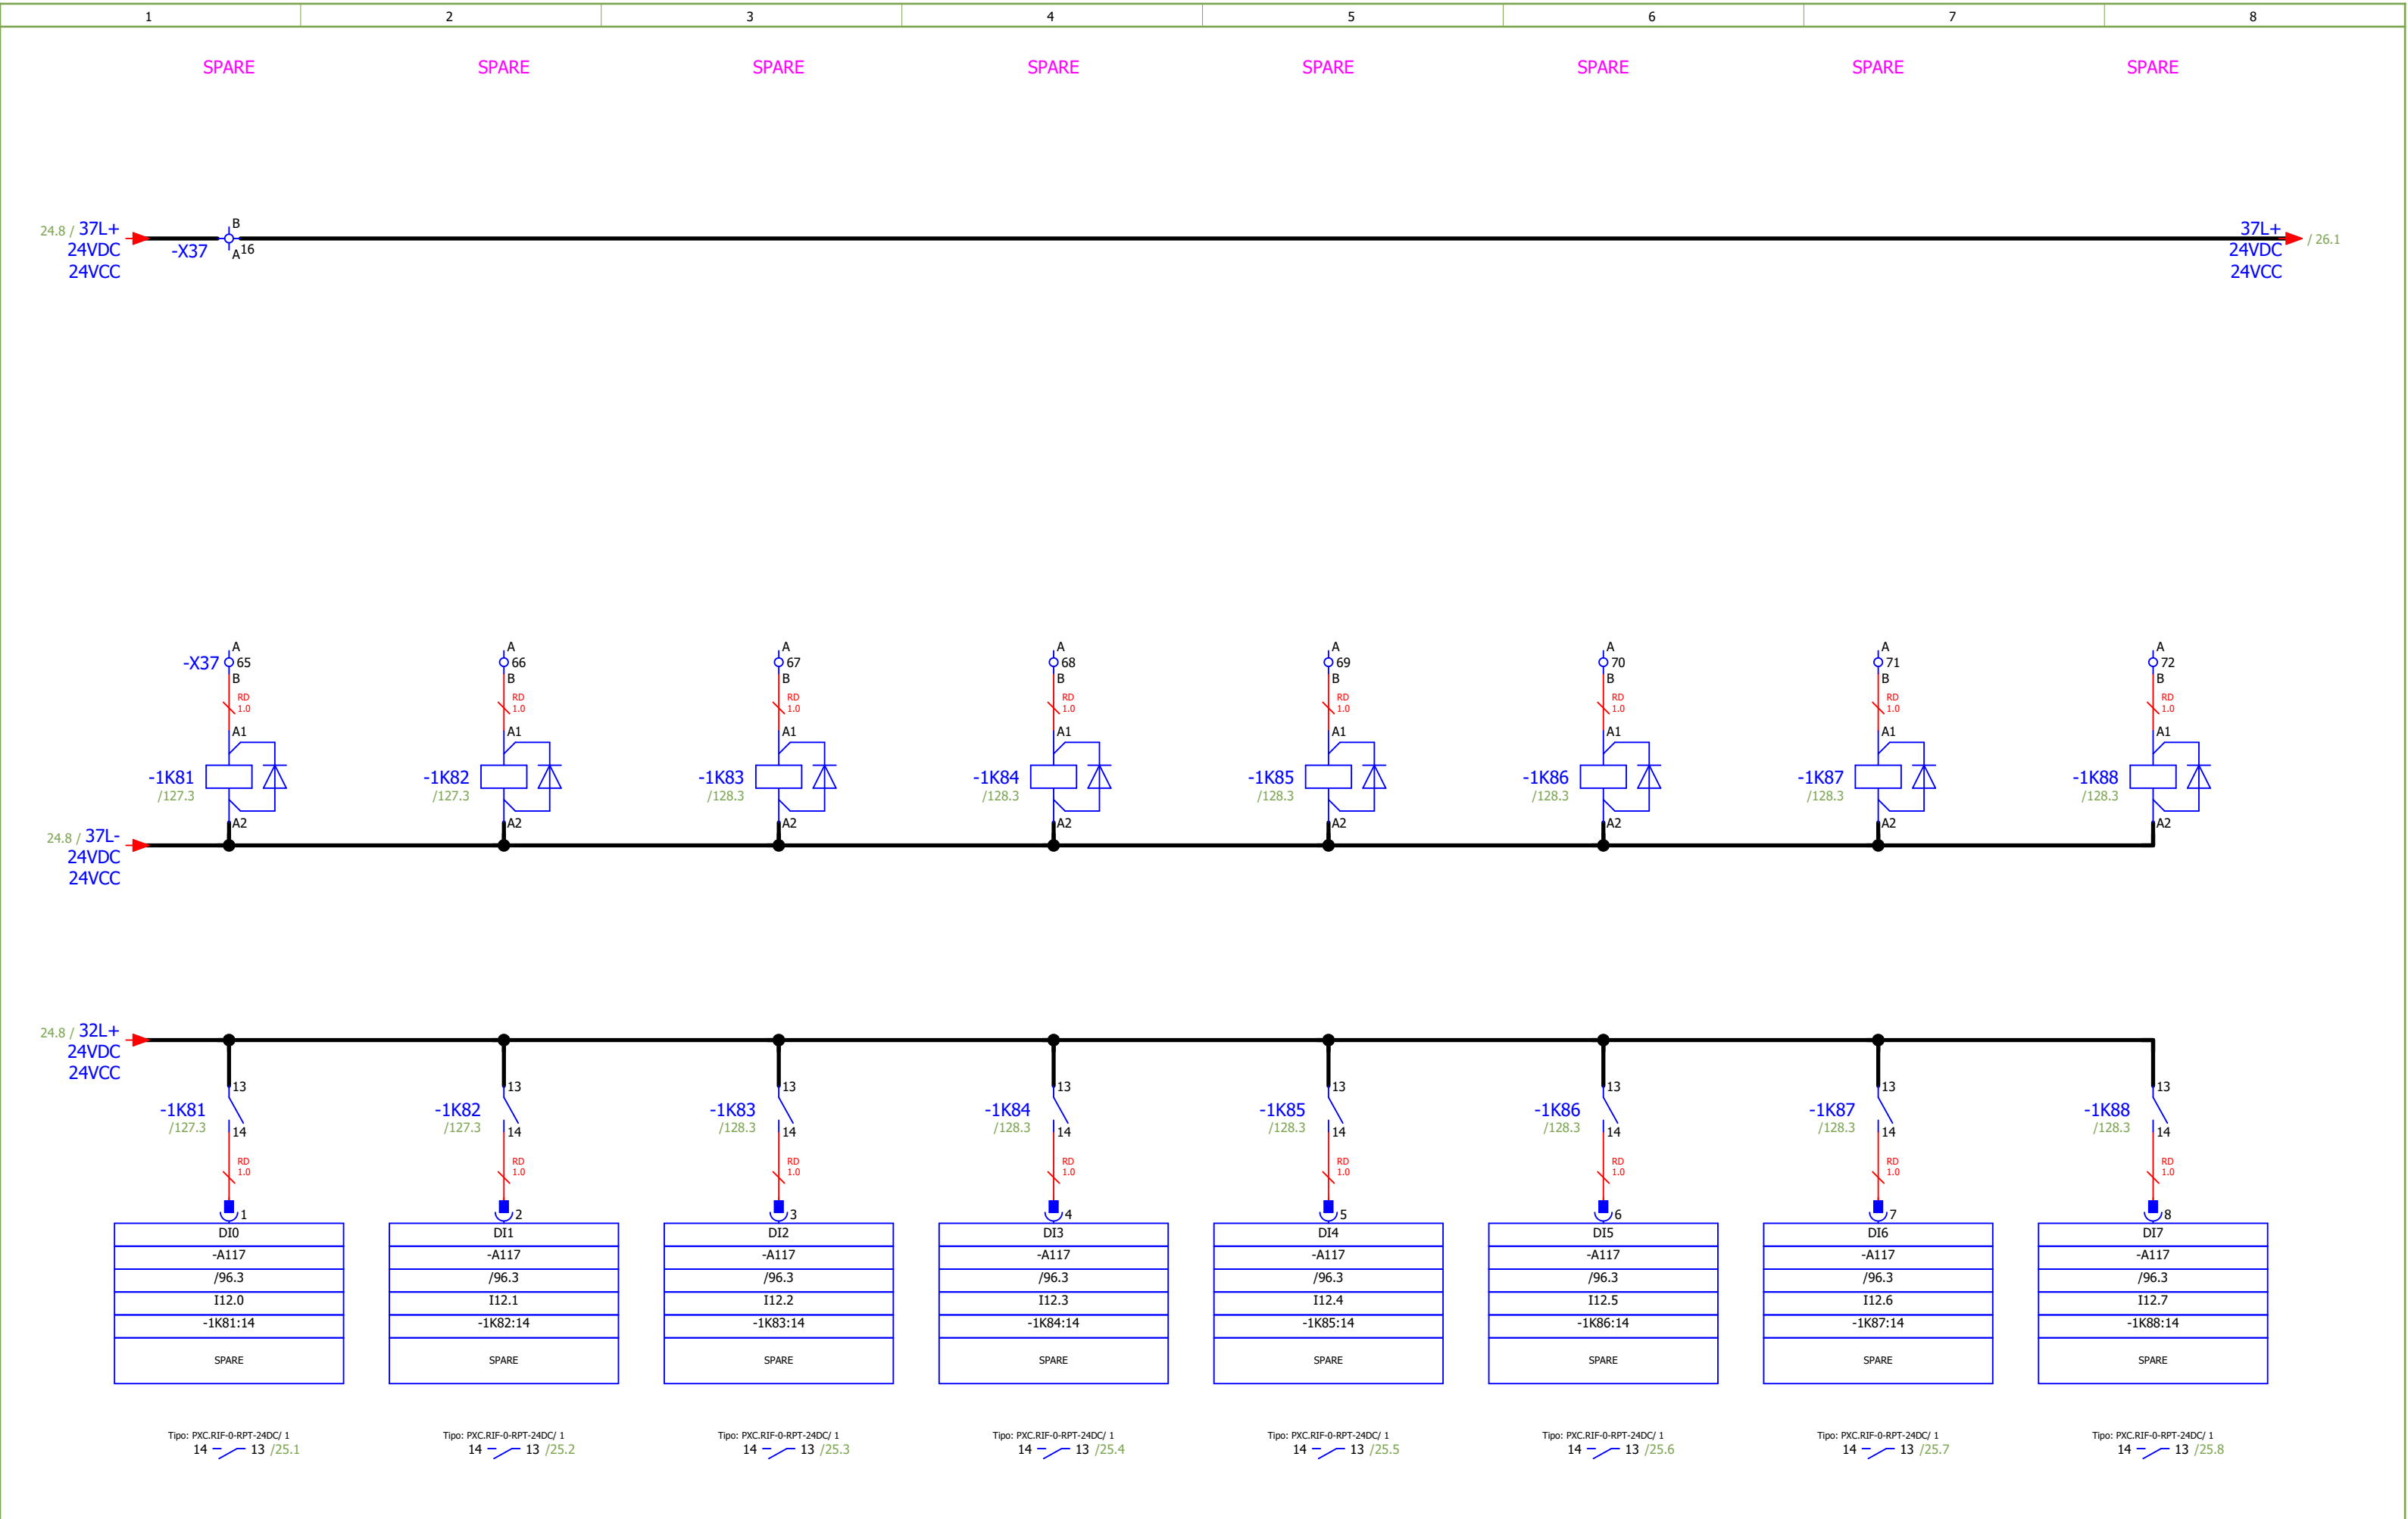

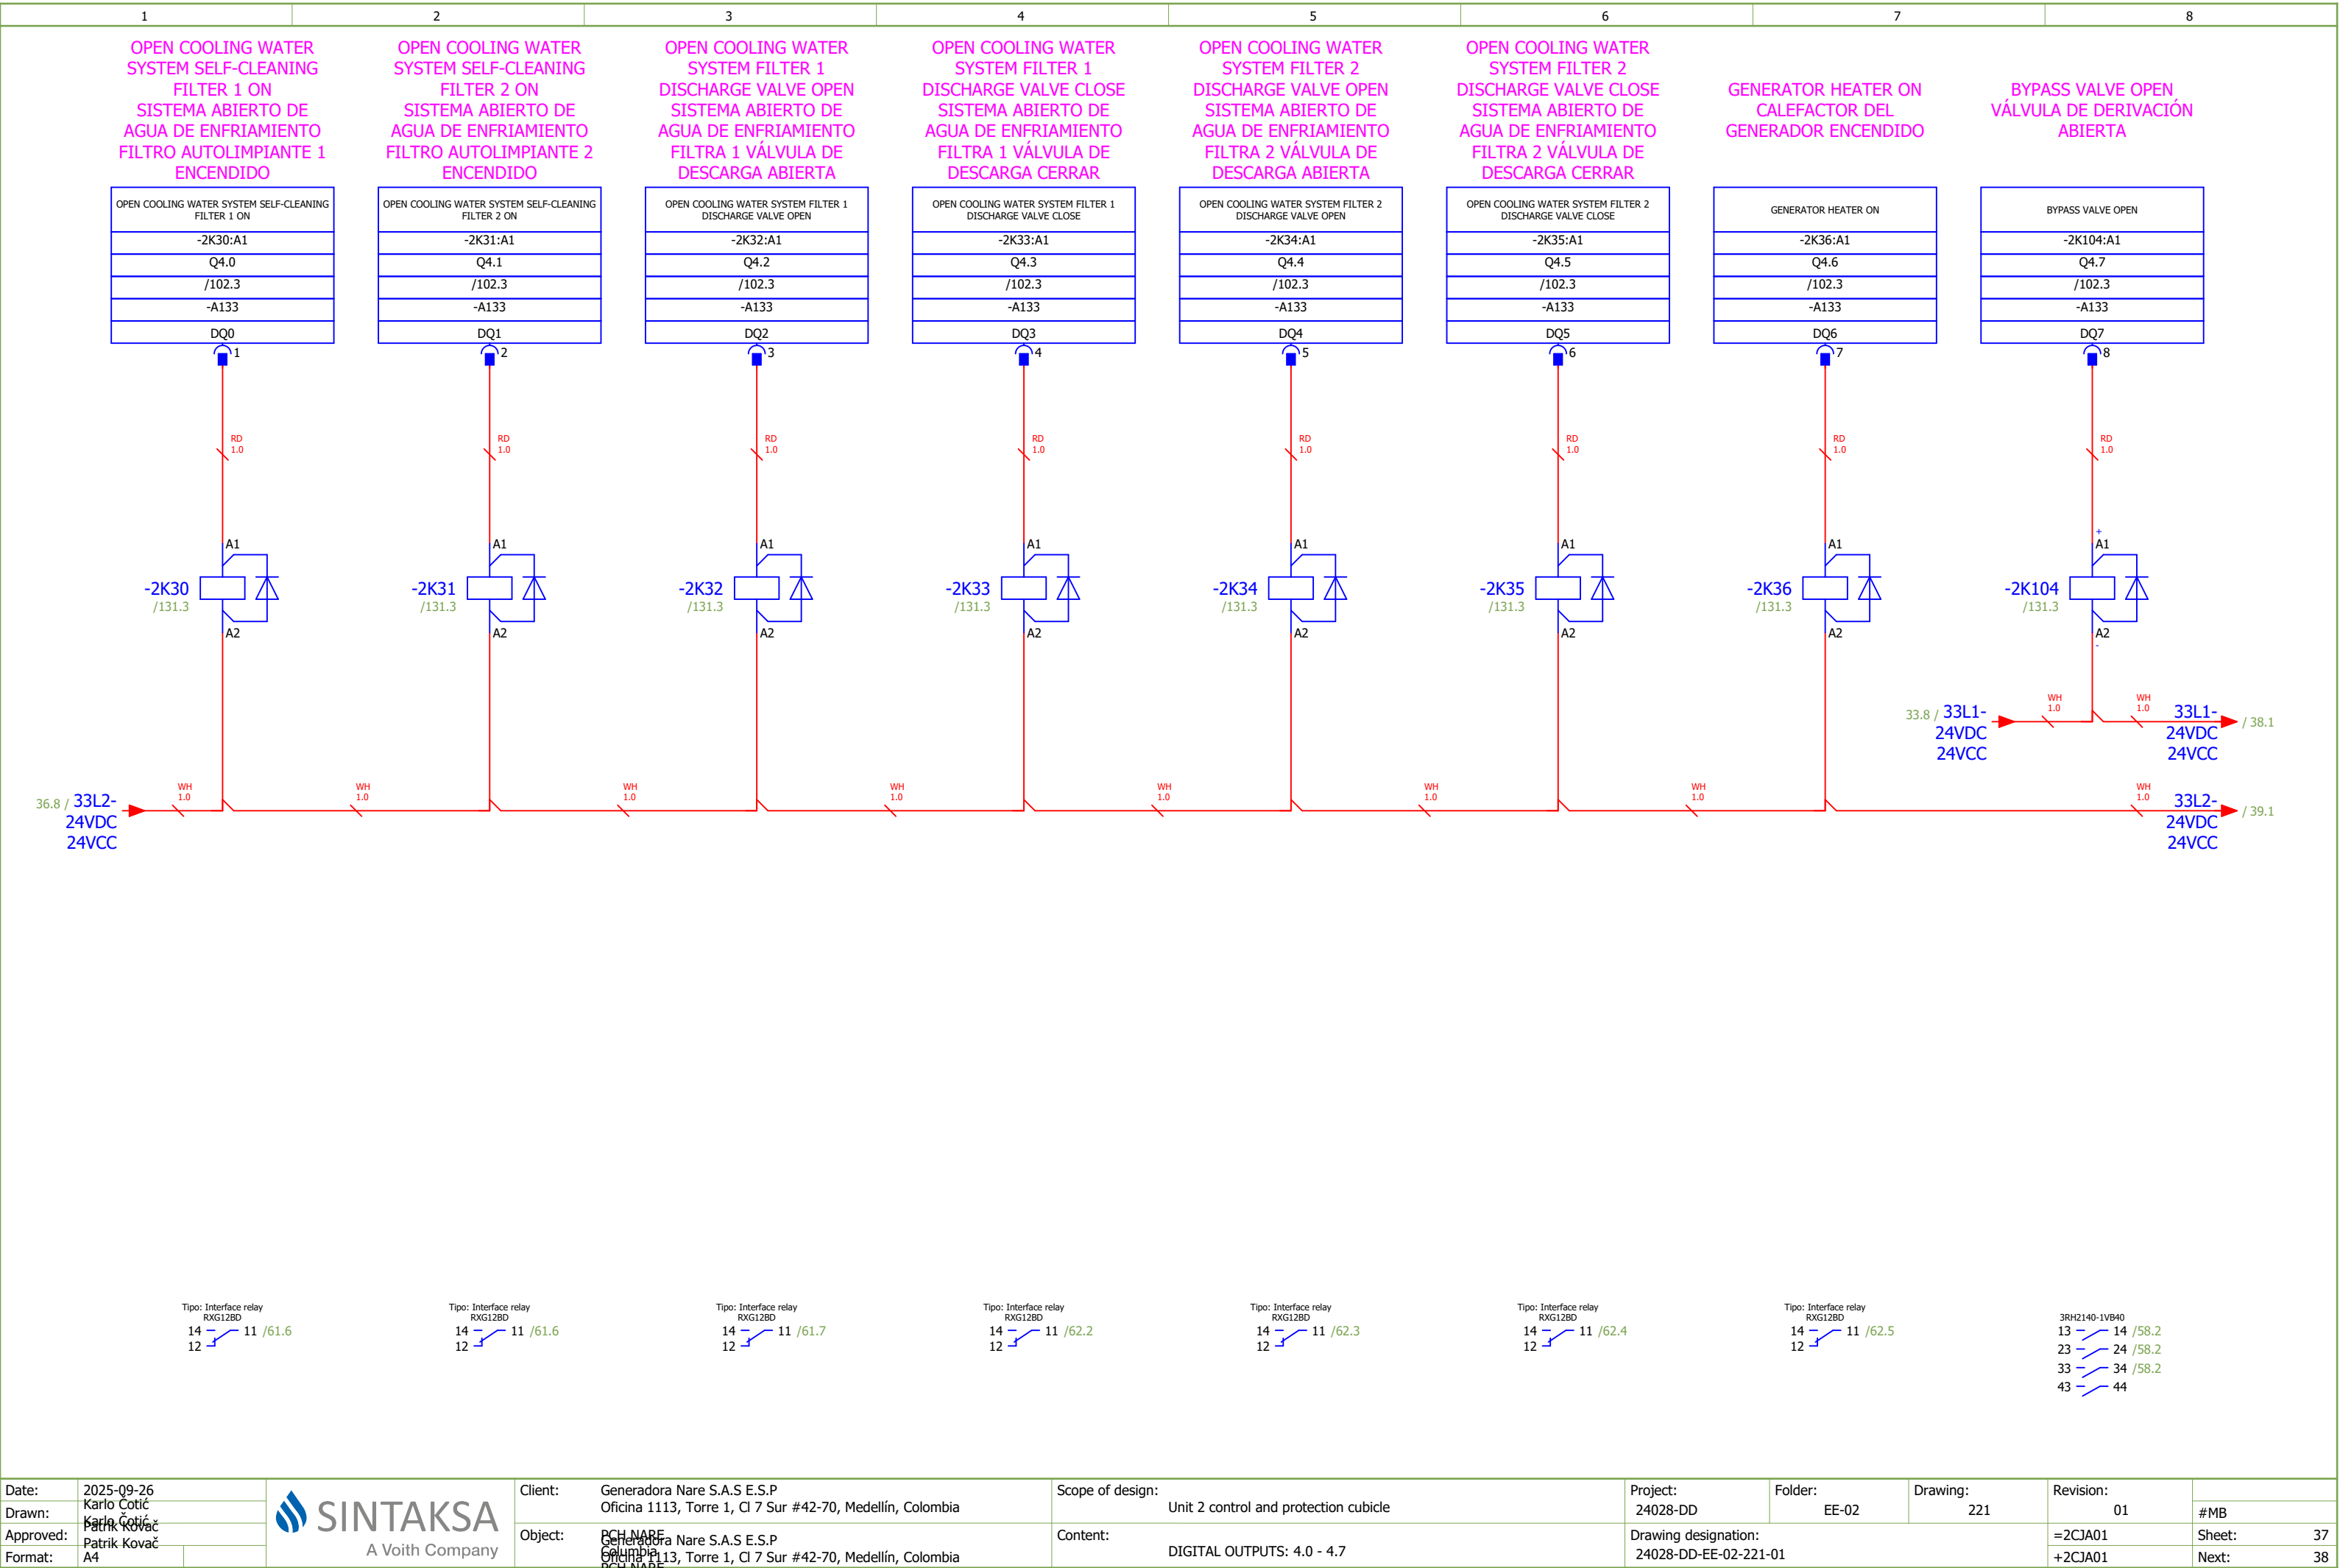

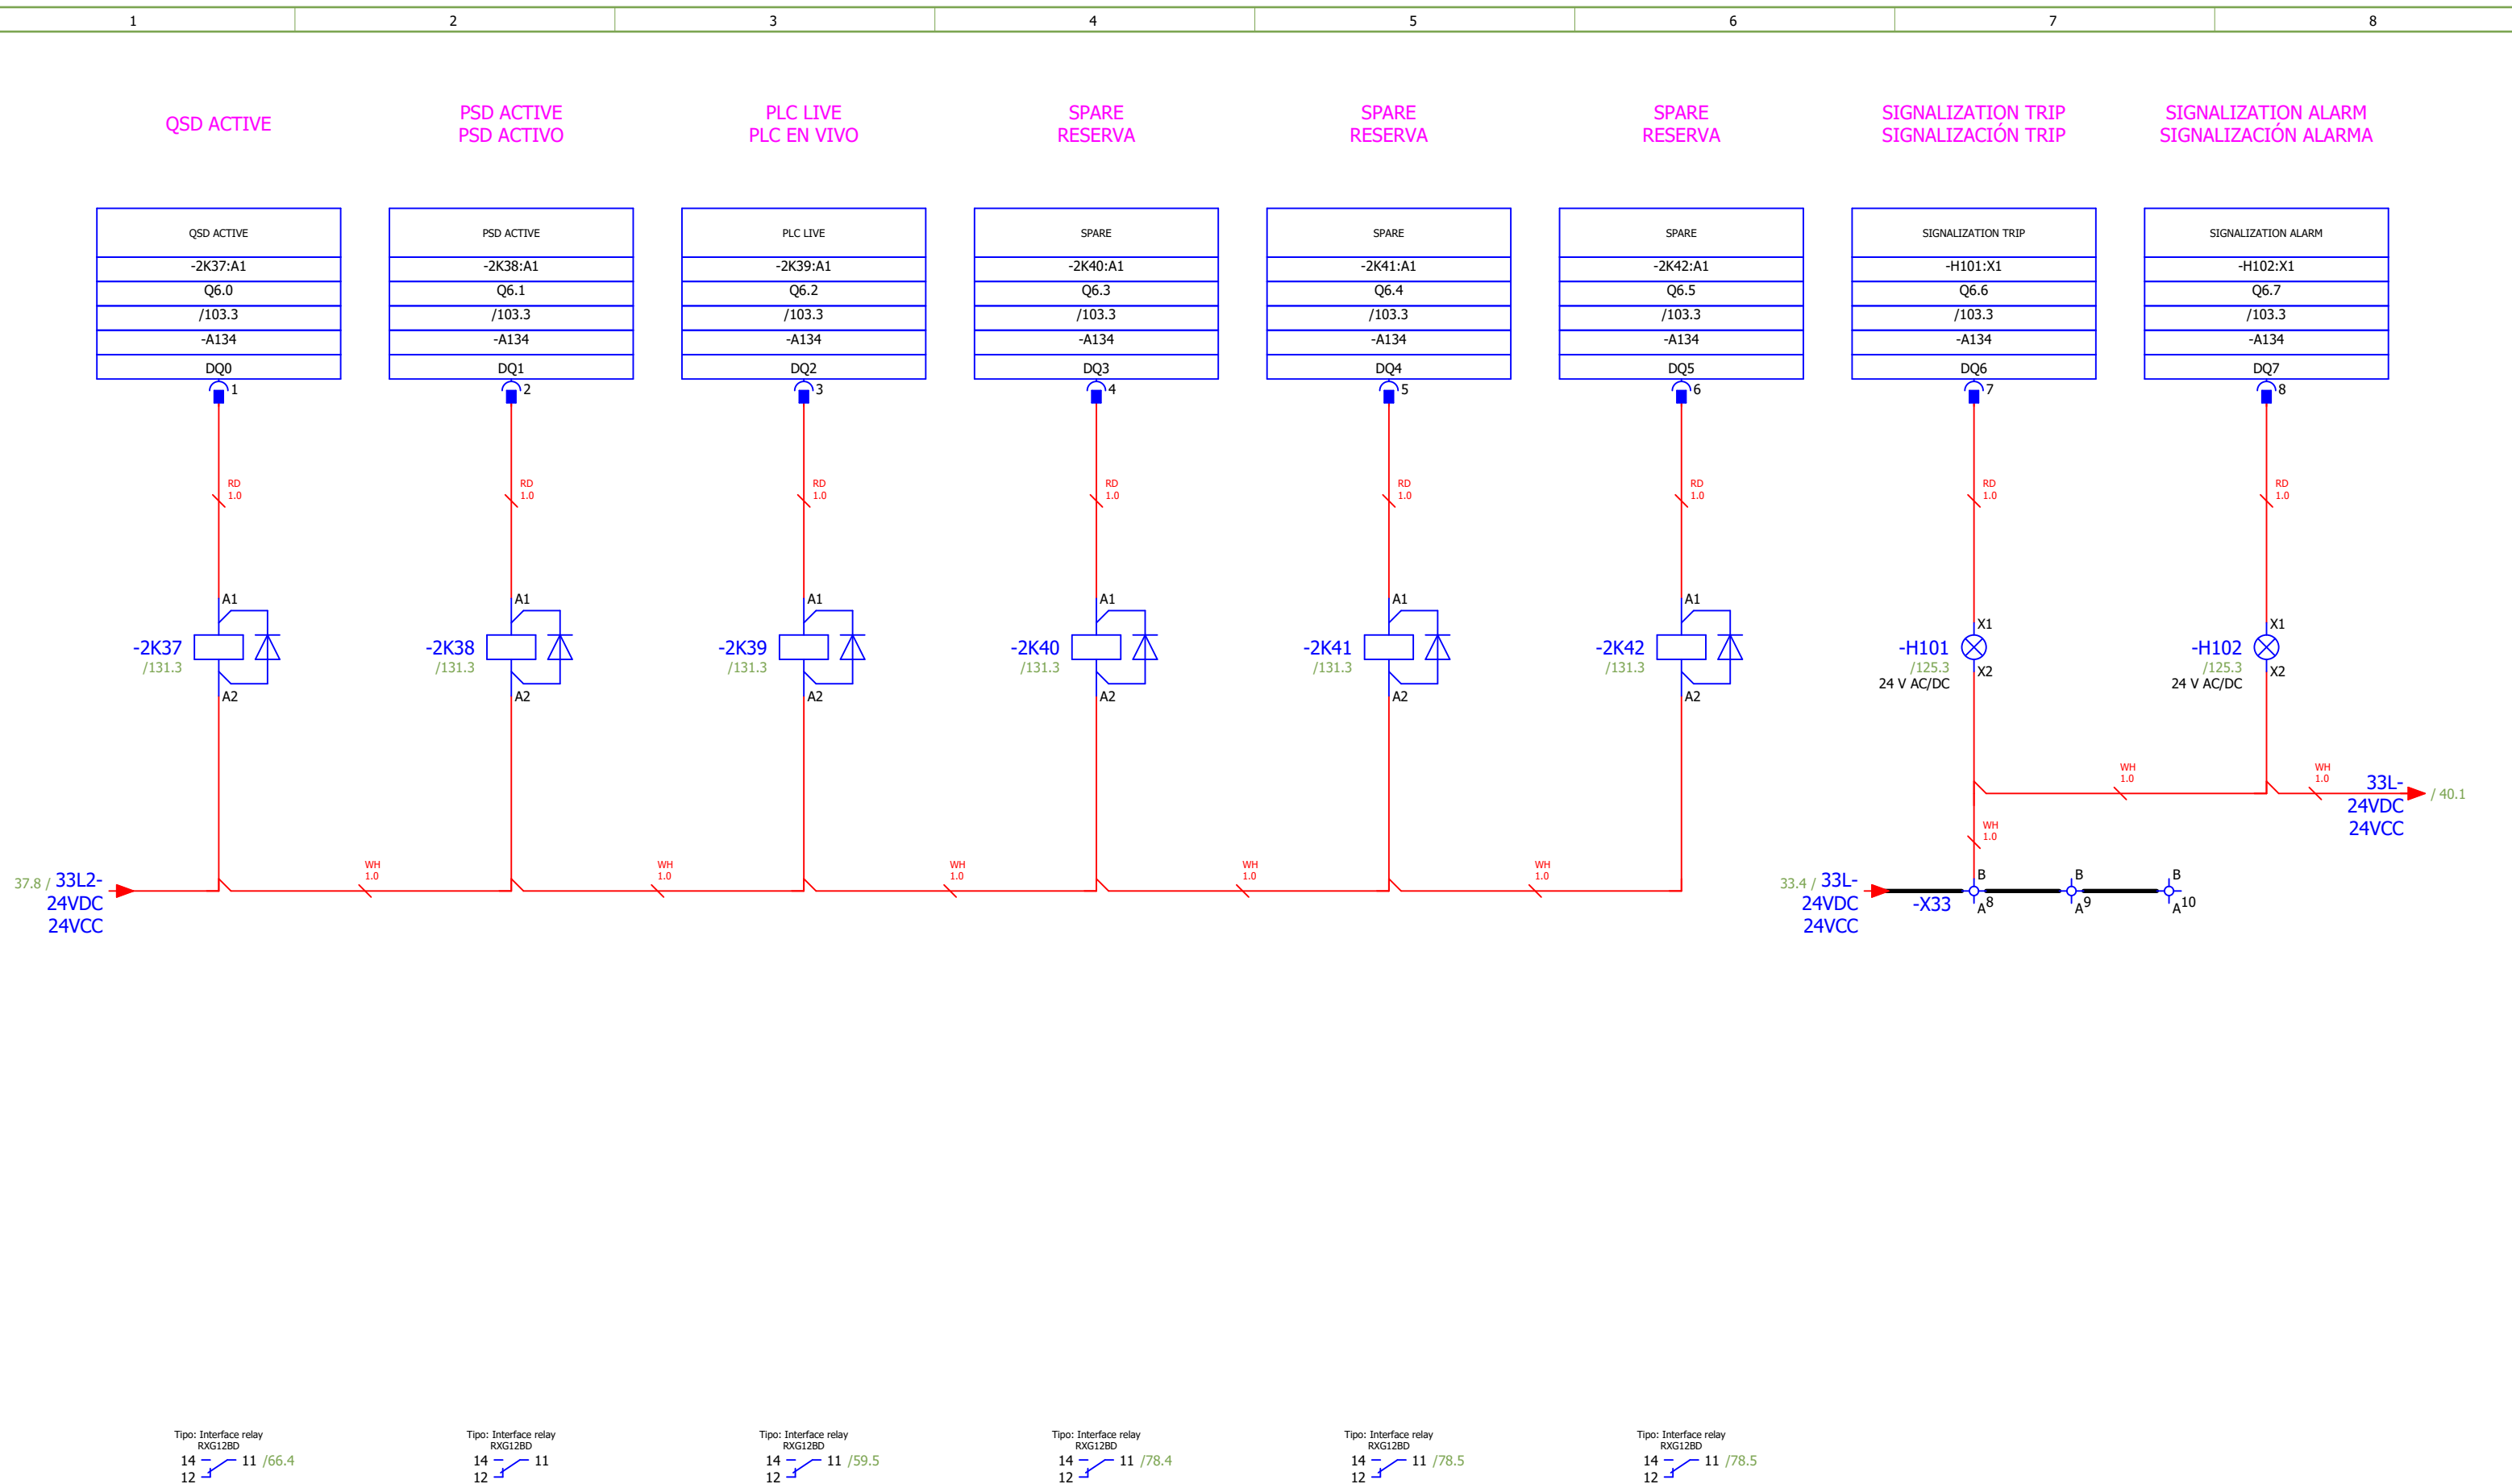


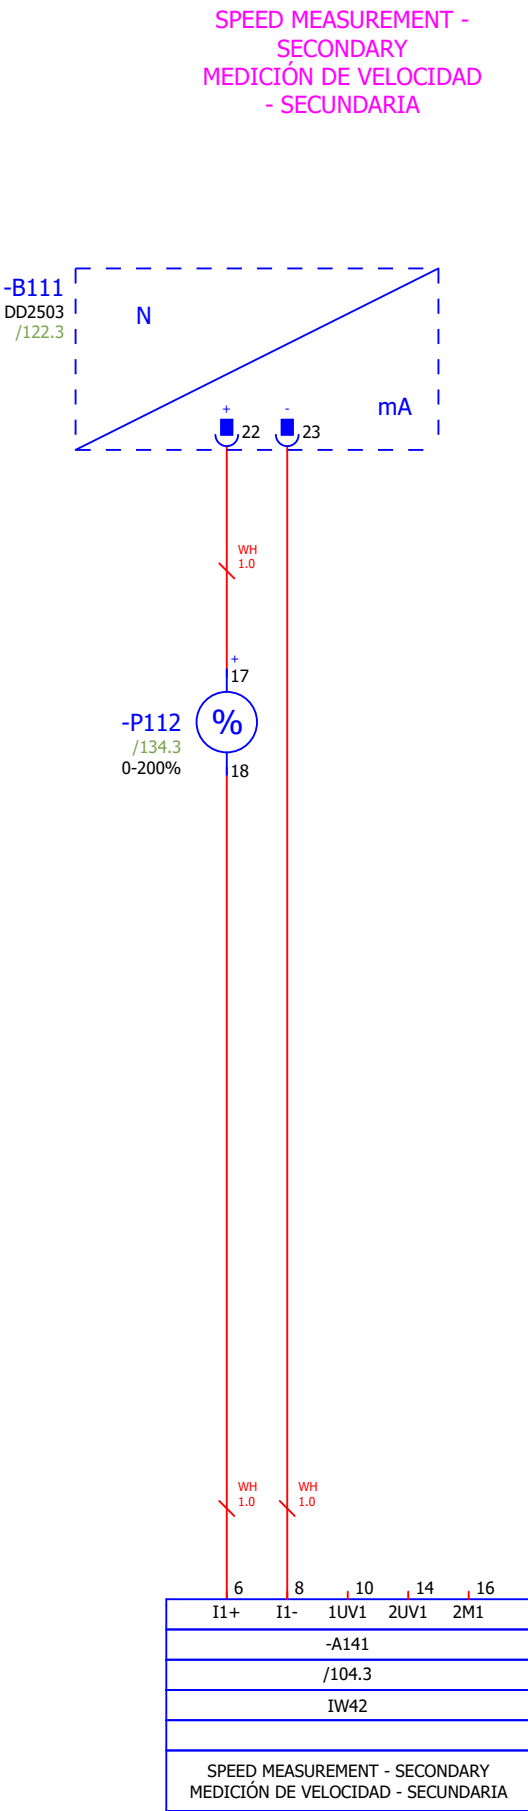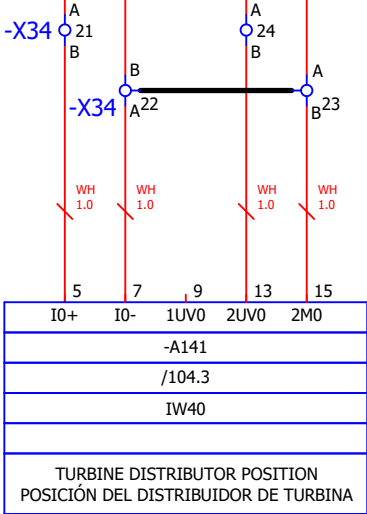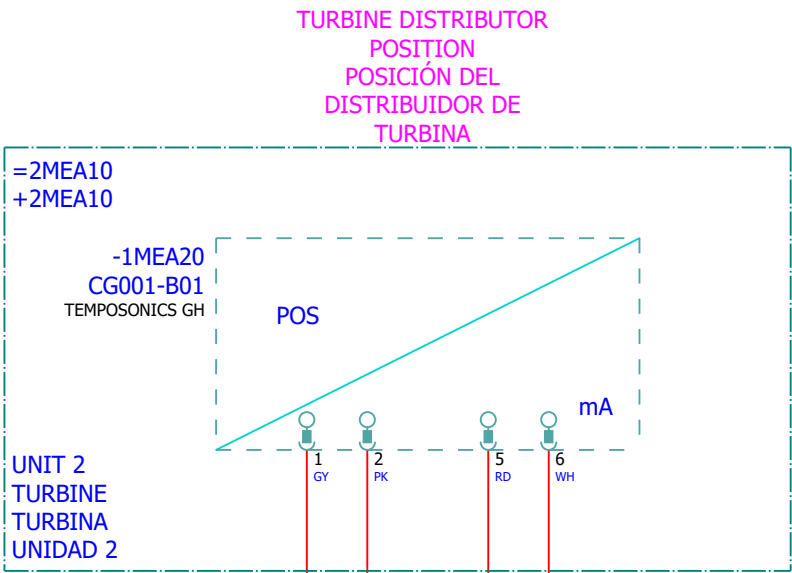



FIELD FLASHING INTERMITENTE DE CAMPO

FIELD OUTPUT
SALIDA CAMPO


AVR OUTPUT
SALIDA AVR

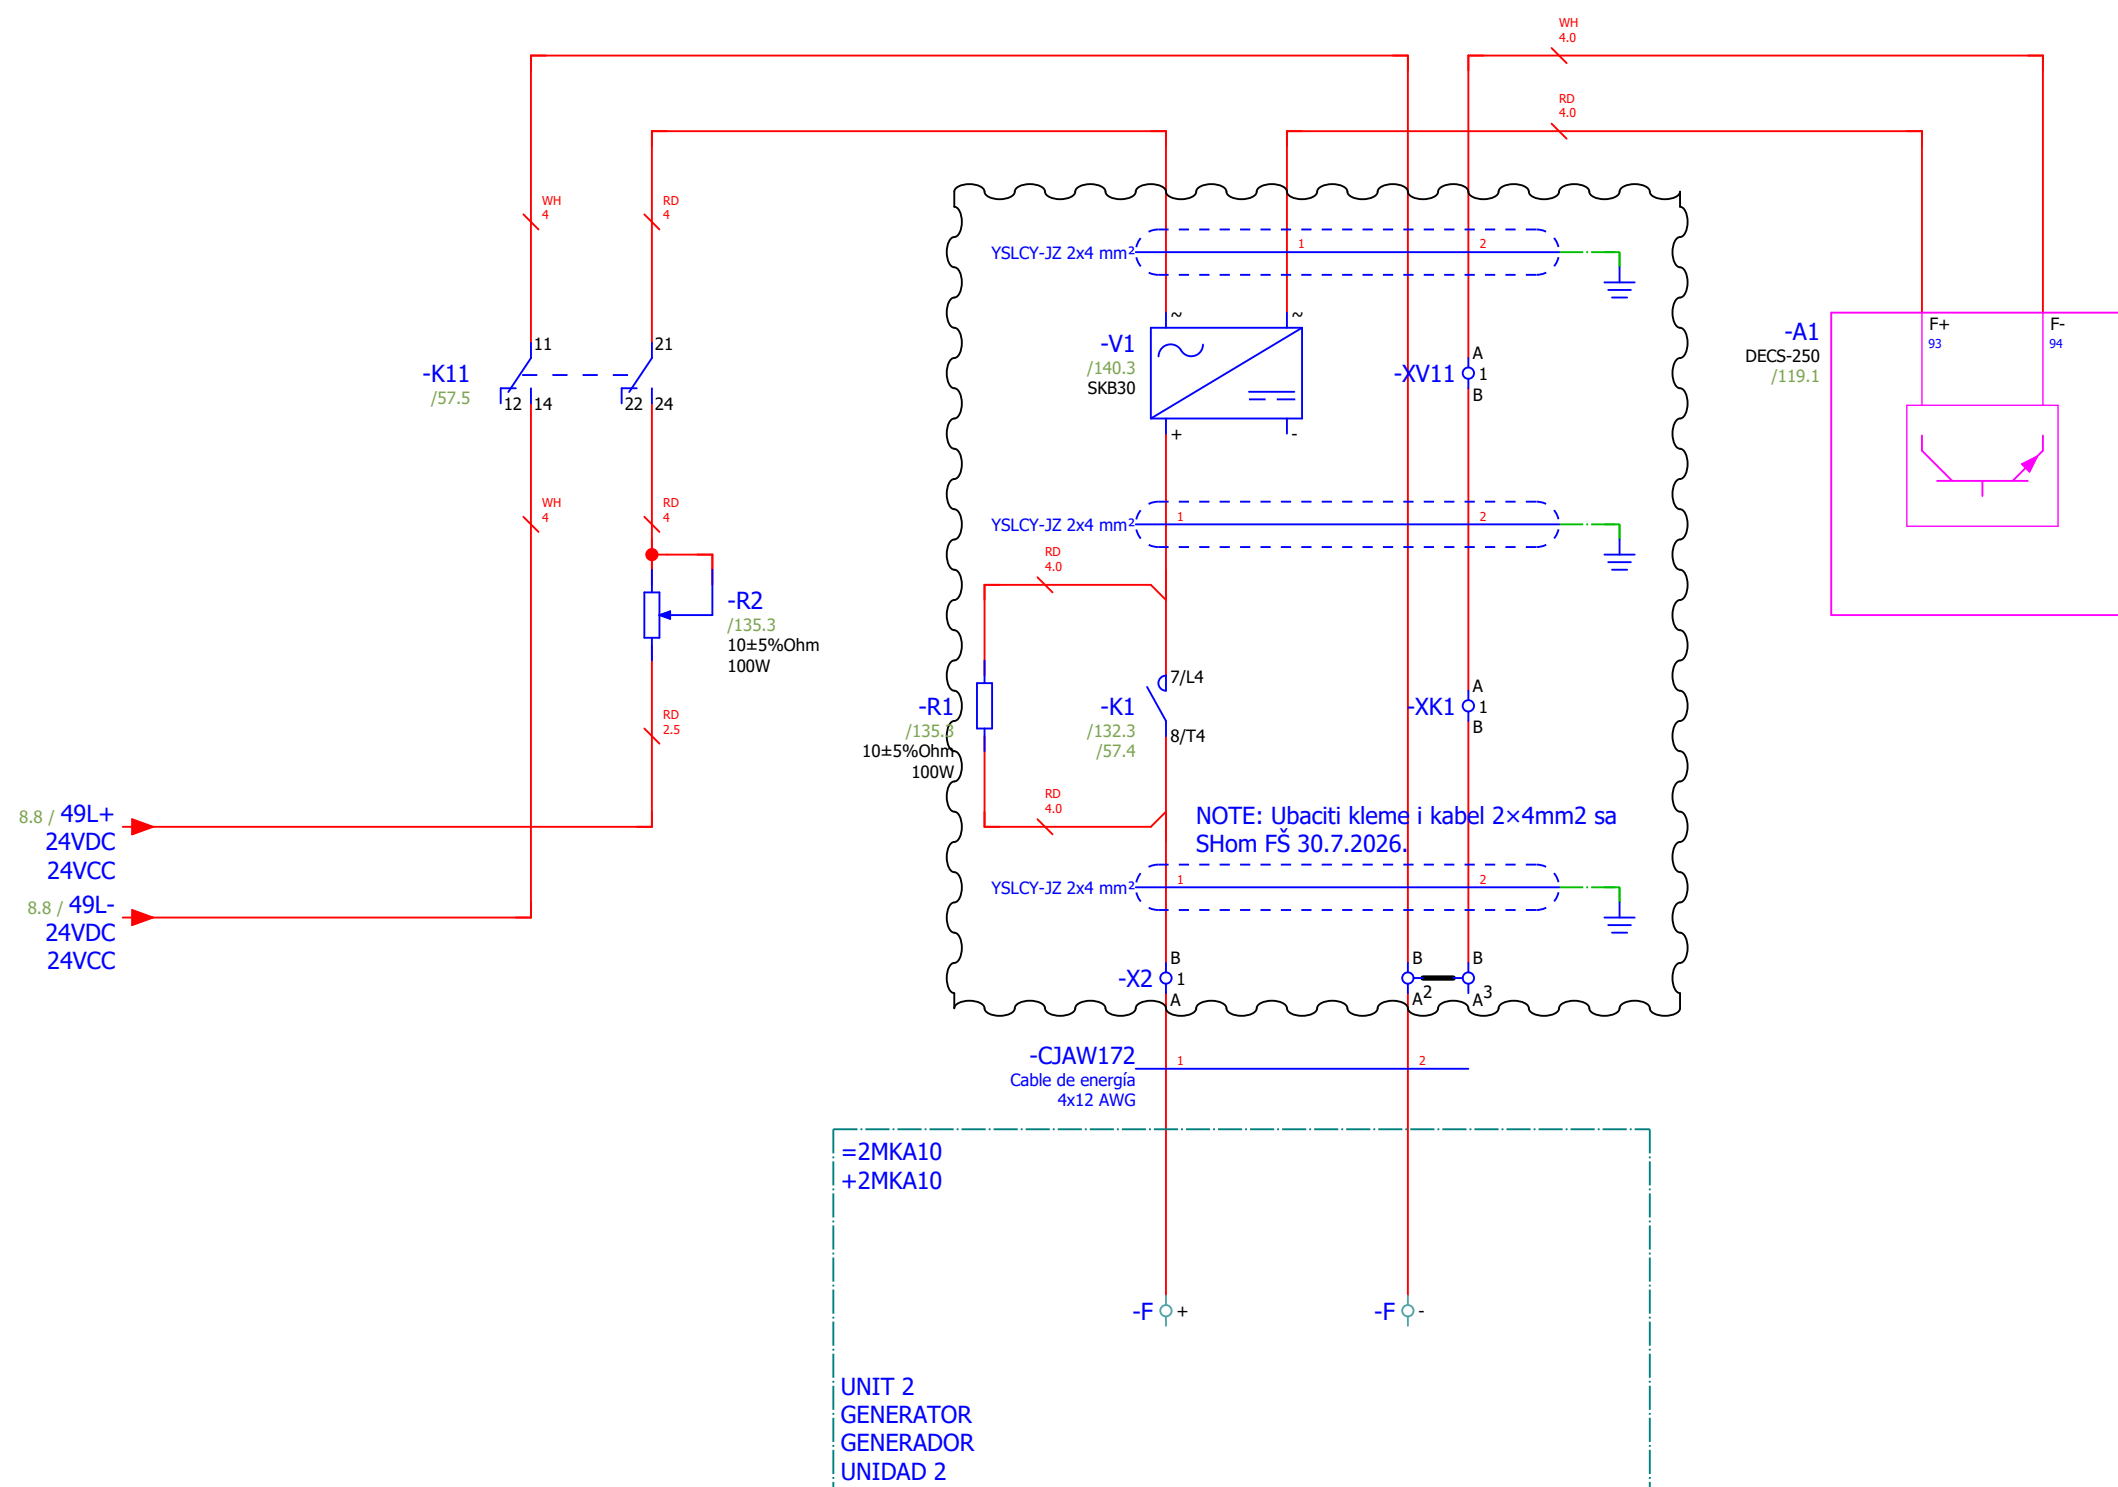


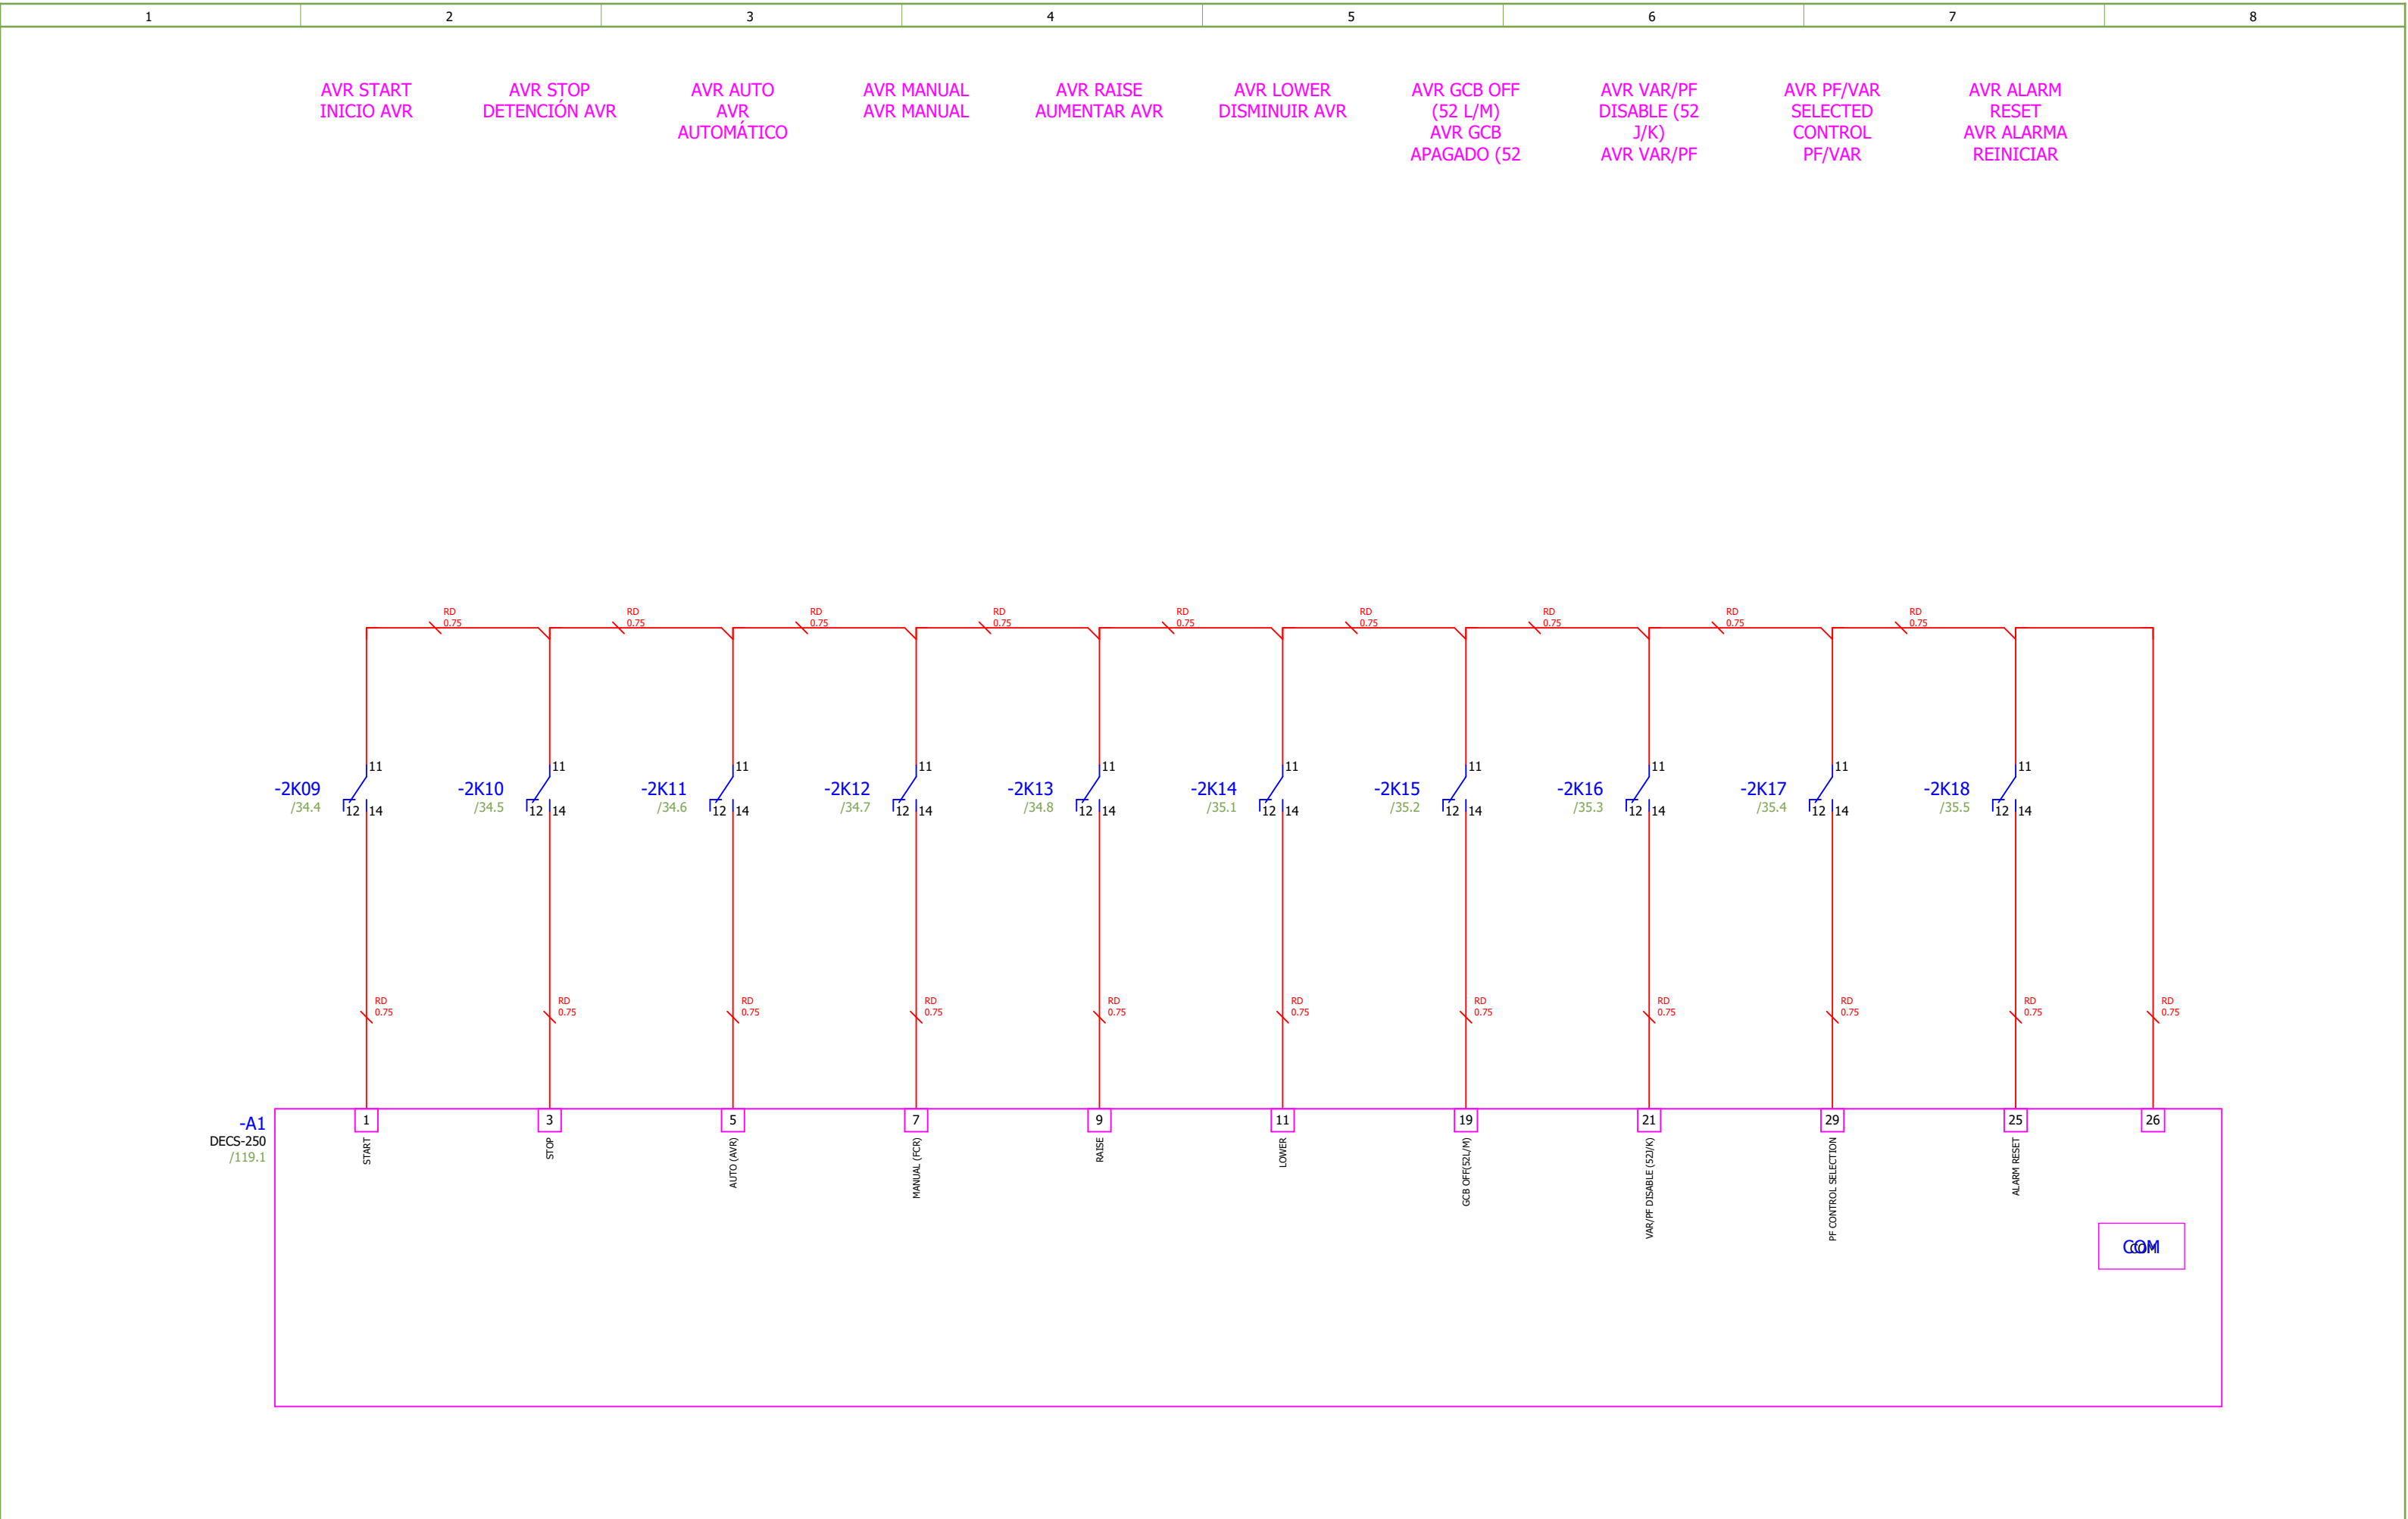


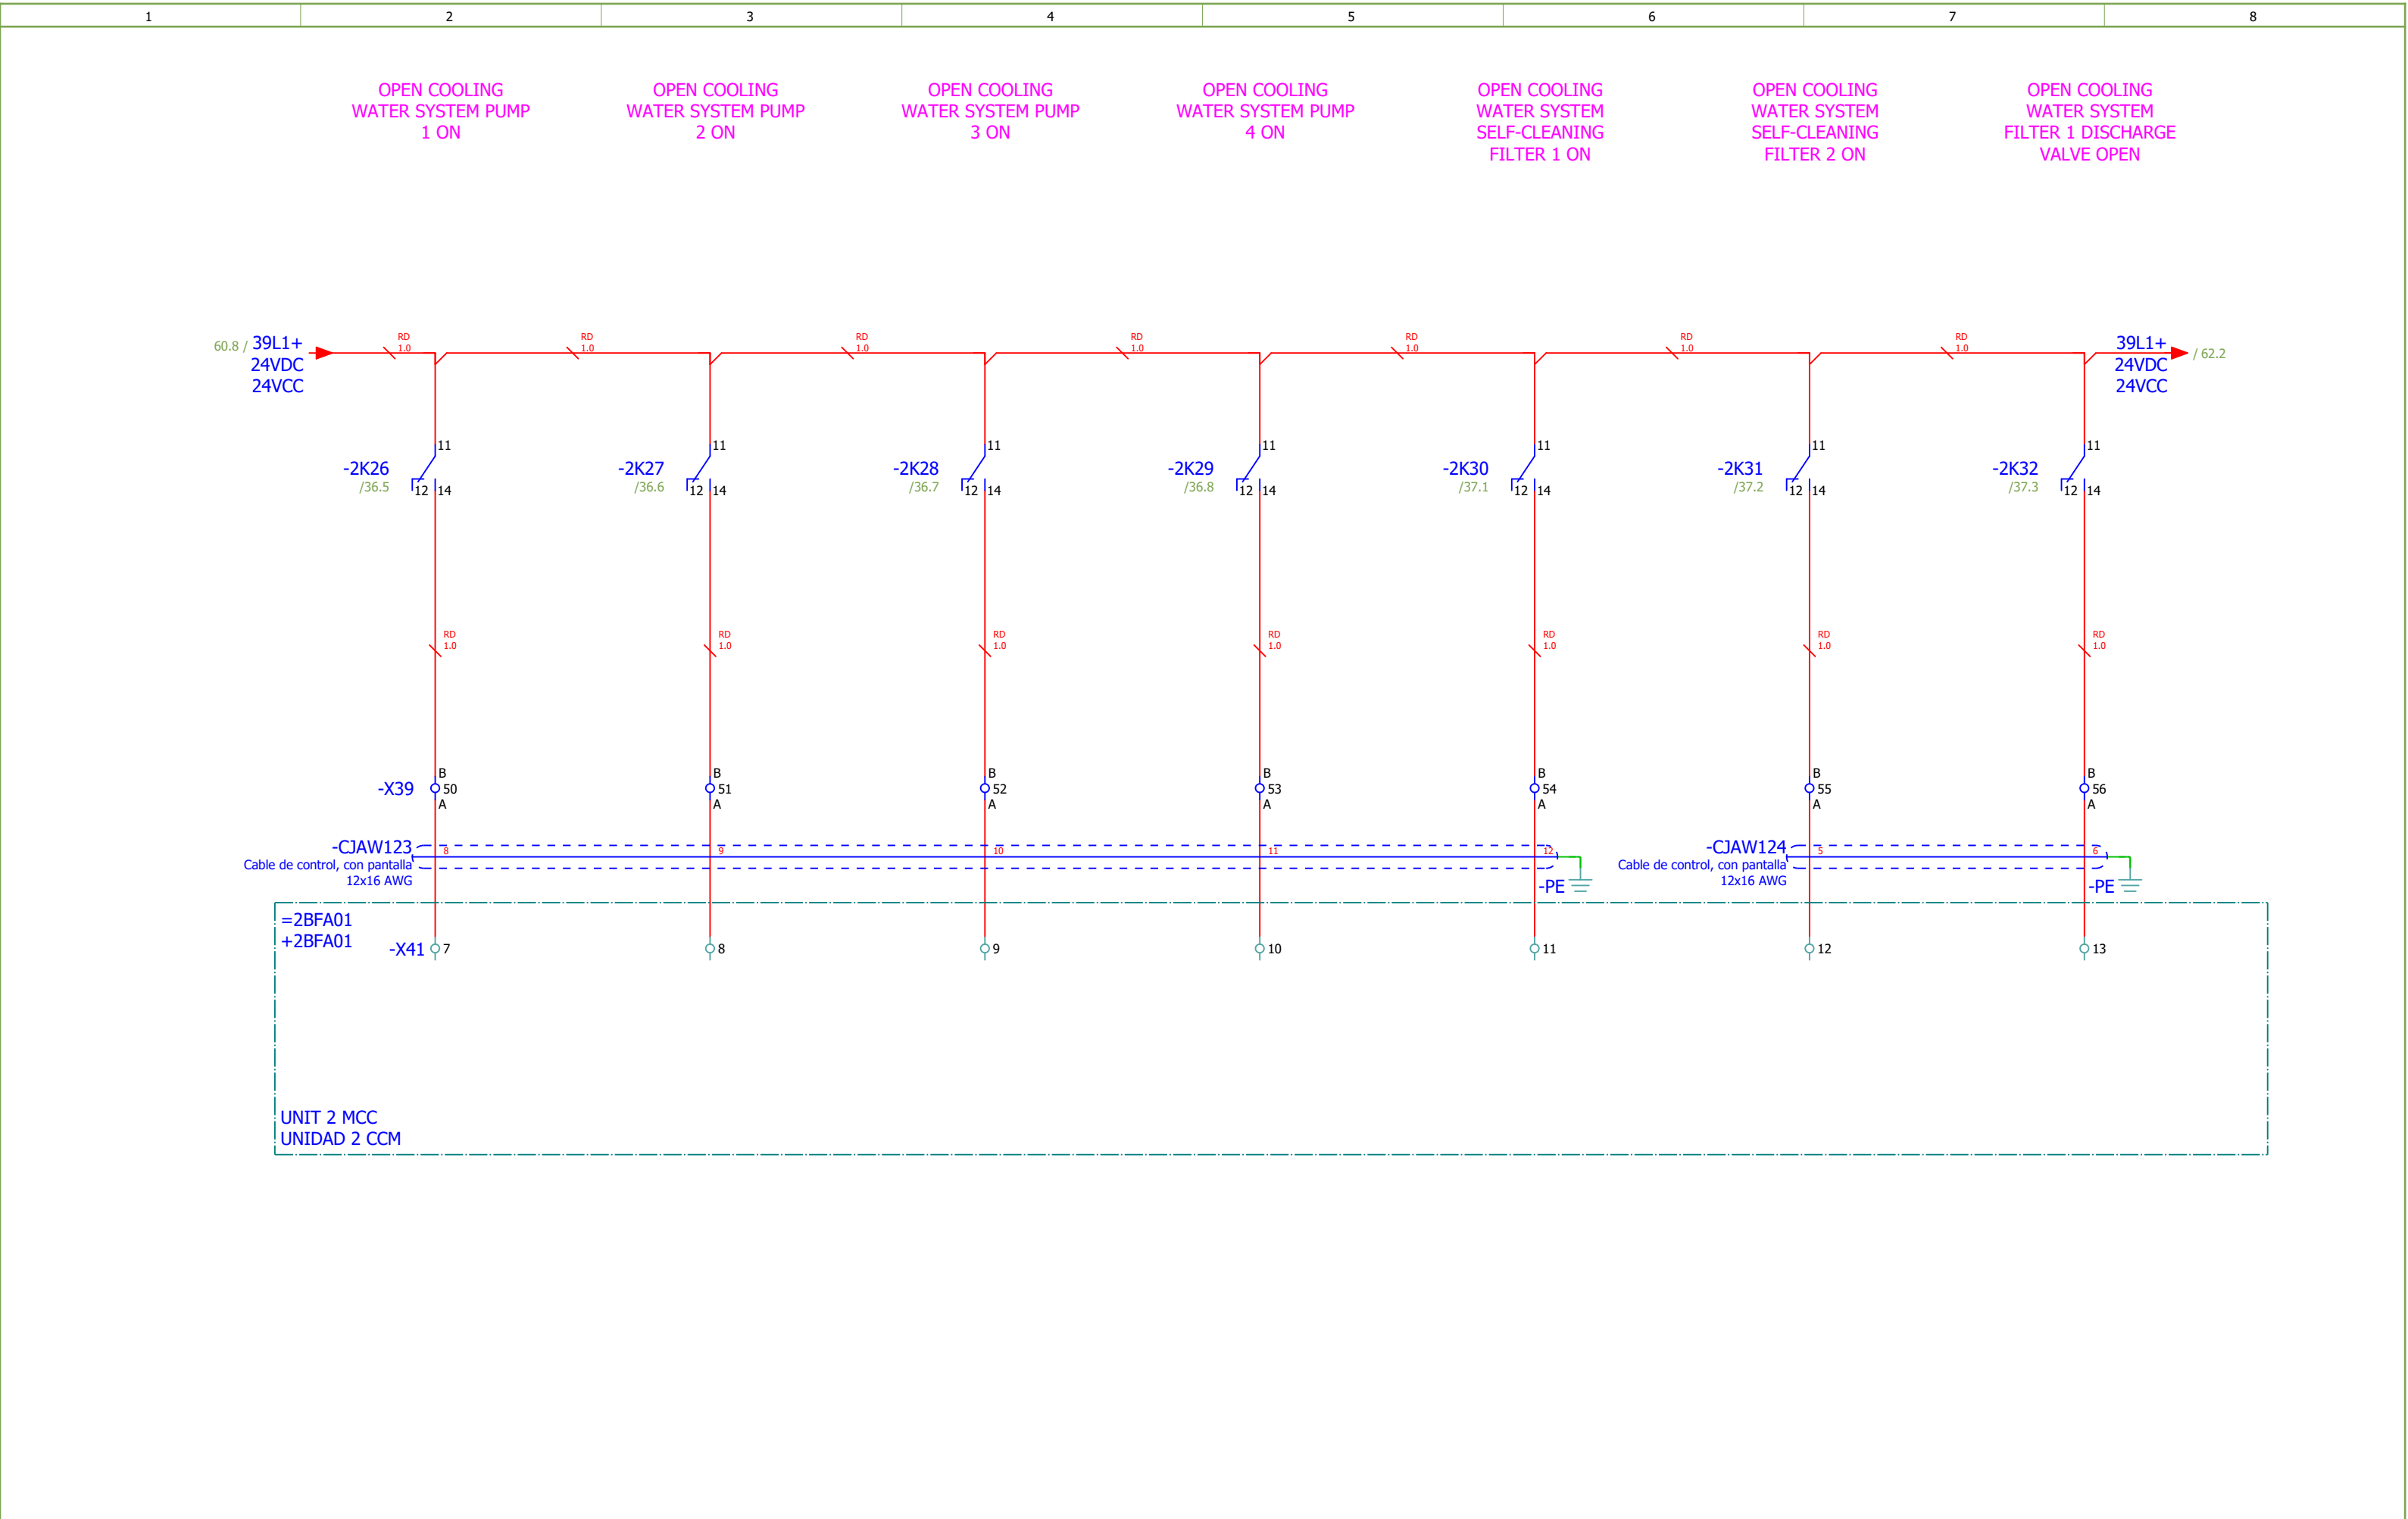

[illegible]

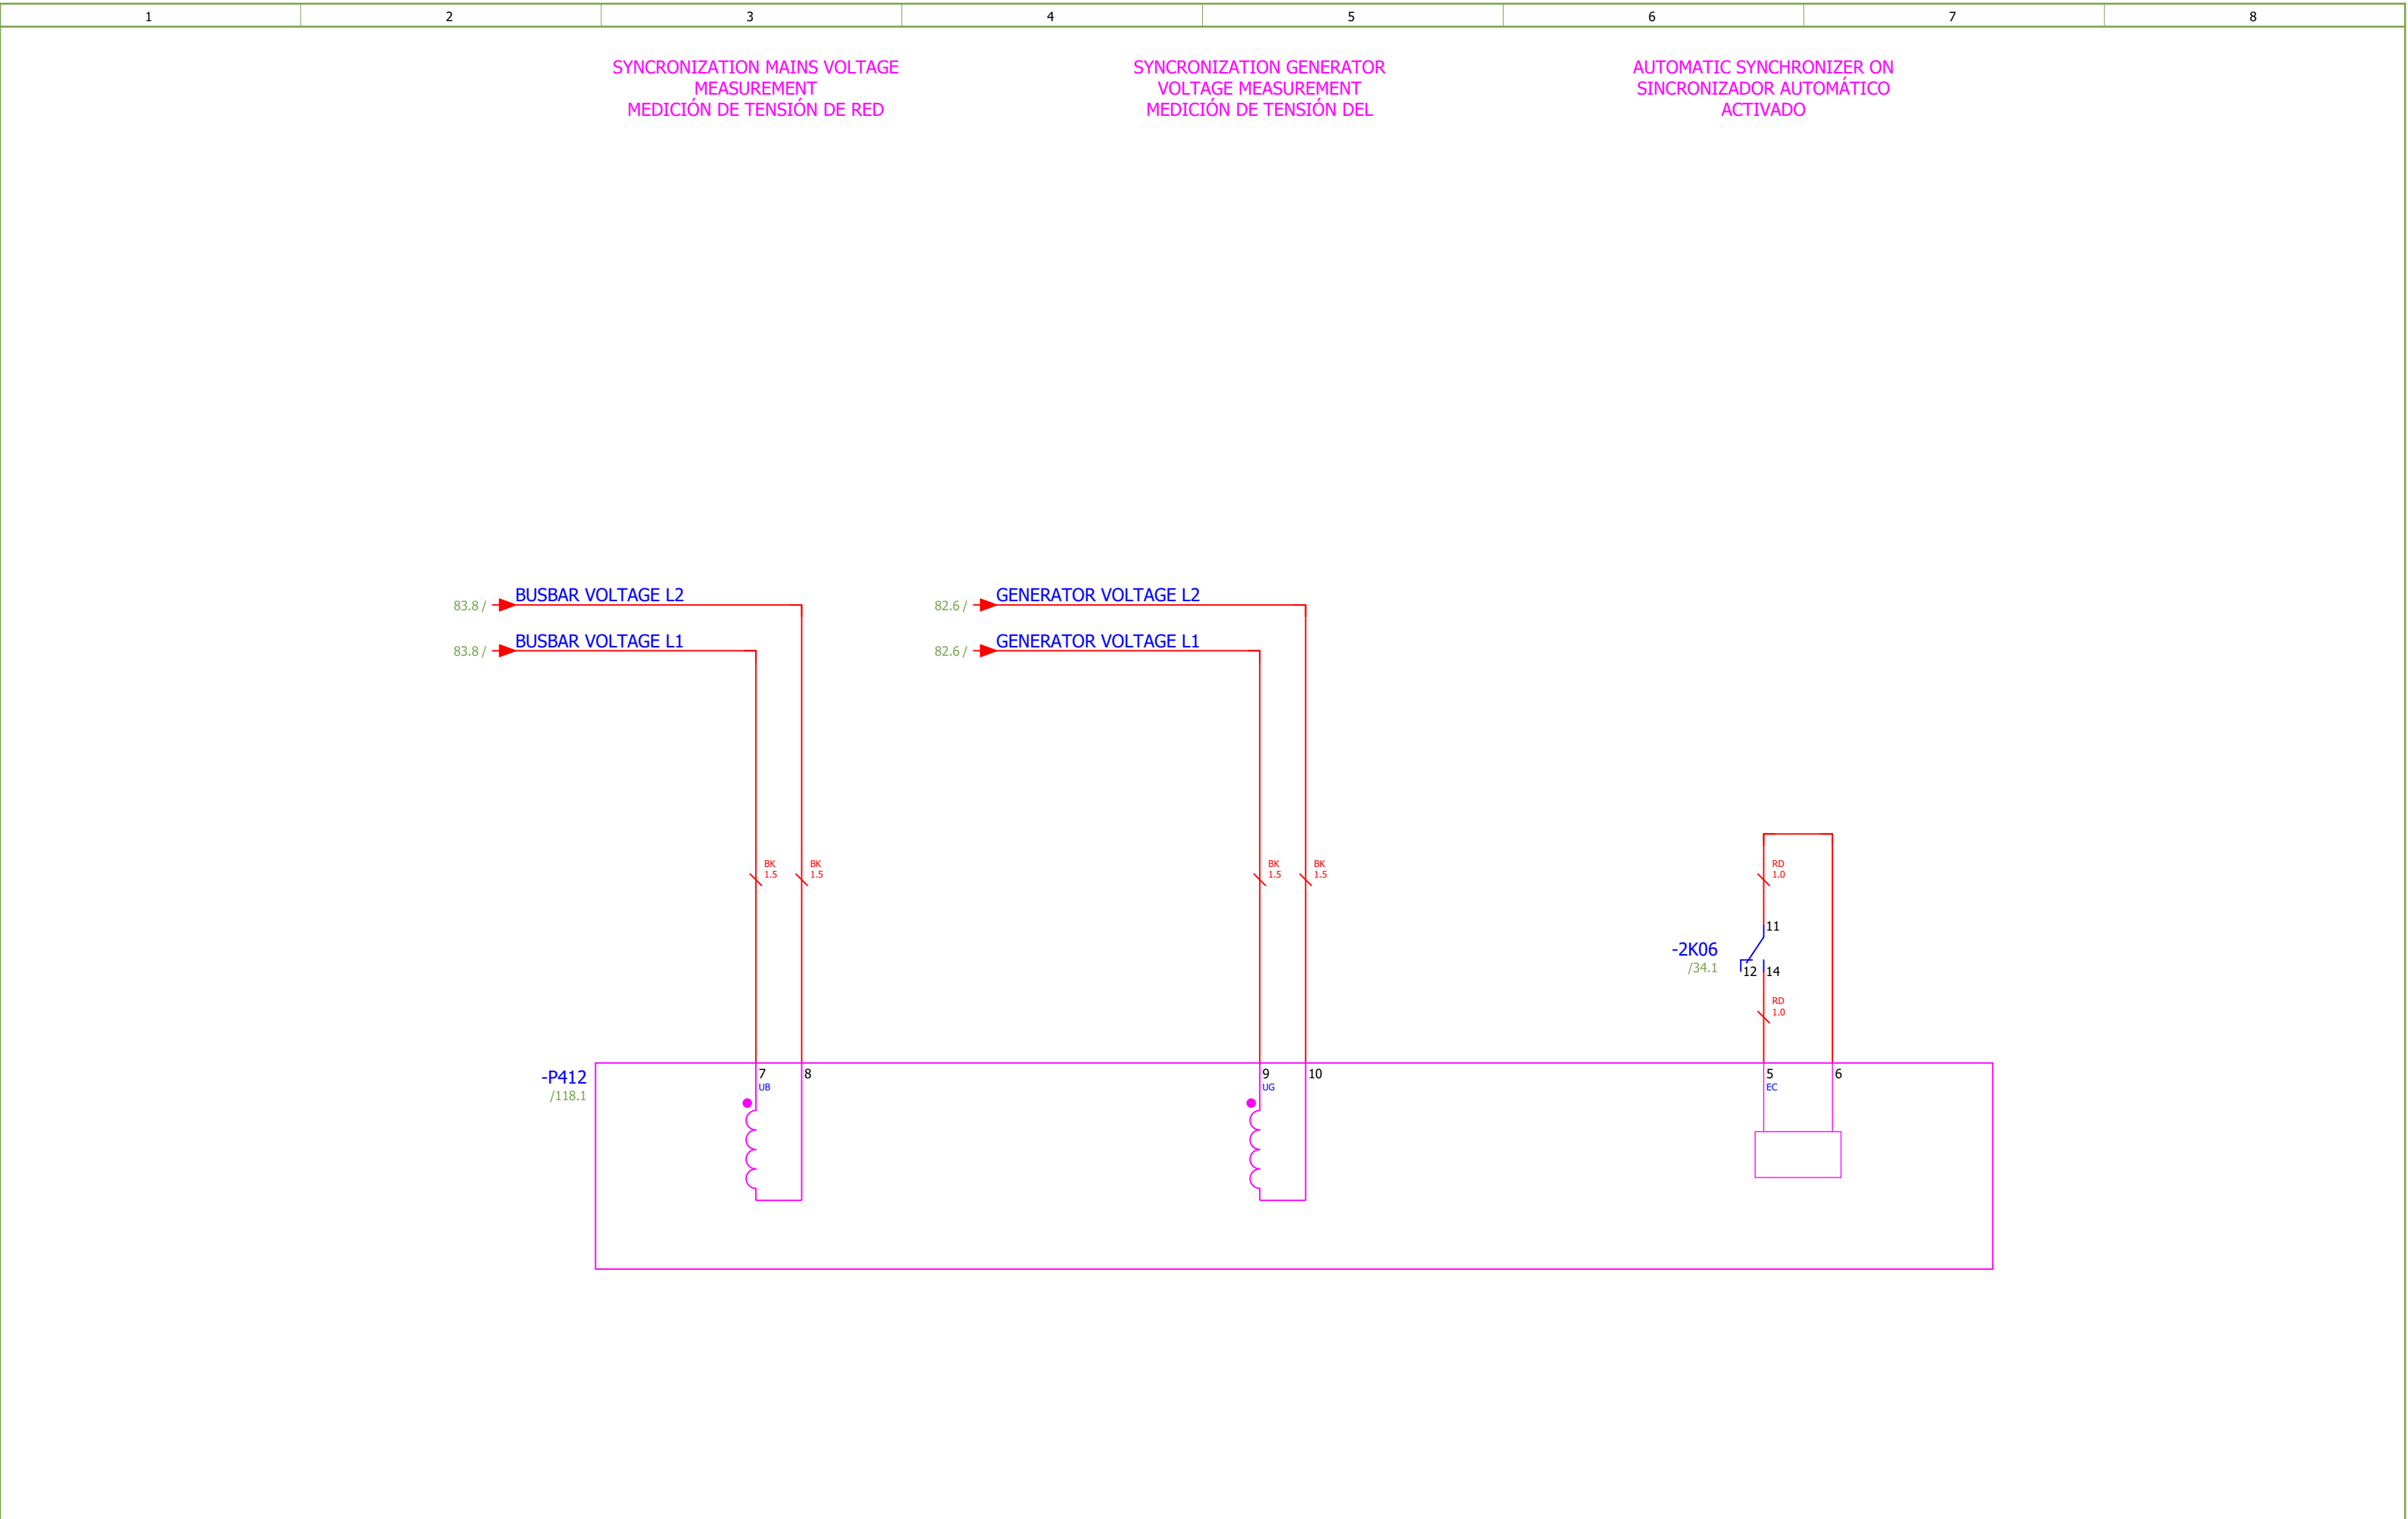

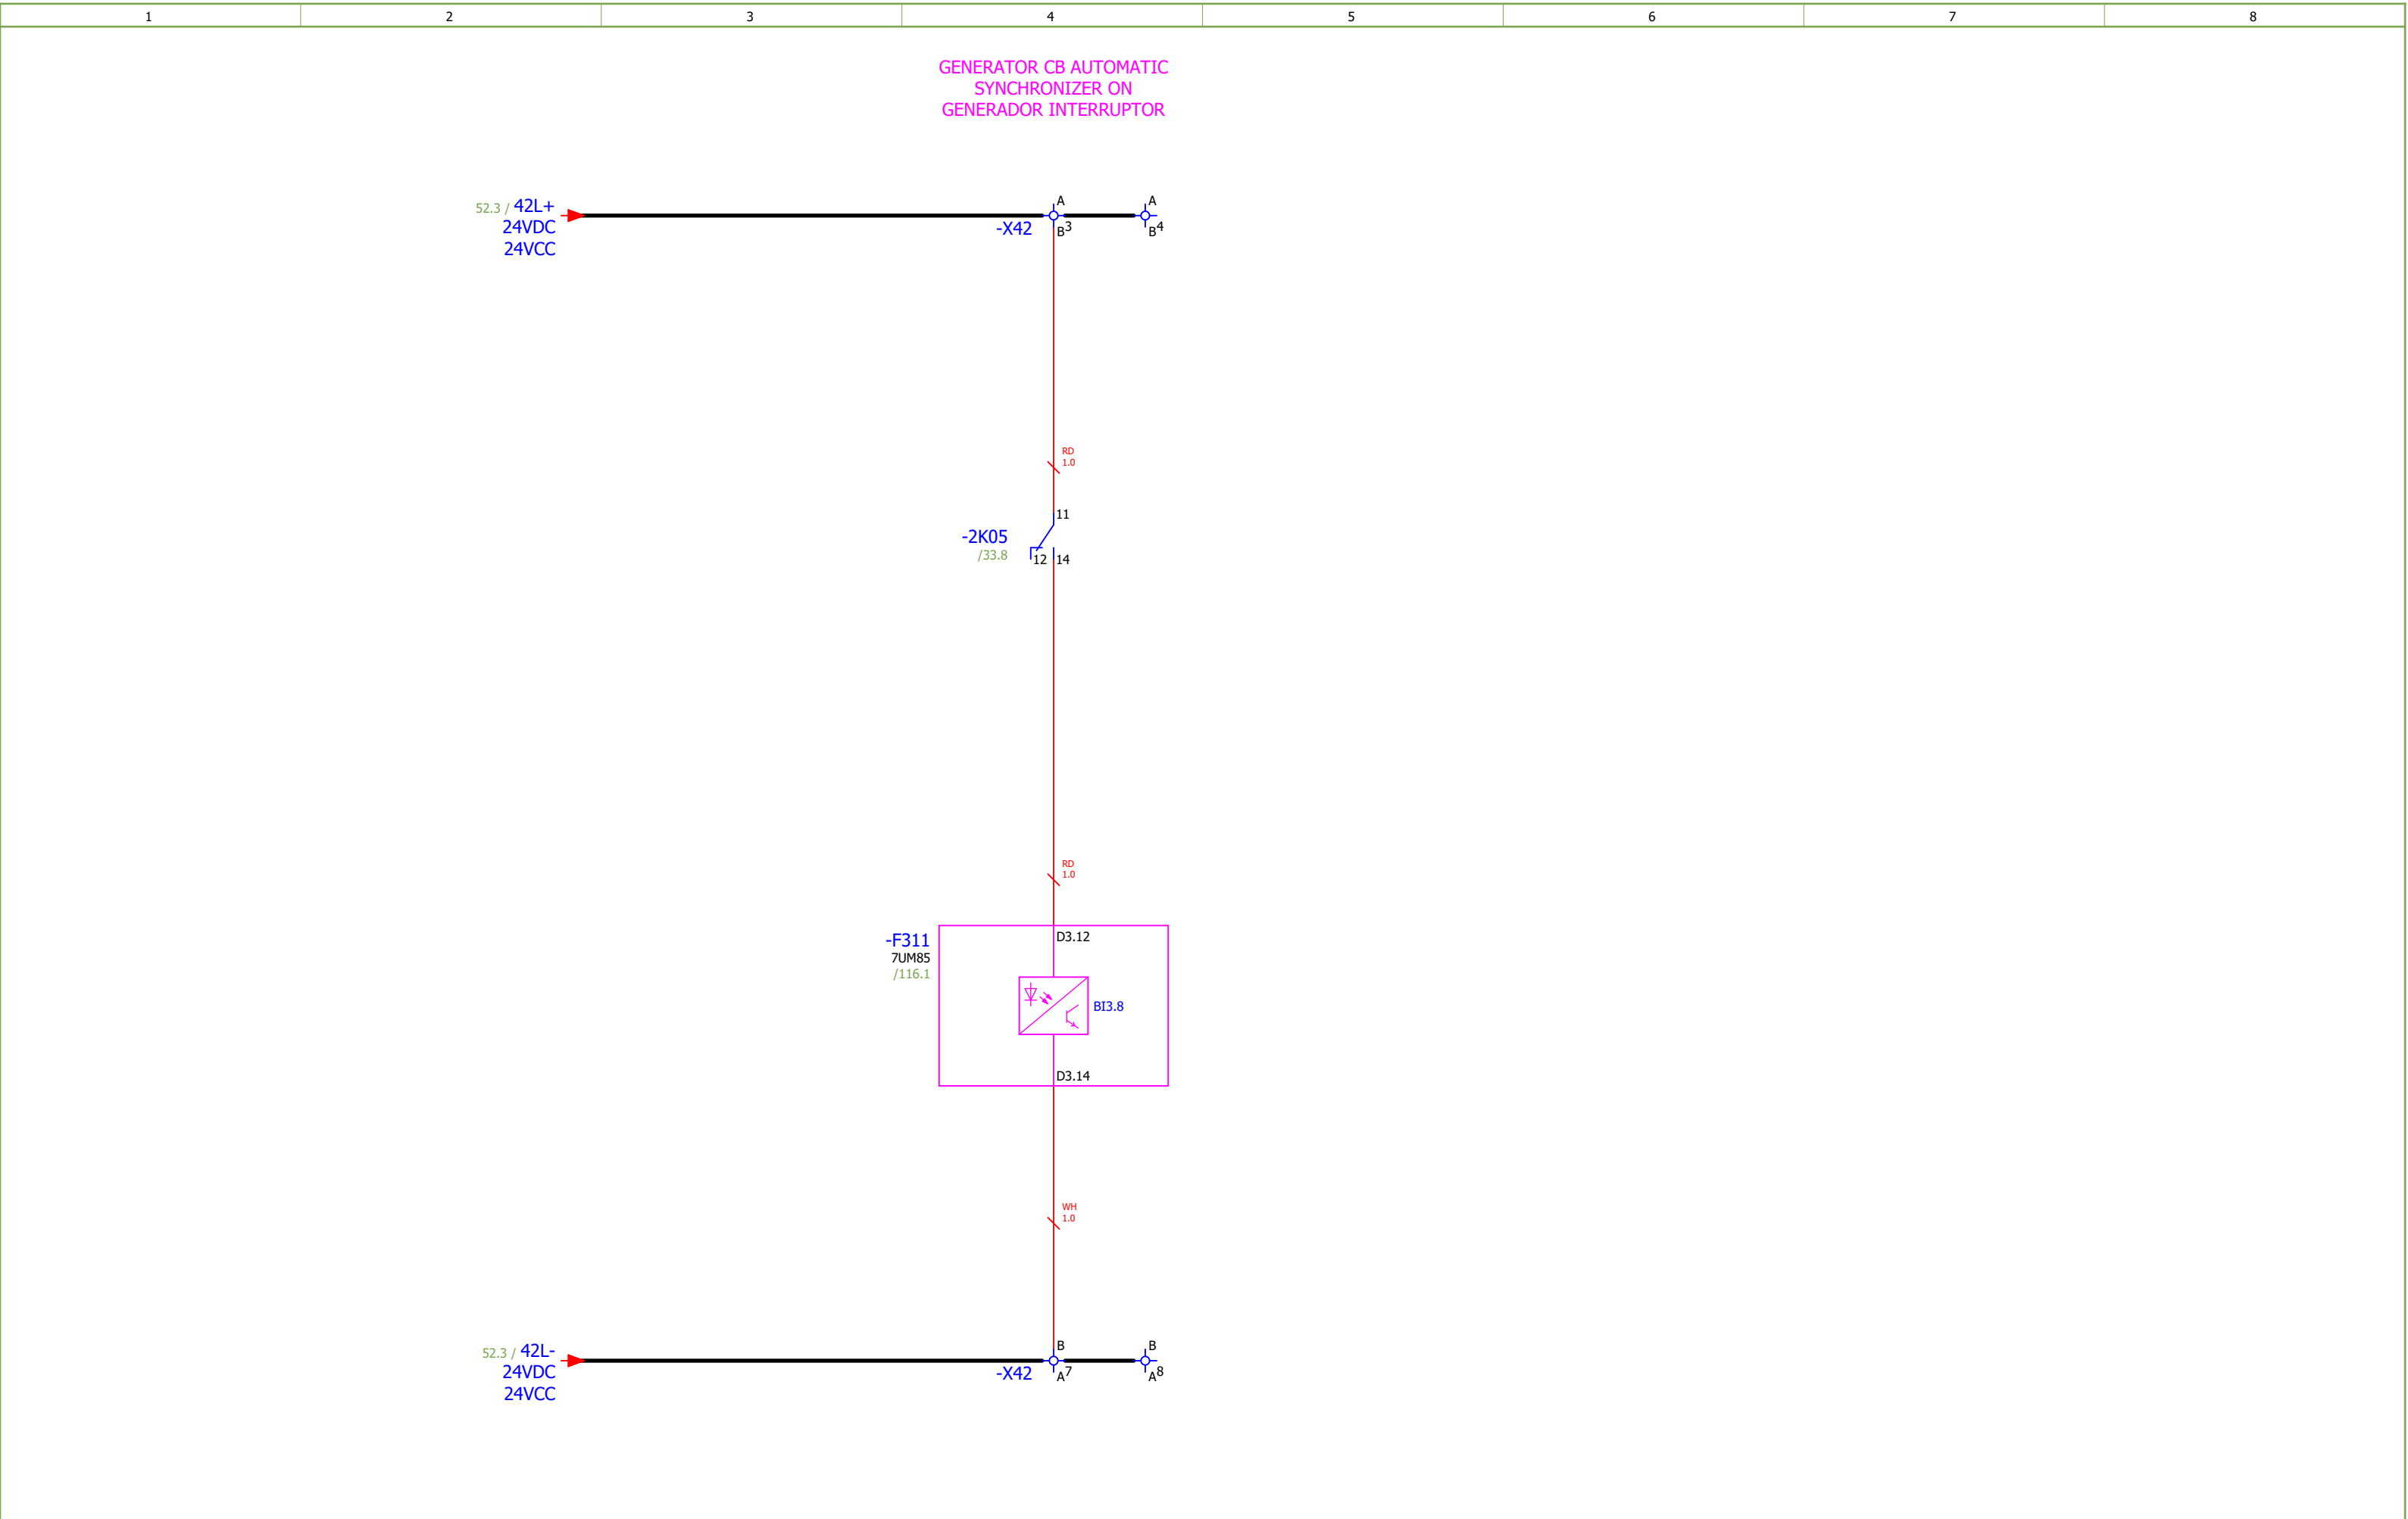

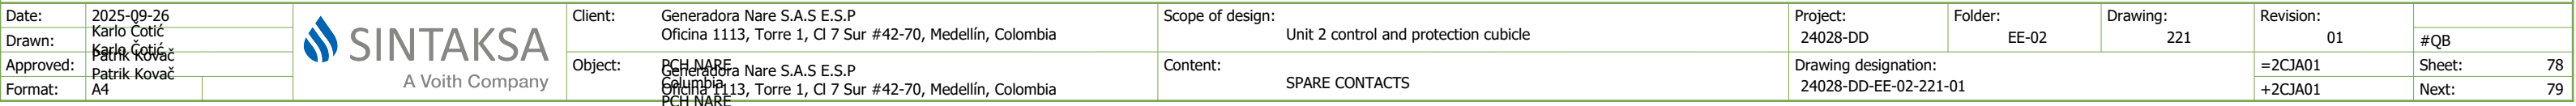


Date:	2025-09-26	 SINTAKSA A Voith Company	Client:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Scope of design:	Unit 2 control and protection cubicle	Project:	24028-DD	Folder:	EE-02	Drawing:	221	Revision:	01	
Drawn:	Karlo Čotić		Object:	BCH NARE Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Content:	CT CIRCUITS	Drawing designation:	24028-DD-EE-02-221-01				=2CJA01	Sheet:	79	
Approved:	Patrik Kovač								+2CJA01	Next:	80				
Format:	A4														


GENERATOR PROTECTION RELAY TRANSFORMER CURRENT MEASUREMENT

GENERATOR PROTECTION RELAY TRANSFORMER NEUTRAL CURRENT MEASUREMENT


GENERATOR PROTECTION RELAY GENERATOR CURRENT MEASUREMENT

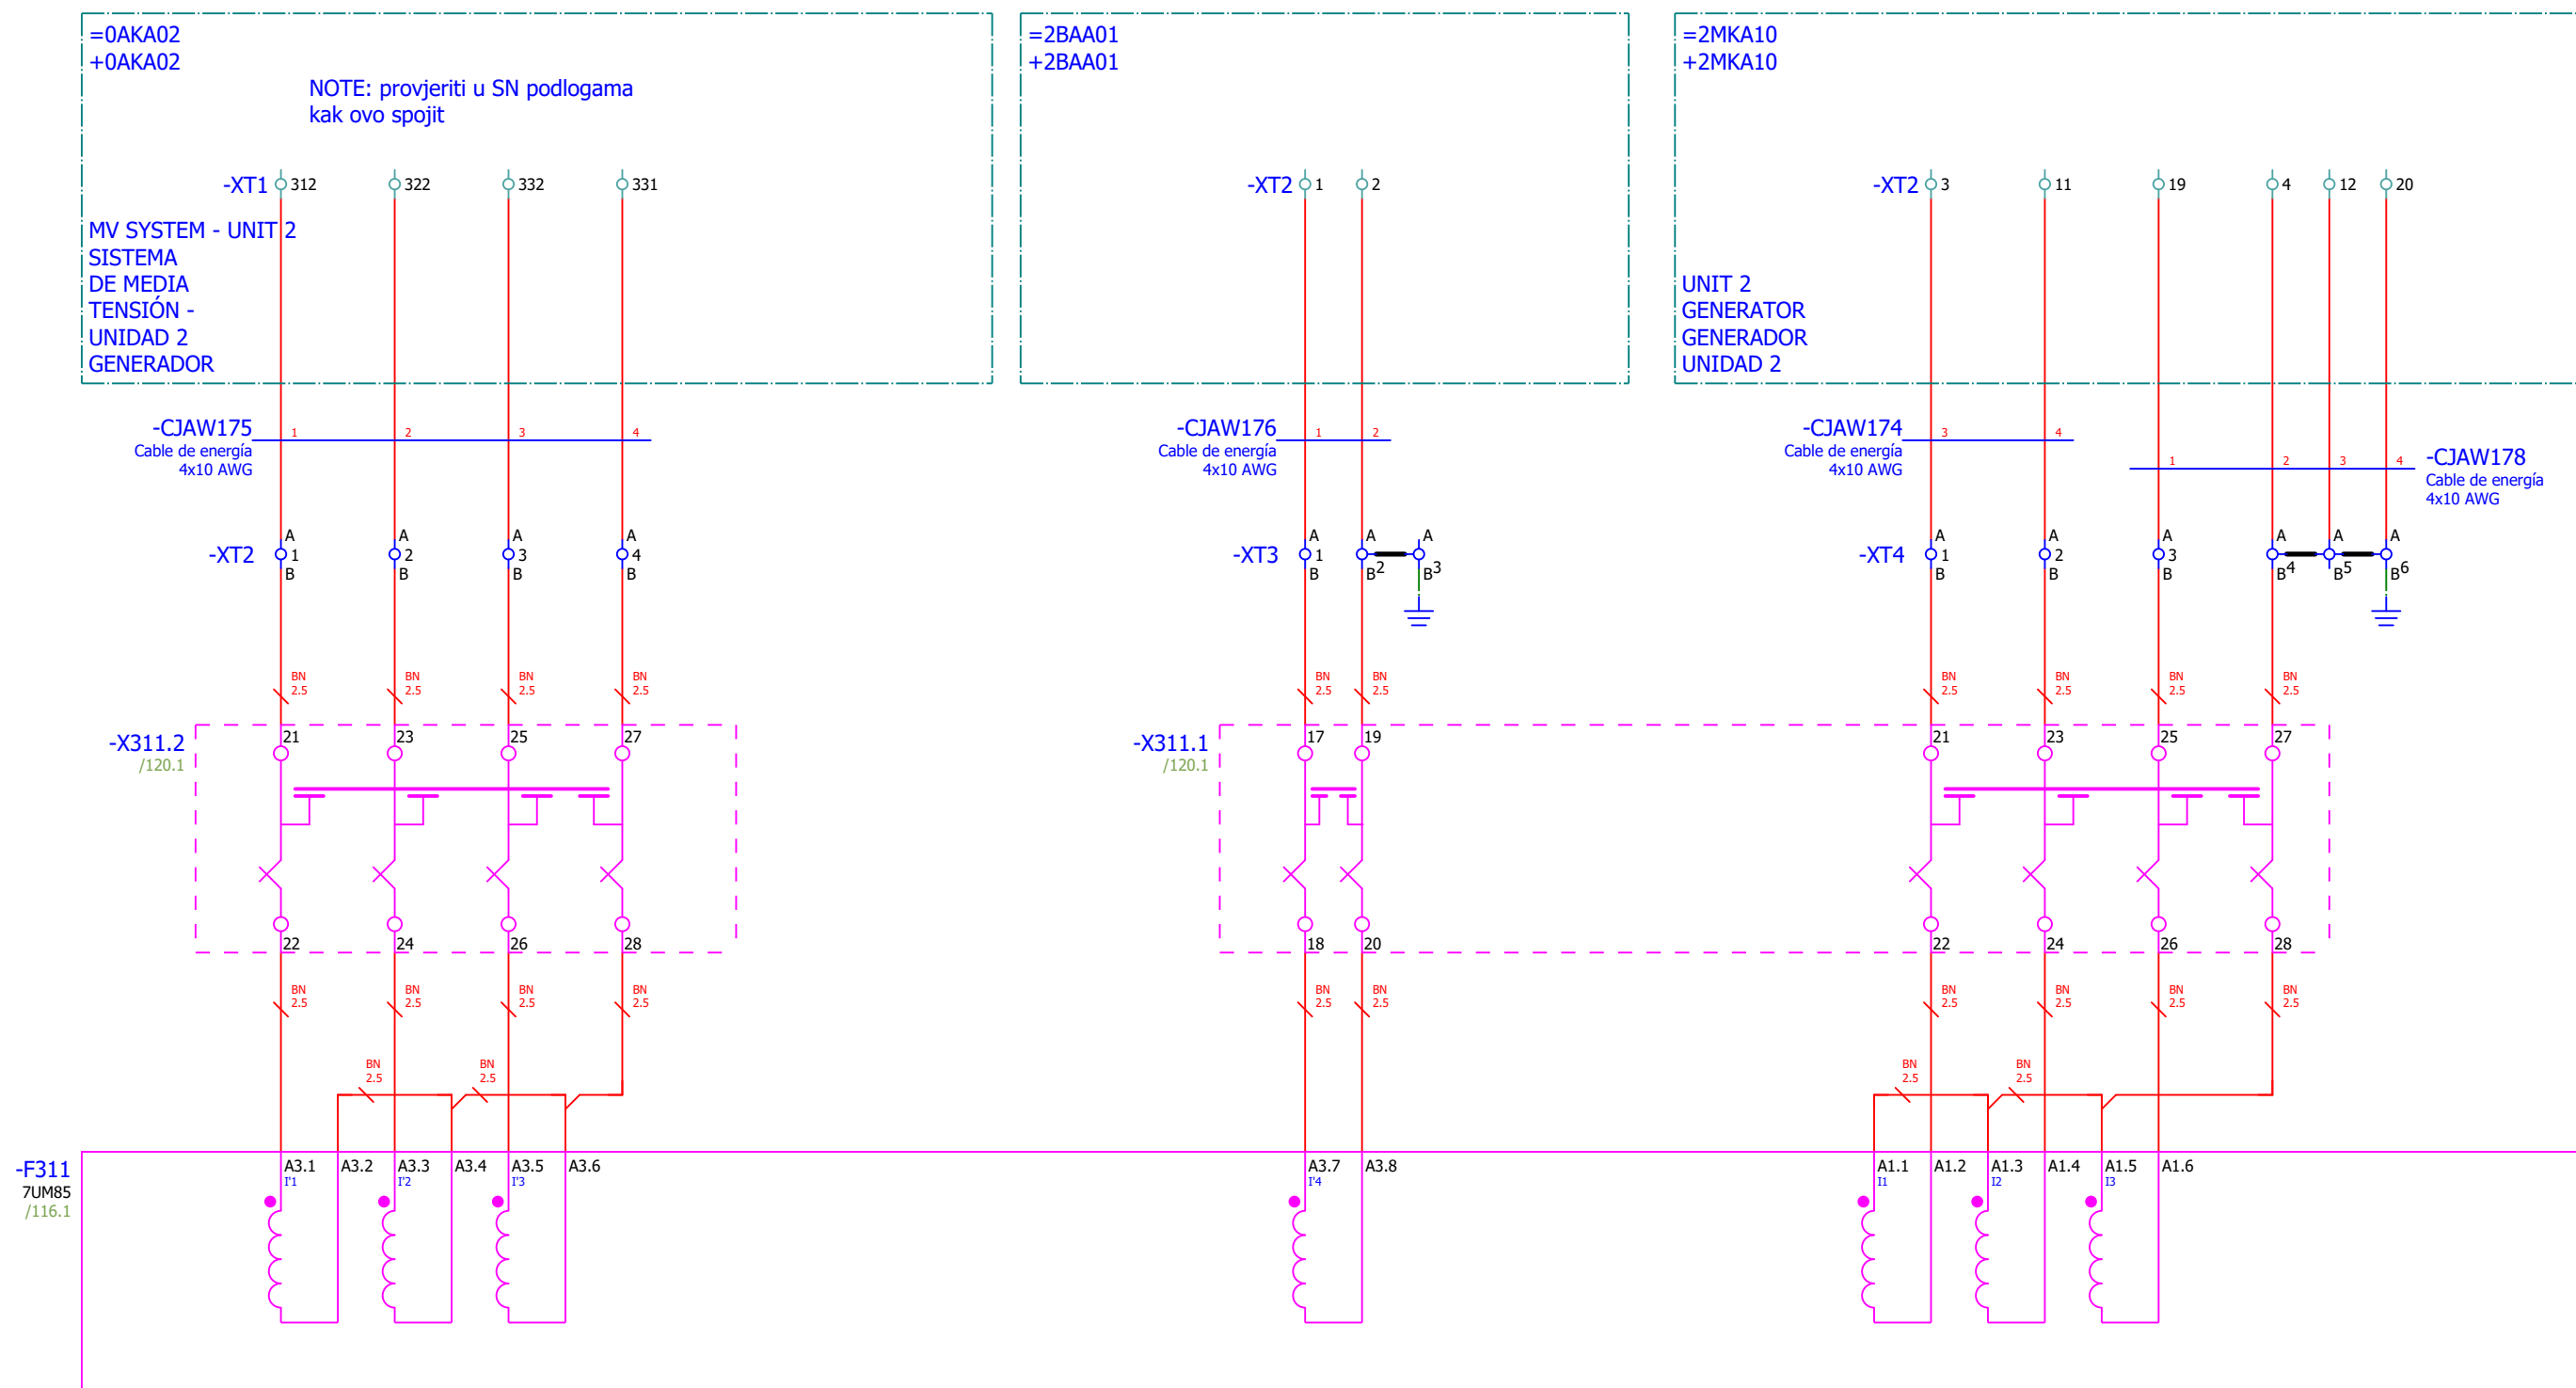


GENERATOR BACKUP PROTECTION
RELAY GENERATOR CURRENT
MEASUREMENT

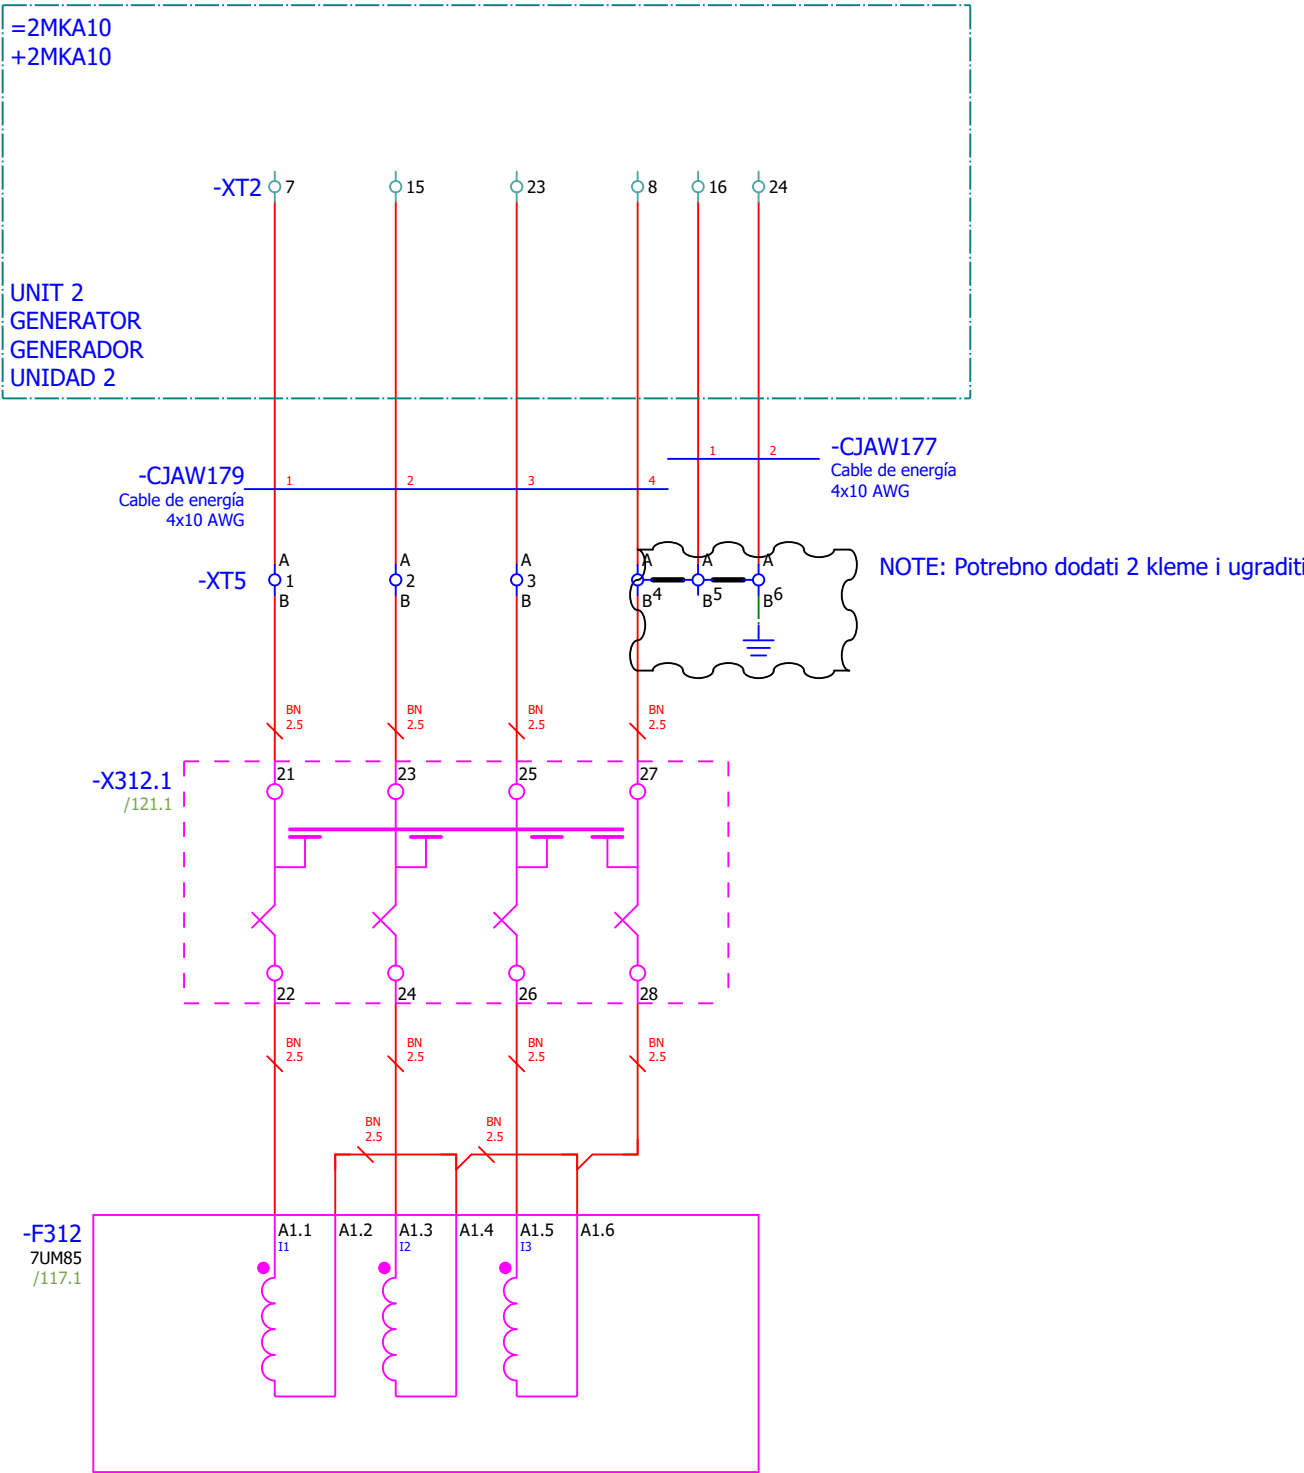

MULTIMETER MULTÍMETRO

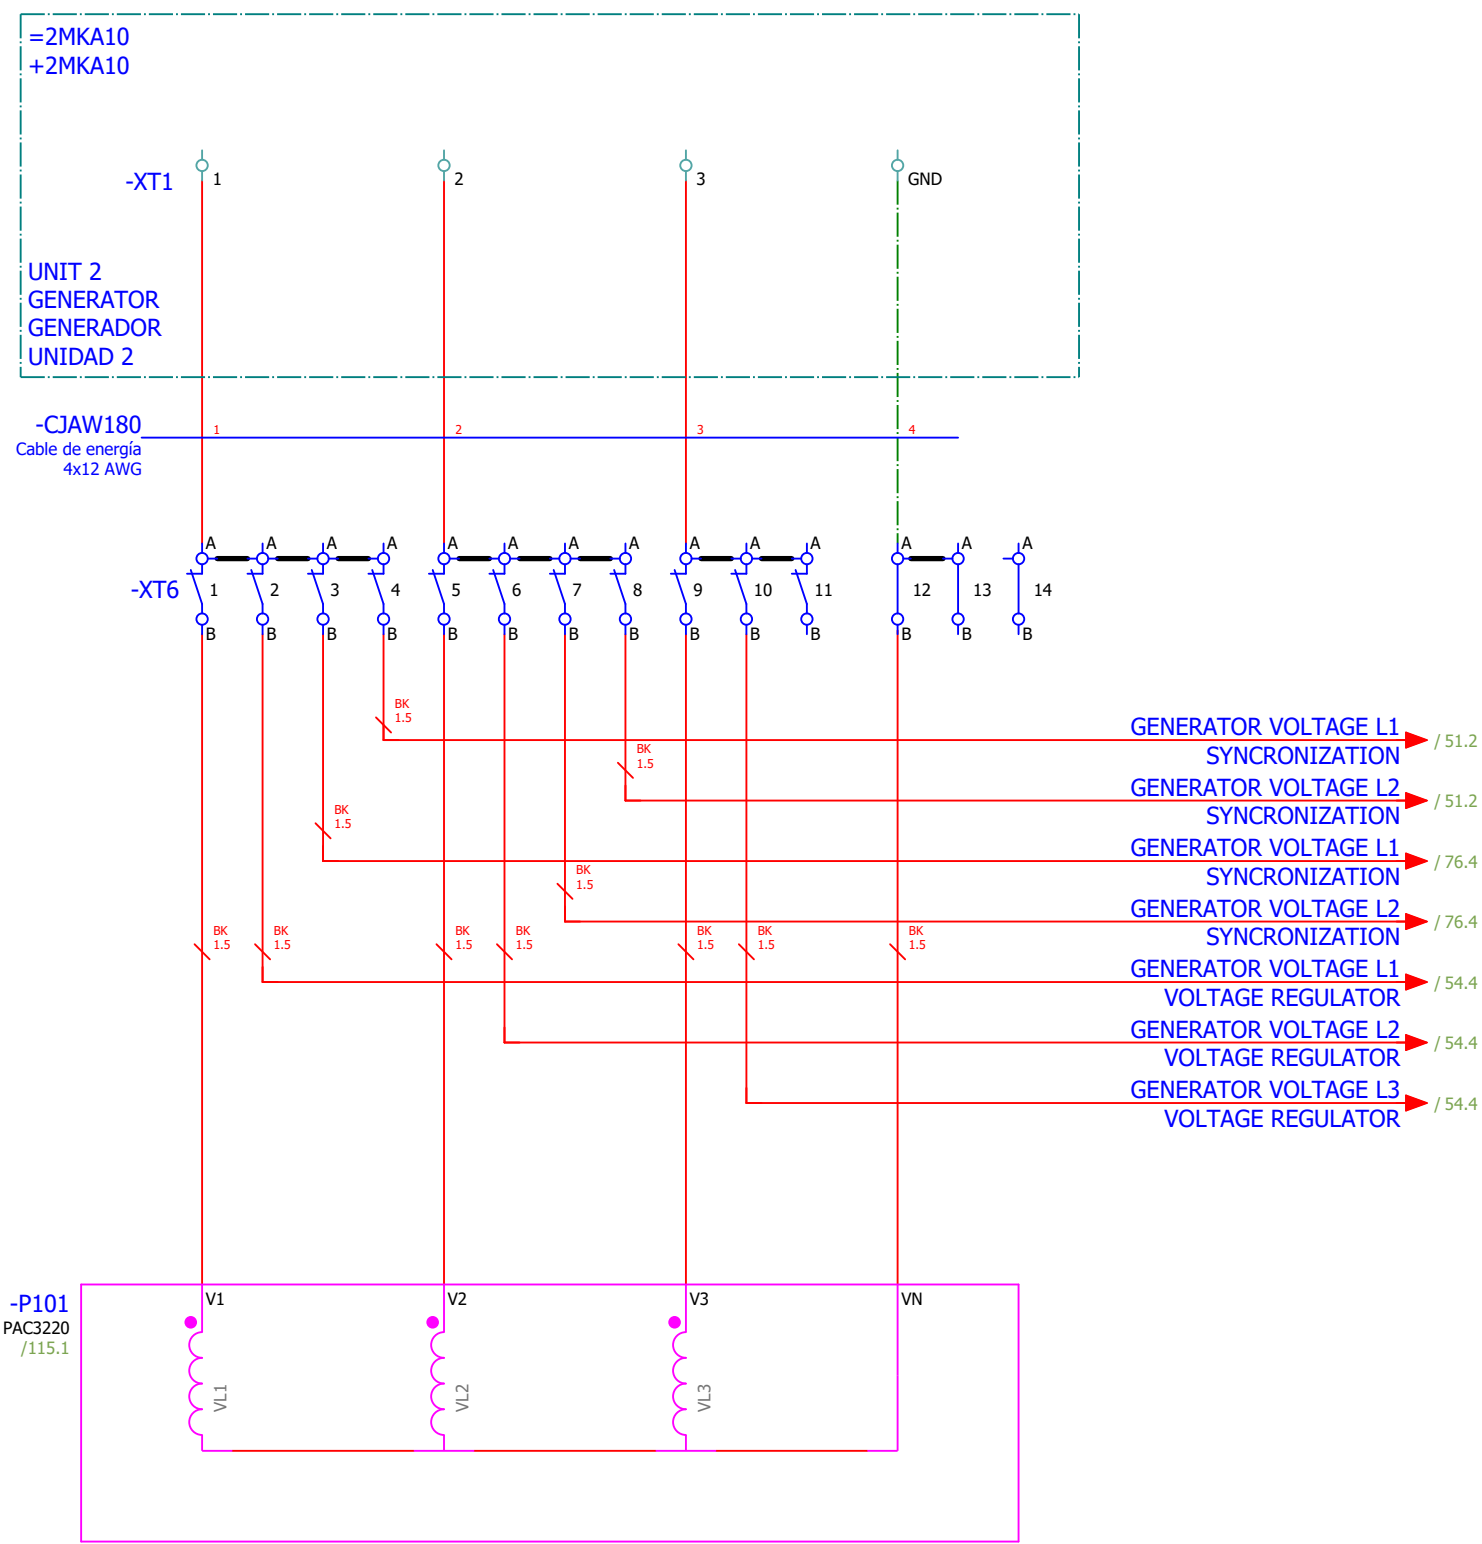

GENERATOR BACKUP PROTECTION
RELAY GENERATOR VOLTAGE
MEASUREMENT

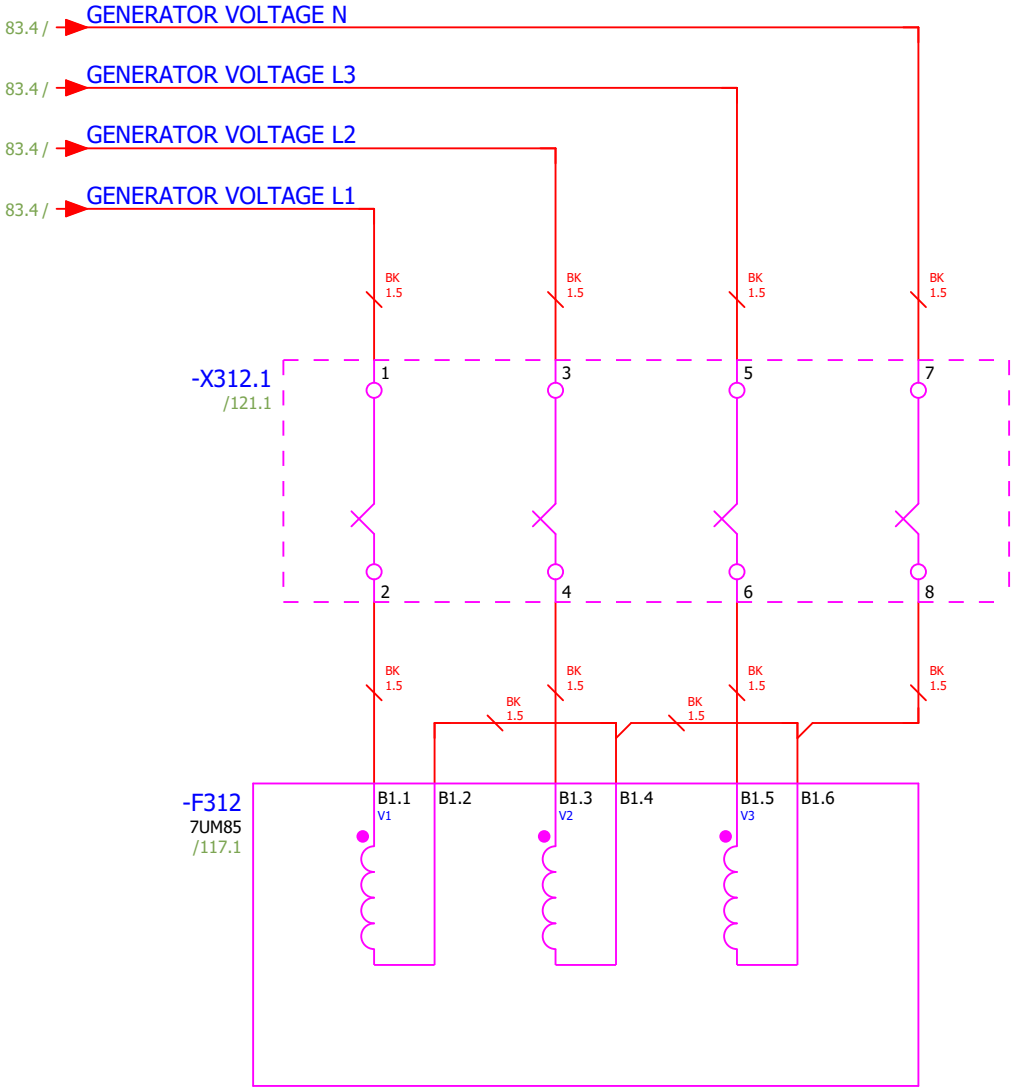


1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description		Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)									
1 1	SIMATIC HMI MTP1900 Unified Comfort		Siemens	+2CJA01	-A100										
	SIMATIC HMI MTP1900, Unified Comfort Panel, touch operation, 18.5" widescreen TFT display, 16 million colors, PROFINET interface, configurable as of WinCC Unified Comfort V16, contains open-source software, which is provided free of charge see enclosed DVD 6AV2128-3UB06-0AX1														

Date:	2025-09-26	 SINTAKSA A Voith Company	Client:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Scope of design:	Unit 2 control and protection cubicle	Project:	24028-DD	Folder:	EE-02	Drawing:	221	Revision:	01	
Drawn:	Karlo Čotić		Object:	PCH NARE Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Content:	HMI - TOUCH PANEL	Drawing designation:	24028-DD-EE-02-221-01				=2CJA01	Sheet:	87	
Approved:	Patrik Kovač											+2CJA01	Next:	88	
Format:	A4														

[illegible]


1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description			Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)								
1 1	Type: DI 16X24V DC Standard Order No.: 6ES7131-6BH01-0BA0 Número de pedido: 6ES7131-6BH01-0BA0			Siemens	+2CJA01	-A111									
	Baseunit Type A0, BU15-P16+A0+2B Unidad base Tipo A0, BU15-P16+A0+2B Número de pedido: 6ES7131-6BH01-0BA0														

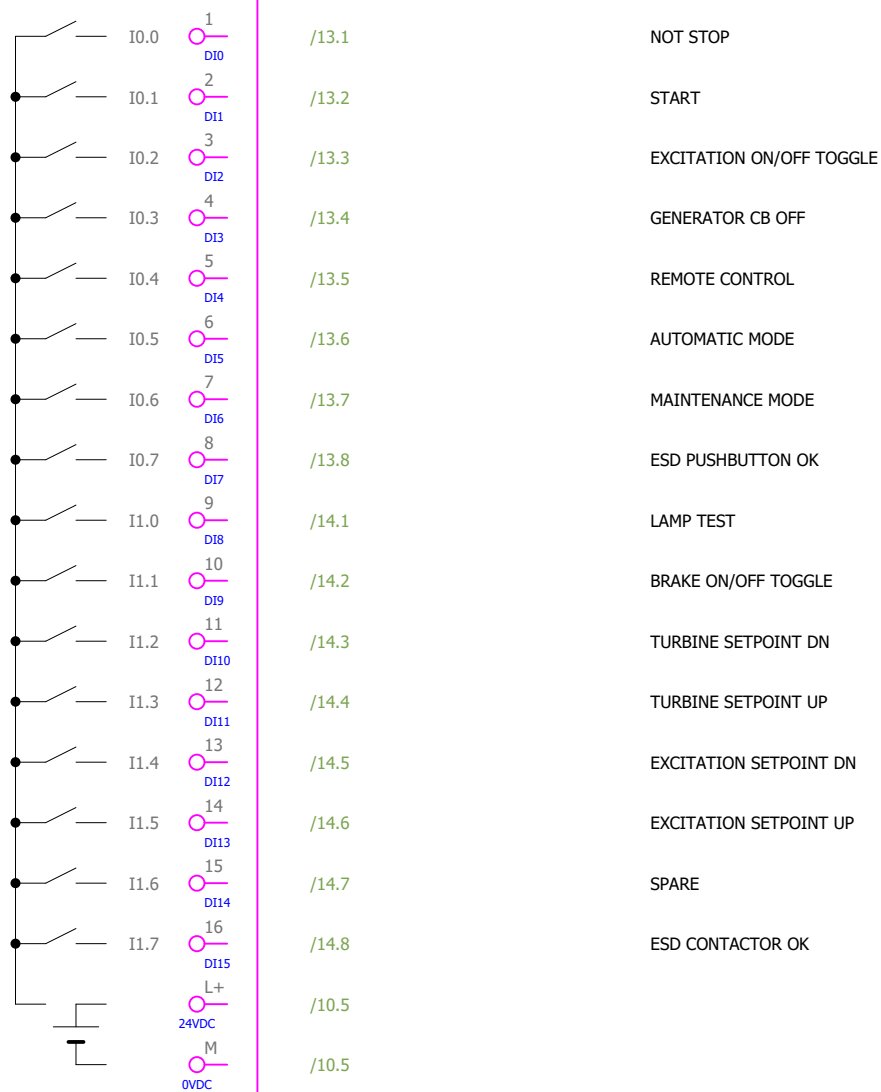


Date:	2025-09-26		Client:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Scope of design:	Unit 2 control and protection cubicle	Project:	24028-DD	Folder:	EE-02	Drawing:	221	Revision:	01	#Z
Drawn:	Karlo Čotić		Object:	PCH NARE Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Content:	PLC OVERVIEW	Drawing designation:	24028-DD-EE-02-221-01				=2CJA01	Sheet:	90	
Approved:	Patrik Kovač											+2CJA01	Next:	91	
Format:	A4														

1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description			Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)								
1 1	Type: DI 16X24V DC Standard Order No.: 6ES7131-6BH01-0BA0 Número de pedido: 6ES7131-6BH01-0BA0			Siemens	+2CJA01	-A112									
	Baseunit Type A0, BU15-P16+A0+2B Unidad base Tipo A0, BU15-P16+A0+2B Número de pedido: 6ES7193-6BP00-0BA0														

-A112
/10.5

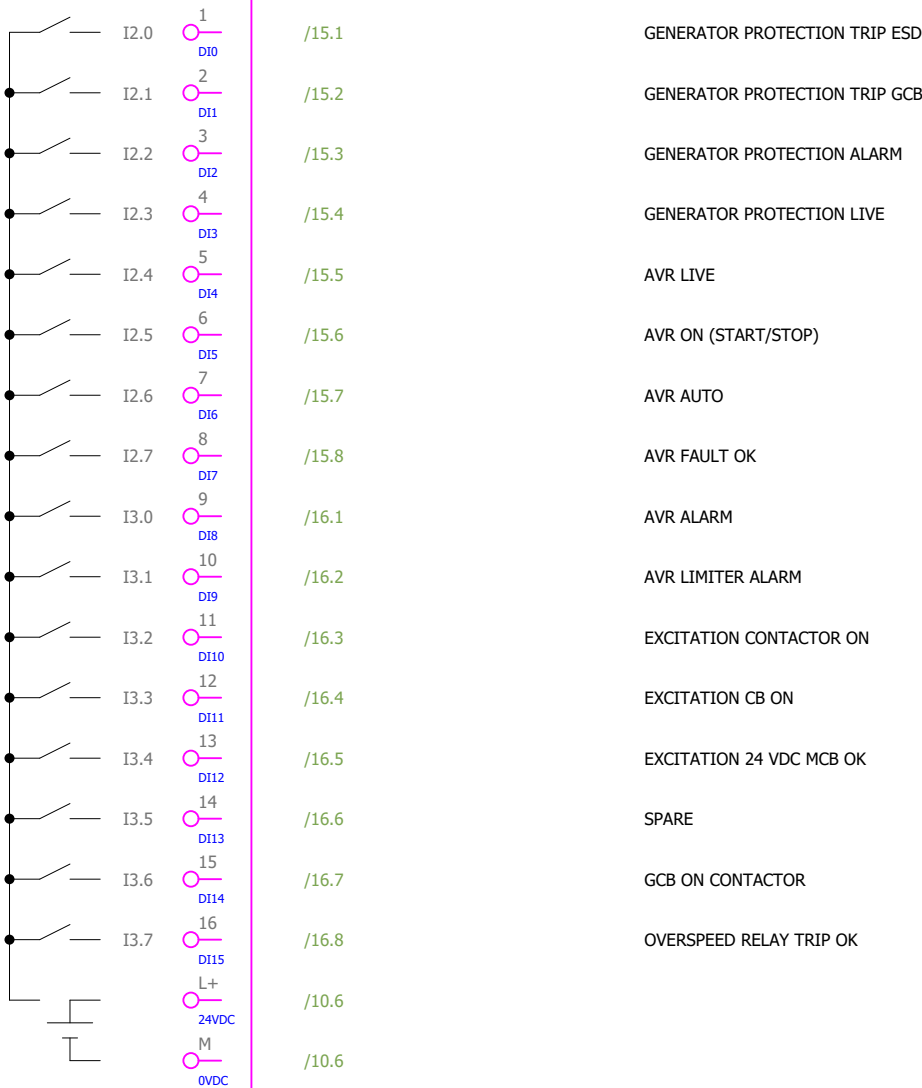


1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description			Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)								
1 1	Type: DI 16X24V DC Standard Order No.: 6ES7131-6BH01-0BA0 Número de pedido: 6ES7131-6BH01-0BA0			Siemens	+2CJA01	-A113									
	Baseunit Type A0, BU15-P16+A0+2B Unidad base Tipo A0, BU15-P16+A0+2B Número de pedido: 6ES7131-6BH01-0BA0														

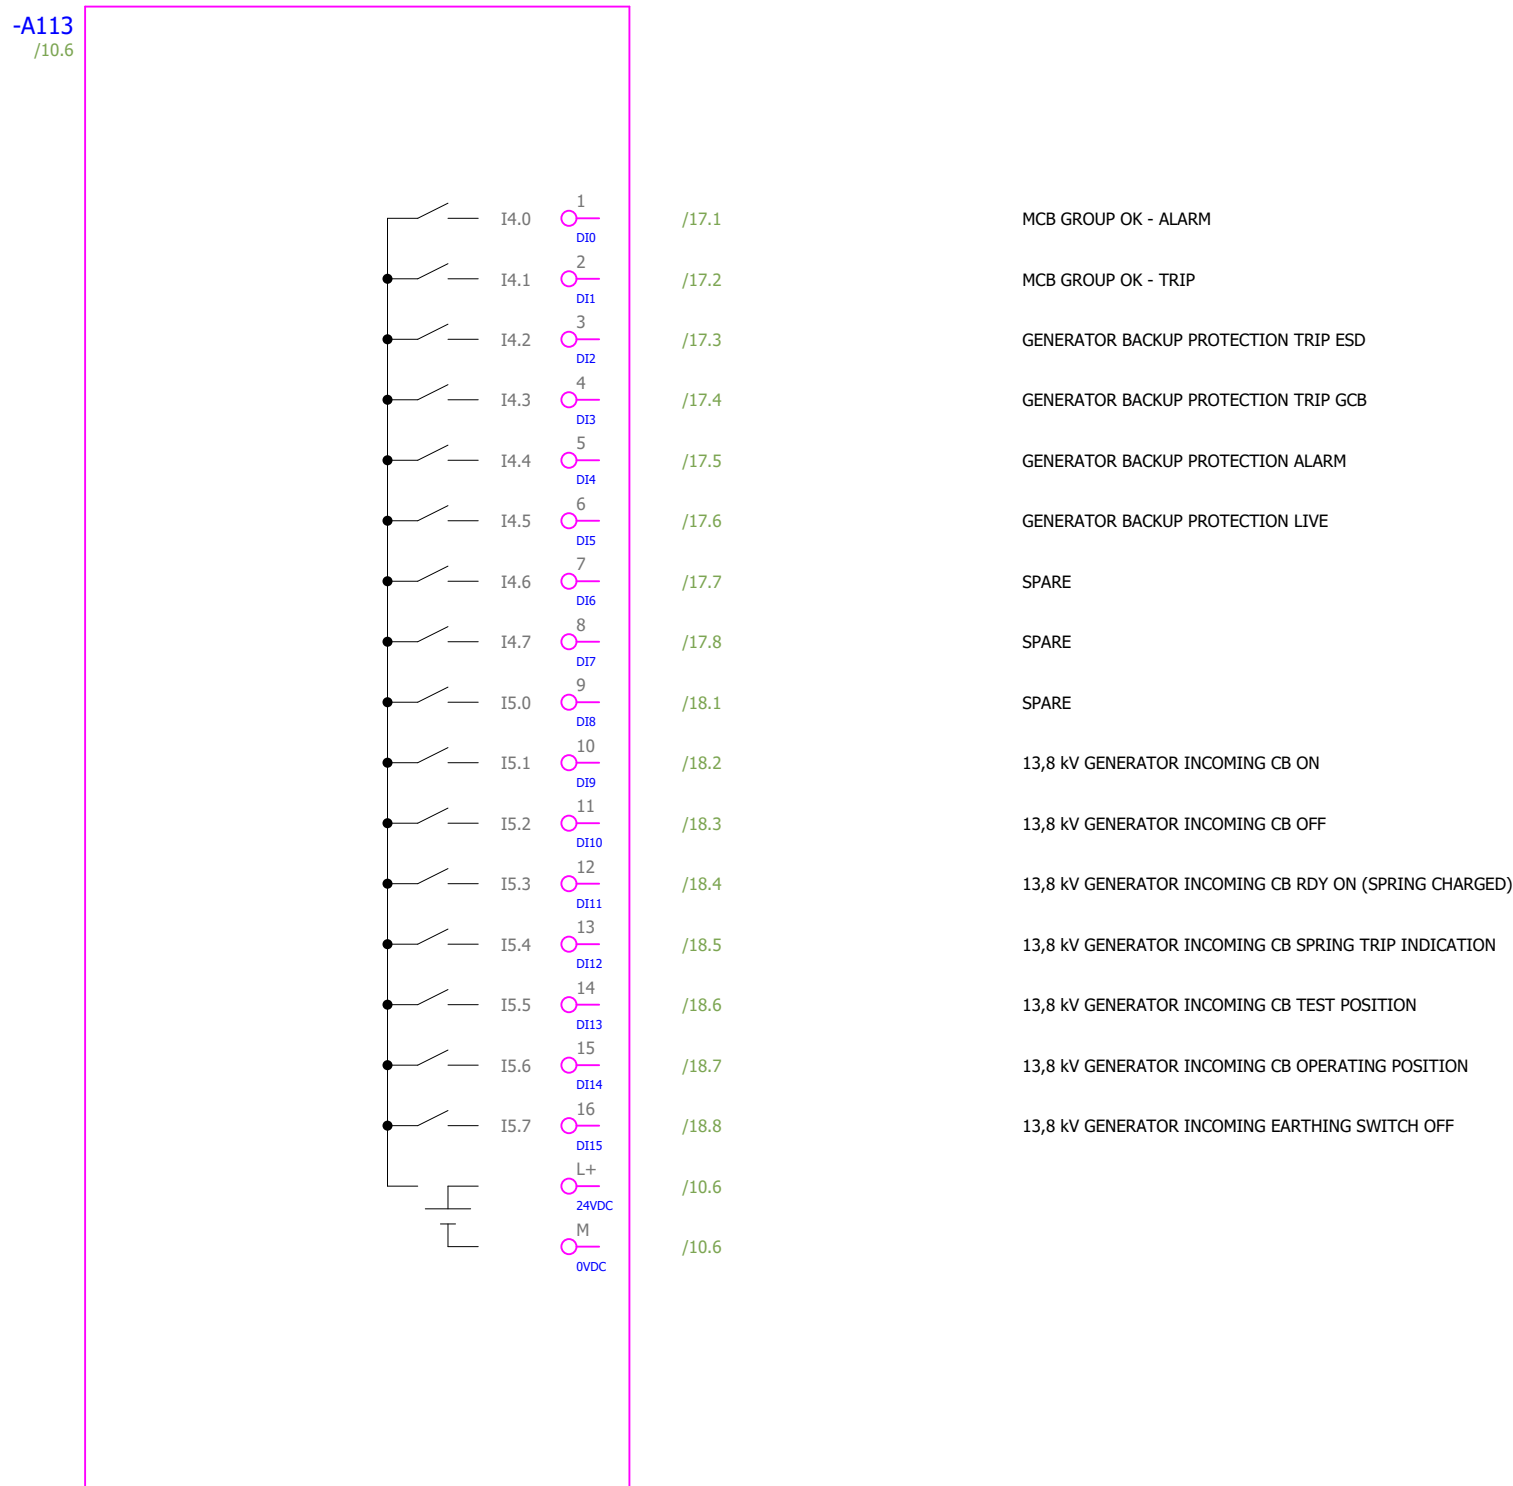

Date:	2025-09-26		 SINTAKSA A Voith Company	Client:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellin, Colombia		Scope of design:	Unit 2 control and protection cubicle		Project:	24028-DD	Folder:	EE-02	Drawing:	221	Revision:	01	#Z
Drawn:	Karlo Cotic			Object:	PCH NARE Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellin, Colombia		Content:	PLC OVERVIEW		Drawing designation:			=2CJA01			Sheet:	92	
Approved:	Patrik Kovač										24028-DD-EE-02-221-01			+2CJA01			Next:	93
Format:	A4																	

1		2	3		4	5	6	7	8
Qty. (pcs)	Equipment technical description		Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)			
	Type: DI 16X24V DC Standard Order No.: 6ES7131-6BH01-0BA0 Número de pedido: 6ES7131-6BH01-0BA0		Siemens						
1 1	Baseunit Type A0, BU15-P16+A0+2B Unidad base Tipo A0, BU15-P16+A0+2B Número de pedido: 6ES7193-6BP00-0BA0			+2CJA01	-A114				

-A114
/10.6

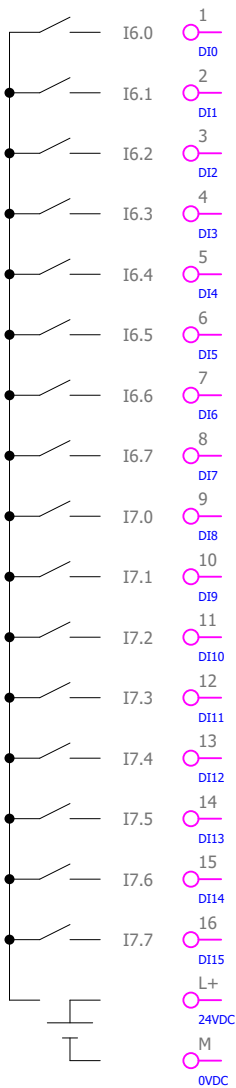


/19.1
/19.2
/19.3
/19.4
/19.5
/19.6
/19.7
/19.8
/20.1
/20.2
/20.3
/20.4
/20.5
/20.6
/20.7
/20.8
/10.7
/10.7


13,8 kV GENERATOR INCOMING EARTHING SWITCH ON
13,8 kV GENERATOR INCOMING EARTHING SWITCH OFF
13,8 kV GENERATOR INCOMING EARTHING SWITCH ON
13,8 kV GENERATOR INCOMING VOLTAGE PRESENT RELAY 1 OK
13,8 kV GENERATOR INCOMING VOLTAGE PRESENT RELAY 2 OK
13,8 kV GENERATOR INCOMING PRESS MODULE COMPARTMENT OK
13,8 kV GENERATOR INCOMING PRESS BUSBAR COMPARTMENT OK
13,8 kV GENERATOR INCOMING PRESS CABLE COMPARTMENT OK
GENERATOR NGR VT MCB OK
GENERATOR NGR MCB GROUP OK - ALARM
SPARE
UNIT MCC AC MAIN SUPPLY SWITCH CLOSED
UNIT MCC AC VOLTAGE OK
UNIT MCC VOLTAGE MEASUREMENT OK
UNIT MCC AC SURGE ARRESTER OK
HPU PUMP 1 RDY

1		2	3	4	5	6	7	8
Qty. (pcs)	Equipment technical description	Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)			
1 1	Type: DI 16X24V DC Standard Order No.: 6ES7131-6BH01-0BA0 Número de pedido: 6ES7131-6BH01-0BA0	Siemens	+2CJA01	-A115				
	Baseunit Type A0, BU15-P16+A0+2B Unidad base Tipo A0, BU15-P16+A0+2B Número de pedido: 6ES7193-6BP00-0BA0							

-A115
/10.7

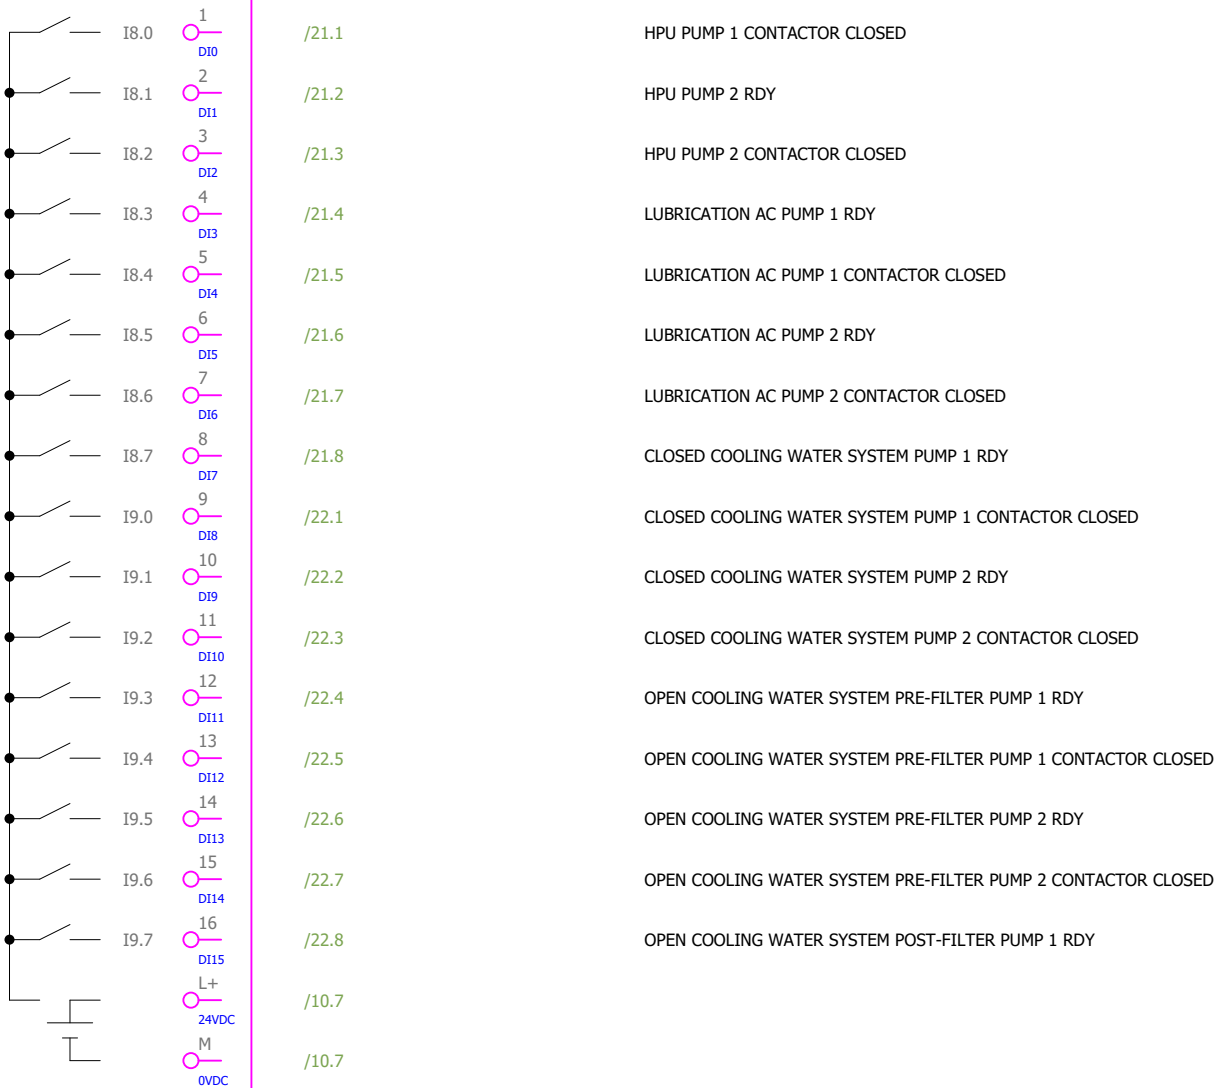

1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description			Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)								
1 1	Type: DI 16X24V DC Standard Order No.: 6ES7131-6BH01-0BA0 Número de pedido: 6ES7131-6BH01-0BA0			Siemens	+2CJA01	-A117									
	Baseunit Type A0, BU15-P16+A0+2B Unidad base Tipo A0, BU15-P16+A0+2B Número de pedido: 6ES7131-6BH01-0BA0														

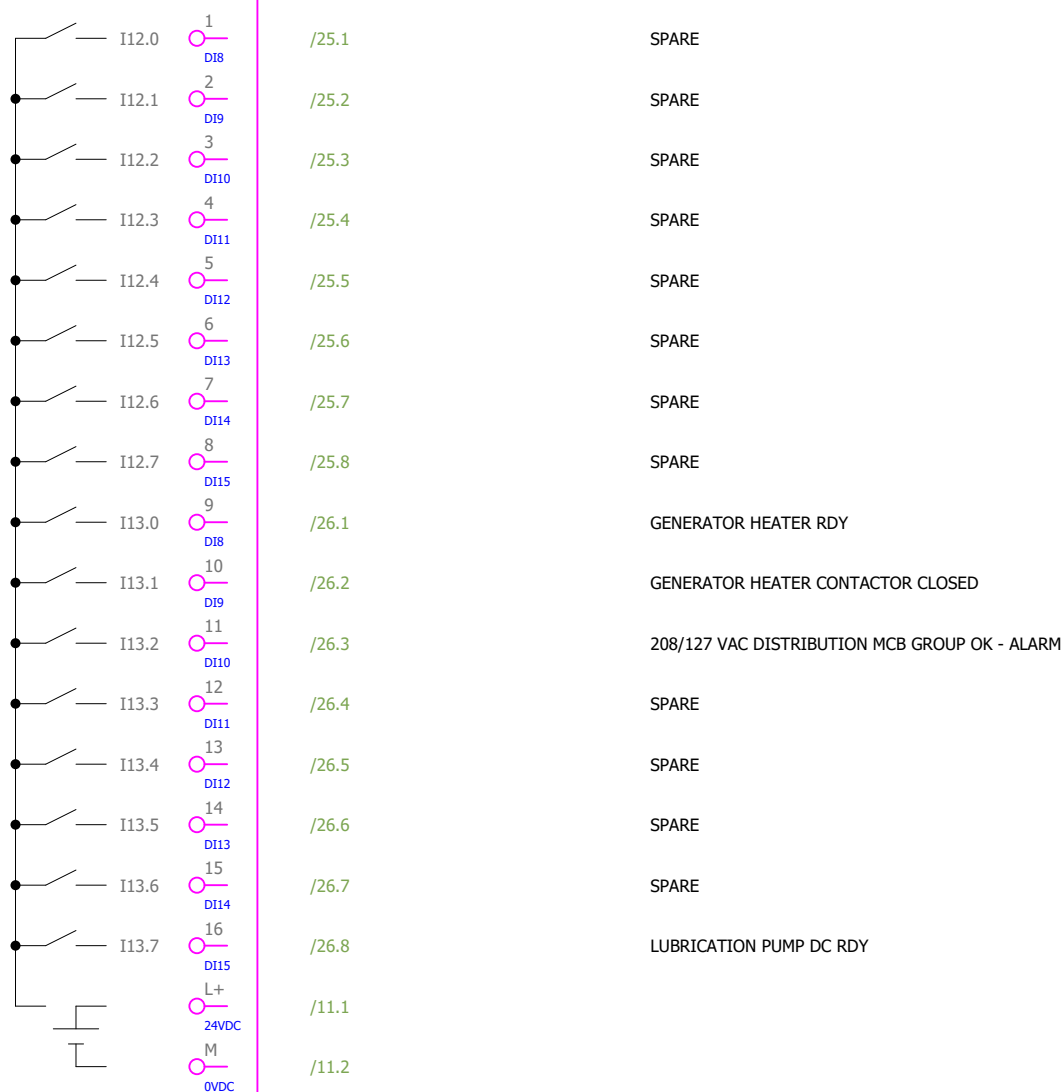

Date:	2025-09-26	 SINTAKSA A Voith Company	Client:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellin, Colombia	Scope of design:	Unit 2 control and protection cubicle	Project:	24028-DD	Folder:	EE-02	Drawing:	221	Revision:	01	#Z
Drawn:	Karlo Cotic		Object:	PCH NARE Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellin, Colombia	Content:	PLC OVERVIEW	Drawing designation:	=2CJA01						Sheet:	96
Approved:	Patrik Kovac														
Format:	A4							+2CJA01						Next:	97

1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description			Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)								
1 1	Type: DI 16X24V DC Standard Order No.: 6ES7131-6BH01-0BA0 Número de pedido: 6ES7131-6BH01-0BA0			Siemens	+2CJA01	-A118									
	Baseunit Type A0, BU15-P16+A0+2B Unidad base Tipo A0, BU15-P16+A0+2B Número de pedido: 6ES7131-6BH01-0BA0														

[illegible]

1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description			Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)								
1 1	Type: DQ 16x 24V DC/0,5A			Siemens	+2CJA01	-A131									
	Número de pedido: 6ES7132-6BH01-0BA0														
	Baseunit Type A0, BU15-P16+A0+2D Unidad base Tipo A0, BU15-P16+A0+2D Número de pedido: 6ES7132-6BH01-0BA0														


Date:	2025-09-26	 SINTAKSA A Voith Company	Client:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Scope of design:	Unit 2 control and protection cubicle	Project:	24028-DD	Folder:	EE-02	Drawing:	221	Revision:	01	
Drawn:	Karlo Čotić		Object:	PCH NARE Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Content:	PLC OVERVIEW	Drawing designation:	24028-DD-EE-02-221-01			=2CJA01	Sheet:	100		
Approved:	Patrik Kovač						+2CJA01	Next:	101						
Format:	A4														

1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description			Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)								
1 1	Type: DQ 16x 24V DC/0,5A			Siemens	+2CJA01	-A132									
	Número de pedido: 6ES7132-6BH01-0BA0														
	Baseunit Type A0, BU15-P16+A0+2B														
	Unidad base Tipo A0, BU15-P16+A0+2B														

Date:	2025-09-26	 SINTAKSA A Voith Company	Client:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Scope of design:	Unit 2 control and protection cubicle	Project:	24028-DD	Folder:	EE-02	Drawing:	221	Revision:	01	
Drawn:	Karlo Čotić		Object:	PCH NARE Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Content:	PLC OVERVIEW	Drawing designation:	24028-DD-EE-02-221-01				=2CJA01	Sheet:	101	
Approved:	Patrik Kovač											+2CJA01	Next:	102	
Format:	A4														

1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description	Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)										
1 1	Type: DQ 16x 24V DC/0,5A	Siemens	+2CJA01	-A133											
	Número de pedido: 6ES7132-6BH01-0BA0														
	Baseunit Type A0, BU15-P16+A0+2B Unidad base Tipo A0, BU15-P16+A0+2B Número de pedido: 6ES7132-6BH01-0BA0														


Date:	2025-09-26	 SINTAKSA A Voith Company	Client:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Scope of design:	Unit 2 control and protection cubicle	Project:	24028-DD	Folder:	EE-02	Drawing:	221	Revision:	01	
Drawn:	Karlo Čotić		Object:	PCH NARE Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Content:	PLC OVERVIEW	Drawing designation:	24028-DD-EE-02-221-01				=2CJA01	Sheet:	102	
Approved:	Patrik Kovač											+2CJA01	Next:	103	
Format:	A4														

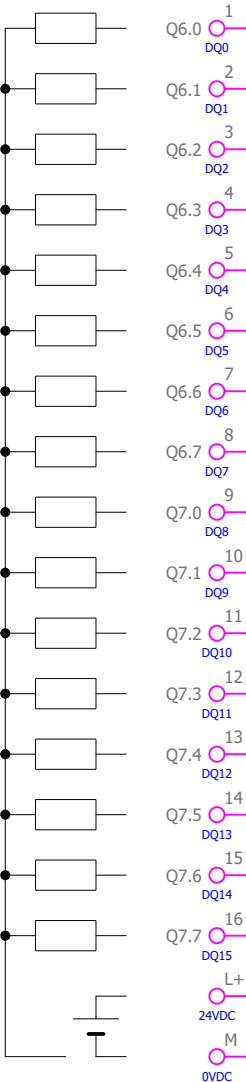	1	2	3	4	5	6	7	8
Qty. (pcs)	Equipment technical description		Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)		
1 1	Type: DQ 16x 24V DC/0,5A Número de pedido: 6ES7132-6BH01-0BA0 Baseunit Type A0, BU15-P16+A0+2B Unidad base Tipo A0, BU15-P16+A0+2B Número de pedido: 6ES7193-6BP00-0BA0		Siemens	+2CJA01	-A134			
-A134 /11.5 								

1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description			Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)								
1 1	Type: AI 2XI 2-/4-WIRE Standard			Siemens	+2CJA01	-A141									
	Número de pedido: 6ES7134-6GB00-0BA1														
	Baseunit Type A0, BU15-P16+A0+2D Unidad base Tipo A0, BU15-P16+A0+2D Número de pedido: 6ES7134-6GB00-0BA1														

Date:	2025-09-26	 SINTAKSA A Voith Company	Client:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Scope of design:	Unit 2 control and protection cubicle	Project:	24028-DD	Folder:	EE-02	Drawing:	221	Revision:	01	#Z
Drawn:	Karlo Čotić		Object:	PCH NARE Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Content:	PLC OVERVIEW	Drawing designation:	24028-DD-EE-02-221-01				=2CJA01	Sheet:	104	
Approved:	Patrik Kovač						+2CJA01	Next:	105						
Format:	A4														

1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description			Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)								
1 1	Type: AI 4XI 2-/4-WIRE Standard			Siemens	+2CJA01	-A143									
	Número de pedido: 6ES7134-6GD01-0BA1														
	Baseunit Type A0, BU15-P16+A0+2B Unidad base Tipo A0, BU15-P16+A0+2B Número de pedido: 6ES7134-6GD01-0BA1														

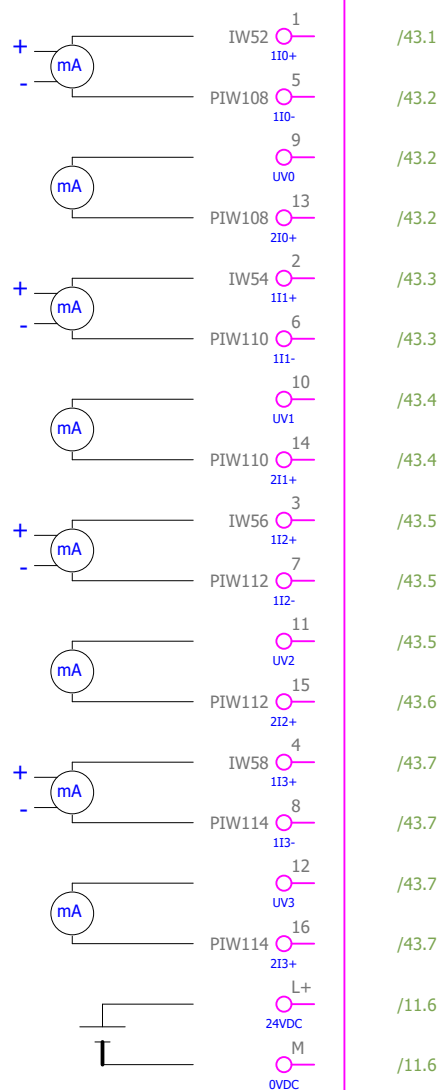

VIBRATION TRANSMITTER RELATIVE 0° D.E. BEARING
SENSOR DE VIBRACIÓN RELATIVO 0° COJINETE LA

VIBRATION TRANSMITTER RELATIVE 90° D.E. BEARING
SENSOR DE VIBRACIÓN RELATIVO 90° COJINETE LA

VIBRATION TRANSMITTER RELATIVE 0° N.D.E. BEARING
SENSOR DE VIBRACIÓN RELATIVO 0° COJINETE LOA

VIBRATION TRANSMITTER RELATIVE 90° N.D.E. BEARING
SENSOR DE VIBRACIÓN RELATIVO 90° COJINETE LOA

Date:	2025-09-26	 SINTAKSA A Voith Company	Client:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Scope of design:	Unit 2 control and protection cubicle	Project:	24028-DD	Folder:	EE-02	Drawing:	221	Revision:	01	
Drawn:	Karlo Čotić		Object:	PCH NARE Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Content:	PLC OVERVIEW	Drawing designation:	24028-DD-EE-02-221-01			=2CJA01	Sheet:	106		
Approved:	Patrik Kovač							+2CJA01	Next:	107					
Format:	A4														

1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description			Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)								
1 1	Type: AI 4XI 2-/4-WIRE Standard			Siemens	+2CJA01	-A144									
	Número de pedido: 6ES7134-6GD01-0BA1														
	Baseunit Type A0, BU15-P16+A0+2B Unidad base Tipo A0, BU15-P16+A0+2B Número de pedido: 6ES7134-6GD01-0BA1														



Date:	2025-09-26		 SINTAKSA A Voith Company	Client:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia		Scope of design:	Unit 2 control and protection cubicle		Project:	24028-DD	Folder:	EE-02	Drawing:	221	Revision:	01	
Drawn:	Karlo Čotić			Object:	PCH NARE Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Content:	PLC OVERVIEW	Drawing designation:	24028-DD-EE-02-221-01									#Z
Approved:	Patrik Kovač																	
Format:	A4																	

[illegible]

1		2		3		4		5		6		7		8										
Qty. (pcs)	Equipment technical description			Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)																	
1 1	Type: AI 4xRTD/TC High Feature Order No.: 6ES7134-6JD00-0CA1 6ES7134-6JD00-0CA1			Siemens	+2CJA01	-A146																		
	Baseunit Type A0, BU15-P16+A0+2B Unidad base Tipo A0, BU15-P16+A0+2B Número de pedido: 6ES7193-6BP00-0BA0																							
-A146 /11.7 IW88 M0+ 5 M0- 9 IC0+ 13 IC0- IW90 M1+ 6 M1- 10 IC1+ 14 IC1- IW92 M2+ 7 M2- 11 IC2+ 15 IC2- IW94 M3+ 8 M3- 12 IC3+ 16 IC3- L+ 24VDC M OVDC /46.2 /46.2 /46.2 /46.2 /46.3 /46.3 /46.3 /46.4 /46.5 /46.5 /46.5 /46.5 /46.6 /46.6 /46.6 /46.6 /46.7 /11.7 /11.8 WINDING U TEMPERATURE TEMPERATURA DEVANADO U ESTATOR WINDING V TEMPERATURE TEMPERATURA DEVANADO V ESTATOR WINDING W TEMPERATURE TEMPERATURA DEVANADO W ESTATOR CORE TEMPERATURE TEMPERATURA NUCLEO ESTATOR																								
Date:	2025-09-26			SINTAKSA A Voith Company	Client:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia			Scope of design:			Unit 2 control and protection cubicle			Project:	24028-DD	Folder:	EE-02	Drawing:	221	Revision:	01		
Drawn:	Karlo Čotić				Object:	PCH NARE Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia			Content:			PLC OVERVIEW			Drawing designation:			24028-DD-EE-02-221-01			=2CJA01		Sheet:	109
Approved:	Patrik Kovač																						Next:	110
Format:	A4																							


1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description			Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)								
1 1	Type: AI 4xRTD/TC High Feature Order No.: 6ES7134-6JD00-0CA1 6ES7134-6JD00-0CA1			Siemens	+2CJA01	-A147									
	Baseunit Type A0, BU15-P16+A0+2B Unidad base Tipo A0, BU15-P16+A0+2B Número de pedido: 6ES7193-6BP00-0BA0														
-A147 /12.1 BEARING N.D.E. RADIAL TEMPERATURE BEARING D.E. RADIAL TEMPERATURE BEARING D.E. AXIAL TEMPERATURE BEARING D.E. COUNTER-AXIAL TEMPERATURE															

Date:	2025-09-26			Client:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia			Scope of design:		Unit 2 control and protection cubicle		Project:	24028-DD		Folder:	EE-02		Drawing:	221		Revision:	01		
Drawn:	Karlo Čotić			Object:	BCH NARE Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia			Content:		PLC OVERVIEW		Drawing designation:			24028-DD-EE-02-221-01			=2CJA01		#Z				
Approved:	Patrik Kovač																			Sheet:		110		
Format:	A4																			Next:		111		

1		2		3	4		5	6	7	8
Qty. (pcs)	Equipment technical description		Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)				
1 1	Type: AI 4xRTD/TC High Feature Order No.: 6ES7134-6JD00-0CA1 6ES7134-6JD00-0CA1		Siemens	+2CJA01	-A148					
	Baseunit Type A0, BU15-P16+A0+2B Unidad base Tipo A0, BU15-P16+A0+2B Número de pedido: 6ES7193-6BP00-0BA0									
-A148 /12.2 The diagram shows a terminal block with 16 terminals. The connections are as follows: - Terminals 1, 5, 9, 13: BEARING D.E. OIL TEMPERATURE (IW104) - Terminals 2, 6, 10, 14: BEARING N.D.E. OIL TEMPERATURE (IW106) - Terminals 3, 7, 11, 15: COLD AIR TEMPERATURE / TEMPERATURA DEL AIRE FRÍO (IW108) - Terminals 4, 8, 12, 16: HOT AIR TEMPERATURE / TEMPERATURA DEL AIRE CALIENTE (IW110) - Terminal L+: 24VDC - Terminal M: 0VDC										


[illegible]

1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description			Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)								
1 1	Power supply: 24 ... 60 VDC LCD 96x96mm Type: SENTRON PAC3220			Siemens	+2CJA01	-P101									
	Order No.: 7KM3220-1BA01-1EA0														

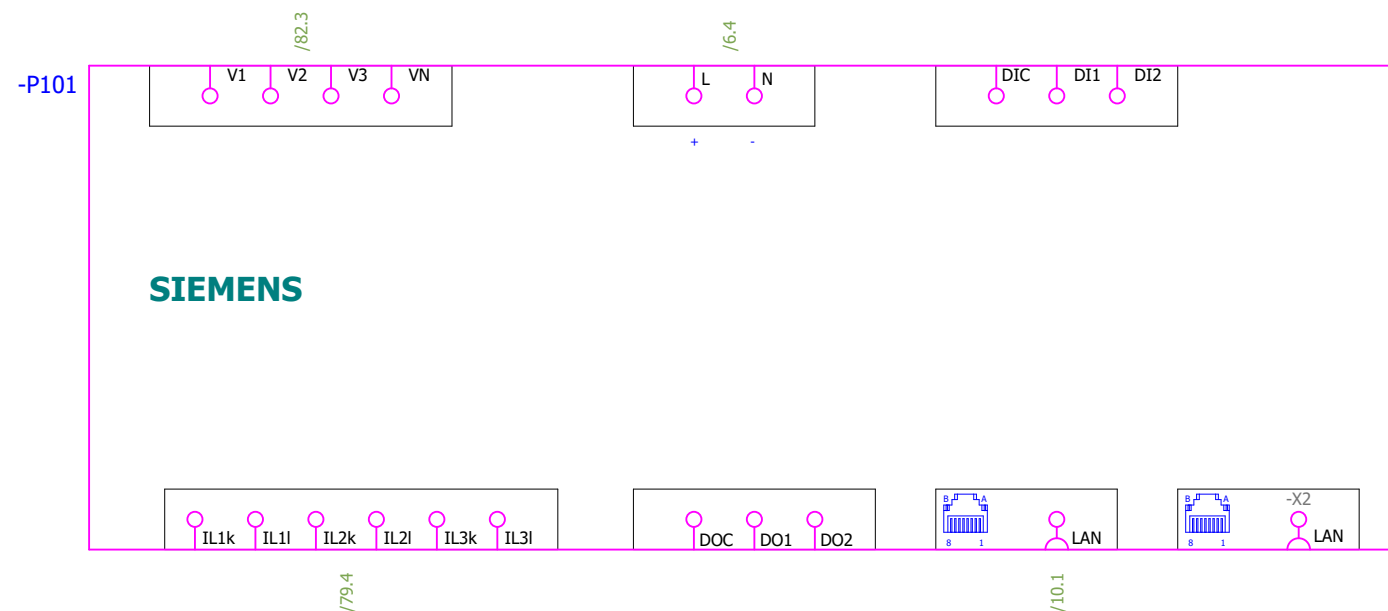


Date:	2025-09-26		 SINTAKSA A Voith Company	Client:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia		Scope of design:	Unit 2 control and protection cubicle		Project:	24028-DD	Folder:	EE-02	Drawing:	221	Revision:	01			
Drawn:	Karlo Čotić			Object:	BCH NARE Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia		Content:	MULTIMETER		Drawing designation:	24028-DD-EE-02-221-01							#Z		
Approved:	Patrik Kovač																		Sheet:	115
Format:	A4																		Next:	116

1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description			Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)								
1 1	7UM85 Generator Protection Modules in 19" row 1: IO208, PS201, IO202			Siemens	+2CJA01	-F311									
	Order No.: P1L481175														

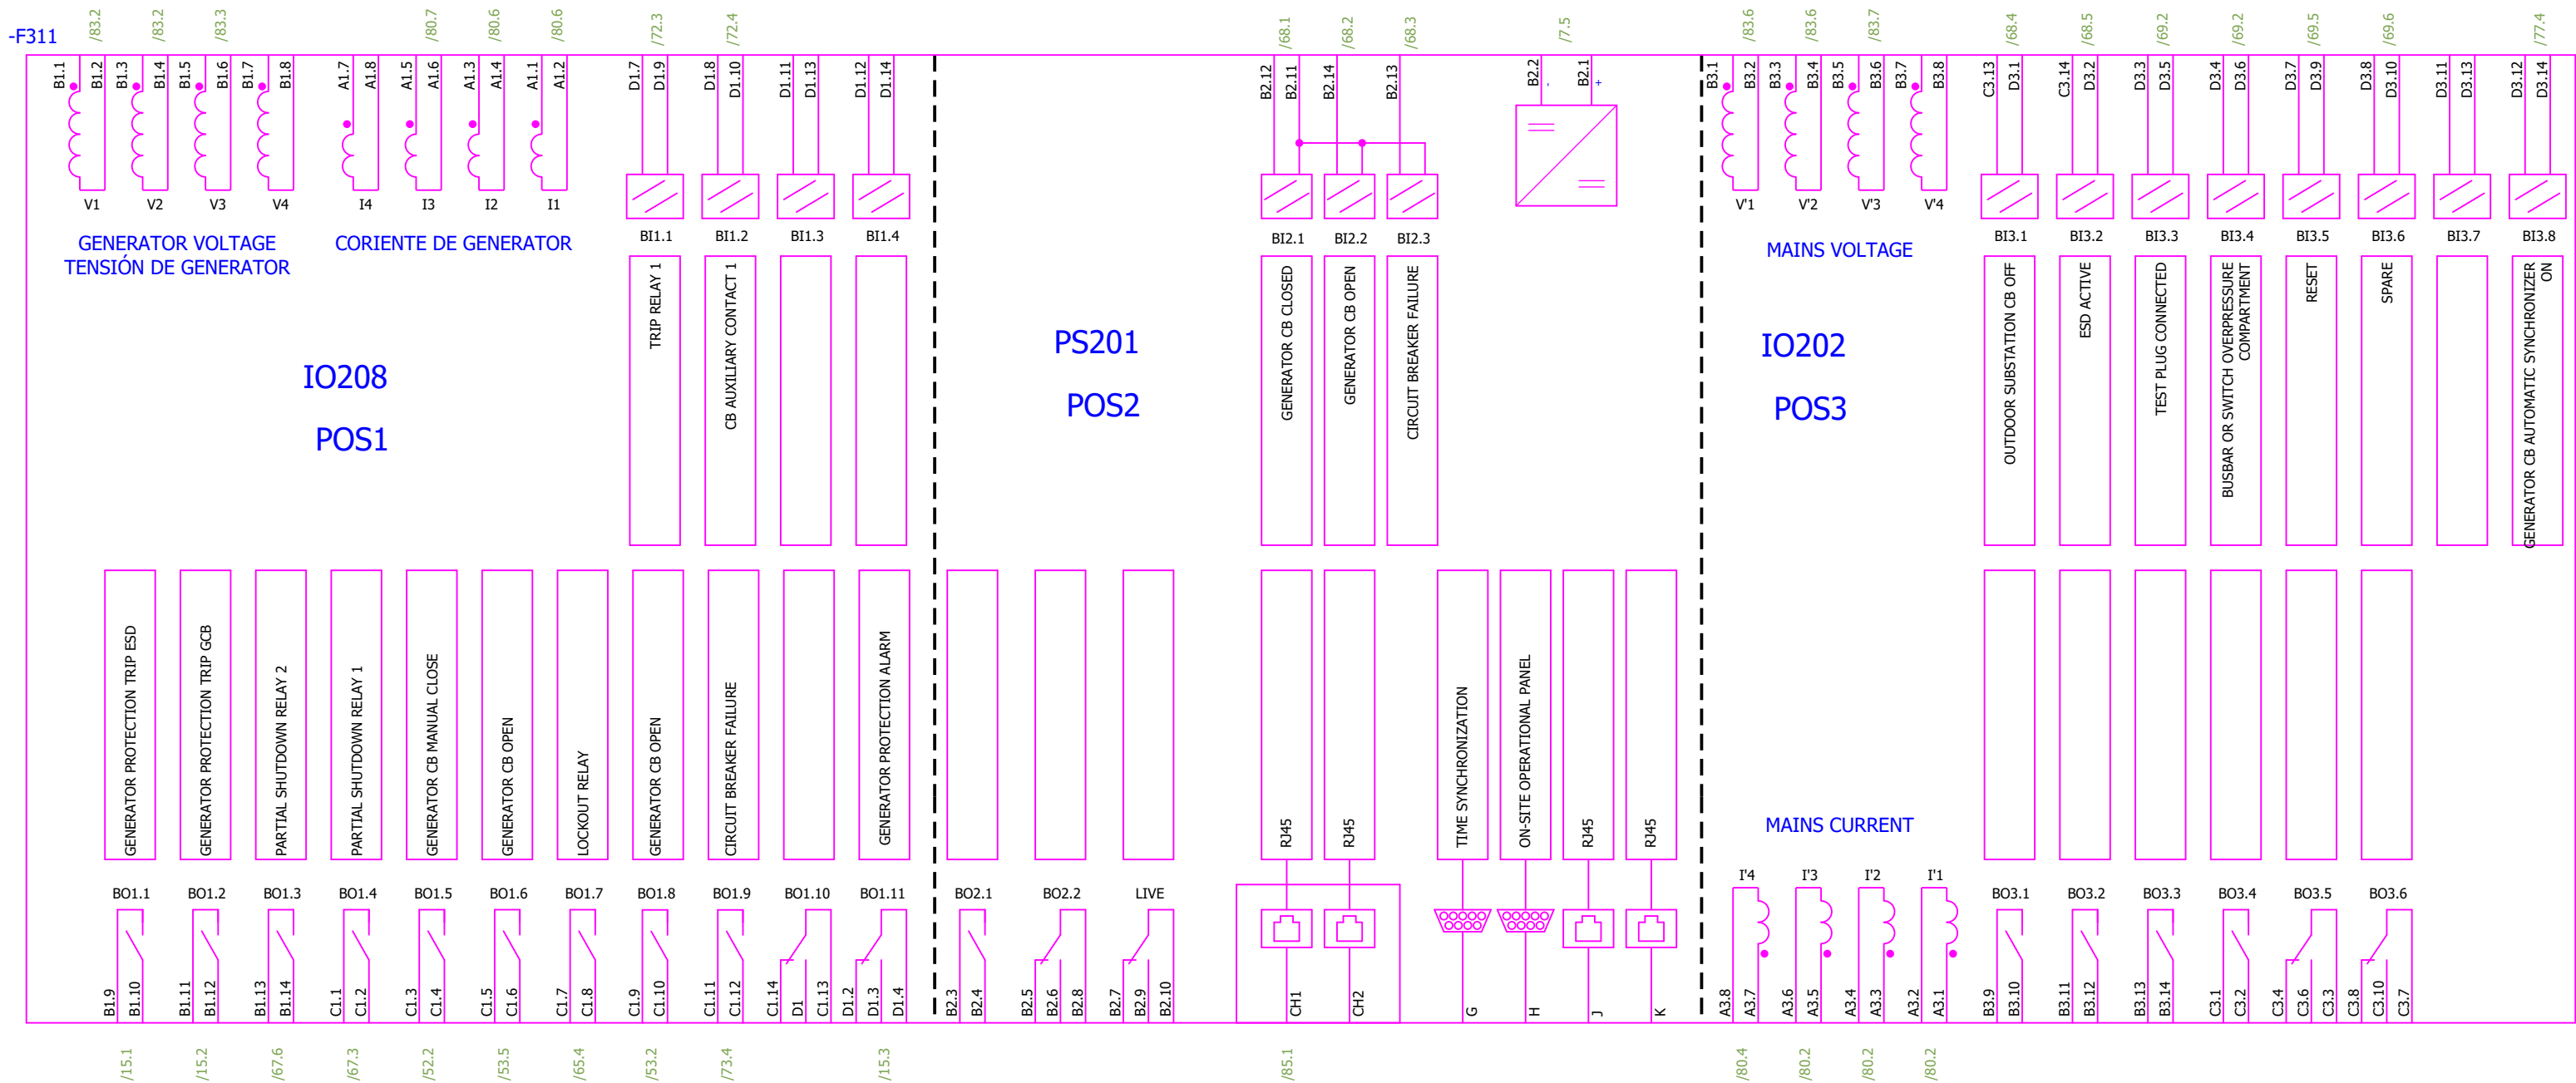


Date:	2025-09-26	 SINTAKSA A Voith Company	Client:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellin, Colombia	Scope of design:	Unit 2 control and protection cubicle	Project:	24028-DD	Folder:	EE-02	Drawing:	221	Revision:	01	
Drawn:	Karlo Čotić		Object:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellin, Colombia	Content:	GENERATOR PROTECTION RELAY - 7UM85	Drawing designation:	24028-DD-EE-02-221-01	=2CJA01	Sheet:	116				
Approved:	Patrik Kovač		+2CJA01	Next:	117										
Format:	A4														

1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description			Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)								
1 1	7UM85 Generator Protection Modules in 19" row 1: IO208, PS201, IO202			Siemens	+2CJA01	-F312									
	Order No.: P1L346665														

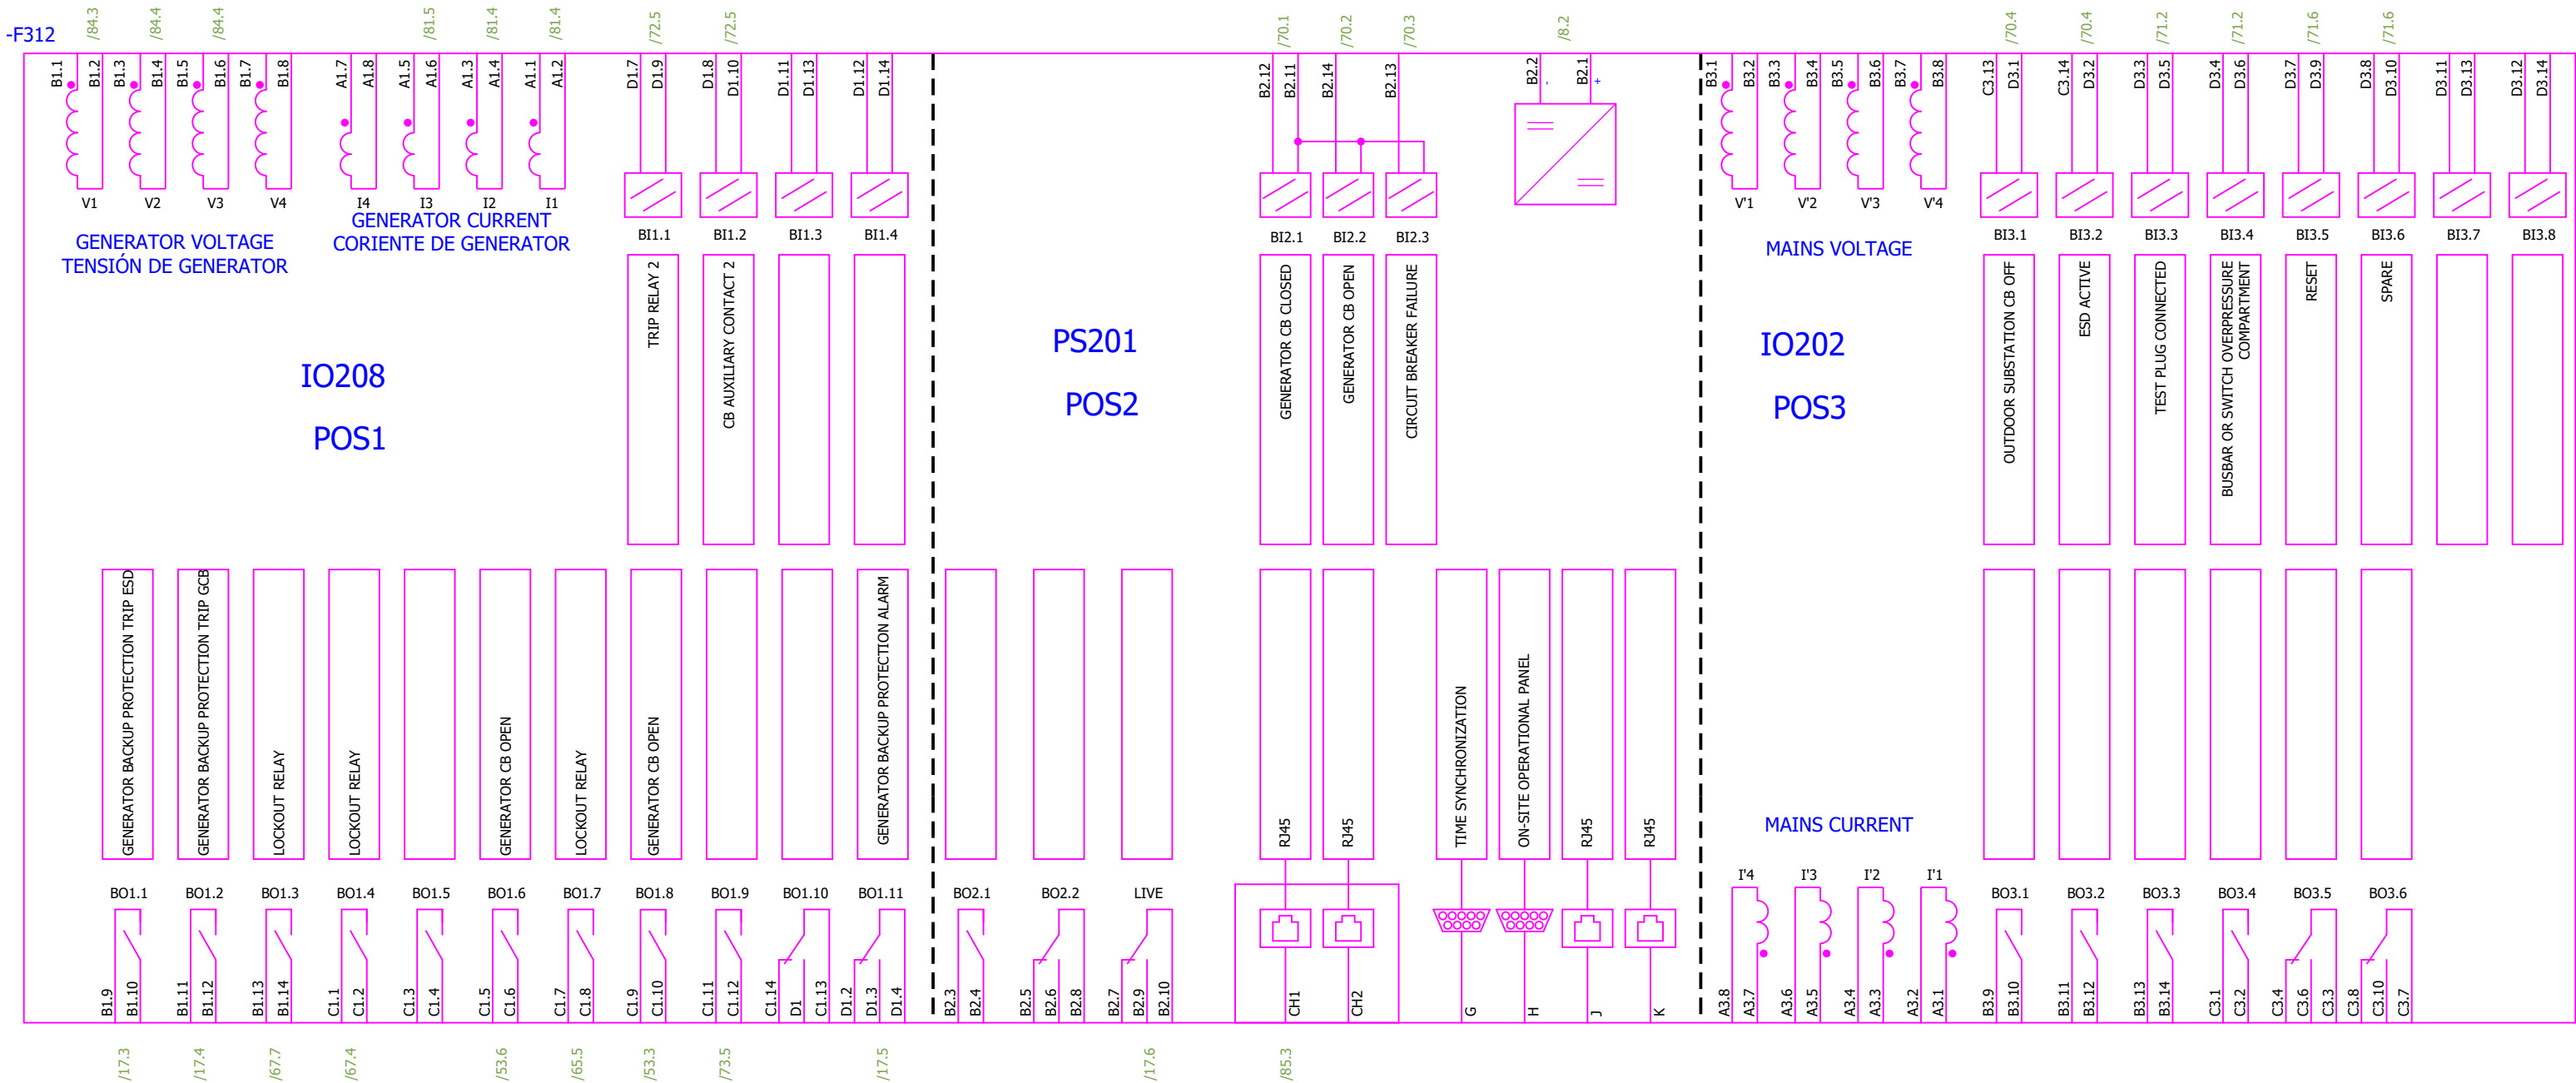


1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description			Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)								
1 1	Sincronoscope for manual sincronization			IME	+2CJA01	-P412									
	Scale: 360° Displayed voltage: 380V Measured voltage: 380V Aux power supply: 24VDC Type: Synchro 96C Order number: ANTJ11														

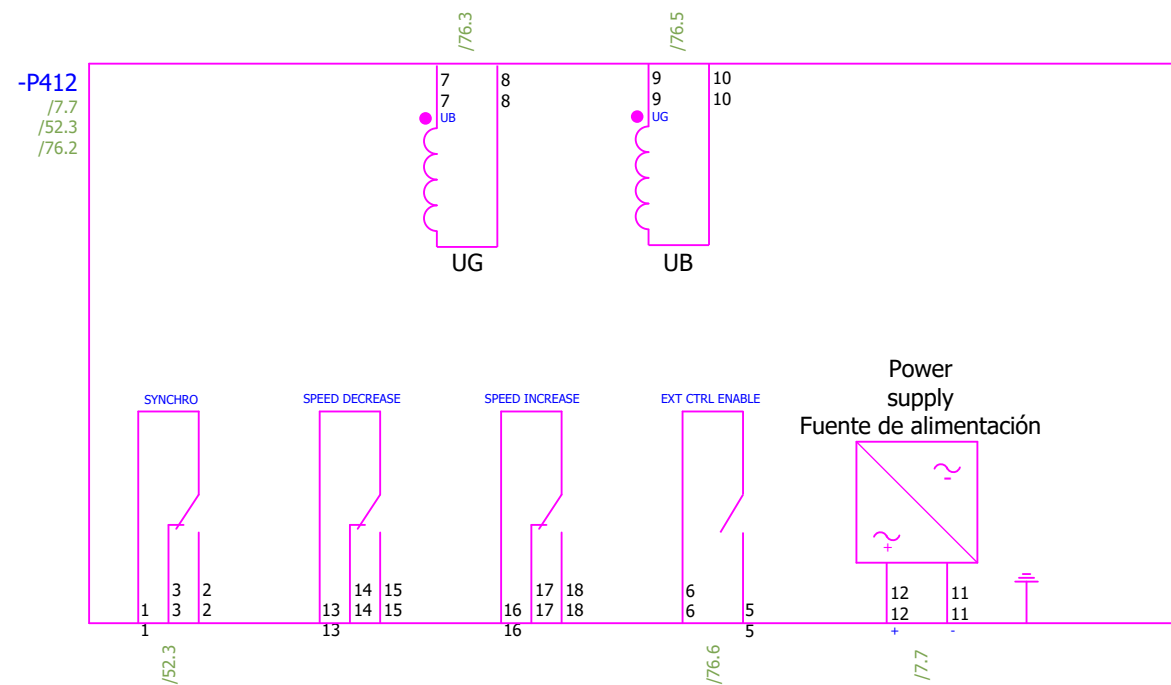


Date:	2025-09-26	 SINTAKSA A Voith Company	Client:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Scope of design:	Unit 2 control and protection cubicle	Project:	24028-DD	Folder:	EE-02	Drawing:	221	Revision:	01	
Drawn:	Karlo Čotić		Object:	PCH NARE Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Content:	AUTOMATIC SYNCHRONIZER	Drawing designation:	24028-DD-EE-02-221-01				=2CJA01	Sheet:	118	
Approved:	Patrik Kovač											+2CJA01	Next:	119	
Format:	A4														

1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description			Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)								
1 1	Automatic voltage regulator DECS-250			Bassler Electric											
	Digital excitation control system Type: DECS-250 Order No.: DECS-250 LP1SN1N														

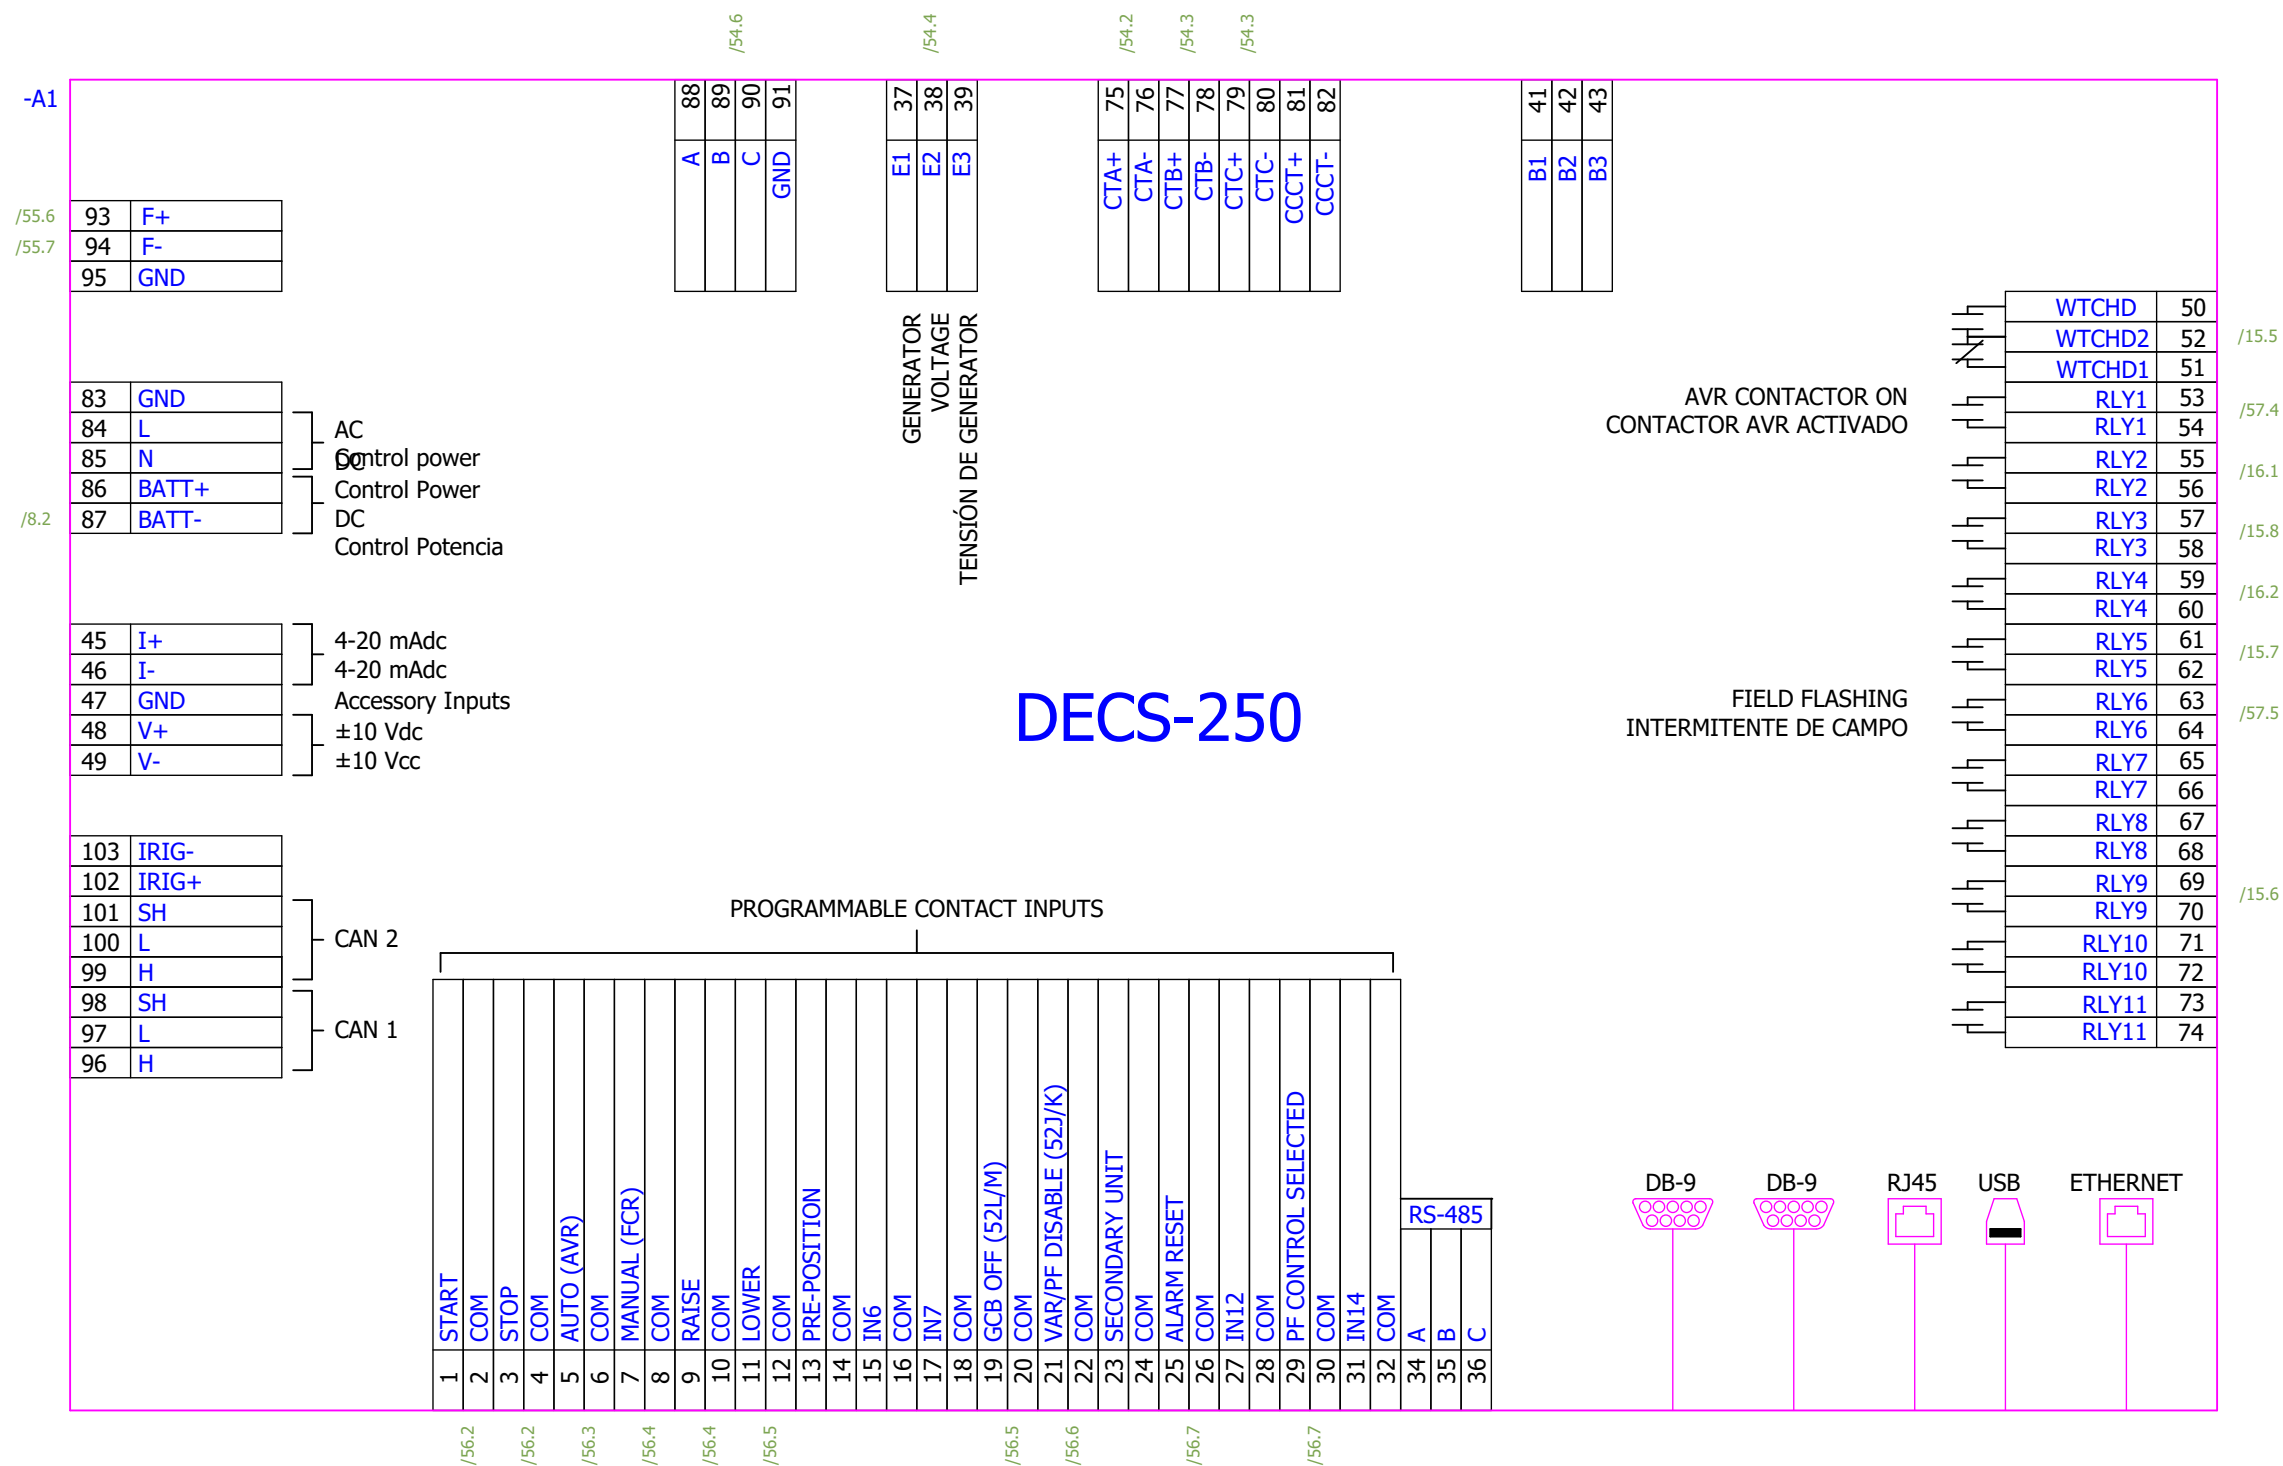


Date:	2025-09-26	 SINTAKSA A Voith Company	Client:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellin, Colombia	Scope of design:	Unit 2 control and protection cubicle	Project:	24028-DD	Folder:	EE-02	Drawing:	221	Revision:	01	
Drawn:	Karlo Čotić		Object:	PCH NARE Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellin, Colombia	Content:	AUTOMATIC VOLTAGE REGULATOR - DECS-250	Drawing designation:	24028-DD-EE-02-221-01					=2CJA01	Sheet:	119
Approved:	Patric Kovač						+2CJA01	Next:	120						
Format:	A4														

1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description			Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)								
1 1	Siemens Reyrolle test block			Siemens	+2CJA01	-X311.1									
	Part no.: 7XG2220-1AA00-0AA0 Size E2 case (2RMLG01) Vertical mounting														

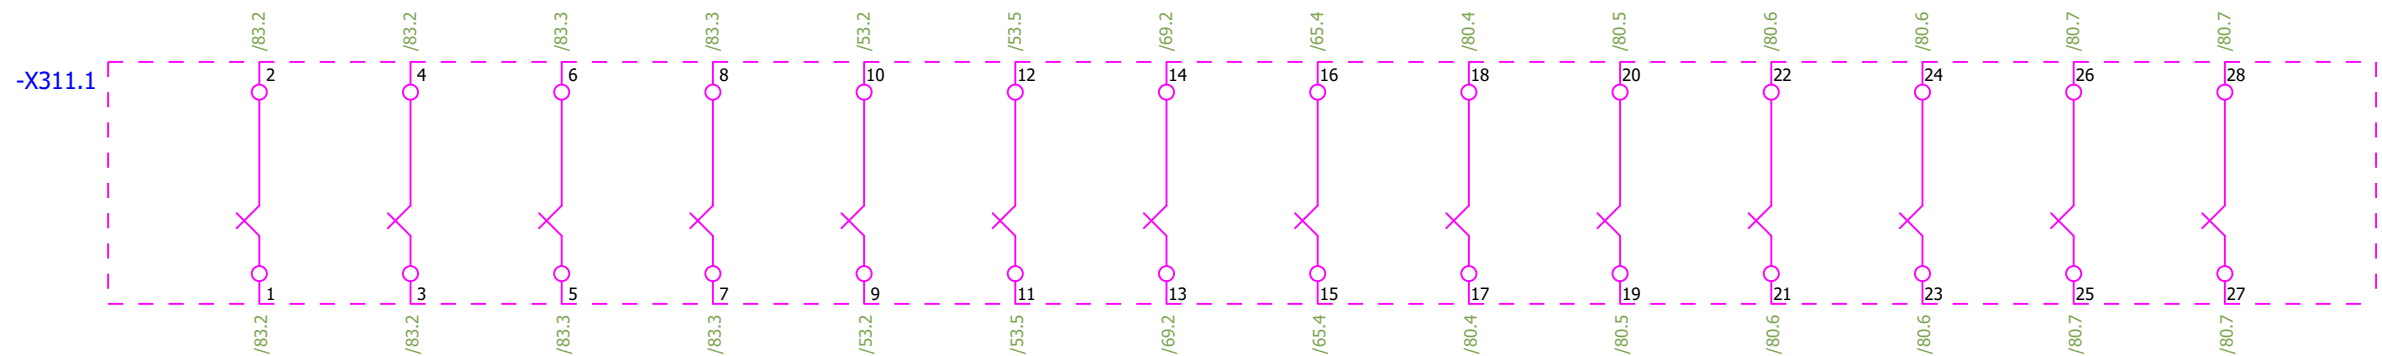


Qty. (pcs)	Equipment technical description	Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)
1 1	Siemens Reyrolle test block Part no.: 7XG2220-1AA00-0AA0 Size E2 case (2RMLG01) Vertical mounting	Siemens	+2CJA01	-X311.2	

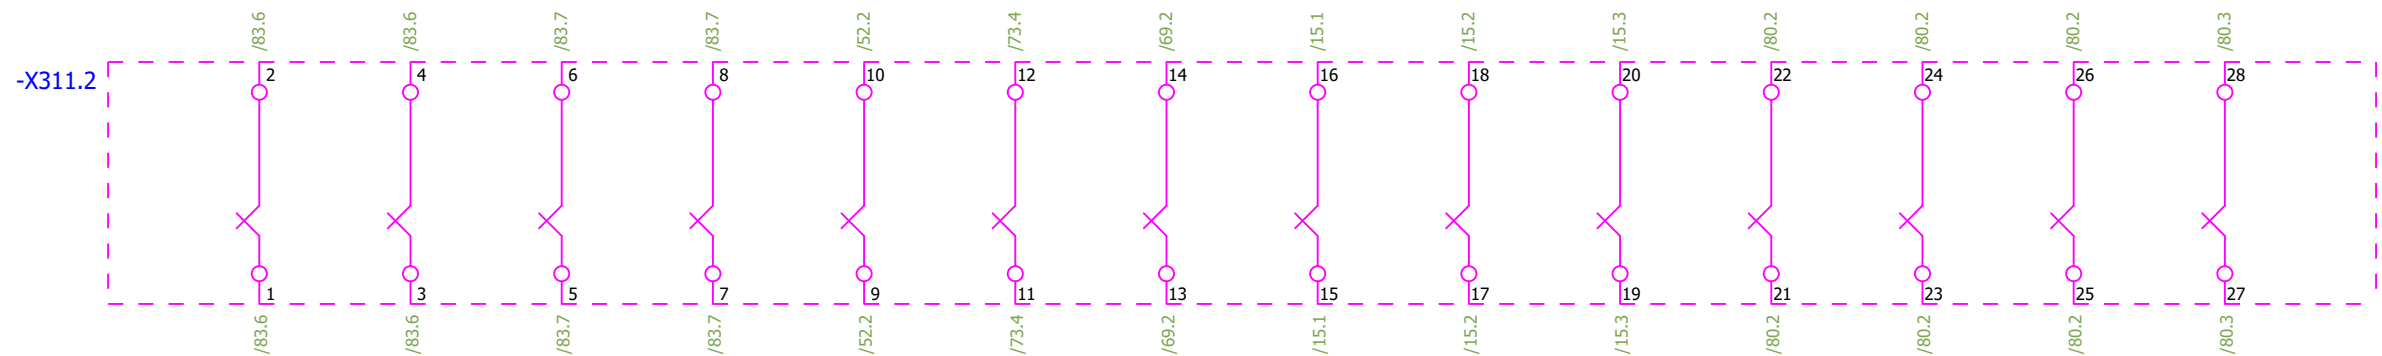







Date:	2025-09-26	 SINTAKSA A Voith Company	Client:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Scope of design:	Unit 2 control and protection cubicle	Project:	24028-DD	Folder:	EE-02	Drawing:	221	Revision:	01	
Drawn:	Karlo Čotić		Object:	PCH NARE Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Content:	TEST SWITCH	Drawing designation:	24028-DD-EE-02-221-01					=2CJA01	Sheet:	120
Approved:	Patrik Kovač												+2CJA01	Next:	121
Format:	A4														

1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description			Manufacturer	Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)								
1 1	Siemens Reyrolle test block Part no.: 7XG2220-1AA00-0AA0 Size E2 case (2RMLG01) Vertical mounting			Siemens	+2CJA01	-X312.1									

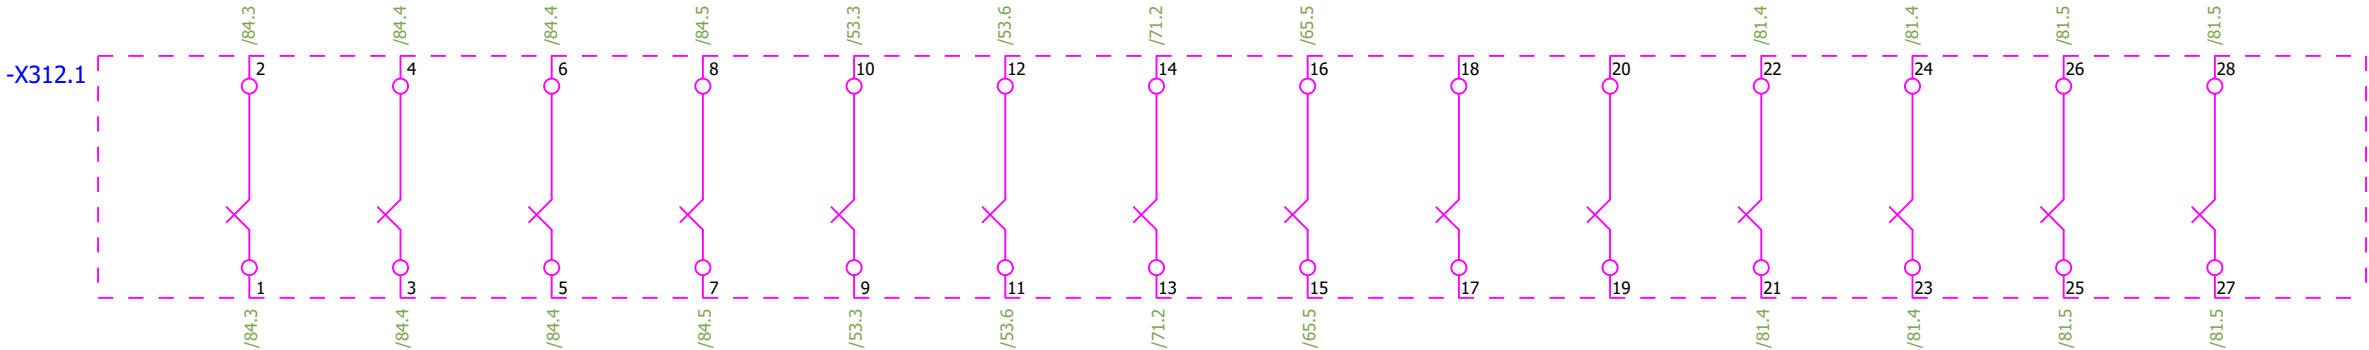



Qty. (pcs)	Equipment technical description	Manufacturer		Location (= / +)	Designation (-)	Symbol Position in schematics (Page, column)								
1 1	Siemens Reyrolle test block Part no.: 7XG2220-1AA00-0AA0 Size E2 case (2RMLG01) Vertical mounting	Siemens		+2CJA01	-X312.2									

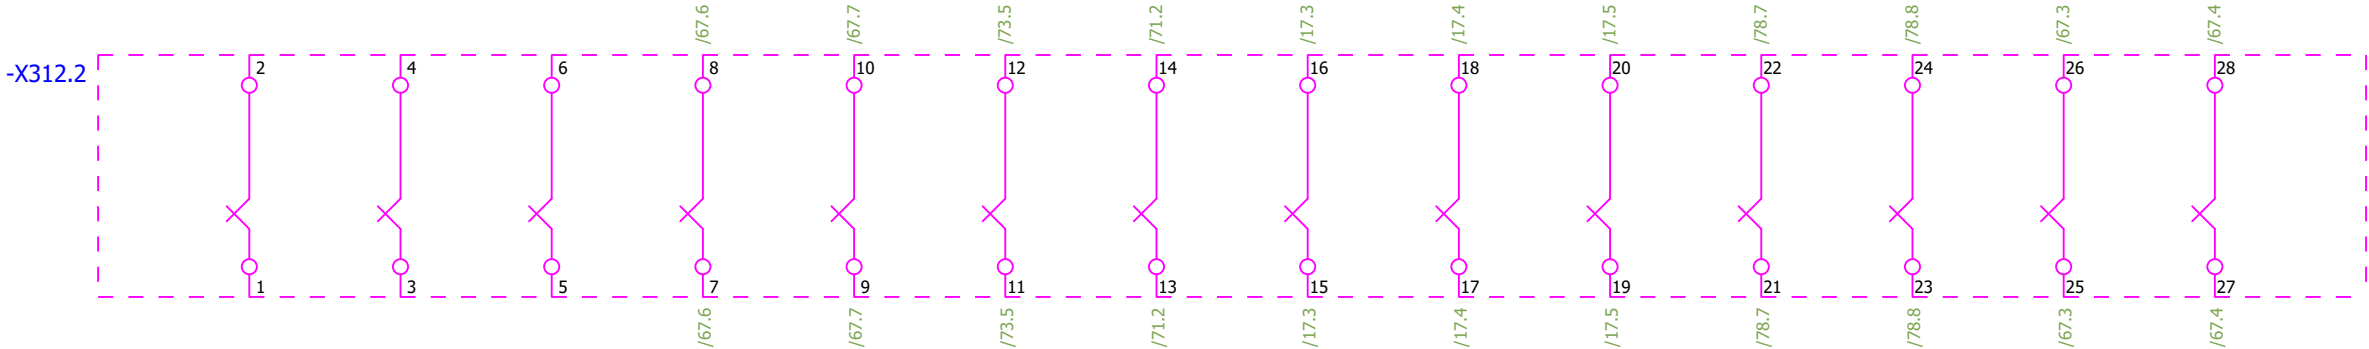

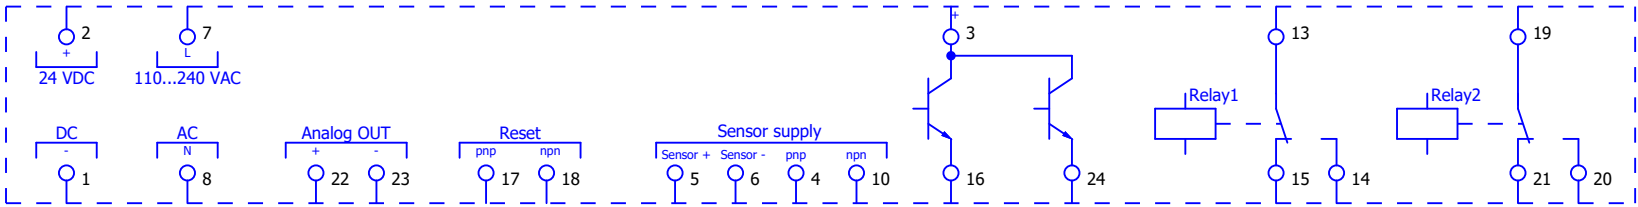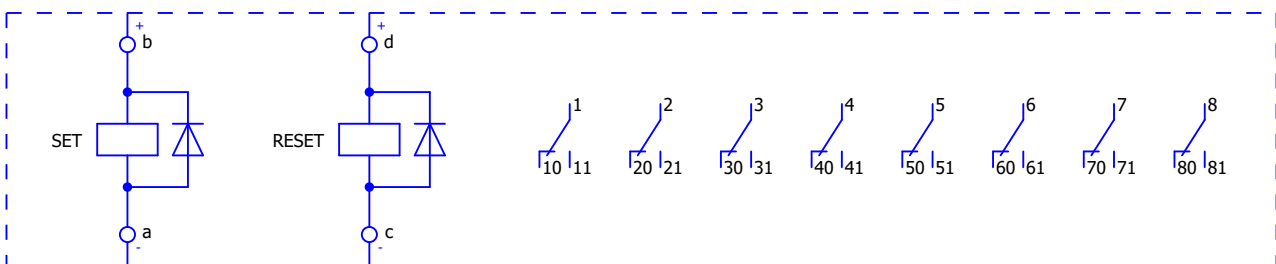
	1	2	3		4	5	6	7	8
Qty. (pcs)	Equipment technical description		Manufacturer	Location (+)	Designation (-)	Symbol Position in schematics (Page, column)			
1	Thermostat Thermostat, NC contact 0...+60°C Type: THR02 Order No.: THR02	Alfa Electric							
			+2CJA01	-B101	/4.6				
1	Hygrostat, Rated Voltage 120-240 V AC, Rated Current 10-5A 10-90 %RF Order No.: IGR35F	Fanndis							
			+2CJA01	-B102	/4.6				
1	Speed monitoring relay Nominal voltage: 110...240VAC (50...60Hz)/27Hz (tip. 24VDC) 2 relay outputs, 2 transistor outputs Analog output: 0/4...20mA Impuls inputs: pnp/npn, NAMUR (24V) Input frequency (max): 5kHz Setting range: 1...60000 imp/min (0.1...1000Hz)	IFM							
			+2CJA01	-B111	/6.5	/41.4	/51.7	/59.3	/59.2
1	Fast lock-out relay FAST LOCK-OUT RELAY 8 CHANGE OVER CONTACTS OPERATING TIME 10MS AUXILIARY VOLTAGE: 24/30V DC WITH RESET PUSHBUTTON WITH FLUSH MOUNTING SOCKET 7XP9010-1 Type: 7PA2211-1 Order No.: 7PA2211-1 Socket for surface mounting Type: 7XP9012-0 SOCKET FOR SURFACE MOUNTING FOR 7PA22, 7PA26 AND THREE-PHASE 7PA30, 7TS15 AND 7TS16 RELAY	Siemens							
			+2CJA01	-86E	/65.4				
2	Cubicle lightning LED Lamps - 120/230 V AC - 10W Order No.: Número de pedido: NSYLAMT5LD2	Schneider Electric							
			+2CJA01	-E101	/4.4				
			+2CJA01	-E102	/4.5				


Date:	Karlo Čotić	 SINTAKSA A Voith Company	Client:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Scope of design:	Project: 24028-DD	Folder:	Drawing:	Revision:		
Drawn:	Karlo Čotić									#Z	
Approved:	Patrik Kovač		Object:	PCH NARE Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Content:	Device tag List	Drawing designation:		=2CJA01	Sheet:	123
Format:	A4								+2CJA01	Next:	124


1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description	Manufacturer	Location (+)	Designation (-)	Symbol Position in schematics (Page, column)										
12	Miniature circuit breaker, 10kA, 1-pole, B, 6A 230/400 V 10kA, D=70 mm Order No.: Número de pedido: 5SY4106-6 Interruptor de corriente auxiliar Type: Número de pedido: 5ST3016 1 C/O Montable	Siemens													
			+2CJA01	-F42	/7.7 /17.2										
			+2CJA01	-F43	/8.1 /16.5										
			+2CJA01	-F44	/8.2 /17.2										
			+2CJA01	-F45	/8.3 /17.2										
			+2CJA01	-F46	/8.4 /17.2										
			+2CJA01	-F47	/8.5 /17.2										
			+2CJA01	-F48	/8.6 /17.2										
			+2CJA01	-F49	/8.7 /16.6										
			+2CJA01	-F50	/9.1										
2	Disyuntor miniatura 10 kA, 1 polo, B, 2 A 230/400 V 10kA, D=70 mm Order No.: Número de pedido: 5SY4102-6 Interruptor de corriente auxiliar Type: Número de pedido: 5ST3016 1 C/O Montable	Siemens													
			+2CJA01	-F51	/9.2										
			+2CJA01	-F52	/9.3										
1	Miniature circuit breaker, 10kA, 1-pole, B, 6A 230/400 V 10kA, D=70 mm Order No.: Número de pedido: 5SY4106-6 Interruptor de corriente auxiliar Type: Número de pedido: 5ST3016 1 C/O Montable	Siemens													
			+2CJA01	-F53	/9.4										


1		2		3		4	5	6	7	8
Qty. (pcs)	Equipment technical description	Manufacturer	Location (+)	Designation (-)	Symbol Position in schematics (Page, column)					
1	Disyuntor miniatura 10 kA, 1 polo, B, 2 A 230/400 V 10kA, D=70 mm Order No.: Número de pedido: 5SY4102-6 Interruptor de corriente auxiliar Type: Número de pedido: 5ST3016 1 C/O Montable	Siemens								
			+2CJA01	-F54	/9.5					
2	Cartridge Fuses FSF 5X20 250V 100mA Order No.: 693-0034.1506 UT 4-HESI (5X20) Type: 3046032 Fuse modular terminal block, fuse type: Glass / ceramics / ..., fuse type: G / 5 x 20, nom. voltage: 500 V, nominal current: 6.3 A, connection method: Screw connection, Rated cross section: 4 mm2, cross section: 0.14 mm2- 6 mm2, mounting type: NS 35/7.5, NS 35/15, color: black				 					
			+2CJA01	-FS1	/51.3					
			+2CJA01	-FS2	/51.3					
1	INDICATOR LIGHT, RED Indicator lights, 22 mm, round, metal, shiny, red, lens, smooth, with holder, LED module with integrated LED 24 V AC/DC, screw terminal Order No.: 3SU1152-6AA20-1AA0 Label holder Type: 3SU1900-0AH10-0AA0 Label holder, 22mm, flat, Frame rounded off at the bottom black, for labeling plate 17.5 mm x 27 mm, for gluing	Siemens								
			+2CJA01	-H101	/39.7					
1	INDICATOR LIGHT, YELLOW Indicator lights, 22 mm, round, metal, shiny, yellow, lens, smooth, with holder, LED module with integrated LED 24 V AC/DC, screw terminal Order No.: 3SU1152-6AA30-1AA0 Label holder Type: 3SU1900-0AH10-0AA0 Label holder, 22mm, flat, Frame rounded off at the bottom black, for labeling plate 17.5 mm x 27 mm, for gluing	Siemens								
			+2CJA01	-H102	/39.8					



Date:	Karlo Čotić	 SINTAKSA A Voith Company	Client:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Scope of design:	Project: 24028-DD	Folder:	Drawing:	Revision:		
Drawn:	Karlo Čotić									#Z	
Approved:	Patrik Kovač			Object:	PCH NARE Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia	Content:	Drawing designation:			=2CJA01	Sheet: 126
Format:	A4					Device tag List				+2CJA01	Next: 127

1		2		3		4	5	6	7	8
Qty. (pcs)	Equipment technical description	Manufacturer	Location (+)	Designation (-)	Symbol Position in schematics (Page, column)					
	Relé auxiliar Módulo de relé preensamblado con conexión push-in, compuesto por: Base de relé con expulsor y relé de contacto de potencia. Tipo de contacto: 1 contacto N/A. Tensión de entrada: 24 V DC. Order No.: Número de pedido: 2903361	Phoenix Contact								
			+2CJA01	-1K42	/21.2	/21.2				
			+2CJA01	-1K43	/21.3	/21.3				
			+2CJA01	-1K44	/21.4	/21.4				
			+2CJA01	-1K45	/21.5	/21.5				
			+2CJA01	-1K46	/21.6	/21.6				
			+2CJA01	-1K47	/21.7	/21.7				
			+2CJA01	-1K48	/21.8	/21.8				
			+2CJA01	-1K51	/22.1	/22.1				
			+2CJA01	-1K52	/22.2	/22.2				
			+2CJA01	-1K53	/22.3	/22.3				
			+2CJA01	-1K54	/22.4	/22.4				
			+2CJA01	-1K55	/22.5	/22.5				
			+2CJA01	-1K56	/22.6	/22.6				
			+2CJA01	-1K57	/22.7	/22.7				
			+2CJA01	-1K58	/22.8	/22.8				
			+2CJA01	-1K61	/23.1	/23.1				
			+2CJA01	-1K62	/23.2	/23.2				
			+2CJA01	-1K63	/23.3	/23.3				
			+2CJA01	-1K64	/23.4	/23.4				
			+2CJA01	-1K65	/23.5	/23.5				
			+2CJA01	-1K66	/23.6	/23.6				
			+2CJA01	-1K67	/23.7	/23.7				
			+2CJA01	-1K68	/23.8	/23.8				
			+2CJA01	-1K71	/24.1	/24.1				
			+2CJA01	-1K72	/24.2	/24.2				
			+2CJA01	-1K73	/24.3	/24.3				
			+2CJA01	-1K74	/24.4	/24.4				
			+2CJA01	-1K75	/24.5	/24.5				
			+2CJA01	-1K76	/24.6	/24.6				
			+2CJA01	-1K77	/24.7	/24.7				
			+2CJA01	-1K78	/24.8	/24.8				
			+2CJA01	-1K81	/25.1	/25.1				
			+2CJA01	-1K82	/25.2	/25.2				





1		2		3		4	5	6	7	8
Qty. (pcs)	Equipment technical description	Manufacturer	Location (+)	Designation (-)	Symbol Position in schematics (Page, column)					
	Relé auxiliar Módulo de relé preensamblado con conexión push-in, compuesto por: Base de relé con expulsor y relé de contacto de potencia. Tipo de contacto: 1 contacto N/A. Tensión de entrada: 24 V DC. Order No.: Número de pedido: 2903361	Phoenix Contact								
			+2CJA01	-1K83	/25.3	/25.3				
			+2CJA01	-1K84	/25.4	/25.4				
			+2CJA01	-1K85	/25.5	/25.5				
			+2CJA01	-1K86	/25.6	/25.6				
			+2CJA01	-1K87	/25.7	/25.7				
			+2CJA01	-1K88	/25.8	/25.8				
			+2CJA01	-1K91	/26.1	/26.1				
			+2CJA01	-1K92	/26.2	/26.2				
			+2CJA01	-1K93	/26.3	/26.3				
			+2CJA01	-1K94	/26.4	/26.4				
			+2CJA01	-1K95	/26.5	/26.5				
			+2CJA01	-1K96	/26.6	/26.6				
			+2CJA01	-1K97	/26.7	/26.7				
			+2CJA01	-1K98	/26.8	/26.8				
			+2CJA01	-1K101	/27.1	/27.1				
			+2CJA01	-1K102	/27.2	/27.2				
			+2CJA01	-1K103	/27.3	/27.3				
			+2CJA01	-1K104	/27.4	/27.4				
			+2CJA01	-1K105	/27.5	/27.5				
			+2CJA01	-1K106	/27.6	/27.6				
			+2CJA01	-1K107	/27.7	/27.7				
			+2CJA01	-1K108	/27.8	/27.8				
			+2CJA01	-1K111	/28.1	/28.1				
			+2CJA01	-1K112	/28.2	/28.2				
			+2CJA01	-1K113	/28.3	/28.3				
			+2CJA01	-1K114	/28.4	/28.4				
			+2CJA01	-1K115	/28.5	/28.5				
			+2CJA01	-1K116	/28.6	/28.6				
			+2CJA01	-1K117	/28.7	/28.7				
			+2CJA01	-1K118	/28.8	/28.8				
			+2CJA01	-1K121	/29.1	/29.1				
			+2CJA01	-1K122	/29.2	/29.2				
			+2CJA01	-1K123	/29.3	/29.3				





1		2		3		4	5	6	7	8
Qty. (pcs)	Equipment technical description	Manufacturer	Location (+)	Designation (-)	Symbol Position in schematics (Page, column)					
119	Relé auxiliar Módulo de relé preensamblado con conexión push-in, compuesto por: Base de relé con expulsor y relé de contacto de potencia. Tipo de contacto: 1 contacto N/A. Tensión de entrada: 24 V DC. Order No.: Número de pedido: 2903361	Phoenix Contact								
			+2CJA01	-1K124	/29.4	/29.4				
			+2CJA01	-1K125	/29.5	/29.5				
			+2CJA01	-1K126	/29.6	/29.6				
			+2CJA01	-1K127	/29.7	/29.7				
			+2CJA01	-1K128	/29.8	/29.8				
			+2CJA01	-1K131	/30.1	/30.1				
			+2CJA01	-1K132	/30.2	/30.2				
			+2CJA01	-1K133	/30.3	/30.3				
			+2CJA01	-1K134	/30.4	/30.4				
			+2CJA01	-1K135	/30.5	/30.5				
			+2CJA01	-1K136	/30.6	/30.6				
			+2CJA01	-1K137	/30.7	/30.7				
			+2CJA01	-1K138	/30.8	/30.8				
			+2CJA01	-1K141	/31.1	/31.1				
			+2CJA01	-1K142	/31.2	/31.2				
			+2CJA01	-1K143	/31.3	/31.3				
			+2CJA01	-1K144	/31.4	/31.4				
			+2CJA01	-1K145	/31.5	/31.5				
			+2CJA01	-1K146	/31.6	/31.6				
			+2CJA01	-1K147	/31.7	/31.7				
			+2CJA01	-1K148	/31.8	/31.8				
			+2CJA01	-1K151	/32.1	/32.1				
			+2CJA01	-1K152	/32.2	/32.2				
			+2CJA01	-1K153	/32.3	/32.3				
			+2CJA01	-1K154	/32.4	/32.4				
			+2CJA01	-1K155	/32.5	/32.5				
			+2CJA01	-1K156	/32.6	/32.6				
			+2CJA01	-1K157	/32.7	/32.7				
			+2CJA01	-1K158	/32.8	/32.8				



1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description			Manufacturer	Location (+)	Designation (-)	Symbol Position in schematics (Page, column)								
	Relé enchufable - Tensión de control nominal: 24 V CC, - Corriente de contacto nominal: 10 A, - Contactos: 1 C/O Order No.: Número de pedido: RXG12BD Harmony, módulo de protección Type: RXG12BD Harmony, diodo, para todos los conectores, 6...230 V CC Número de pedido: RZM040W Harmony, zócalo push-in con abrazadera Type: SE.RXG12BD+RZM040W+RGZE05P para relés RXG1, 10 A, terminales push-in, contacto separado Número de pedido: RGZE05P														
				+2CJA01	-2K01	/33.1	/63.3								
				+2CJA01	-2K03	/33.6	/57.4								
				+2CJA01	-2K04	/33.7									
				+2CJA01	-2K05	/33.8	/77.4								
				+2CJA01	-2K06	/34.1	/76.6								
				+2CJA01	-2K07	/34.2	/52.2								
				+2CJA01	-2K08	/34.3	/52.3								
				+2CJA01	-2K09	/34.4	/56.2								
				+2CJA01	-2K10	/34.5	/56.2								
				+2CJA01	-2K11	/34.6	/56.3								
				+2CJA01	-2K12	/34.7	/56.3								
				+2CJA01	-2K13	/34.8	/56.4								
				+2CJA01	-2K14	/35.1	/56.5								
				+2CJA01	-2K15	/35.2	/56.5								
				+2CJA01	-2K16	/35.3	/56.6								
				+2CJA01	-2K17	/35.4	/56.7								
				+2CJA01	-2K18	/35.5	/56.7								
				+2CJA01	-2K19	/35.6	/60.2								
				+2CJA01	-2K20	/35.7	/60.3								
				+2CJA01	-2K21	/35.8	/60.4								
				+2CJA01	-2K22	/36.1	/60.5								
				+2CJA01	-2K23	/36.2	/59.4								
				+2CJA01	-2K24	/36.3	/60.6								
				+2CJA01	-2K25	/36.4	/60.7								
				+2CJA01	-2K26	/36.5	/61.2								
				+2CJA01	-2K27	/36.6	/61.3								


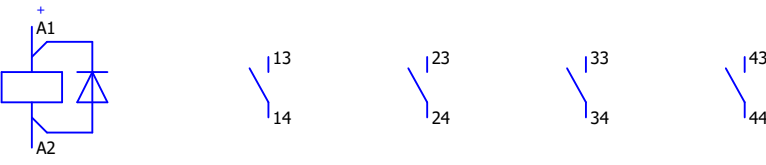
1		2		3		4		5		6		7		8					
Qty. (pcs)	Equipment technical description			Manufacturer	Location (+)	Designation (-)	Symbol Position in schematics (Page, column)												
41	Relé enchufable - Tensión de control nominal: 24 V CC, - Corriente de contacto nominal: 10 A, - Contactos: 1 C/O Order No.: Número de pedido: RXG12BD Harmony, módulo de protección Type: RXG12BD Harmony, diodo, para todos los conectores, 6...230 V CC Número de pedido: RZM040W Harmony, zócalo push-in con abrazadera Type: SE.RXG12BD+RZM040W+RGZE05P para relés RXG1, 10 A, terminales push-in, contacto separado Número de pedido: RGZE05P																		
								+2CJA01		-2K28		/36.7		/61.4					
								+2CJA01		-2K29		/36.8		/61.5					
								+2CJA01		-2K30		/37.1		/61.6					
								+2CJA01		-2K31		/37.2		/61.6					
								+2CJA01		-2K32		/37.3		/61.7					
								+2CJA01		-2K33		/37.4		/62.2					
								+2CJA01		-2K34		/37.5		/62.3					
								+2CJA01		-2K35		/37.6		/62.4					
								+2CJA01		-2K36		/37.7		/62.5					
								+2CJA01		-2K37		/39.1		/66.4					
								+2CJA01		-2K38		/39.2							
								+2CJA01		-2K39		/39.3		/59.5					
								+2CJA01		-2K40		/39.4		/78.4					
								+2CJA01		-2K41		/39.5		/78.5					
								+2CJA01		-2K42		/39.6		/78.5					
	COUPL.CONT.RELAY,4NO,DC24V,DIODE COUPLING CONTACTOR RELAY, 4NO, DC 24V, 0.85...1.85*US, W/ INTEGRATED DIODE, SIZE S00, SCREW TERMINAL Order No.: Número de pedido: 3RH2140-1VB40			Siemens															
								+2CJA01		-2K101		/33.3		/53.4		/53.4		/53.4	
								+2CJA01		-2K102		/33.4		/53.7		/53.7		/53.7	
								+2CJA01		-2K103		/33.5		/53.8		/53.8		/53.8	
								+2CJA01		-2K104		/37.8		/58.2		/58.2		/58.2	
								+2CJA01		-2K105		/38.1		/58.3		/58.3		/58.3	
								+2CJA01		-2K106		/38.2		/58.4		/58.4		/58.4	



Date:	Karlo Čotić			Client:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia		Scope of design:	Project:		Folder:	Drawing:	Revision:			
Drawn:	Karlo Čotić							24028-DD					#Z		
Approved:	Patrik Kovač							Drawing designation:					=2CJA01	Sheet:	131
Format:	A4												+2CJA01	Next:	132
				Object:	Generadora Nare S.A.S E.S.P Oficina 1113, Torre 1, Cl 7 Sur #42-70, Medellín, Colombia		Content:	Device tag List							



1		2	3		4	5	6	7	8				
Qty. (pcs)	Equipment technical description	Manufacturer	Location (+)	Designation (-)	Symbol Position in schematics (Page, column)								
12	COUPL.CONT.RELAY,4NO,DC24V,DIODE COUPLING CONTACTOR RELAY, 4NO, DC 24V, 0.85...1.85*US, W/ INTEGRATED DIODE, SIZE S00, SCREW TERMINAL Order No.: Número de pedido: 3RH2140-1VB40	Siemens											
			+2CJA01	-2K107	/38.3	/58.5	/58.5	/58.5	/50.1				
			+2CJA01	-2K108	/38.4	/58.6	/58.6	/58.6					
			+2CJA01	-2K109	/38.5	/58.7	/58.7	/58.7					
			+2CJA01	-2K110	/38.6	/65.6	/66.5	/69.5	/71.6				
			+2CJA01	-2K111	/38.7	/78.2	/78.2	/78.2					
			+2CJA01	-2K112	/38.8								
1	SIRIUS Auxiliary contactor 4NO Contactor, AC1: 35A DC 24V 4-pole, 4NO, Size: S0, Screw terminal 1NO+1NC integrated Order No.: 3RT2325-1BB40 SIRIUS Surge suppressor Type: 3RT2926-1ER00 Surge Suppressor, Diode Combination, DC 24 V, For Motor Contactors Size S0	Siemens											
			+2CJA01	-K1	/57.4	/54.6	/54.6	/54.6	/55.4	/16.3			
1	Plug-in relay -3 C/O 24 V DC Plug-in relay: Nominal coil voltage: 24VDC complete unit 3 W Order No.: LZS:PT3A5L24	Siemens											
			+2CJA01	-K11	/57.5	/55.3	/55.3						
1	Contactor relay Contactor relay, 62E, DIN EN 50011, 8NO, screw terminal DC operation 24 V DC Order No.: 3TH4280-0BB4	Siemens											
			+2CJA01	-K111	/73.4	/74.2	/74.4	/74.6	/74.8	/75.2	/75.4		
1	Multifunction Timer Relay - 24...240V AC/DC - 1 C/O time delay relay 10 functions - 1 s..100 h - 24..240 V AC - 1 OC Order No.: RE17RMMU	Schneider Electric											
			+2CJA01	-K113	/59.6	/59.7	/59.7	/59.7	/62.6				

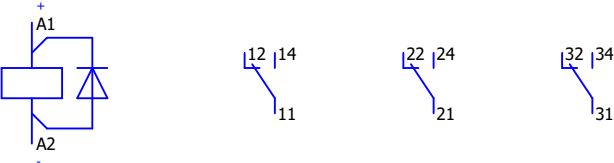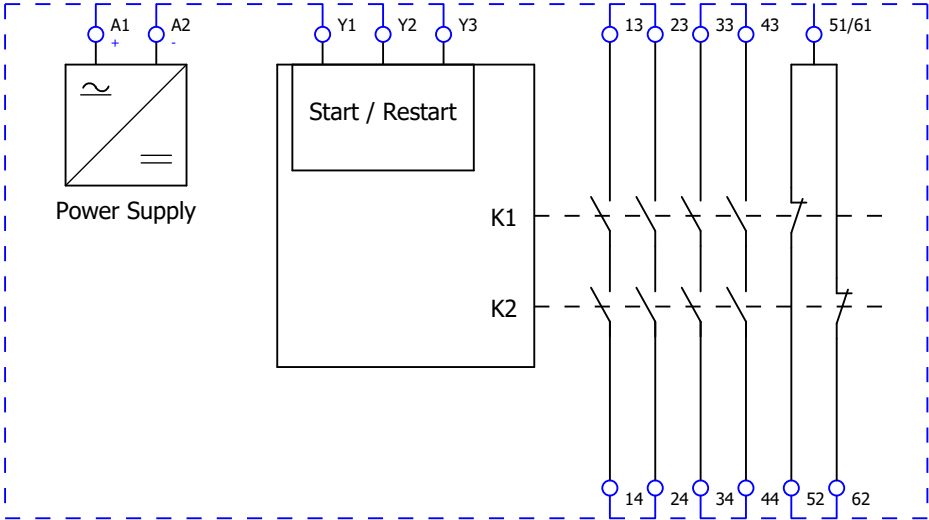

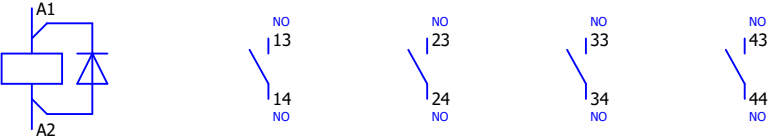
1		2	3		4	5	6	7	8
Qty. (pcs)	Equipment technical description	Manufacturer	Location (+)	Designation (-)	Symbol Position in schematics (Page, column)				
3	Pomoćni relej -nazivni napon svitka: 24V DC, -nazivna struja kontakata: 10A, -kontakti: 3 x C/O Order No.: RXM3AB2BD								
			+2CJA01	-K131	/59.2 /59.5				
			+2CJA01	-K132	/59.4 /59.7 /60.6				
			+2CJA01	-K133	/59.3 /63.4 /16.8				
1	Harmony Safety Automation Estop or guard ,Harmony XPS, connected to supply terminals 24 V AC/DC , no inputs, spring Order No.: XPSBAC14AC	Schneider Electric							
			+2CJA01	-K301	/64.4				
1	Contactor relay Contactor relay, 53E, DIN EN 50011, 5NO + 3NC, screw terminal DC operation 24 V DC Order No.: 3TH4253-0B	Siemens							
			+2CJA01	-K302	/64.5 /65.3 /64.5				
1	SIRIUS contactor relay Contactor relay, 4NO, 24VDC, with integrated diode, size S00, screw terminal Order No.: 3RH2140-1FB40	Siemens							
			+2CJA01	-K321	/52.2 /52.7 /52.7 /52.7 /16.7				

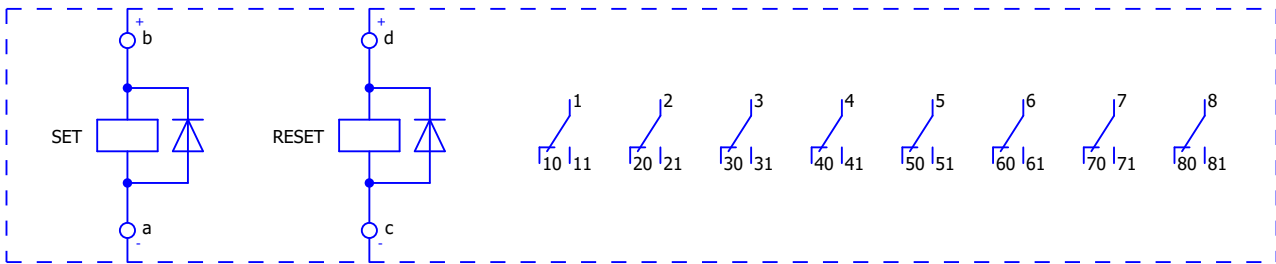
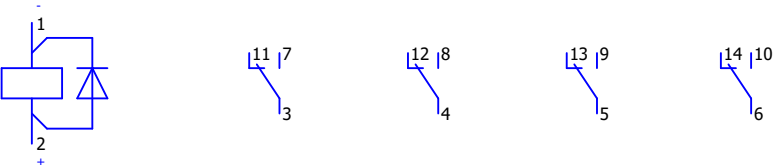
	1	2	3	4	5	6	7	8
Qty. (pcs)	Equipment technical description		Manufacturer	Location (+)	Designation (-)	Symbol Position in schematics (Page, column)		
1	Fast lock-out relay FAST LOCK-OUT RELAY 8 CHANGE OVER CONTACTS OPERATING TIME 10MS AUXILIARY VOLTAGE: 24/30V DC WITH RESET PUSHBUTTON WITHOUT SOCKET Type: 7PA2211-0 Order No.: 7PA2211-0 Socket for surface mounting Type: 7XP9012-0 SOCKET FOR SURFACE MOUNTING FOR 7PA22, 7PA26 AND THREE-PHASE 7PA30, 7TS15 AND 7TS16 RELAY		Siemens					
				+2CJA01	-86M	/66.4		
2	Monostable fast trip relay -4 C/O 24 V DC FAST TRIP RELAY 4 CHANGE OVER CONTACTS OPERATING TIME 8MS AUXILIARY VOLTAGE: 24/30V DC RELAY WITHOUT SOCKET Order No.: 7PA2712-0AA00-0		Siemens					
				+2CJA01	-94P1	/67.3	/17.8	/52.7
				+2CJA01	-94P2	/67.6	/18.1	/52.7
1	analog panel meter Scale: 0-100% Input signal: 4-20mA Order No.: MA19LN A900K000008		LUMEL					
				+2CJA01	-P111	/50.3		
1	analog panel meter Scale: 0-200% Input signal: 4-20mA Order No.: MA19LN A900X000008		LUMEL					
				+2CJA01	-P112	/41.4		

1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description	Manufacturer	Location (+)	Designation (-)	Symbol Position in schematics (Page, column)										
1	KEY-OPERATED SWITCH RONIS, O-I RONIS key-operated switch, 22 mm, round, metal, shiny, lock number SB30, with 2 keys, 2 switch positions O-I, latching, actuating angle 90°, 10:30h/13:30h, key removal O+I, with holder, 1 NO+1 NC, screw terminal, possible special locks: 3SB31, 421, 455 Order No.: 3SU1150-4BF11-1FA0 CONTACT MODULE 1NO+1NC Type: 3SU1400-1AA10-1FA0 Contact module with 2 contact elements, 1 NO+1 NC, screw terminal, for front plate mounting Label holder Type: 3SU1900-0AH10-0AA0 Label holder, 22mm, flat, Frame rounded off at the bottom black, for labeling plate 17.5 mm x 27 mm, for gluing	Siemens													
			+2CJA01	-S100	/13.7										
2	Door contact Limit switch, Limit switches XC Standard, XCKN, metal end plunger, 1NC+1 NO, snap, Pg1 Order No.: Número de pedido: XCKN2110G11	Schneider Electric													
			+2CJA01	-S101	/4.4										
			+2CJA01	-S102	/4.5										
2	SELECTOR SWITCH, O-I, BLACK, WHITE Selector switch, illuminable, 22 mm, round, metal, shiny, white, selector switch, short, 2 switch positions O-I, latching, actuating angle 90°, 10:30h/13:30h, with holder, 1 NO, screw terminal Order No.: 3SU1150-2BF60-1BA0 Label holder Type: 3SU1900-0AH10-0AA0 Label holder, 22mm, flat, Frame rounded off at the bottom black, for labeling plate 17.5 mm x 27 mm, for gluing	Siemens													
			+2CJA01	-S103	/13.5										
			+2CJA01	-S104	/13.6										

1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description		Manufacturer	Location (+)	Designation (-)	Symbol Position in schematics (Page, column)									
1	PUSHBUTTON, BLACK Pushbutton, 22 mm, round, metal, shiny, black, pushbutton, flat, momentary contact type, 1 NO, screw terminal Order No.: 3SU1150-0AB10-1BA0 Label holder Type: 3SU1900-0AH10-0AA0 Label holder, 22mm, flat, Frame rounded off at the bottom black, for labeling plate 17.5 mm x 27 mm, for gluing		Siemens												
				+2CJA01	-S203	/14.1									
1	ILLUMINATED PUSHBUTTON, RED Illuminated pushbutton, 22 mm, round, metal, shiny, red, pushbutton, flat, momentary contact type, with holder, 1 NC, LED module with integrated LED 24 V AC/DC, screw terminal Order No.: 3SU1152-0AB20-1CA0 Label holder Type: 3SU1900-0AH10-0AA0 Label holder, 22mm, flat, Frame rounded off at the bottom black, for labeling plate 17.5 mm x 27 mm, for gluing		Siemens												
				+2CJA01	-S210	/13.1		/40.2							
1	ILLUMINATED PUSHBUTTON, GREEN Illuminated pushbutton, 22 mm, round, metal, shiny, green, pushbutton, flat, momentary contact type, with holder, 1 NO, LED module with integrated LED 24 V AC/DC, screw terminal Order No.: 3SU1152-0AB40-1BA0 Label holder Type: 3SU1900-0AH10-0AA0 Label holder, 22mm, flat, Frame rounded off at the bottom black, for labeling plate 17.5 mm x 27 mm, for gluing		Siemens												
				+2CJA01	-S211	/13.2		/40.3							

1		2		3	4	5	6	7	8
Qty. (pcs)	Equipment technical description	Manufacturer	Location (+)	Designation (-)	Symbol Position in schematics (Page, column)				
2	SELECTOR SWITCH, I>O<II, WHITE Selector switch, illuminable, 22 mm, round, metal, shiny, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h Order No.: 3SU1052-2BM60-0AA0 Contact module with 1 contact element, 1 NO Type: 3SU1400-1AA10-1BA0 Contact module with 1 contact element, 1 NO, screw terminal, for front plate mounting Contact module with 1 contact element, 1 NO Type: 3SU1400-1AA10-1BA0 Contact module with 1 contact element, 1 NO, screw terminal, for front plate mounting HOLDER Type: 3SU1550-0AA10-0AA0 Holder for 3 modules, universal, plastic/metal Label holder Type: 3SU1900-0AH10-0AA0 Label holder, 22mm, flat, Frame rounded off at the bottom black, for labeling plate 17.5 mm x 27 mm, for gluing	Siemens							
			+2CJA01	-S221	/14.3	/14.4			
			+2CJA01	-S222	/14.5	/14.6			
2	ILLUMINATED PUSHBUTTON, WHITE Illuminated pushbutton, 22 mm, round, metal, shiny, white, pushbutton, flat, momentary contact type, with holder, 1 NO, LED module with integrated LED 24 V AC/DC, screw terminal Order No.: 3SU1152-0AB60-1BA0 Label holder Type: 3SU1900-0AH10-0AA0 Label holder, 22mm, flat, Frame rounded off at the bottom black, for labeling plate 17.5 mm x 27 mm, for gluing	Siemens							
			+2CJA01	-S223	/13.3	/40.4			
			+2CJA01	-S224	/14.2	/40.8			

1		2		3	4	5	6	7	8
Qty. (pcs)	Equipment technical description	Manufacturer	Location (+)	Designation (-)	Symbol Position in schematics (Page, column)				
1	ILLUMINATED PUSHBUTTON, RED Illuminated pushbutton, 22 mm, round, metal, shiny, red, pushbutton, flat, momentary contact type, with holder, 1 NO+1 NC, LED module with integrated LED 24 V AC/DC, screw terminal Order No.: 3SU1152-0AB20-1FA0 Label holder Type: 3SU1900-0AH10-0AA0 Label holder, 22mm, flat, Frame rounded off at the bottom black, for labeling plate 17.5 mm x 27 mm, for gluing	Siemens							
			+2CJA01	-S230	/13.4		/40.5		
1	ILLUMINATED PUSHBUTTON, GREEN Illuminated pushbutton, 22 mm, round, metal, shiny, green, pushbutton, flat, momentary contact type, with holder, 1 NO, LED module with integrated LED 24 V AC/DC, screw terminal Order No.: 3SU1152-0AB40-1BA0 Label holder Type: 3SU1900-0AH10-0AA0 Label holder, 22mm, flat, Frame rounded off at the bottom black, for labeling plate 17.5 mm x 27 mm, for gluing	Siemens							
			+2CJA01	-S231	/52.2		/40.6		
1	ILL. EM. STOP MUSHR. PUSHBUTTON,40MM,RED EMERGENCY STOP mushroom pushbutton, illuminable, 22 mm, round, metal, shiny, red, 40 mm, positive latching, Rotate-to-unlatch Order No.: Número de pedido: 3SU1051-1HB20-0AA0 SOPORTE, MODULO DE CONTACTOS 1NC,1NC Type: 3SU1550-1AA10-1PA0 soporte para 3 módulos, metal, 1NC, 1NC, borne de tornillo Número de pedido: 3SU1550-1AA10-1PA0 LED-MODUL, ROJO Type: 3SU1401-1BB20-1AA0 MODULO LED CON LED 24V AC/DC INTEGRADO, ROJO, BORNES DE TORNILLO, PARA FIJACION EN PLACA FRONTAL Número de pedido: 3SU1401-1BB20-1AA0 COLLAR DE PROTECCION Type: 3SU1900-0DY30-0AA0 COLLAR DE PROTECCION PARA PULSADOR SETA DE PARO EMEG., SIN O CON CERRADURA RONIS, AMARILLO, PLASTICO Número de pedido: 3SU1900-0DY30-0AA0	Siemens							
			+2CJA01	-S301	/13.8		/40.7		/63.2

1		2		3		4		5		6		7		8	
Qty. (pcs)	Equipment technical description		Manufacturer	Location (+)	Designation (-)	Symbol Position in schematics (Page, column)									
4	SIGNAL CONVERTER 0-10V/4-20MA 24VUC Separation amplifier 24 V AC/DC, 3-way separation input: 0-10 V output: 4-20 mA screw terminal Order No.: 3RS7000-1DE00		Siemens												
				+2CJA01	-U151	/43.1	/6.5	/6.6	/43.1	/43.2	/43.1	/43.2			
				+2CJA01	-U152	/43.3	/6.6	/6.6	/43.3	/43.3	/43.3	/43.3			
				+2CJA01	-U153	/43.5	/6.7	/6.7	/43.5	/43.5	/43.5	/43.5			
				+2CJA01	-U154	/43.7	/6.8		/43.7	/43.7	/43.7	/43.7	/43.7	/6.8	
1	Frequency converter Frequency converter with electrical isolation for measuring the speed from the residual voltage of the generator in connection with a speed transducer. Order No.: VFU1		Voith Hydro												
				+2CJA01	-U201	/51.3	/51.3	/51.3	/51.3	/51.3	/51.3	/51.3			
1	SKB 30/12 A1, Bridge Rectifier Module, 15A 1200V, 4-Pin G 35 SKB 30/12 A1, Bridge Rectifier Module, 15A 1200V, 4-Pin G 35 Order No.: SKB30/12A1														
				+2CJA01	-V1	/55.4									
1	Socket outlet for distribution board Socket, for USA and other countries, Pin connector pattern type AB 15A, connection method: Screw connection, color: gray, nom. voltage: 125 V AC (60 Hz), nominal current: 15 A, for mounting on a DIN rail in the service interface or direct mounting, standards/specifications: UL 508, Country marking: USA Order No.: Número de pedido: 0804152		Phoenix Contact												
				+2CJA01	-X101	/4.2									