


E	04.12.2025.	L. Božičević	D. Burčul	G. Kolić	Après ERU / After FAT	BPE						
D	21.07.2025.	T. Trogrlić	D. Burčul	G. Kolić	Pour fabrication / For manufacturing	BPE						
C	03.06.2025.	T. Trogrlić	D. Burčul	G. Kolić	Arrêt d'urgence mise à jour / Emergency matrix update	PRE						
B	14.04.2025.	L. Božičević	D. Burčul	G. Kolić	Mise à jour générale / General update	PRE						
A	07.03.2025.	L. Božičević	D. Burčul	G. Kolić	Etablissement du plan / First issue	PRE						
Rév. Rev.	Date Date	Etabli Prepared	Vérifié Checked	Approuvé Approved	Modifications Modifications	Statut Status						
Maîtrise d'ouvrage Project Owner  ALBIOMA NOTRE NATURE EST PLEINE D'ÉNERGIE ALBIOMA BOIS ROUGE 2, Chemin Bois Rouge 97440 Saint-Andre LA REUNION - FRANCE												
Maîtrise d'œuvre Engineering & Project Management  31, rue Ferrandière 69002 Lyon Tél : 04-72-32-57-00 Fax : 04-72-32-57-29  ALBIOMA NOTRE NATURE EST PLEINE D'ÉNERGIE Tour OPUS 12 - LA DÉFENSE 9 77, Esplanade du Général de Gaulle 92914 LA DEFENSE CEDEX - FRANCE Téléphone : +33(0)1.47.76.67.00												
Réf. MOE : -												
UNITE DE VALORISATION CRS ABR ABR RDF POWER PLANT												
+4LKF001AR BOILER/WSC EMERGENCY POWERED MCC Schéma électrique -												
Fournisseur / Supplier  ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG, 84 35000 Slavonski Brod, Croatia				Sous-traitant / Sub-Supplier  SINTAKSA A Voith Company Ulica Domovinskog rata 104C, 21 000 Split, Tuškanova 37, 10000 Zagreb T: +385 1 2310 273 info@sintaksa.hr www.sintaksa.hr								
Réf. F/S : IF21273				Réf. ST/SS : xxxxxxxxxxxx								
Projet Project			Tranche unit		Emetteur Issuer		Numéro Number			Révision Revision		
BRC			4		ATEP0		1870			E		
Approbation de la dernière révision : Approval of the latest revision :							Format A3		Echelle 1/XX		Scale Folio 1/250	
This document is ALBIOMA property. It cannot be used, reproduced, transmitted and/or disclosed without prior written authorisation												



SINTAKSA

A Voith Company

Ulica Domovinskog rata 104C,
21 000 Split, Hrvatska / Croatia
OIB: 32357958120
T: +385 1 2310 273
www.sintaksa.hr

SCHÉMA DE CÂBLAGE ÉLECTRIQUE

Projet / tâche:

RDF Albioma Les Bois Rouge
Reunion - France

Client / acheteur:

ANDRITZ TEP d.o.o.
Ulica 108. brigade ZNG 84, 35000
Slavonski Brod, Croatia

Cadre:

BOILER LOW VOLTAGE MCC
CABINET (EMERGENCY)

SECTION 1

+4LKF001AR

Code du document:

BRC-4-ATEP0-1870-E

Date:

04.12.2025.

Date:	04.12.2025.		 SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 1		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	TITLE PAGE		Drawing designation:				BRC-4-ATEP0-1870-E		=4LKF001AR	Sheet:	2
Approved:	Grga Kolić												+4LKF001AR	Next:	3		
Format:	A3																

Table des matières

Page de garde	Description de la page	Remarque	Date	Édité par	Révision
1	COVER PAGE		2025/12/24		E
2	TITLE PAGE		2025/12/24		E
3	Table of contents : =4LKF001AR+4LKF001AR#A/1 - =4LKF001AR+4LKF001AR#Y/65		2026/01/07		
4	Table of contents : =4LKF001AR+4LKF001AR#Y/66 - =4LKF001AR+4LKF002AR#V/121		2026/01/07		
5	Table of contents : =4LKF001AR+4LKF002AR#Z/130 - =4LKF001AR+4LKF003AR#D/152		2026/01/07		
6	Table of contents : =4LKF001AR+4LKF003AR#D/153 - =4LKF001AR+4LKF003AR#Y/213		2026/01/07		
7	Table of contents : =4LKF001AR+4LKF003AR#Y/214 - =4LKF001AR+4LKF004AR#QA/251		2026/01/07		
8	Table of contents : =4LKF001AR+4LKF004AR#QB/255 - =4LKF001AR+4LKF005AR#G/311		2026/01/07		
9	Table of contents : =4LKF001AR+4LKF005AR#G/312 - =4LKF001AR+4LKF005AR#QA/371		2026/01/07		
10	Table of contents : =4LKF001AR+4LKF005AR#QA/372 - =4LKF001AR+4LKF005AR#Y/440		2026/01/07		
11	Table of contents : =4LKF001AR+4LKF005AR#Y/441 - =4LKF001AR+4LKF005AR#Y/458		2026/01/07		
21	WIRING PRINCIPLE		2025/12/24		E
22	DESIGNATION CODES		2025/12/24		E
31	400VAC INCOMING SUPPLY		2025/12/24		E
32	400VAC INCOMING SUPPLY		2025/12/24		E
33	400VAC INCOMING SUPPLY		2025/12/24		E
34	230VAC DISTRIBUTION		2025/12/24		E
35	230VAC DISTRIBUTION		2025/12/24		E
36	48VAC DISTRIBUTION		2025/12/24		E
37	48VAC DISTRIBUTION		2025/12/24		E
38	230VAC DISTRIBUTION		2025/12/24		E
39	230VAC DISTRIBUTION		2025/12/24		E
40	230VAC DISTRIBUTION		2025/12/24		E
41	48VAC DISTRIBUTION 1		2025/12/24		E
42	48VAC DISTRIBUTION 2		2026/01/05		E
51	SIGNALIZATION		2025/12/24		E
55	SPARE		2025/12/24		E
60	Summarized parts list		2026/01/05		E
61	Summarized parts list		2026/01/05		E
62	Summarized parts list		2026/01/05		
63	Summarized parts list		2026/01/05		
64	Terminal diagram =4LKF001AR+4LKF001AR-X 038 10		2025/12/24		E
65	Terminal diagram =4LKF001AR+4LKF001AR-XA 034 03		2025/12/24		E

Table des matières

Page de garde	Description de la page	Remarque	Date	Édité par	Révision
66	Terminal diagram =4LKF001AR+4LKF001AR-XA 035 03		2025/12/24		E
67	Terminal diagram =4LKF001AR+4LKF001AR-XA 038 05		2025/12/24		E
68	Terminal diagram =4LKF001AR+4LKF001AR-XB 036 03		2025/12/24		E
69	Terminal diagram =4LKF001AR+4LKF001AR-XB 037 03		2025/12/24		E
70	Terminal diagram =4LKF001AR+4LKF001AR-XB 041 05		2025/12/24		E
71	Terminal diagram =4LKF001AR+4LKF001AR-XB 042 05		2025/12/24		E
72	Terminal diagram =4LKF001AR+4LKF001AR-XS 051 03		2025/12/24		E
73	Terminal diagram =4LKF001AR+4LKF001AR-XS 055 02		2025/12/24		E
74	Terminal diagram =4LKF001AR+4LKF001AR-XS 055 02		2025/12/24		E
75	Terminal diagram =4LKF001AR+4LKF001AR-XS 055 02		2025/12/24		
76	Terminal diagram =4LKF001AR+4LKF001AR-XS 055 02		2025/12/24		
81	400VAC DISTRIBUTION		2026/01/07		E
82	ASH STEAM VENT FAN		2025/12/24		E
83	ASH STEAM VENT FAN - CONTROL		2026/01/05		E
84	ASH STEAM VENT FAN - SIGNALISATION		2025/12/24		E
85	HPU COOLING PUMP		2025/12/24		E
86	HPU COOLING PUMP - CONTROL		2026/01/05		E
87	HPU COOLING PUMP - SIGNALIZATION		2025/12/24		E
88	COOLING FAN 1		2025/12/24		E
89	COOLING FAN 1 - CONTROL		2026/01/05		E
90	COOLING FAN 1 - SIGNALISATION		2025/12/24		E
91	EMERGENCY COOLER		2025/12/24		E
92	EXPANSION TANK SYSTEM, WATER COOLER 1 & WATER COOLER 2		2026/01/07		E
93	GRATE EXPANSION TANK SYSTEM		2026/01/07		E
94	LAMP TEST		2026/01/07		E
101	EMERGENCY SHUTDOWN - GROUND FLOOR HPU		2025/12/24		E
102	EMERGENCY SHUTDOWN - GROUND FLOOR HPU		2025/12/24		E
103	EMERGENCY SHUTDOWN - GROUND FLOOR HPU		2025/12/24		E
104	EMERGENCY SHUTDOWN - FIRST FLOOR MIDDLE		2025/12/24		E
105	EMERGENCY SHUTDOWN - FIRST FLOOR MIDDLE		2025/12/24		E
111	SIGNALIZATION		2026/01/05		E
115	SPARE		2025/12/24		E
121	COMMUNICATION		2026/01/07		E

Table des matières

Page de garde	Description de la page	Remarque	Date	Édité par	Révision
130	Summarized parts list		2026/01/07		E
131	Summarized parts list		2026/01/07		E
132	Summarized parts list		2026/01/07		E
133	Terminal diagram =4LKF001AR+4LKF002AR-X 082 05		2025/12/24		E
134	Terminal diagram =4LKF001AR+4LKF002AR-X 083 09		2025/12/24		E
135	Terminal diagram =4LKF001AR+4LKF002AR-X 084 06		2025/12/24		E
136	Terminal diagram =4LKF001AR+4LKF002AR-X 085 05		2025/12/24		E
137	Terminal diagram =4LKF001AR+4LKF002AR-X 086 09		2025/12/24		E
138	Terminal diagram =4LKF001AR+4LKF002AR-X 087 06		2025/12/24		E
139	Terminal diagram =4LKF001AR+4LKF002AR-X 088 05		2025/12/24		E
140	Terminal diagram =4LKF001AR+4LKF002AR-X 089 09		2025/12/24		E
141	Terminal diagram =4LKF001AR+4LKF002AR-X 090 06		2025/12/24		E
142	Terminal diagram =4LKF001AR+4LKF002AR-X 091 04		2025/12/24		E
143	Terminal diagram =4LKF001AR+4LKF002AR-X 092 04		2025/12/24		E
144	Terminal diagram =4LKF001AR+4LKF002AR-X 092 09		2025/12/24		E
145	Terminal diagram =4LKF001AR+4LKF002AR-X 092 13		2025/12/24		E
146	Terminal diagram =4LKF001AR+4LKF002AR-X 101 04		2025/12/24		E
147	Terminal diagram =4LKF001AR+4LKF002AR-X 103 11		2025/12/24		E
148	Terminal diagram =4LKF001AR+4LKF002AR-X 104 04		2025/12/24		E
149	Terminal diagram =4LKF001AR+4LKF002AR-XB 093 03		2025/12/24		E
150	Terminal diagram =4LKF001AR+4LKF002AR-XS 111 03		2025/12/24		E
151	Terminal diagram =4LKF001AR+4LKF002AR-XS 115 02		2025/12/24		E
152	Terminal diagram =4LKF001AR+4LKF002AR-XS 115 02		2025/12/24		E
153	Summarized parts list		2026/01/07		
154	Summarized parts list		2026/01/07		
155	Summarized parts list		2026/01/07		
156	Summarized parts list		2026/01/07		
157	Summarized parts list		2026/01/07		
158	Summarized parts list		2026/01/07		
159	Terminal diagram =4LKF001AR+4LKF002AR-XS 115 02		2025/12/24		
160	Terminal diagram =4LKF001AR+4LKF002AR-XS 115 02		2025/12/24		
151	400VAC DISTRIBUTION		2025/12/24		E
152	HPU EMERGENCY COOLING PUMP		2025/12/24		E

Table des matières

Page de garde	Description de la page	Remarque	Date	Édité par	Révision
153	HPU EMERGENCY COOLING PUMP - CONTROL		2026/01/05		E
154	HPU EMERGENCY COOLING PUMP - SINGALIZATION		2025/12/24		E
155	COOLING WATER PUMP 1		2026/01/05		E
156	COOLING WATER PUMP 1 - CONTROL		2026/01/05		E
157	COOLING WATER PUMP 1 - SIGNALIZATION		2025/12/24		E
158	DRAG CHAIN CONVEYOR 1		2025/12/24		E
159	DRAG CHAIN CONVEYOR 1 - CONTROL		2026/01/05		E
160	DRAG CHAIN CONVEYOR 1 - CONTROL		2025/12/24		E
161	DRAG CHAIN CONVEYOR 1 - SIGNALIZATION		2025/12/24		E
162	DRAG CHAIN CONVEYOR 1 - SIGNALIZATION		2025/12/24		E
163	SEALING AIR FAN LEFT		2025/12/24		E
164	SEALING AIR FAN LEFT - CONTROL		2026/01/05		E
165	SEALING AIR FAN LEFT - SIGNALIZATION		2025/12/24		E
166	COOLING FAN 2		2025/12/24		E
167	COOLING FAN 2 - CONTROL		2026/01/05		E
168	COOLING FAN 2 - SIGNALISATION		2025/12/24		E
169	LAMP TEST		2026/01/05		E
171	EMERGENCY SHUTDOWN - GROUND FLOOR FUEL FEED SIDE		2025/12/24		E
172	EMERGENCY SHUTDOWN - GROUND FLOOR FUEL FEED SIDE		2025/12/24		E
181	SIGNALIZATION		2025/12/24		E
185	SPARE		2025/12/24		E
191	COMMUNICATION		2025/12/24		E
200	Summarized parts list		2026/01/05		E
201	Summarized parts list		2026/01/05		E
202	Summarized parts list		2026/01/05		
203	Summarized parts list		2026/01/05		
207	Terminal diagram =4LKF001AR+4LKF003AR-X 152 05		2025/12/24		E
208	Terminal diagram =4LKF001AR+4LKF003AR-X 153 09		2025/12/24		E
209	Terminal diagram =4LKF001AR+4LKF003AR-X 154 06		2025/12/24		E
210	Terminal diagram =4LKF001AR+4LKF003AR-X 155 05		2025/12/24		E
211	Terminal diagram =4LKF001AR+4LKF003AR-X 156 09		2025/12/24		E
212	Terminal diagram =4LKF001AR+4LKF003AR-X 157 06		2025/12/24		E
213	Terminal diagram =4LKF001AR+4LKF003AR-X 158 05		2025/12/24		E

Table des matières

Page de garde	Description de la page	Remarque	Date	Édité par	Révision
214	Terminal diagram =4LKF001AR+4LKF003AR-X 159 09		2025/12/24		E
215	Terminal diagram =4LKF001AR+4LKF003AR-X 161 06		2025/12/24		E
216	Terminal diagram =4LKF001AR+4LKF003AR-X 163 05		2025/12/24		E
217	Terminal diagram =4LKF001AR+4LKF003AR-X 164 09		2025/12/24		E
218	Terminal diagram =4LKF001AR+4LKF003AR-X 165 06		2025/12/24		E
219	Terminal diagram =4LKF001AR+4LKF003AR-X 166 05		2025/12/24		E
220	Terminal diagram =4LKF001AR+4LKF003AR-X 167 09		2025/12/24		E
221	Terminal diagram =4LKF001AR+4LKF003AR-X 168 06		2025/12/24		E
222	Terminal diagram =4LKF001AR+4LKF003AR-X 171 04		2025/12/24		E
223	Terminal diagram =4LKF001AR+4LKF003AR-X 172 11		2025/12/24		E
224	Terminal diagram =4LKF001AR+4LKF003AR-XB 169 03		2025/12/24		E
225	Terminal diagram =4LKF001AR+4LKF003AR-XS 181 03		2025/12/24		E
226	Terminal diagram =4LKF001AR+4LKF003AR-XS 185 02		2025/12/24		E
227	Terminal diagram =4LKF001AR+4LKF003AR-XS 185 02		2025/12/24		E
228	Terminal diagram =4LKF001AR+4LKF003AR-XS 185 02		2025/12/24		
229	Terminal diagram =4LKF001AR+4LKF003AR-XS 185 02		2025/12/24		
221	400VAC DISTRIBUTION		2025/12/24		E
222	COOLING WATER PUMP 2		2025/12/24		E
223	COOLING WATER PUMP 2 - CONTROL		2026/01/05		E
224	COOLING WATER PUMP 2 - SIGNALIZATION		2025/12/24		E
225	DRAG CHAIN CONVEYOR 2		2025/12/24		E
226	DRAG CHAIN CONVEYOR 2 - CONTROL		2026/01/05		E
227	DRAG CHAIN CONVEYOR 2 - CONTROL		2026/01/05		E
228	DRAG CHAIN CONVEYOR 2 - SIGNALIZATION		2025/12/24		E
229	DRAG CHAIN CONVEYOR 2 - SIGNALIZATION		2025/12/24		E
230	SEALING AIR FAN RIGHT		2025/12/24		E
231	SEALING AIR FAN RIGHT - CONTROL		2026/01/05		E
232	SEALING AIR FAN RIGHT - SIGNALIZATION		2025/12/24		E
233	COOLING FAN 3		2025/12/24		E
234	COOLING FAN 3 - CONTROL		2026/01/05		E
235	COOLING FAN 3 - SIGNALISATION		2025/12/24		E
236	LAMP TEST		2026/01/05		E
251	SIGNALIZATION		2025/12/24		E

Table des matières

Page de garde	Description de la page	Remarque	Date	Édité par	Révision
255	SPARE		2025/12/24		E
261	COMMUNICATION		2025/12/24		E
270	Summarized parts list		2026/01/05		E
271	Summarized parts list		2026/01/05		E
272	Summarized parts list		2026/01/05		
273	Terminal diagram =4LKF001AR+4LKF004AR-X 222 05		2025/12/24		E
274	Terminal diagram =4LKF001AR+4LKF004AR-X 223 09		2025/12/24		E
275	Terminal diagram =4LKF001AR+4LKF004AR-X 224 06		2025/12/24		E
276	Terminal diagram =4LKF001AR+4LKF004AR-X 225 05		2025/12/24		E
277	Terminal diagram =4LKF001AR+4LKF004AR-X 226 09		2025/12/24		E
278	Terminal diagram =4LKF001AR+4LKF004AR-X 228 06		2025/12/24		E
279	Terminal diagram =4LKF001AR+4LKF004AR-X 230 05		2025/12/24		E
280	Terminal diagram =4LKF001AR+4LKF004AR-X 231 09		2025/12/24		E
281	Terminal diagram =4LKF001AR+4LKF004AR-X 232 06		2025/12/24		E
282	Terminal diagram =4LKF001AR+4LKF004AR-X 233 05		2025/12/24		E
283	Terminal diagram =4LKF001AR+4LKF004AR-X 234 09		2025/12/24		E
284	Terminal diagram =4LKF001AR+4LKF004AR-X 235 06		2025/12/24		E
285	Terminal diagram =4LKF001AR+4LKF004AR-XB 236 03		2025/12/24		E
286	Terminal diagram =4LKF001AR+4LKF004AR-XS 251 03		2025/12/24		E
287	Terminal diagram =4LKF001AR+4LKF004AR-XS 255 02		2025/12/24		E
288	Terminal diagram =4LKF001AR+4LKF004AR-XS 255 02		2025/12/24		E
289	Summarized parts list		2026/01/05		
290	Terminal diagram =4LKF001AR+4LKF004AR-XS 255 02		2025/12/24		
291	Terminal diagram =4LKF001AR+4LKF004AR-XS 255 02		2025/12/24		
291	CONDENSATE PUMP 1 - MAIN POWER SUPPLY		2025/12/24		E
292	COOLING WATER PUMP 1 - MAIN POWER SUPPLY		2025/12/24		E
293	CONDENSATE PUMP 2 - MAIN POWER SUPPLY		2025/12/24		E
294	COOLING WATER PUMP 2 - MAIN POWER SUPPLY		2025/12/24		E
295	VFD GROUP 1 - 230 VAC AUXILIARY POWER SUPPLY		2025/12/24		E
296	VFD GROUP 1 - 48 VAC AUXILIARY POWER SUPPLY		2025/12/24		E
297	VFD GROUP 2 - 230 VAC AUXILIARY POWER SUPPLY		2025/12/24		E
298	VFD GROUP 2 - 48 VAC AUXILIARY POWER SUPPLY		2025/12/24		E
311	VFD GROUP 1 - 24 VDC AUXILIARY POWER SUPPLY		2025/12/24		E

Table des matières

Page de garde	Description de la page	Remarque	Date	Édité par	Révision
312	VFD GROUP 2 - 24 VDC AUXILIARY POWER SUPPLY		2025/12/24		E
321	CONDENSATE PUMP 1 - DIGITAL INPUTS		2025/12/24		E
322	CONDENSATE PUMP 1 - DIGITAL OUTPUTS		2025/12/24		E
323	CONDENSATE PUMP 1 - ANALOG INPUTS		2025/12/24		E
324	CONDENSATE PUMP 1 - ANALOG INPUTS		2026/01/05		E
325	COOLING WATER PUMP 1 - DIGITAL INPUTS		2025/12/24		E
326	COOLING WATER PUMP 1 - DIGITAL OUTPUTS		2025/12/24		E
327	COOLING WATER PUMP 1 - ANALOG INPUTS		2025/12/24		E
328	COOLING WATER PUMP 1 - ANALOG INPUTS		2026/01/05		E
329	CONDENSATE PUMP 2 - DIGITAL INPUTS		2025/12/24		E
330	CONDENSATE PUMP 2 - DIGITAL OUTPUTS		2025/12/24		E
331	CONDENSATE PUMP 2 - ANALOG INPUTS		2025/12/24		E
332	CONDENSATE PUMP 2 - ANALOG INPUTS		2025/12/24		E
333	COOLING WATER PUMP 2 - DIGITAL INPUTS		2025/12/24		E
334	COOLING WATER PUMP 2 - DIGITAL OUTPUTS		2025/12/24		E
335	COOLING WATER PUMP 2 - ANALOG INPUTS		2025/12/24		E
336	COOLING WATER PUMP 2 - ANALOG INPUTS		2026/01/05		E
337	VFD GROUP 1 - ANALOG OUTPUTS		2025/12/24		E
338	VFD GROUP 2 - ANALOG OUTPUTS		2025/12/24		E
341	CONDENSATE PUMP 1 - CONTROL		2025/12/24		E
342	CONDENSATE PUMP 1 - CONTROL		2025/12/24		E
343	COOLING WATER PUMP 1 - CONTROL		2026/01/05		E
344	COOLING WATER PUMP 1 - CONTROL		2025/12/24		E
345	CONDENSATE PUMP 2 - CONTROL		2025/12/24		E
346	CONDENSATE PUMP 2 - CONTROL		2025/12/24		E
347	COOLING WATER PUMP 2 - CONTROL		2025/12/24		E
348	COOLING WATER PUMP 2 - CONTROL		2025/12/24		E
361	CONDENSATE PUMP 1 - SAFE TORQUE OFF		2025/12/24		E
362	COOLING WATER PUMP 1 - SAFE TORQUE OFF		2026/01/05		E
363	CONDENSATE PUMP 2 - SAFE TORQUE OFF		2025/12/24		E
364	COOLING WATER PUMP 2 - SAFE TORQUE OFF		2025/12/24		E
365	EMERGENCY SHUTDOWN - TURBINE ZONE		2025/12/24		E
371	VFD GROUP 1 - SIGNALIZATION TO PLC		2025/12/24		E

Table des matières

Page de garde	Description de la page	Remarque	Date	Édité par	Révision
372	VFD GROUP 1 - LAMP TEST		2025/12/24		E
373	CONDENSATE PUMP 1 - SIGNALIZATION LAMPS		2025/12/24		E
374	COOLING WATER PUMP 1 - SIGNALIZATION LAMPS		2025/12/24		E
375	VFD GROUP 2 - SIGNALIZATION TO PLC		2025/12/24		E
376	VFD GROUP 2 - LAMP TEST		2025/12/24		E
377	CONDENSATE PUMP 2 - SIGNALIZATION LAMPS		2025/12/24		E
378	COOLING WATER PUMP 2 - SIGNALIZATION LAMPS		2025/12/24		E
391	SPARE CONTACTS		2025/12/24		E
401	VFD GROUP 1 - COMMUNICATION		2025/12/24		E
402	VFD GROUP 2 - COMMUNICATION		2025/12/24		E
410	Summarized parts list		2026/01/05		E
411	Summarized parts list		2026/01/05		E
412	Summarized parts list		2026/01/05		
413	Summarized parts list		2026/01/05		
422	Terminal diagram =4LKF001AR+4LKF005AR-X 295 05		2025/12/24		E
423	Terminal diagram =4LKF001AR+4LKF005AR-X 296 05		2025/12/24		E
424	Terminal diagram =4LKF001AR+4LKF005AR-X 296 05		2025/12/24		E
425	Terminal diagram =4LKF001AR+4LKF005AR-X 297 05		2025/12/24		E
426	Terminal diagram =4LKF001AR+4LKF005AR-X 298 05		2025/12/24		E
427	Terminal diagram =4LKF001AR+4LKF005AR-X 298 05		2025/12/24		E
428	Terminal diagram =4LKF001AR+4LKF005AR-X 311 05		2025/12/24		E
429	Terminal diagram =4LKF001AR+4LKF005AR-X 312 05		2025/12/24		E
430	Terminal diagram =4LKF001AR+4LKF005AR-X 321 04		2025/12/24		E
431	Terminal diagram =4LKF001AR+4LKF005AR-X 323 05		2025/12/24		E
432	Terminal diagram =4LKF001AR+4LKF005AR-X 325 04		2025/12/24		E
433	Terminal diagram =4LKF001AR+4LKF005AR-X 327 05		2025/12/24		E
434	Terminal diagram =4LKF001AR+4LKF005AR-X 329 04		2025/12/24		E
435	Terminal diagram =4LKF001AR+4LKF005AR-X 331 05		2025/12/24		E
436	Terminal diagram =4LKF001AR+4LKF005AR-X 333 04		2025/12/24		E
437	Terminal diagram =4LKF001AR+4LKF005AR-X 335 05		2025/12/24		E
438	Terminal diagram =4LKF001AR+4LKF005AR-X 337 08		2025/12/24		E
439	Terminal diagram =4LKF001AR+4LKF005AR-X 338 08		2025/12/24		E
440	Terminal diagram =4LKF001AR+4LKF005AR-X 365 04		2025/12/24		E

WIRE COLOR		
VOLTAGE	DESIGNATION	COLOR
400VAC	PHASE 1	BLACK - BLACK SLEEVE
400VAC	PHASE 2	BLACK - BROWN SLEEVE
400VAC	PHASE 3	BLACK - RED SLEEVE
	GROUND	GREEN & YELLOW
230VAC	PHASE	BROWN / BLACK
230VAC	NEUTRAL	BLUE / LIGHT BLUE
48VAC	PHASE 1	WHITE
48VAC	PHASE 2	GREY
24VDC	+24V PLC	RED
24VDC	-24V PLC	BLUE
EXTERNE	VOLTAGE > 48 VAC	ORANGE
ANALOG SIGNALS	ALL CONDUCTORS	VIOLET


POWER	SECTION MIN : 2,5 mm²
INTERNAL WIRING MARK	WIRE/LINE OF CELL" e.g.: WIRE 3/LINE 4 → 3.4
CABLE MARKING	SEE CABLE BOOK
WIRE MARKING	MARKING BY SES V 37

GROUNDING TYPE	IT
NETWORK VOLTAGE	400/230VCA, 48VCA
SHORT CIRCUIT CURRENT	IK3MAX: 31 kA

INTERNAL CABINET WIRING	
CURRENT	SECTION
< 10A	1 mm²
10A	1.5 mm²
16-20A	2.5 mm²
25A	4 mm²
32A	6 mm²
40-50A	10 mm²
63A	16 mm²
80-100A	25 mm²
125A	35 mm²
160A	50 mm²
WIRE TYPE : HO7VK	


TERMINAL TYPE	SECTION
PUSH-IN CONNECTION TERMINALS	≤ 6mm²
SCREW CONNECTION TERMINALS	> 6mm²

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18						
DEVICE TAG									CABLE DESIGNATION														
DESIGNATION			DEVICE TYPE			ACCORDING TO			DESIGNATION			LIAISON TYPE											
-BA			MEASUREMENT MODULE (VOLTAGE)			NF EN 81346-2			-A			HV POWER SUPPLY											
-BC			MEASUREMENT MODULE (CURRENT)			NF EN 81346-2			-B			LV POWER SUPPLY > 24V											
-BE			MODULE FOR INSULATION AND FAULT LOCATION			NF EN 81346-2			-C			POWER SUPPLY 24 VDC, CONTROL / DIGITAL INPUT/OUTPUT											
-BE			FAULT-LOCATING MODULE			NF EN 81346-2			-E			LIGHTING, SOCKET, HEATING/COOLING, VENTILATION											
-DS			DISTRIBUTION BLOCK			NF EN 81346-2			-M			MEASUREMENTS, ANALOGICAL SIGNALS											
-EP			HEATER			NF EN 81346-2			-S			COMMUNICATION											
-FA			SURGE PROTECTOR			NF EN 81346-2			-T			TELEPHONE - INTERCOM											
-FU			FUSE-DISCONNECTOR			TYPICAL																	
-CQ			VENTILATOR			NF EN 81346-2																	
-HL			SIGNAL LAMP			TYPICAL																	
-IG			SWITCH DISCONNECTOR			TYPICAL																	
-K			RELAY			TYPICAL																	
-KF			PLC			NF EN 81346-2																	
-KM			CONTACTOR			TYPICAL																	
-P			MULTIMETER			NF EN 81346-2																	
-P			THERMOSTAT, HYGROSTAT			NF EN 81346-2																	
-PF			LAMP			NF EN 81346-2																	
-PG			AMMETER			NF EN 81346-2																	
-Q			CIRCUIT BREAKER, MCB, MPCB			TYPICAL																	
-QA			SOFT STARTER			NF EN 81346-2																	
-QB			CIRCUIT BREAKER, MCCB, ACB			TYPICAL																	
-R			DIODE MODULES			NF EN 81346-2																	
-RF			FILTER			NF EN 81346-2																	
-RP			SAFETY RELAY			NF EN 81346-2																	
-S			SELECTOR SWITCHES, PUSH-BUTTON, DOOR SWITCH			TYPICAL																	
-TA			VARIABLE FREQUENCY DRIVE			NF EN 81346-2																	
-TB			INVERTER, RECTIFIER			NF EN 81346-2																	
-TC			CURRENT TRANSFORMER			TYPICAL																	
-TCU			CURRENT TRANSFORMER PHASE L1			TYPICAL																	
-TCV			CURRENT TRANSFORMER PHASE L2			TYPICAL																	
-TCW			CURRENT TRANSFORMER PHASE L3			TYPICAL																	
-U			SWITCH			NF EN 81346-2																	
-X			TERMINAL BLOCK			TYPICAL																	
-XS			SOCKET			NF EN 81346-2																	
Date:		04.12.2025.				Client:			Scope:			Project:		Unit & Issuer:		Number:		Revision:					
Drawn:		Luka Božičević							BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 1			BRC-4		ATEP0		1870		E					
Approved:		Grga Kolić				Object:			Content:			Drawing designation:		BRC-4-ATEP0-1870-E		=4LKF001AR		Sheet:					
Format:		A3				RDF Albioma Les Bois Rouge Reunion - France			DESIGNATION CODES											Next:			

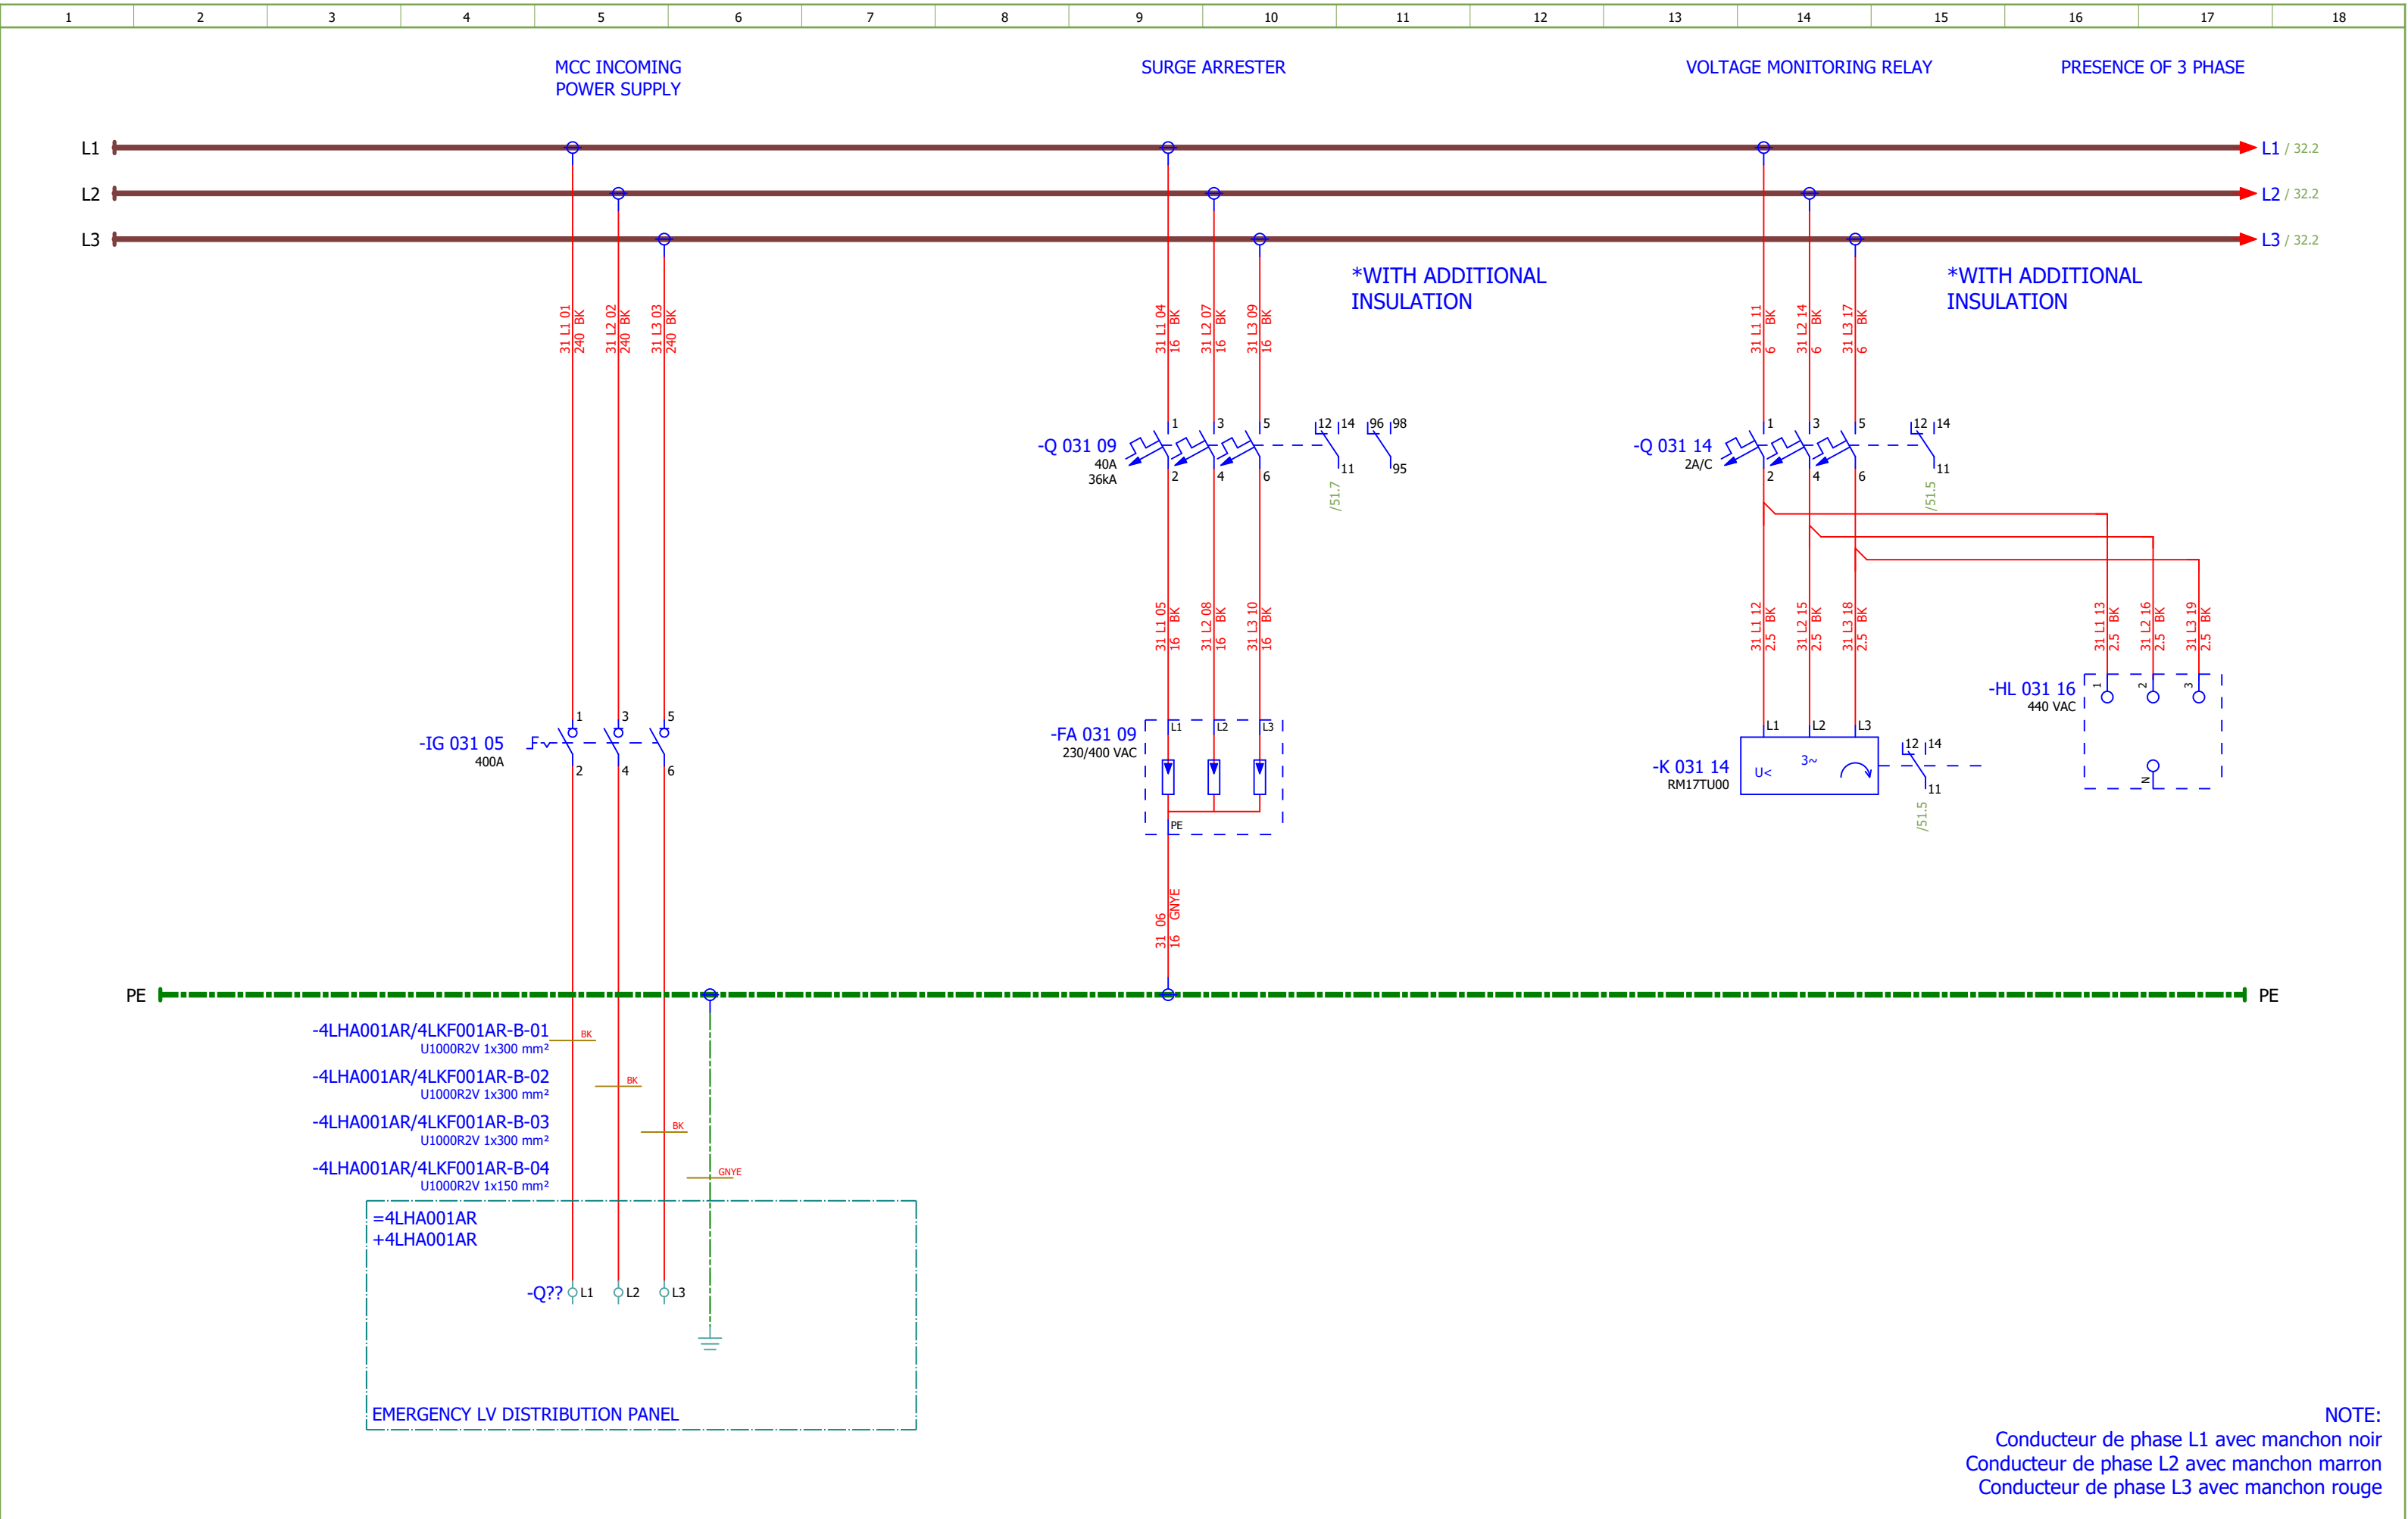



NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge


Date:	04.12.2025.			Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 1	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: E	
Drawn:	Luka Božičević									#D
Approved:	Grga Kolić									
Format:	A3									
				Object: RDF Albioma Les Bois Rouge Reunion - France	Content: 400VAC INCOMING SUPPLY	Drawing designation: BRC-4-ATEP0-1870-E			=4LKF001AR	Sheet: 31
									+4LKF001AR	Next: 32

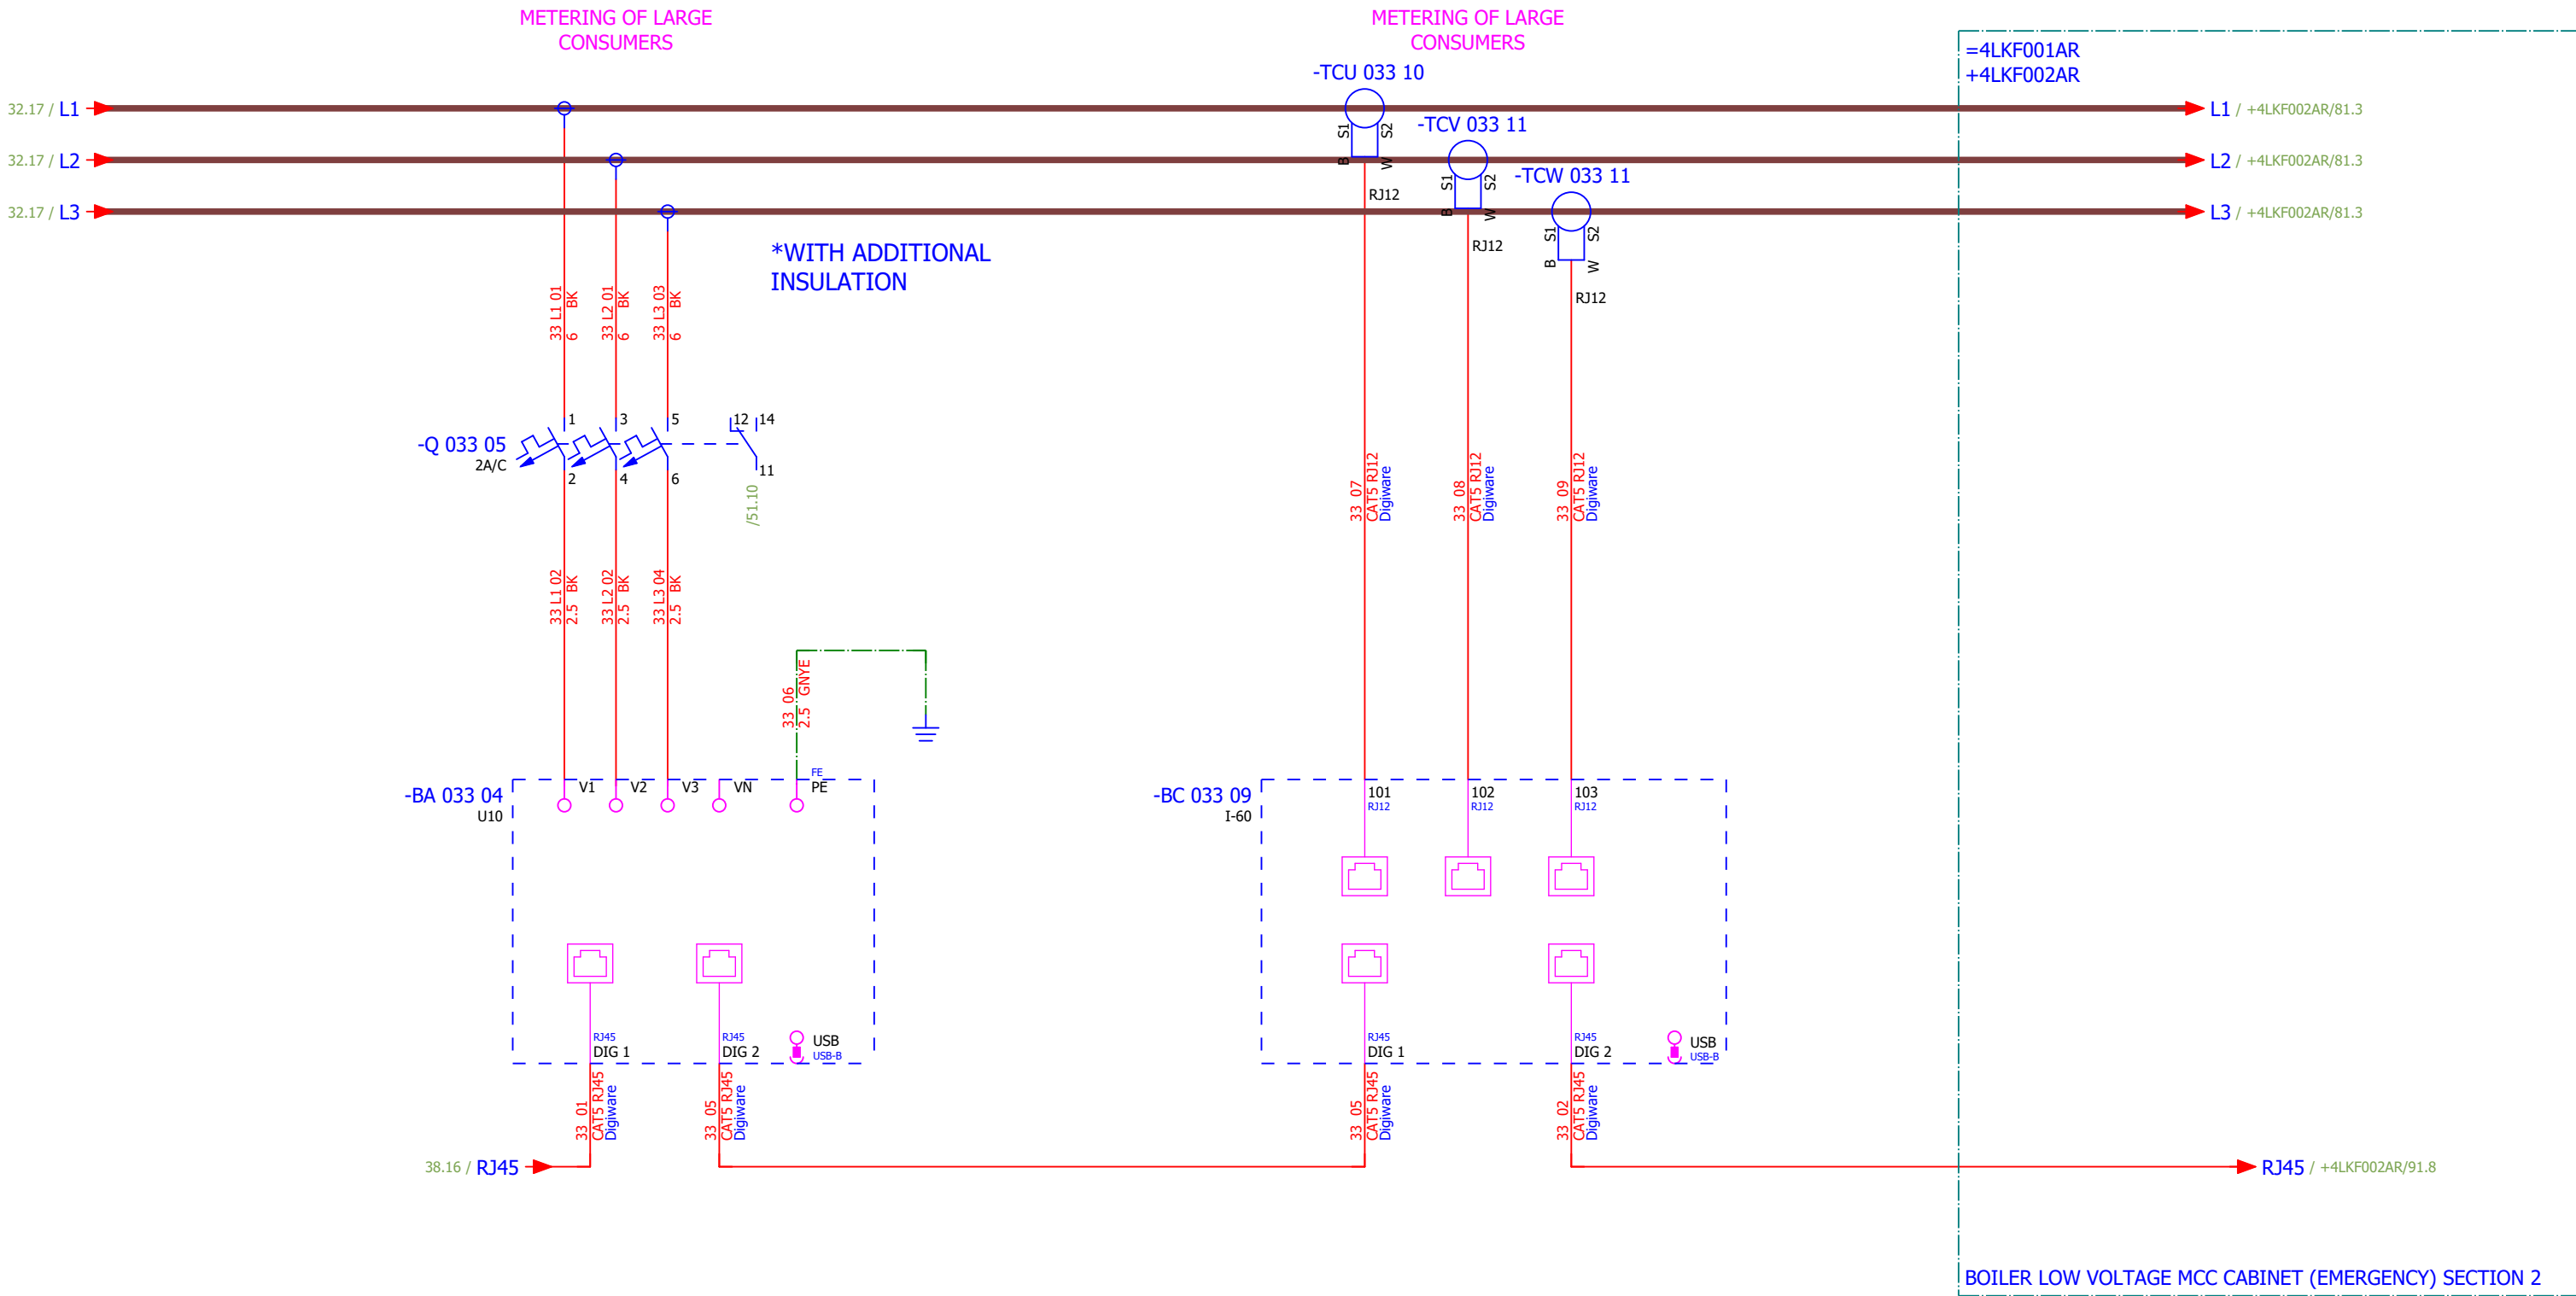



NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

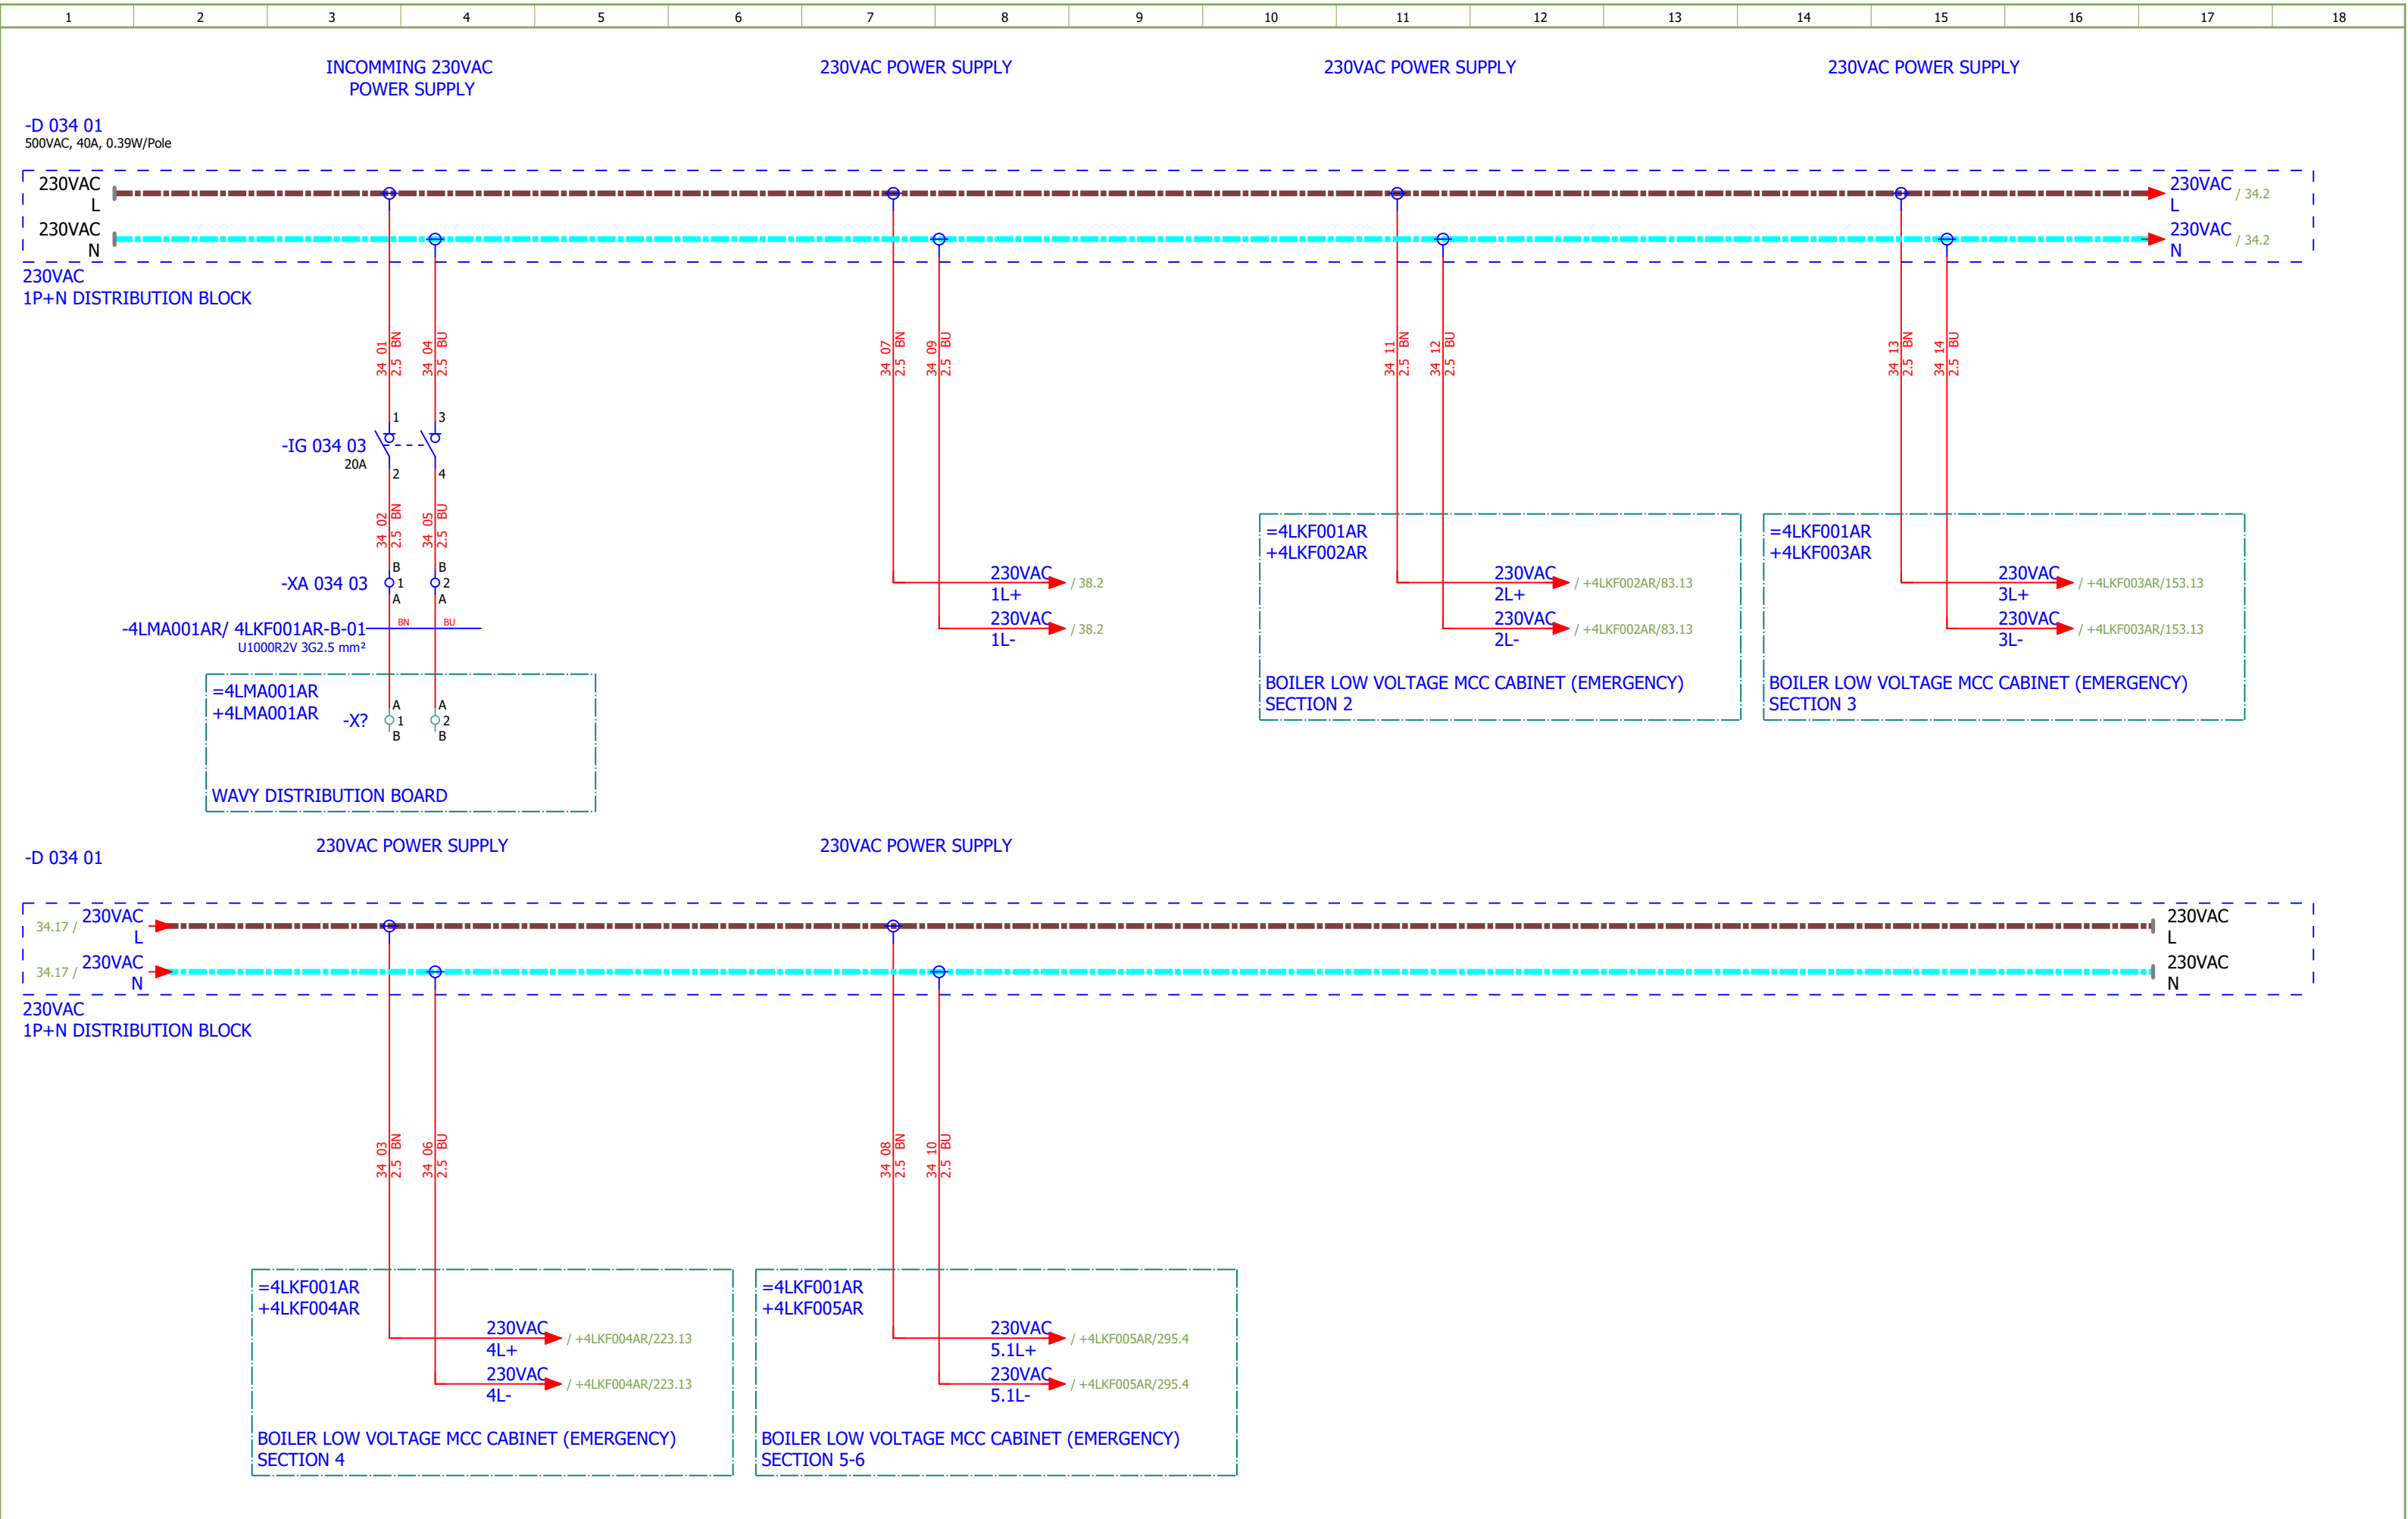

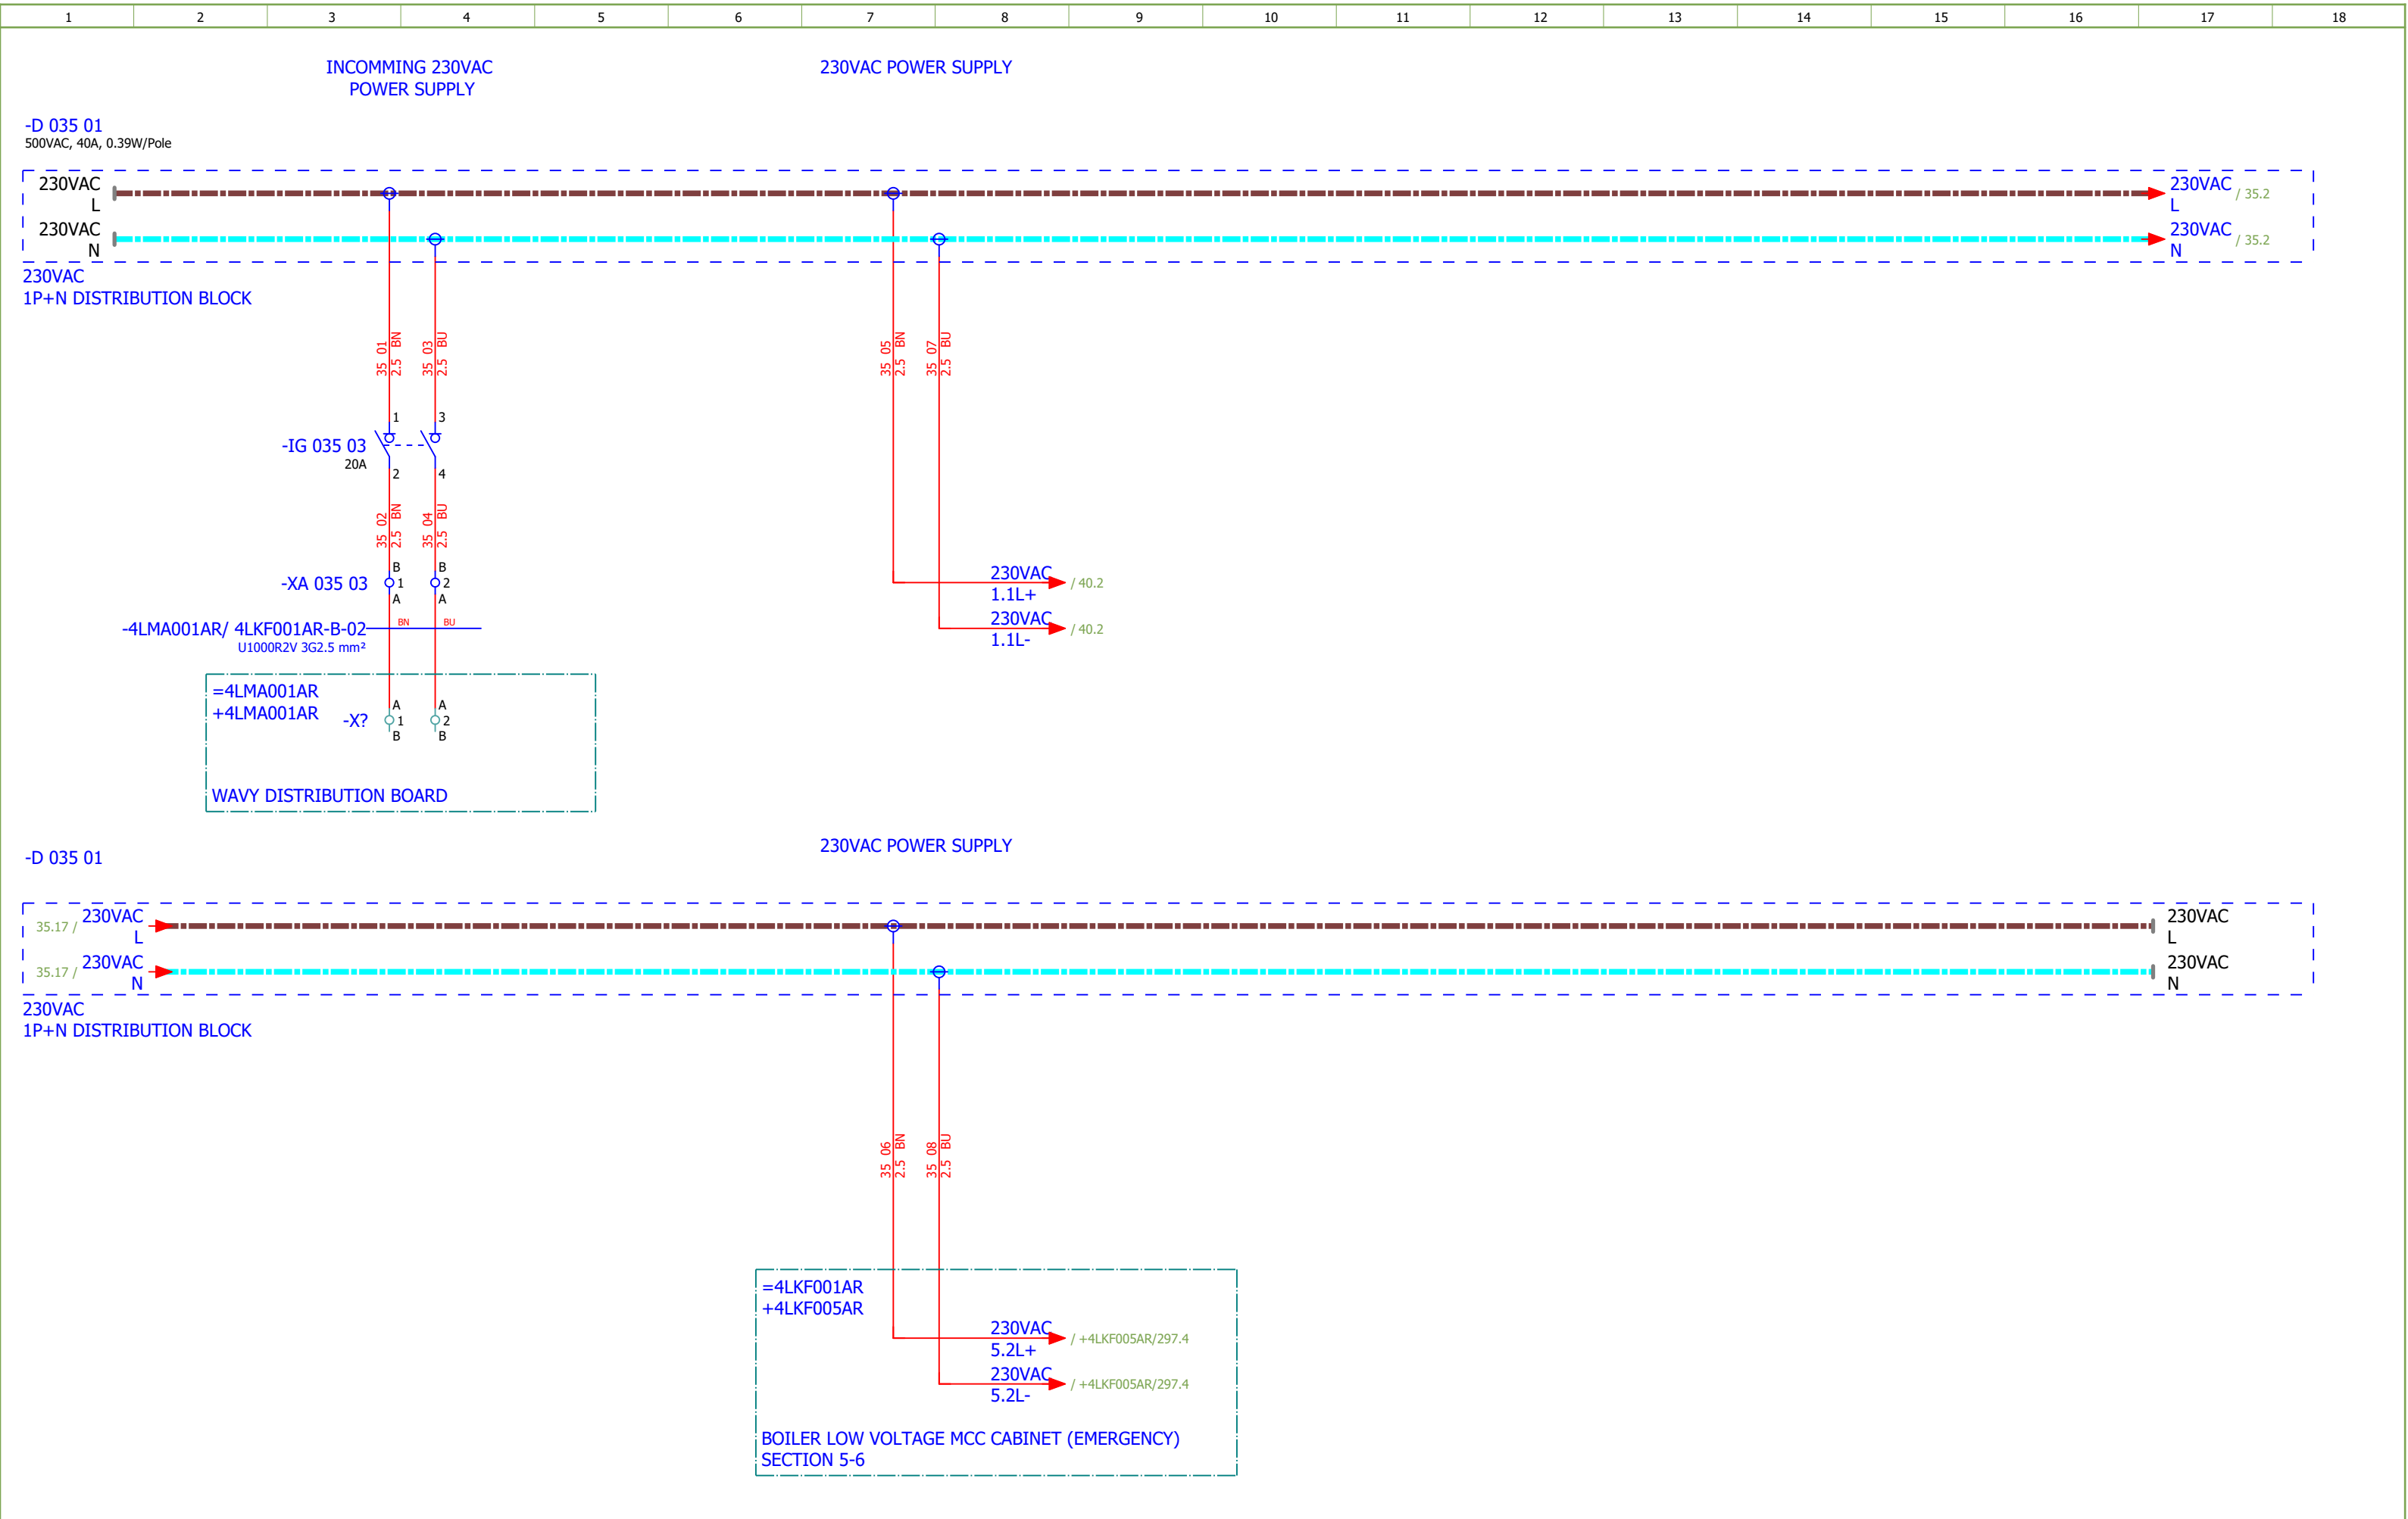


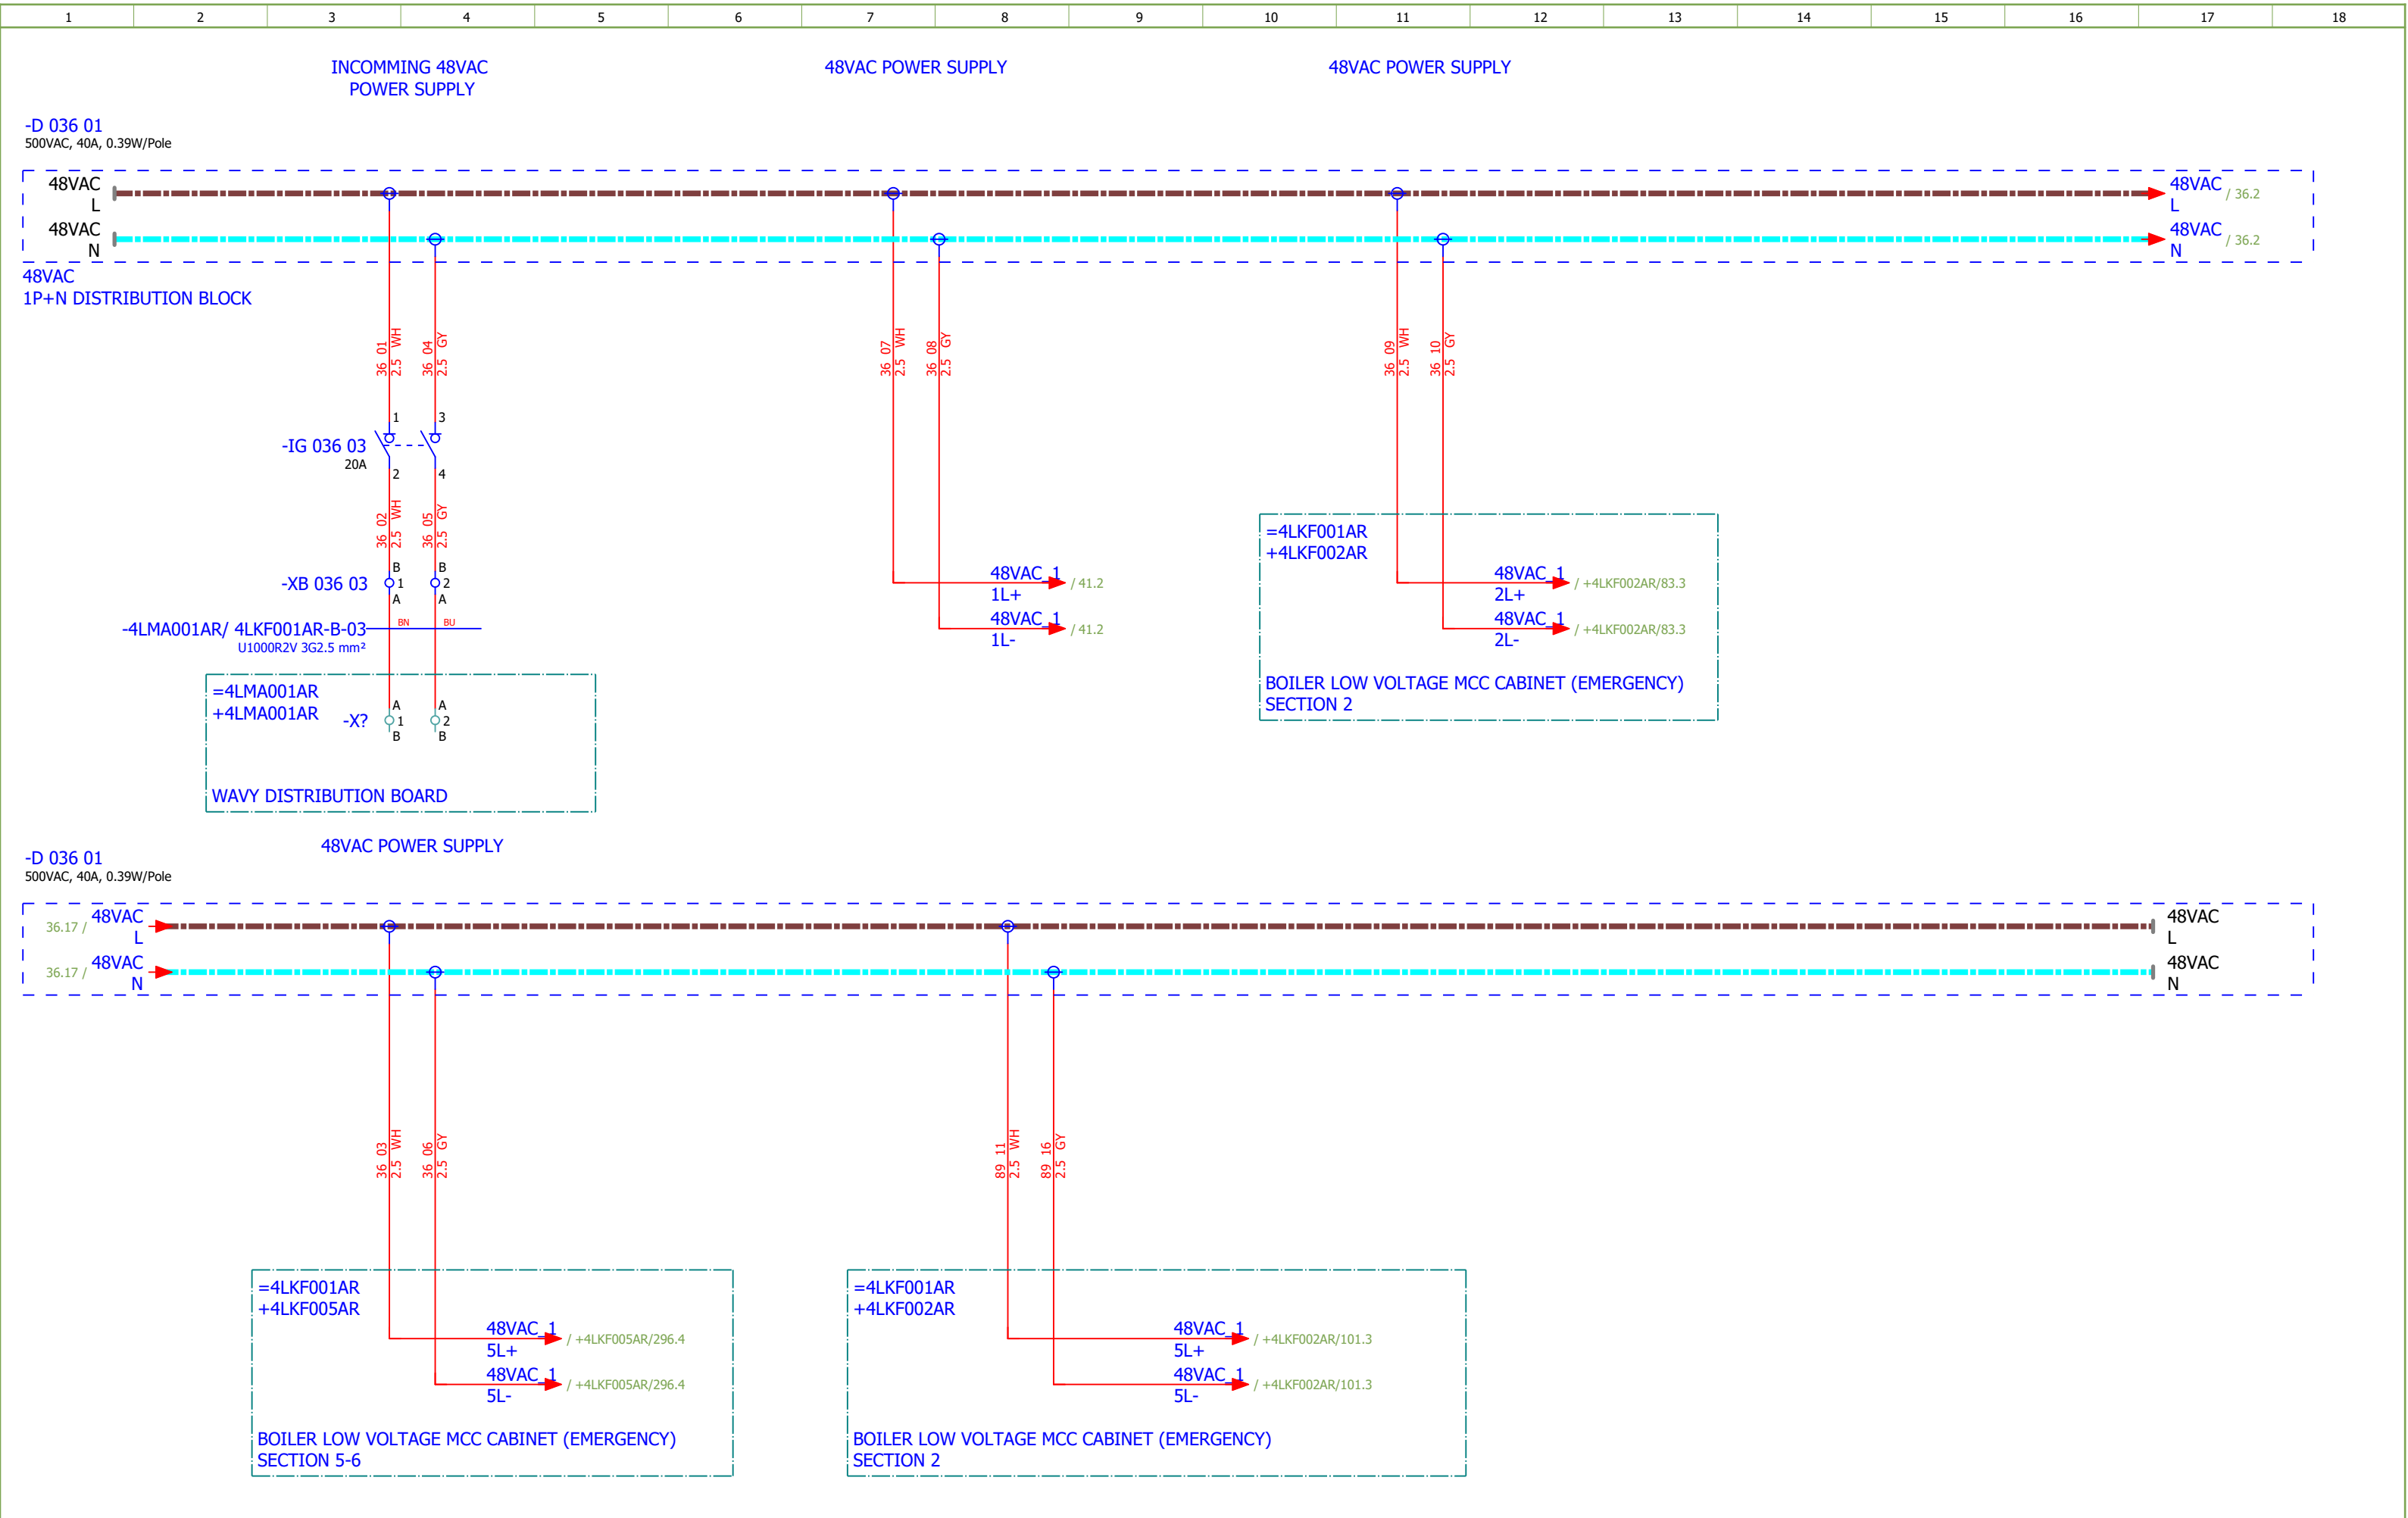


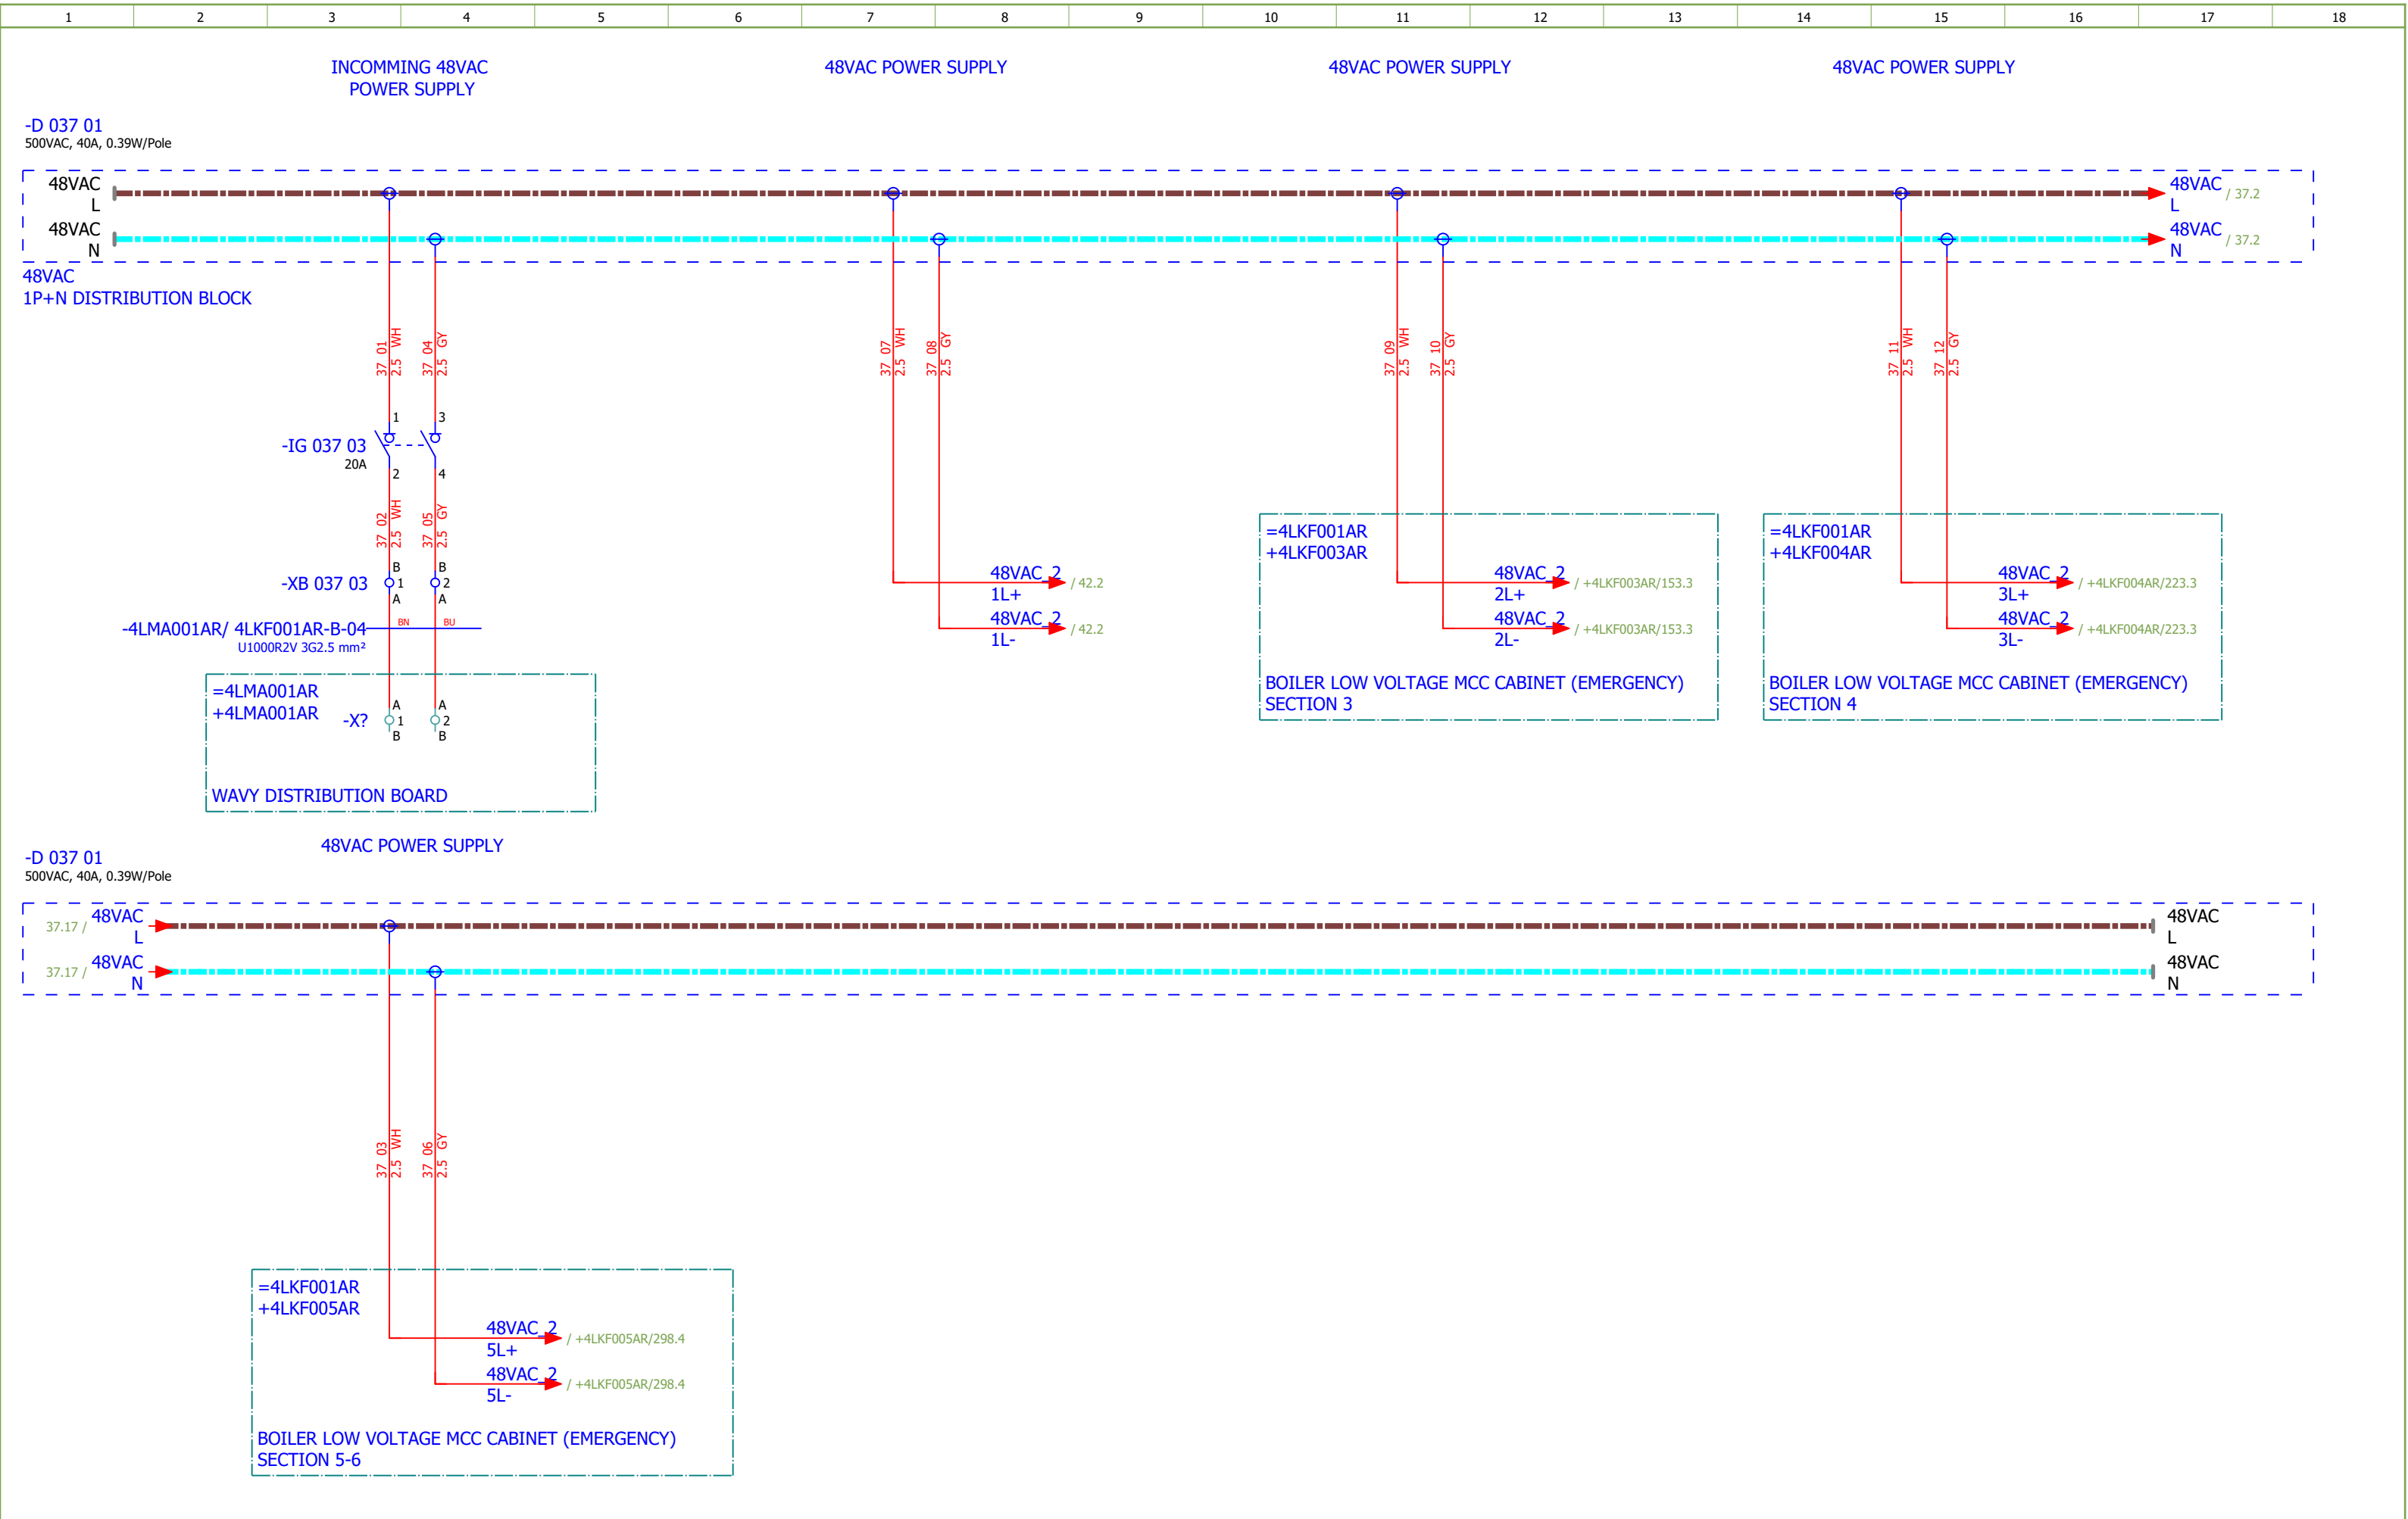


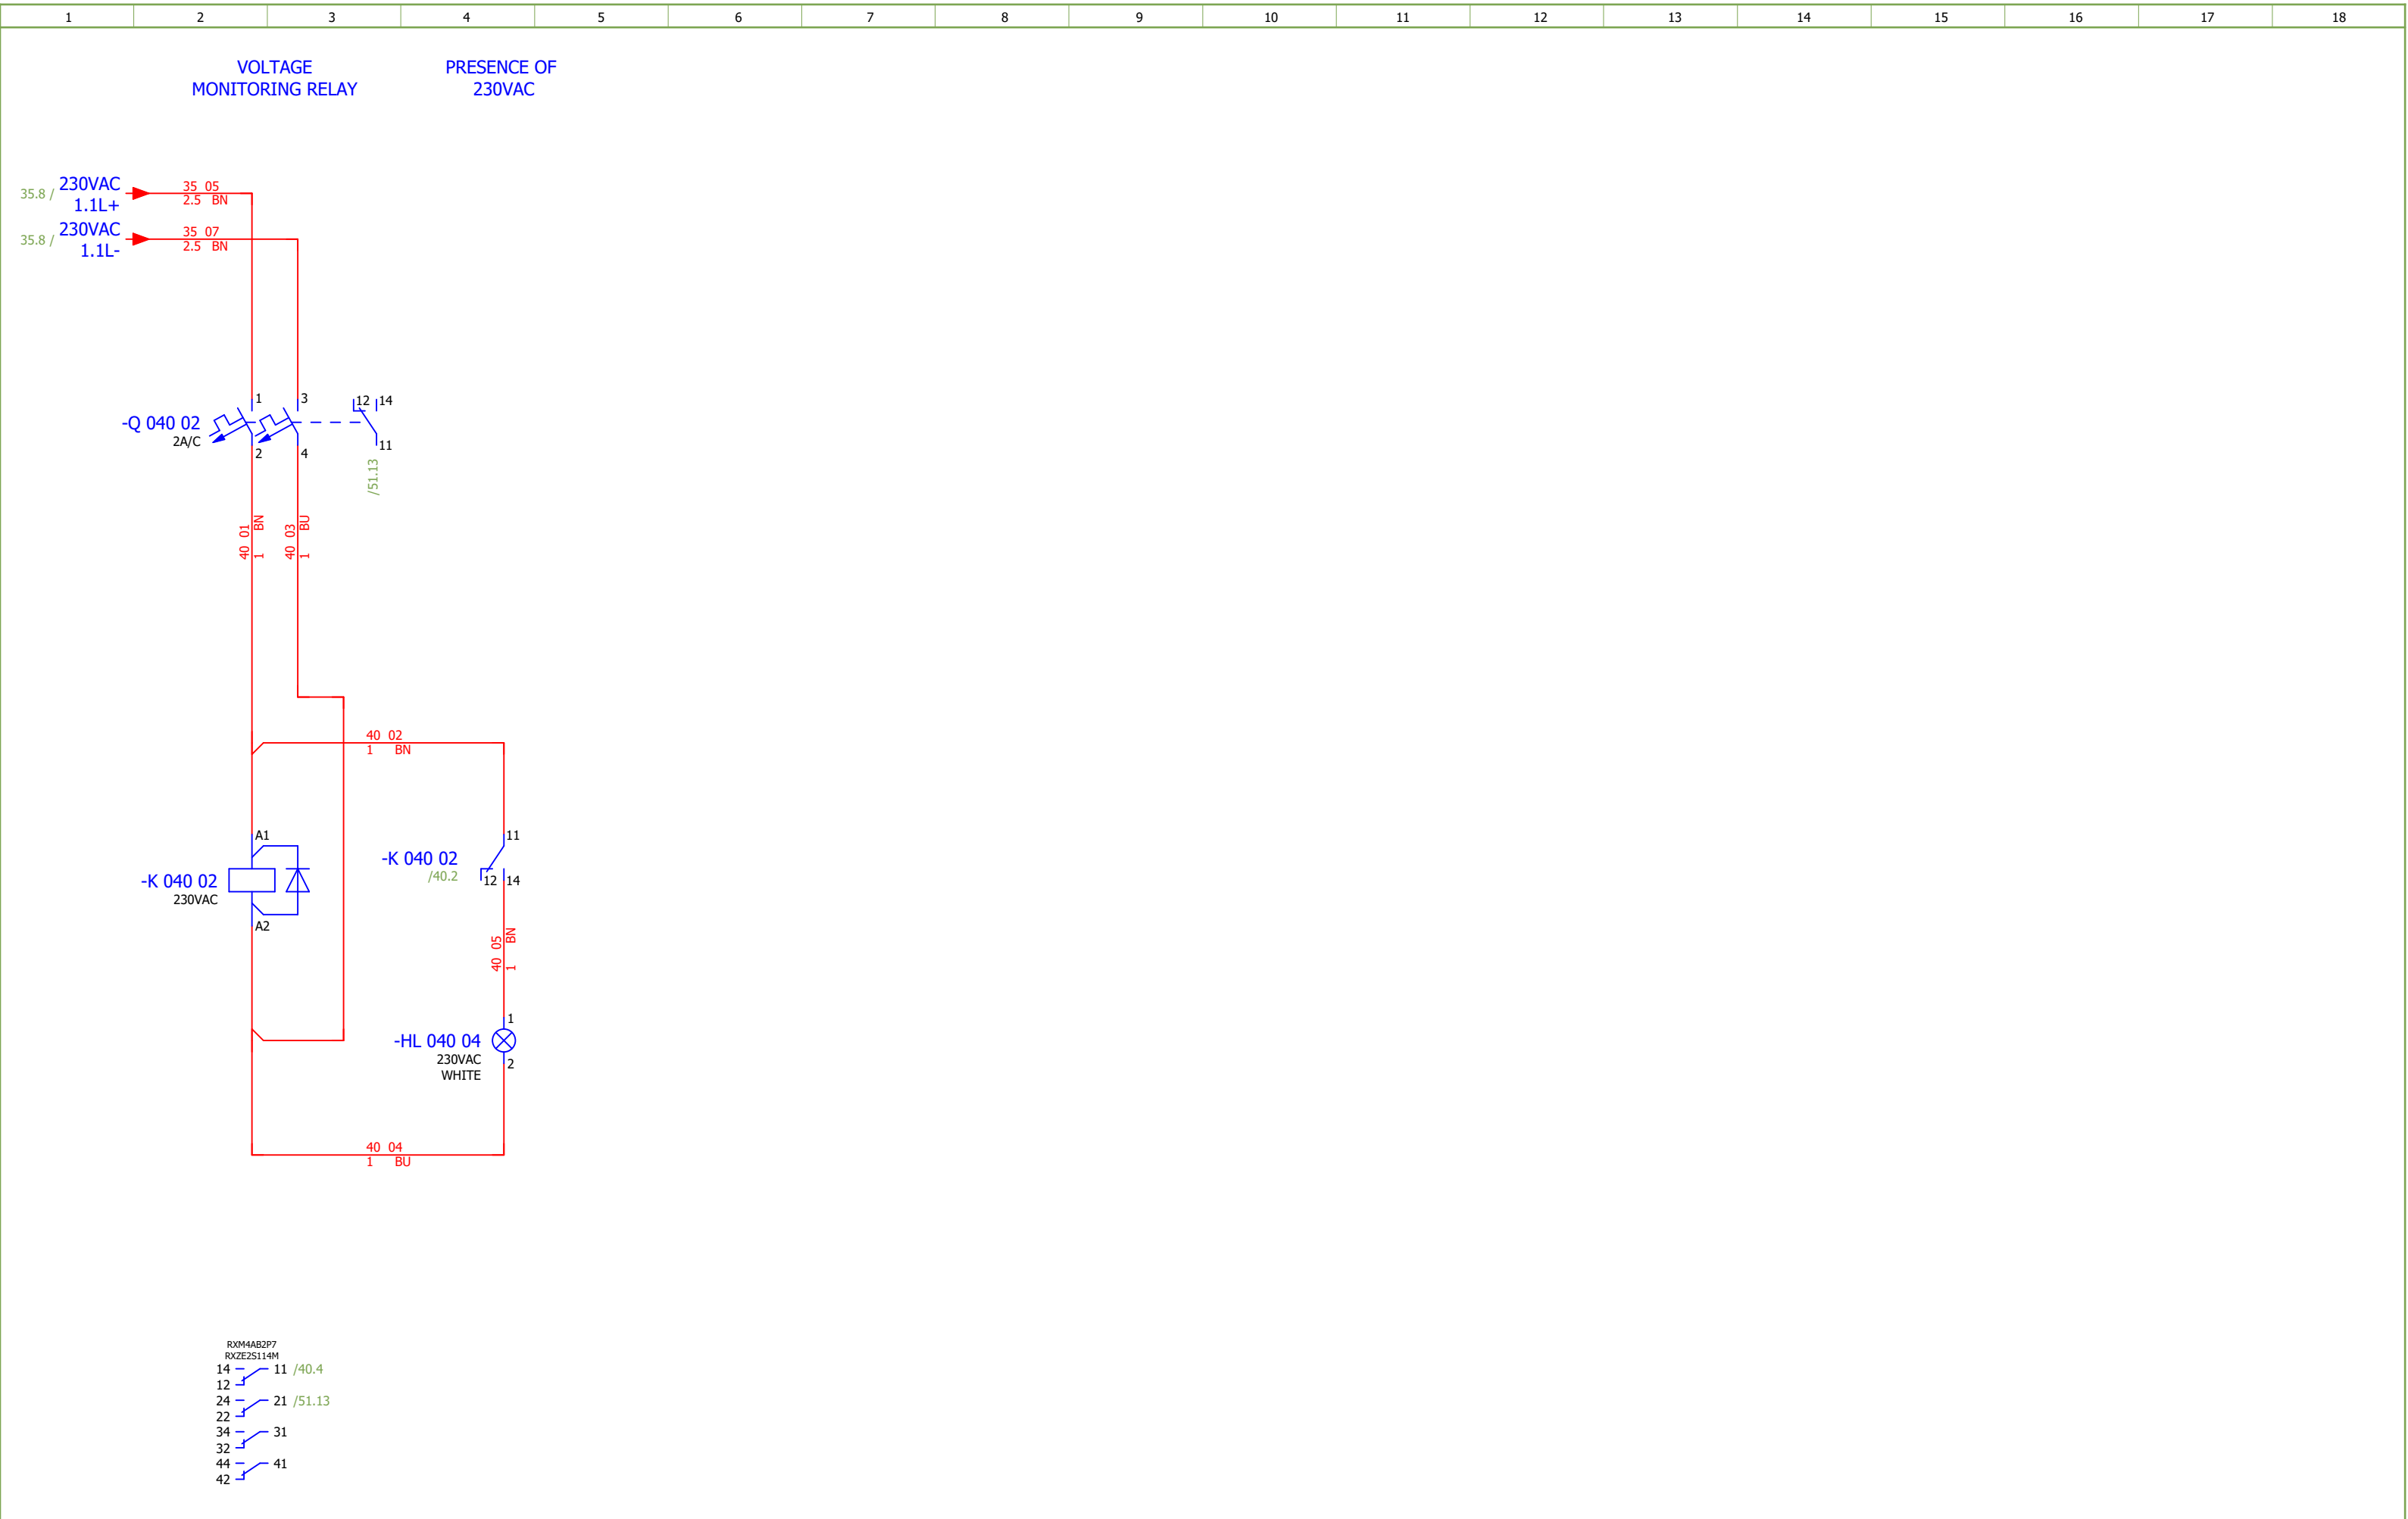


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 1		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	230VAC DISTRIBUTION		Drawing designation: BRC-4-ATEP0-1870-E					=4LKF001AR	Sheet:	40	
Approved:	Grga Kolić														+4LKF001AR	Next:	41
Format:	A3																

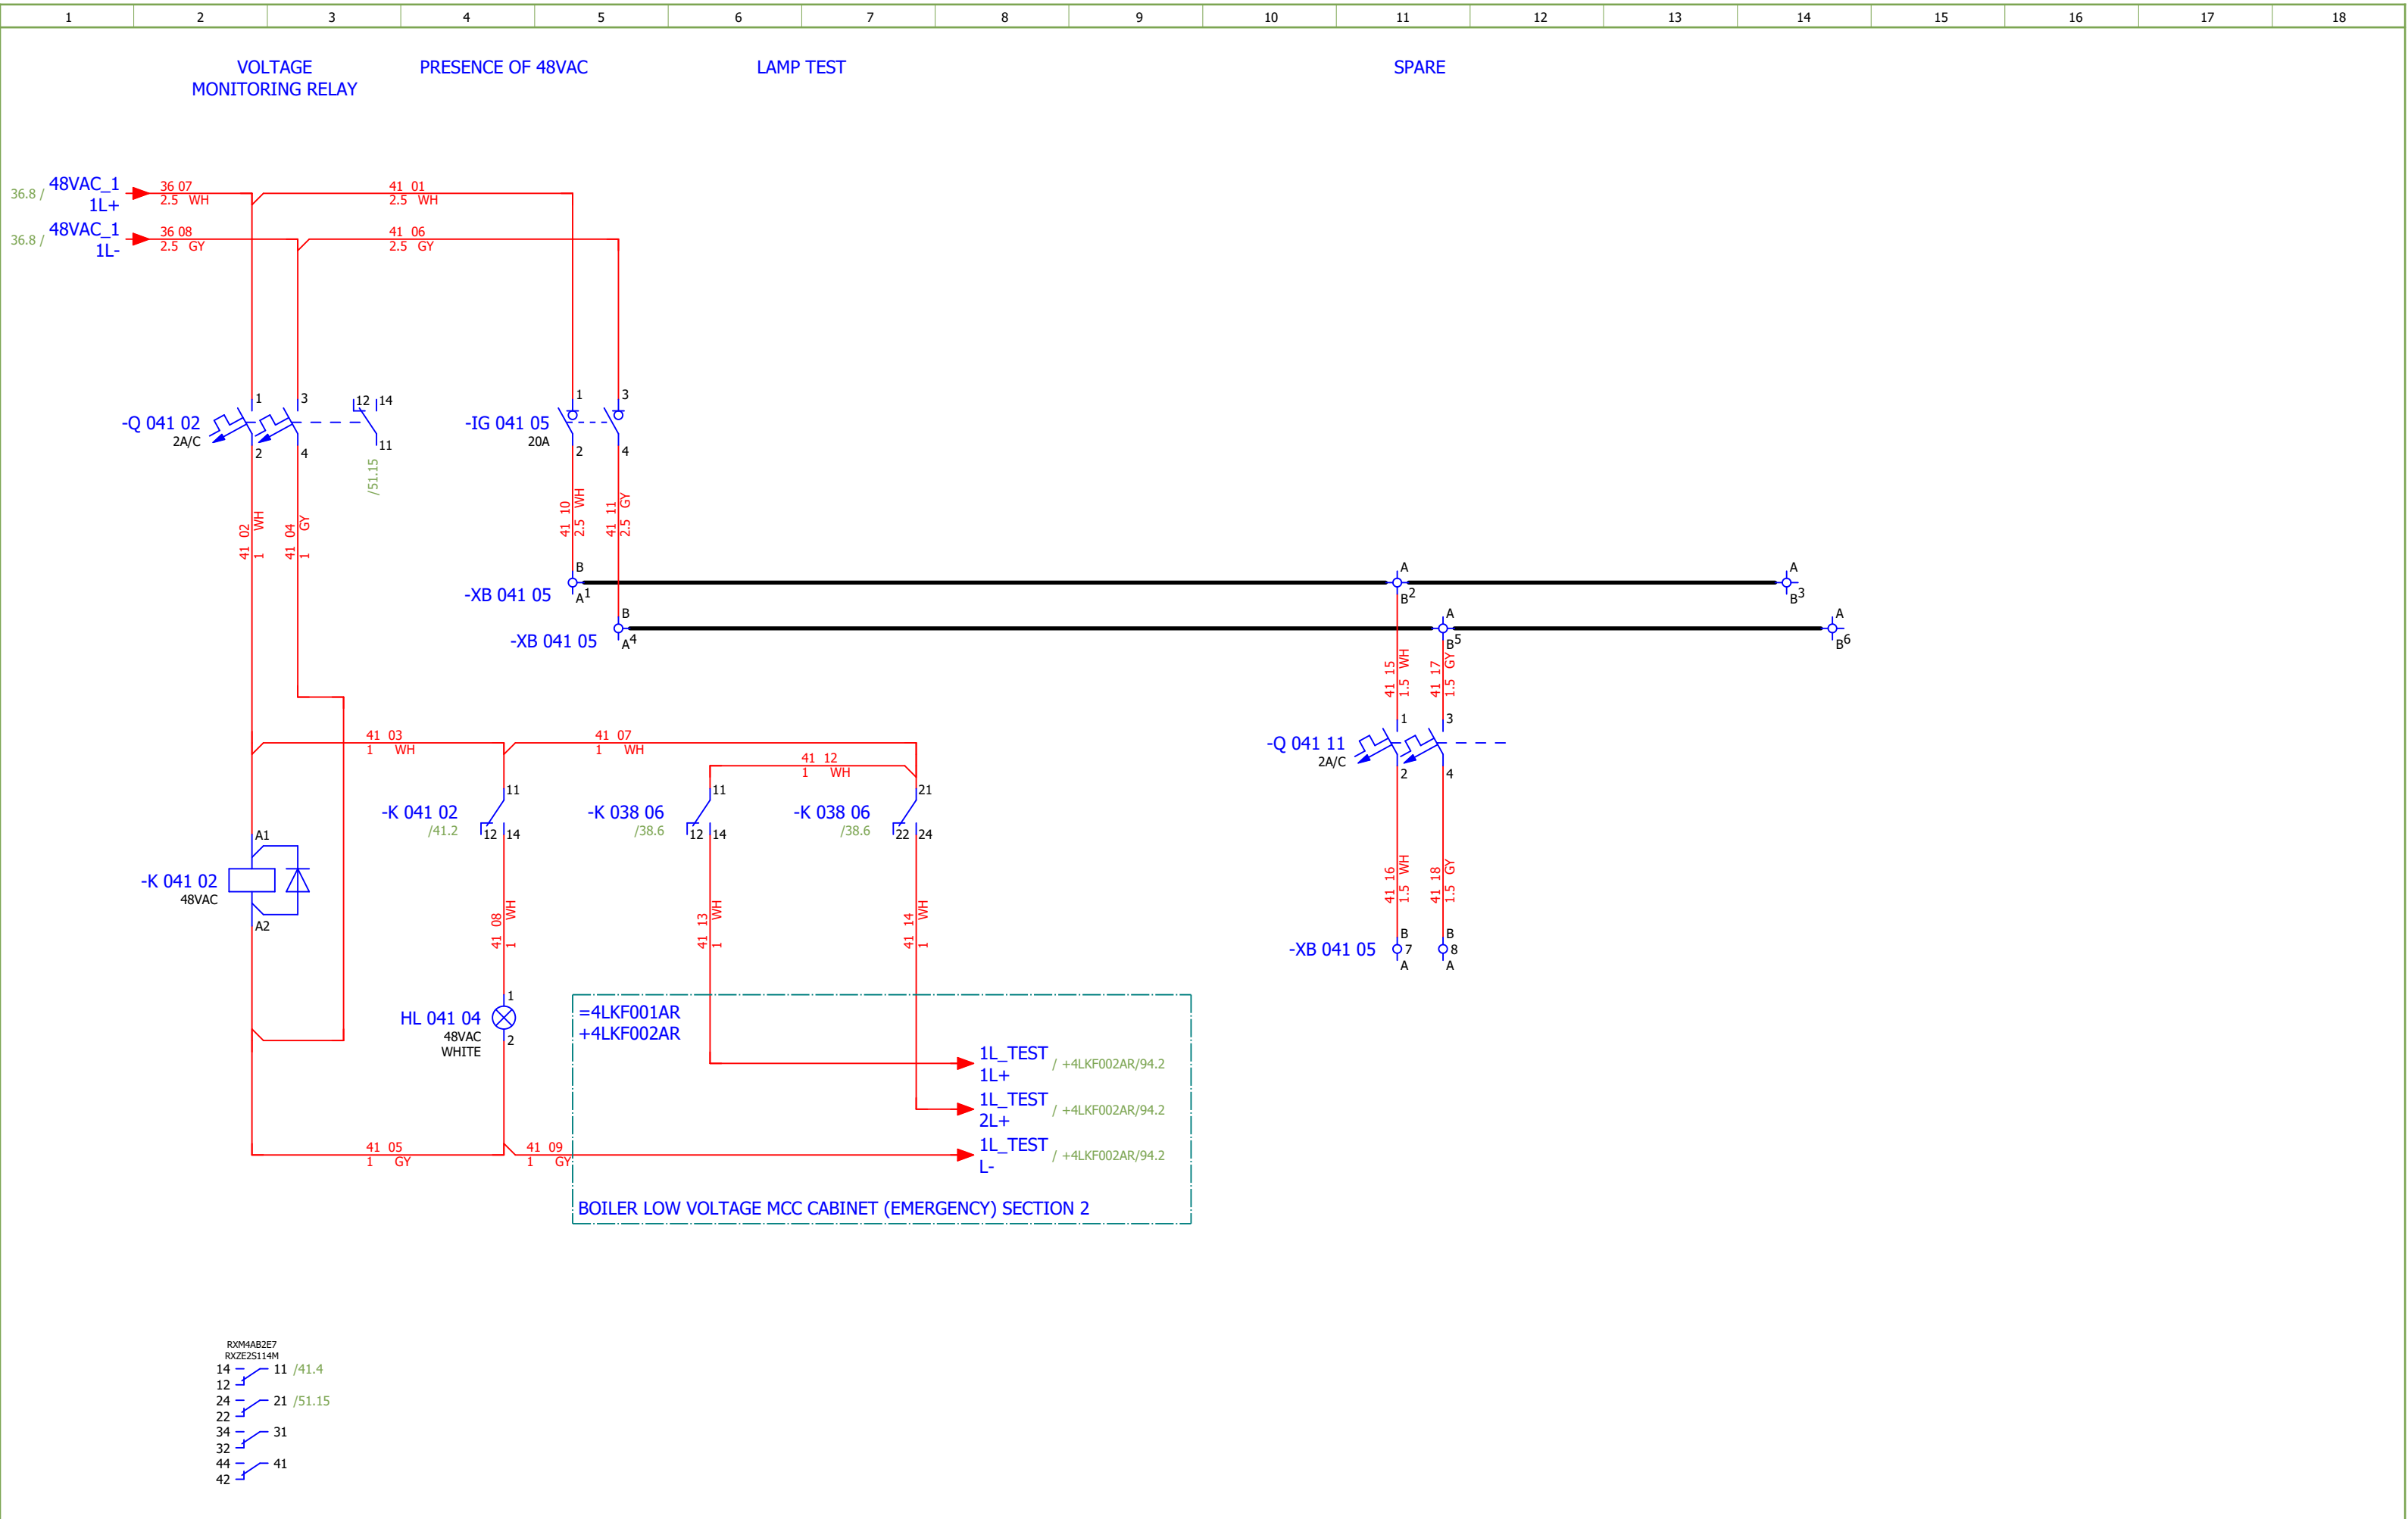

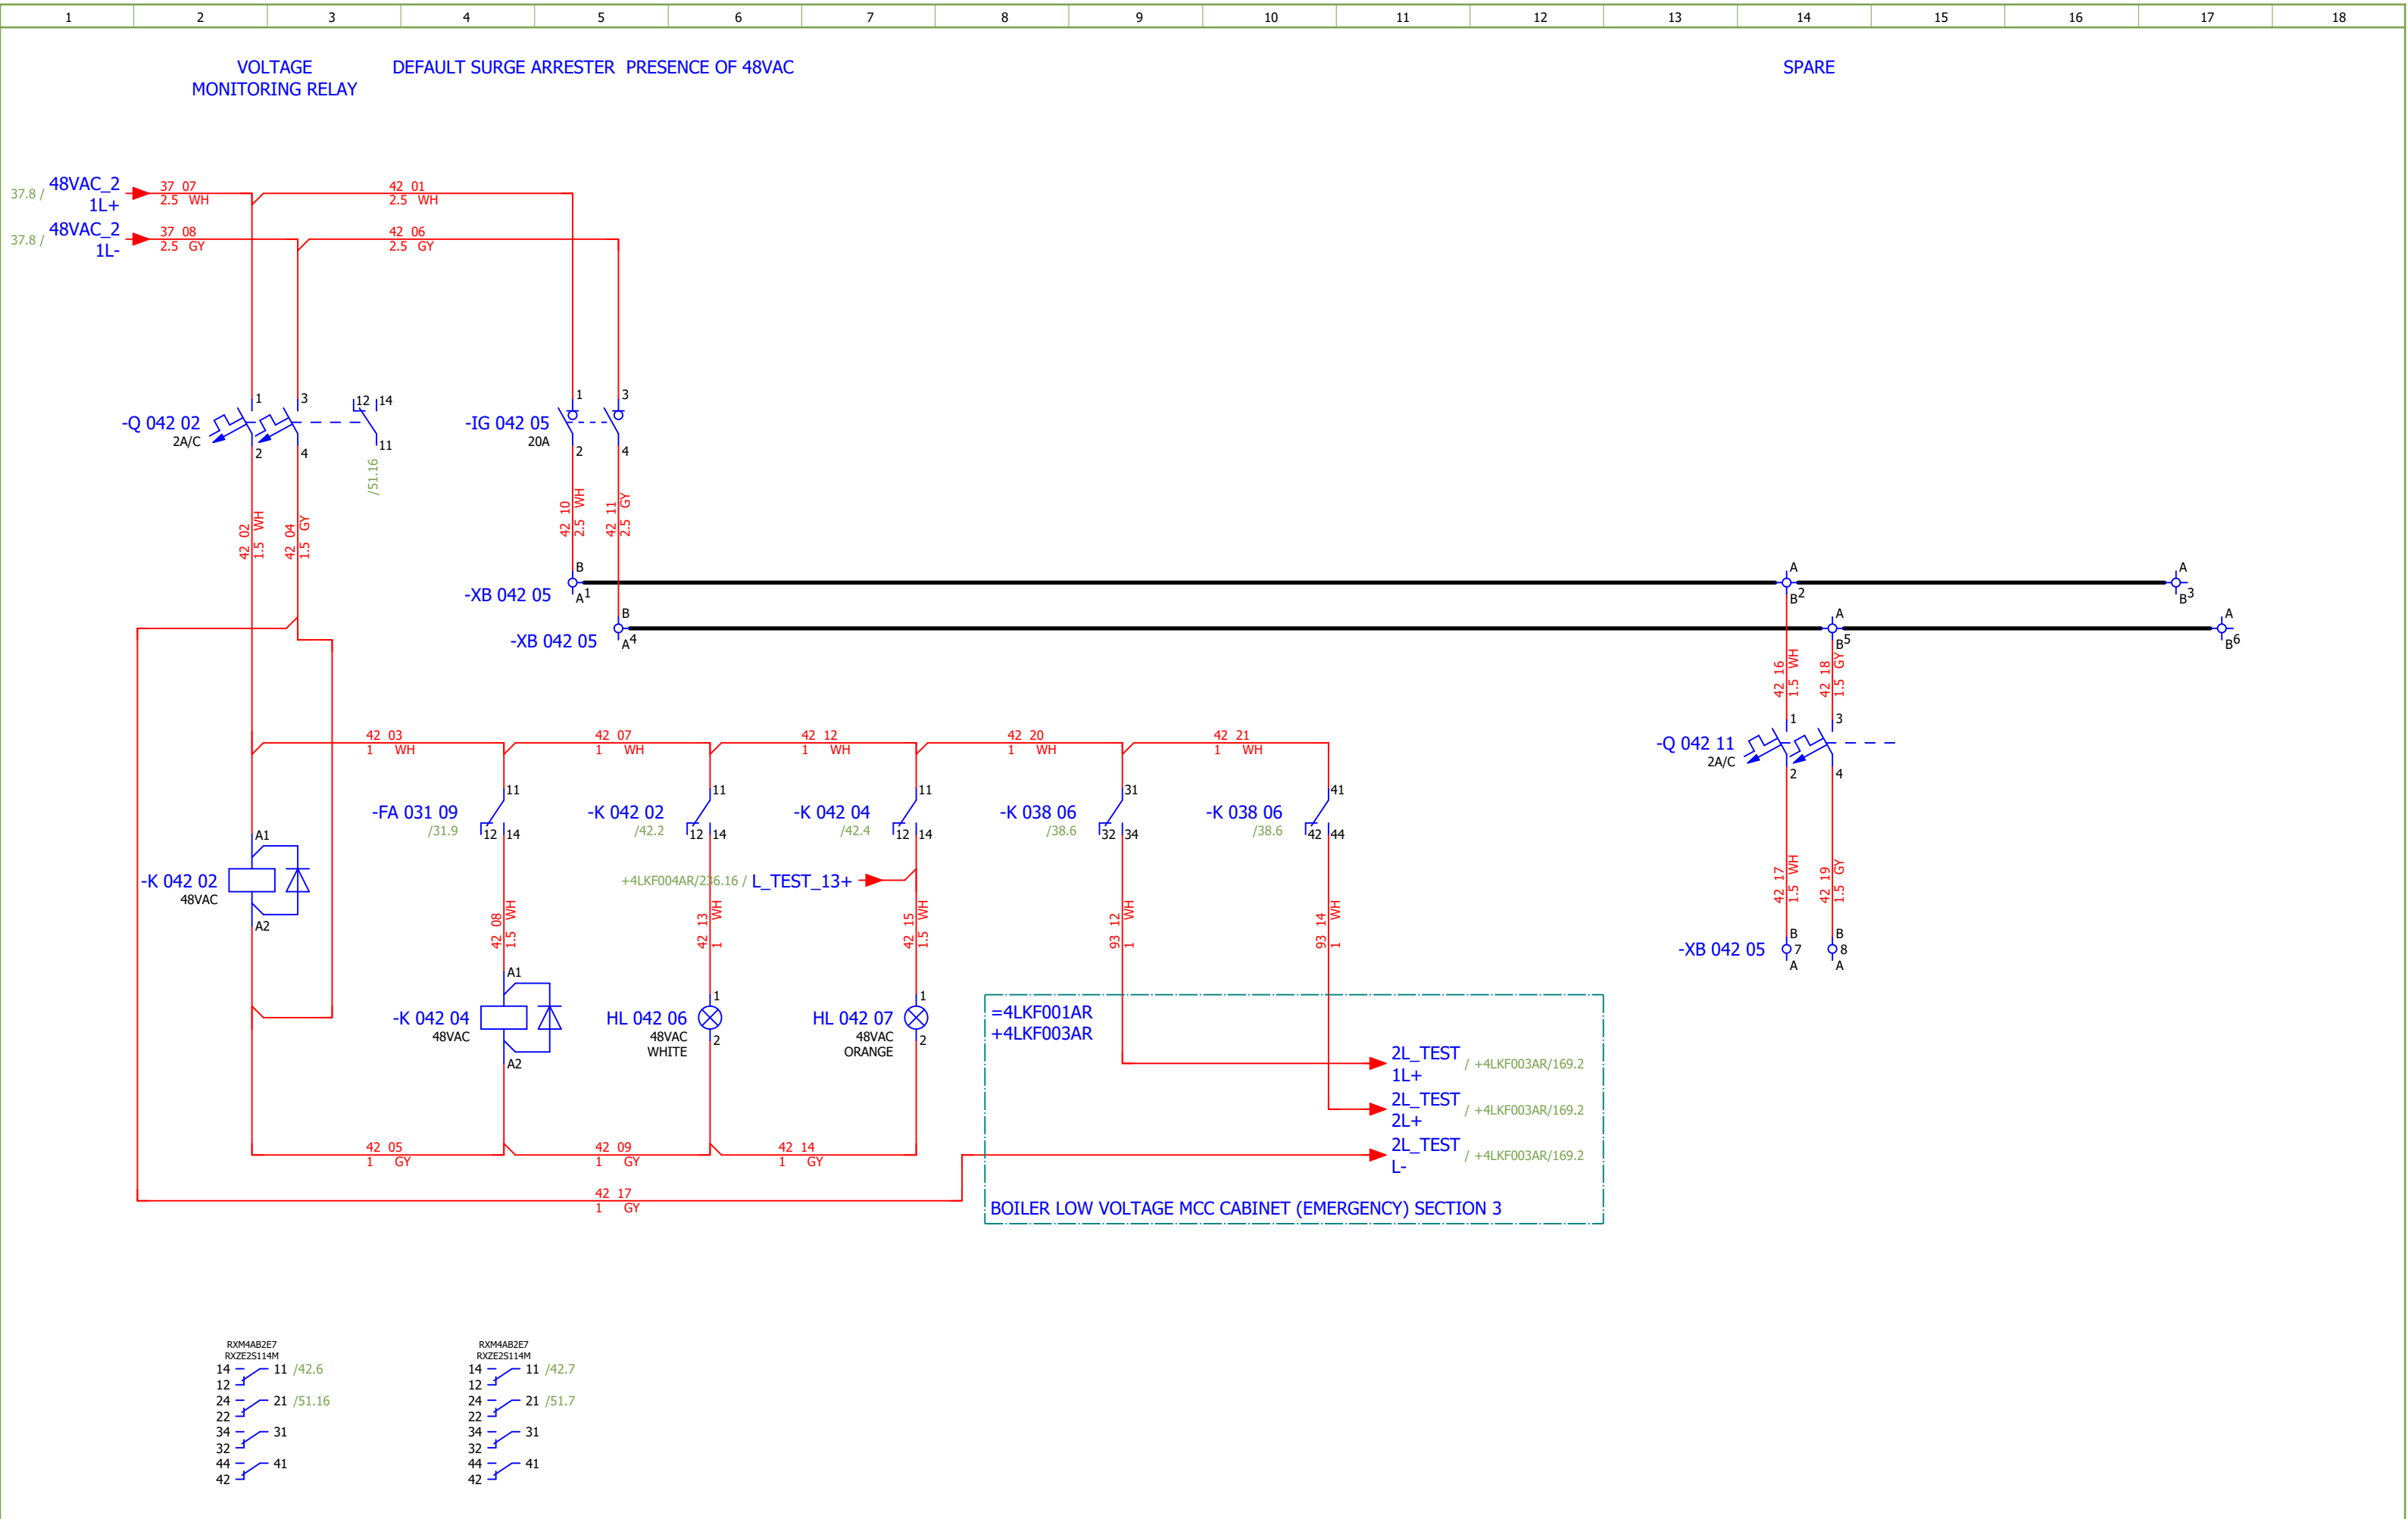

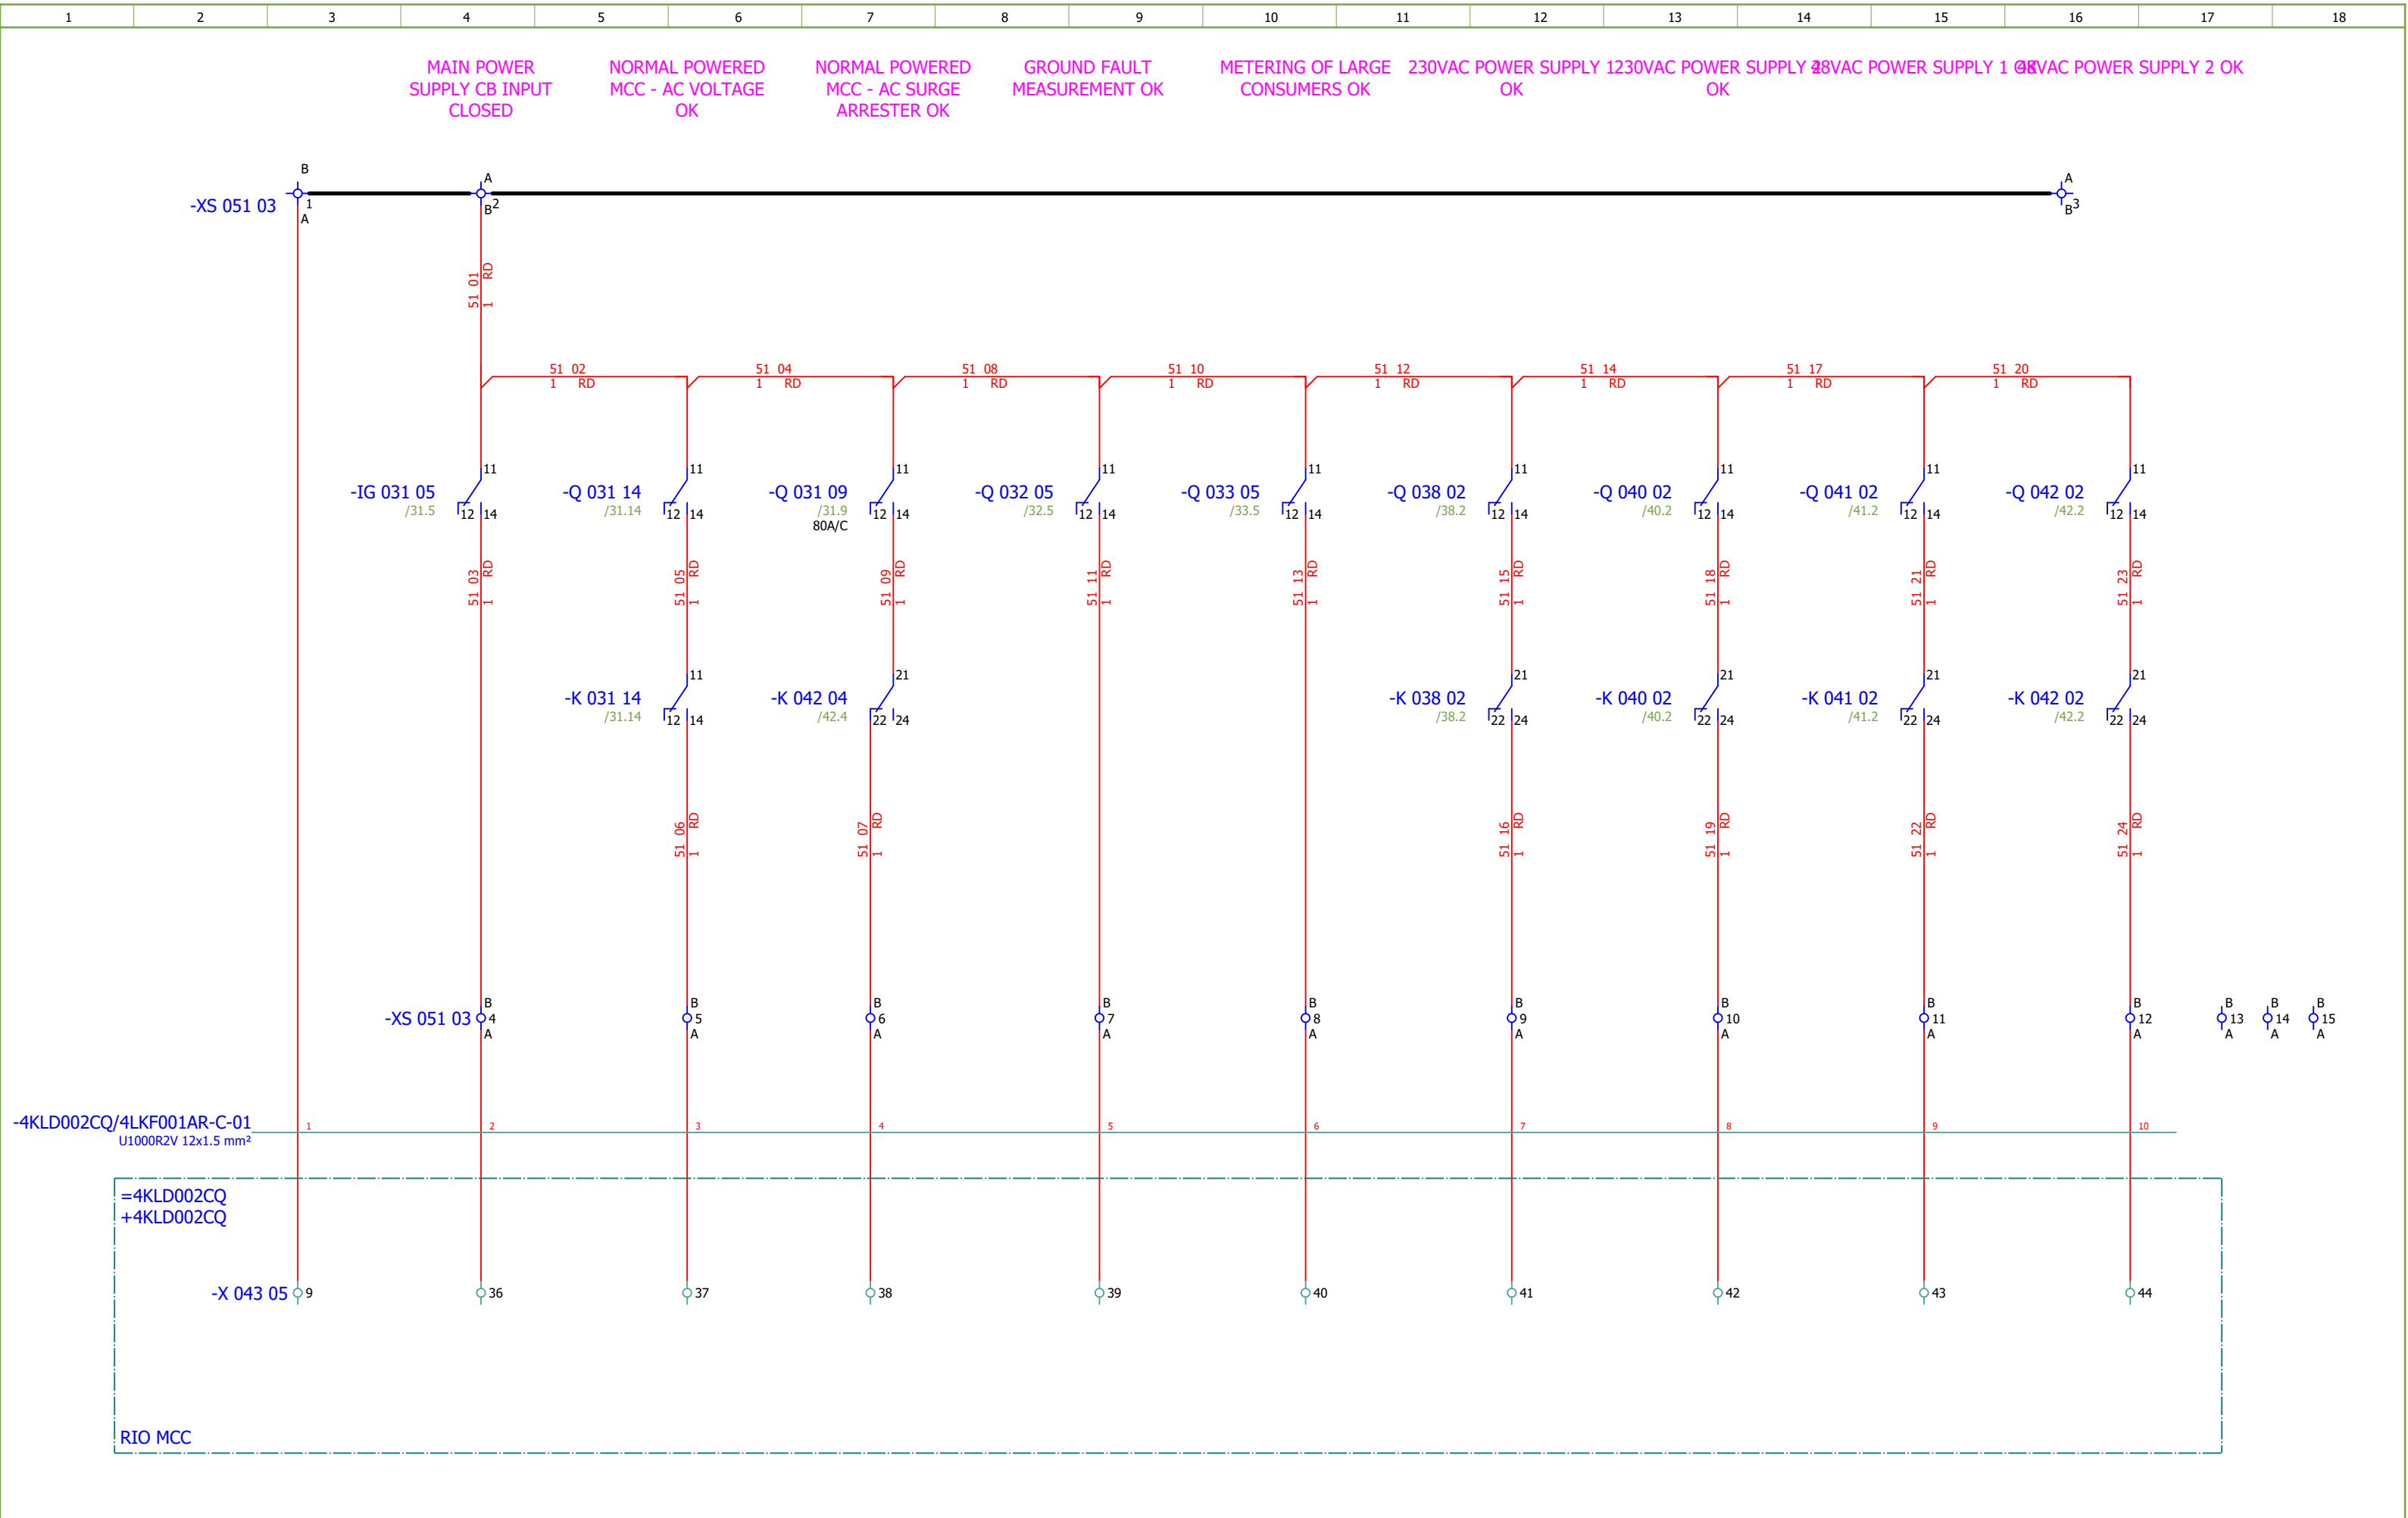

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	
-XS 055 02 																		
Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 1		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	#QB	
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	SPARE	Drawing designation:	BRC-4-ATEP0-1870-E								Sheet:	55
Approved:	Grga Kolić																Next:	60
Format:	A3																	


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
	Sorting number	Part number	Quantity	Manufacturer	Device	Device description	Device designation										
	1.	SOC.48290105	2	Socomec	DIRIS Digiware U-10 Voltage	Measurement characteristics Voltage measurement - DIRIS Digiware U Characteristics of the network measured 50-300 VAC (Ph/N) - 87-520 VAC (Ph/Ph) - CAT III Frequency range 45-65 Hz Frequency accuracy Class 0.02 Network type Single-phase/ Two-phase / Two-phase with neutral / Three-phase / Three-phase with neutral Measurement by voltage transformer Primary: 400 000 VAC Secondary: 60, 100, 110, 173, 190 VAC Input consumption ≤ 0,1 VA Permanent overload 300 VAC Ph/N Accuracy of voltage measurement Class 0.2 Connection Removable screw terminal block, 4 positions, stranded or solid 0.2-2.5 mm² cable. Communication characteristics:USB Protocol Modbus RTU on USB,Function Module configuration,Location On each module,Connection Type B micro USBconnector	-BA 032 04;-BA 033 04										
	2.	SOC.48290112	1	Socomec	Current module DIRIS Digiware I-60, 6 current inputs, Metering	Current module DIRIS Digiware I-60, 6 current inputs, Metering	-BC 033 09										
	3.	EFX.563720	4	Eriflex	BD Two Pole Distribution Block, 40 A	BD Two Pole Distribution Block, 40 A	-D 034 01;-D 035 01;-D 036 01;-D 037 01										
	4.	SE.A9L40321	1	Schneider Electric	IPRD40r	IPRD40r modular surge arrester - 3P - IT - 460V - with remote transfert	-FA 031 09										
	5.	SE.XB5EV57L4	1	Schneider Electric	3 phases voltage indicator pilot light with 3 white LED, 400 VAC	Pilot light 3 phases voltage, indicator with 3 LED, white, 400 V AC	-HL 031 16										
	6.	SE.XB4BVM1	2	Schneider Electric	White pilot light	Color: White 230VAC	-HL 038 04;-HL 040 04										
	7.	SE.ZBZ32	5	Schneider Electric	Harmony XB4	Legend holder, plastic	-HL 038 04;-HL 040 04;-HL 041 04;-HL 042 06;-HL 04 2 07										
	8.	SE.ZB4BVBG1	3	Schneider Electric	white light block with body/fixing collar integral LED 24...120VAC/DC	white light block with body/fixing collar integral LED 24...120VAC/DC	-HL 041 04;-HL 042 06;-HL 042 07										
	9.	SE.ZB4BV013	2	Schneider Electric	white pilot light head Ø22 plain lens for integral LED	Head for pilot light, Harmony XB4, metal, white, 22mm, universal LED, plain lens	-HL 041 04;-HL 042 06										
	10.	SE.ZB4BV053	1	Schneider Electric	Orange pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC	-HL 042 07										
	11.	SE.31110	1	Schneider Electric	Switch-disconnector Compact INS400 - 3 poles - 400A	Head for pilot light: Orange Switch-disconnector Compact INS400 - 3 poles - 400A, Black handle	-IG 031 05										
	12.	SE.29450	1	Schneider Electric	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV	-IG 031 05										
	13.	SE.LV432594	2	Schneider Electric	Long terminal shield - 4 poles - <= 630A	Long terminal shield - 4 poles - <= 630A	-IG 031 05										
	14.	SE.A9S60220	7	Schneider Electric	Control switch iSW, 2P, 20A	switch Acti9 iSW - 2 poles - 20 A - 415V	-IG 034 03;-IG 035 03;-IG 036 03;-IG 037 03;-IG 038 05;-IG 041 05;-IG 042 05										
	15.	SE.RM17TU00	1	Schneider Electric	RM17-TU	multifunction control relay RM17-TU - range 183..528 V AC	-K 031 14										
	16.	SE.RXM4AB2P7	3	Schneider Electric	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED	-K 038 02;-K 038 06;-K 040 02										
	17.	SE.RXZE2S114M	6	Schneider Electric	Socket, Harmony Electromechanical Relays, for RXM2 RXM4 relays	For RXM2/RXM4 relays Screw connectors Separate contact	-K 038 02;-K 038 06;-K 040 02;-K 041 02;-K 042 02;-K 042 04										
	18.	SE.RXM041FU7	3	Schneider Electric	Protection diode	RC circuit 110...240 V a.c.	-K 038 02;-K 038 06;-K 040 02										
	19.	SE.RXM4AB2E7	3	Schneider Electric	Miniature Plug-in relay - Zelio RXM 4 C/O 48 V AC 6 A with LED	Miniature Plug-in relay - Zelio RXM 4 C/O 48 V AC 6 A with LED	-K 041 02;-K 042 02;-K 042 04										
	20.	SE.RXM041BN7	1	Schneider Electric	Protection diode	RC circuit - 24..60 V AC - for RPZ/RXZ sockets	-K 041 02										
	21.	SE.RXM021BN	2	Schneider Electric	Varistor - 24..60 V AC/DC - for RPZ/RXZ sockets	Varistor - 24..60 V AC/DC - for RPZ/RXZ sockets	-K 042 02;-K 042 04										

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 1	Project:	BRC-4	Unit & Issuer:		Number:		Revision:	E		
Drawn:	Luka Božičević																#Z
Approved:	Grga Kolić				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:		Drawing designation:						=4LKF001AR	Sheet:	61
Format:	A3						Summarized parts list				BRC-4-ATEP0-1870-E				+4LKF001AR	Next:	62


Date:				Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 1	Project:	BRC-4	Unit & Issuer:		Number:		Revision:	
Drawn:	Luka Božičević														#Z
Approved:	Grga Kolić														
Format:	A3				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	Summarized parts list	Drawing designation:					=4LKF001AR	Sheet:
													+4LKF001AR	Next:	63

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
	Sorting number	Part number	Quantity	Manufacturer	Device	Device description							Device designation				
	22.	SOC.48290101	1	Socomec	ISOM DIGIWARE C-31 INTERFACE	Supply voltage DC [V] - 24..24 Voltage type (supply voltage) - DC Colour display - No Degree of protection (IP) - IP65 Operating temperature [°C] - 10..55 Rail mounting possible - Yes Wall mounting/direct mounting - Yes							-P 038 10				
	23.	SOC.48290204	1	Socomec	Multi-point remote display DIRIS Digiware D-50 RS485 & Ethernet	Multi-point remote display DIRIS Digiware D-50 RS485 & Ethernet							-P 038 14				
	24.	SE.18728	1	Schneider Electric	NG125 - circuit breaker - 3P - 40A - B curve - 36kA	NG125 - circuit breaker - NG125H - 3P - 40A - C curve - 36kA 36 kA Icu at 380...415 V AC 50/60 Hz conforming to EN/IEC 60947-2							-Q 031 09				
	25.	SE.19072	1	Schneider Electric	Auxiliary contact - 1 OC + 1 SD - 6 A - 220..240 V - for NG125	Auxiliary OC and fault contact, Acti9 NG125, 1 OC + 1 SD, 220VAC to 240VAC (max 6A), 415VAC (max 3A)							-Q 031 09				
	26.	SE.A9F74302	3	Schneider Electric	3-pole MCB	Nominal current: 2A Tripping curve: C Breaking capacity: 10kA							-Q 031 14;-Q 032 05;-Q 033 05				
	27.	SE.A9A26924	9	Schneider Electric	Auxiliary contact iOF, iC60	Auxiliary contact, Acti9, iOF, 1 OC, AC/DC							-Q 031 14;-Q 032 05;-Q 033 05;-Q 038 02;-Q 040 02;-Q 041 02;-Q 042 02;-Q 101 04;-Q 104 04				
	28.	SE.A9F74202	11	Schneider Electric	2-pole MCB, 2A/C	Nominal current: 2 A Tripping curve: C							-Q 038 02;-Q 038 11;-Q 038 15;-Q 039 04;-Q 040 02;-Q 041 02;-Q 041 11;-Q 042 02;-Q 042 11;-Q 101 04;-Q 104 04				
	29.	SE.XPSBAC34AP	5	Schneider Electric	Safety module	Harmony Safety Automation Estop or guard ,Harmony XPS, connected to supply terminals 48-240 V AC/DC , no inputs, screw							-RP 101 04;-RP 102 04;-RP 103 04;-RP 104 04;-RP 105 04				
	30.	SE.XB4BA21	1	Schneider Electric	Black flush complete pushbutton Ø22 spring return 1NO "unmarked"	Black flush complete pushbutton Ø22 spring return 1NO							-S 038 06				
	31.	SOC.47290603	2	Socomec	P30 AUX 24 VDC 30W	Power supply P30 100-240VAC / 24 VDC 30W for Digiware system							-TB 038 11;-TB 038 14				
	32.	SOC.48290573	3	Socomec	TF-40 / 100-400A sensor rogowski RJ12	Feed-through terminal block, nom. voltage: 800 V loop diameter: 40mm - Loop length: 126mm nominal current: 24 A							-TCU 033 10;-TCV 033 11;-TCW 033 11				
	33.	PXC.3209510	100	Phoenix Contact	PT 2,5 Feed-through terminal block	number of connections: 2 number of positions: 1 connection method: Push-in connection Rated cross section: 2.5 mm2 cross section: 0.14 mm2 - 4 mm2 mounting type: NS 35/7,5, NS 35/15 color: gray							-X 038 10;-X 101 04;-X 103 11;-X 104 04;-XA 034 03;-XA 035 03;-XA 038 05;-XB 036 03;-XB 037 03;-XB 041 05;-XB 042 05;-XS 051 03;-XS 055 02				


Terminal diagram

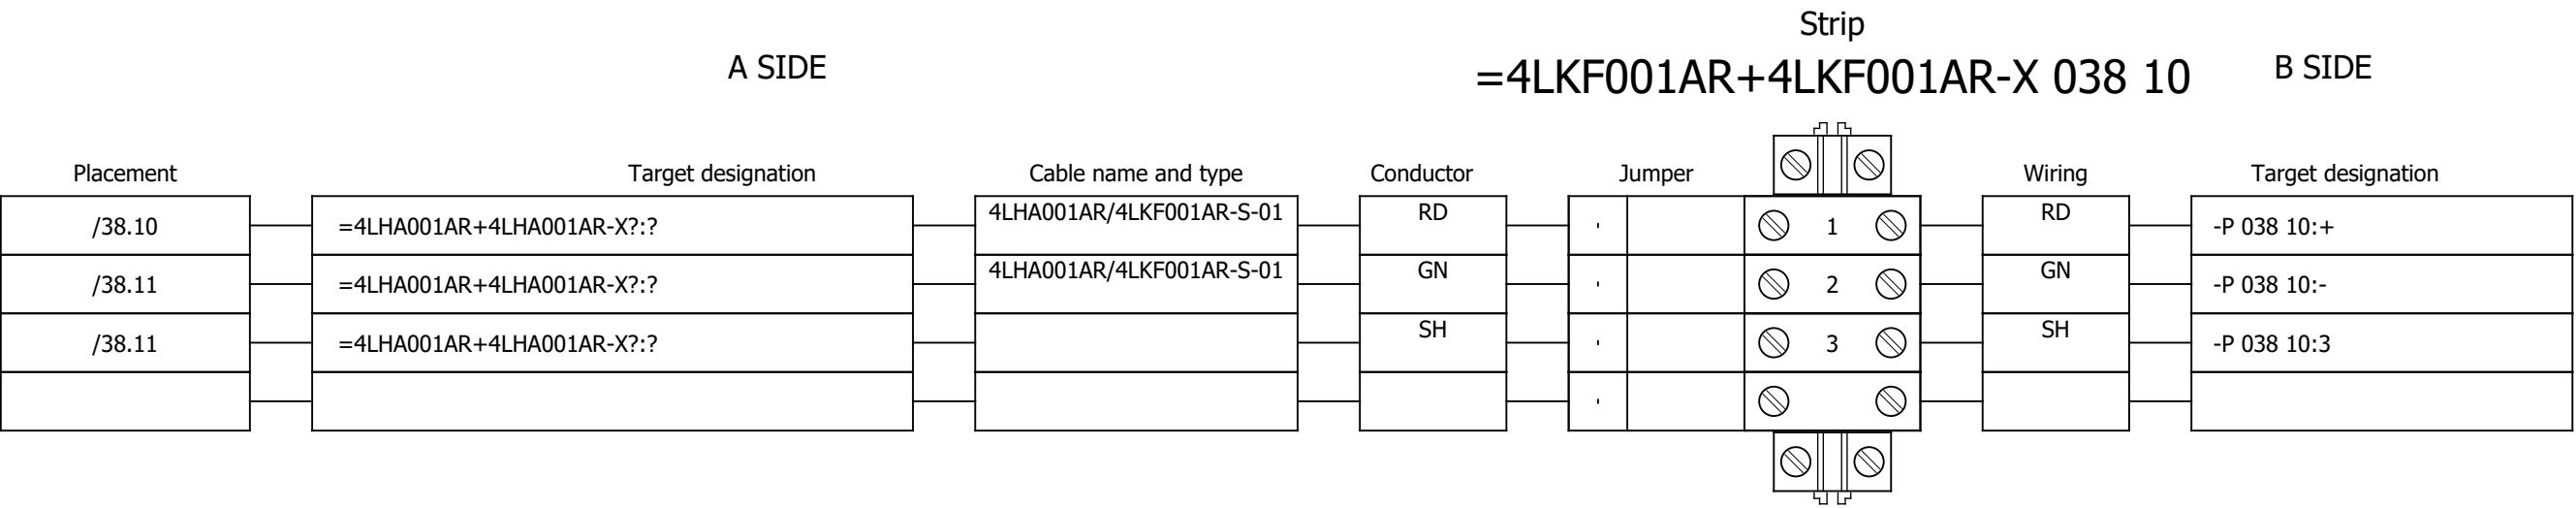


Terminal diagram

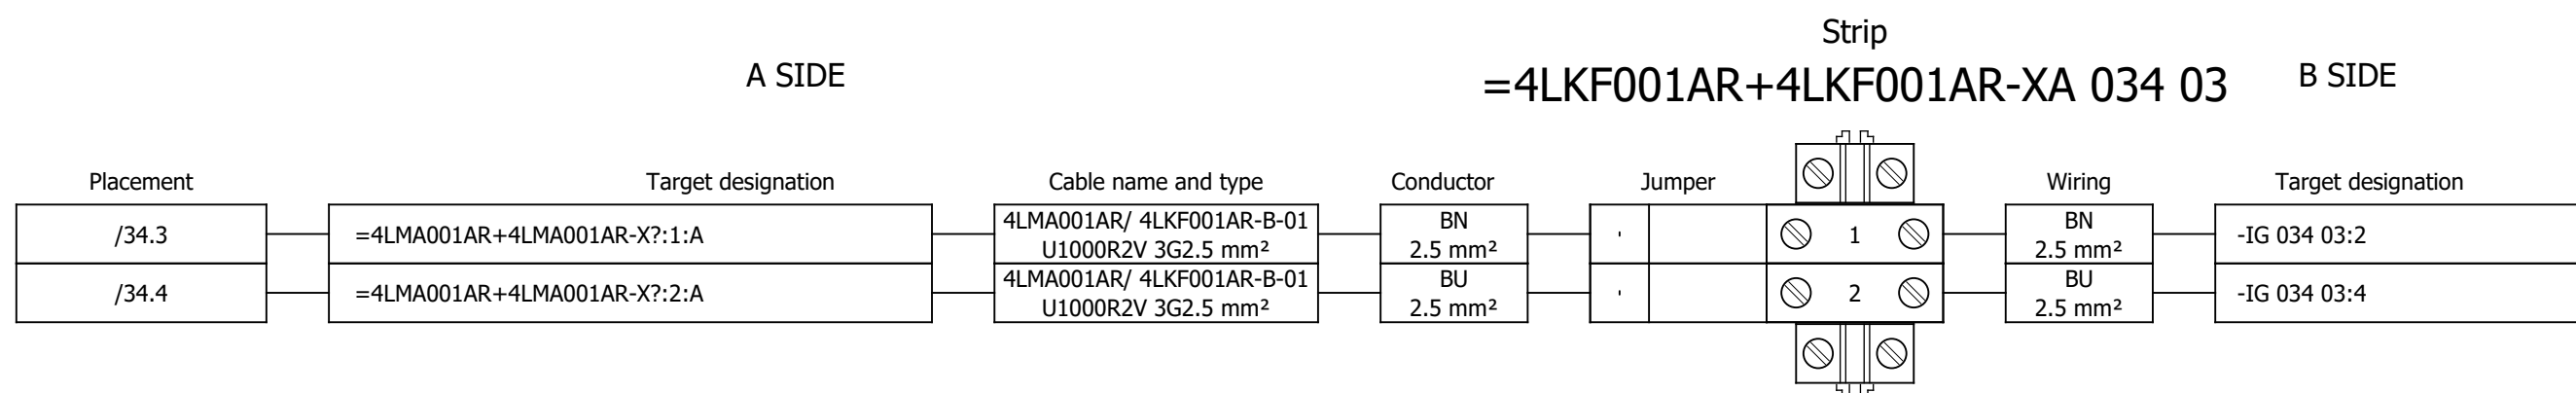


Terminal diagram

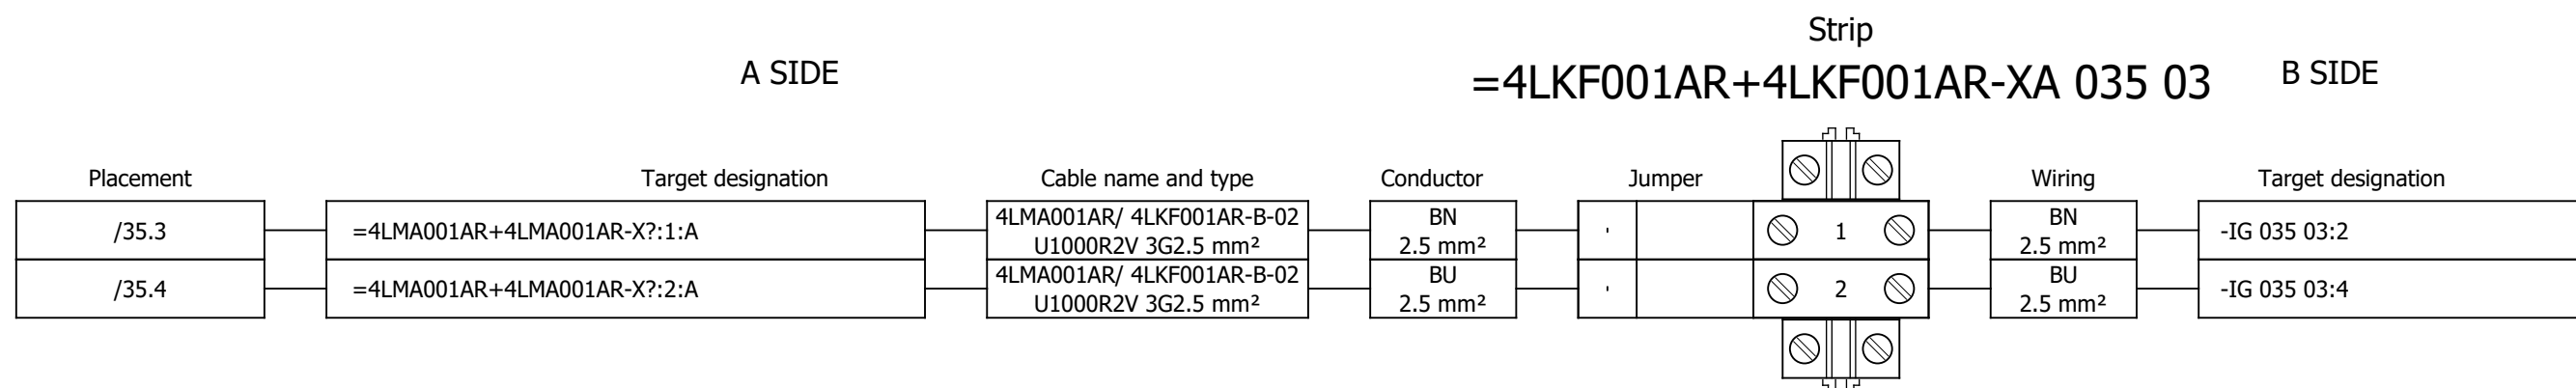


Terminal diagram

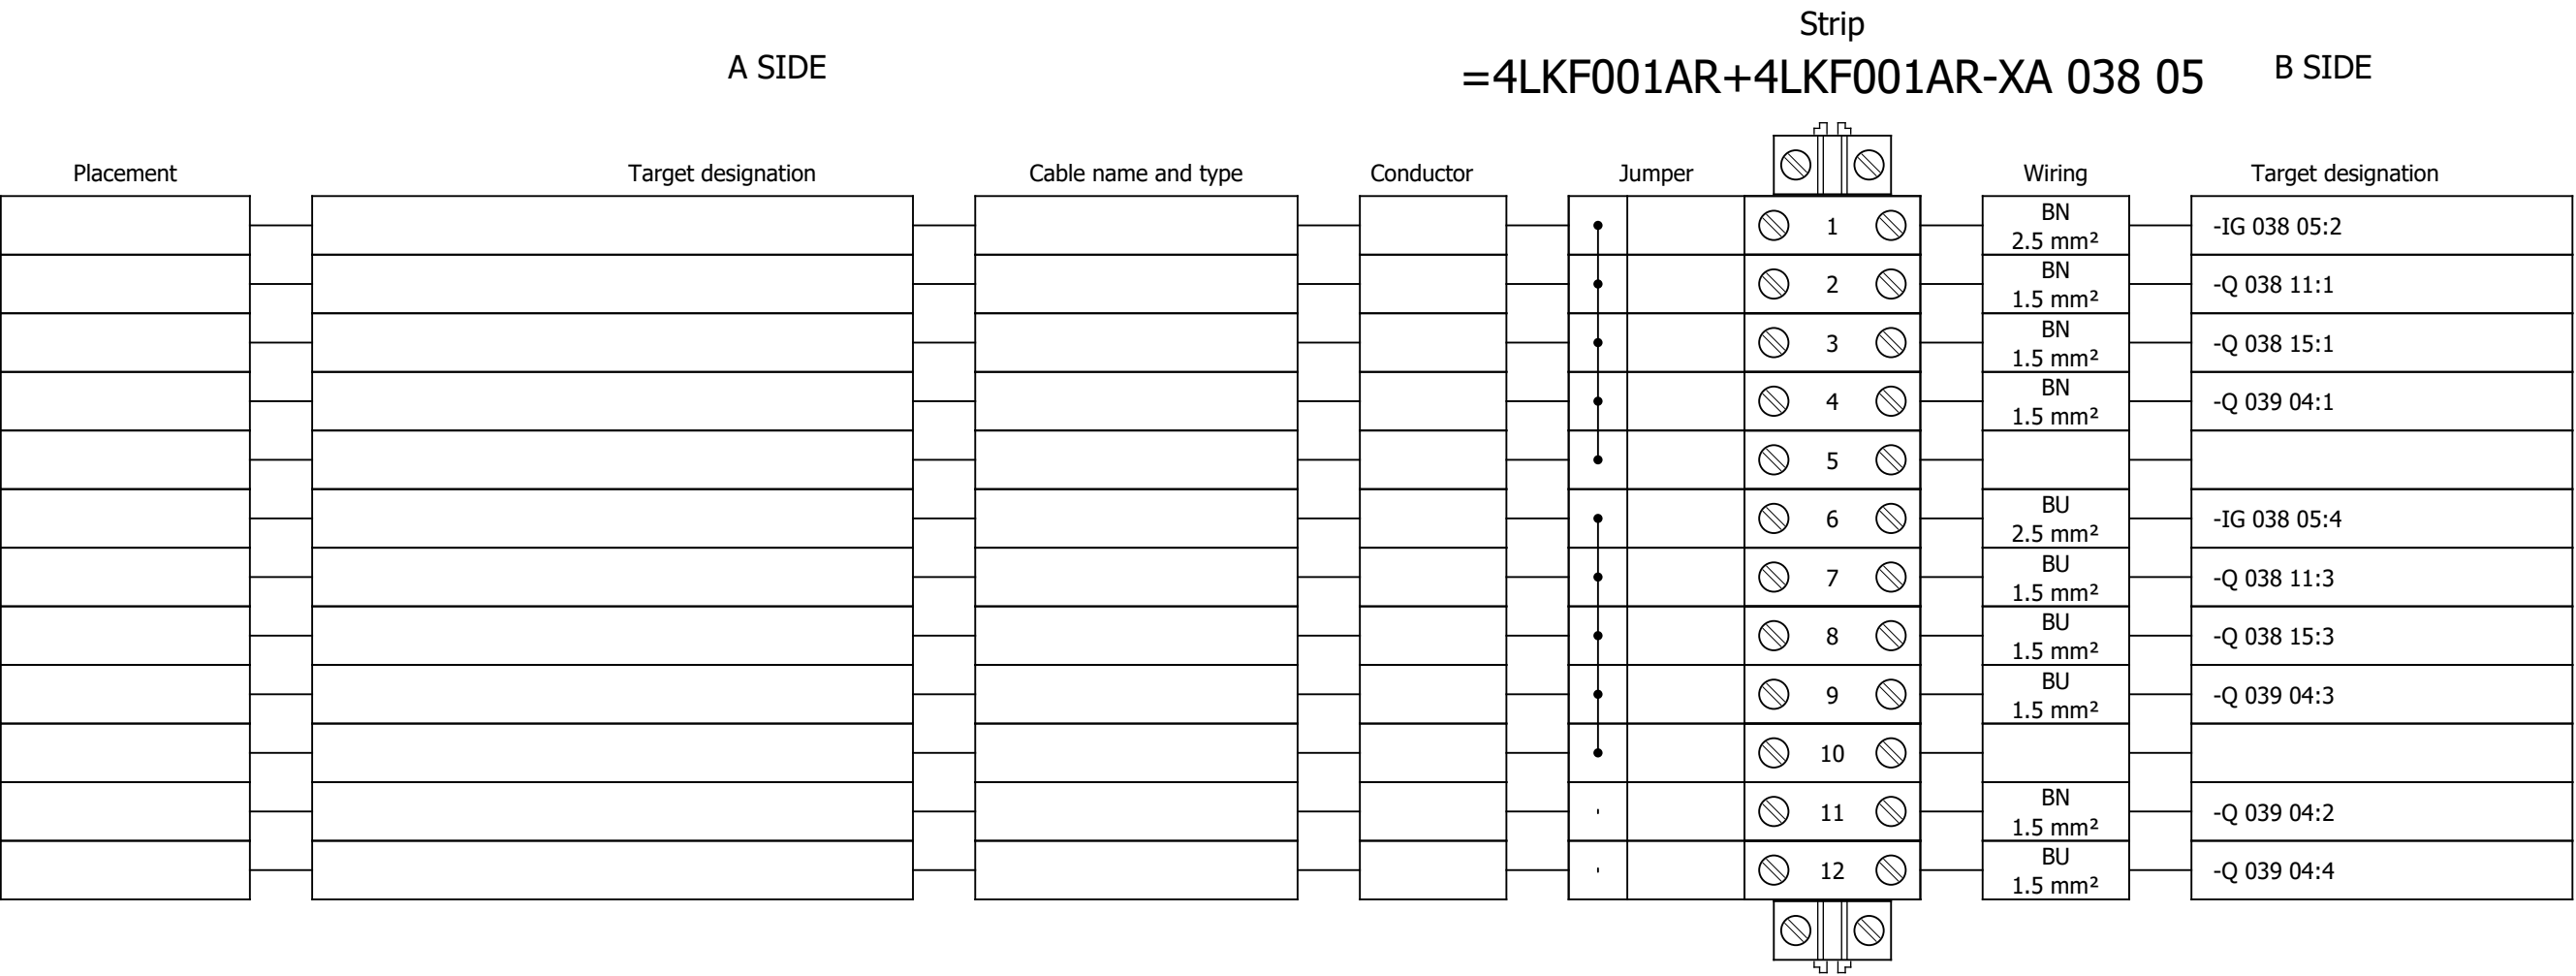


Terminal diagram

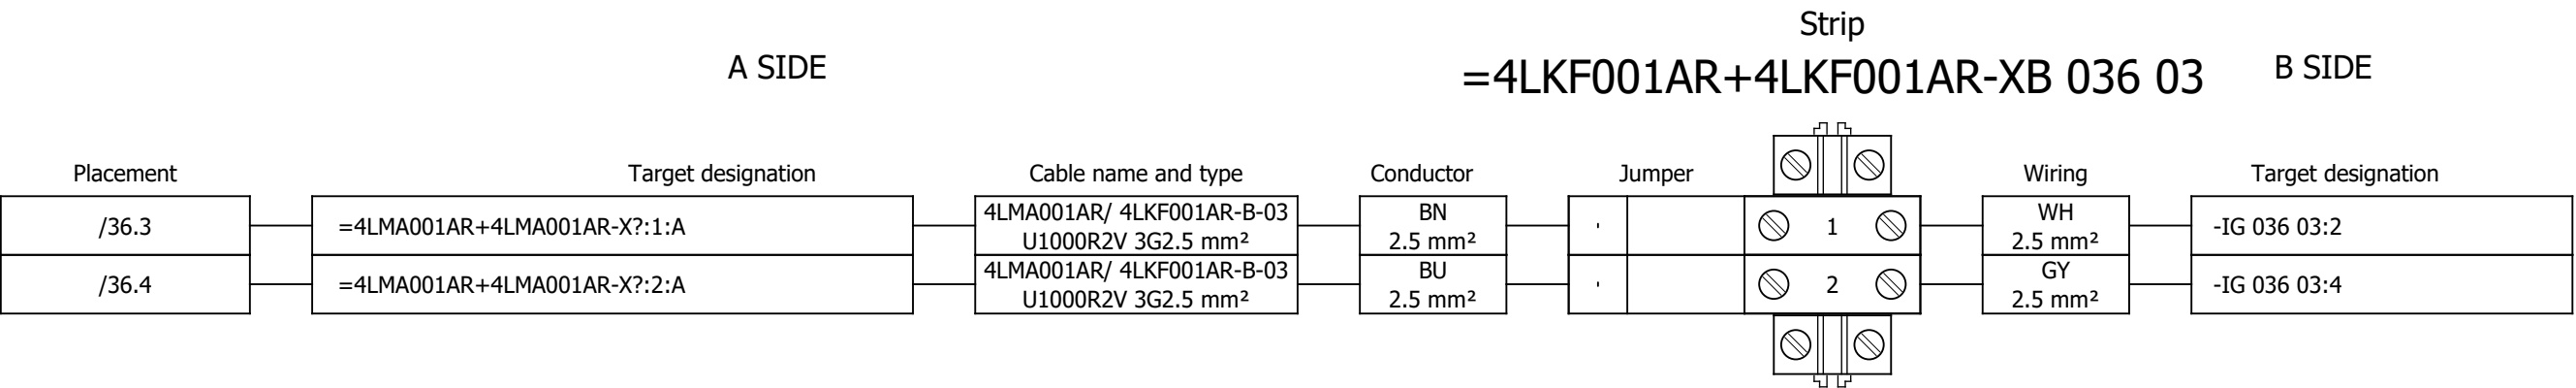


Terminal diagram

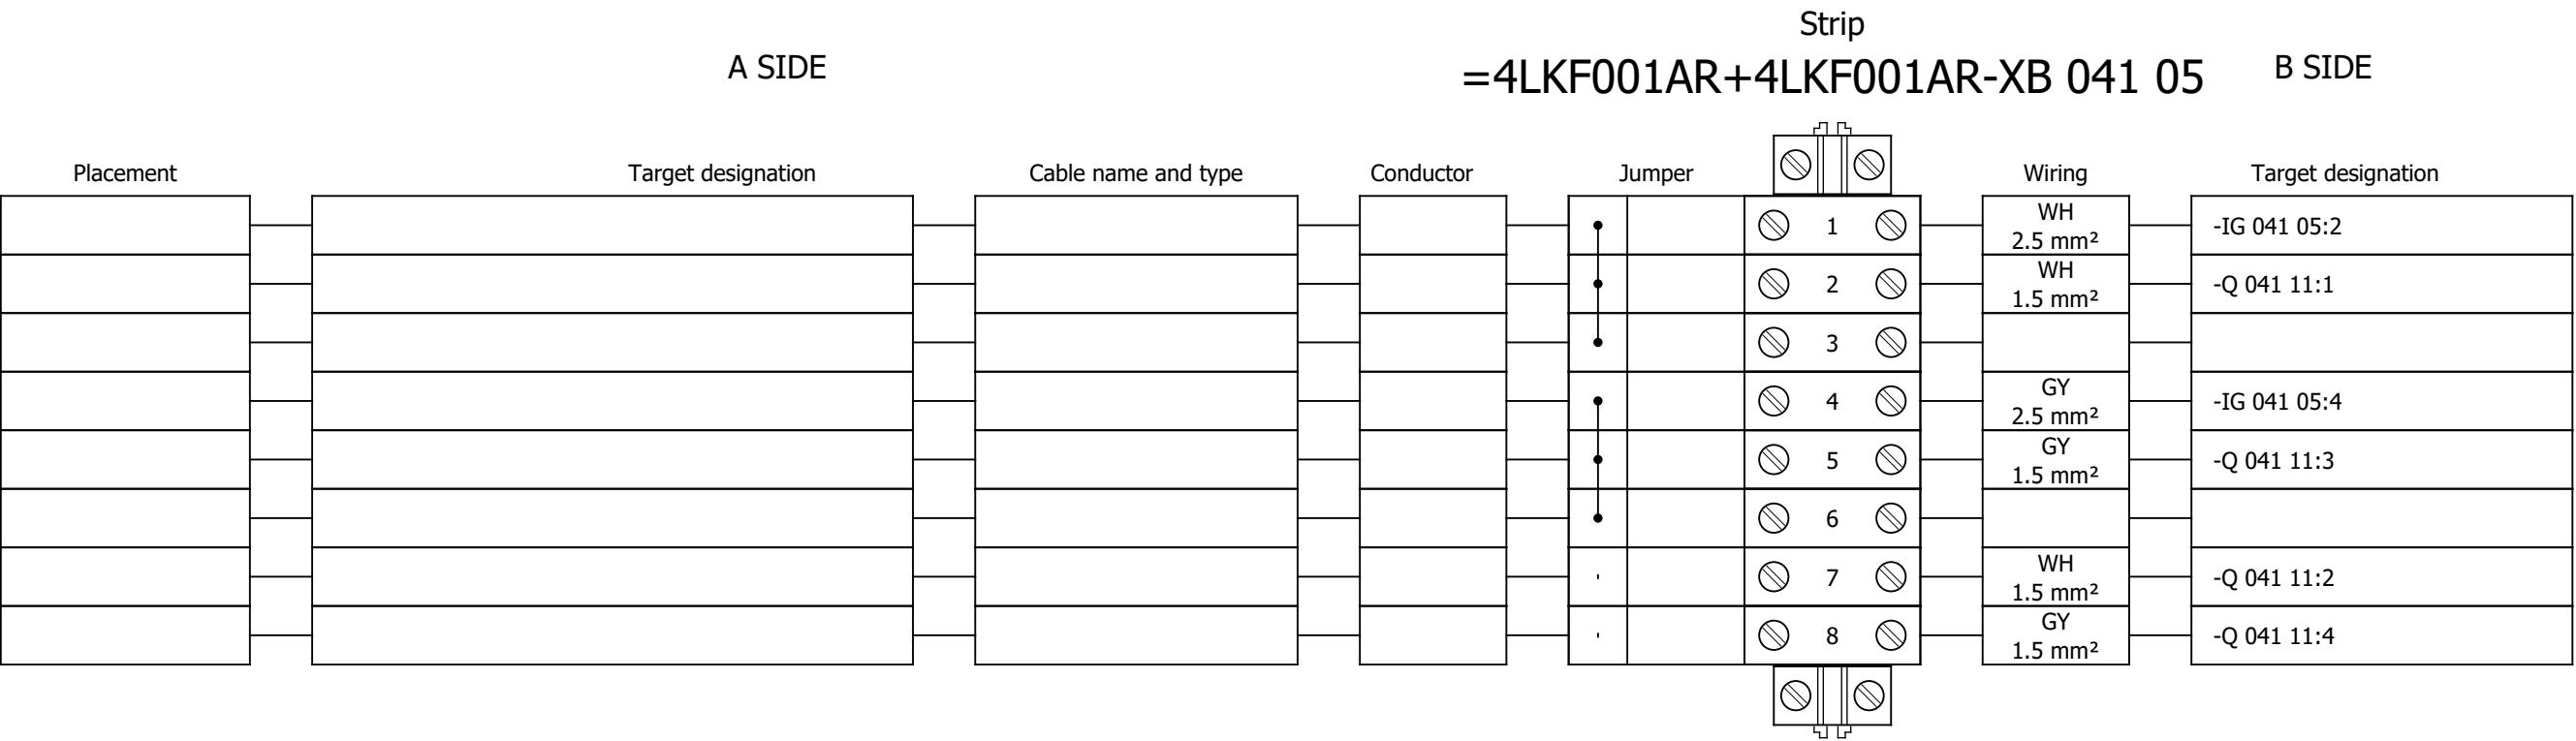

Terminal diagram

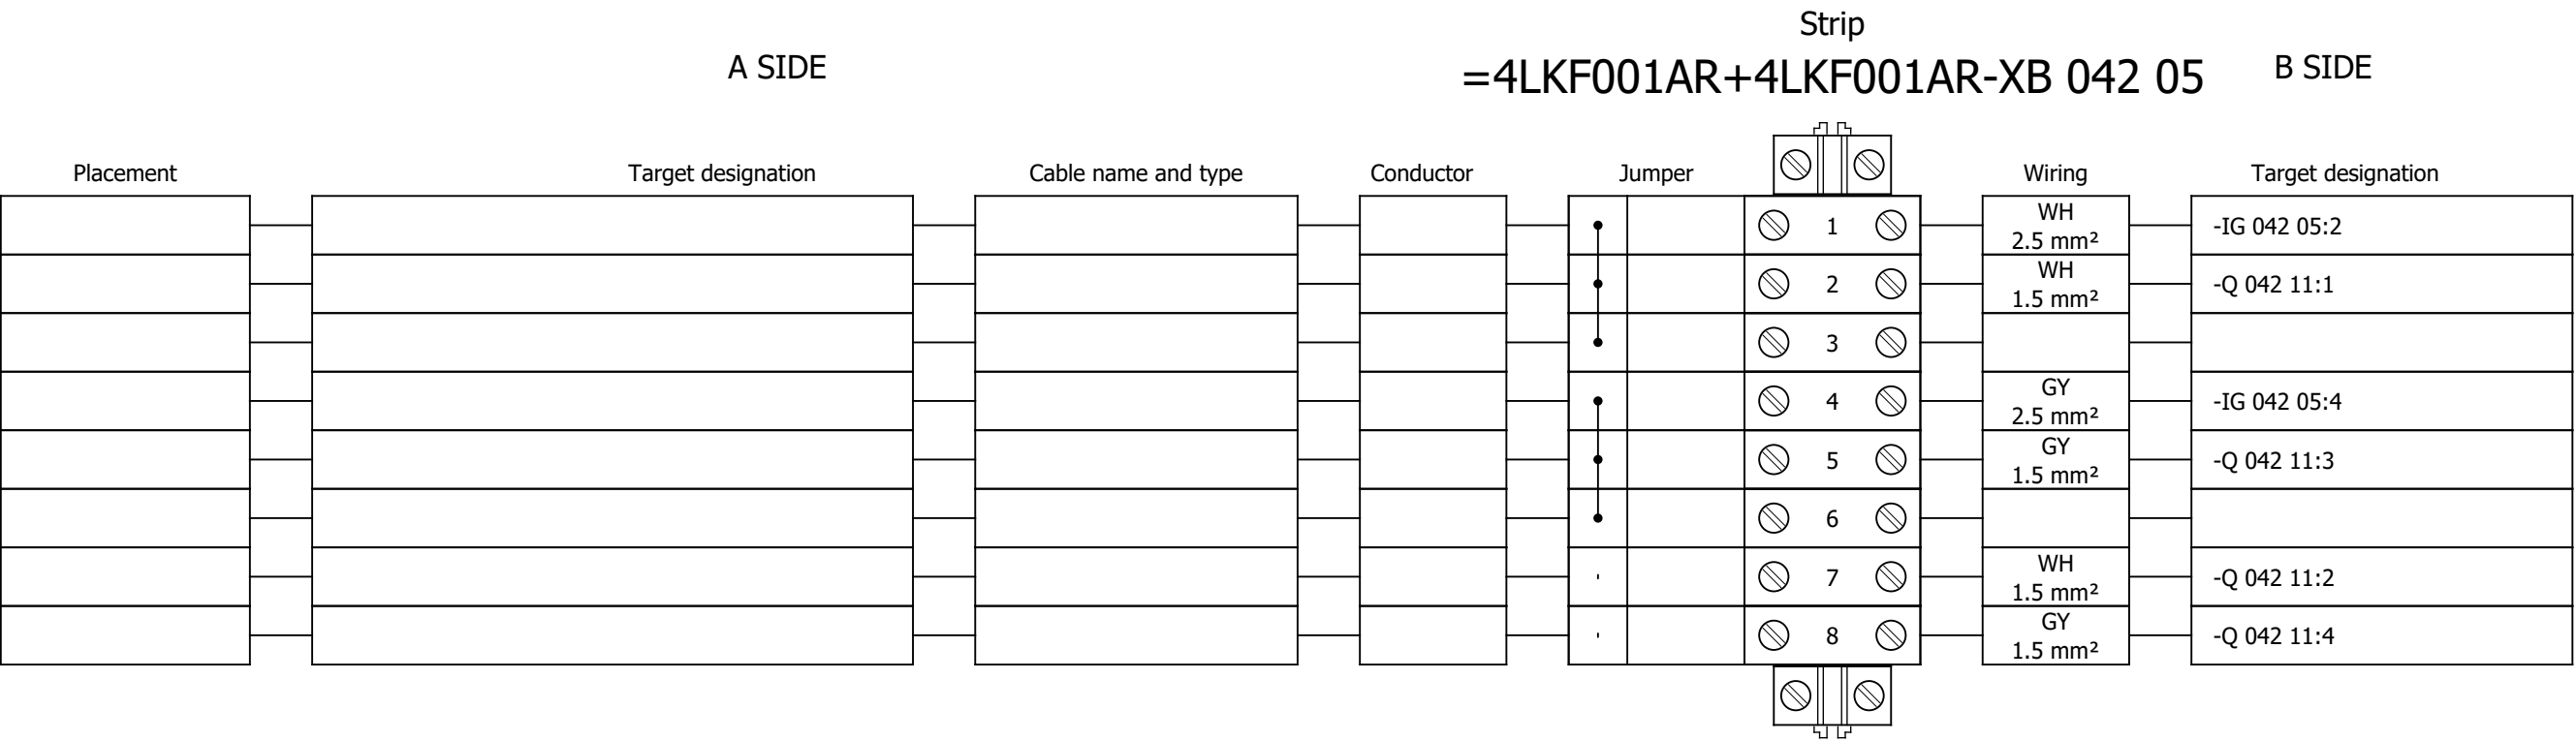


Terminal diagram

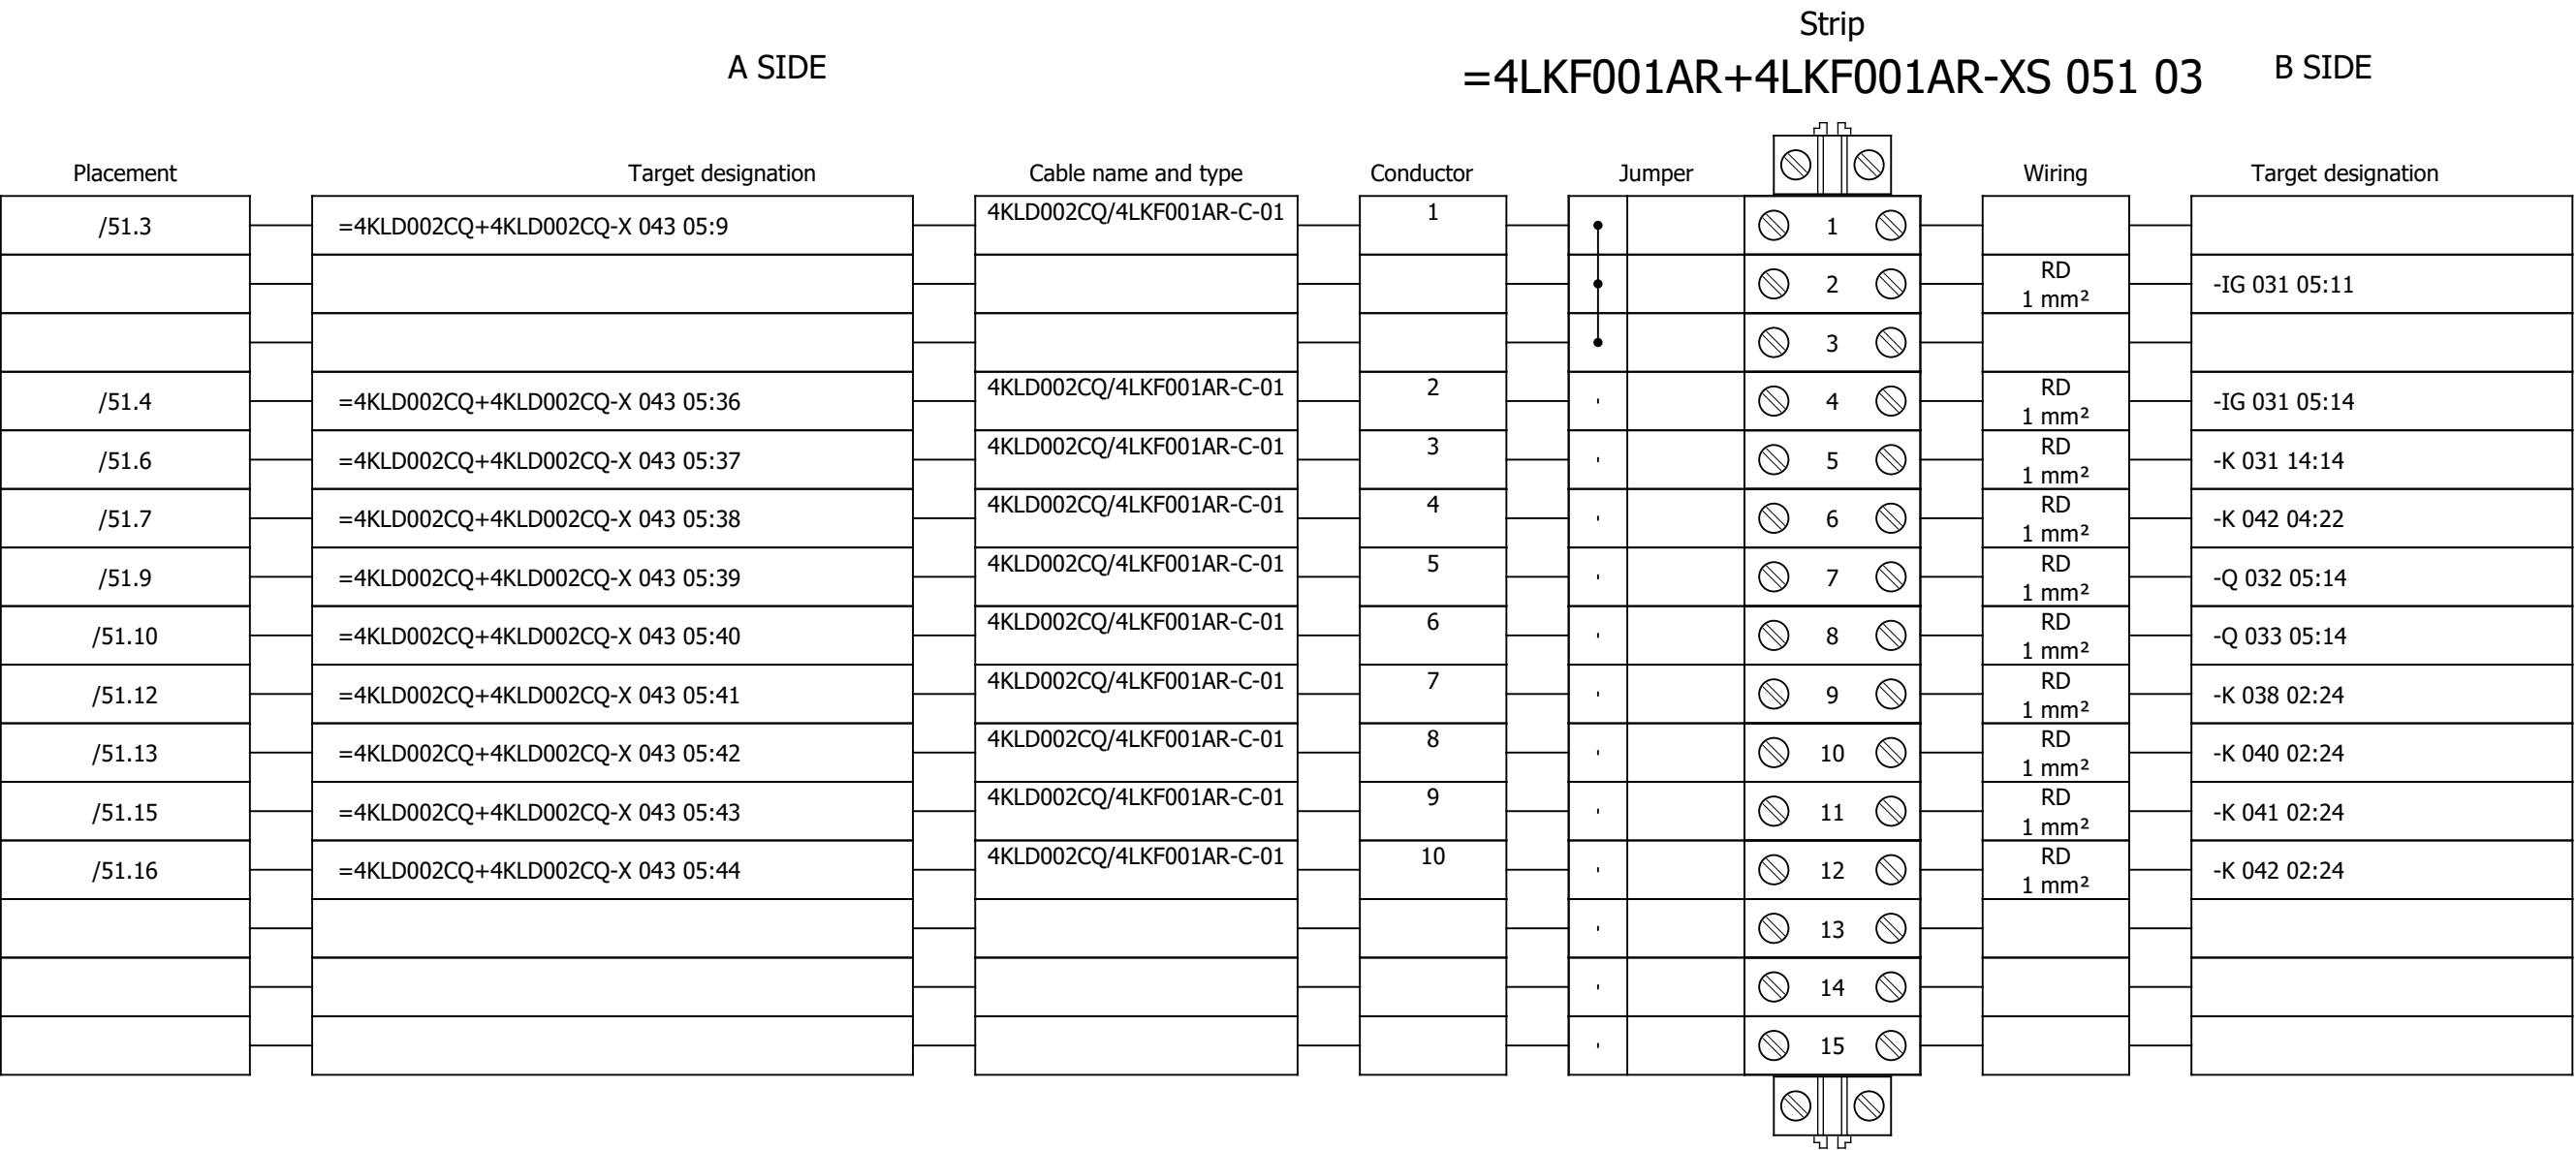


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 1		Project:	BRC-4	Unit & Issuer:		Number:		Revision:	E	
Drawn:	Luka Božičević																#Y
Approved:	Grga Kolić				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	Terminal diagram =4LKF001AR+4LKF001AR-XS 055 02		Drawing designation:					=4LKF001AR	Sheet:	73
Format:	A3									BRC-4-ATEP0-1870-E					+4LKF001AR	Next:	74


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 1		Project:	BRC-4	Unit & Issuer:		Number:		Revision:	E	
Drawn:	Luka Božičević																#Y
Approved:	Grga Kolić				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	Terminal diagram =4LKF001AR+4LKF001AR-XS 055 02		Drawing designation:					=4LKF001AR	Sheet:	74
Format:	A3									BRC-4-ATEP0-1870-E					+4LKF001AR	Next:	75


Terminal diagram

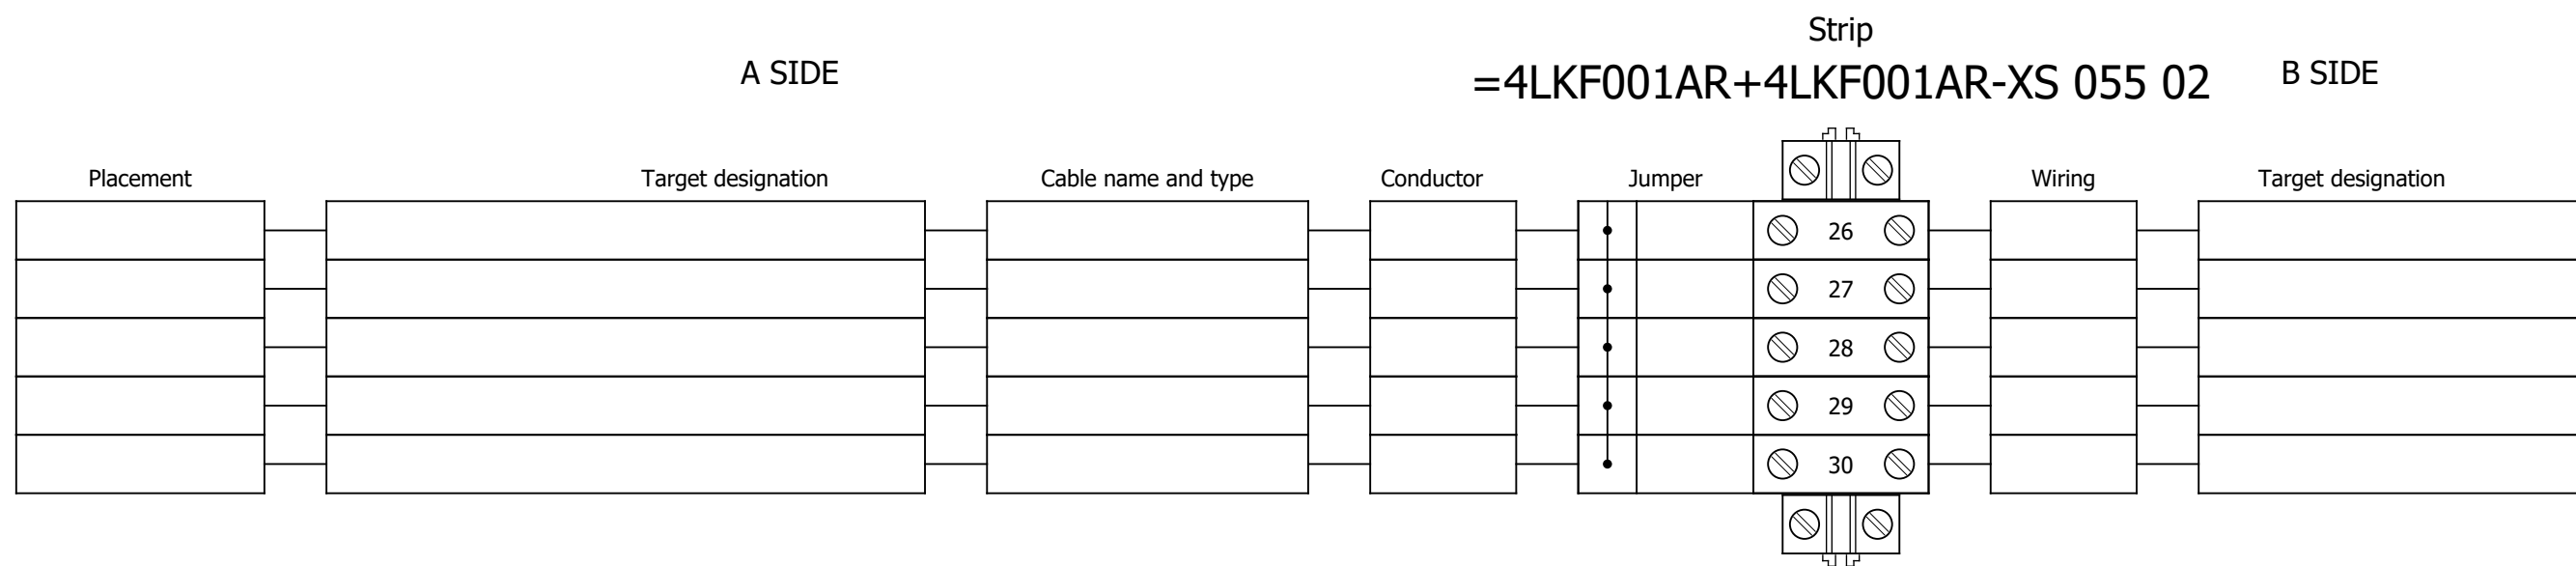


Terminal diagram

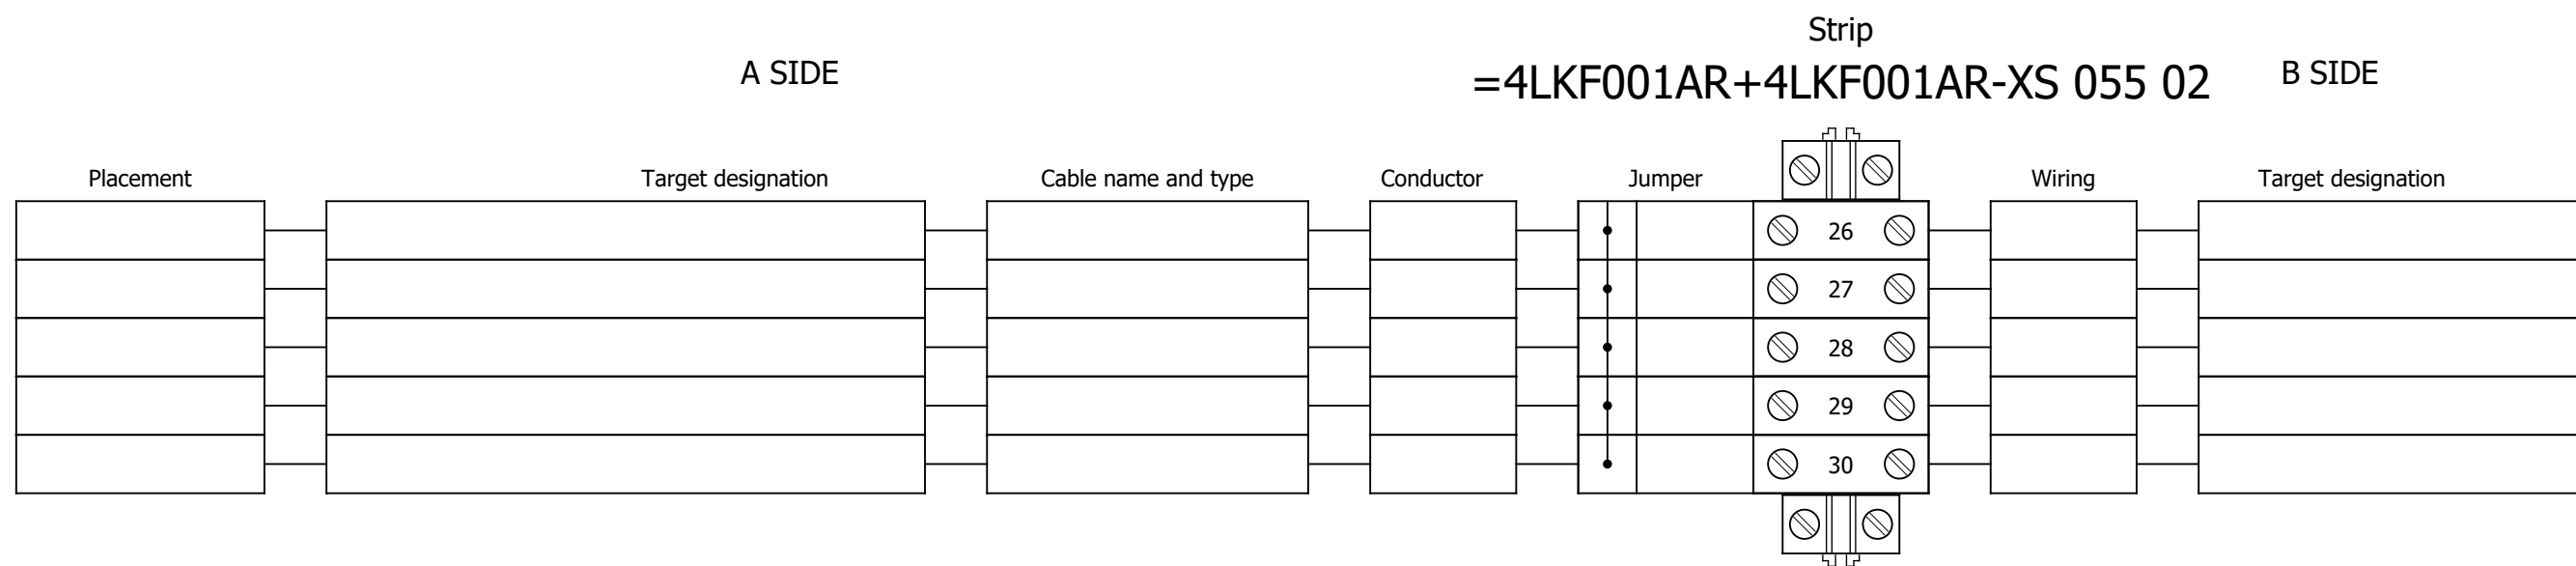

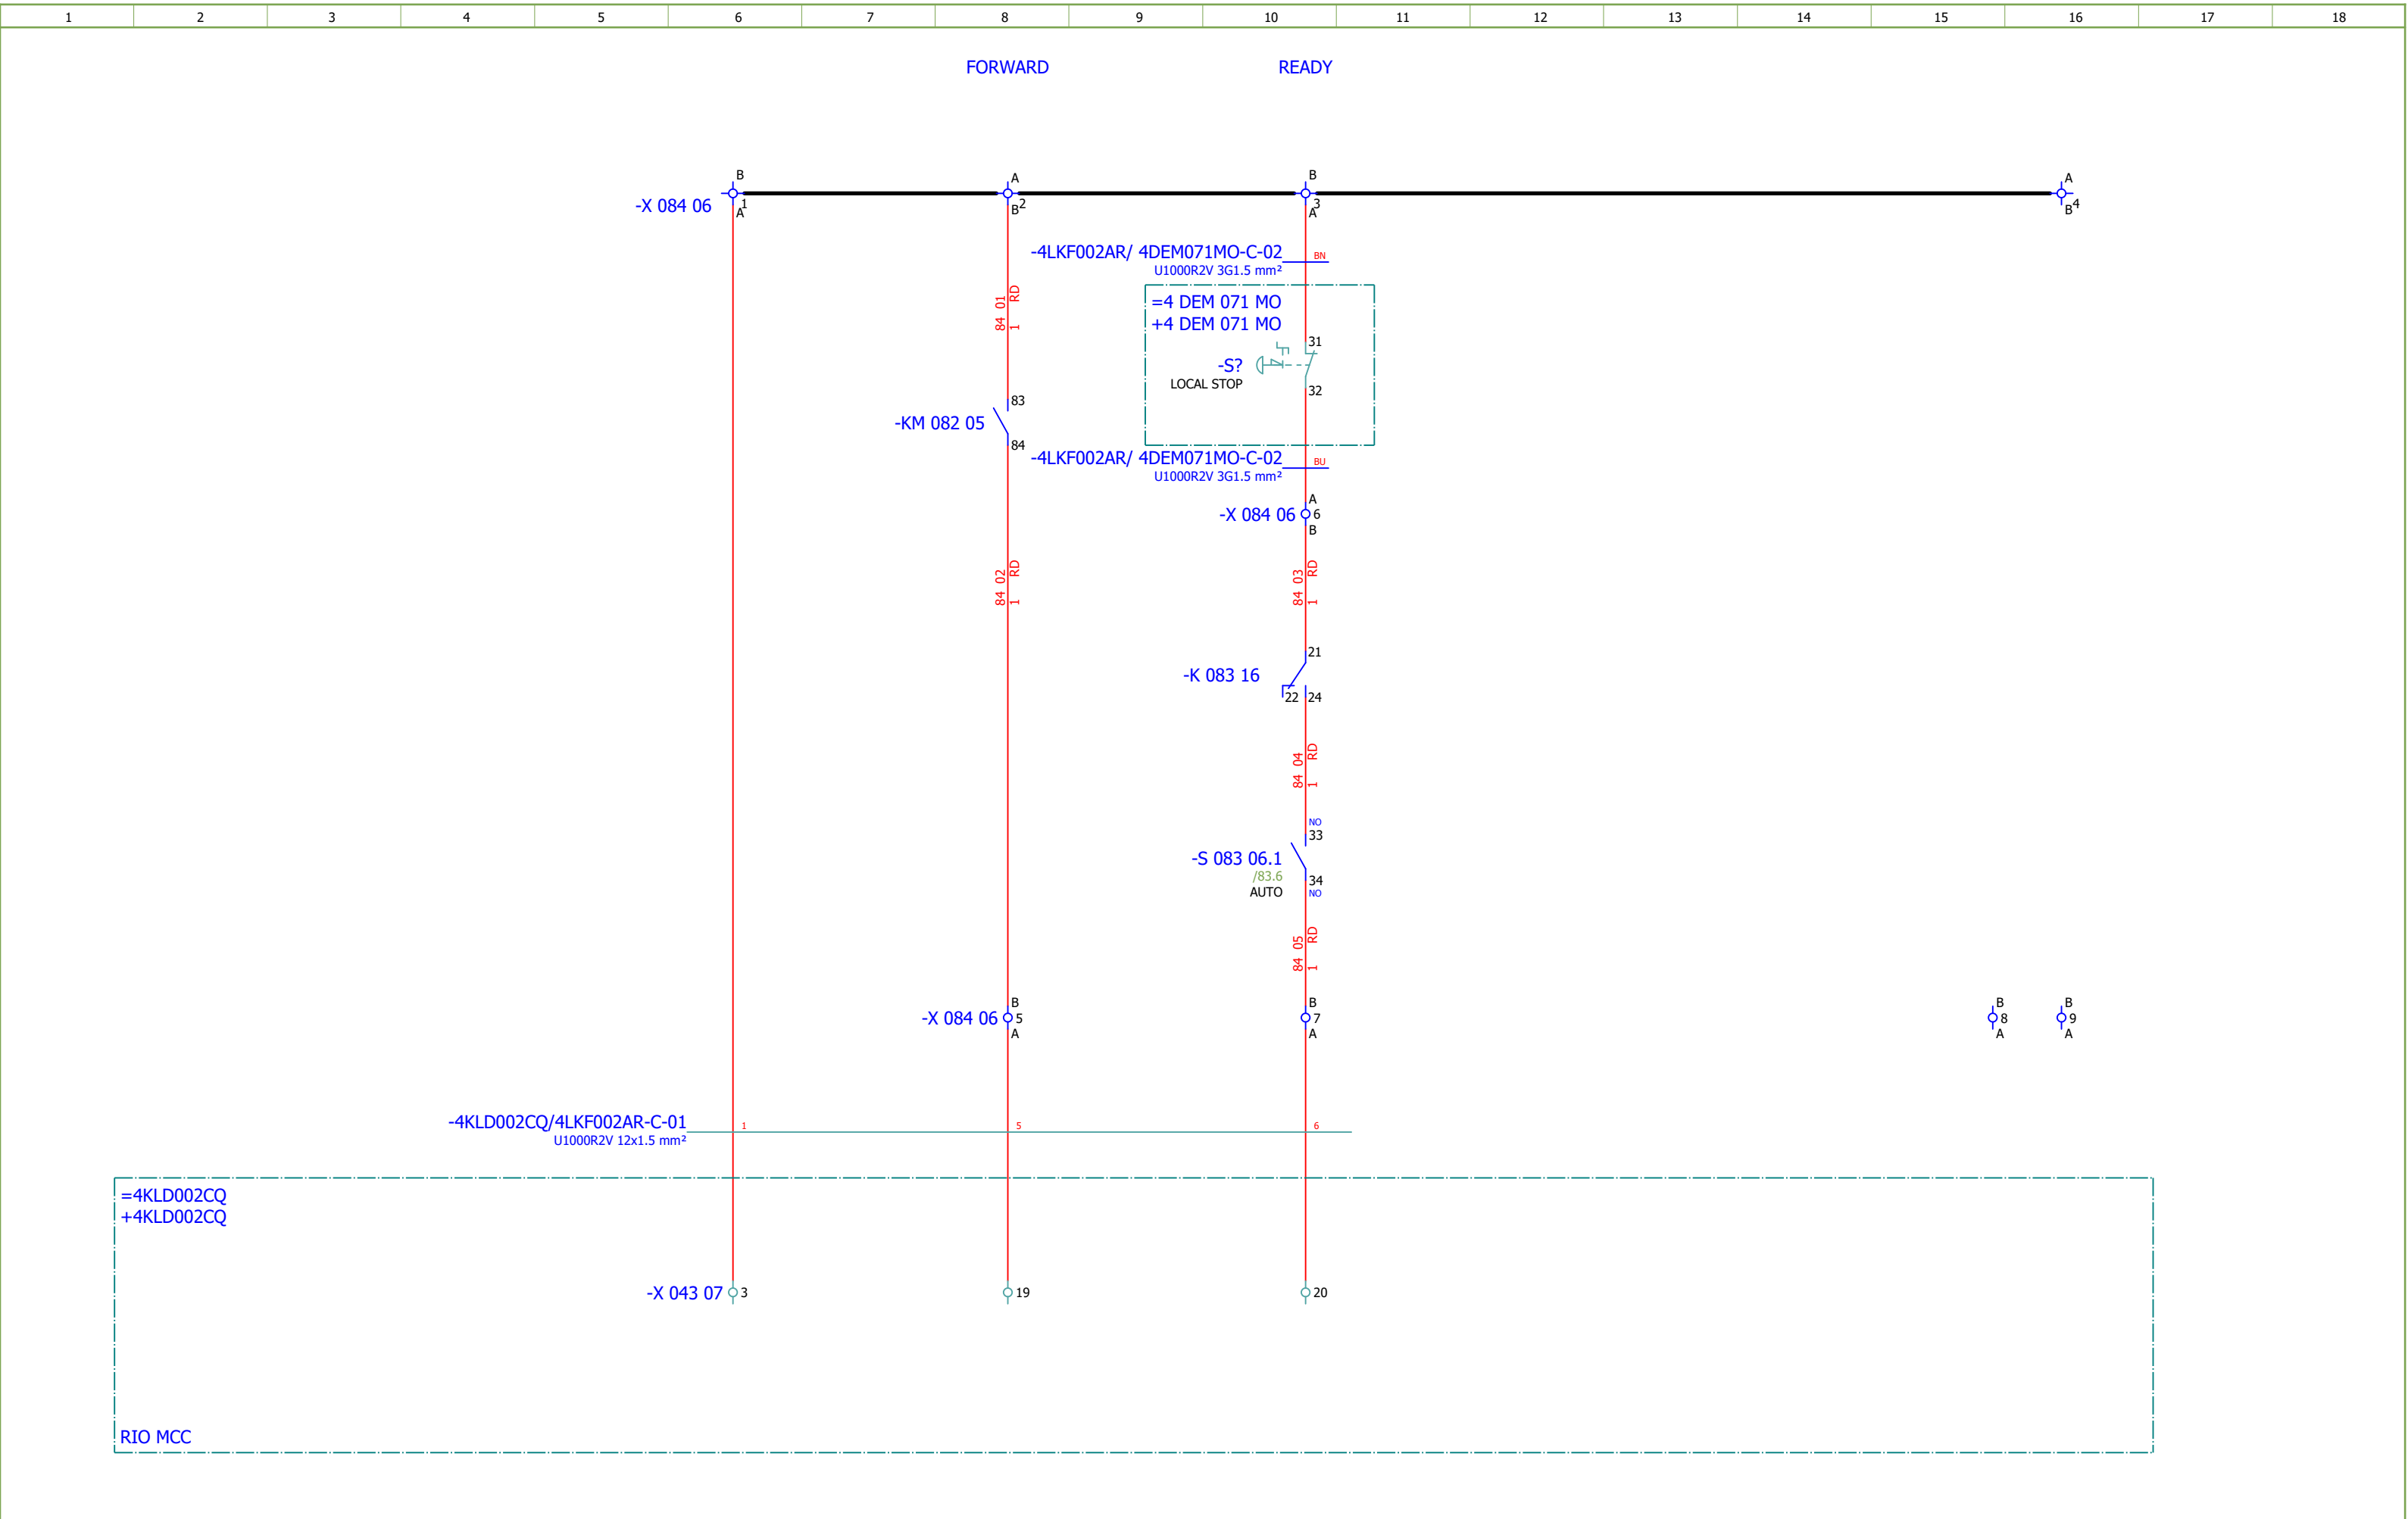


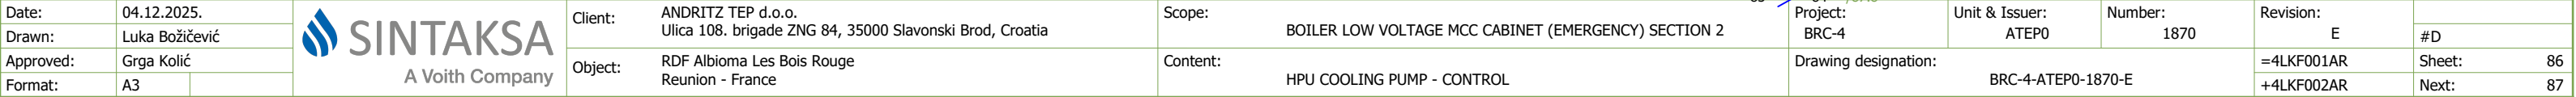



Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 2	Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E		
Drawn:	Luka Božičević															#D	
Approved:	Grga Kolić				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	HPU COOLING PUMP - SIGNALIZATION	Drawing designation:			BRC-4-ATEP0-1870-E			=4LKF001AR	Sheet:	87
Format:	A3													+4LKF002AR		Next:	88

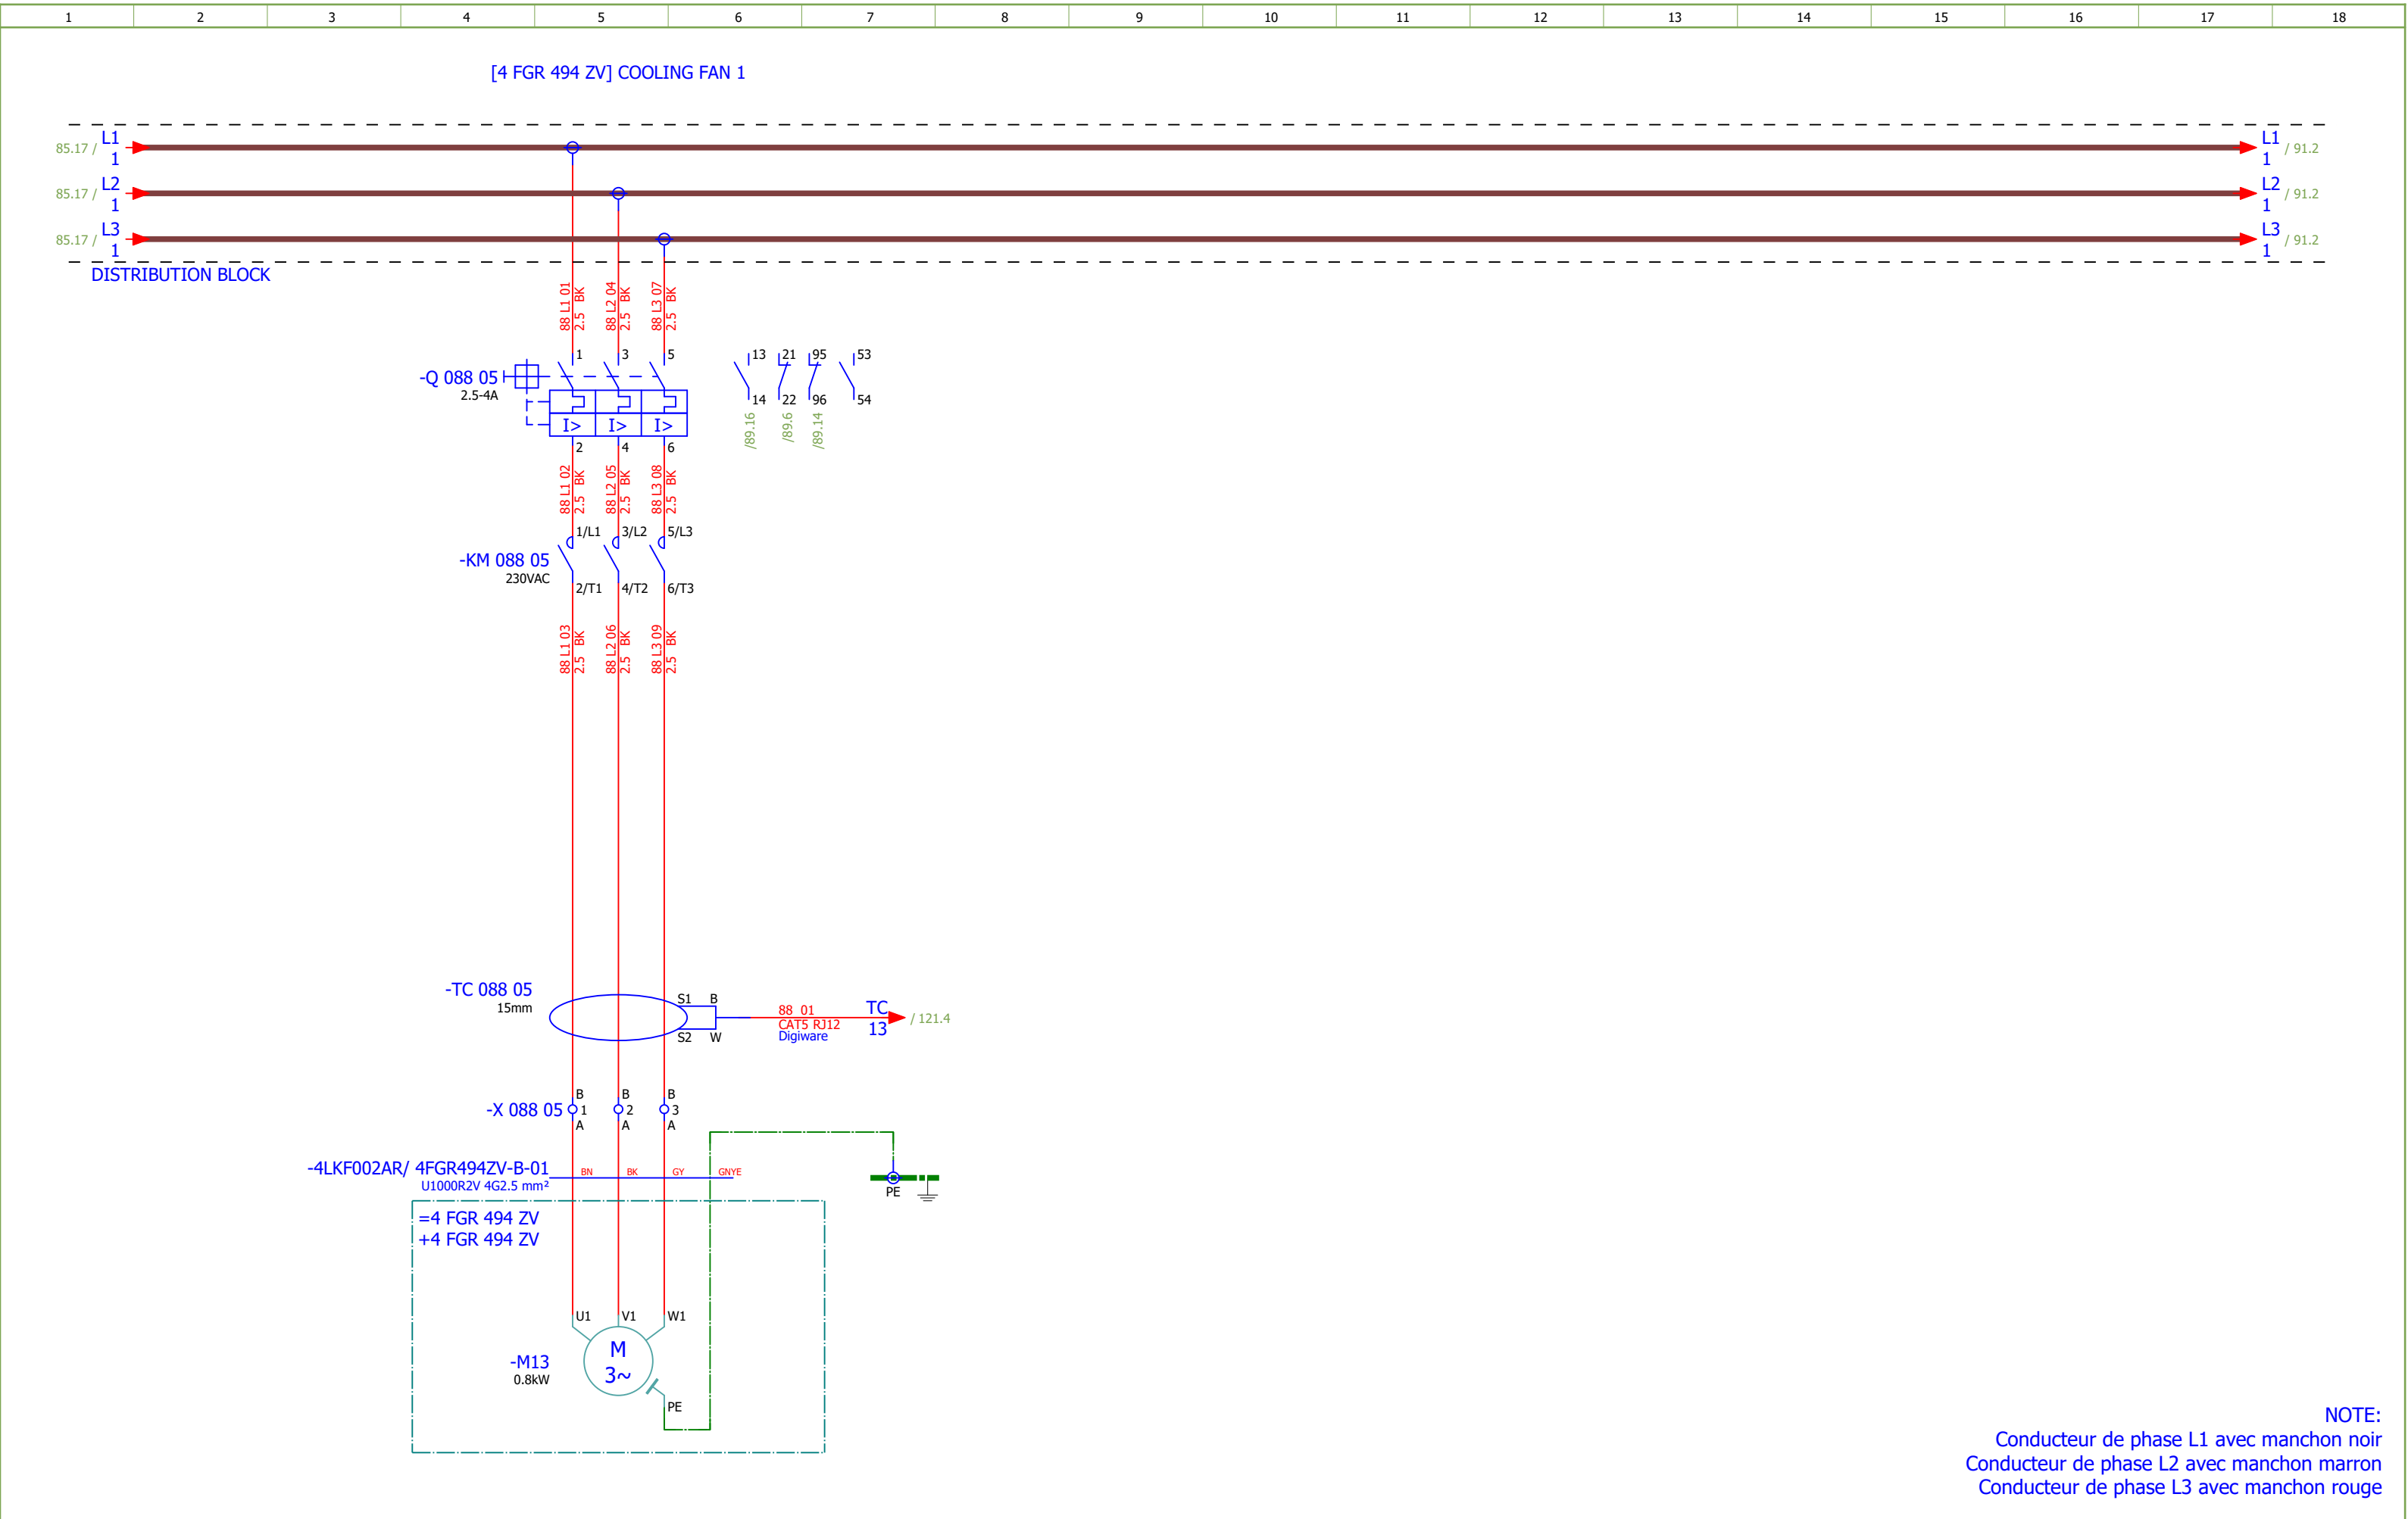


Date:	04.12.2025.			Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 2	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: E	
Drawn:	Luka Božičević									#D
Approved:	Grga Kolić									
Format:	A3									
				Object: RDF Albioma Les Bois Rouge Reunion - France	Content: COOLING FAN 1	Drawing designation: BRC-4-ATEP0-1870-E			=4LKF001AR	Sheet: 88
									+4LKF002AR	Next: 89

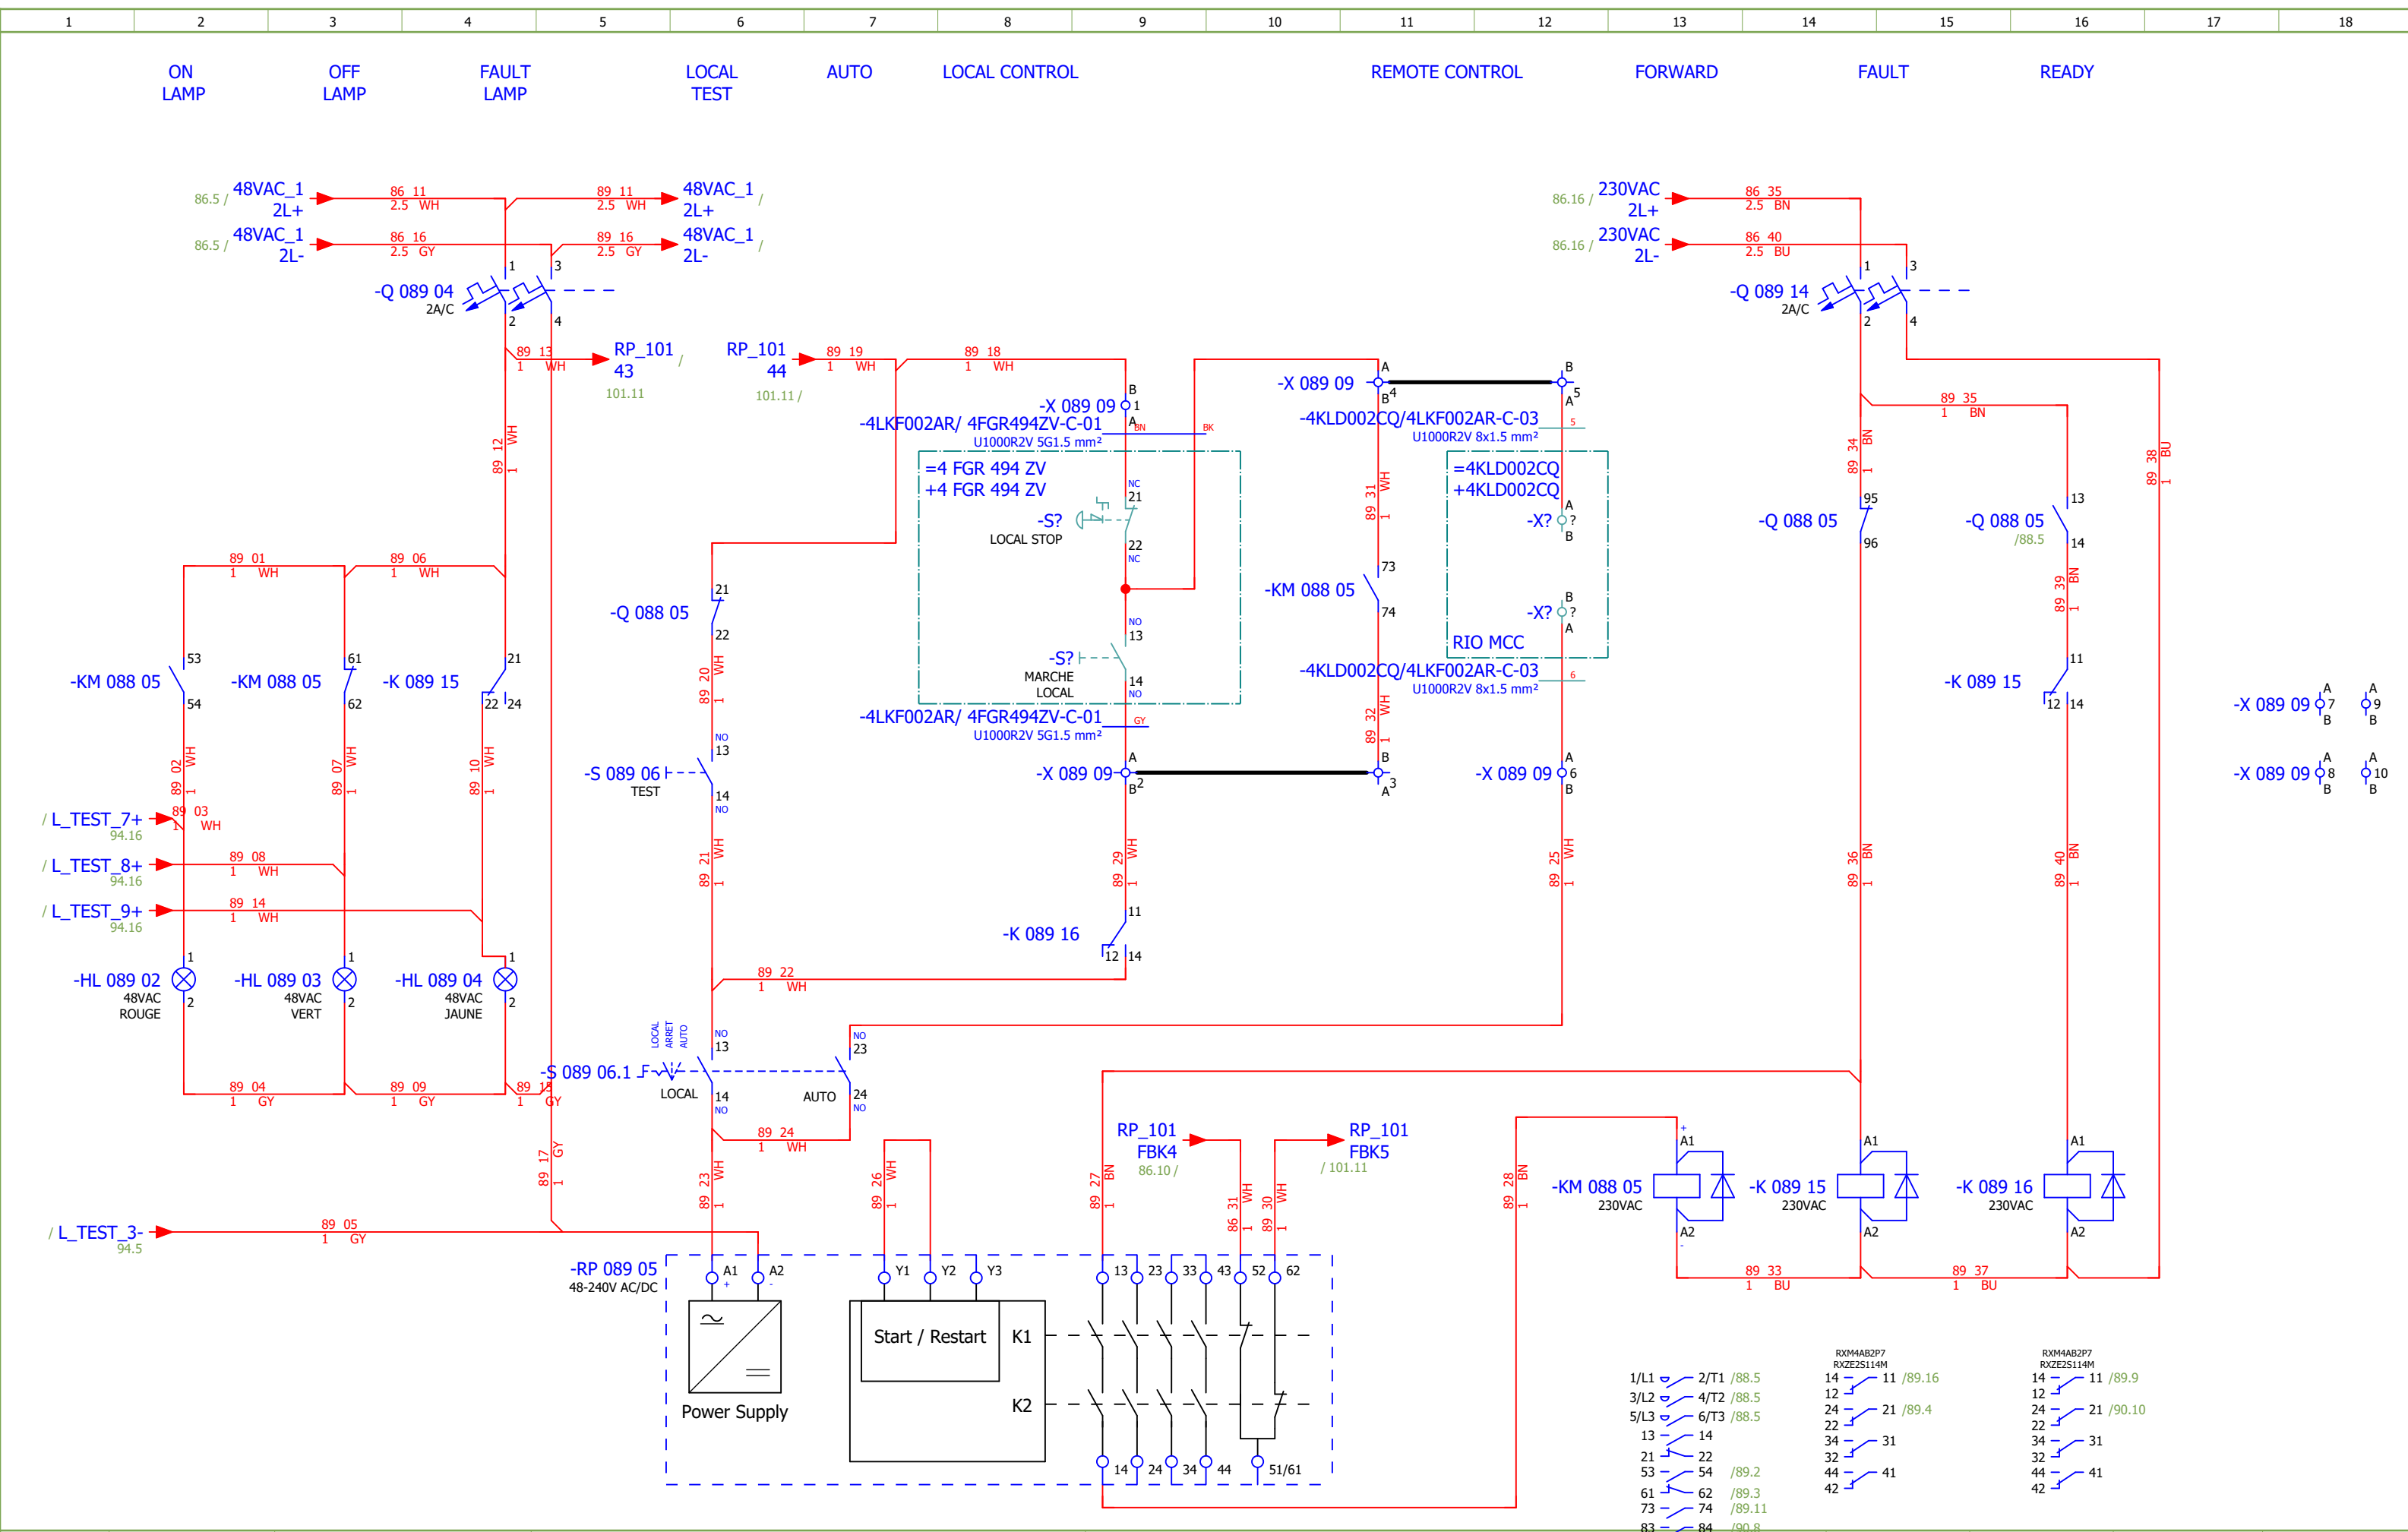

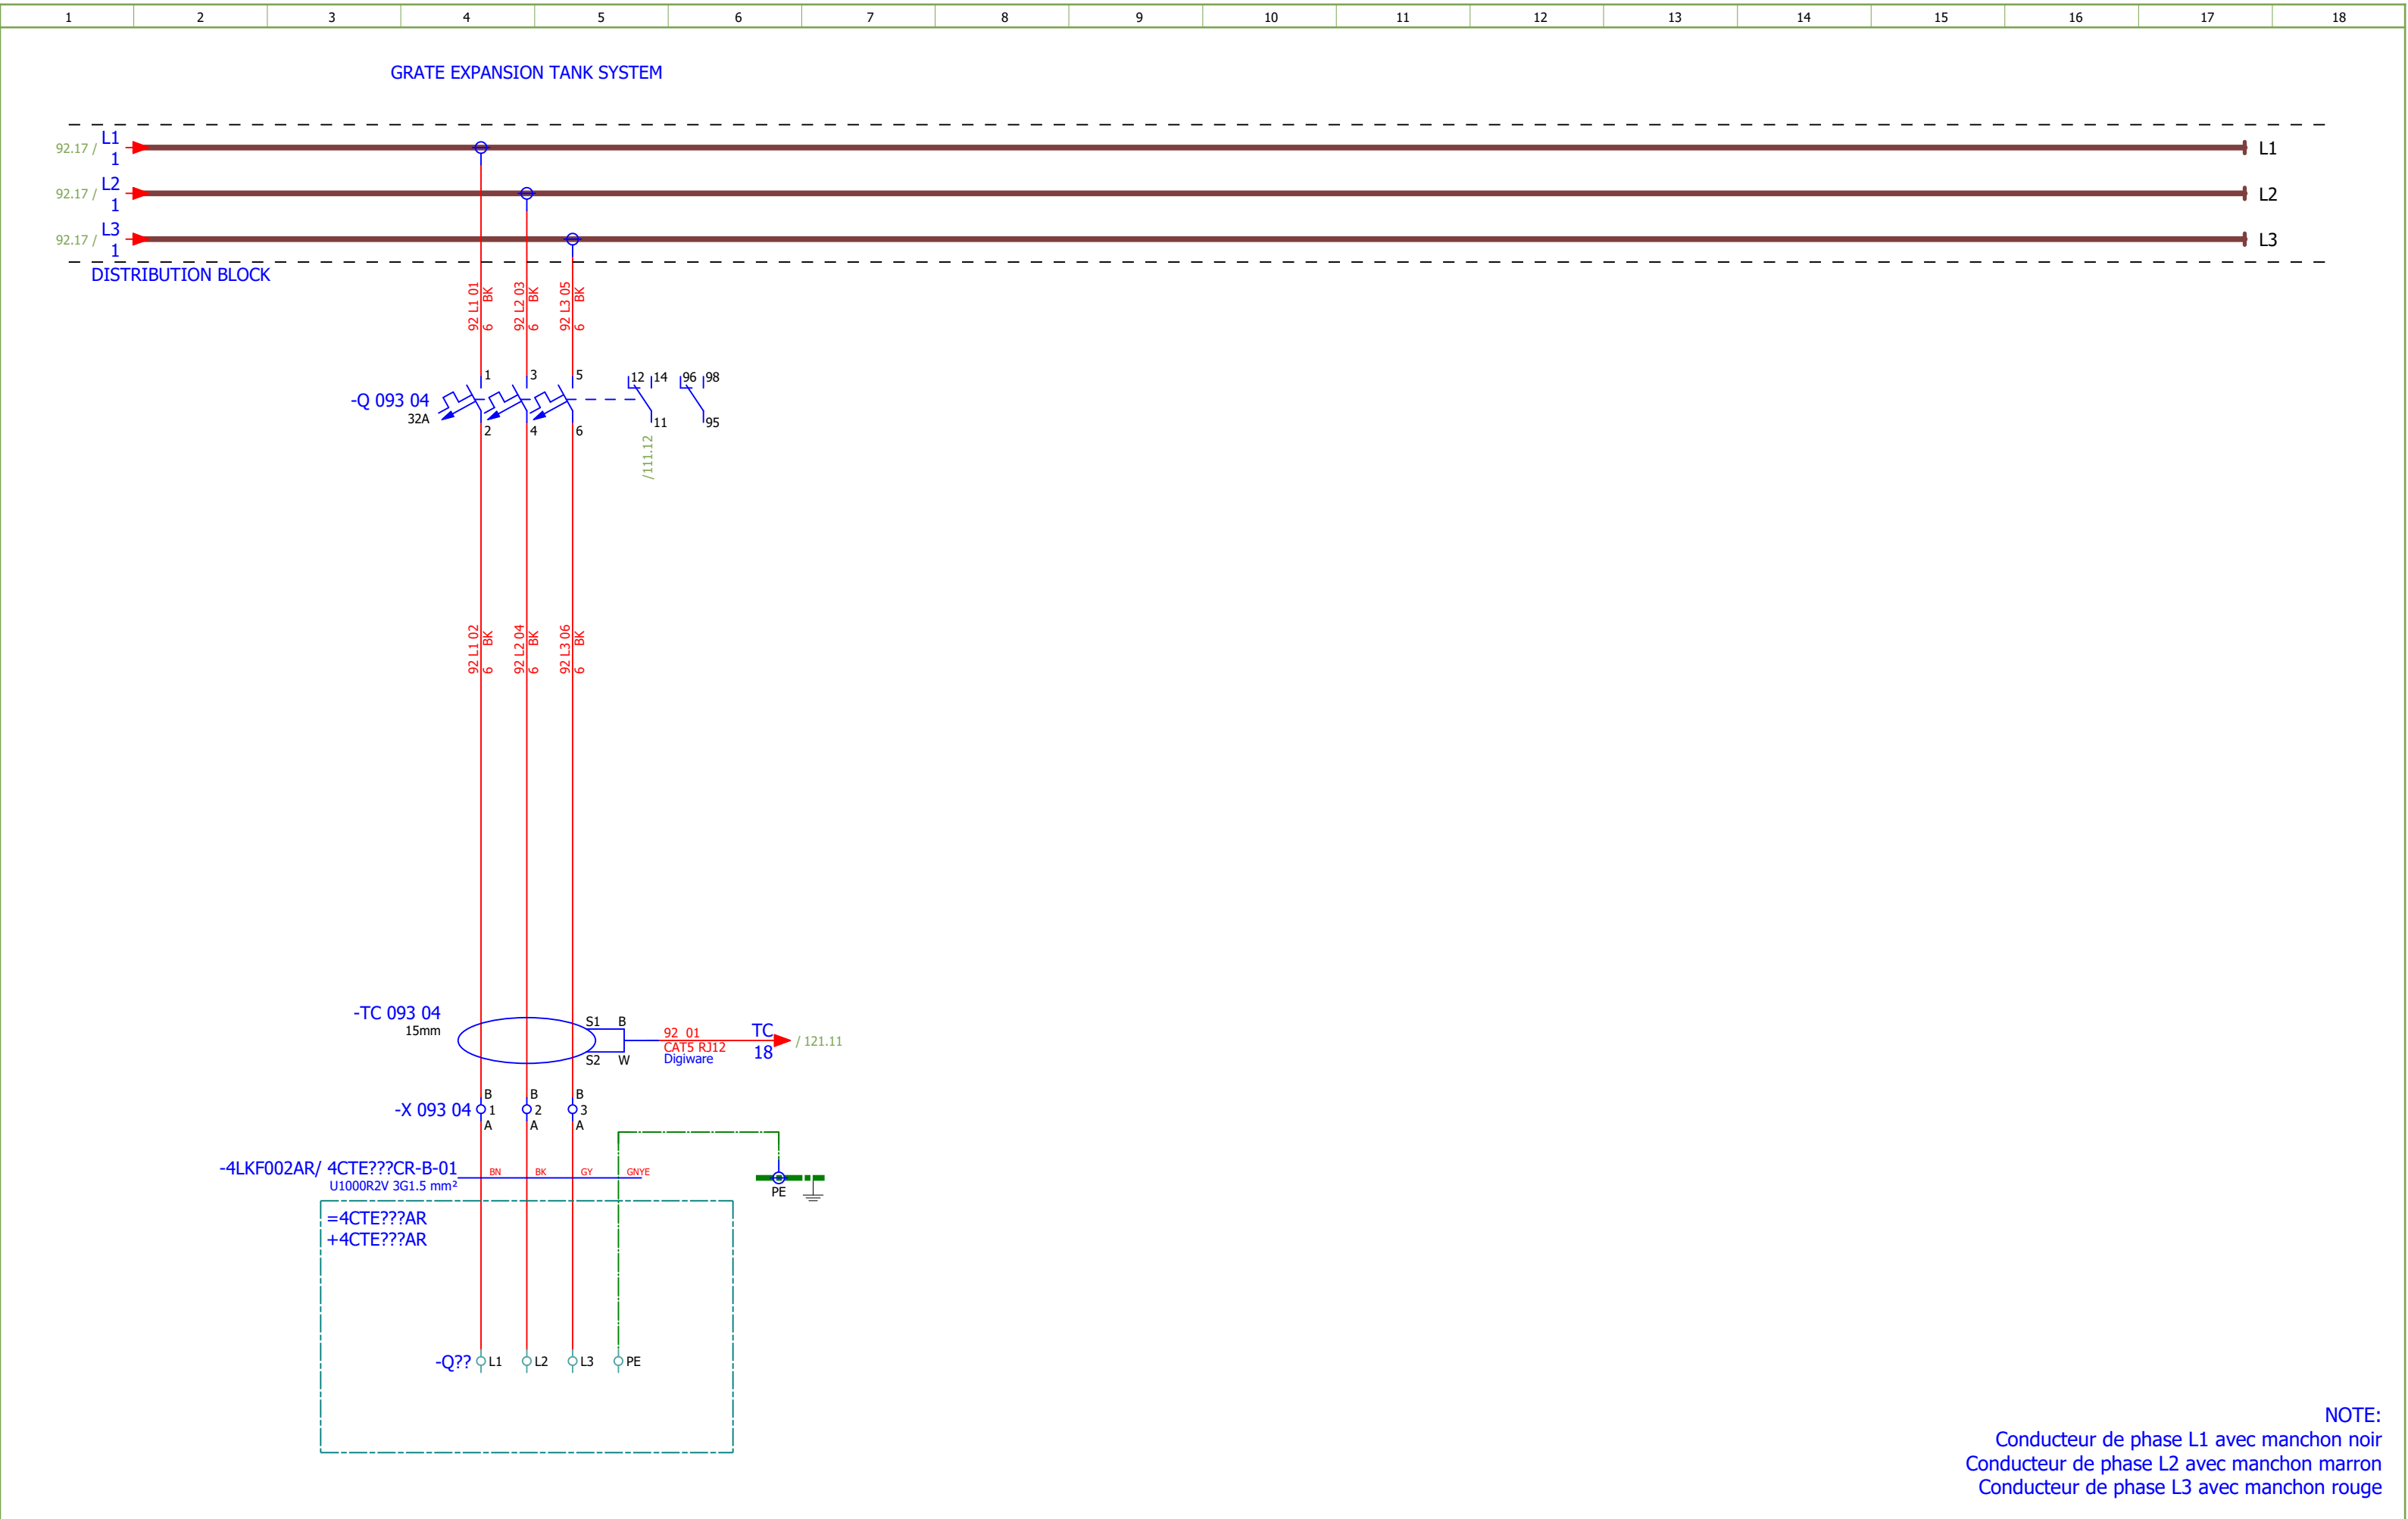


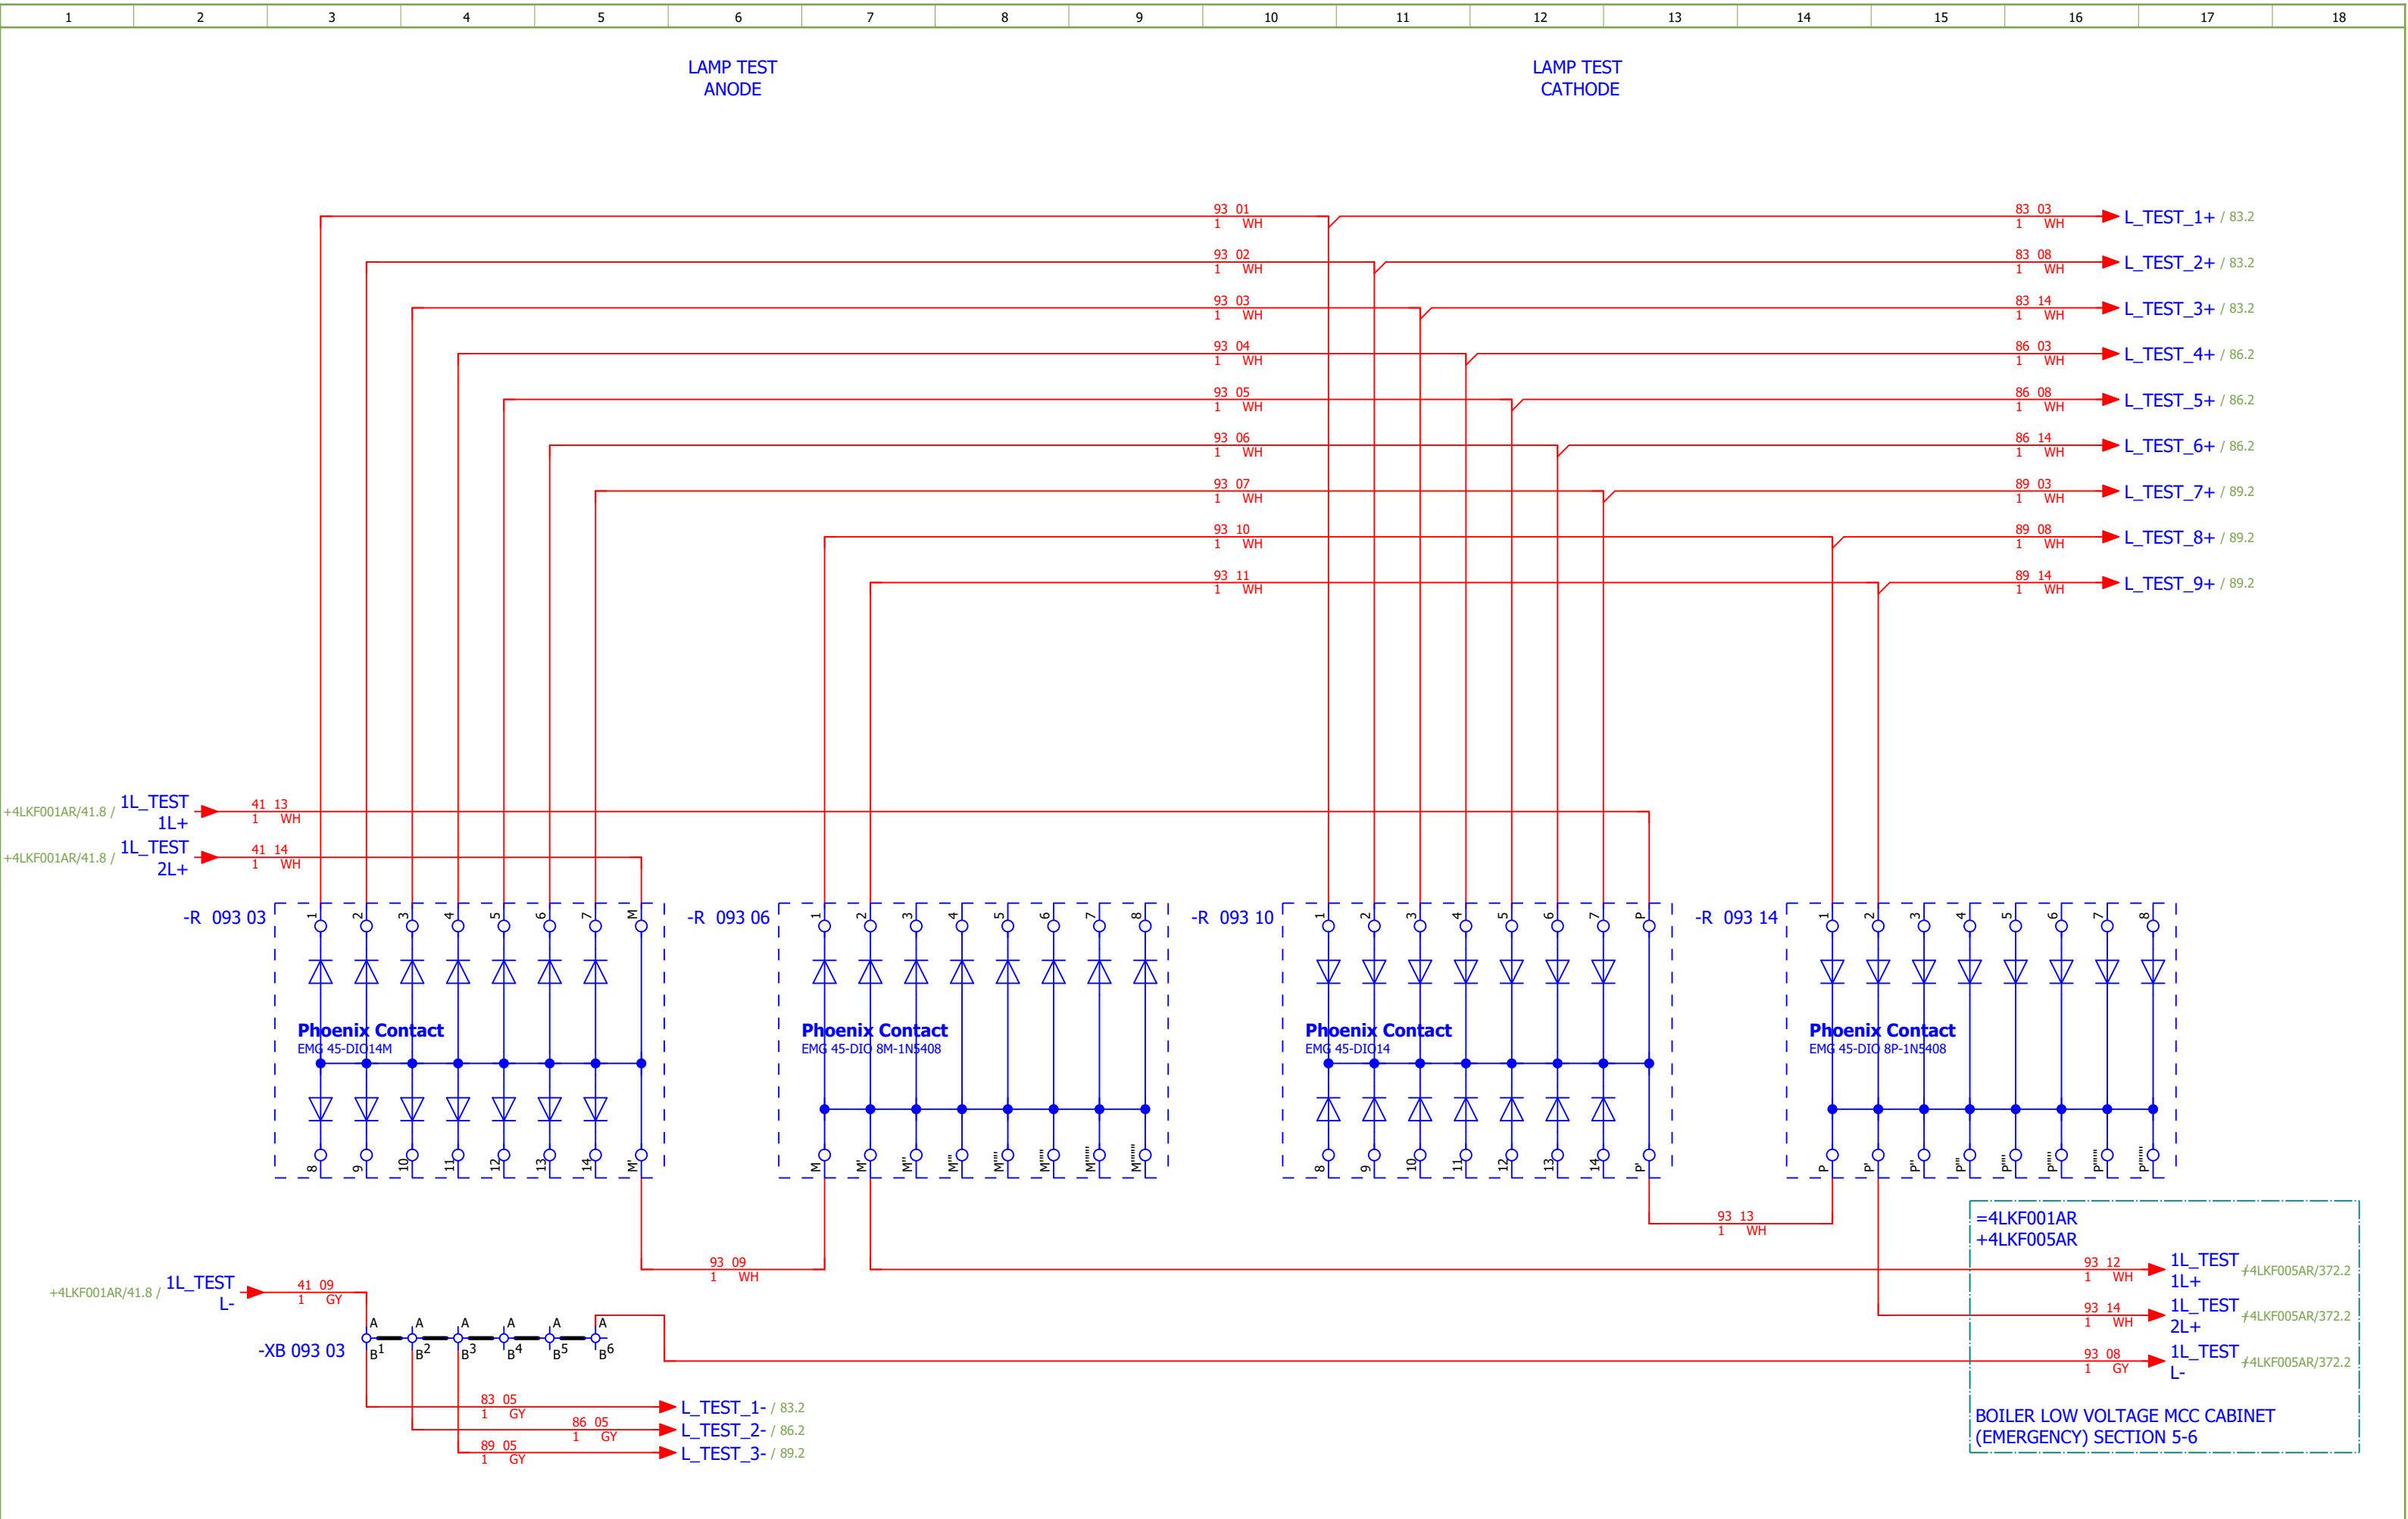

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 2		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E			
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	LAMP TEST		Drawing designation:						=4LKF001AR	Sheet:	94		
Approved:	Grga Kolić																+4LKF002AR	Next:	101
Format:	A3																		

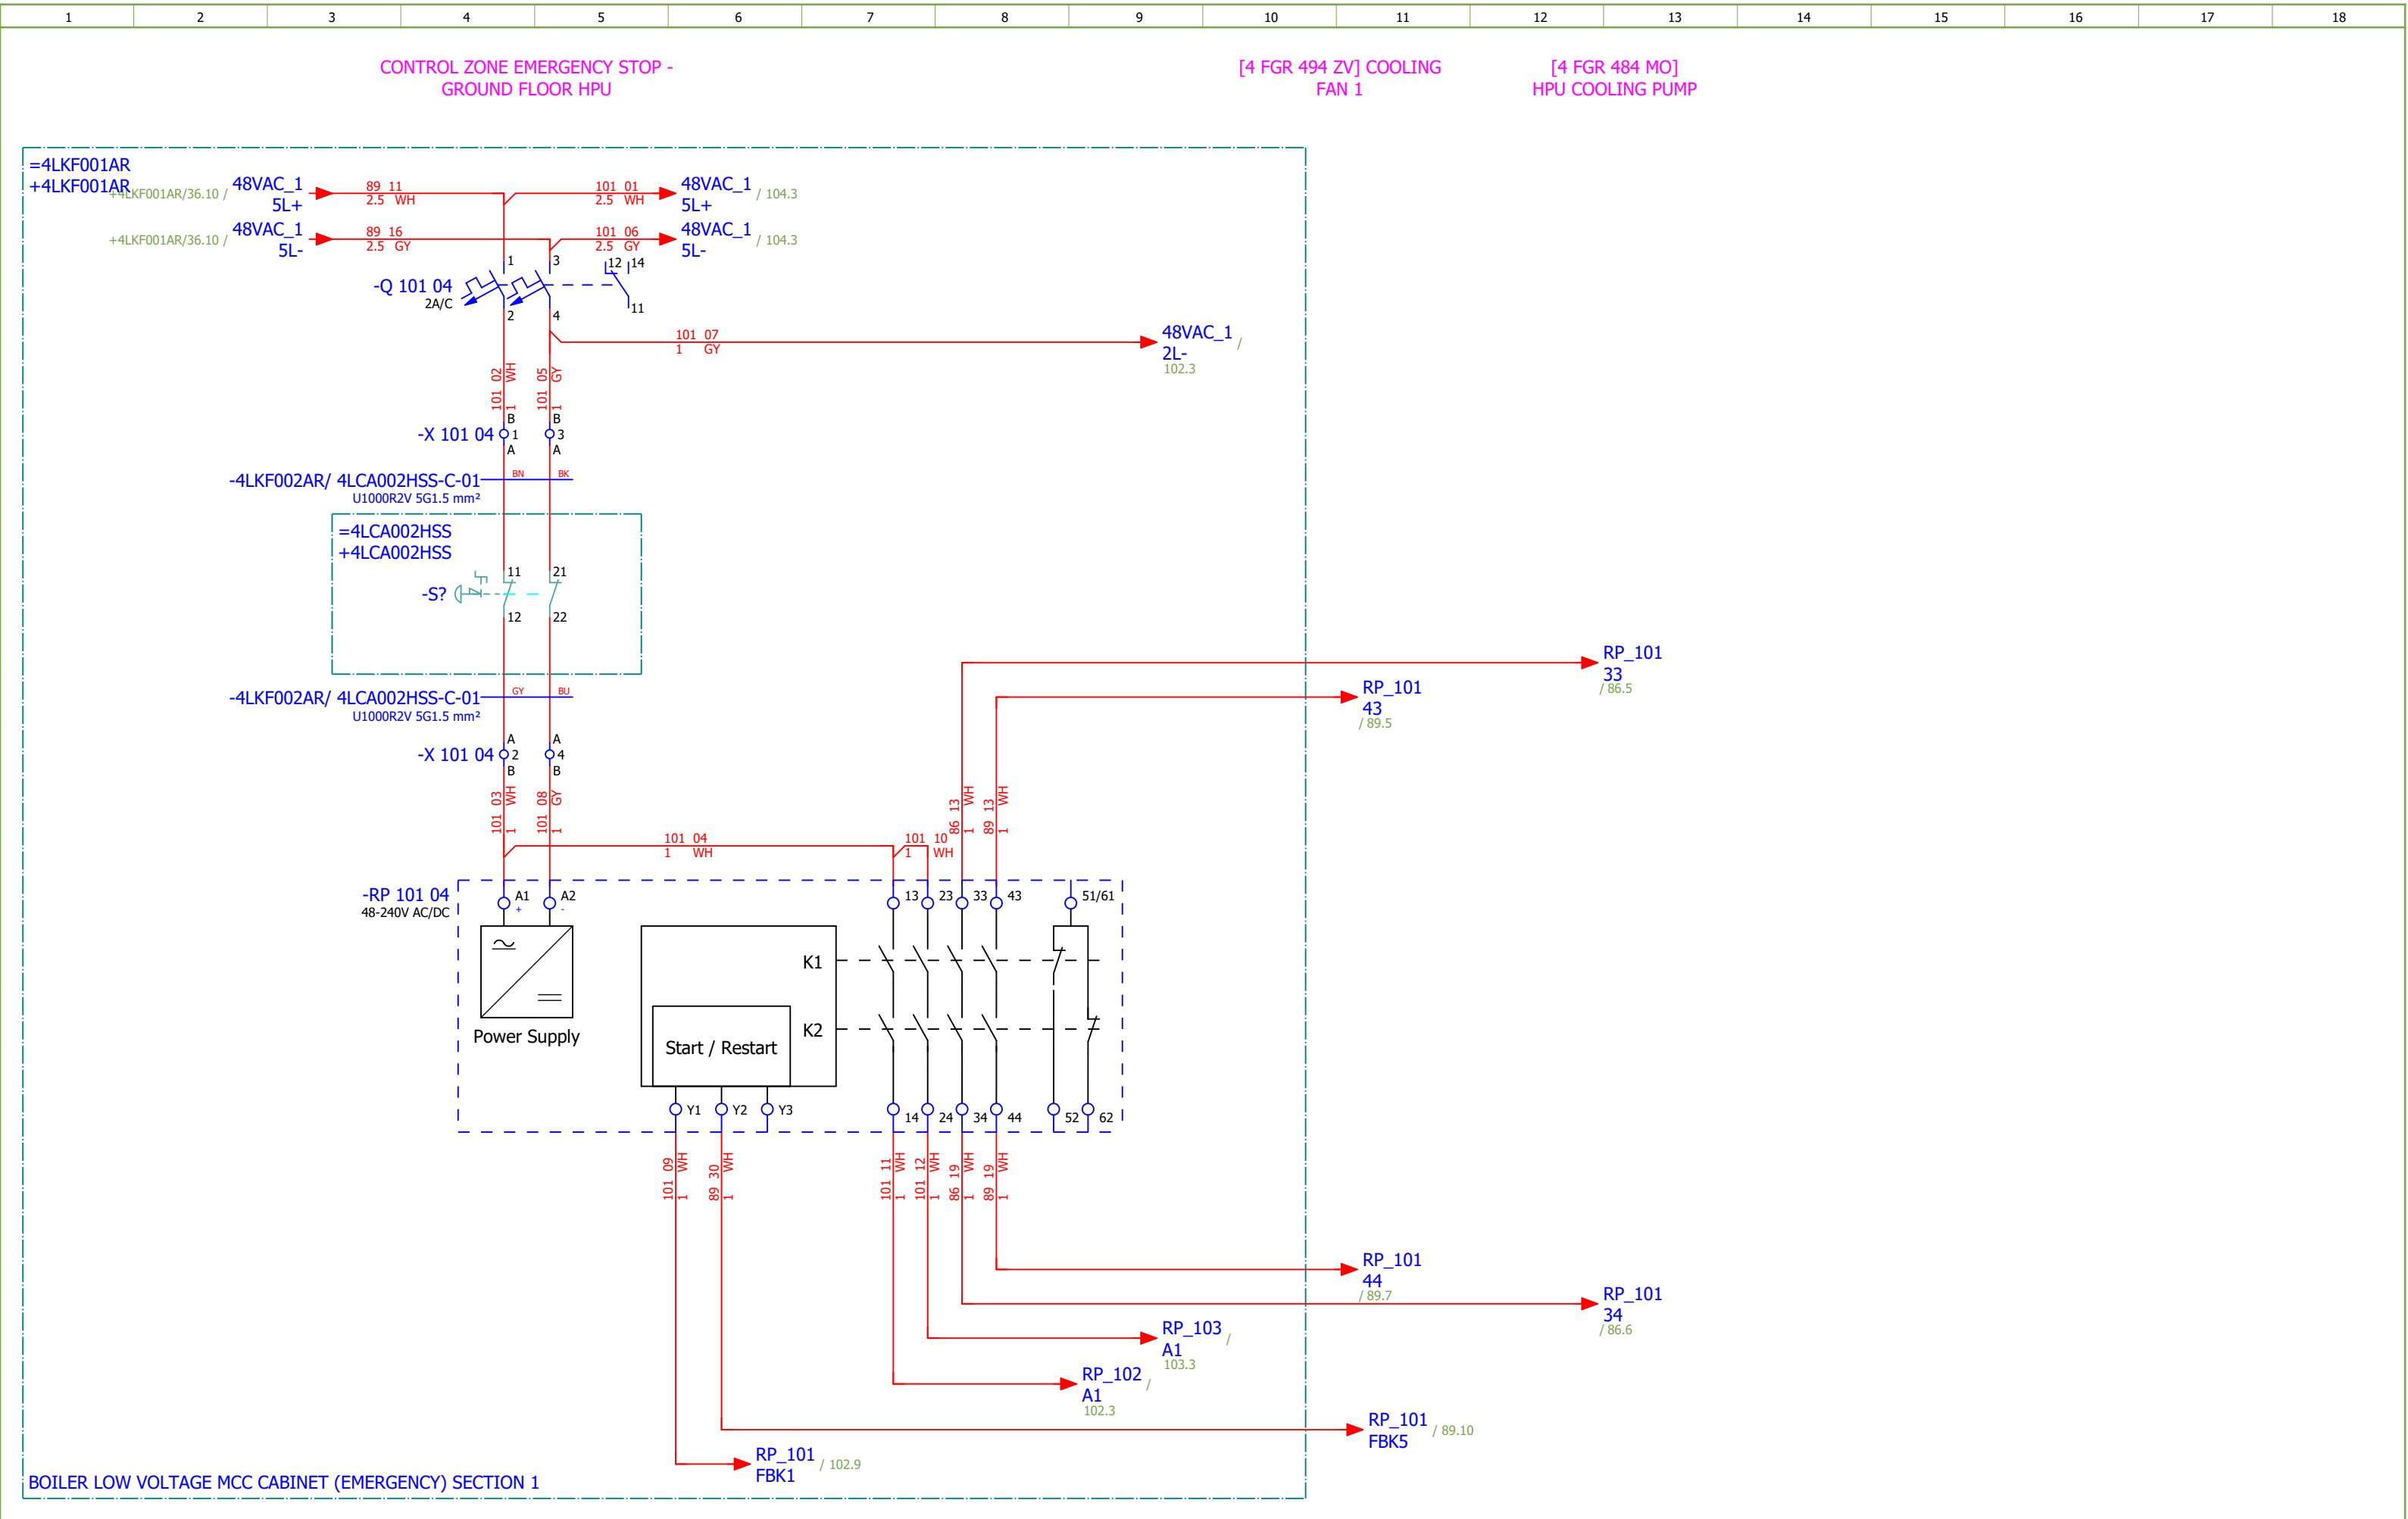

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 2		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	EMERGENCY SHUTDOWN - GROUND FLOOR HPU		Drawing designation:				BRC-4-ATEP0-1870-E		=4LKF001AR	Sheet:	101
Approved:	Grga Kolić												+4LKF002AR	Next:	102		
Format:	A3																

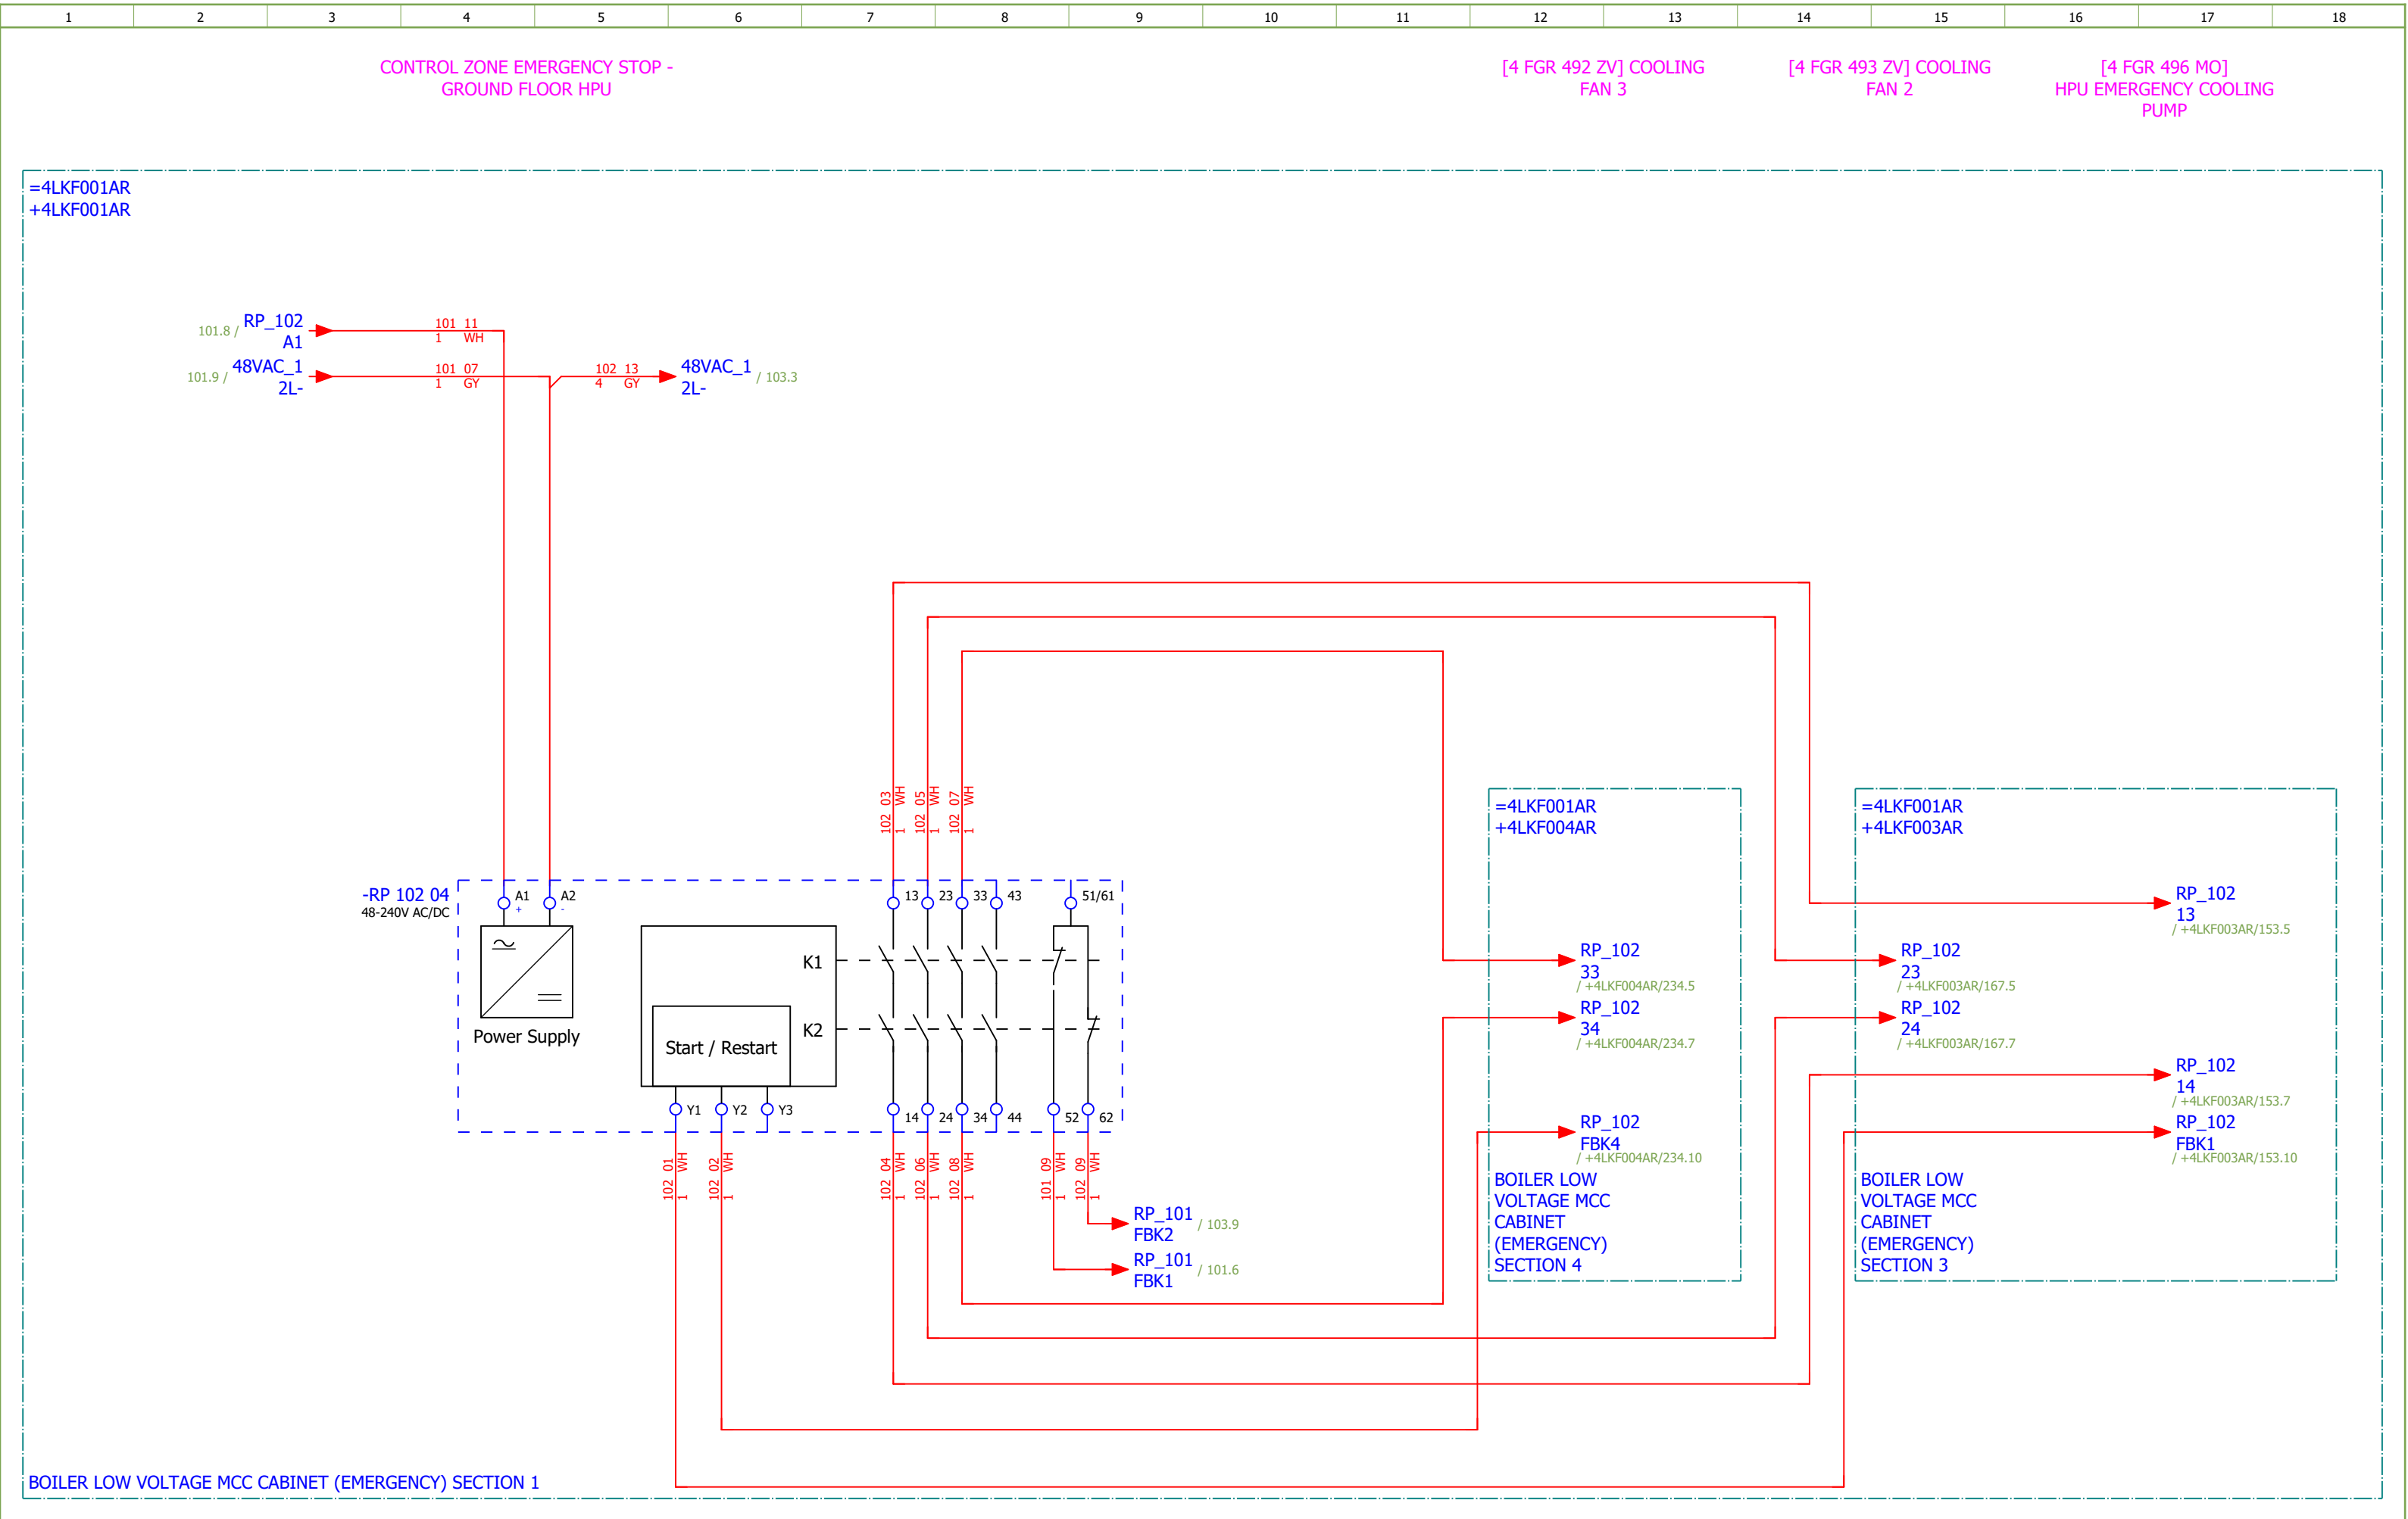

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 2		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E				
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	EMERGENCY SHUTDOWN - GROUND FLOOR HPU		Drawing designation:						=4LKF001AR		Sheet:	102		
Approved:	Grga Kolić																+4LKF002AR		Next:	103
Format:	A3																			




Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 2		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Luka Božičević																#NA
Approved:	Grga Kolić				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	EMERGENCY SHUTDOWN - GROUND FLOOR HPU		Drawing designation:			=4LKF001AR			Sheet:	103
Format:	A3									BRC-4-ATEP0-1870-E			+4LKF002AR			Next:	104

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 2		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	EMERGENCY SHUTDOWN - FIRST FLOOR MIDDLE	Drawing designation:	BRC-4-ATEP0-1870-E								#NA
Approved:	Grga Kolić																
Format:	A3																

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
-XS 115 02 B 1 A A B2 A B3 A B4 A B5 A B6 A B7 A B8 A B9 A B10 A B11 A B12 A B13 A B14 A B15 A B16 A B17 A B18 A B19 A B20 A B21 A B22 A B23 A B24 A B25 A B26 A B27 A B28 A B29 A B30																	
Date:	04.12.2025.		SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 2		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	#QB
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France		Content:	SPARE		Drawing designation:	BRC-4-ATEP0-1870-E		=4LKf001AR	Sheet:	115		
Approved:	Grga Kolić												+4LKf002AR	Next:	121		
Format:	A3																


MEASUREMENT

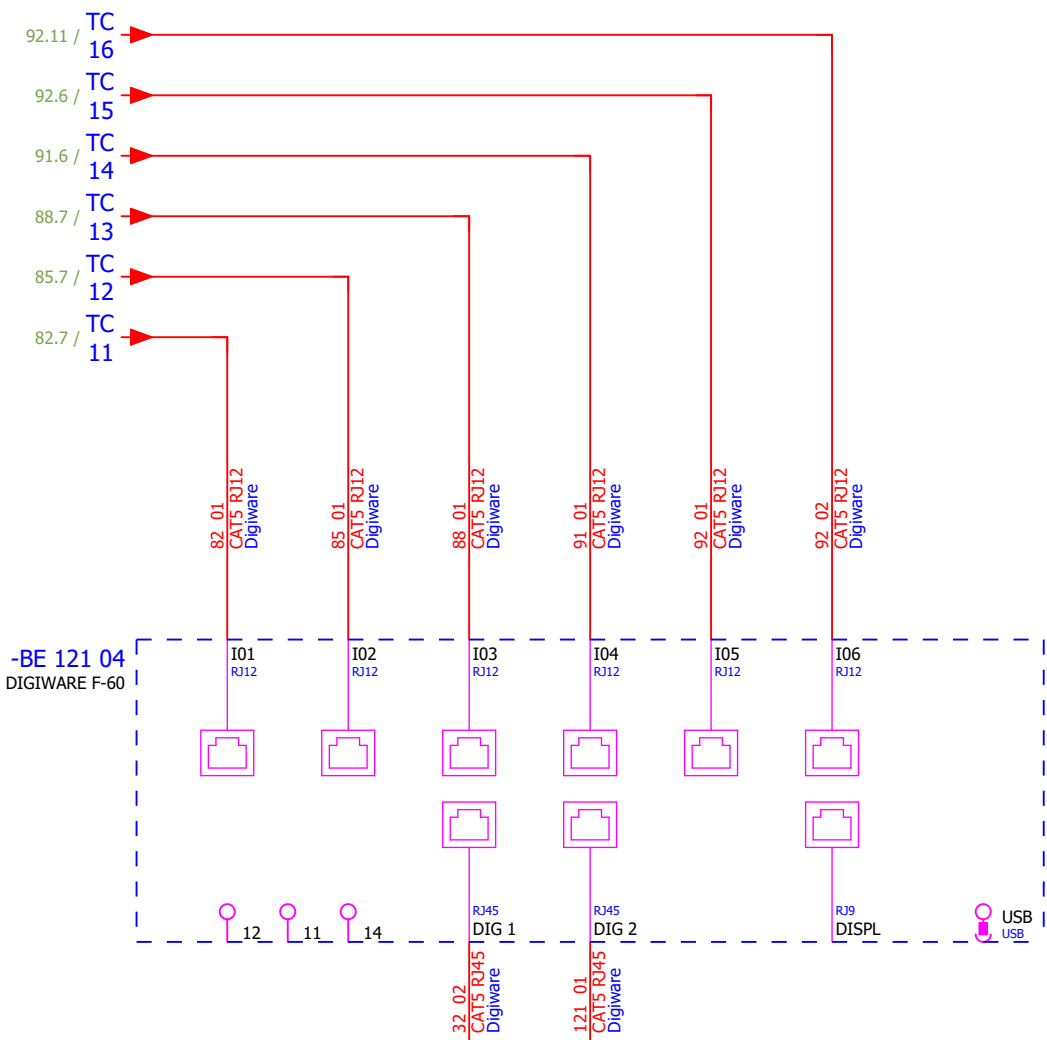

=4LKF001AR
+4LKF001AR

+4LKF001AR/32.7 / RJ45 →

BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 1

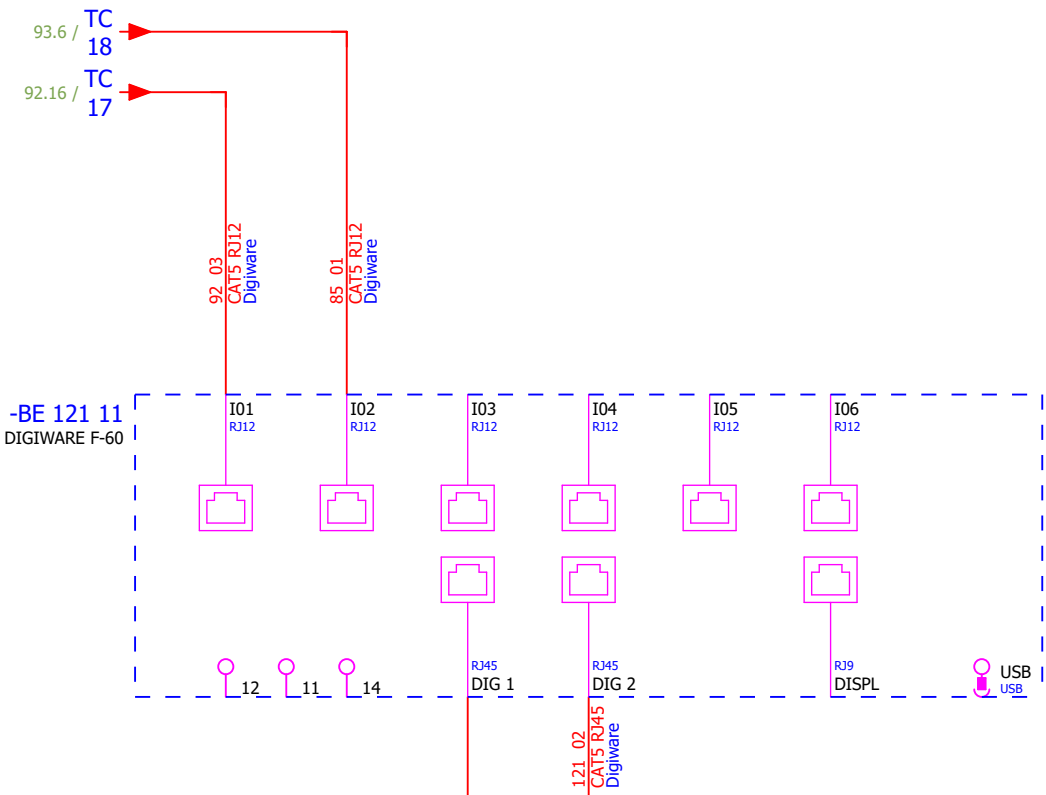

=4LKF001AR
+4LKF003AR

RJ45 / +4LKF003AR/191.7 →


BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 3

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 2		Project:	BRC-4	Unit & Issuer:	Number:	Revision:	E		#Z
Drawn:	Luka Božičević															
Approved:	Grga Kolić				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	Summarized parts list		Drawing designation:				=4LKF001AR	Sheet:	130
Format:	A3									BRC-4-ATEP0-1870-E				+4LKF002AR	Next:	131


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 2		Project:	BRC-4	Unit & Issuer:	Number:	Revision:	E	#Z	
Drawn:	Luka Božičević															
Approved:	Grga Kolić				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	Summarized parts list		Drawing designation:				=4LKF001AR	Sheet:	131
Format:	A3									BRC-4-ATEP0-1870-E				+4LKF002AR	Next:	132

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 2		Project:	BRC-4	Unit & Issuer:	Number:	Revision:	E		#Z
Drawn:	Luka Božičević															
Approved:	Grga Kolić				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	Summarized parts list		Drawing designation:				=4LKF001AR	Sheet:	132
Format:	A3									BRC-4-ATEP0-1870-E				+4LKF002AR	Next:	133


Terminal diagram

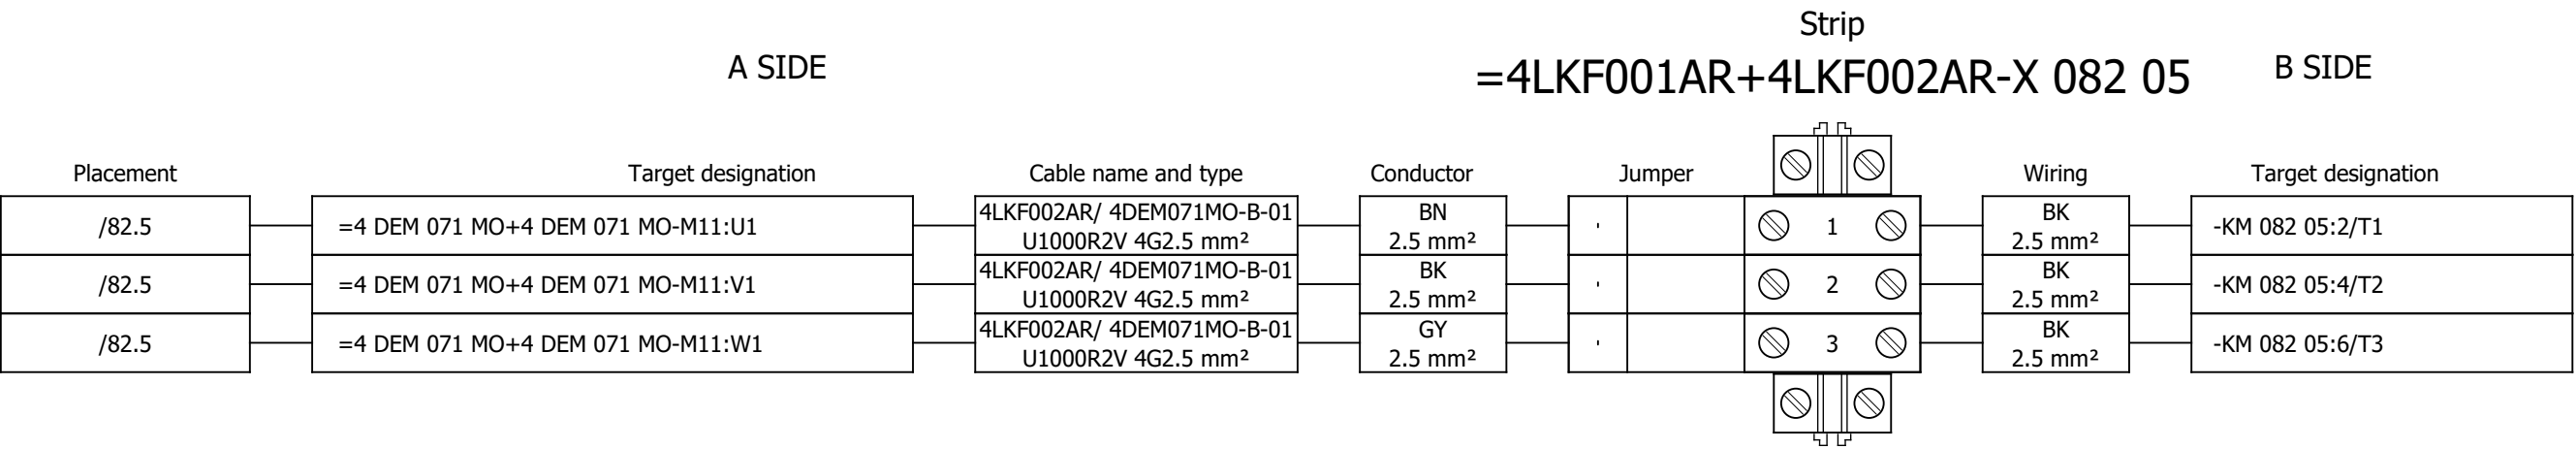


Terminal diagram

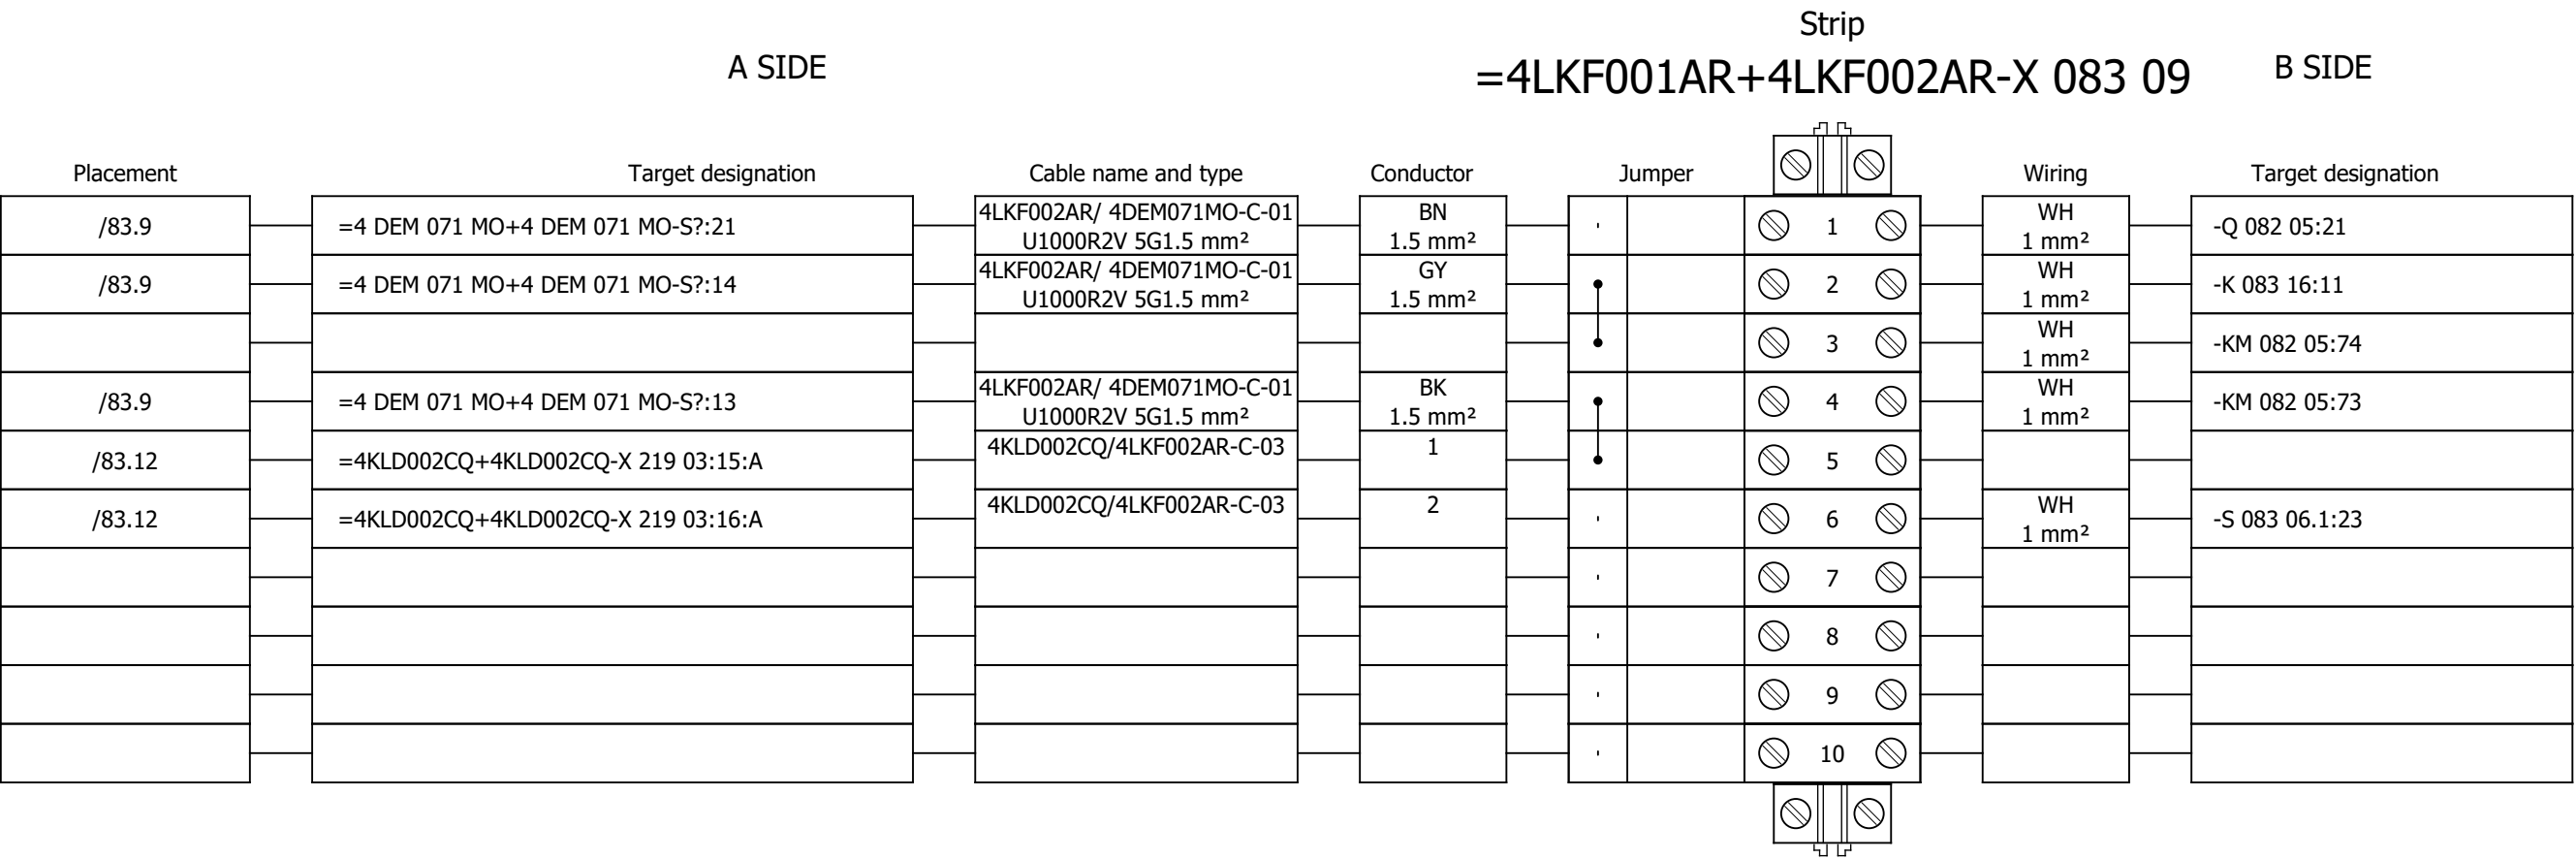


Terminal diagram

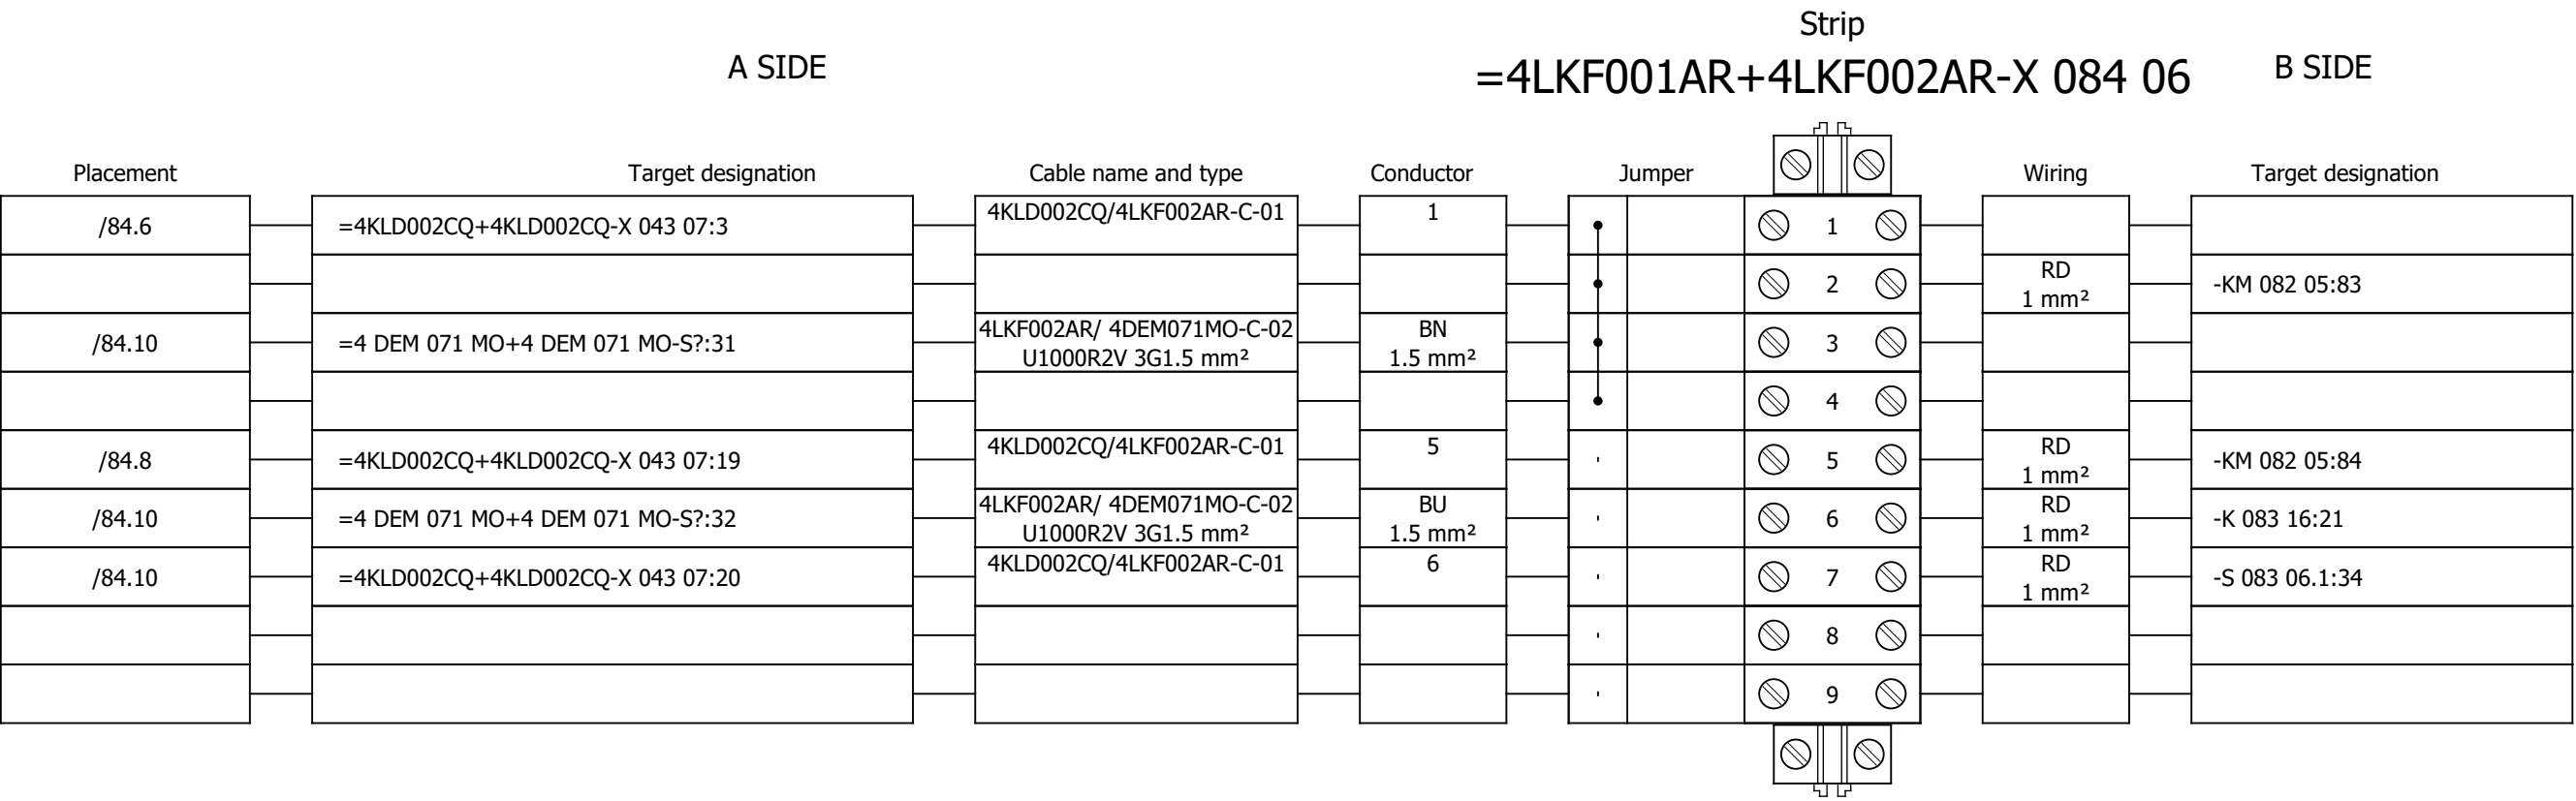


Terminal diagram

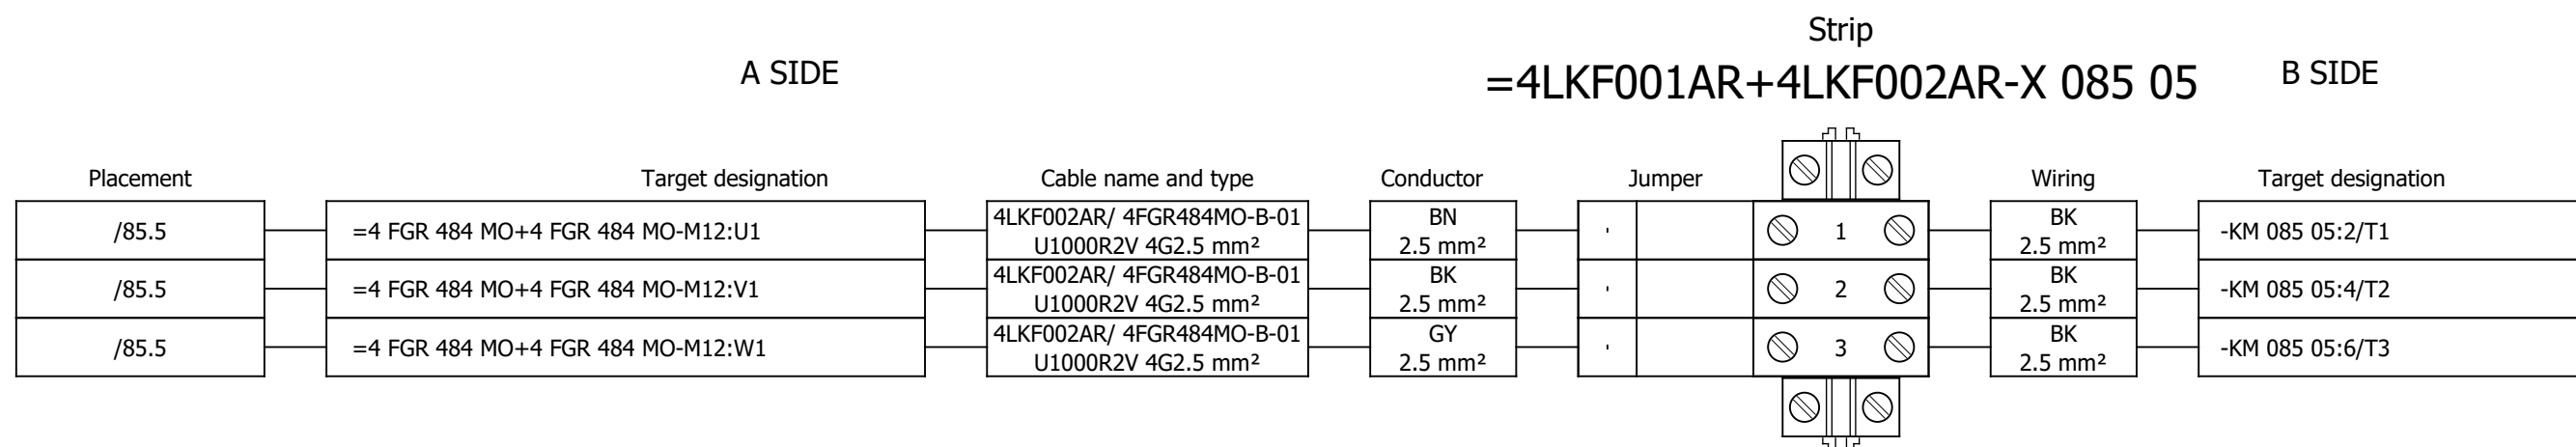


Terminal diagram

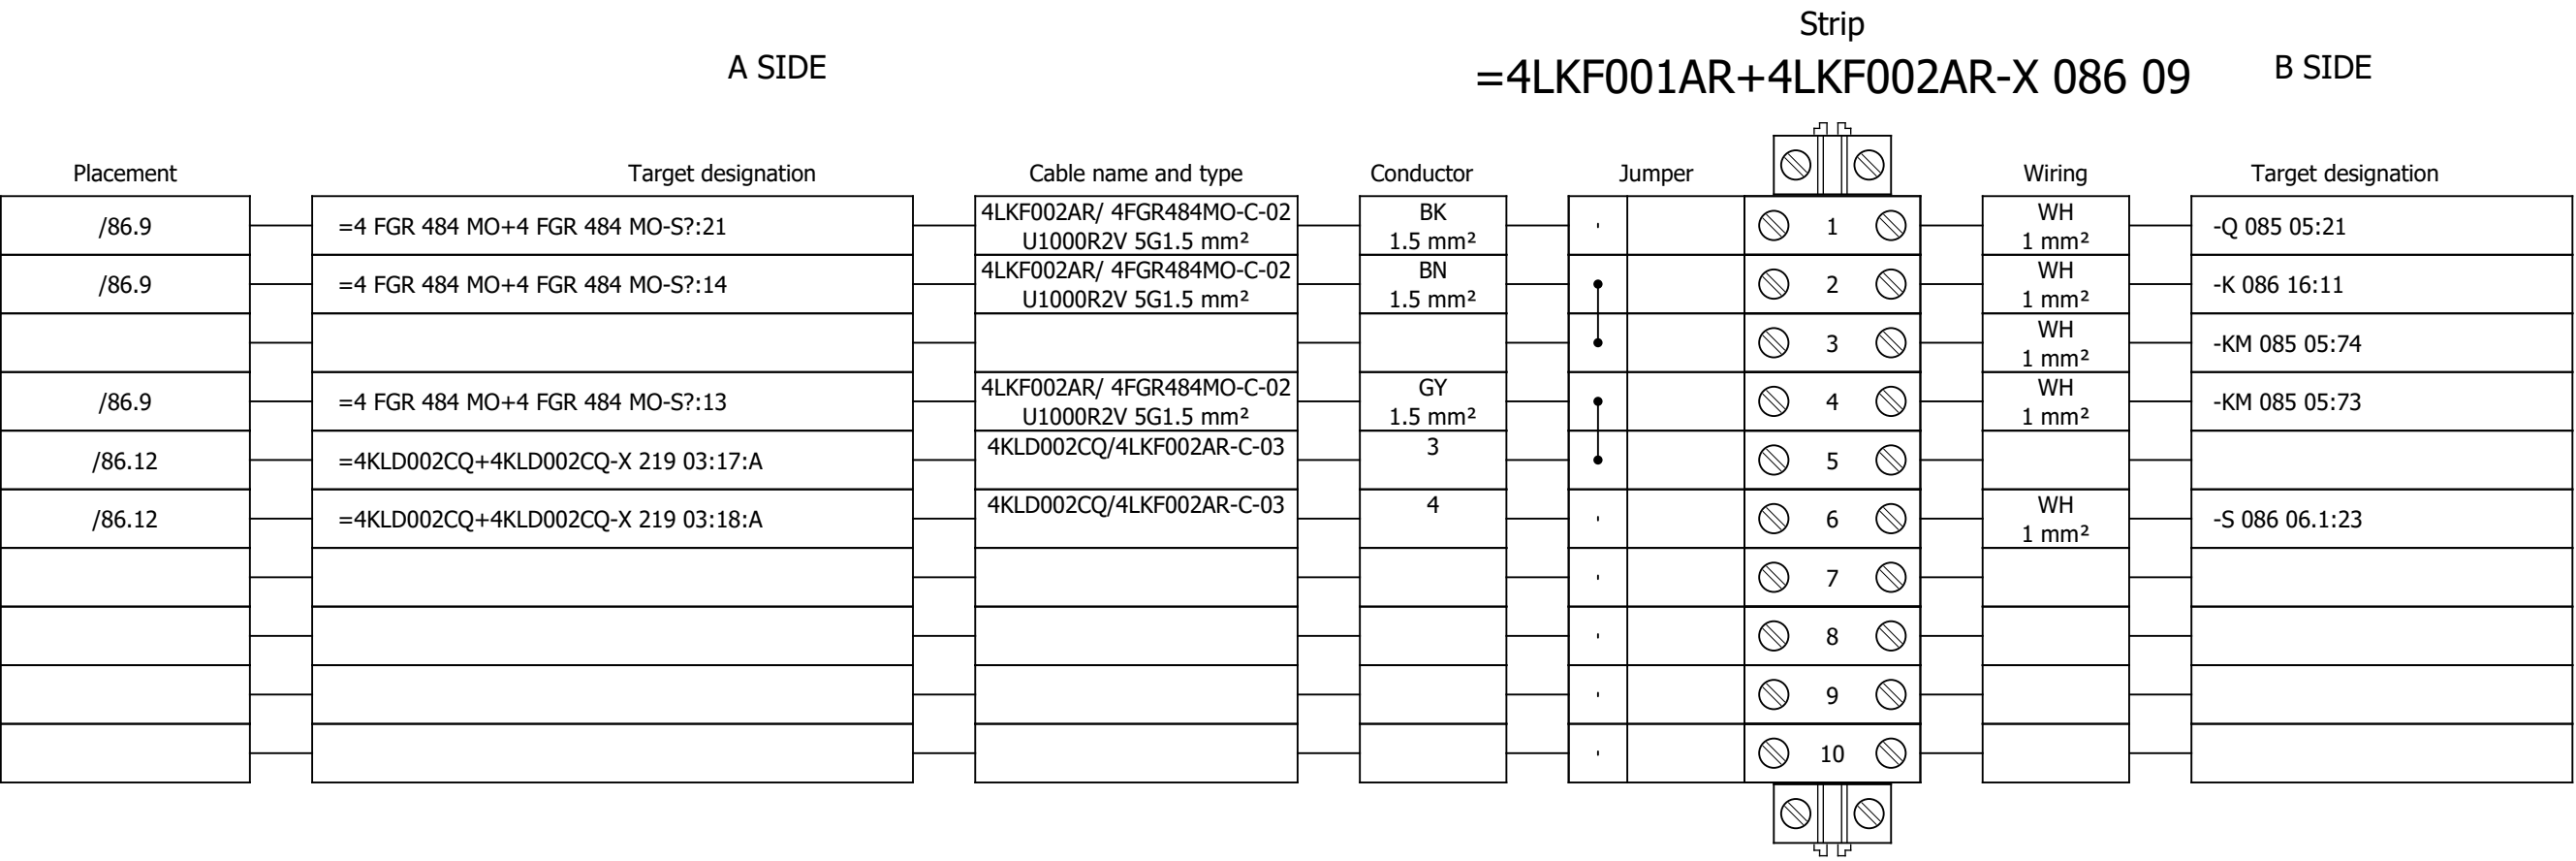


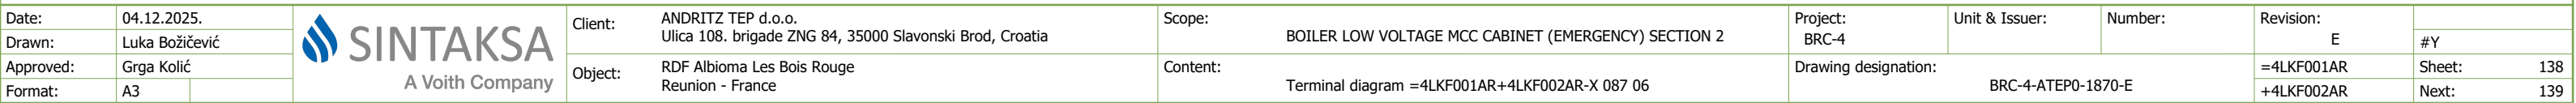


Terminal diagram

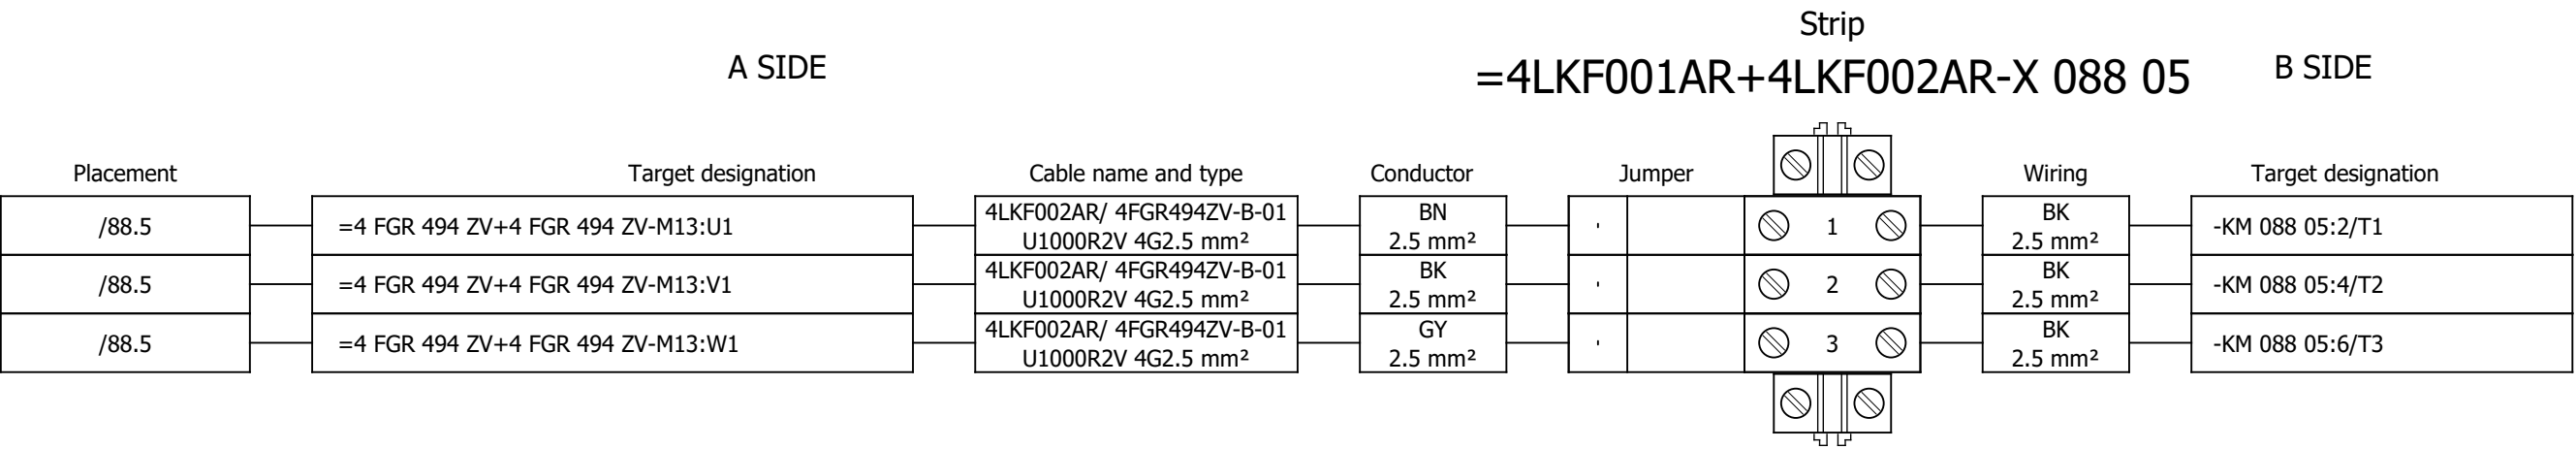


Terminal diagram

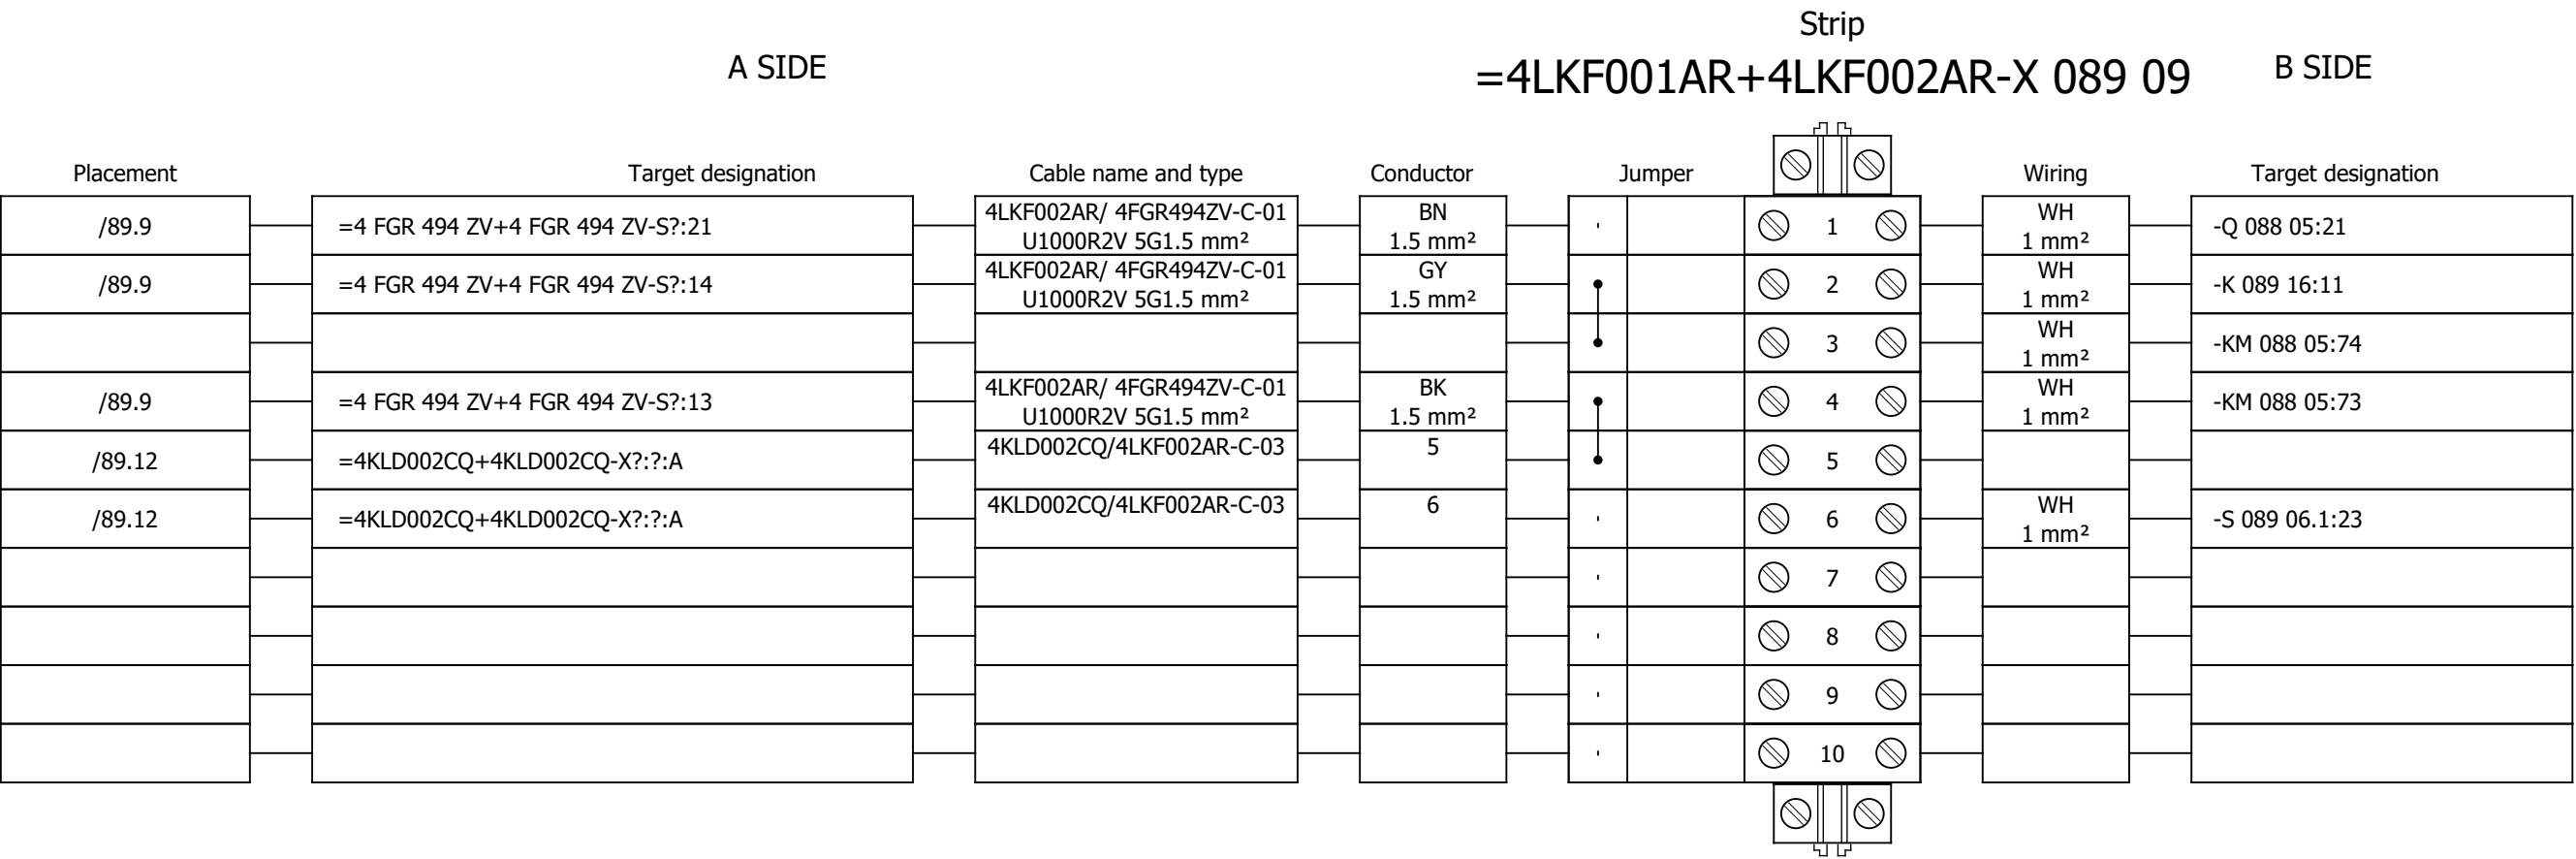


Terminal diagram

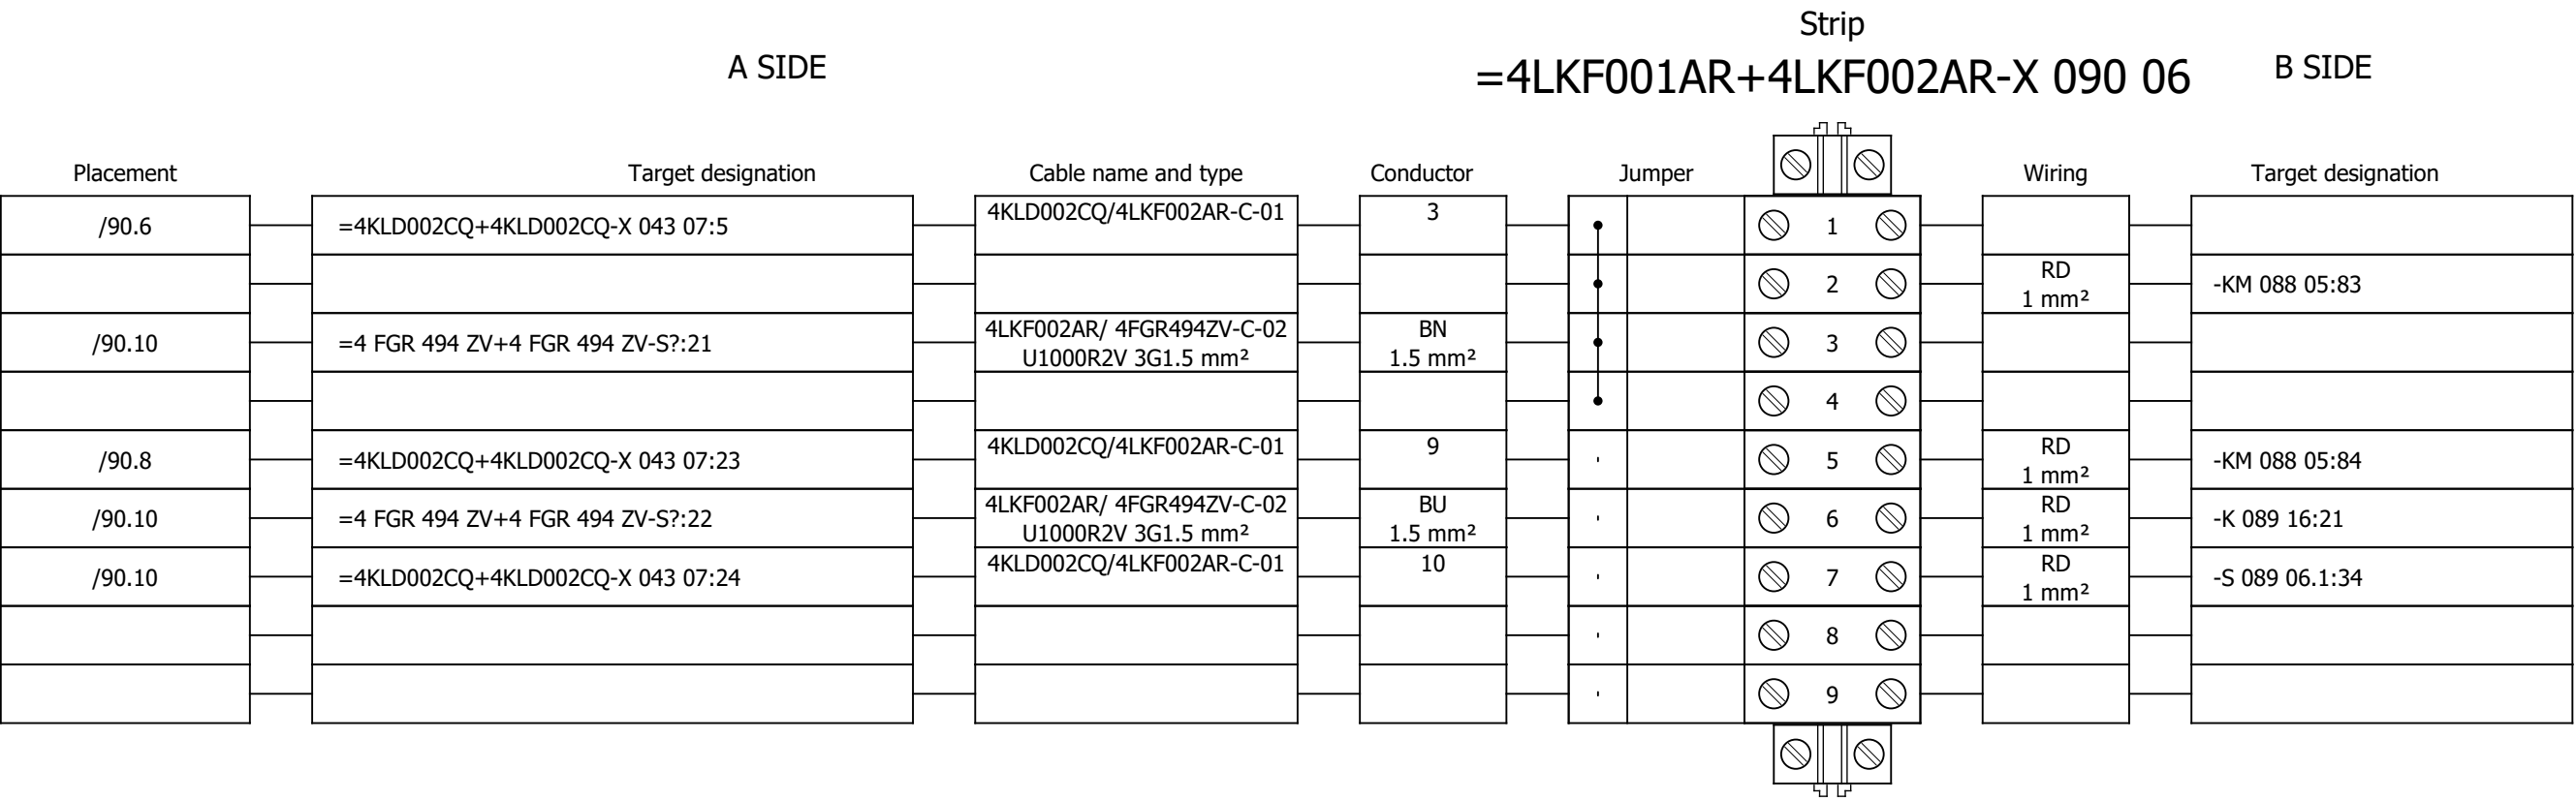


Terminal diagram

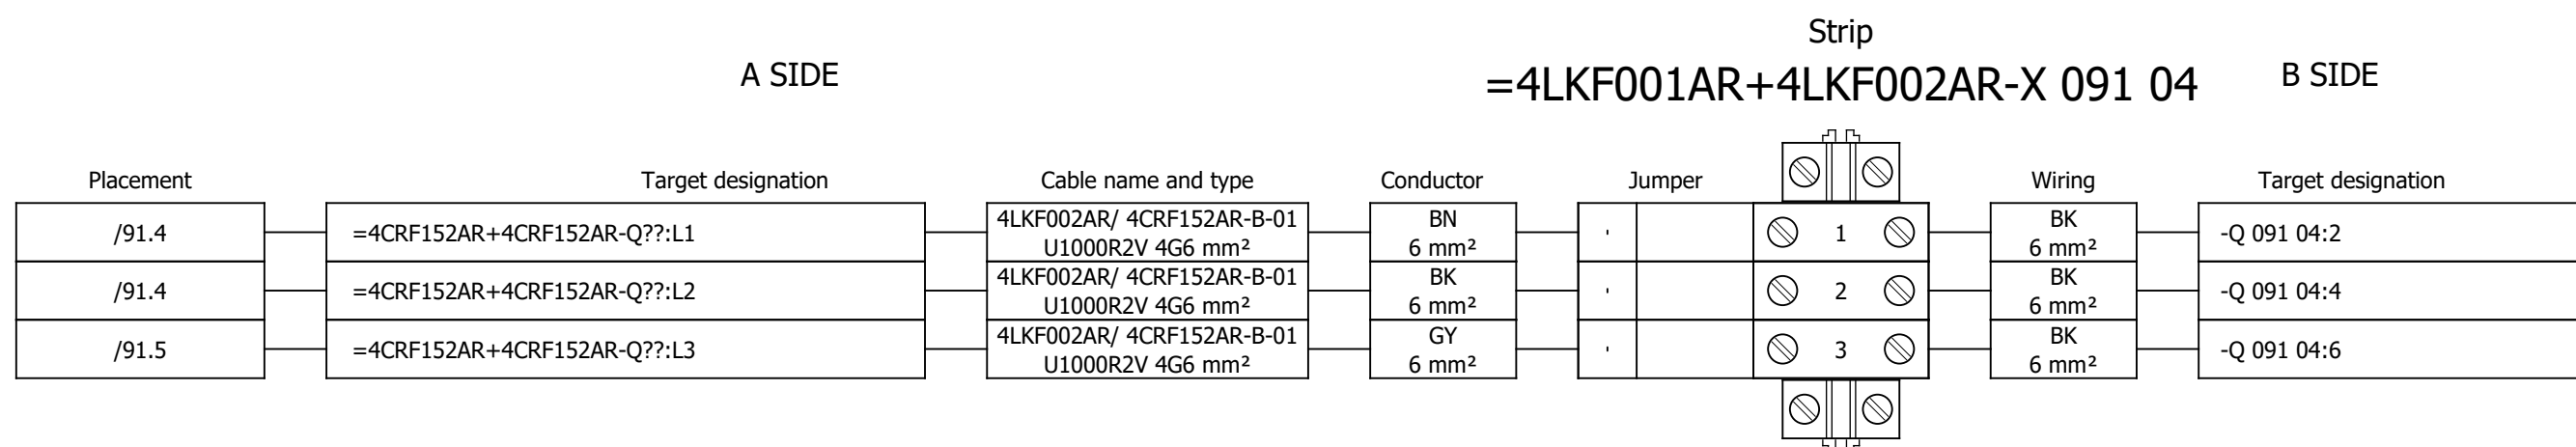


Terminal diagram

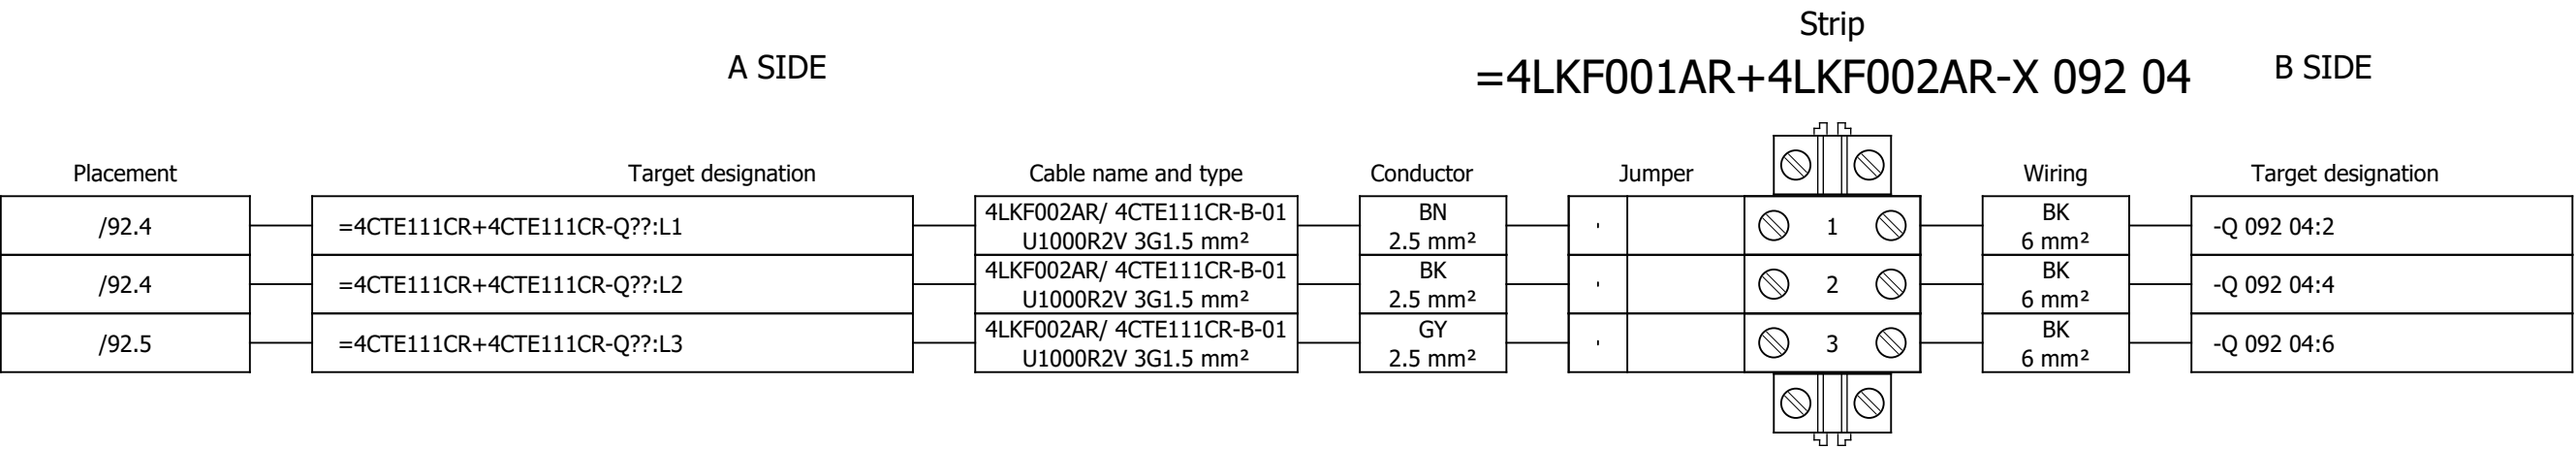


Terminal diagram

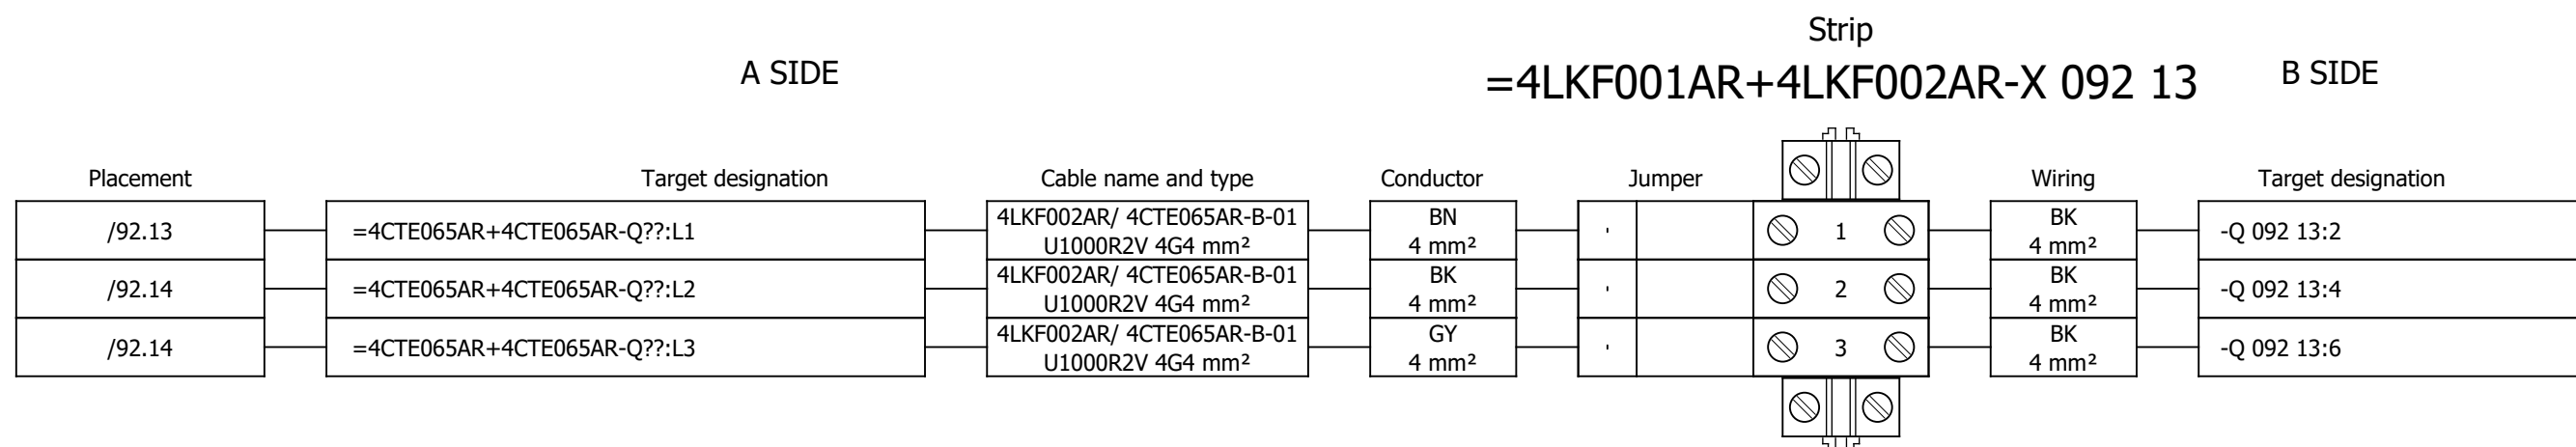


Terminal diagram

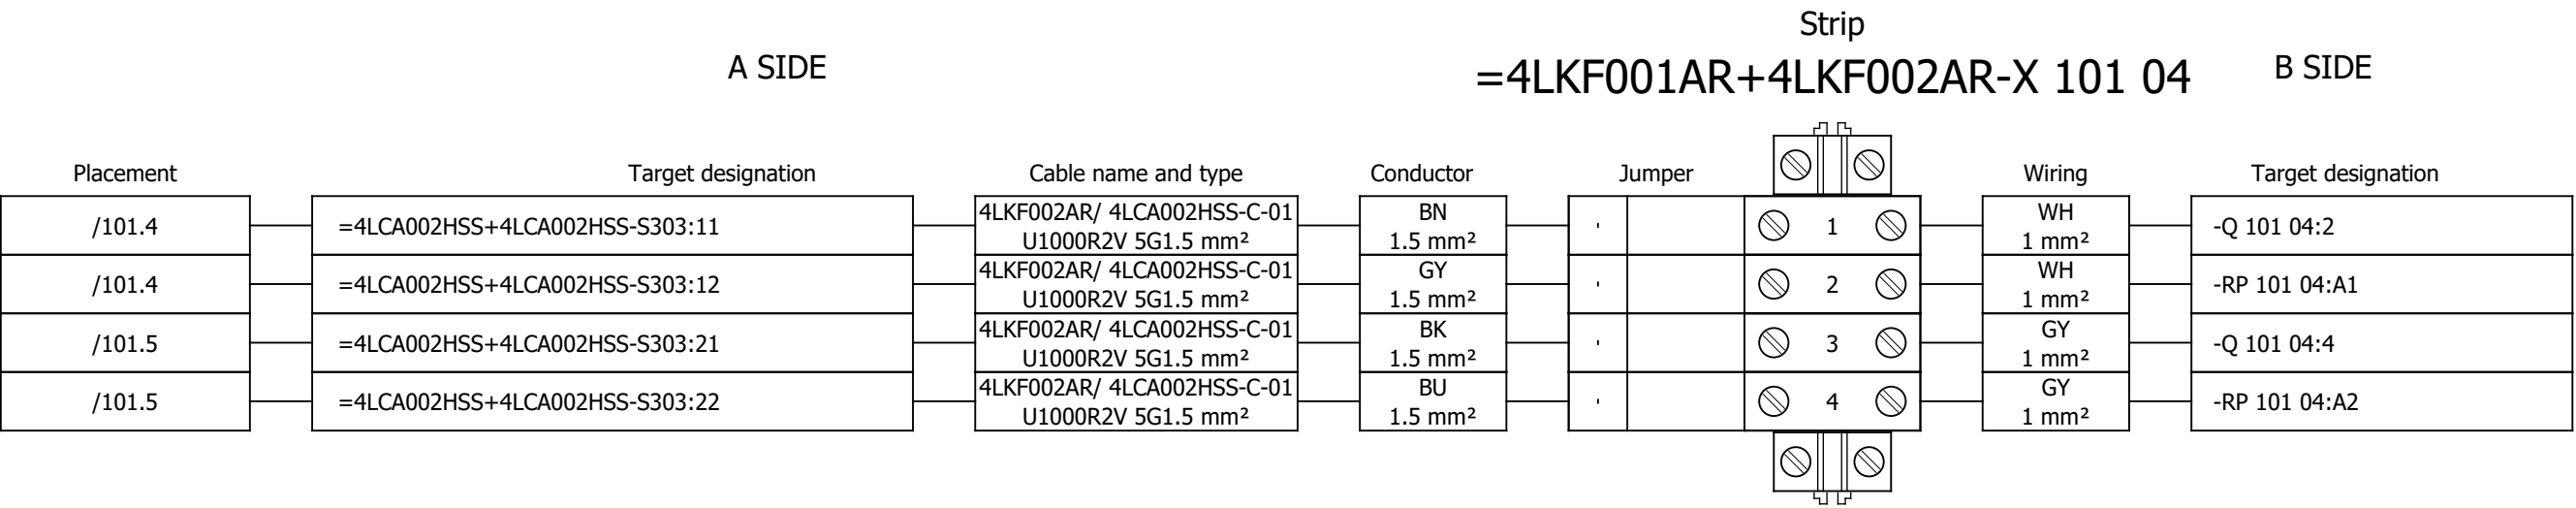


Terminal diagram

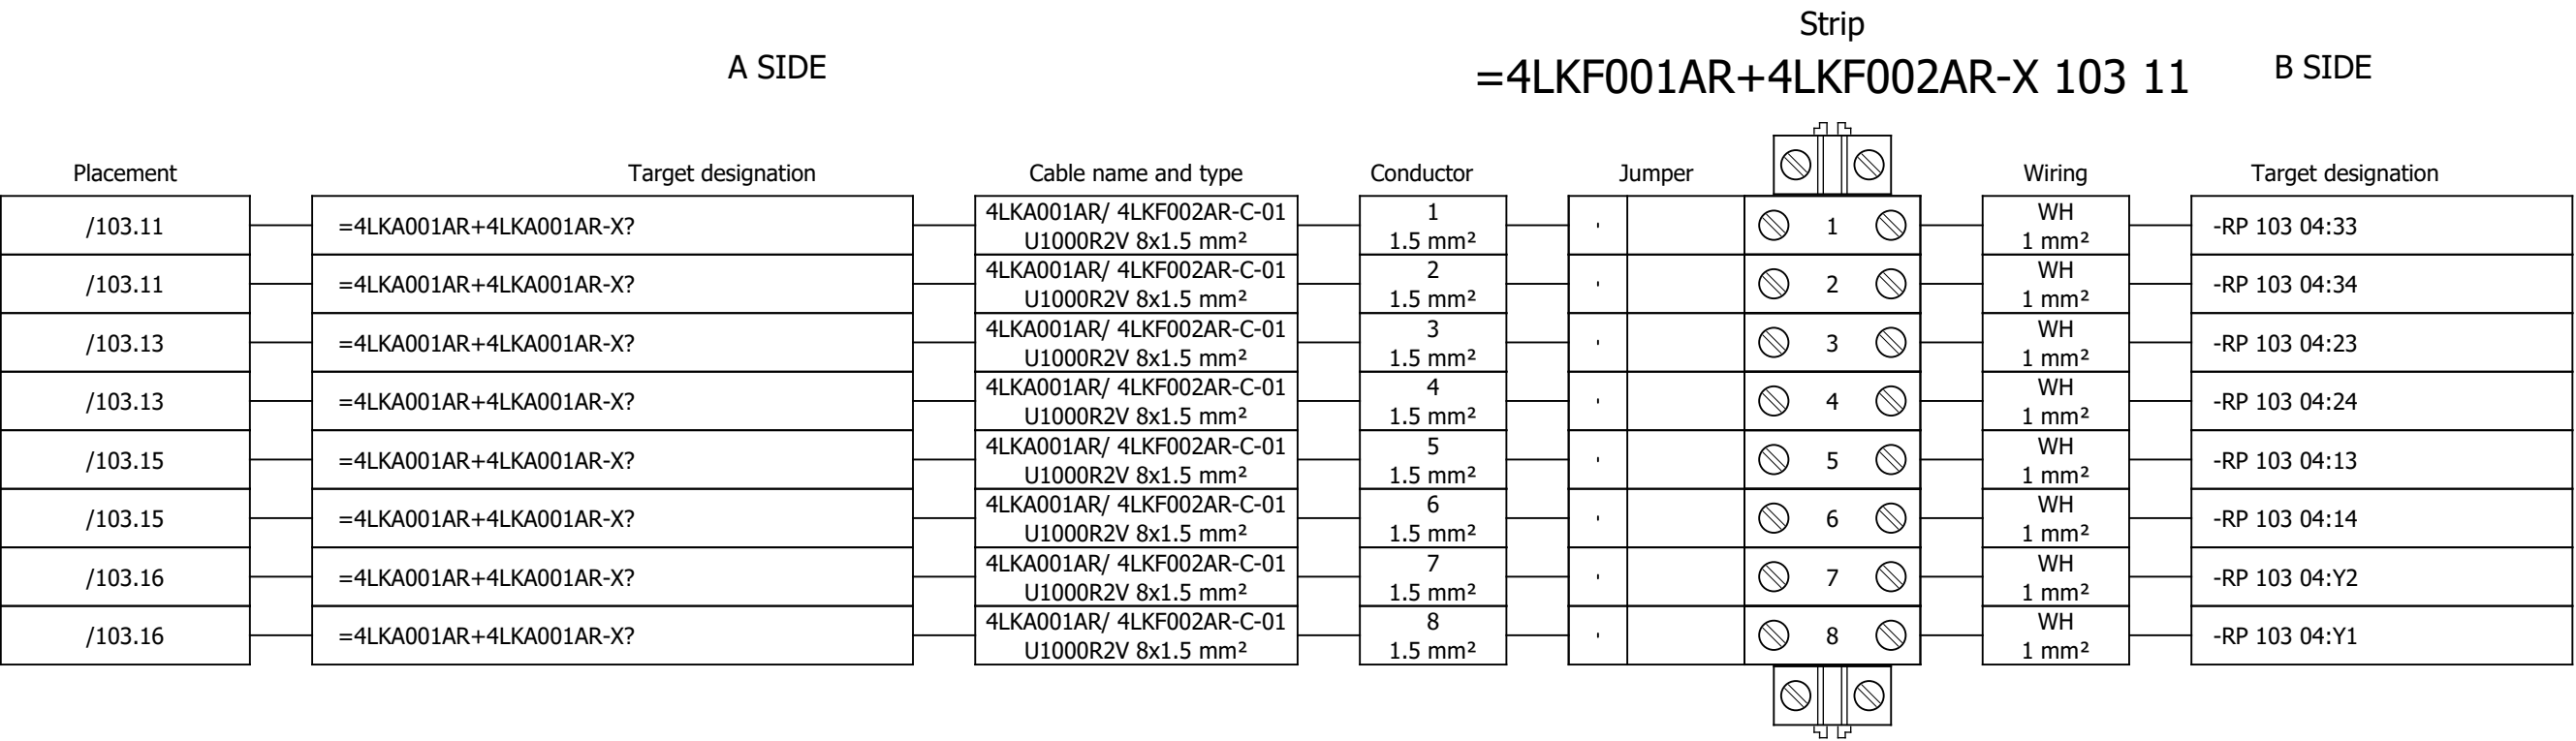

Terminal diagram

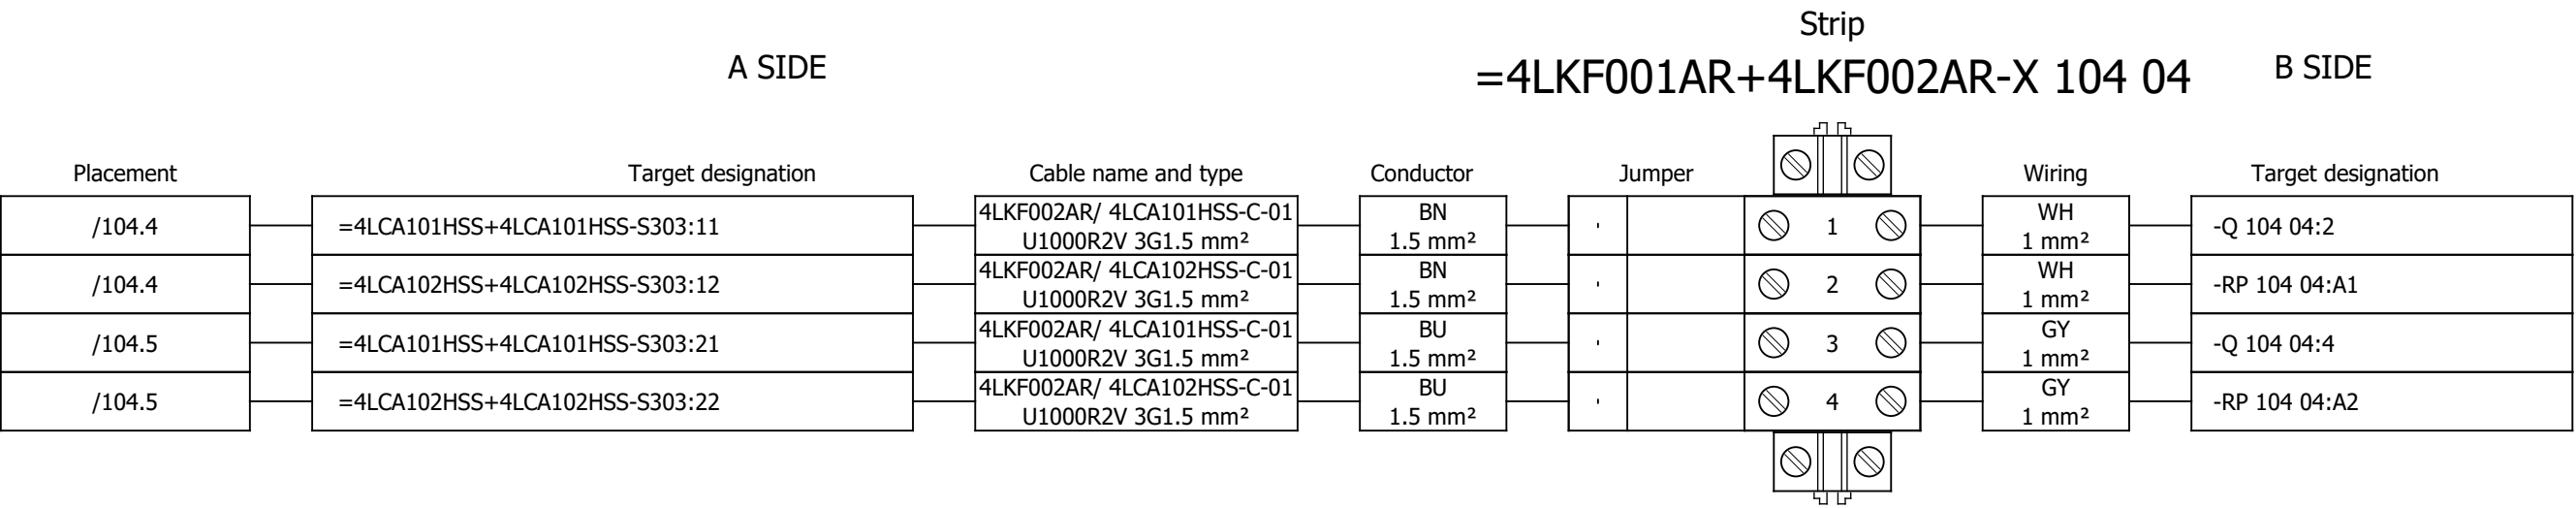

Terminal diagram

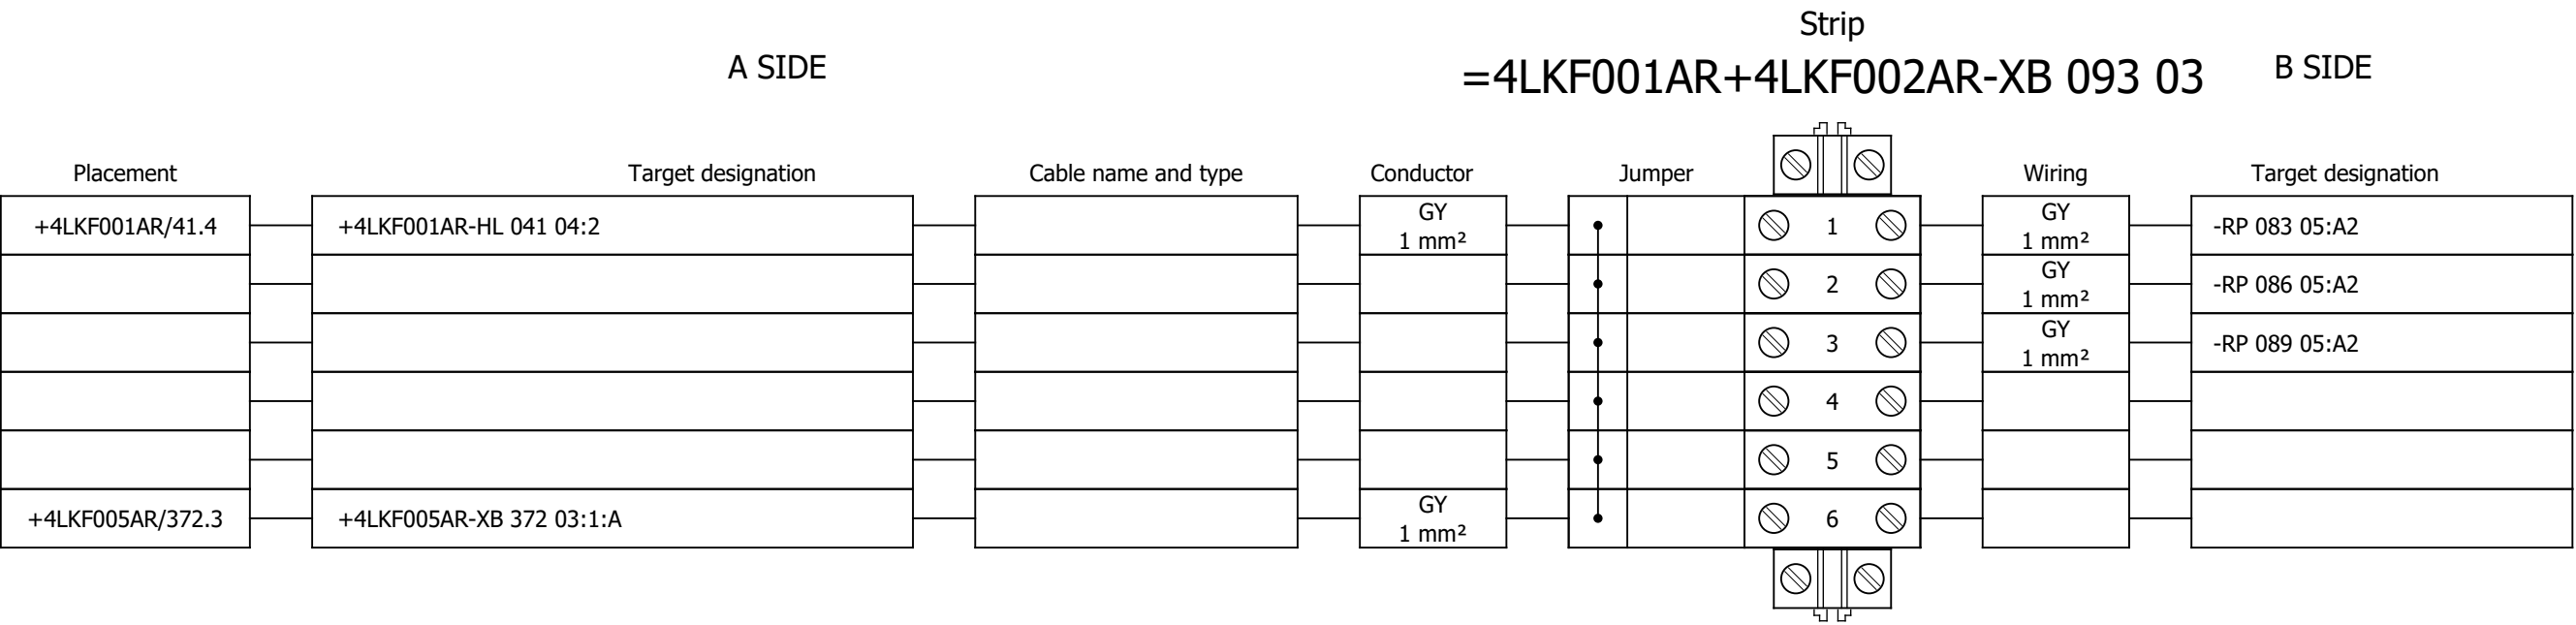


Strip
=4LKF001AR+4LKF002AR-XS 111 03 B SIDE

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 2		Project:	BRC-4	Unit & Issuer:	Number:	Revision:	E	
Drawn:	Luka Božičević														#Y
Approved:	Grga Kolić														
Format:	A3				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	Terminal diagram =4LKF001AR+4LKF002AR-XS 111 03		Drawing designation:		BRC-4-ATEP0-1870-E		=4LKF001AR	Sheet:
													+4LKF002AR	Next:	151

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 2		Project:	BRC-4	Unit & Issuer:		Number:		Revision:	E	
Drawn:	Luka Božičević																#Y
Approved:	Grga Kolić				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	Terminal diagram =4LKF001AR+4LKF002AR-XS 115 02		Drawing designation:					=4LKF001AR	Sheet:	151
Format:	A3									BRC-4-ATEP0-1870-E					+4LKF002AR	Next:	152

Terminal diagram

A SIDE					Strip					B SIDE				
=4LKF001AR+4LKF002AR-XS 115 02														
Placement	Target designation		Cable name and type		Conductor		Jumper				Wiring		Target designation	
										1				
										2				
										3				
										4				
										5				
										6				
										7				
										8				
										9				
										10				
										11				
										12				
										13				
										14				
										15				
										16				
										17				
										18				
										19				
										20				
										21				
										22				
										23				
										24				
										25				


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
	Sorting number	Part number	Quantity	Manufacturer	Device	Device description							Device designation				
	23.	SE.18726	2	Schneider Electric	Miniature circuit breaker NG125H 25A 3P C	Range: Acti9 Poles description: 3P [In] rated current: 25 A at 40 °C Network type: DC, AC Trip unit technology: Thermal-magnetic Curve code: C Breaking capacity: 36 kA Icu at 380...415 V AC 50/60 Hz conforming to EN/IEC 60947-2							-Q 092 09;-Q 092 13				
	24.	SE.C16F3TM125	1	Schneider Electric	Circuit breaker, ComPacT NSX160B	Circuit breaker ComPacT NSX160B, 36kA at 415VAC, TMD trip unit 125A, 3 poles 3d							-QB 081 09				
	25.	SE.29450	1	Schneider Electric	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV							-QB 081 09				
	26.	SE.LV429337T	1	Schneider Electric	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40							-QB 081 09				
	27.	SE.LVS04033	1	Schneider Electric	LINERGY DP	LINERGY DP 3P D.BLK/COMPACT 250A 27HOLES							-QB 081 09				
	28.	SE.LV429517	1	Schneider Electric	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250							-QB 081 09				
	29.	PXC.2950129	1	Phoenix Contact	Component for protective circuit	Diode module, with 14 diodes, common anode, diode type 1N 4007							-R 093 03				
	30.	PXC.2954882	1	Phoenix Contact	Component for protective circuit	Diode module, with eight diodes, common anode, diode type 1N 5408							-R 093 06				
	31.	PXC.2950116	1	Phoenix Contact	Component for protective circuit	Diode module, with 14 diodes, common cathode, diode type 1N 4007							-R 093 10				
	32.	PXC.2954879	1	Phoenix Contact	Component for protective circuit	Diode module, with eight diodes, common cathode, diode type 1N 5408							-R 093 14				
	33.	SE.XPSBAC34AP	3	Schneider Electric	Safety module	Harmony Safety Automation Estop or guard ,Harmony XPS, connected to supply terminals 48-240 V AC/DC , no inputs, screw							-RP 083 05;-RP 086 05;-RP 089 05				
	34.	SE.XB4BA21	3	Schneider Electric	Black flush complete pushbutton Ø22 spring return 1NO "unmarked"	Black flush complete pushbutton Ø22 spring return 1NO							-S 083 06;-S 086 06;-S 089 06				
	35.	SE.XB4BD33	3	Schneider Electric	Selector switch, BLACK, 1-0-2, 2NO	Metal Black Ø22 3 positions 2 NO							-S 083 06.1;-S 086 06.1;-S 089 06.1				
	36.	SE.ZBE101	3	Schneider Electric	Single contact block NO	Harmony XB4 Silver alloy 1 NO							-S 083 06.1;-S 086 06.1;-S 089 06.1				
	37.	SOC.47506030	8	Socomec	TORES LOCATION SENSOR DELTA IP-30 (30mm)	Fault locating differential transformer IP-30 Maximal diameter of cable: 30mm							-TC 082 05;-TC 085 05;-TC 088 05;-TC 091 04;-TC 09 2 04;-TC 092 09;-TC 092 14;-TC 093 04				
	38.	SOC.47290590	8	Socomec	ISOM T-15	Connection adaptor ISOM T-15 to ISOM Digiware F-60 modules							-TC 082 05;-TC 085 05;-TC 088 05;-TC 091 04;-TC 09 2 04;-TC 092 09;-TC 092 14;-TC 093 04				
	39.	SOC.192T2106	1	Socomec	Bar or cable-through CT TCB 17-20 60A/5A Class 1 1VA	Accuracy class: 0.2s — 0.5 or 1. Dielectric quality: 3 kV — 50 Hz - 1 min. Operating frequency: 50 — 60 Hz. Permanent overload: 1.2 In. Insulation class: E (120 °C).							-TCU 091 05				
	40.	SOC.48290501	3	Socomec	Solid current sensor TE-18 18mm 25-63A	Solid through terminal block 18mm 25-63A Voltage: 800 V Dimensions max 24 passage de cable: D:8,6mm							-TCU 091 05.1;-TCV 091 04;-TCW 091 04				
	41.	PXC.3209510	116	Phoenix Contact	PT 2,5 Feed-through terminal block	number of connections: 2 number of positions: 1 connection method: Push-in connection Rated cross section: 2.5 mm2 cross section: 0.14 mm2 - 4 mm2 mounting type: NS 35/7,5, NS 35/15 color: gray							-X 082 05;-X 083 09;-X 084 06;-X 085 05;-X 086 09;-X 087 06;-X 088 05;-X 089 09;-X 090 06;-XB 093 03;-XS 111 03;-XS 115 02				


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
	Sorting number	Part number	Quantity	Manufacturer	Device	Device description							Device designation				
	42.	PXC.3044131	9	Phoenix Contact	UT 6 - Feed-through terminal block	Feed-through terminal block nom. voltage: 1000 V nominal current: 41 A number of connections: 2 connection method: Screw connection Rated cross section: 6 mm2 cross section: 0.2 mm2 - 10 mm2 mounting type: NS 35/7,5, NS 35/15 color: gray							-X 091 04;-X 092 04				
	43.	PXC.3211757	6	Phoenix Contact	PT 4 Feed-through terminal block	Feed-through terminal block, nom. voltage: 800 V, nominal current: 32 A, number of connections: 2, connection method: Push-in connection, Rated cross section: 4 mm2, cross section: 0.2 mm2 - 6 mm2, mounting type: NS 35/7,5, NS 35/15, color: gray							-X 092 09;-X 092 13				

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
	Sorting number	Part number	Quantity	Manufacturer	Device	Device description							Device designation				
	23.	SE.18726	2	Schneider Electric	Miniature circuit breaker NG125H 25A 3P C	Range: Acti9 Poles description: 3P [In] rated current: 25 A at 40 °C Network type: DC, AC Trip unit technology: Thermal-magnetic Curve code: C Breaking capacity: 36 kA Icu at 380...415 V AC 50/60 Hz conforming to EN/IEC 60947-2							-Q 092 09;-Q 092 13				
	24.	SE.C16F3TM125	1	Schneider Electric	Circuit breaker, ComPacT NSX160B	Circuit breaker ComPacT NSX160B, 36kA at 415VAC, TMD trip unit 125A, 3 poles 3d							-QB 081 09				
	25.	SE.29450	1	Schneider Electric	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV							-QB 081 09				
	26.	SE.LV429337T	1	Schneider Electric	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40							-QB 081 09				
	27.	SE.LVS04033	1	Schneider Electric	LINERGY DP	LINERGY DP 3P D.BLK/COMPACT 250A 27HOLES							-QB 081 09				
	28.	SE.LV429517	1	Schneider Electric	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250							-QB 081 09				
	29.	PXC.2950129	1	Phoenix Contact	Component for protective circuit	Diode module, with 14 diodes, common anode, diode type 1N 4007							-R 093 03				
	30.	PXC.2954882	1	Phoenix Contact	Component for protective circuit	Diode module, with eight diodes, common anode, diode type 1N 5408							-R 093 06				
	31.	PXC.2950116	1	Phoenix Contact	Component for protective circuit	Diode module, with 14 diodes, common cathode, diode type 1N 4007							-R 093 10				
	32.	PXC.2954879	1	Phoenix Contact	Component for protective circuit	Diode module, with eight diodes, common cathode, diode type 1N 5408							-R 093 14				
	33.	SE.XPSBAC34AP	3	Schneider Electric	Safety module	Harmony Safety Automation Estop or guard ,Harmony XPS, connected to supply terminals 48-240 V AC/DC , no inputs, screw							-RP 083 05;-RP 086 05;-RP 089 05				
	34.	SE.XB4BA21	3	Schneider Electric	Black flush complete pushbutton Ø22 spring return 1NO "unmarked"	Black flush complete pushbutton Ø22 spring return 1NO							-S 083 06;-S 086 06;-S 089 06				
	35.	SE.XB4BD33	3	Schneider Electric	Selector switch, BLACK, 1-0-2, 2NO	Metal Black Ø22 3 positions 2 NO							-S 083 06.1;-S 086 06.1;-S 089 06.1				
	36.	SE.ZBE101	3	Schneider Electric	Single contact block NO	Harmony XB4 Silver alloy 1 NO							-S 083 06.1;-S 086 06.1;-S 089 06.1				
	37.	SOC.47506030	8	Socomec	TORES LOCATION SENSOR DELTA IP-30 (30mm)	Fault locating differential transformer IP-30 Maximal diameter of cable: 30mm							-TC 082 05;-TC 085 05;-TC 088 05;-TC 091 04;-TC 09 2 04;-TC 092 09;-TC 092 14;-TC 093 04				
	38.	SOC.47290590	8	Socomec	ISOM T-15	Connection adaptor ISOM T-15 to ISOM Digiware F-60 modules							-TC 082 05;-TC 085 05;-TC 088 05;-TC 091 04;-TC 09 2 04;-TC 092 09;-TC 092 14;-TC 093 04				
	39.	SOC.192T2106	1	Socomec	Bar or cable-through CT TCB 17-20 60A/5A Class 1 1VA	Accuracy class: 0.2s — 0.5 or 1. Dielectric quality: 3 kV — 50 Hz - 1 min. Operating frequency: 50 — 60 Hz. Permanent overload: 1.2 In. Insulation class: E (120 °C).							-TCU 091 05				
	40.	SOC.48290501	3	Socomec	Solid current sensor TE-18 18mm 25-63A	Solid through terminal block 18mm 25-63A Voltage: 800 V Dimensions max 24 passage de cable: D:8,6mm							-TCU 091 05.1;-TCV 091 04;-TCW 091 04				
	41.	PXC.3209510	116	Phoenix Contact	PT 2,5 Feed-through terminal block	number of connections: 2 number of positions: 1 connection method: Push-in connection Rated cross section: 2.5 mm2 cross section: 0.14 mm2 - 4 mm2 mounting type: NS 35/7,5, NS 35/15 color: gray							-X 082 05;-X 083 09;-X 084 06;-X 085 05;-X 086 09;-X 087 06;-X 088 05;-X 089 09;-X 090 06;-XB 093 03;-XS 111 03;-XS 115 02				


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
	Sorting number	Part number	Quantity	Manufacturer	Device	Device description							Device designation				
	42.	PXC.3044131	9	Phoenix Contact	UT 6 - Feed-through terminal block	Feed-through terminal block nom. voltage: 1000 V nominal current: 41 A number of connections: 2 connection method: Screw connection Rated cross section: 6 mm2 cross section: 0.2 mm2 - 10 mm2 mounting type: NS 35/7,5, NS 35/15 color: gray							-X 091 04;-X 092 04				
	43.	PXC.3211757	6	Phoenix Contact	PT 4 Feed-through terminal block	Feed-through terminal block, nom. voltage: 800 V, nominal current: 32 A, number of connections: 2, connection method: Push-in connection, Rated cross section: 4 mm2, cross section: 0.2 mm2 - 6 mm2, mounting type: NS 35/7,5, NS 35/15, color: gray							-X 092 09;-X 092 13				

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
	Sorting number	Part number	Quantity	Manufacturer	Device	Device description							Device designation				
	23.	SE.18726	2	Schneider Electric	Miniature circuit breaker NG125H 25A 3P C	Range: Acti9 Poles description: 3P [In] rated current: 25 A at 40 °C Network type: DC, AC Trip unit technology: Thermal-magnetic Curve code: C Breaking capacity: 36 kA Icu at 380...415 V AC 50/60 Hz conforming to EN/IEC 60947-2							-Q 092 09;-Q 092 13				
	24.	SE.C16F3TM125	1	Schneider Electric	Circuit breaker, ComPacT NSX160B	Circuit breaker ComPacT NSX160B, 36kA at 415VAC, TMD trip unit 125A, 3 poles 3d							-QB 081 09				
	25.	SE.29450	1	Schneider Electric	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV							-QB 081 09				
	26.	SE.LV429337T	1	Schneider Electric	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40							-QB 081 09				
	27.	SE.LVS04033	1	Schneider Electric	LINERGY DP	LINERGY DP 3P D.BLK/COMPACT 250A 27HOLES							-QB 081 09				
	28.	SE.LV429517	1	Schneider Electric	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250							-QB 081 09				
	29.	PXC.2950129	1	Phoenix Contact	Component for protective circuit	Diode module, with 14 diodes, common anode, diode type 1N 4007							-R 093 03				
	30.	PXC.2954882	1	Phoenix Contact	Component for protective circuit	Diode module, with eight diodes, common anode, diode type 1N 5408							-R 093 06				
	31.	PXC.2950116	1	Phoenix Contact	Component for protective circuit	Diode module, with 14 diodes, common cathode, diode type 1N 4007							-R 093 10				
	32.	PXC.2954879	1	Phoenix Contact	Component for protective circuit	Diode module, with eight diodes, common cathode, diode type 1N 5408							-R 093 14				
	33.	SE.XPSBAC34AP	3	Schneider Electric	Safety module	Harmony Safety Automation Estop or guard ,Harmony XPS, connected to supply terminals 48-240 V AC/DC , no inputs, screw							-RP 083 05;-RP 086 05;-RP 089 05				
	34.	SE.XB4BA21	3	Schneider Electric	Black flush complete pushbutton Ø22 spring return 1NO "unmarked"	Black flush complete pushbutton Ø22 spring return 1NO							-S 083 06;-S 086 06;-S 089 06				
	35.	SE.XB4BD33	3	Schneider Electric	Selector switch, BLACK, 1-0-2, 2NO	Metal Black Ø22 3 positions 2 NO							-S 083 06.1;-S 086 06.1;-S 089 06.1				
	36.	SE.ZBE101	3	Schneider Electric	Single contact block NO	Harmony XB4 Silver alloy 1 NO							-S 083 06.1;-S 086 06.1;-S 089 06.1				
	37.	SOC.47506030	8	Socomec	TORES LOCATION SENSOR DELTA IP-30 (30mm)	Fault locating differential transformer IP-30 Maximal diameter of cable: 30mm							-TC 082 05;-TC 085 05;-TC 088 05;-TC 091 04;-TC 09 2 04;-TC 092 09;-TC 092 14;-TC 093 04				
	38.	SOC.47290590	8	Socomec	ISOM T-15	Connection adaptor ISOM T-15 to ISOM Digiware F-60 modules							-TC 082 05;-TC 085 05;-TC 088 05;-TC 091 04;-TC 09 2 04;-TC 092 09;-TC 092 14;-TC 093 04				
	39.	SOC.192T2106	1	Socomec	Bar or cable-through CT TCB 17-20 60A/5A Class 1 1VA	Accuracy class: 0.2s — 0.5 or 1. Dielectric quality: 3 kV — 50 Hz - 1 min. Operating frequency: 50 — 60 Hz. Permanent overload: 1.2 In. Insulation class: E (120 °C).							-TCU 091 05				
	40.	SOC.48290501	3	Socomec	Solid current sensor TE-18 18mm 25-63A	Solid through terminal block 18mm 25-63A Voltage: 800 V Dimensions max 24 passage de cable: D:8,6mm							-TCU 091 05.1;-TCV 091 04;-TCW 091 04				
	41.	PXC.3209510	116	Phoenix Contact	PT 2,5 Feed-through terminal block	number of connections: 2 number of positions: 1 connection method: Push-in connection Rated cross section: 2.5 mm2 cross section: 0.14 mm2 - 4 mm2 mounting type: NS 35/7,5, NS 35/15 color: gray							-X 082 05;-X 083 09;-X 084 06;-X 085 05;-X 086 09;-X 087 06;-X 088 05;-X 089 09;-X 090 06;-XB 093 03;-XS 111 03;-XS 115 02				

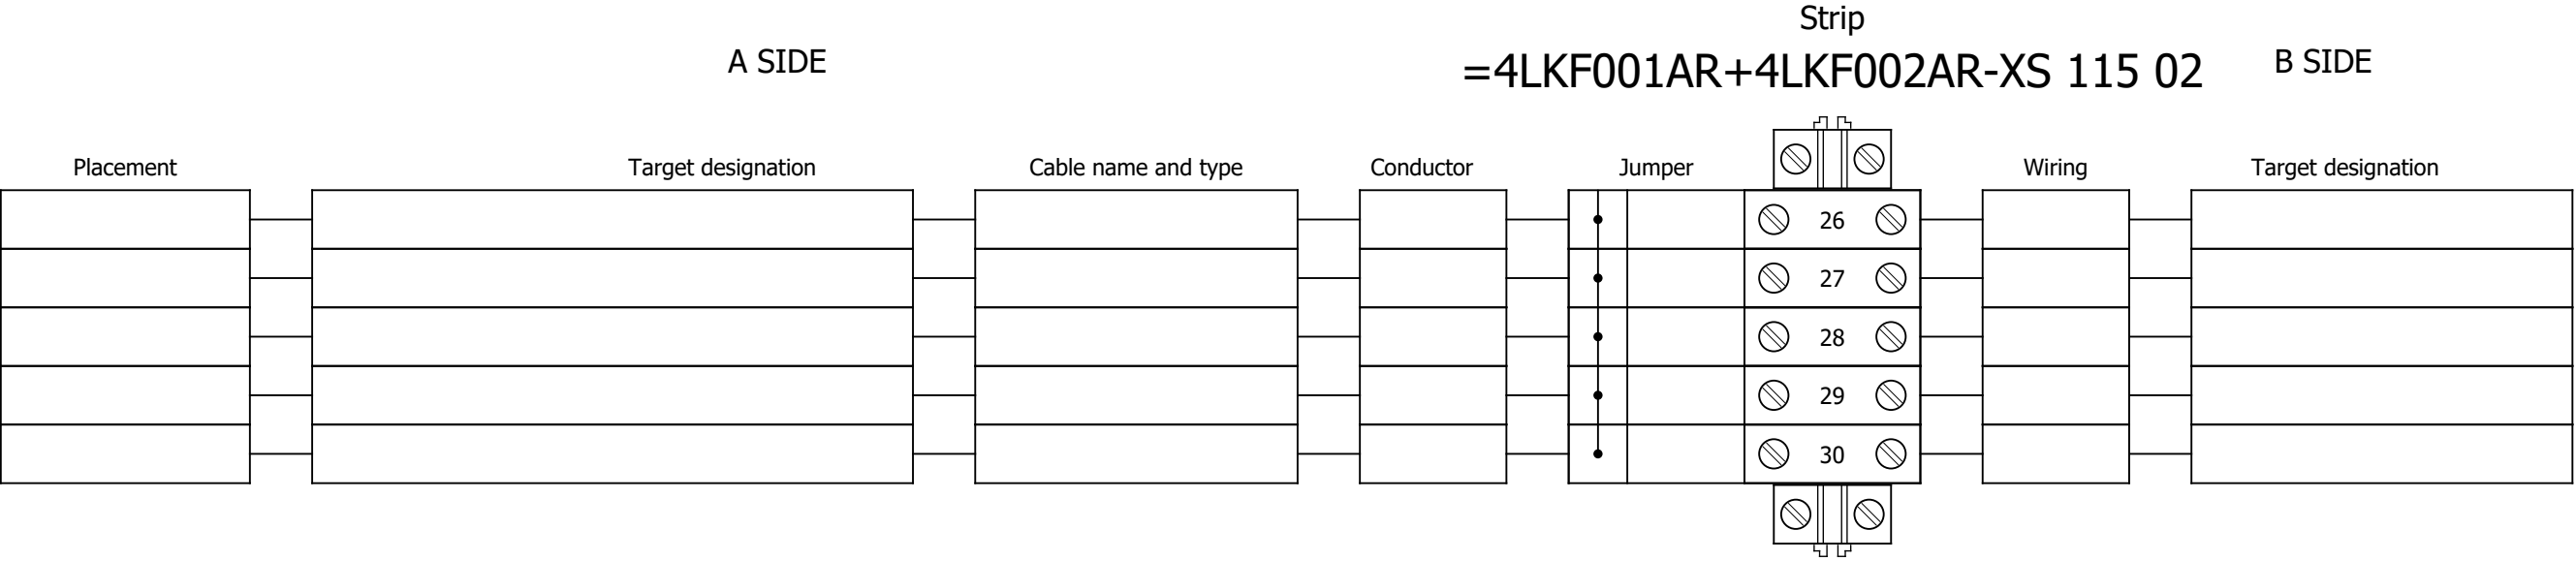

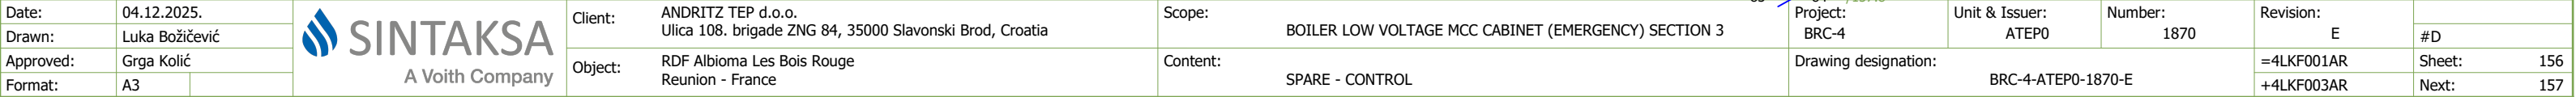



Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 3	Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Luka Božičević														#D	
Approved:	Grga Kolić				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	SPARE - SIGNALIZATION	Drawing designation:			=4LKf001AR			Sheet:	157
Format:	A3								BRC-4-ATEP0-1870-E			+4LKf003AR			Next:	158

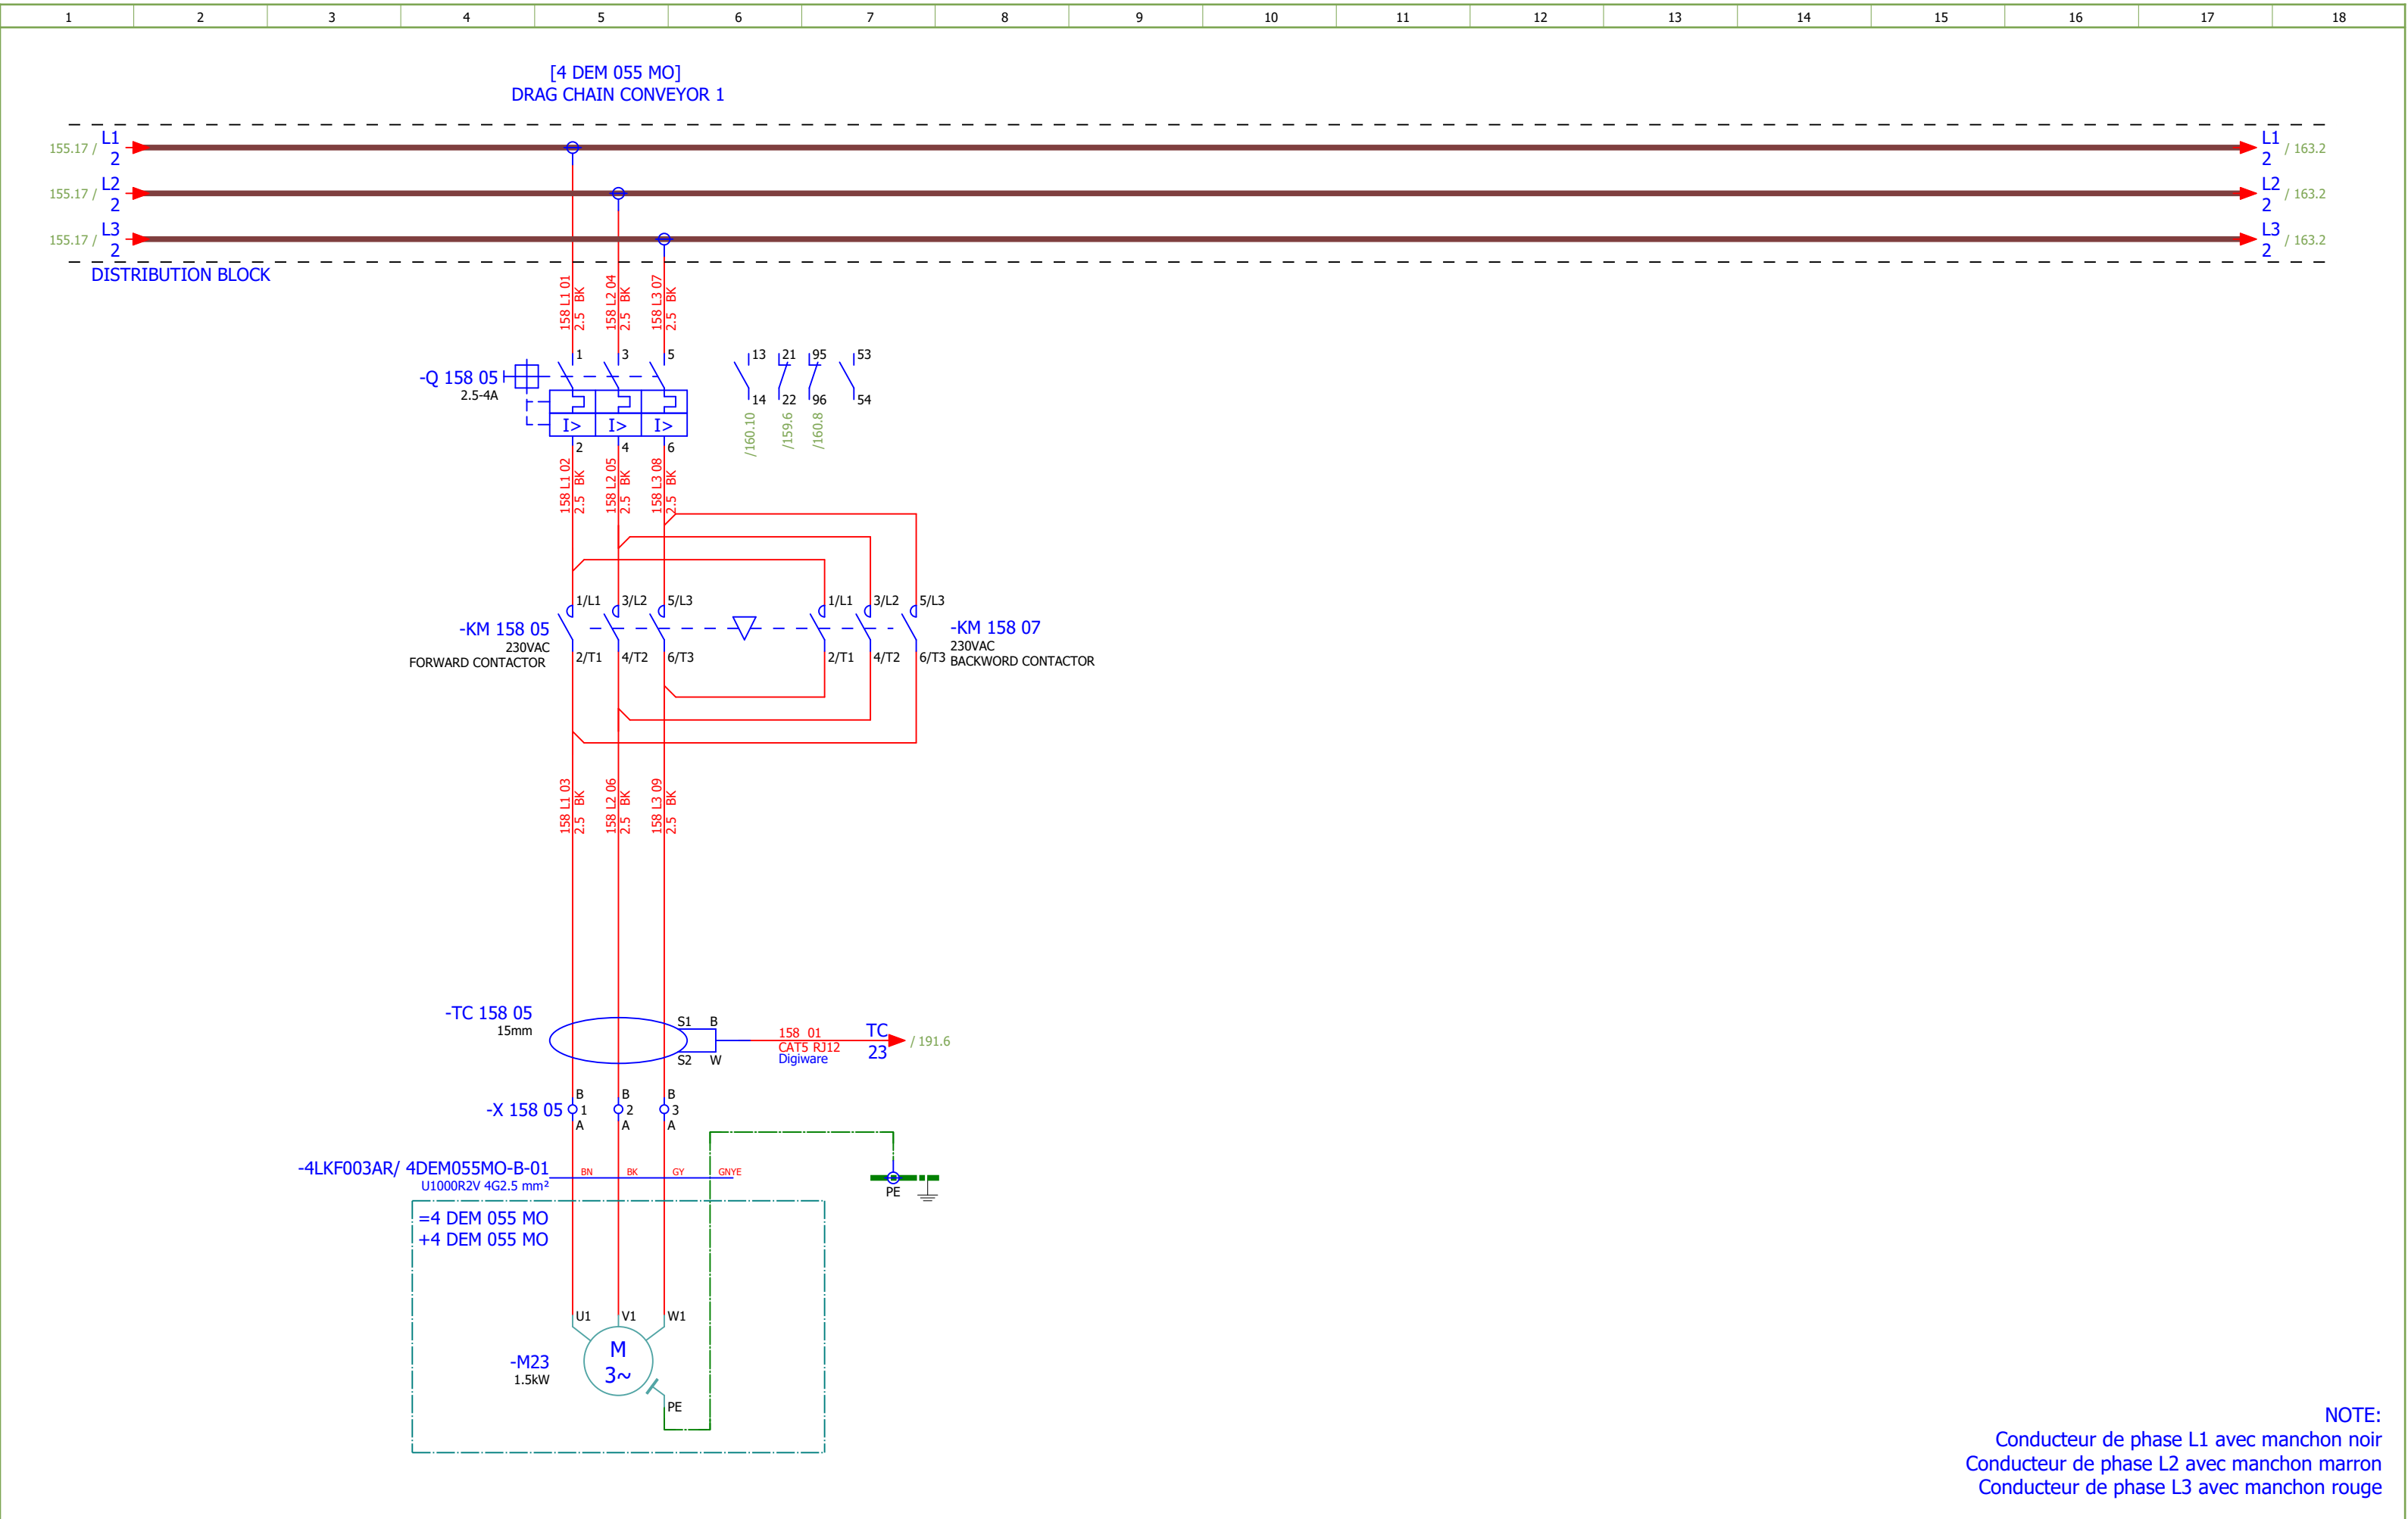


NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge


Date:	04.12.2025.		Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 3	Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Luka Božičević		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	DRAG CHAIN CONVEYOR 1	Drawing designation:			BRC-4-ATEP0-1870-E			=4LKF001AR	Sheet:	158
Approved:	Grga Kolić												+4LKF003AR	Next:	159
Format:	A3														

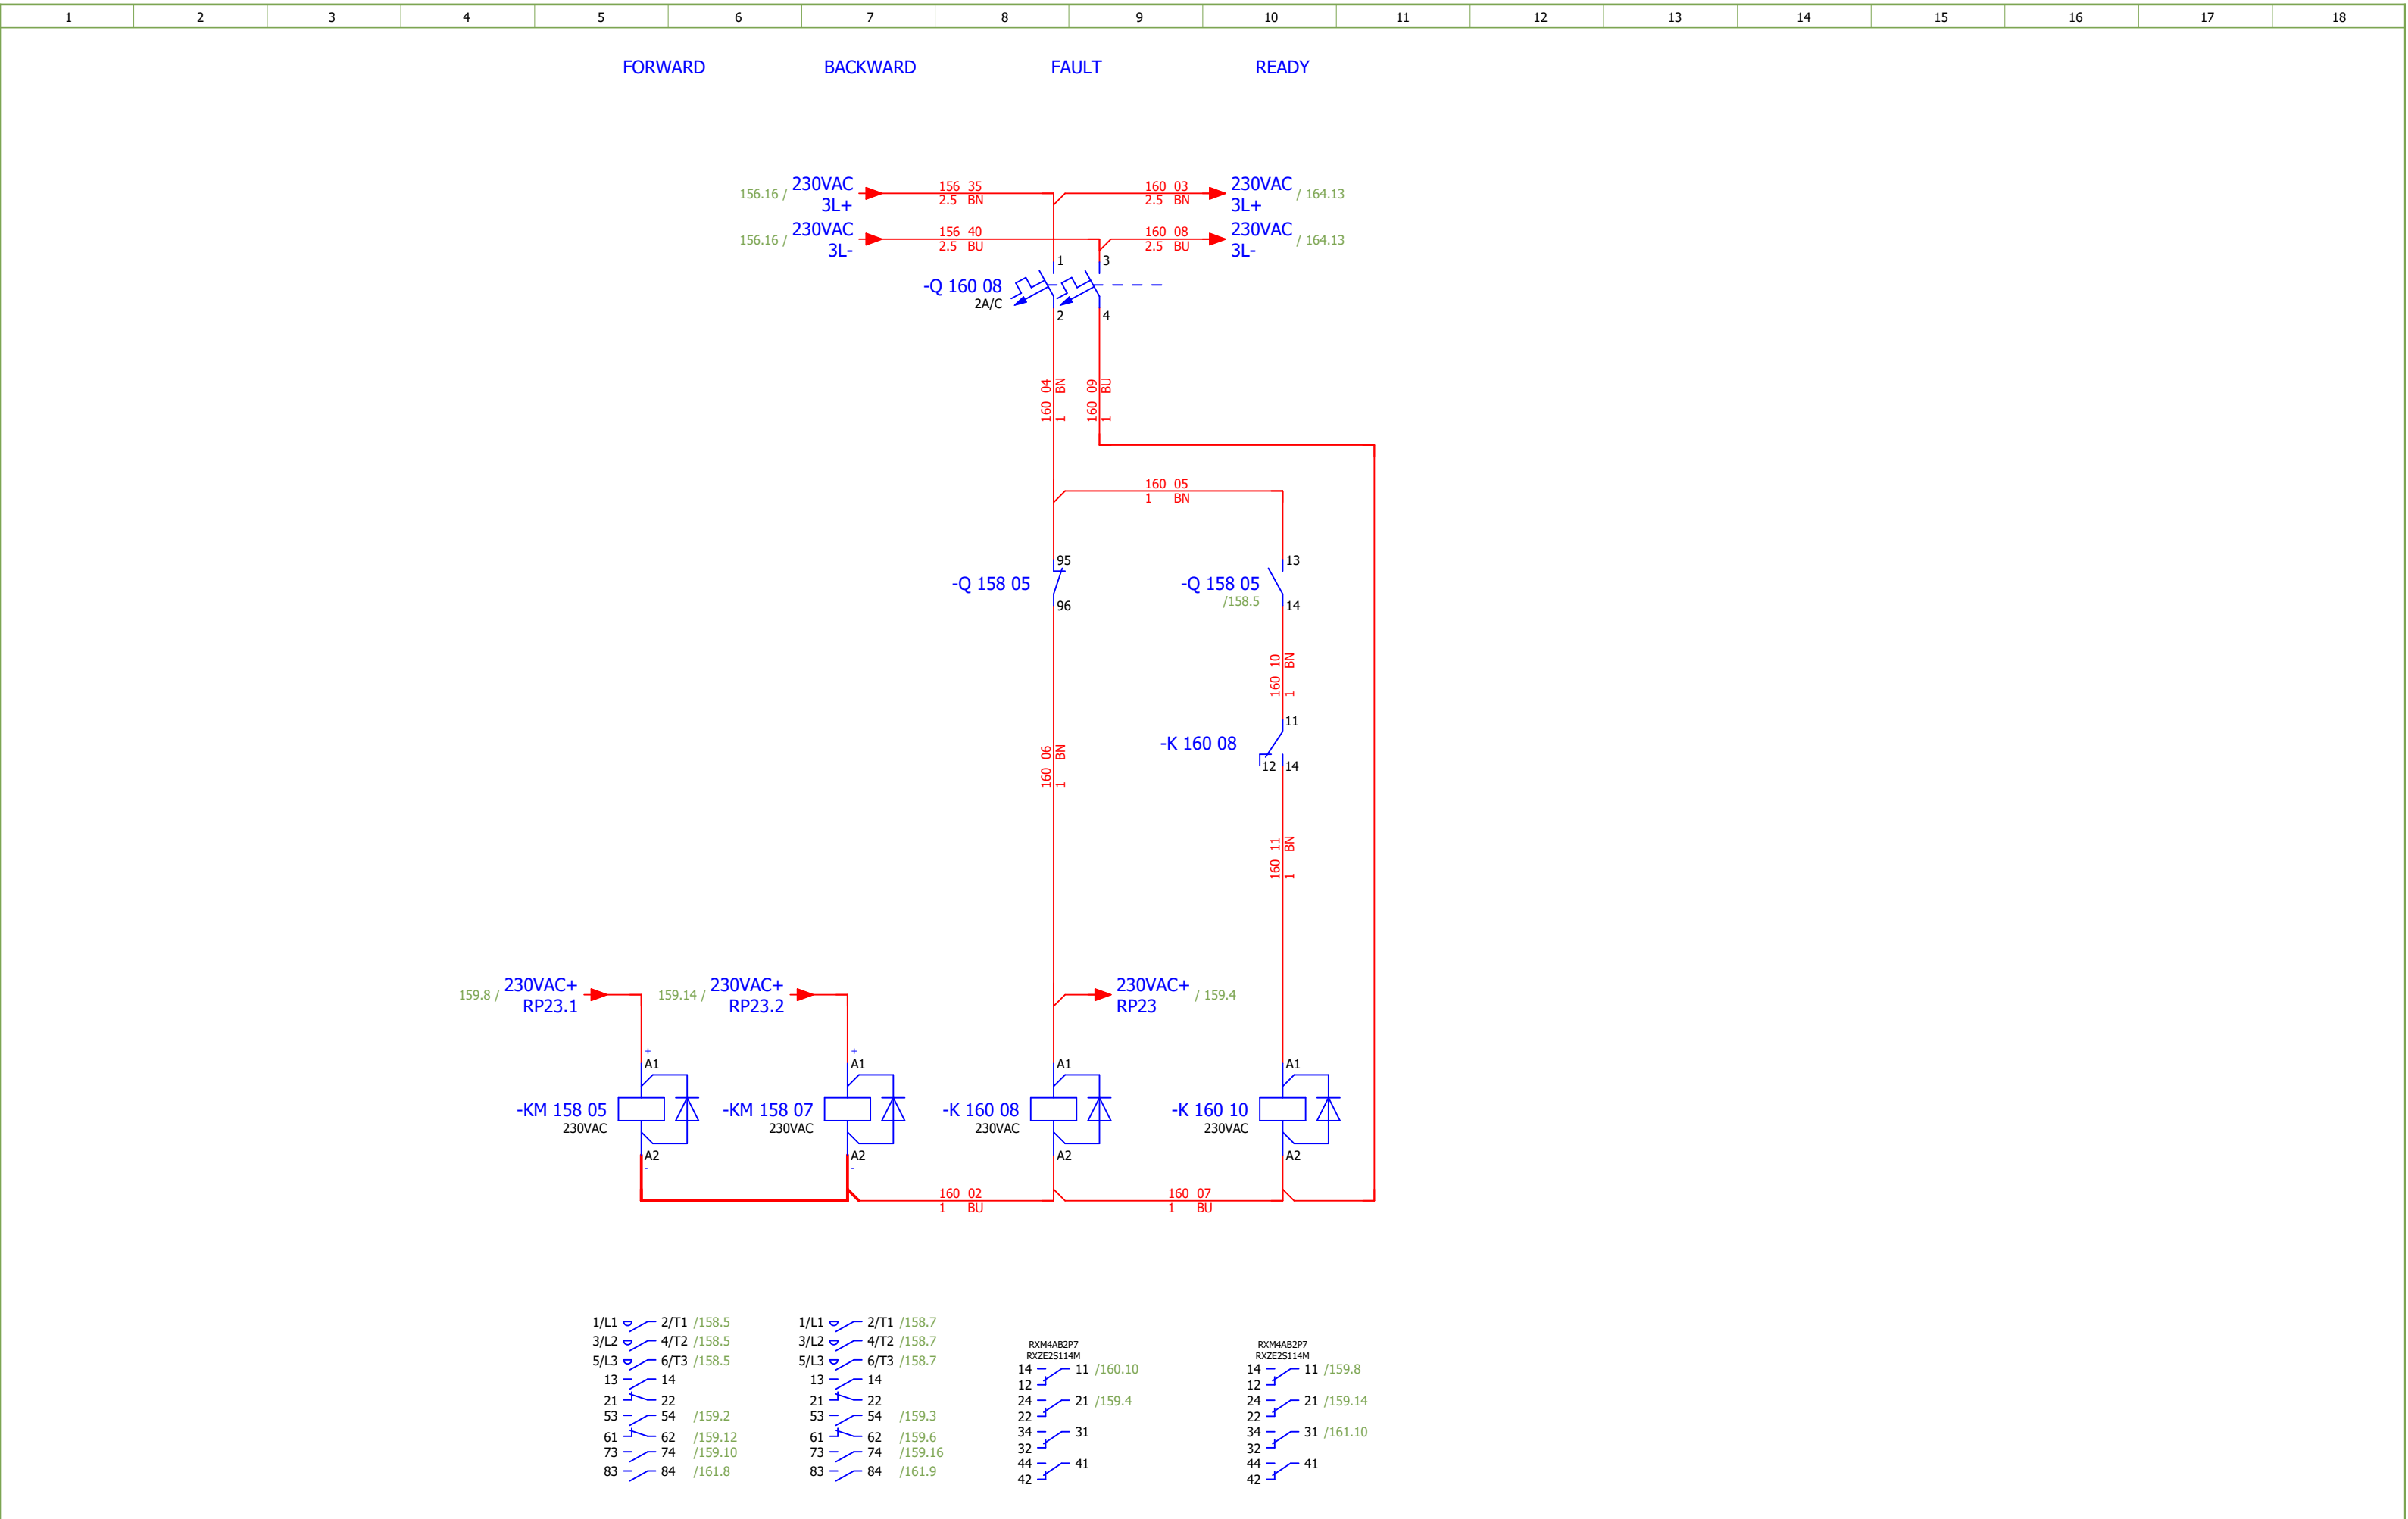

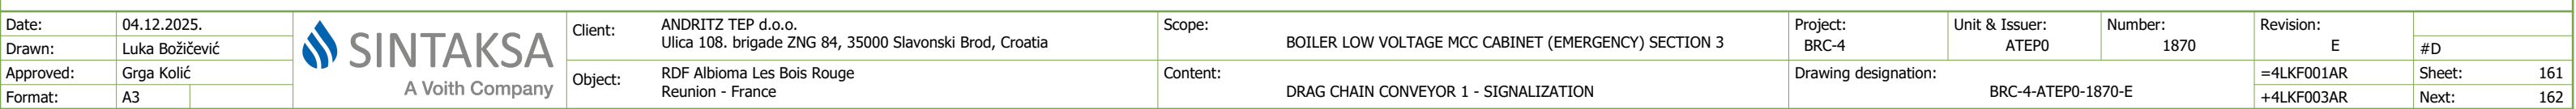


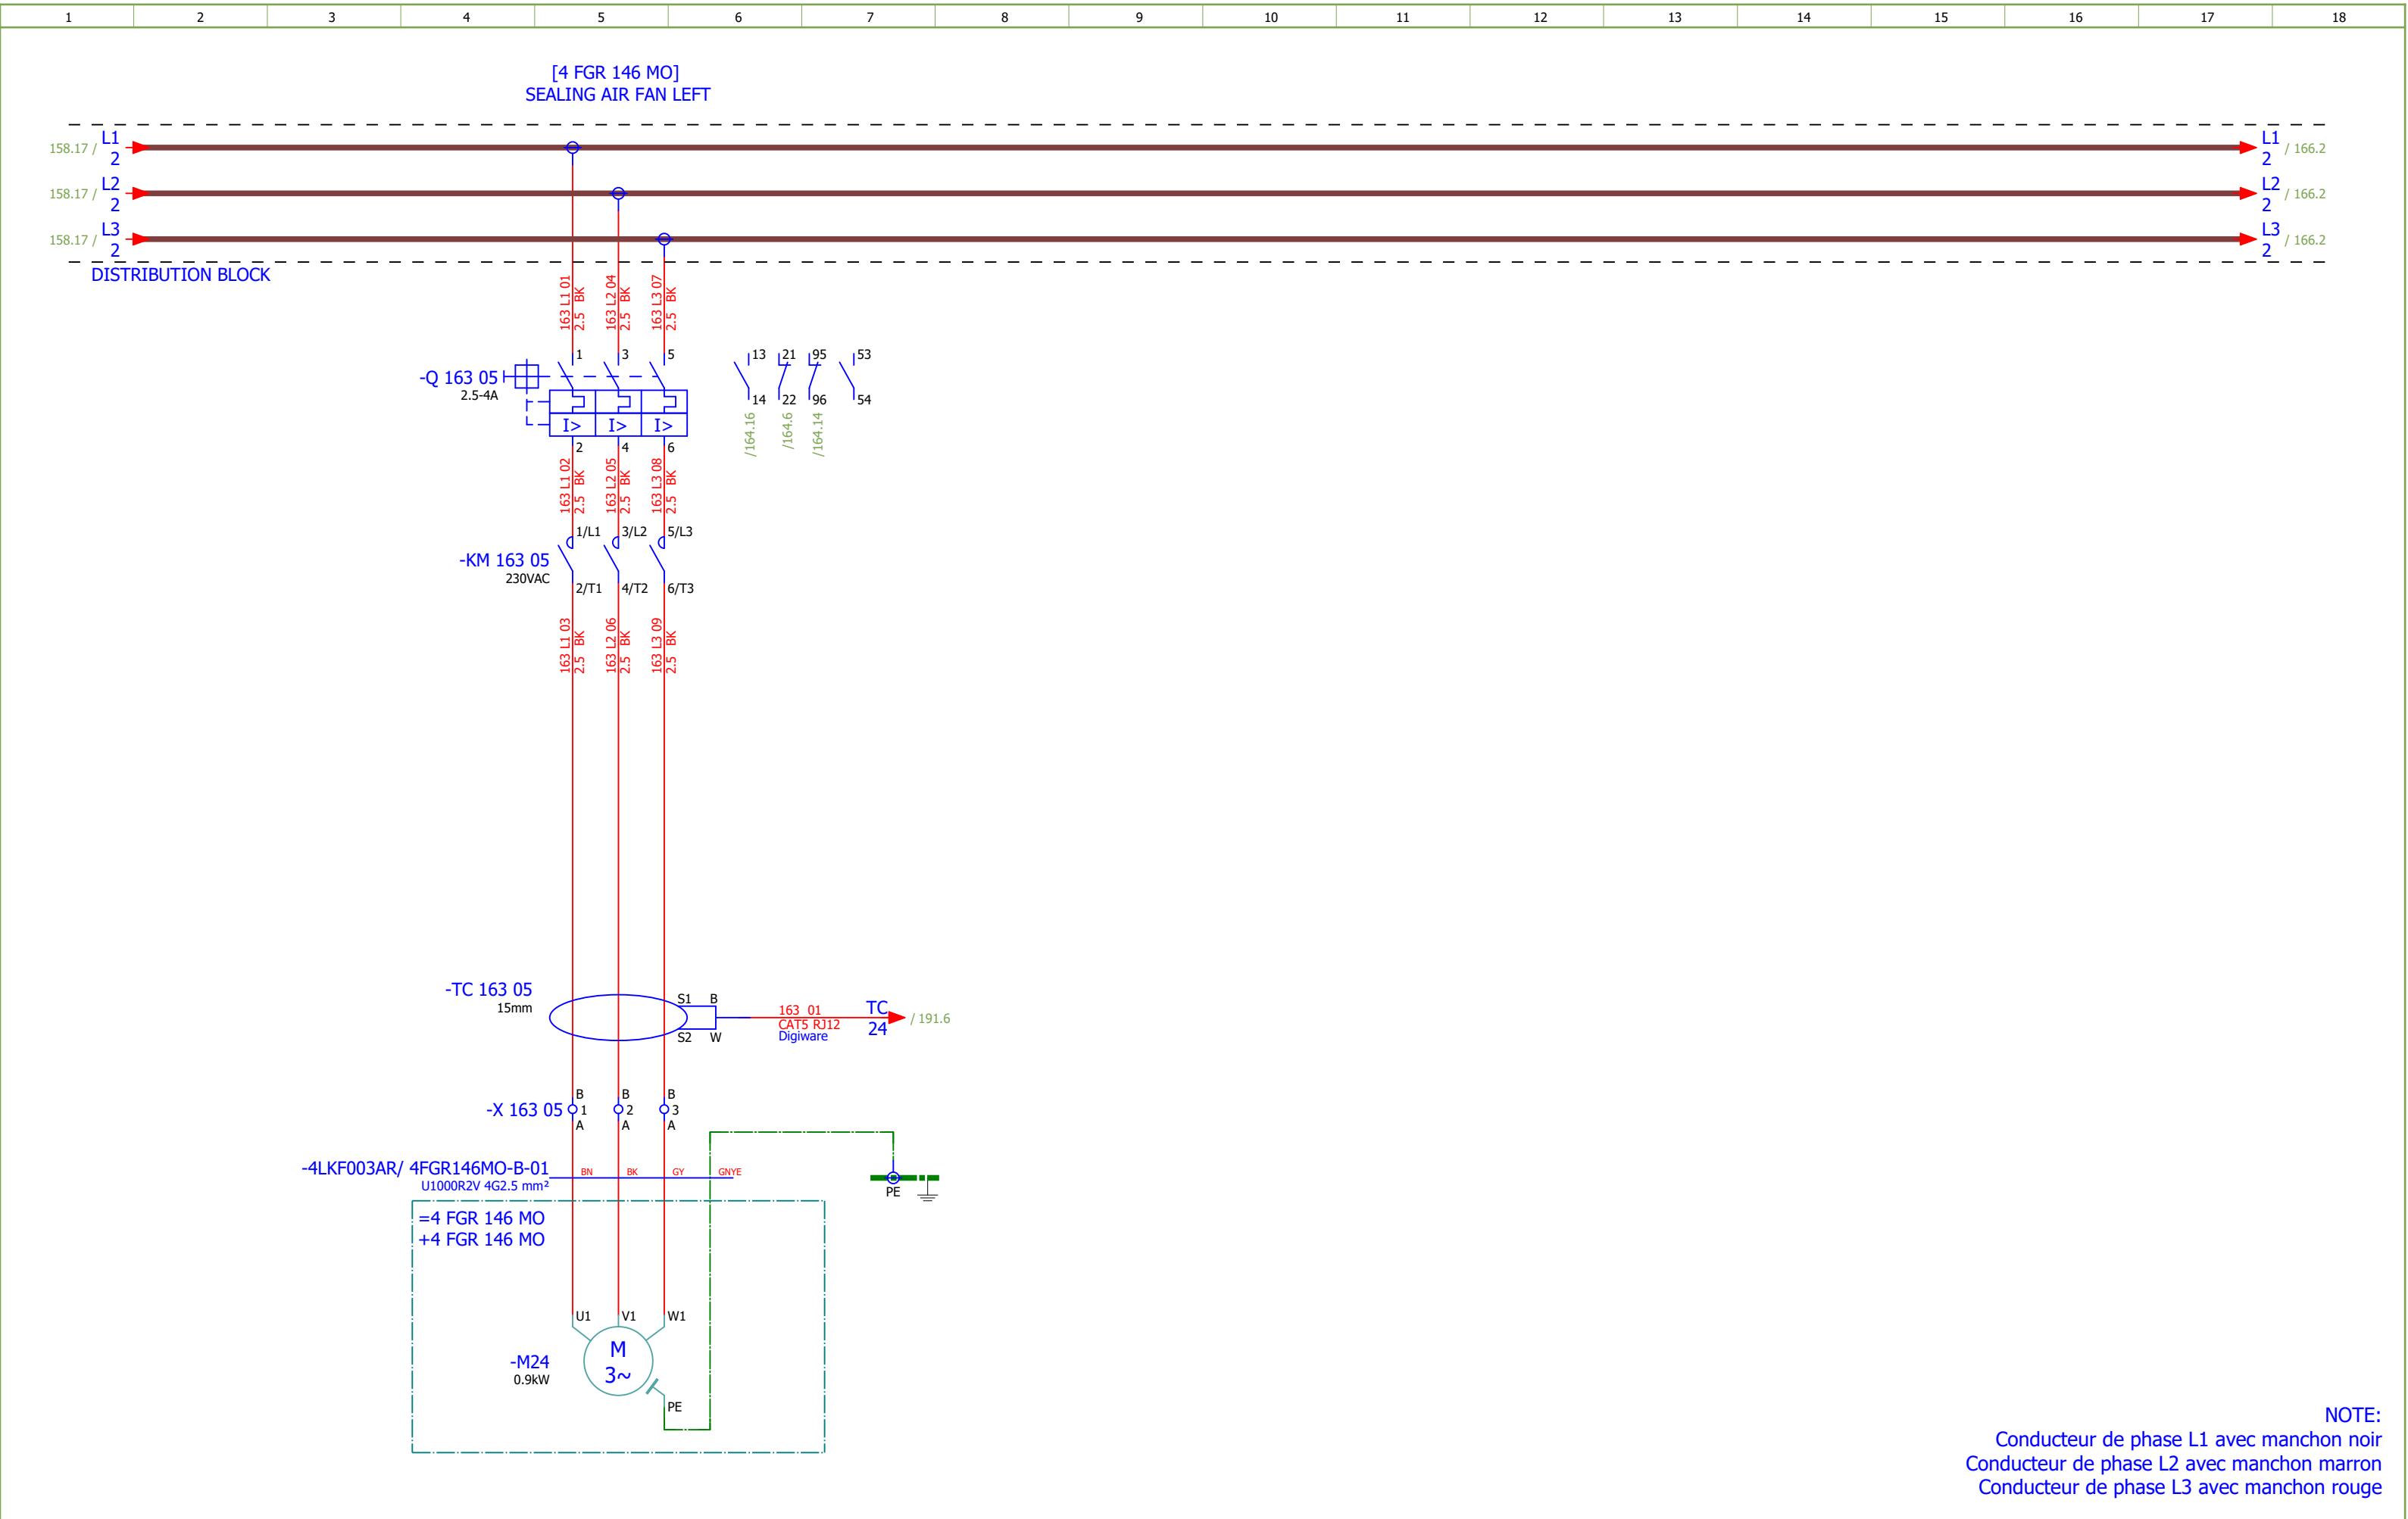

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 3		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	SEALING AIR FAN LEFT		Drawing designation:			BRC-4-ATEP0-1870-E			=4LKF001AR	#D	
Approved:	Grga Kolić															Sheet:	163
Format:	A3															+4LKF003AR	Next:

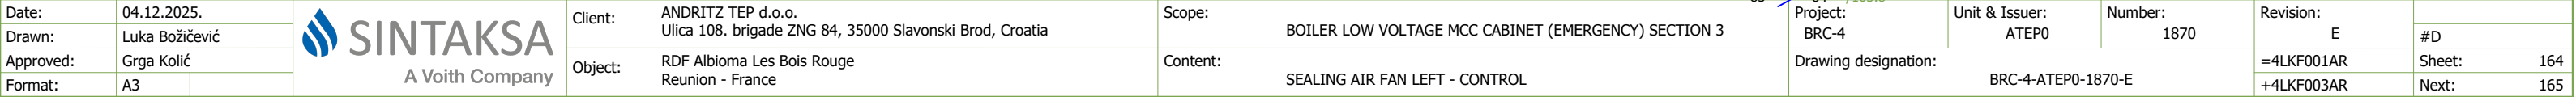


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 3		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E		
Drawn:	Luka Božičević															#D		
Approved:	Grga Kolić				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:			Drawing designation:						=4LKf001AR	Sheet:	165
Format:	A3							SEALING AIR FAN LEFT - SIGNALIZATION		BRC-4-Atep0-1870-E						+4LKf003AR	Next:	166

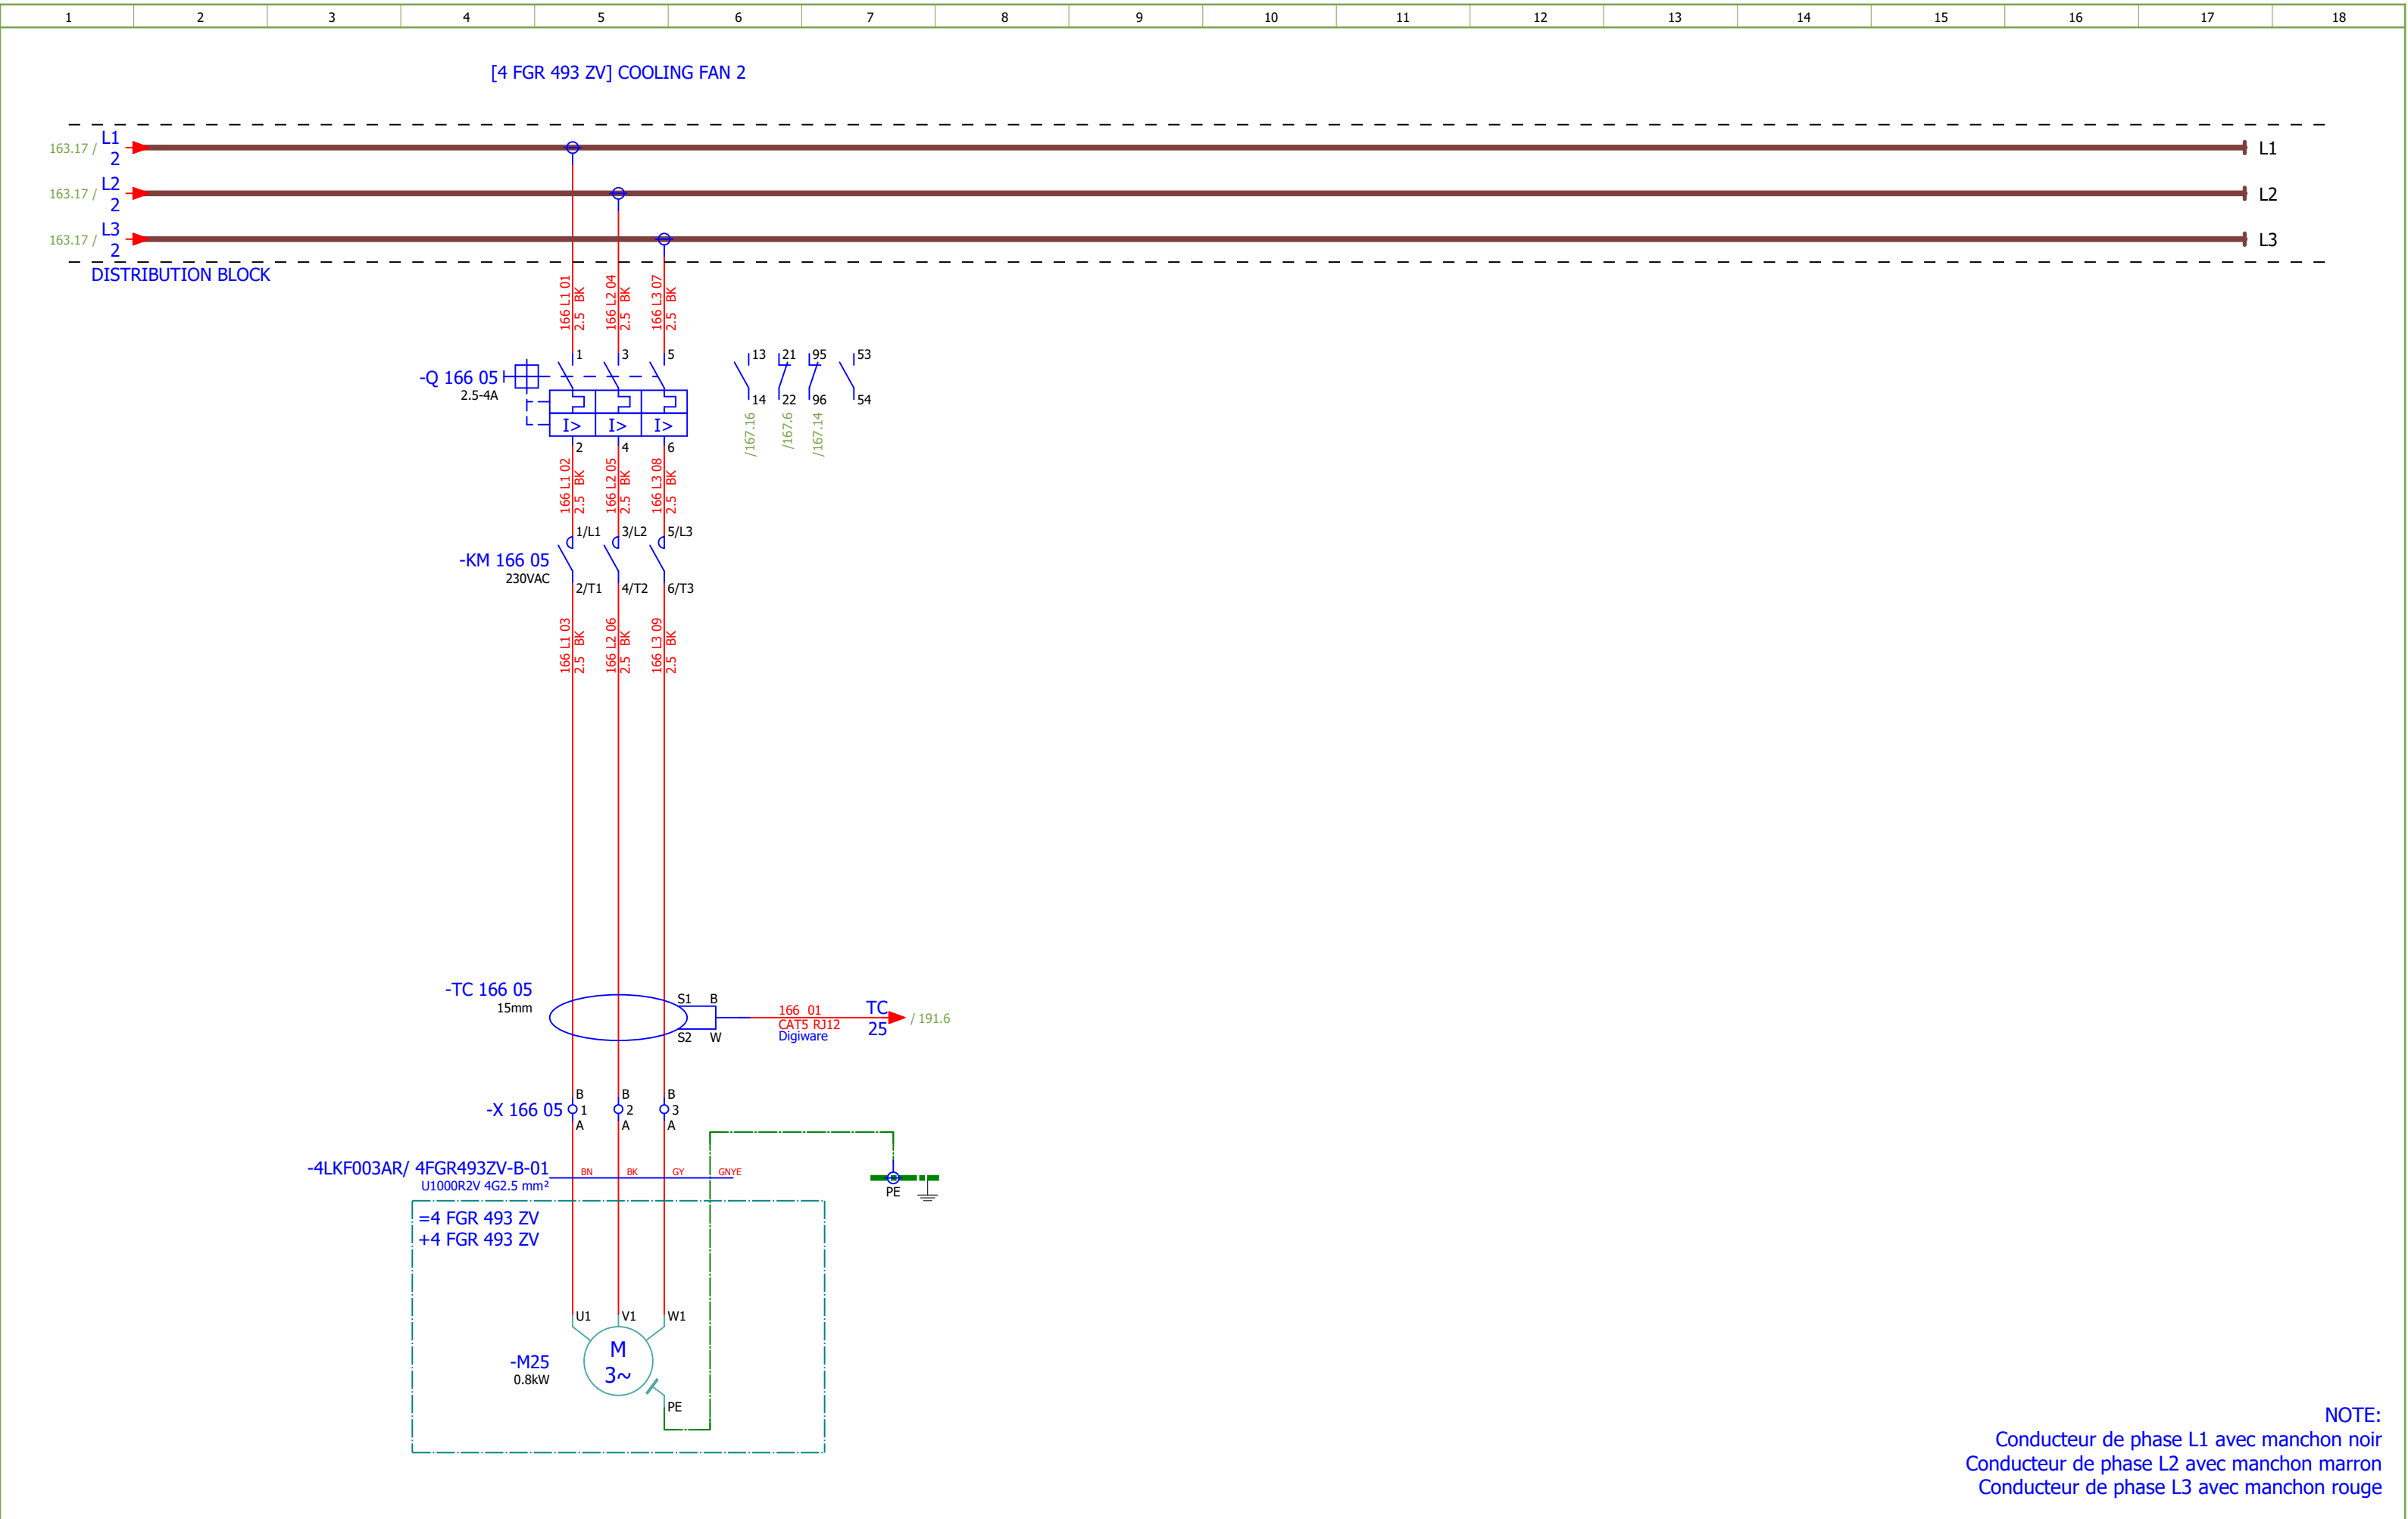

NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date:	04.12.2025.		 SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 3		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	COOLING FAN 2		Drawing designation:				BRC-4-ATEP0-1870-E		=4LKF001AR	#D	
Approved:	Grga Kolić													=4LKF003AR	Sheet:	166	
Format:	A3													+4LKF003AR	Next:	167	

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 3		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	COOLING FAN 2 - SIGNALISATION	Drawing designation: BRC-4-ATEP0-1870-E						=4LKF001AR	Sheet:	168	
Approved:	Grga Kolić													+4LKF003AR	Next:	169	
Format:	A3																

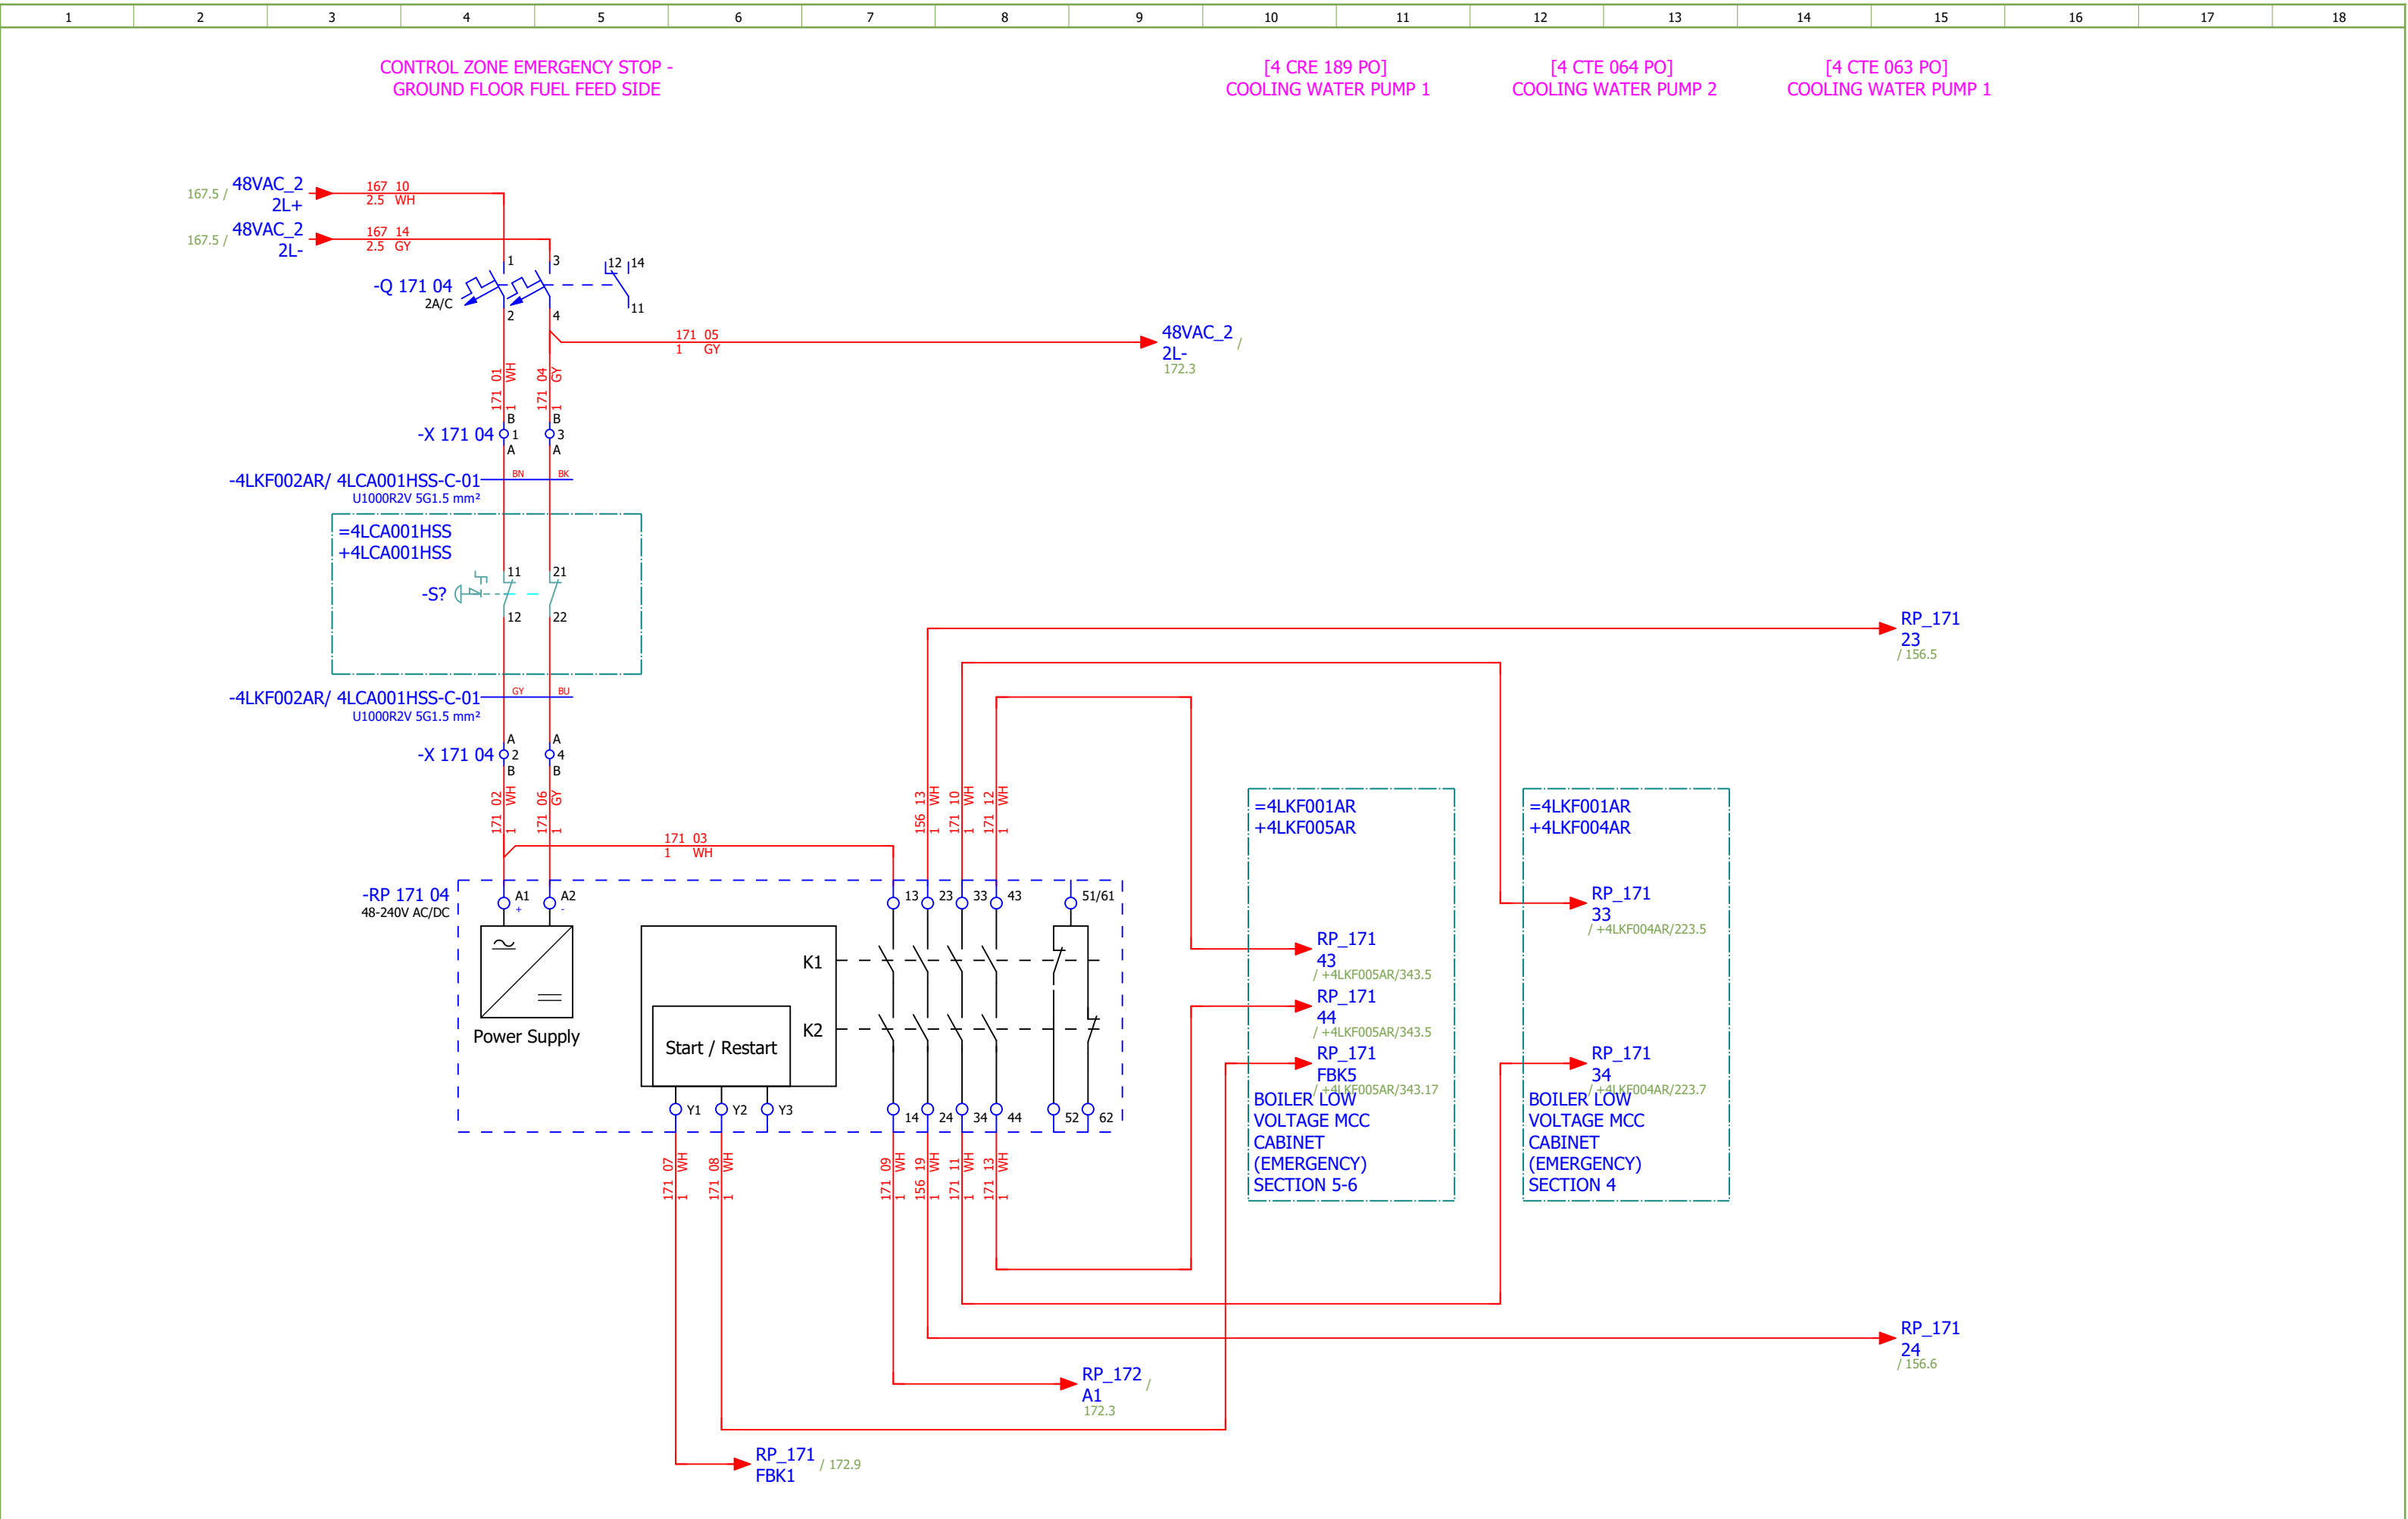


Date:	04.12.2025.			Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 3	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: E	
Drawn:	Luka Božičević									#NA
Approved:	Grga Kolić									
Format:	A3									
				Object: RDF Albioma Les Bois Rouge Reunion - France	Content: EMERGENCY SHUTDOWN - GROUND FLOOR FUEL FEED SIDE	Drawing designation: BRC-4-ATEP0-1870-E			=4LKF001AR	Sheet: 171
									+4LKF003AR	Next: 172


CONTROL ZONE EMERGENCY STOP -
GROUND FLOOR FUEL FEED SIDE

[4 FGR 247 ZV]
SECONDARY AIR FAN

[4 FTA 049 PO]
FLUE GAS RECIRCULATION
FAN

[4 CRE 196 PO]
COOLING WATER PUMP 2

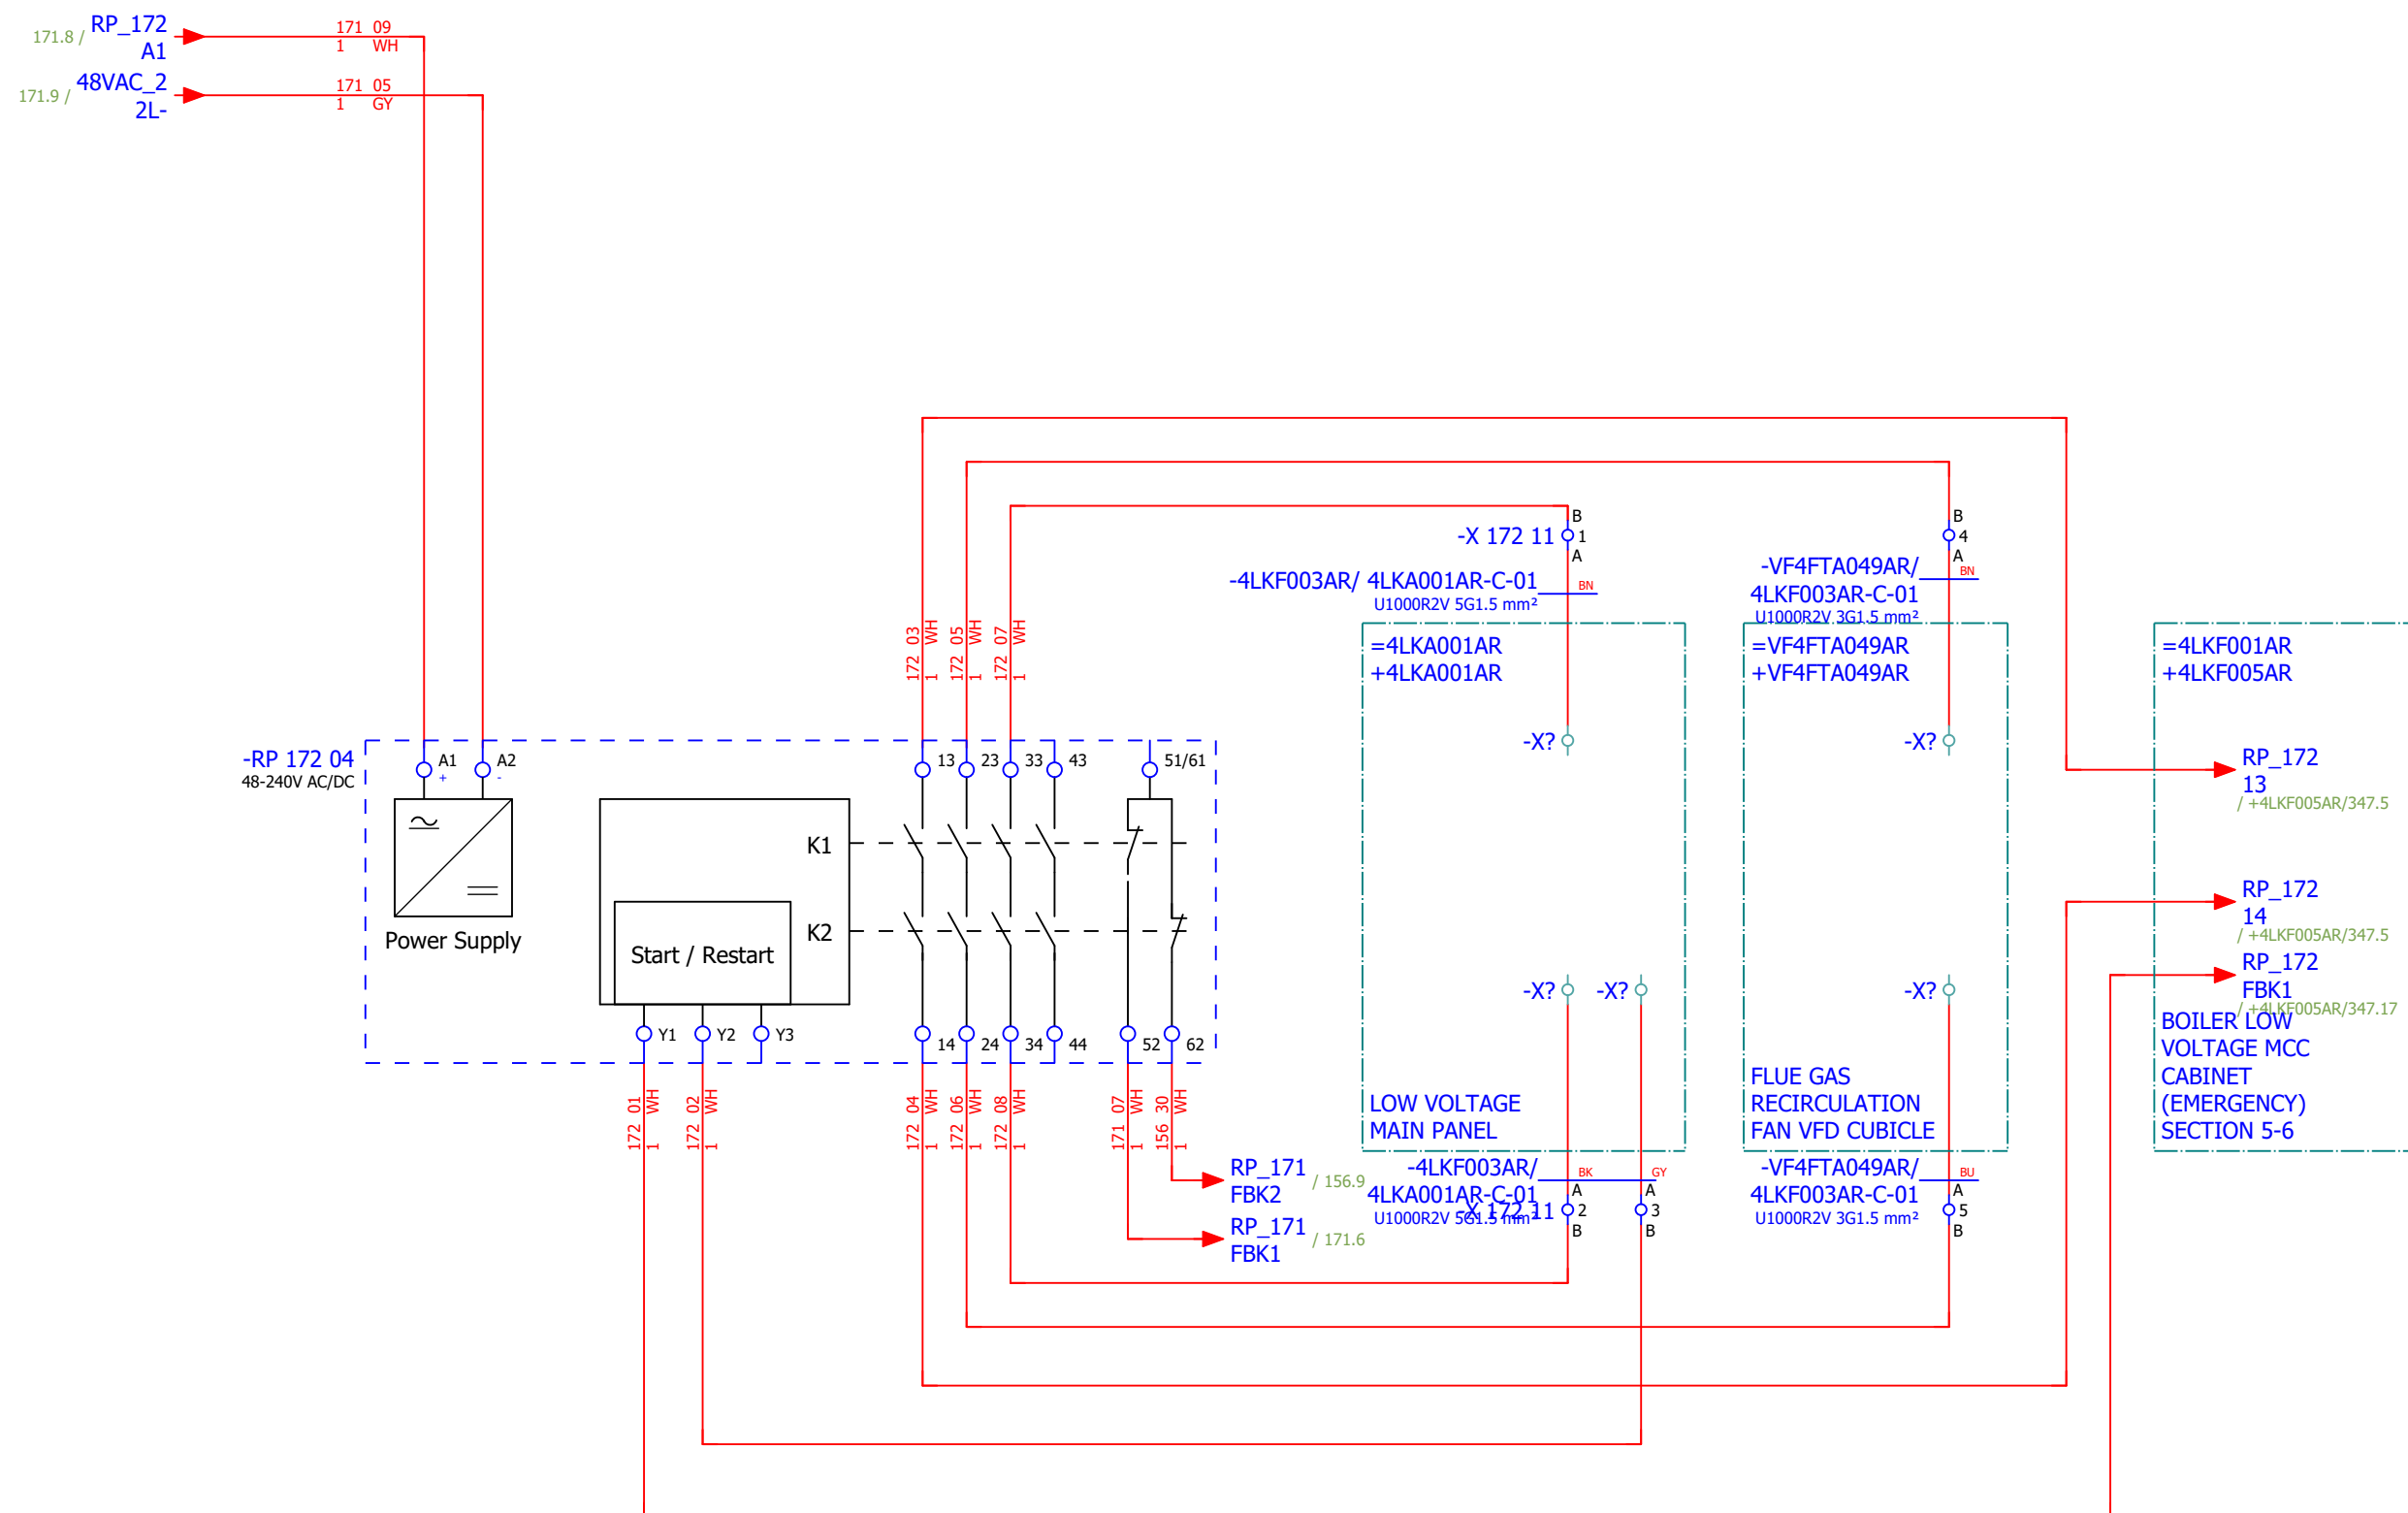

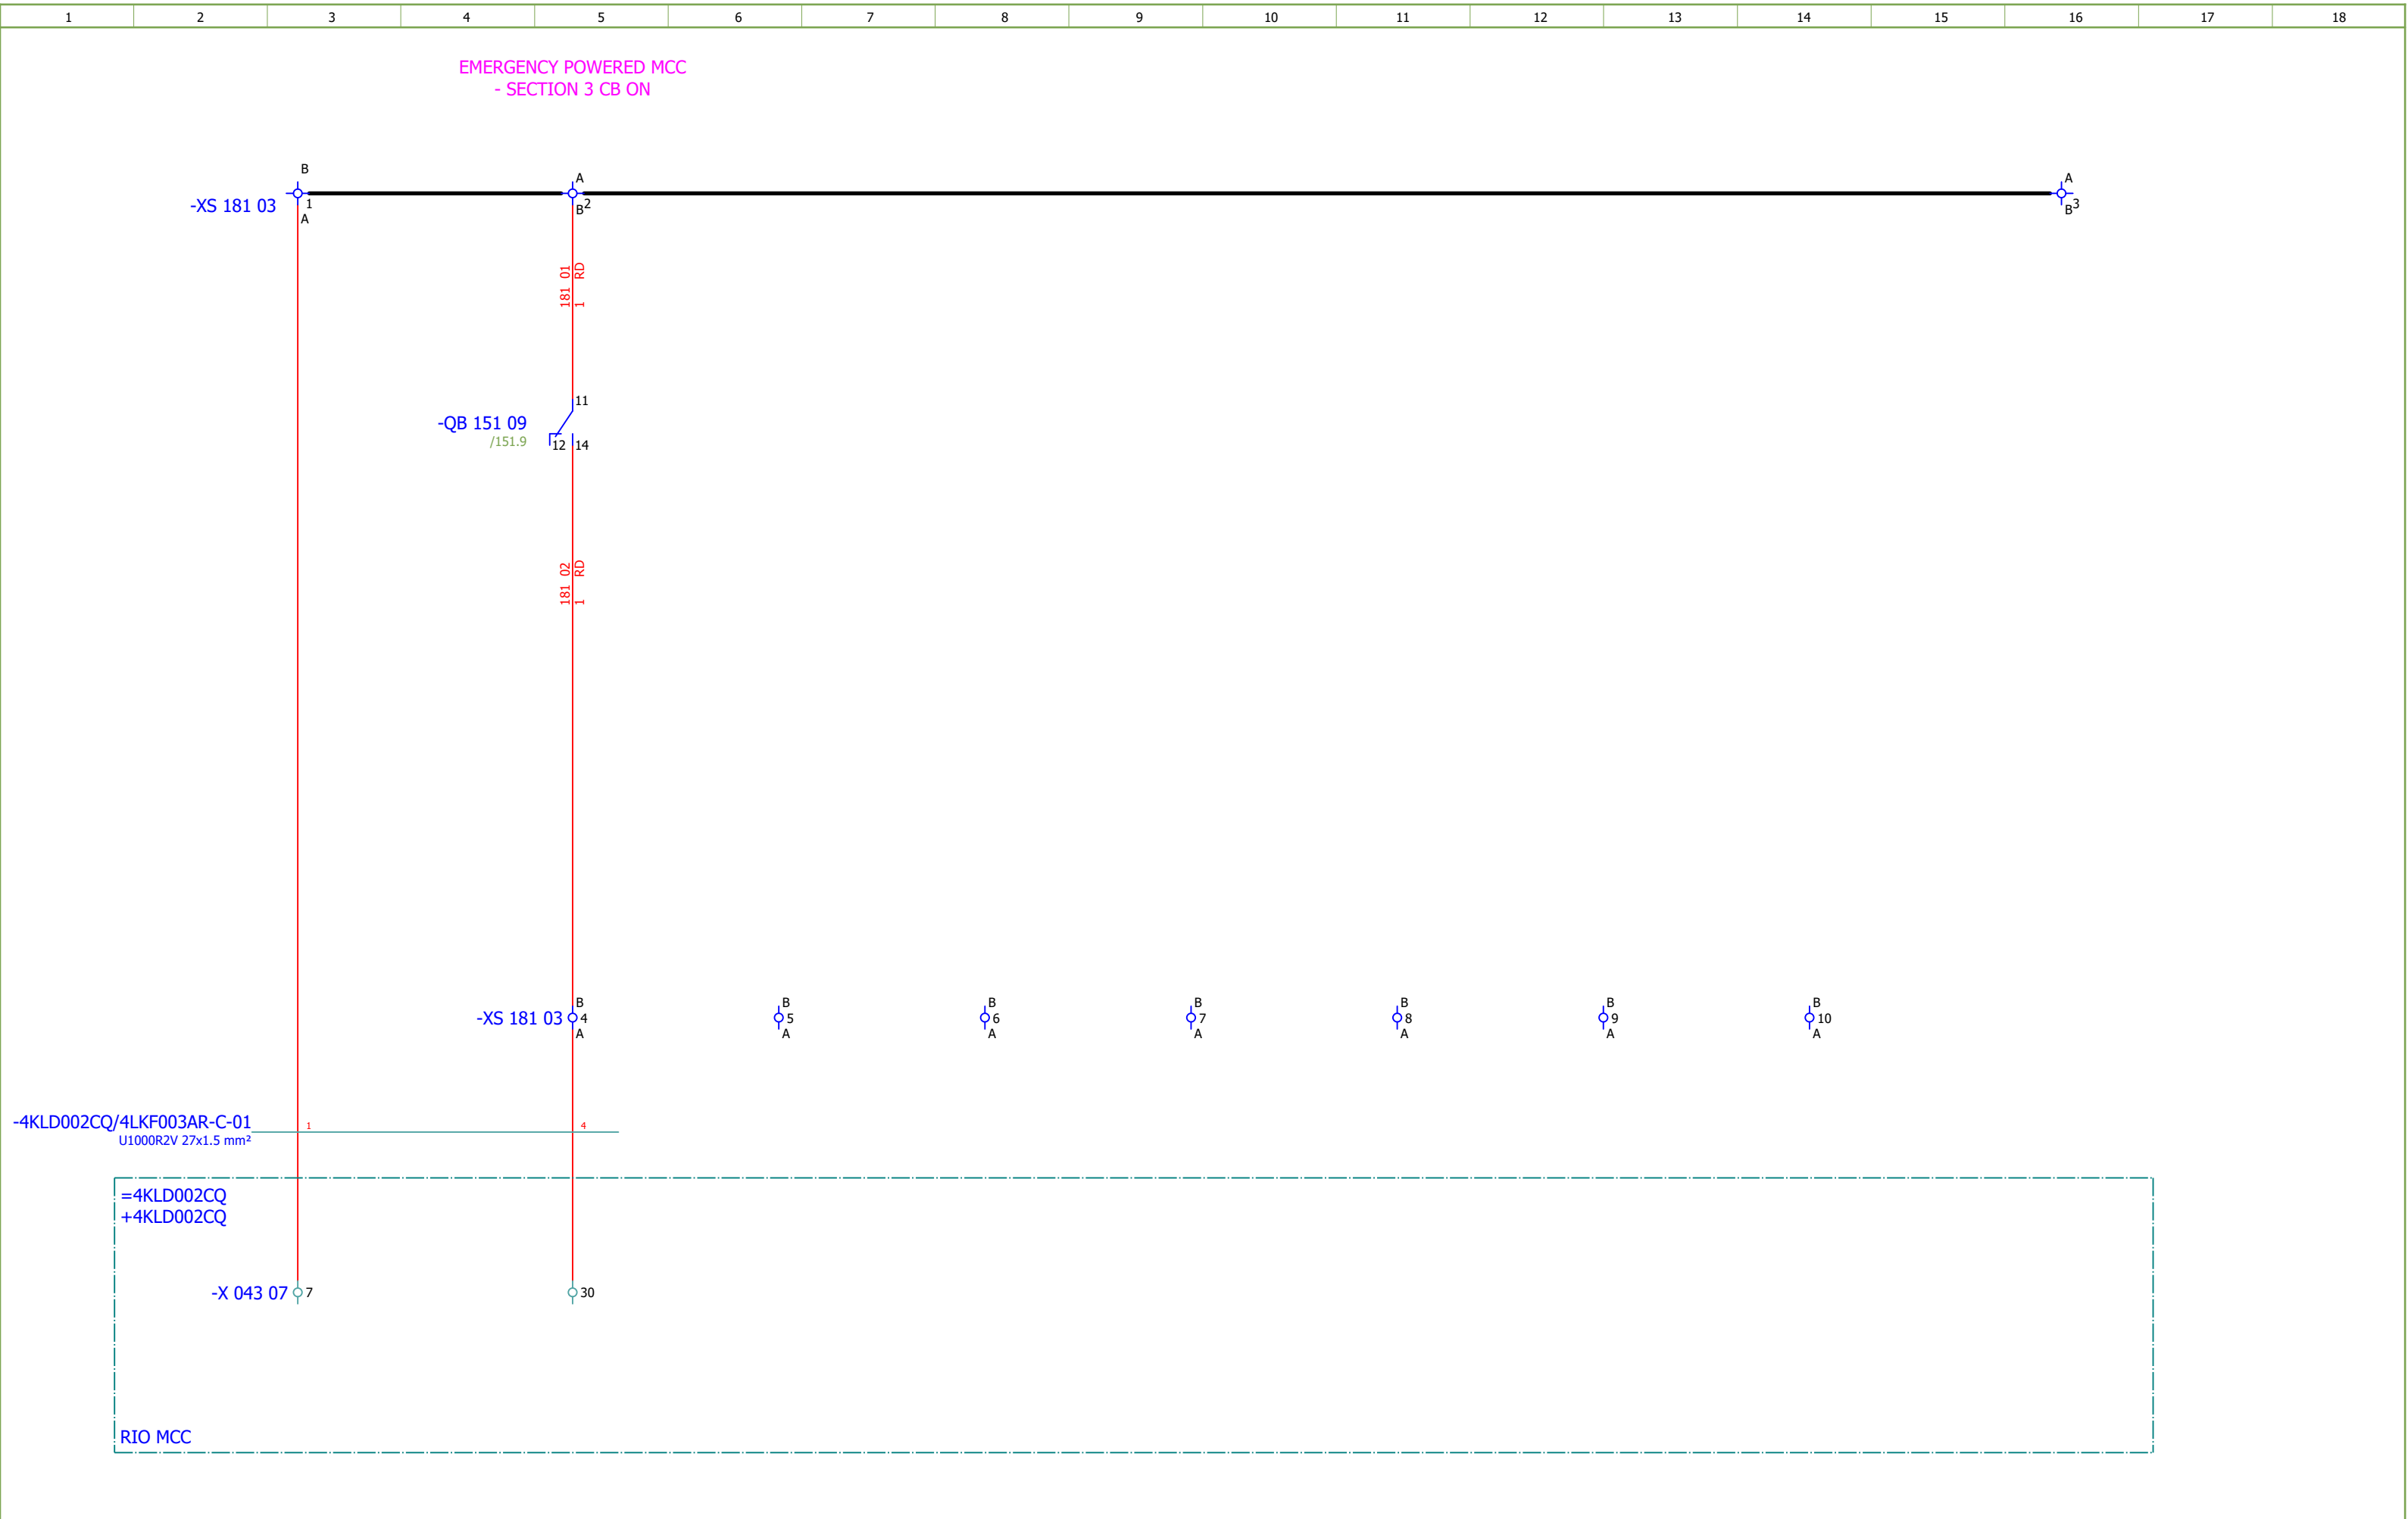

[illegible]


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 3	Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	COMMUNICATION	Drawing designation: BRC-4-ATEP0-1870-E					=4LKF001AR	Sheet:	191	
Approved:	Grga Kolić												+4LKF003AR	Next:	200	
Format:	A3															

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
	Sorting number	Part number	Quantity	Manufacturer	Device	Device description	Device designation										
	1.	SOC.47290126	1	Socomec	Module location default ISOM DIGIWARE F-60	Network type - Power distribution, Control circuits, Medical Rated voltage - 24 VDC Type - Insulation Fault Locator Indication - Digital	-BE 191 06										
	2.	SE.ZB4BVBG1	15	Schneider Electric	white light block with body/fixing collar integral LED 24...120VAC/DC	white light block with body/fixing collar integral LED 24...120VAC/DC	-HL 153 02...-HL 153 04;-HL 156 02...-HL 156 04;-HL 159 02...-HL 159 04;-HL 164 02...-HL 164 04;-HL 167 02...-HL 167 04										
	3.	SE.ZB4BV043	6	Schneider Electric	Red pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Red	-HL 153 02;-HL 156 02;-HL 159 02;-HL 159 03;-HL 16 4 02;-HL 167 02										
	4.	SE.ZBZ32	15	Schneider Electric	Harmony XB4	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Green	-HL 153 02...-HL 153 04;-HL 156 02...-HL 156 04;-HL 159 02...-HL 159 04;-HL 164 02...-HL 164 04;-HL 167 02...-HL 167 04										
	5.	SE.ZB4BV033	4	Schneider Electric	Green pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Green	-HL 153 03;-HL 156 03;-HL 164 03;-HL 167 03										
	6.	SE.ZB4BV053	5	Schneider Electric	Orange pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Orange	-HL 153 04;-HL 156 04;-HL 159 04;-HL 164 04;-HL 16 7 04										
	7.	SE.RXM4AB2P7	10	Schneider Electric	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED	-K 153 15;-K 153 16;-K 156 15;-K 156 16;-K 160 08;-K 160 10;-K 164 15;-K 164 16;-K 167 15;-K 167 16										
	8.	SE.RXZE2S114M	10	Schneider Electric	Socket, Harmony Electromechanical Relays, for RXM2 RXM4 relays	For RXM2/RXM4 relays Screw connectors Separate contact	-K 153 15;-K 153 16;-K 156 15;-K 156 16;-K 160 08;-K 160 10;-K 164 15;-K 164 16;-K 167 15;-K 167 16										
	9.	SE.RXM041FU7	10	Schneider Electric	Protection diode	RC circuit 110...240 V a.c.	-K 153 15;-K 153 16;-K 156 15;-K 156 16;-K 160 08;-K 160 10;-K 164 15;-K 164 16;-K 167 15;-K 167 16										
	10.	SE.LC1D18P7	1	Schneider Electric	Contacteur TeSys LC1-D - 3P - AC-3 440V 18 A, Coil 230 V AC	Contacteur TeSys LC1-D - 3P - AC-3 440V 18 A, Coil 230 V AC	-KM 152 05										
	11.	SE.LADN31	6	Schneider Electric	Auxiliary contact block TeSys - 3 NO + 1 NC,screw-clamps terminals	Auxiliary contact block TeSys - 3 NO + 1 NC,screw-clamps terminals	-KM 152 05;-KM 155 05;-KM 158 05;-KM 158 07;-KM 1 63 05;-KM 166 05										
	12.	SE.LAD4RCU	6	Schneider Electric	RC Transient Suppressor 110 TO 250 VAC	RC Transient Suppressor 110 TO 250 VAC	-KM 152 05;-KM 155 05;-KM 158 05;-KM 158 07;-KM 1 63 05;-KM 166 05										
	13.	SE.LC1D12P7	5	Schneider Electric	TeSys Deca contactor - 3P(3 NO) - AC-3 - <lt/>= 440 V 12 A - 230 V AC coil	TeSys Deca contactor - 3P(3 NO) - AC-3 - <lt/>= 440 V 12 A - 230 V AC coil	-KM 155 05;-KM 158 05;-KM 158 07;-KM 163 05;-KM 1 66 05										
	14.	SE.LAD9R1V	1	Schneider Electric	Reversing mechanical interlock kit	Tesys D, reversing mechanical interlock kit, with electrical interlocking, for LC1D09 to LC1D38	-KM 158 05										
	15.	SOC.192A1202	1	Socomec	Ammeter 0-15A	Scale: 0-15A (AC) Dimensions: 48x48mm	-PG 152 08										
	16.	SE.GV2P20	1	Schneider Electric	TeSys GV2P - Thermal Magnetic Motor Circuit Breaker	Motor circuit breaker, TeSys GV2, 3P, 13-18 A, thermal magnetic, screw clamp terminals	-Q 152 05										
	17.	SE.GVAE11	5	Schneider Electric	Auxiliary contact block	1NO+1NC Front mounting For GV2	-Q 152 05;-Q 155 05;-Q 158 05;-Q 163 05;-Q 166 05										
	18.	SE.GVAD0110	5	Schneider Electric	TeSys GV AD0110 - auxiliary contact - 1 NO + 1 NC (fault)	Add-on contact block,TeSys Deca Frame 2/3,1NC(fault)+1NO,side,for GV2/GV3(except GV3ME)	-Q 152 05;-Q 155 05;-Q 158 05;-Q 163 05;-Q 166 05										
	19.	SE.A9F74202	11	Schneider Electric	2-pole MCB, 2A/C	Nominal current: 2 A Tripping curve: C	-Q 153 04;-Q 153 14;-Q 156 04;-Q 156 14;-Q 159 04;-Q 160 08;-Q 164 04;-Q 164 14;-Q 167 04;-Q 167 14;-Q 171 04										
	20.	SE.GV2P16	1	Schneider Electric	TeSys GV2P - Thermal Magnetic Motor Circuit Breaker	Motor circuit breaker, TeSys GV2, 3P, 9-14 A, thermal magnetic, screw clamp terminals	-Q 155 05										
	21.	SE.GV2P08	3	Schneider Electric	TeSys GV2P - Thermal Magnetic Motor Circuit Breaker	Motor circuit breaker, TeSys GV2, 3P, 2.5-4 A, thermal magnetic, screw clamp terminals	-Q 158 05;-Q 163 05;-Q 166 05										
	22.	SE.A9A26924	1	Schneider Electric	Auxiliary contact iOF, iC60	Auxiliary contact, Acti9, iOF, 1 OC, AC/DC	-Q 171 04										


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 3		Project:	BRC-4	Unit & Issuer:	Number:	Revision:	E	#Z	
Drawn:	Luka Božičević															
Approved:	Grga Kolić				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	Summarized parts list		Drawing designation:				=4LKF001AR	Sheet:	201
Format:	A3									BRC-4-ATEP0-1870-E				+4LKF003AR	Next:	202


Date:			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 3	Project:	BRC-4	Unit & Issuer:	Number:	Revision:		
Drawn:			Luka Božičević	Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	Summarized parts list	Drawing designation:				#Z	
Approved:			Grga Kolić										
Format:			A3										

Date:				Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 3	Project:	BRC-4	Unit & Issuer:		Number:		Revision:		
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	Summarized parts list	Drawing designation:								#Z
Approved:	Grga Kolić														Sheet:	203
Format:	A3														+4LKF003AR	Next:

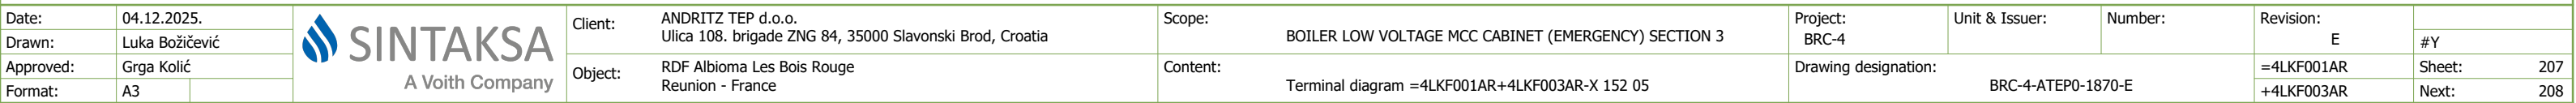


Terminal diagram

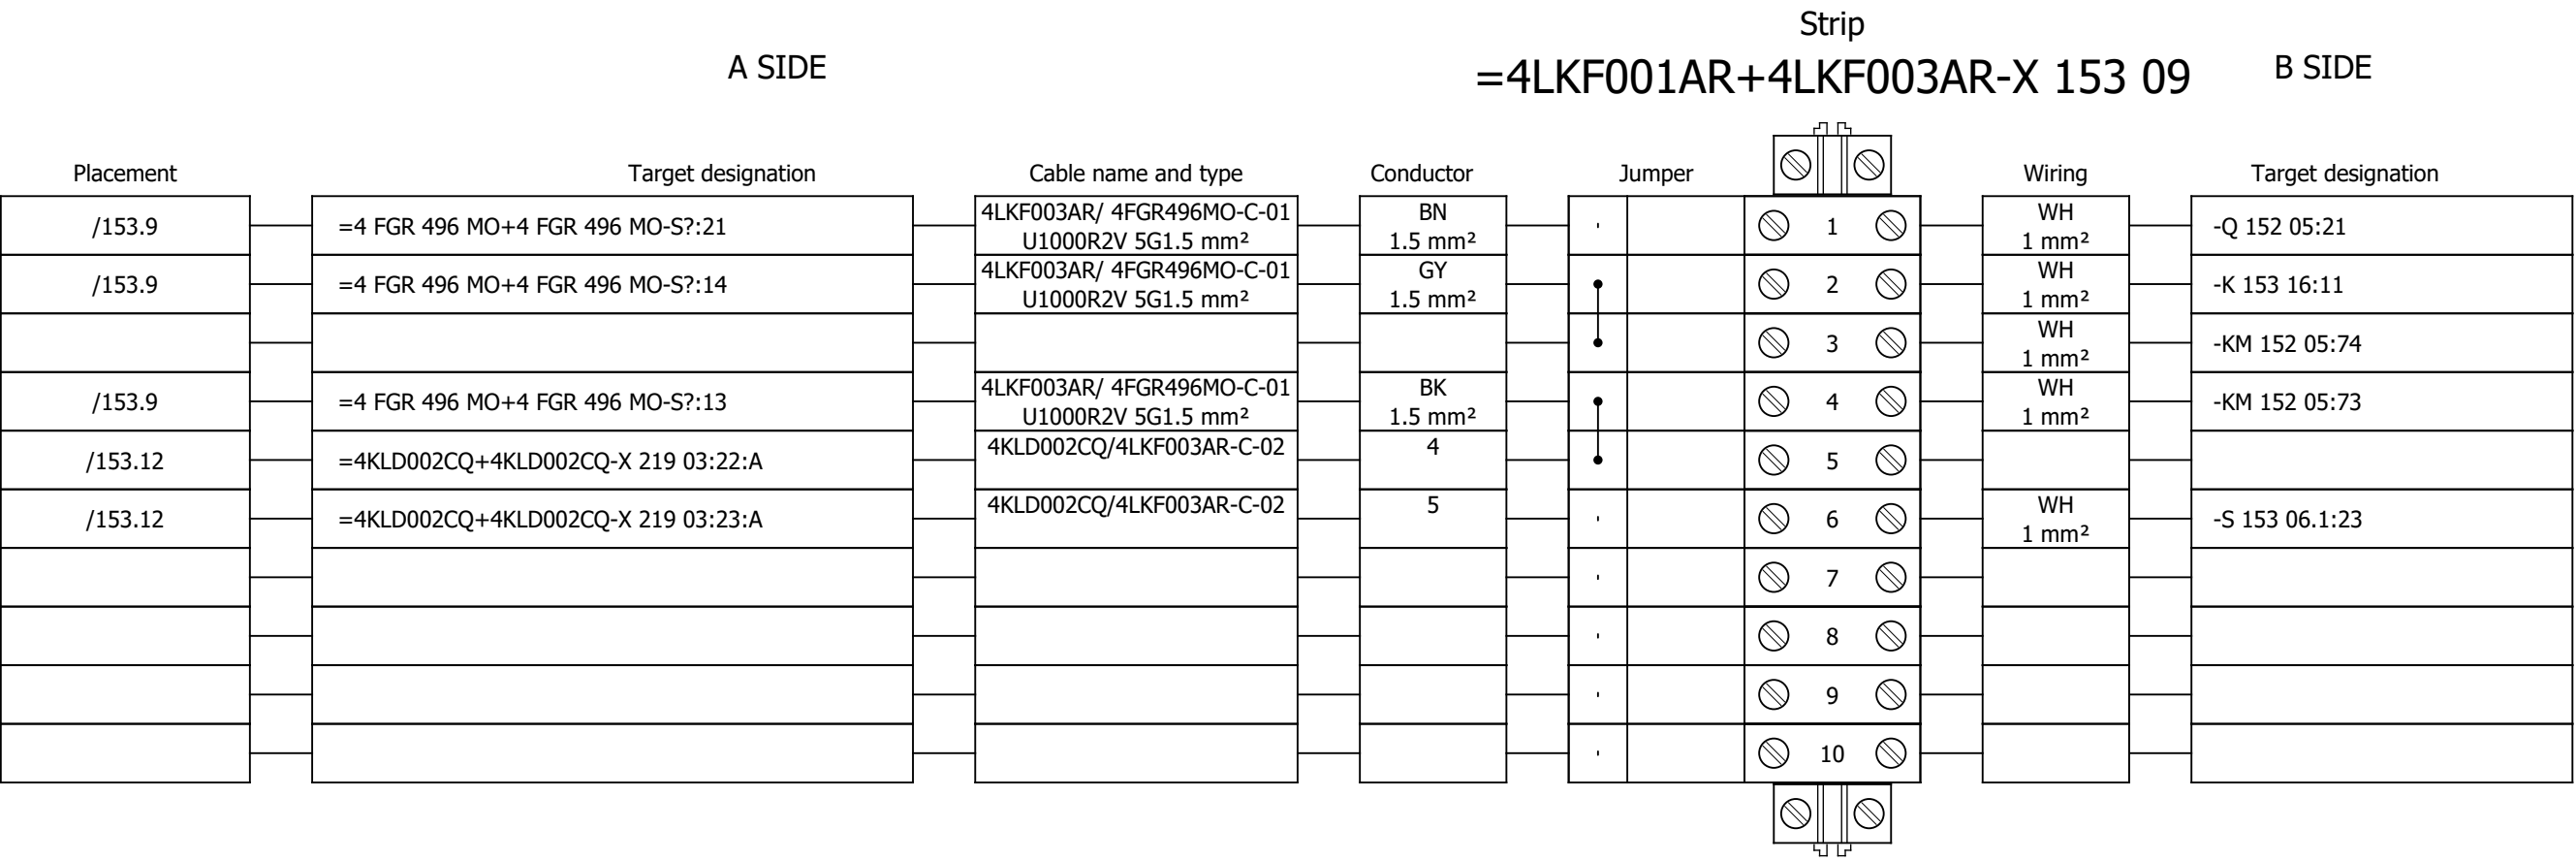


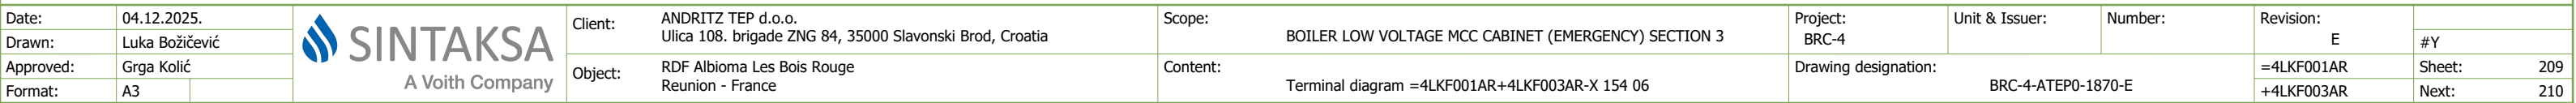


Terminal diagram

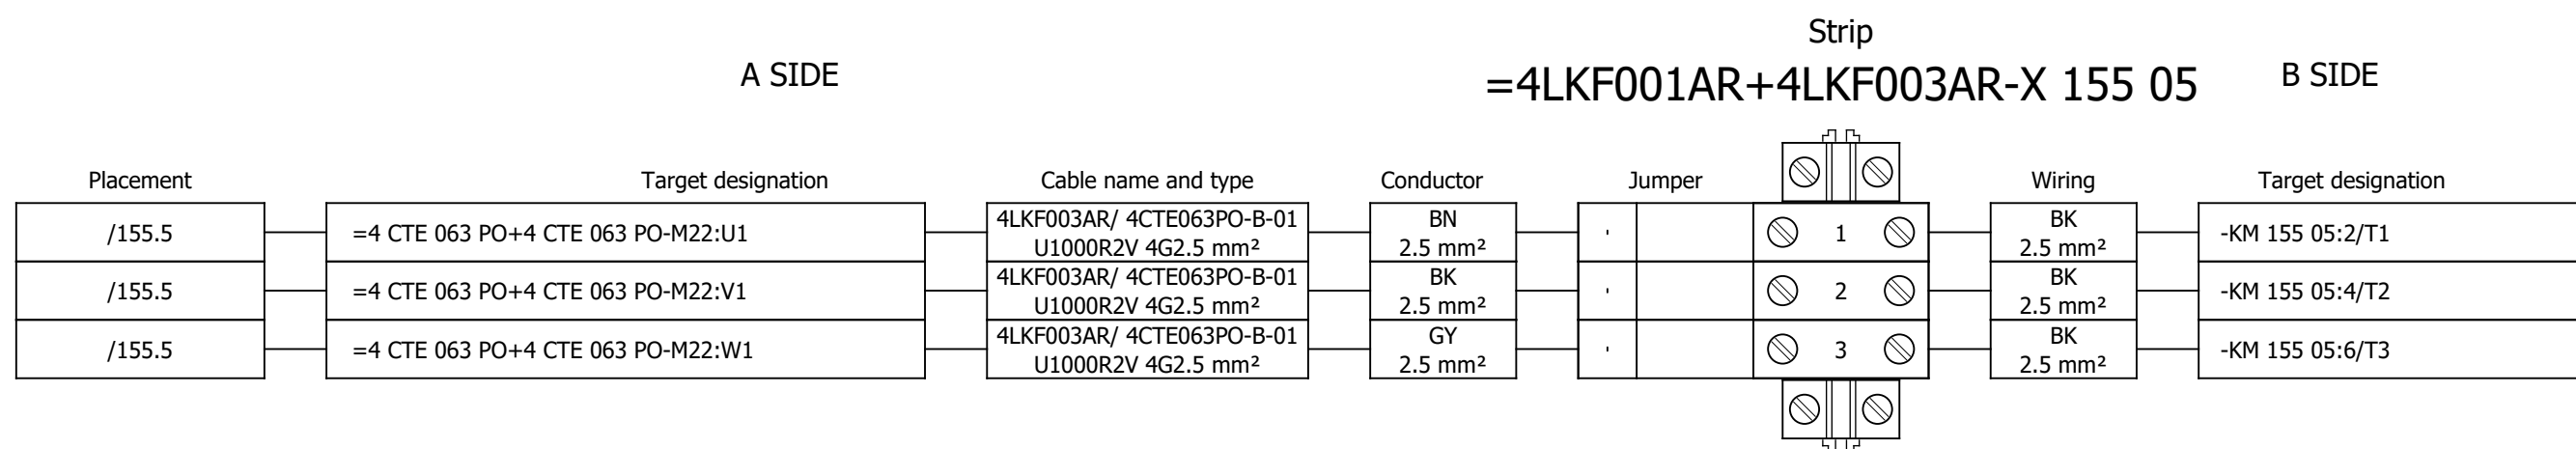


Strip
=4LKF001AR+4LKF003AR-X 156 09 B SIDE


Placement	Target designation	Cable name and type	Conductor	Jumper		Wiring	Target designation
/156.9	=4 CTE 063 PO+4 CTE 063 PO-S 156 08:21	4LKF003AR/ 4CTE063PO-C-01 U1000R2V 5G1.5 mm²	BN 1.5 mm²	,	 1 	WH 1 mm²	-Q 155 05:21
/156.9	=4 CTE 063 PO+4 CTE 063 PO-S 156 08.1:14	4LKF003AR/ 4CTE063PO-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²		 2 	WH 1 mm²	-K 156 16:11
					 3 	WH 1 mm²	-KM 155 05:74
/156.9	=4 CTE 063 PO+4 CTE 063 PO-S 156 08.1:13	4LKF003AR/ 4CTE063PO-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²		 4 	WH 1 mm²	-KM 155 05:73
/156.12	=4KLD002CQ+4KLD002CQ-X?:?:A	4KLD002CQ/4LKF003AR-C-03	1		 5 		
/156.12	=4KLD002CQ+4KLD002CQ-X?:?:A	4KLD002CQ/4LKF003AR-C-03	2	,	 6 	WH 1 mm²	-S 156 06.1:23
				,	 7 		
				,	 8 		
				,	 9 		
				,	 10 		

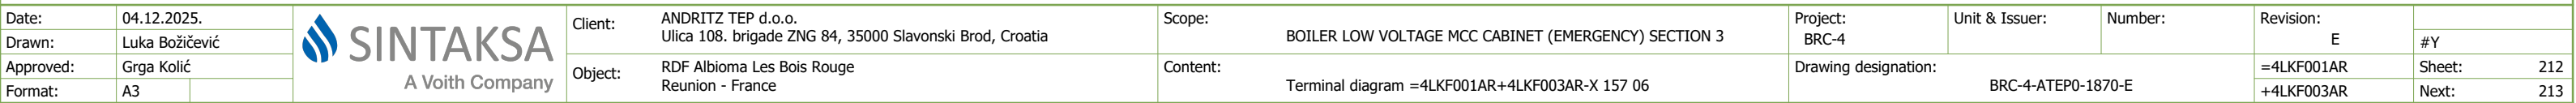


Terminal diagram

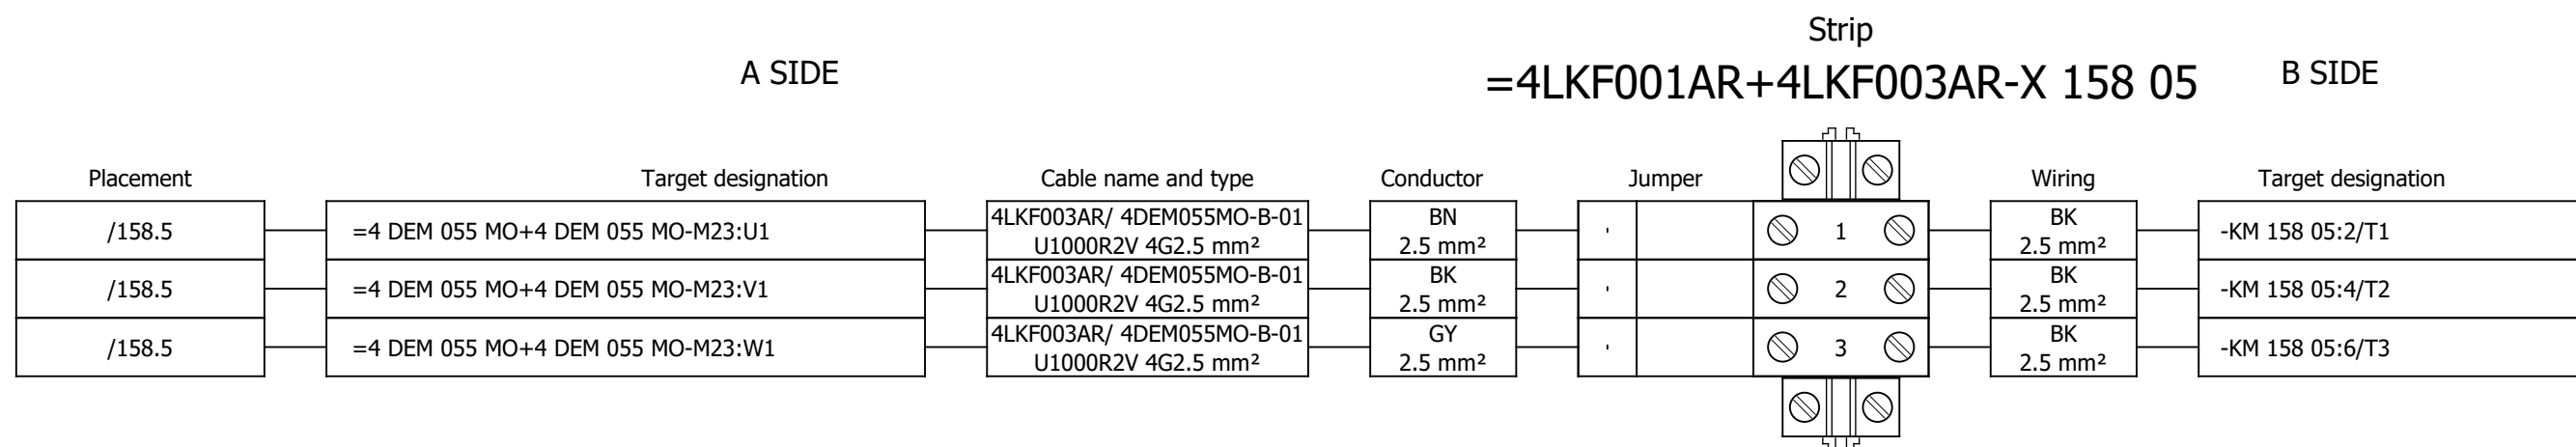


Terminal diagram

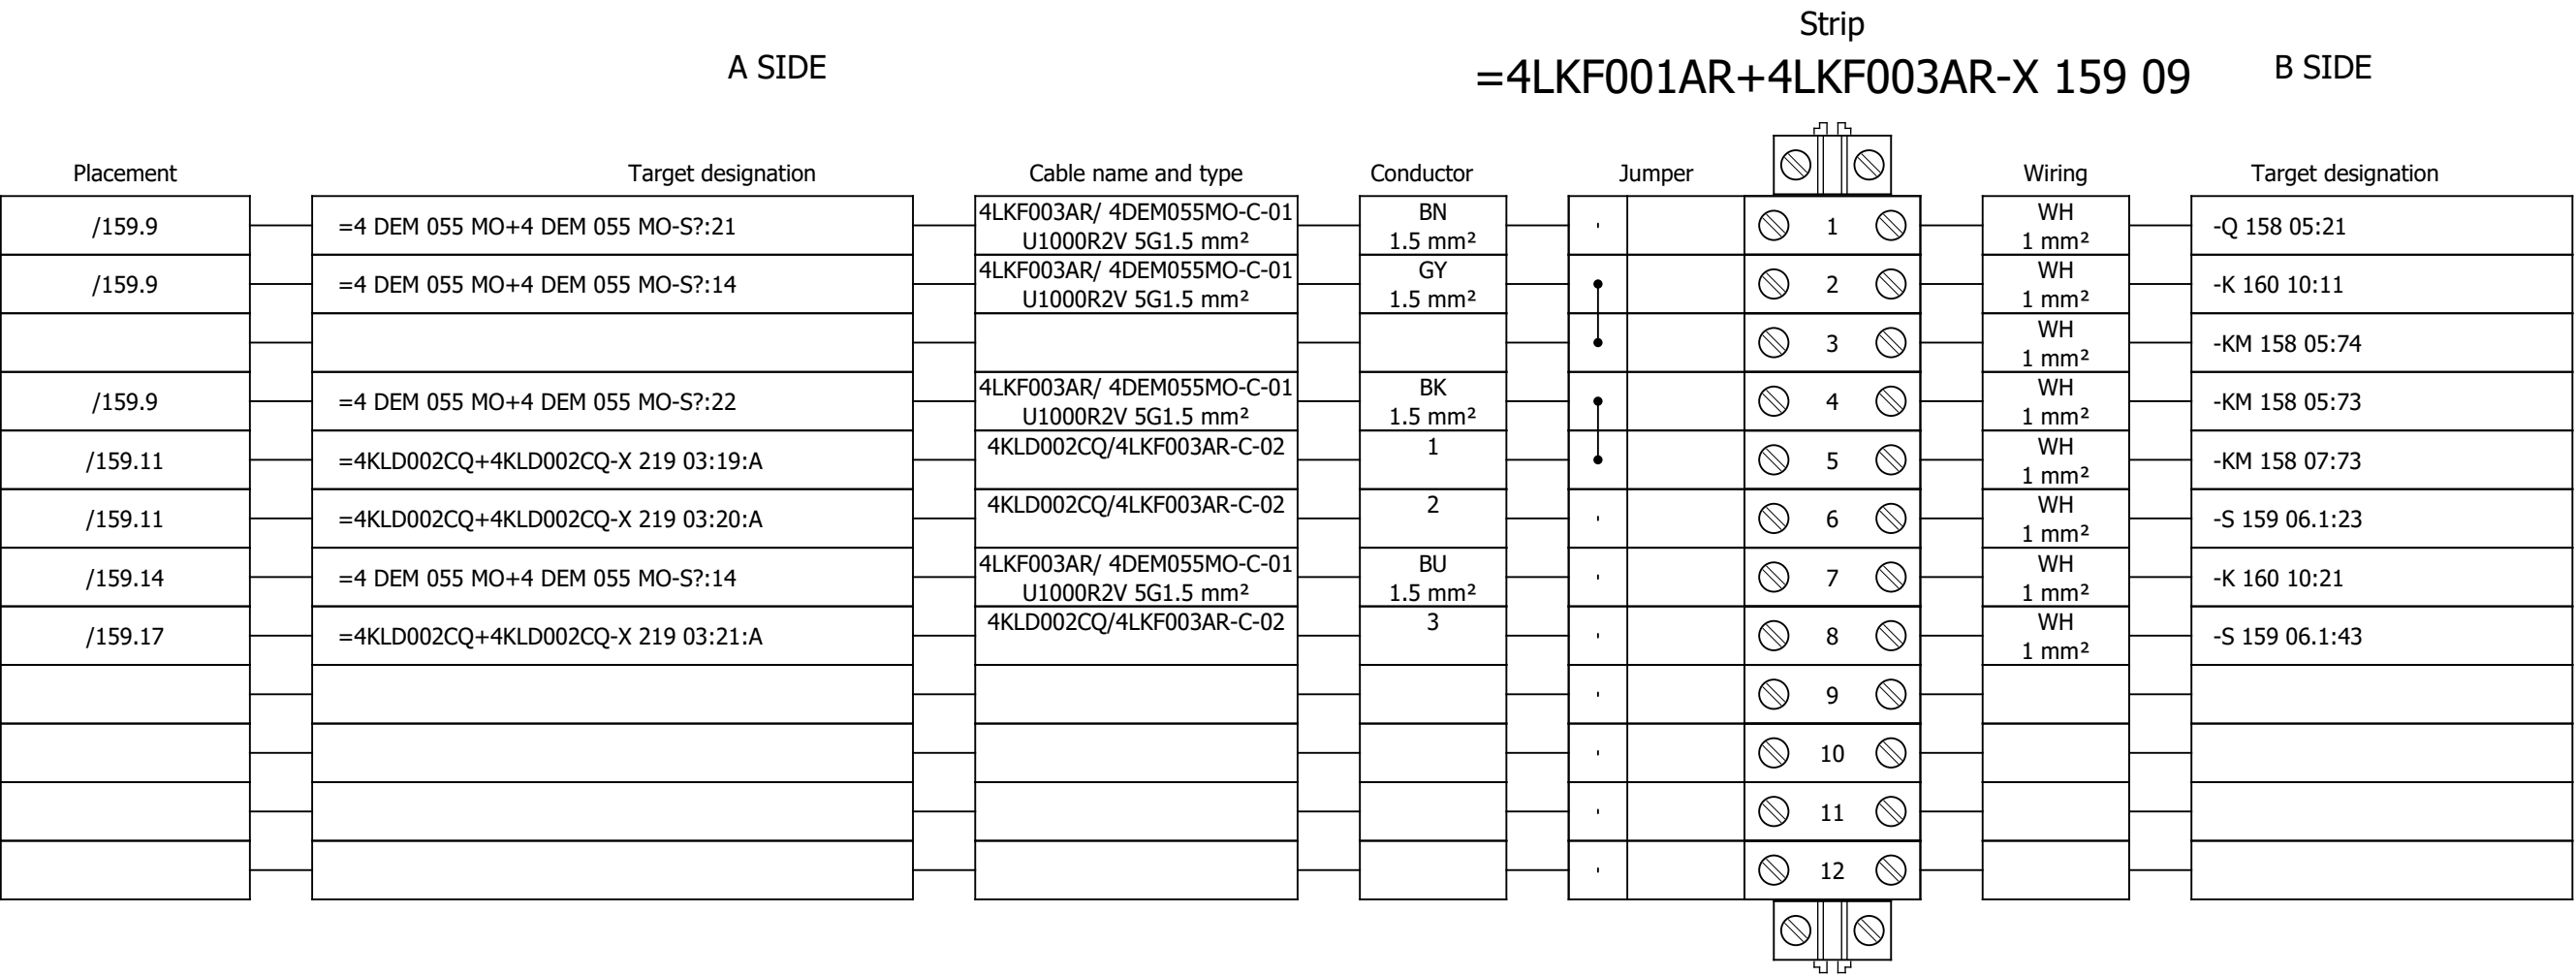


Terminal diagram


A SIDE				Strip				=4LKF001AR+4LKF003AR-X 161 06				B SIDE			
Placement	Target designation			Cable name and type			Conductor	Jumper				Wiring	Target designation		
/161.6	=4KLD002CQ+4KLD002CQ-X 043 07:10			4KLD002CQ/4LKF003AR-C-01			9			 1 					
										 2 		RD 1 mm²	-KM 158 05:83		
/161.11	=4 DEM 055 MO+4 DEM 055 MO-S?:31			4LKF003AR/ 4DEM055MO-C-02 U1000R2V 3G1.5 mm²			BN 1.5 mm²			 3 					
										 4 			=4 DEM 055 MO+4 DEM 055		
										 5 			=4 DEM 055 MO+4 DEM 055		
										 6 					
/161.8	=4KLD002CQ+4KLD002CQ-X 043 07:35			4KLD002CQ/4LKF003AR-C-01			12	,		 7 		RD 1 mm²	-KM 158 05:84		
/161.9	=4KLD002CQ+4KLD002CQ-X 043 07:36			4KLD002CQ/4LKF003AR-C-01			13	,		 8 		RD 1 mm²	-KM 158 07:84		
/161.11	=4 DEM 055 MO+4 DEM 055 MO-S?:32			4LKF003AR/ 4DEM055MO-C-02 U1000R2V 3G1.5 mm²			BU 1.5 mm²	,		 9 		RD 1 mm²	-K 160 10:31		
/161.11	=4KLD002CQ+4KLD002CQ-X 043 07:37			4KLD002CQ/4LKF003AR-C-01			14	,		 10 		RD 1 mm²	-S 159 06.1:54		
								,		 11 					
								,		 12 					
								,		 13 					
								,		 14 					
/162.6	=4KLD002CQ+4KLD002CQ-X 043 07:38			4KLD002CQ/4LKF003AR-C-01			15	,		 15 			=4 DEM 055 MO+4 DEM 055		
/162.9	=4KLD002CQ+4KLD002CQ-X 043 07:39			4KLD002CQ/4LKF003AR-C-01			16	,		 16 			=4 DEM 055 MO+4 DEM 055		
								,		 17 					
								,		 18 					
								,		19					

Terminal diagram

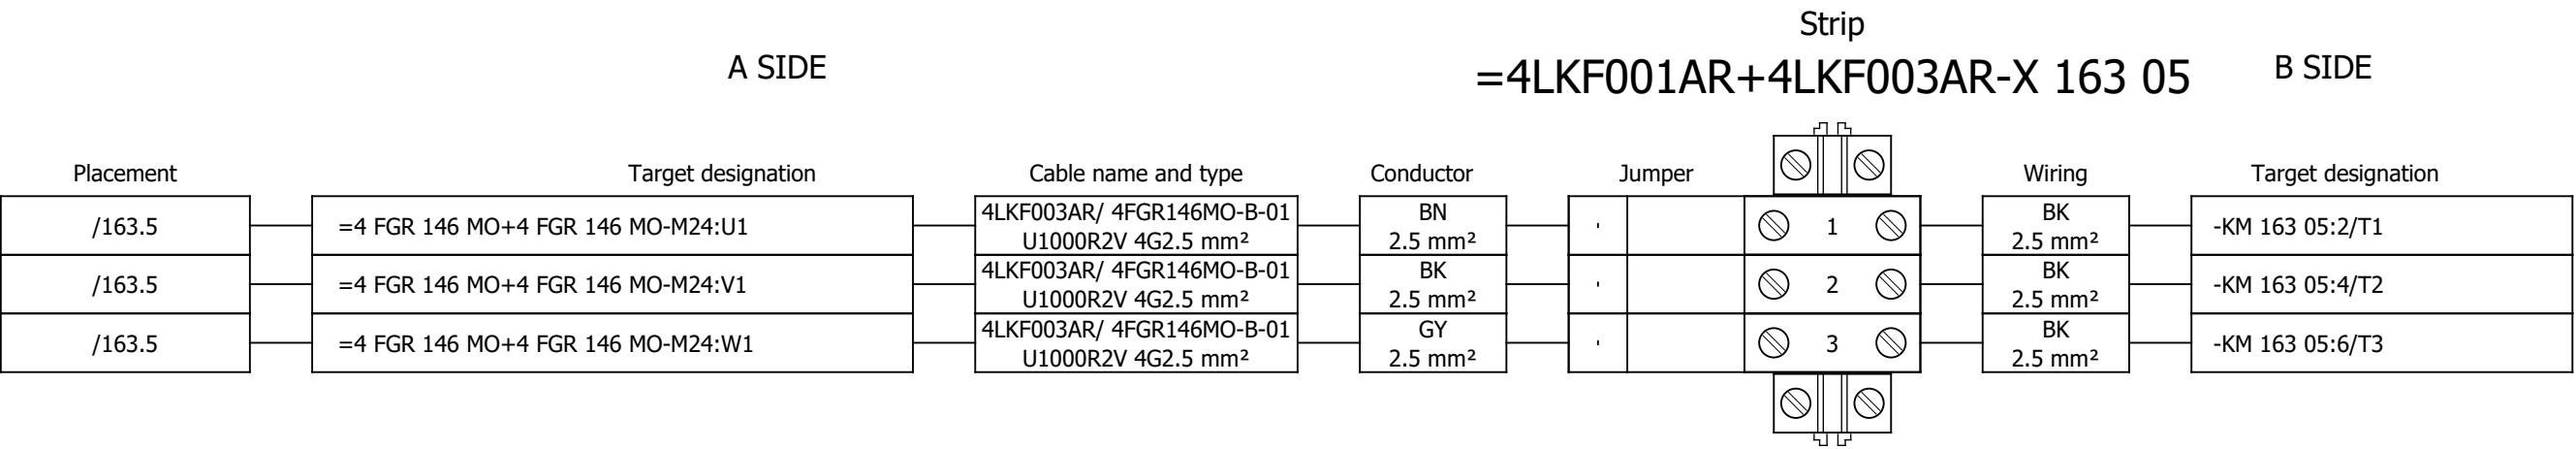


Terminal diagram

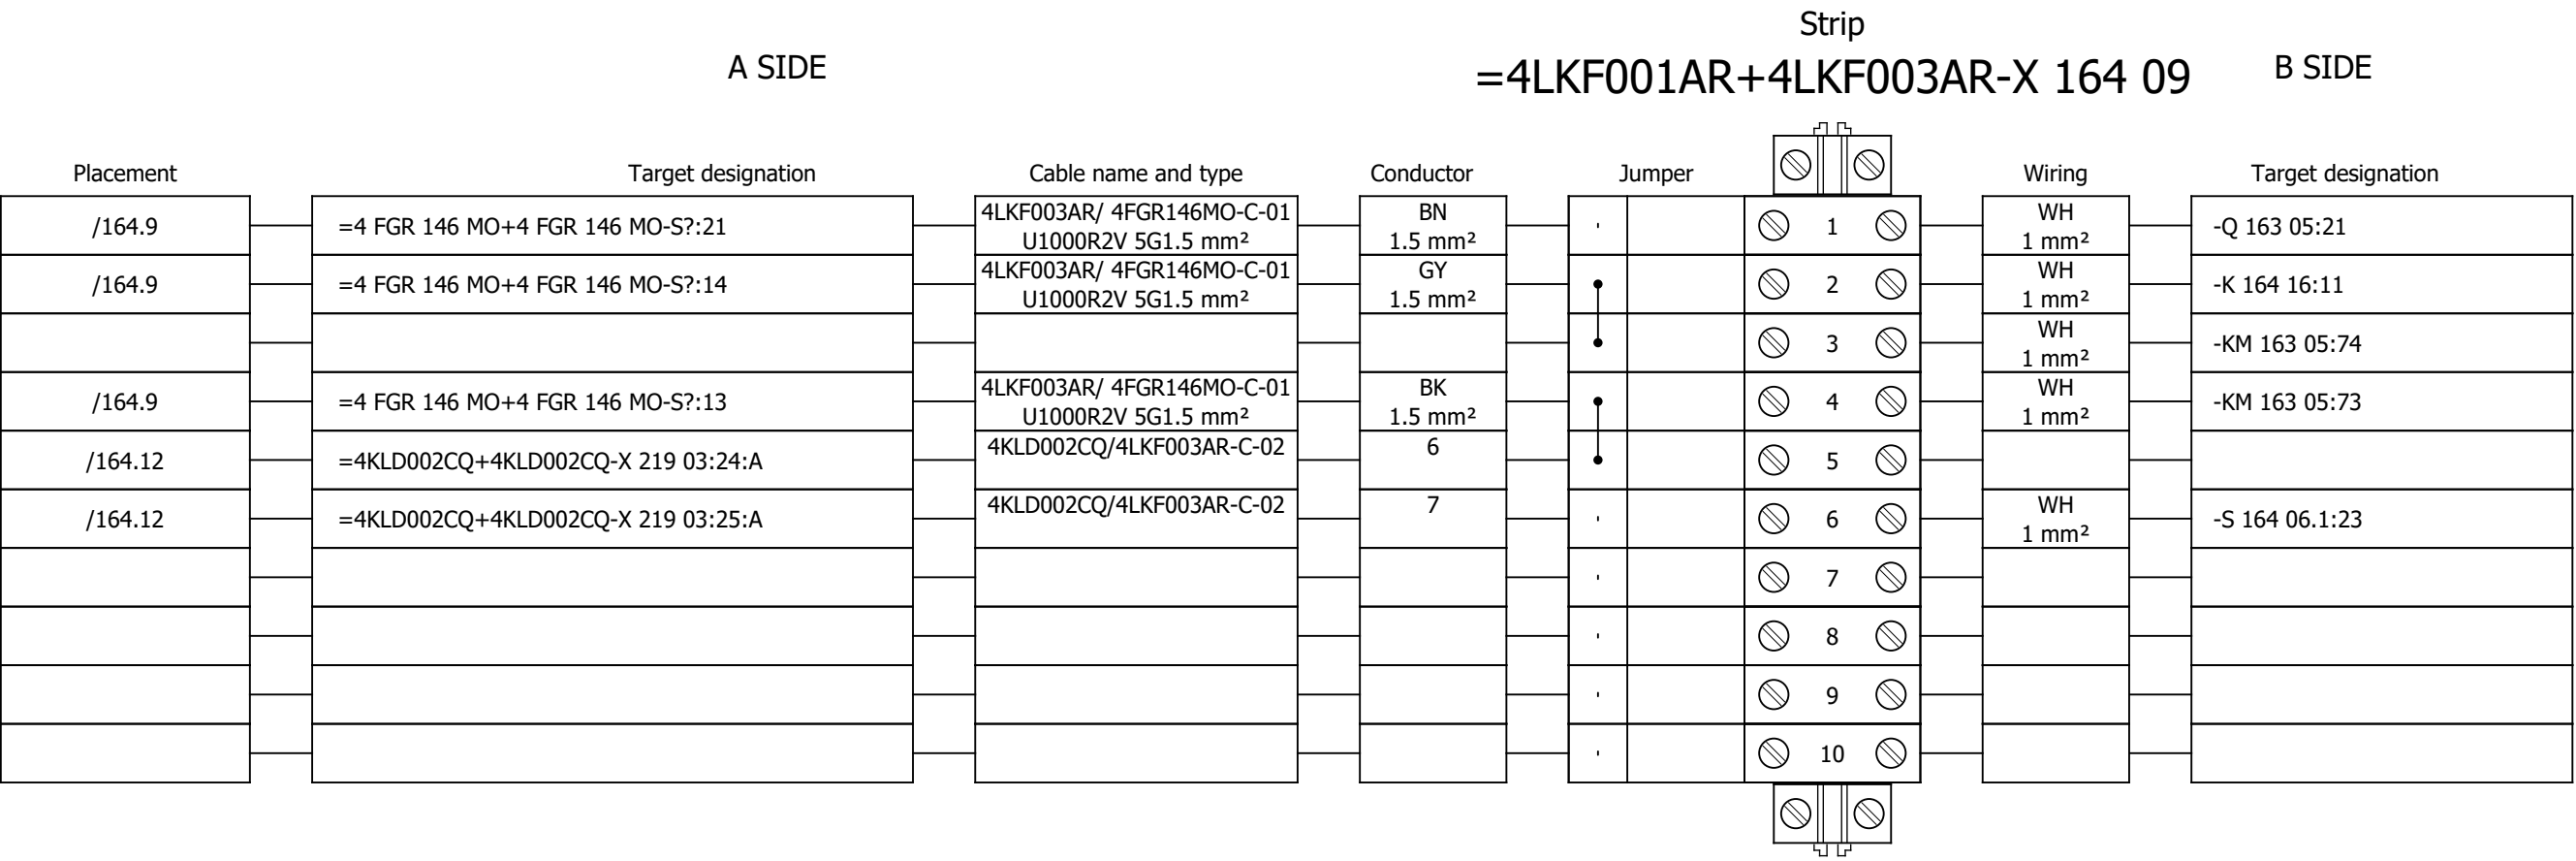


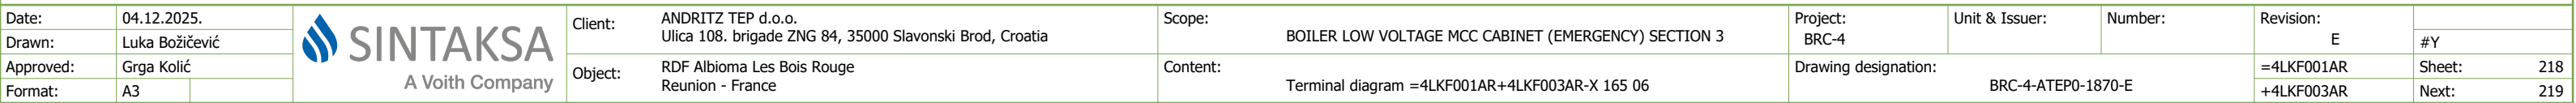


Terminal diagram

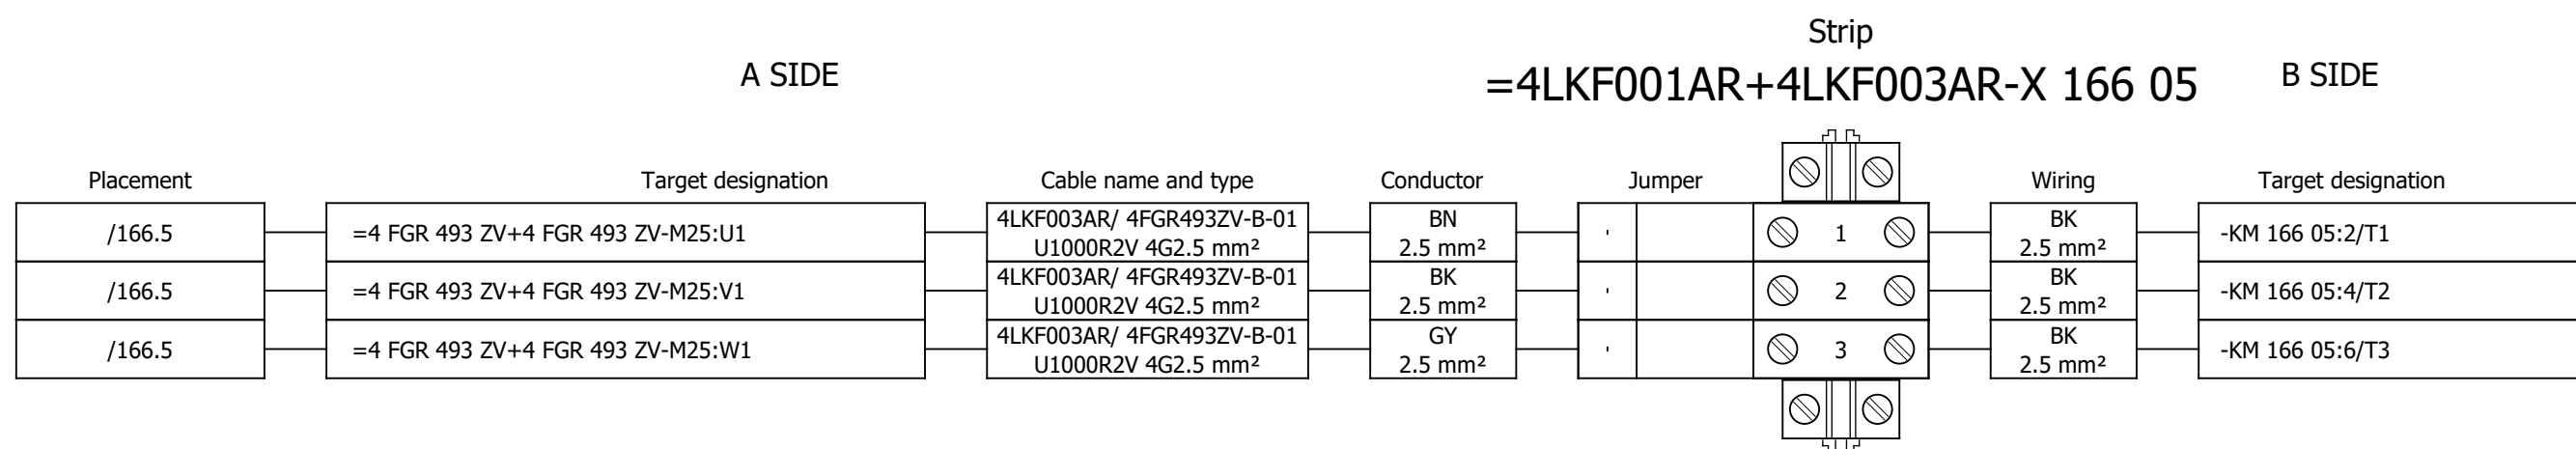


Terminal diagram

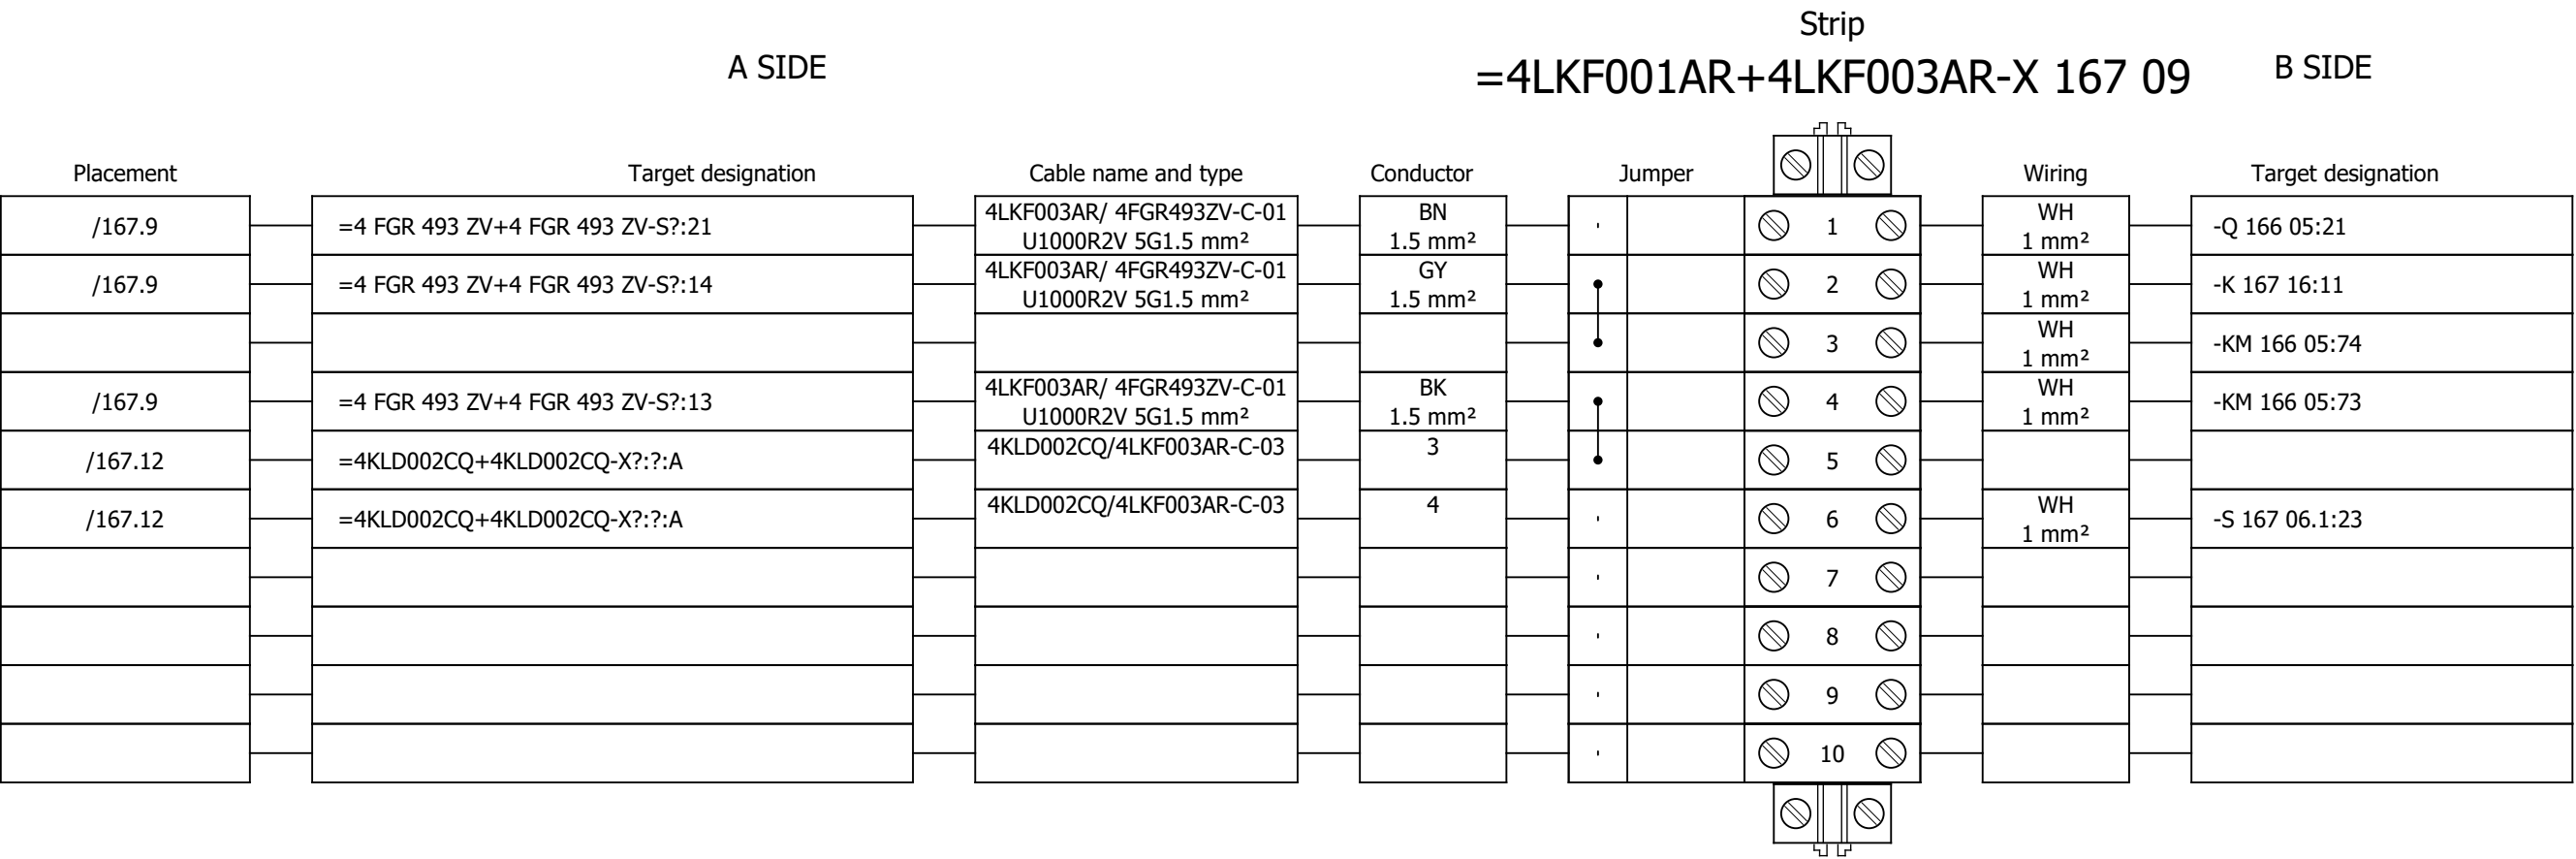


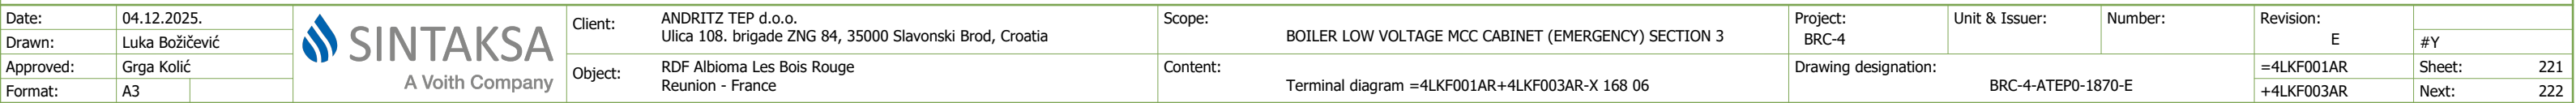


Terminal diagram

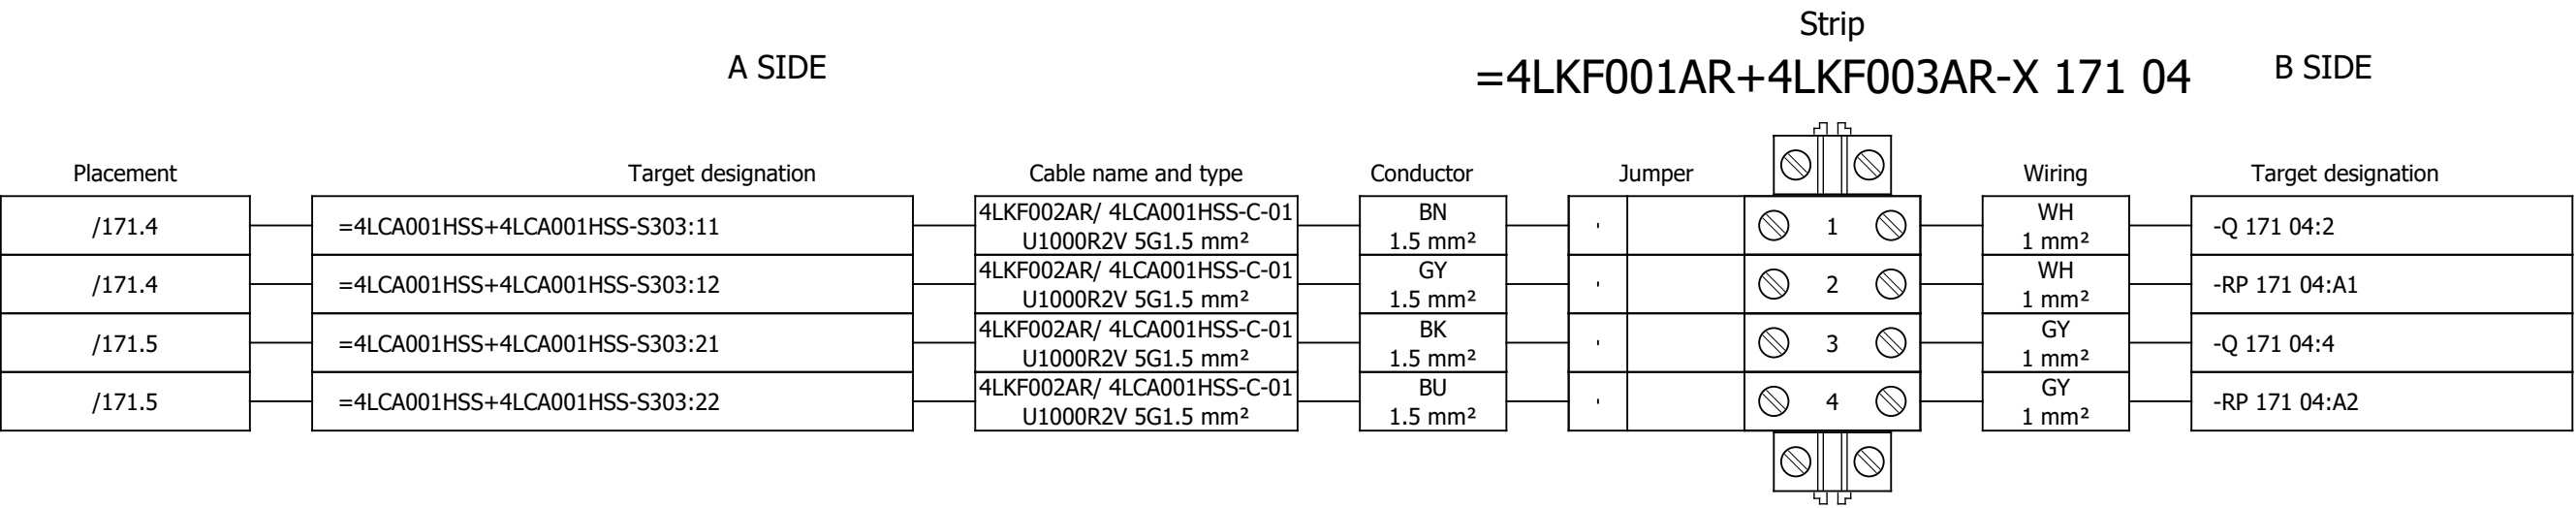


Terminal diagram

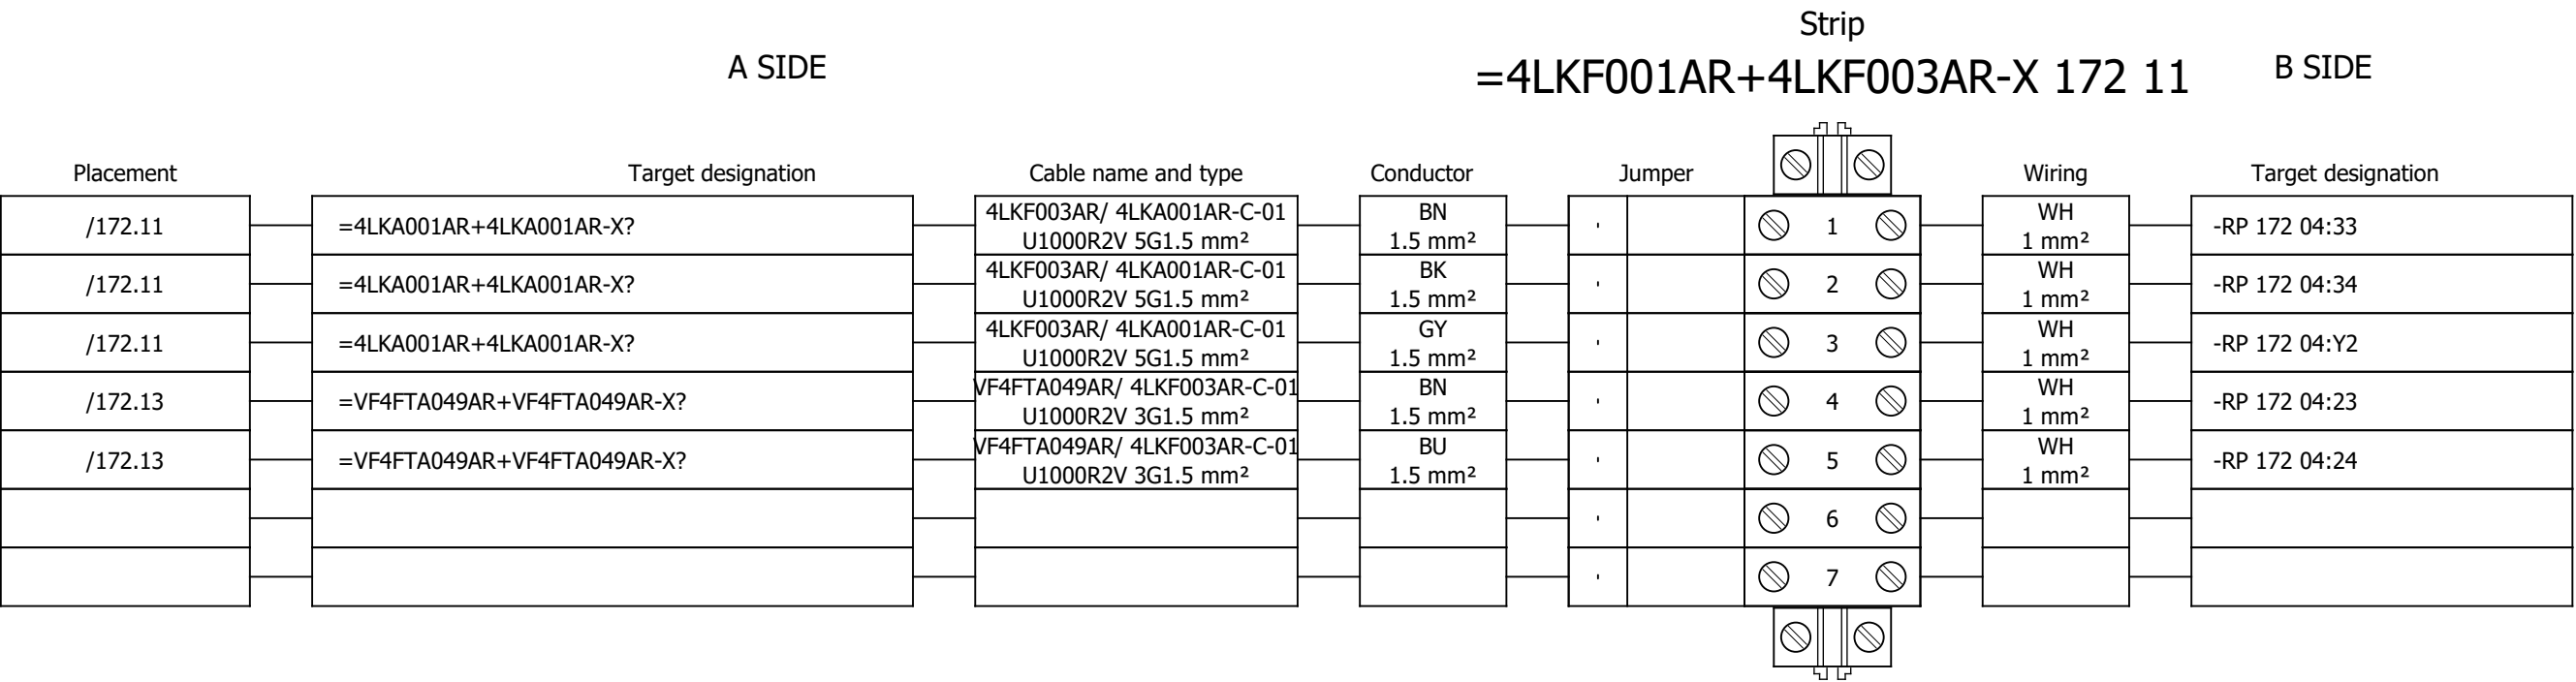


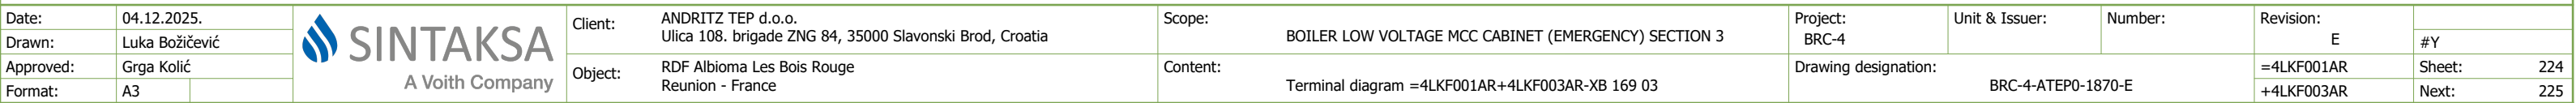


Terminal diagram

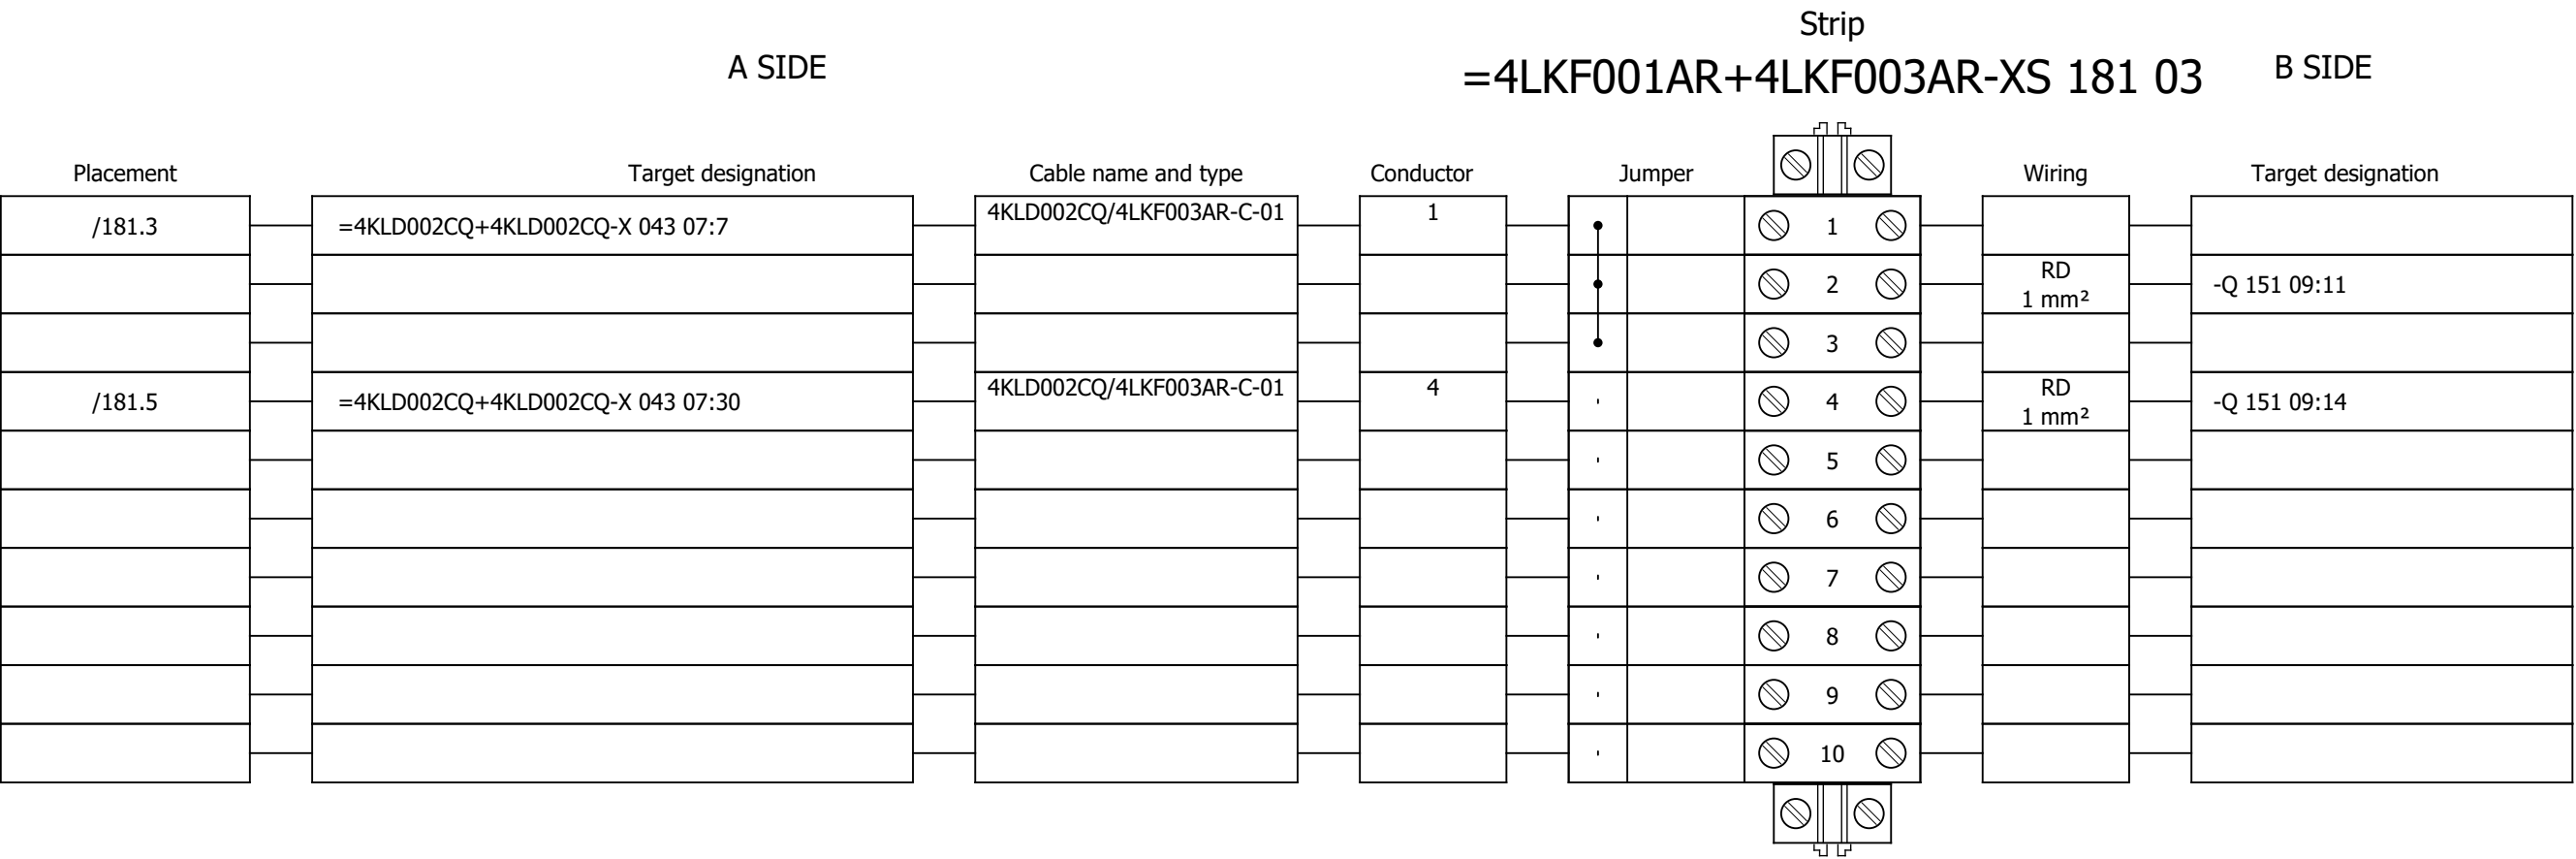


Terminal diagram


A SIDE										Strip		B SIDE					
										=4LKF001AR+4LKF003AR-XS 185 02							
Placement	Target designation				Cable name and type				Conductor	Jumper		Wiring	Target designation				
											 1 						
											 2 						
											 3 						
											 4 						
											 5 						
											 6 						
											 7 						
											 8 						
											 9 						
											 10 						
											 11 						
											 12 						
											 13 						
											 14 						
											 15 						
											 16 						
											 17 						
											 18 						
											 19 						
											 20 						
											 21 						
											 22 						
											 23 						
											 24 						
											 25 						


Terminal diagram

A SIDE										Strip		B SIDE					
										=4LKF001AR+4LKF003AR-XS 185 02							
Placement	Target designation				Cable name and type				Conductor	Jumper		Wiring	Target designation				
											 1 						
											 2 						
											 3 						
											 4 						
											 5 						
											 6 						
											 7 						
											 8 						
											 9 						
											 10 						
											 11 						
											 12 						
											 13 						
											 14 						
											 15 						
											 16 						
											 17 						
											 18 						
											 19 						
											 20 						
											 21 						
											 22 						
											 23 						
											 24 						
											 25 						

Terminal diagram

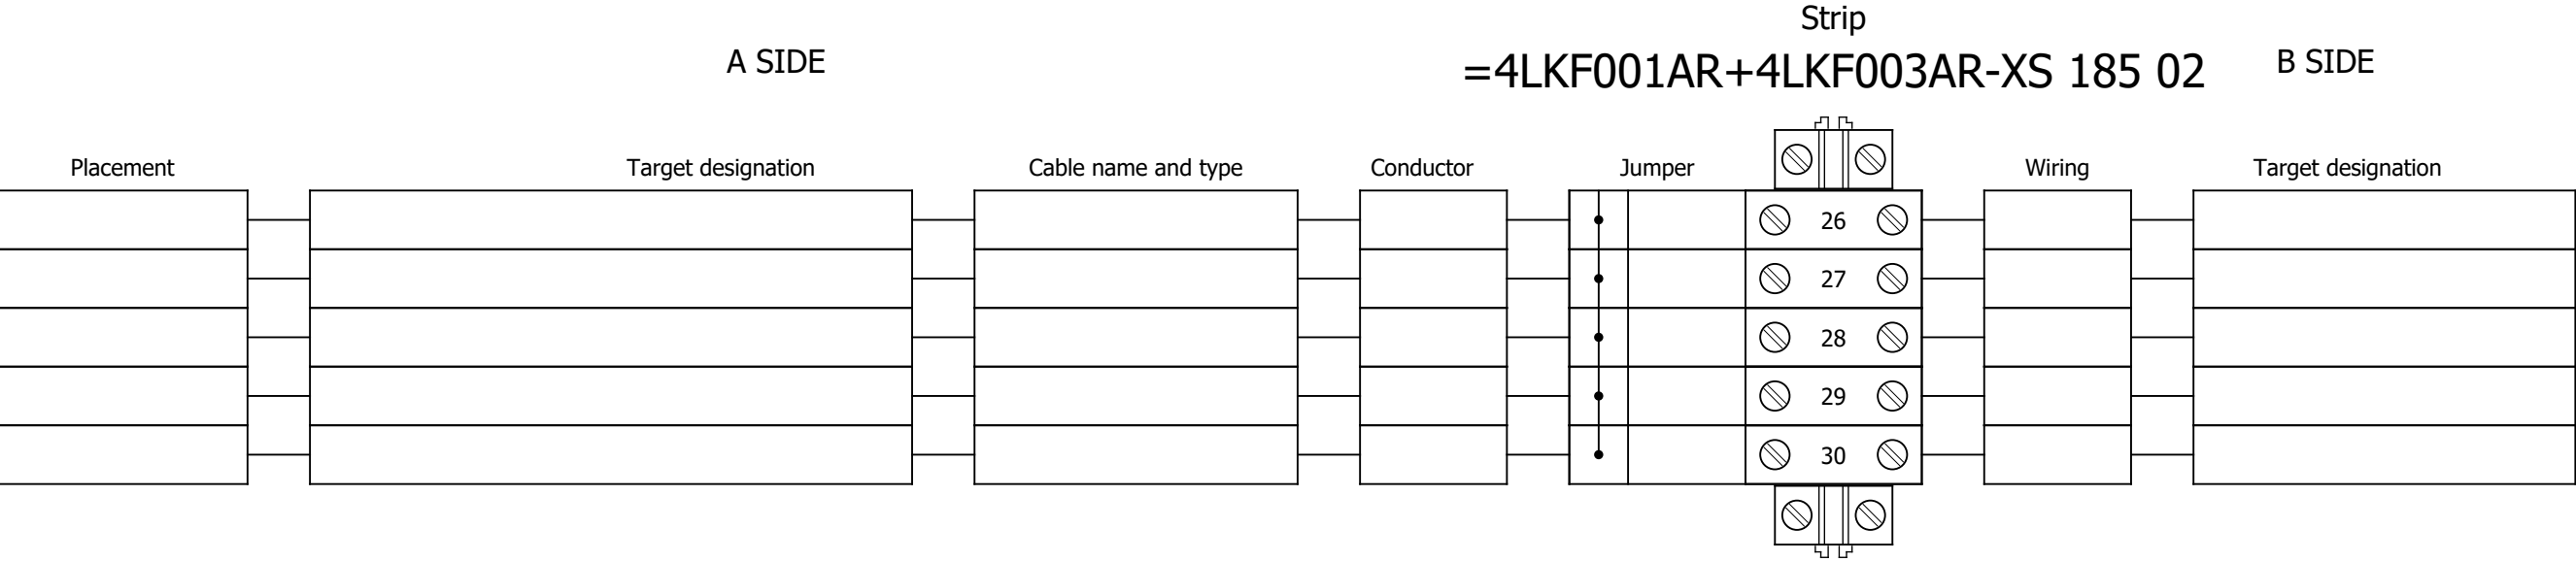


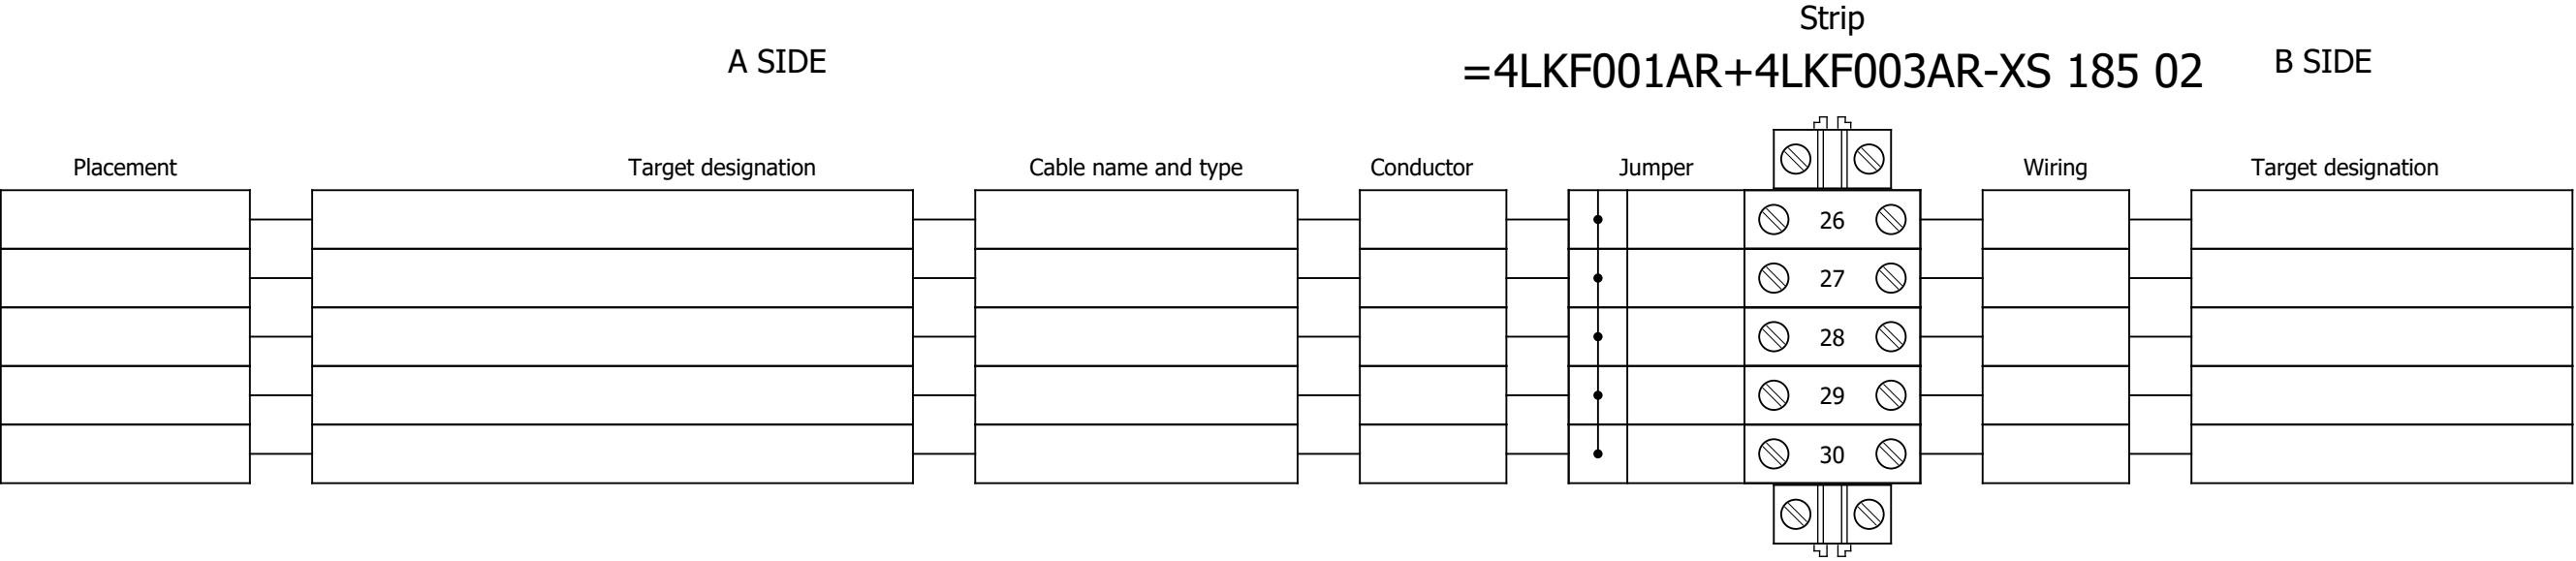


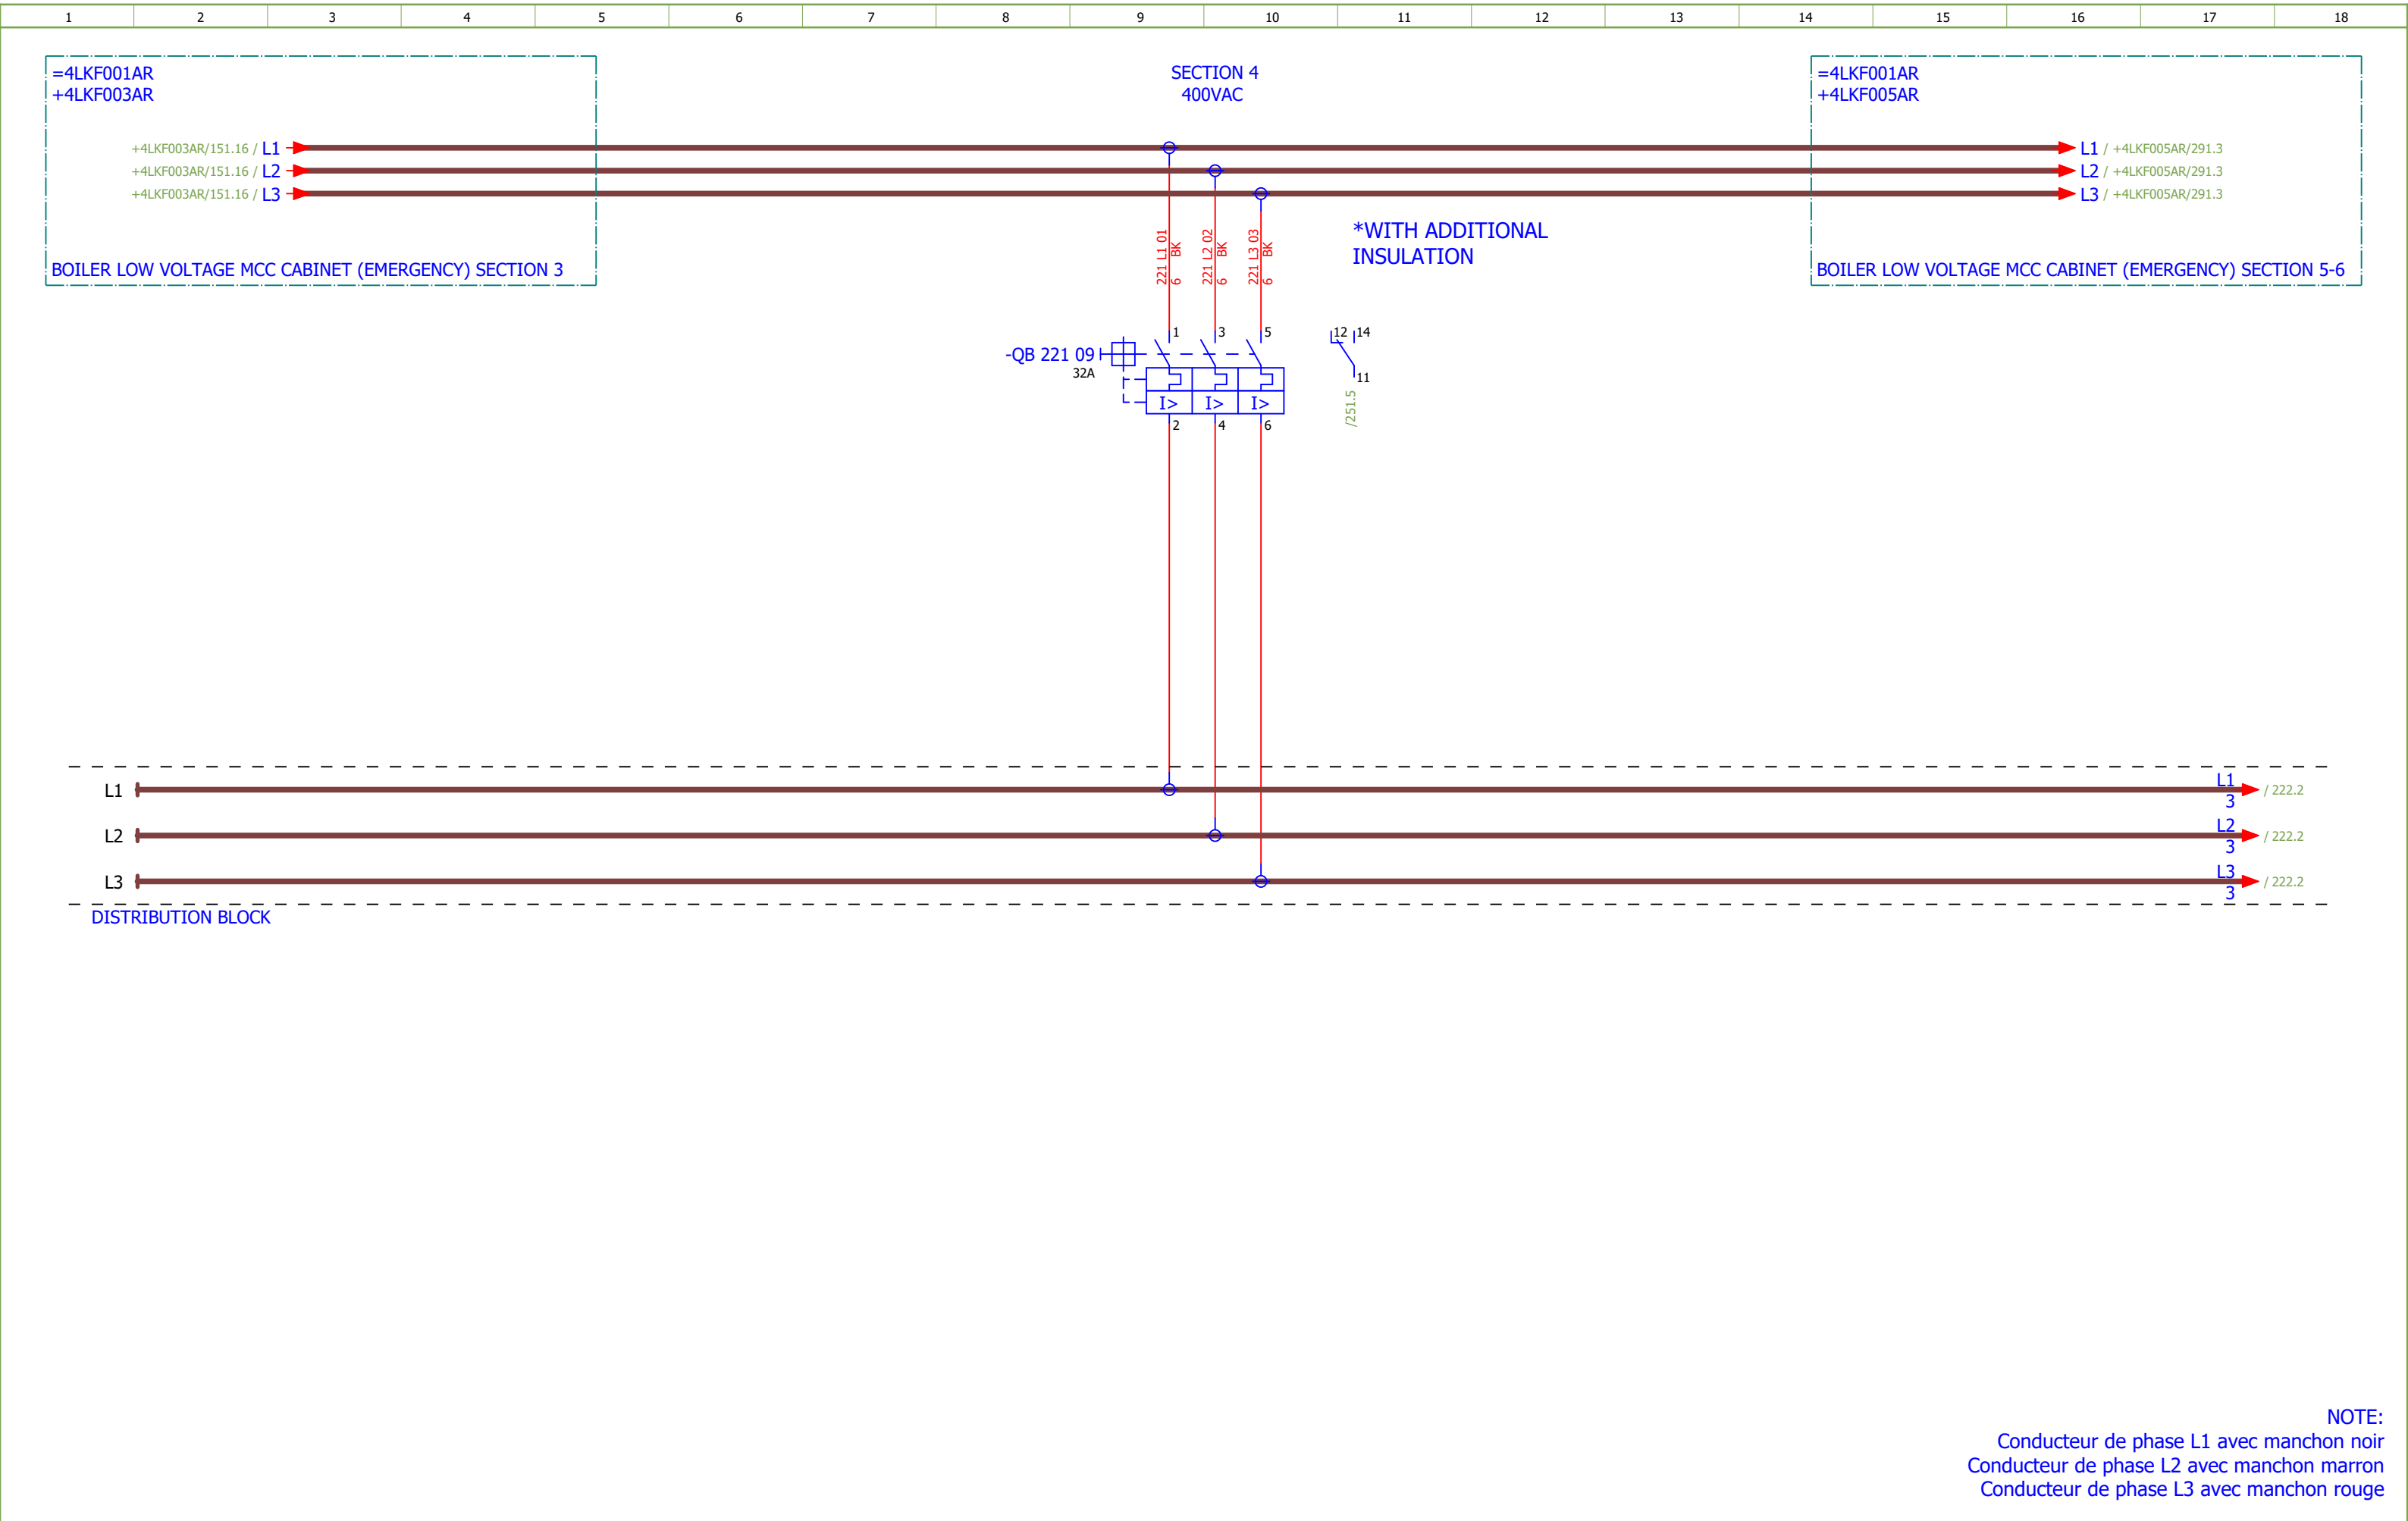

NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 4	Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E		
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	400VAC DISTRIBUTION	Drawing designation:							=4LKF001AR	Sheet:	221
Approved:	Grga Kolić														+4LKF004AR	Next:	222
Format:	A3																

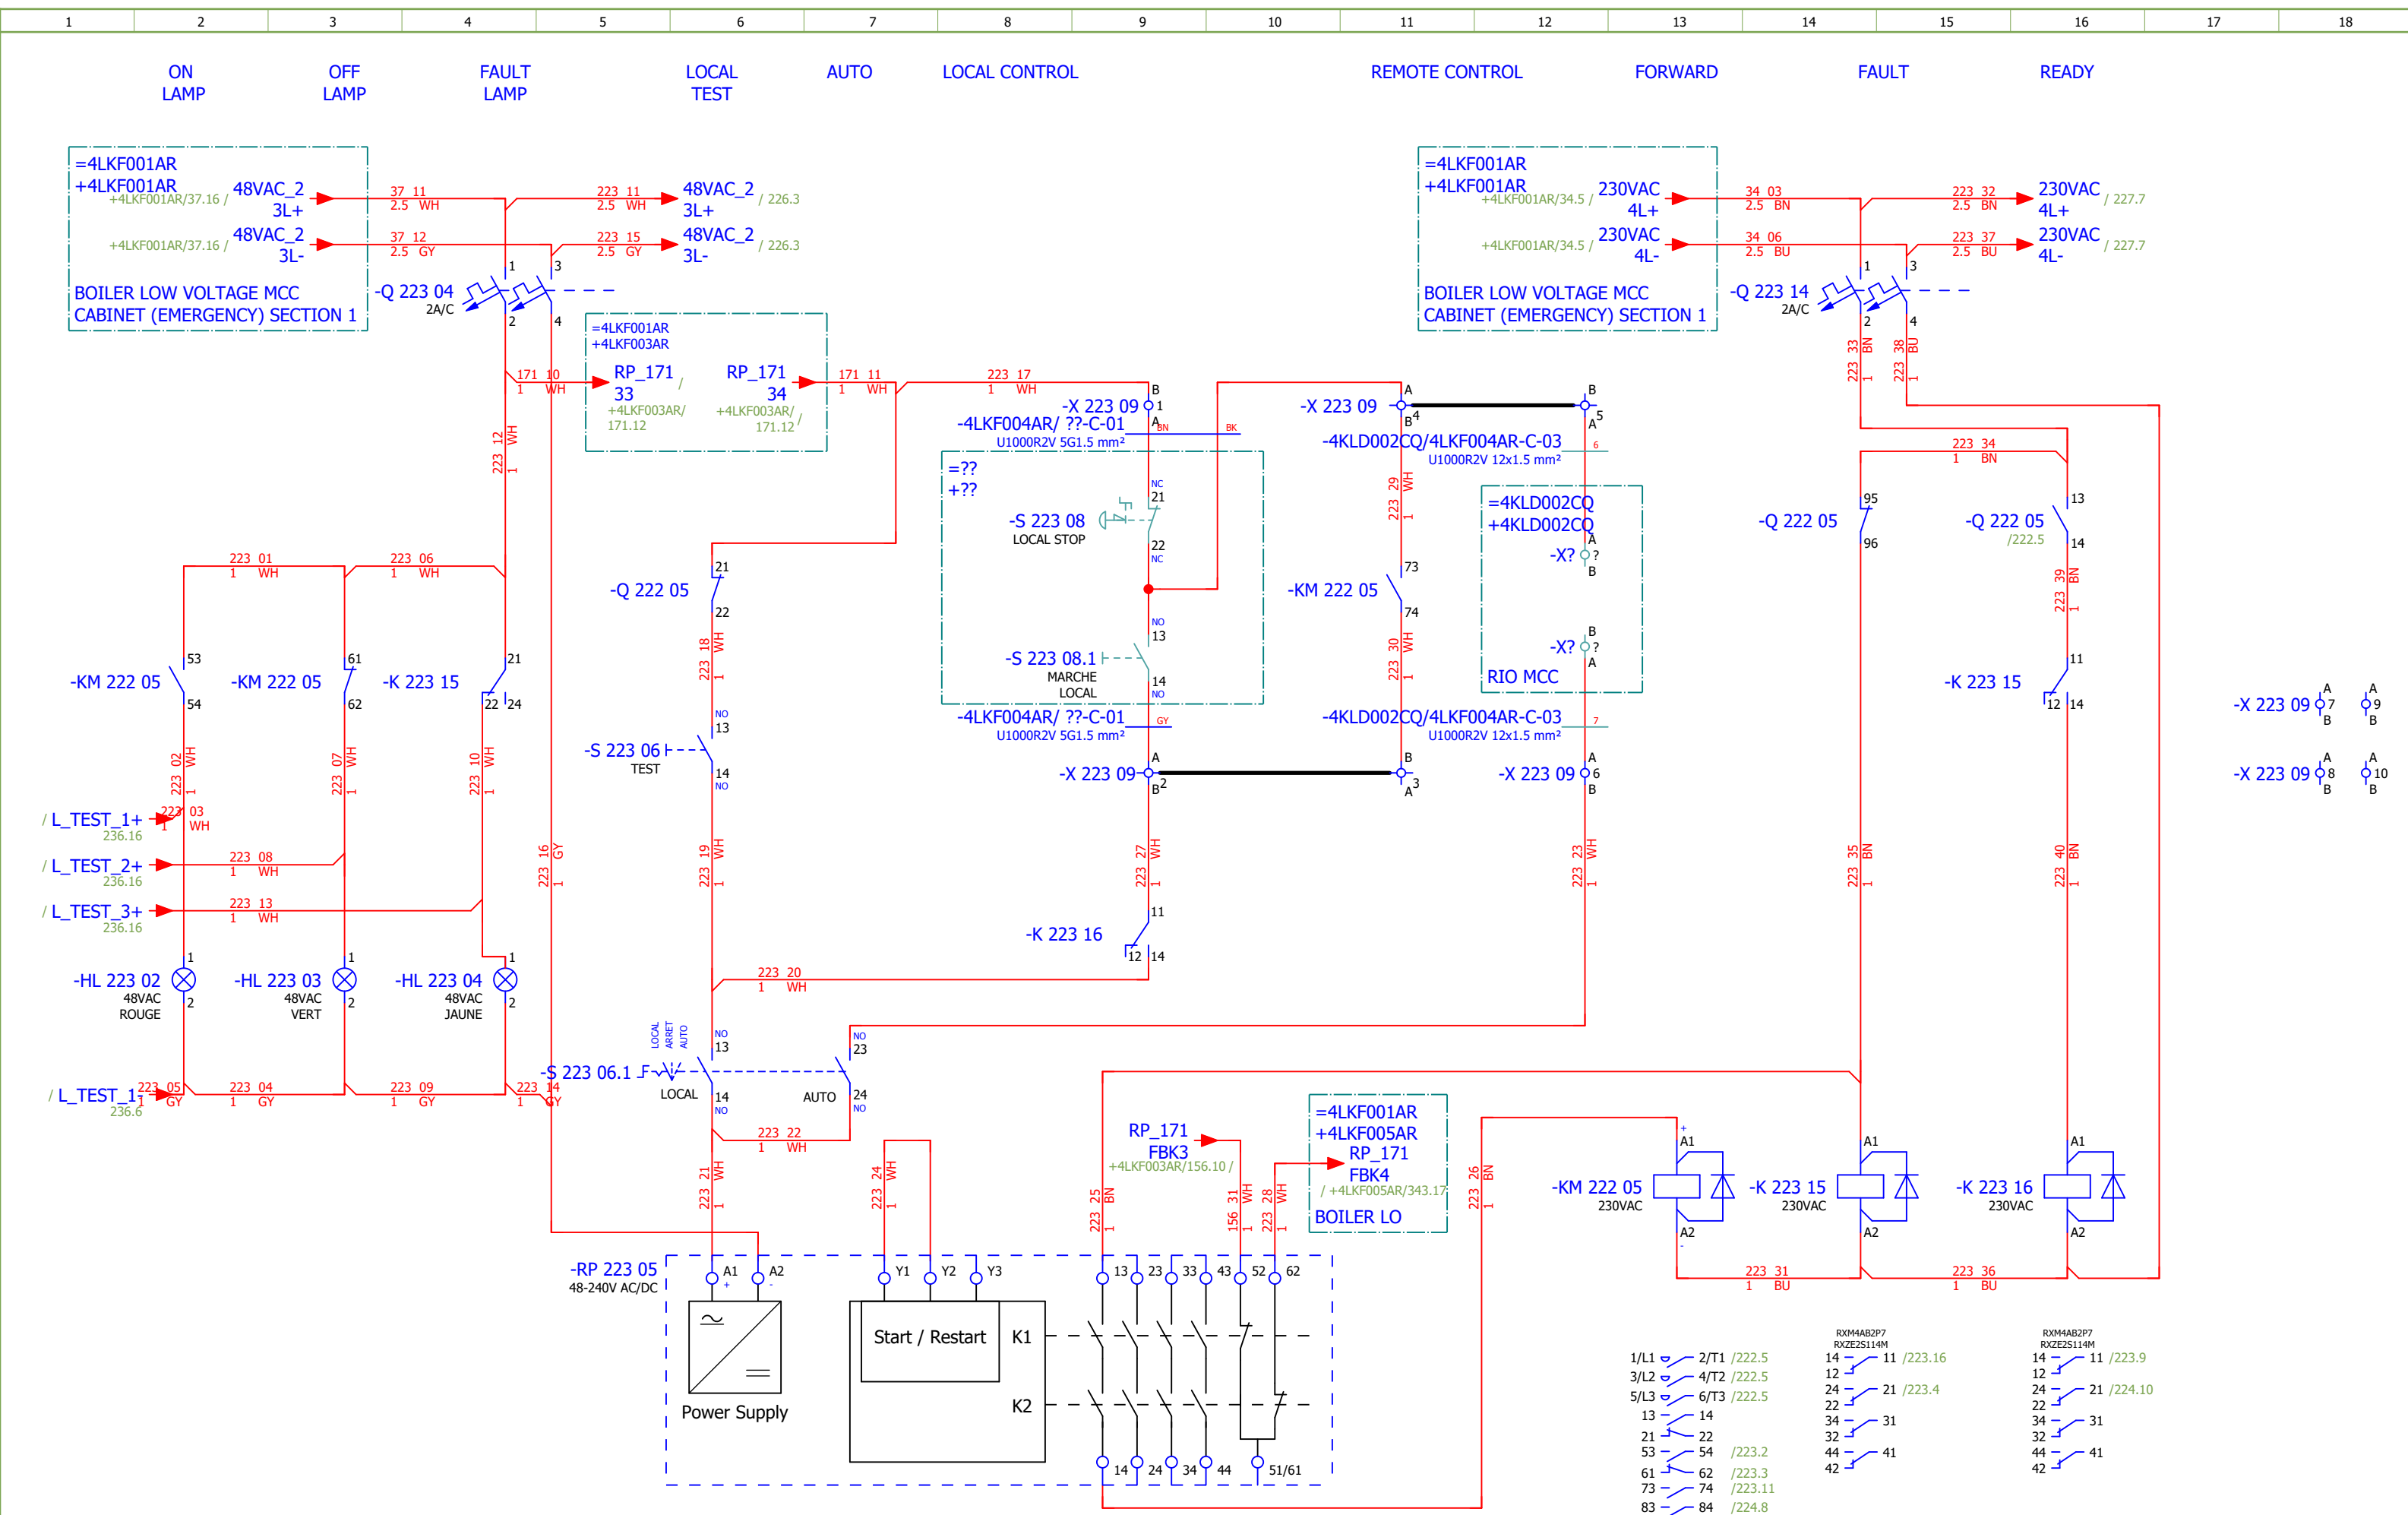


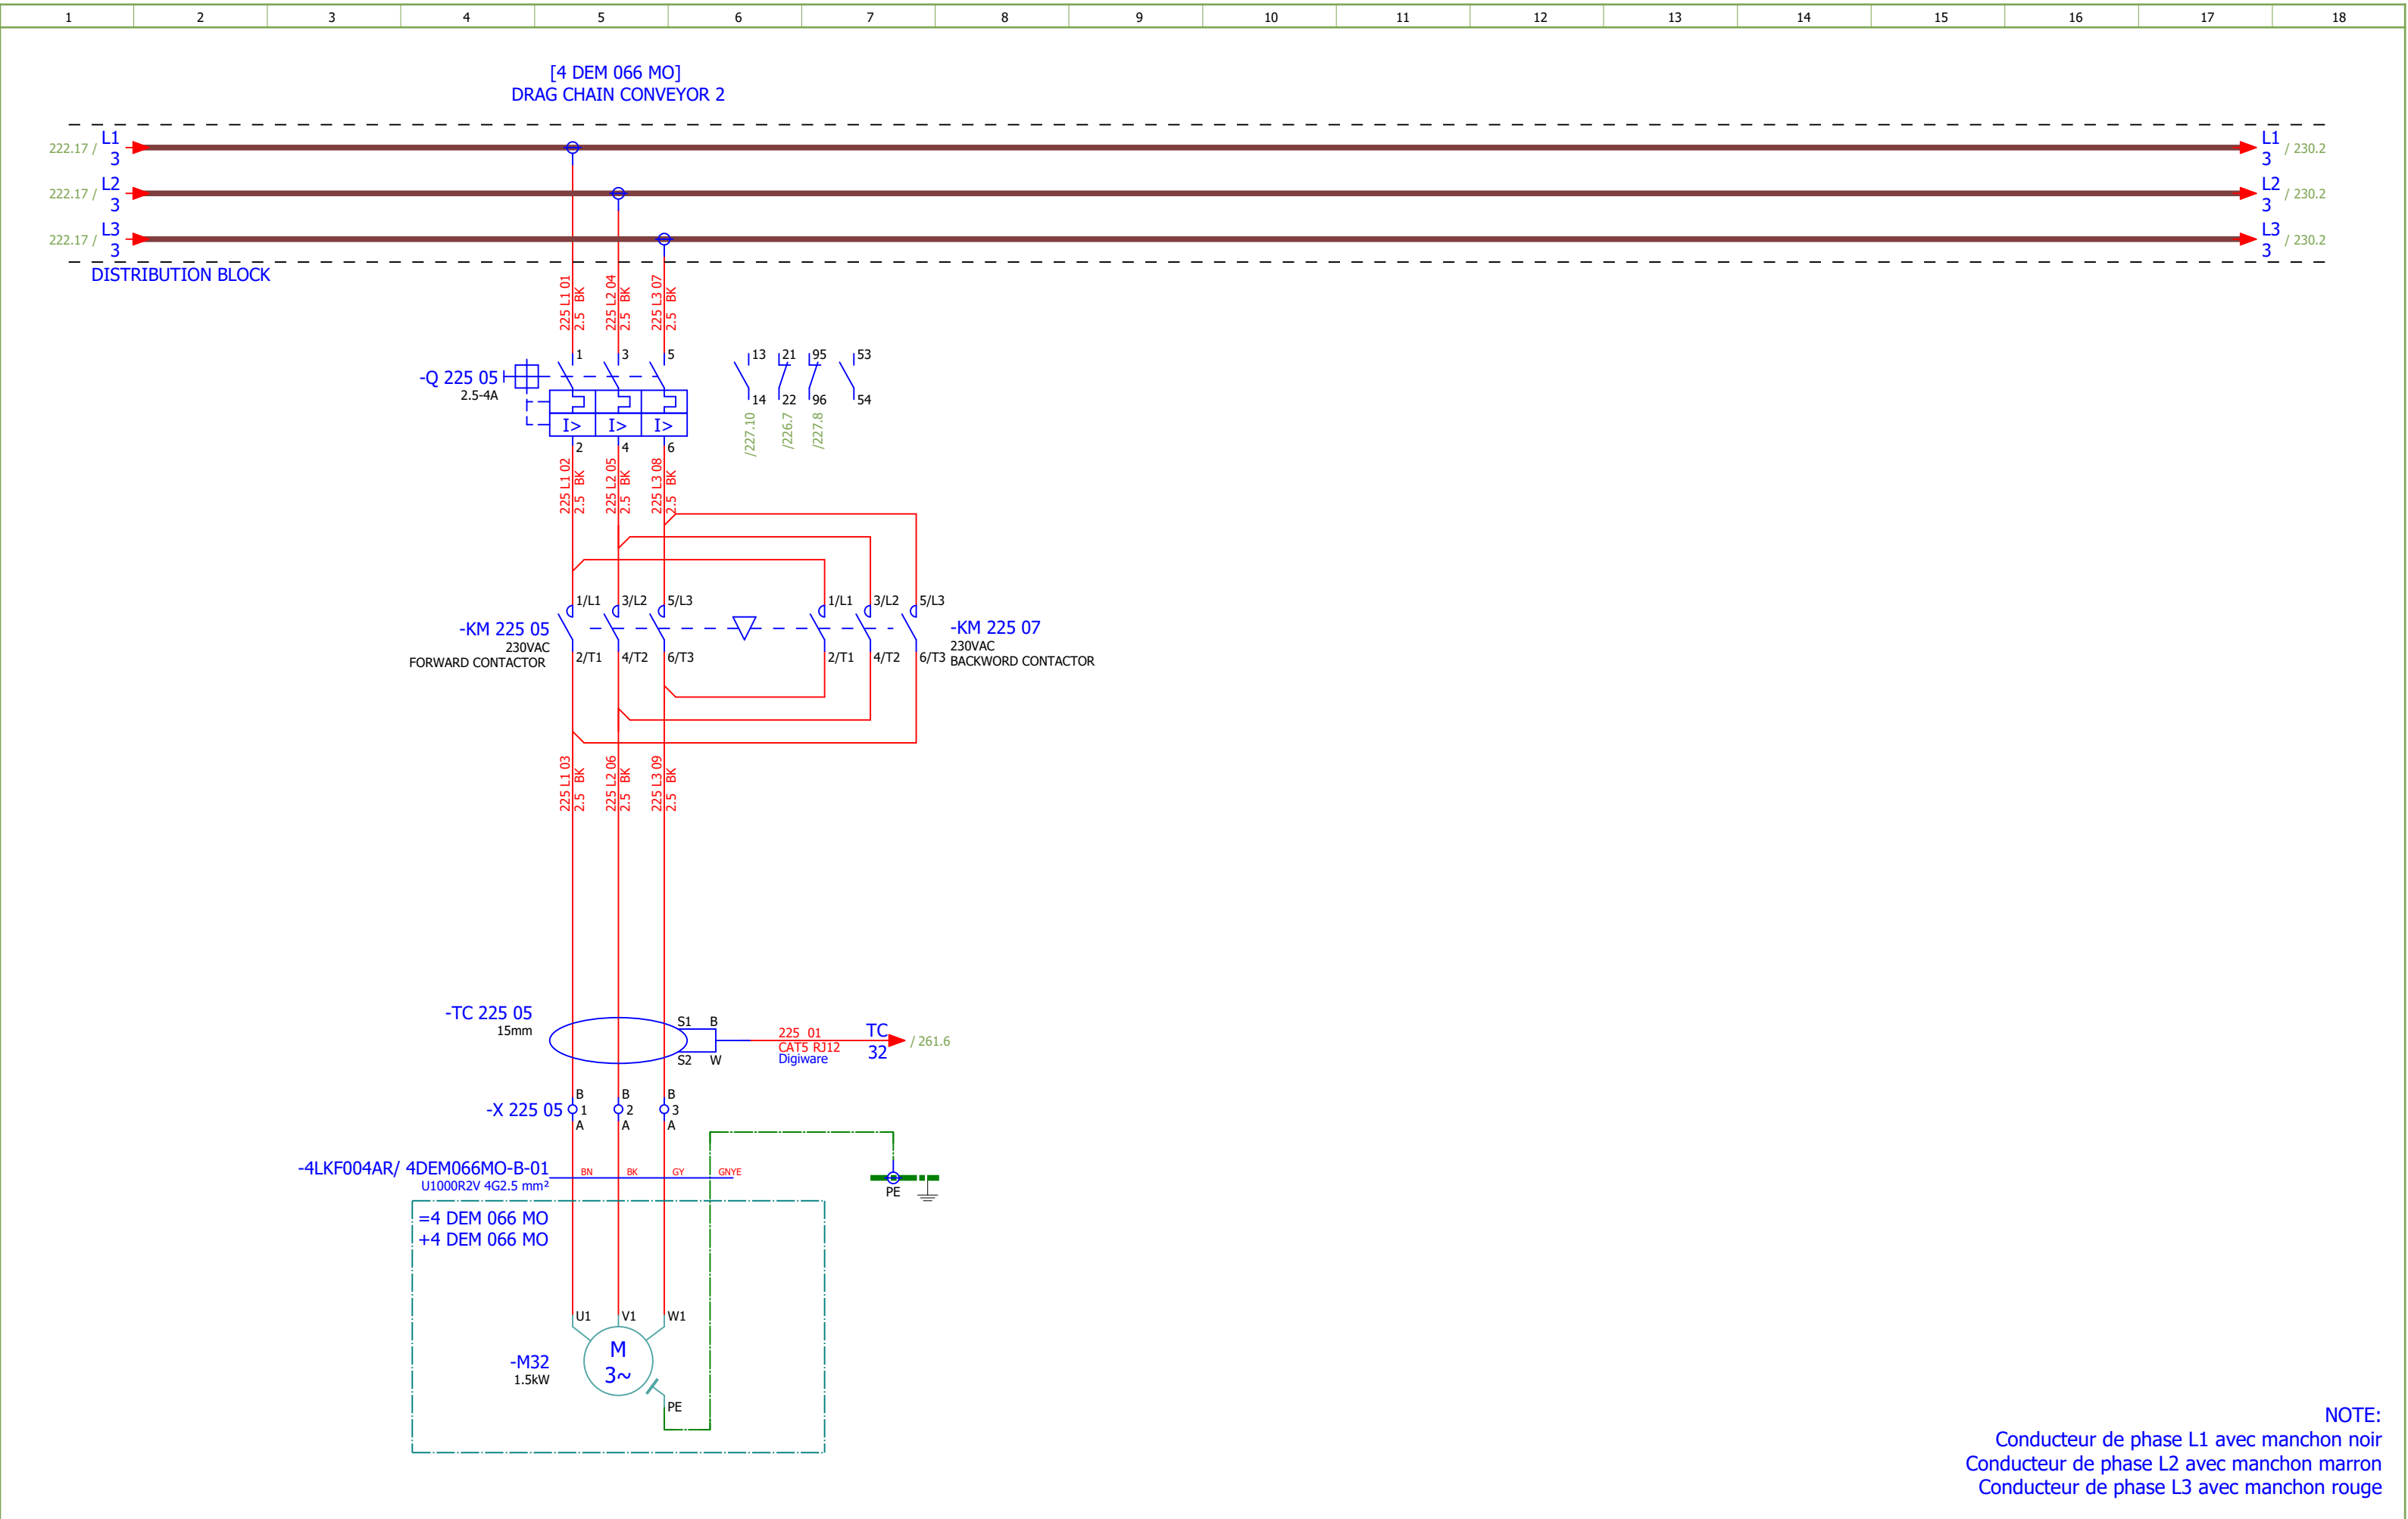


NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date:	04.12.2025.			Client: ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope: BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 4	Project: BRC-4	Unit & Issuer: ATEP0	Number: 1870	Revision: E	
Drawn:	Luka Božičević									#D
Approved:	Grga Kolić									
Format:	A3									
				Object: RDF Albioma Les Bois Rouge Reunion - France	Content: DRAG CHAIN CONVEYOR 2	Drawing designation: BRC-4-ATEP0-1870-E			=4LKF001AR	Sheet: 225
									+4LKF004AR	Next: 226

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 4		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	DRAG CHAIN CONVEYOR 2 - CONTROL	Drawing designation: BRC-4-ATEP0-1870-E						=4LKF001AR	Sheet:	227	
Approved:	Grga Kolić													+4LKF004AR	Next:	228	
Format:	A3																

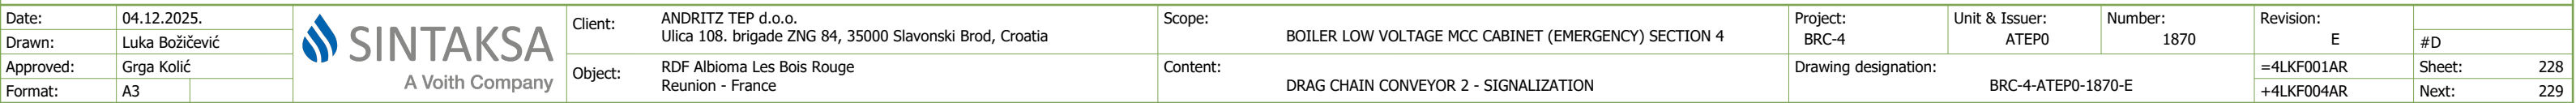


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 4	Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	#D
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	SEALING AIR FAN RIGHT - SIGNALIZATION	Drawing designation:	BRC-4-ATEP0-1870-E							
Approved:	Grga Kolić															
Format:	A3															

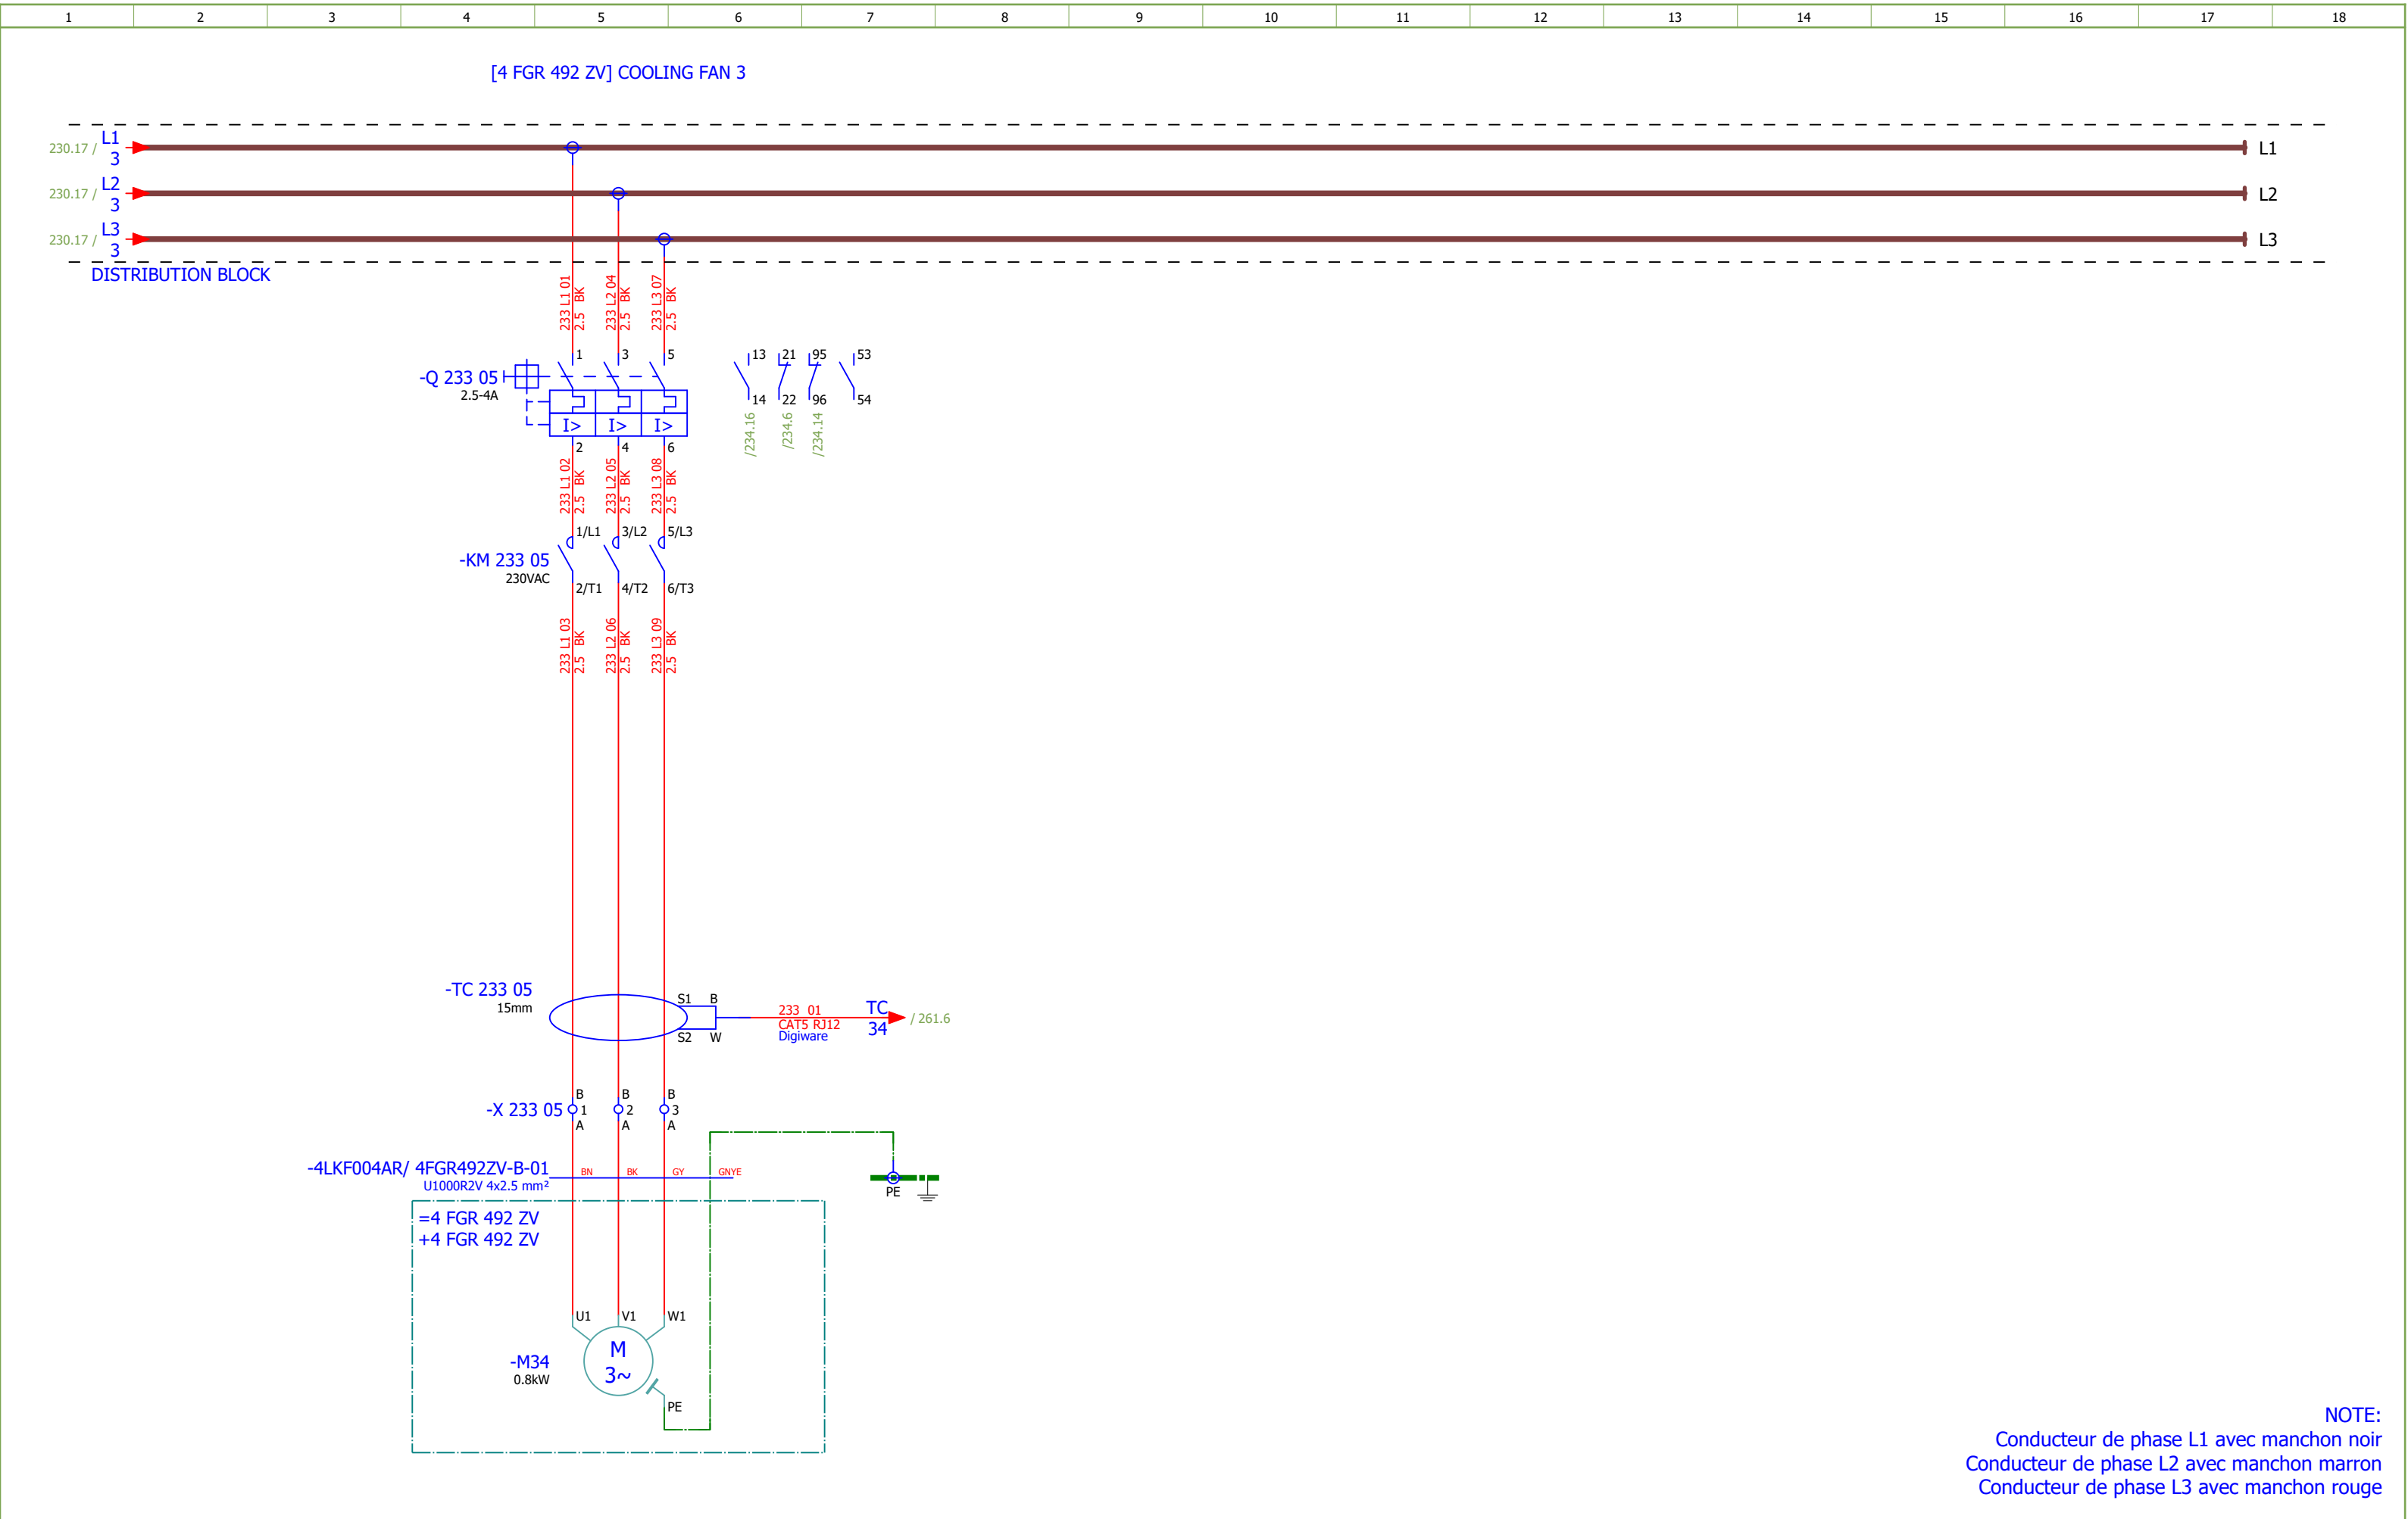


NOTE:
Conducteur de phase L1 avec manchon noir
Conducteur de phase L2 avec manchon marron
Conducteur de phase L3 avec manchon rouge

Date:	04.12.2025.		 SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 4		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	COOLING FAN 3		Drawing designation: BRC-4-ATEP0-1870-E			=4LKF001AR +4LKF004AR		Sheet:	233		
Approved:	Grga Kolić							Next:						234			
Format:	A3																

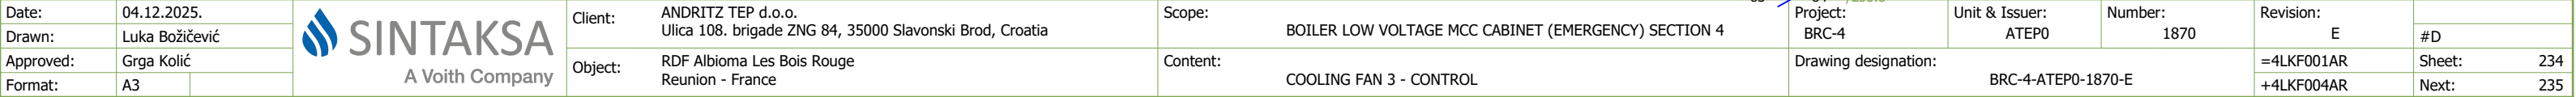


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 4		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Luka Božičević																#D
Approved:	Grga Kolić				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	COOLING FAN 3 - SIGNALISATION		Drawing designation: BRC-4-ATEP0-1870-E				=4LKF001AR		Sheet:	235
Format:	A3								+4LKF004AR					Next:	236		

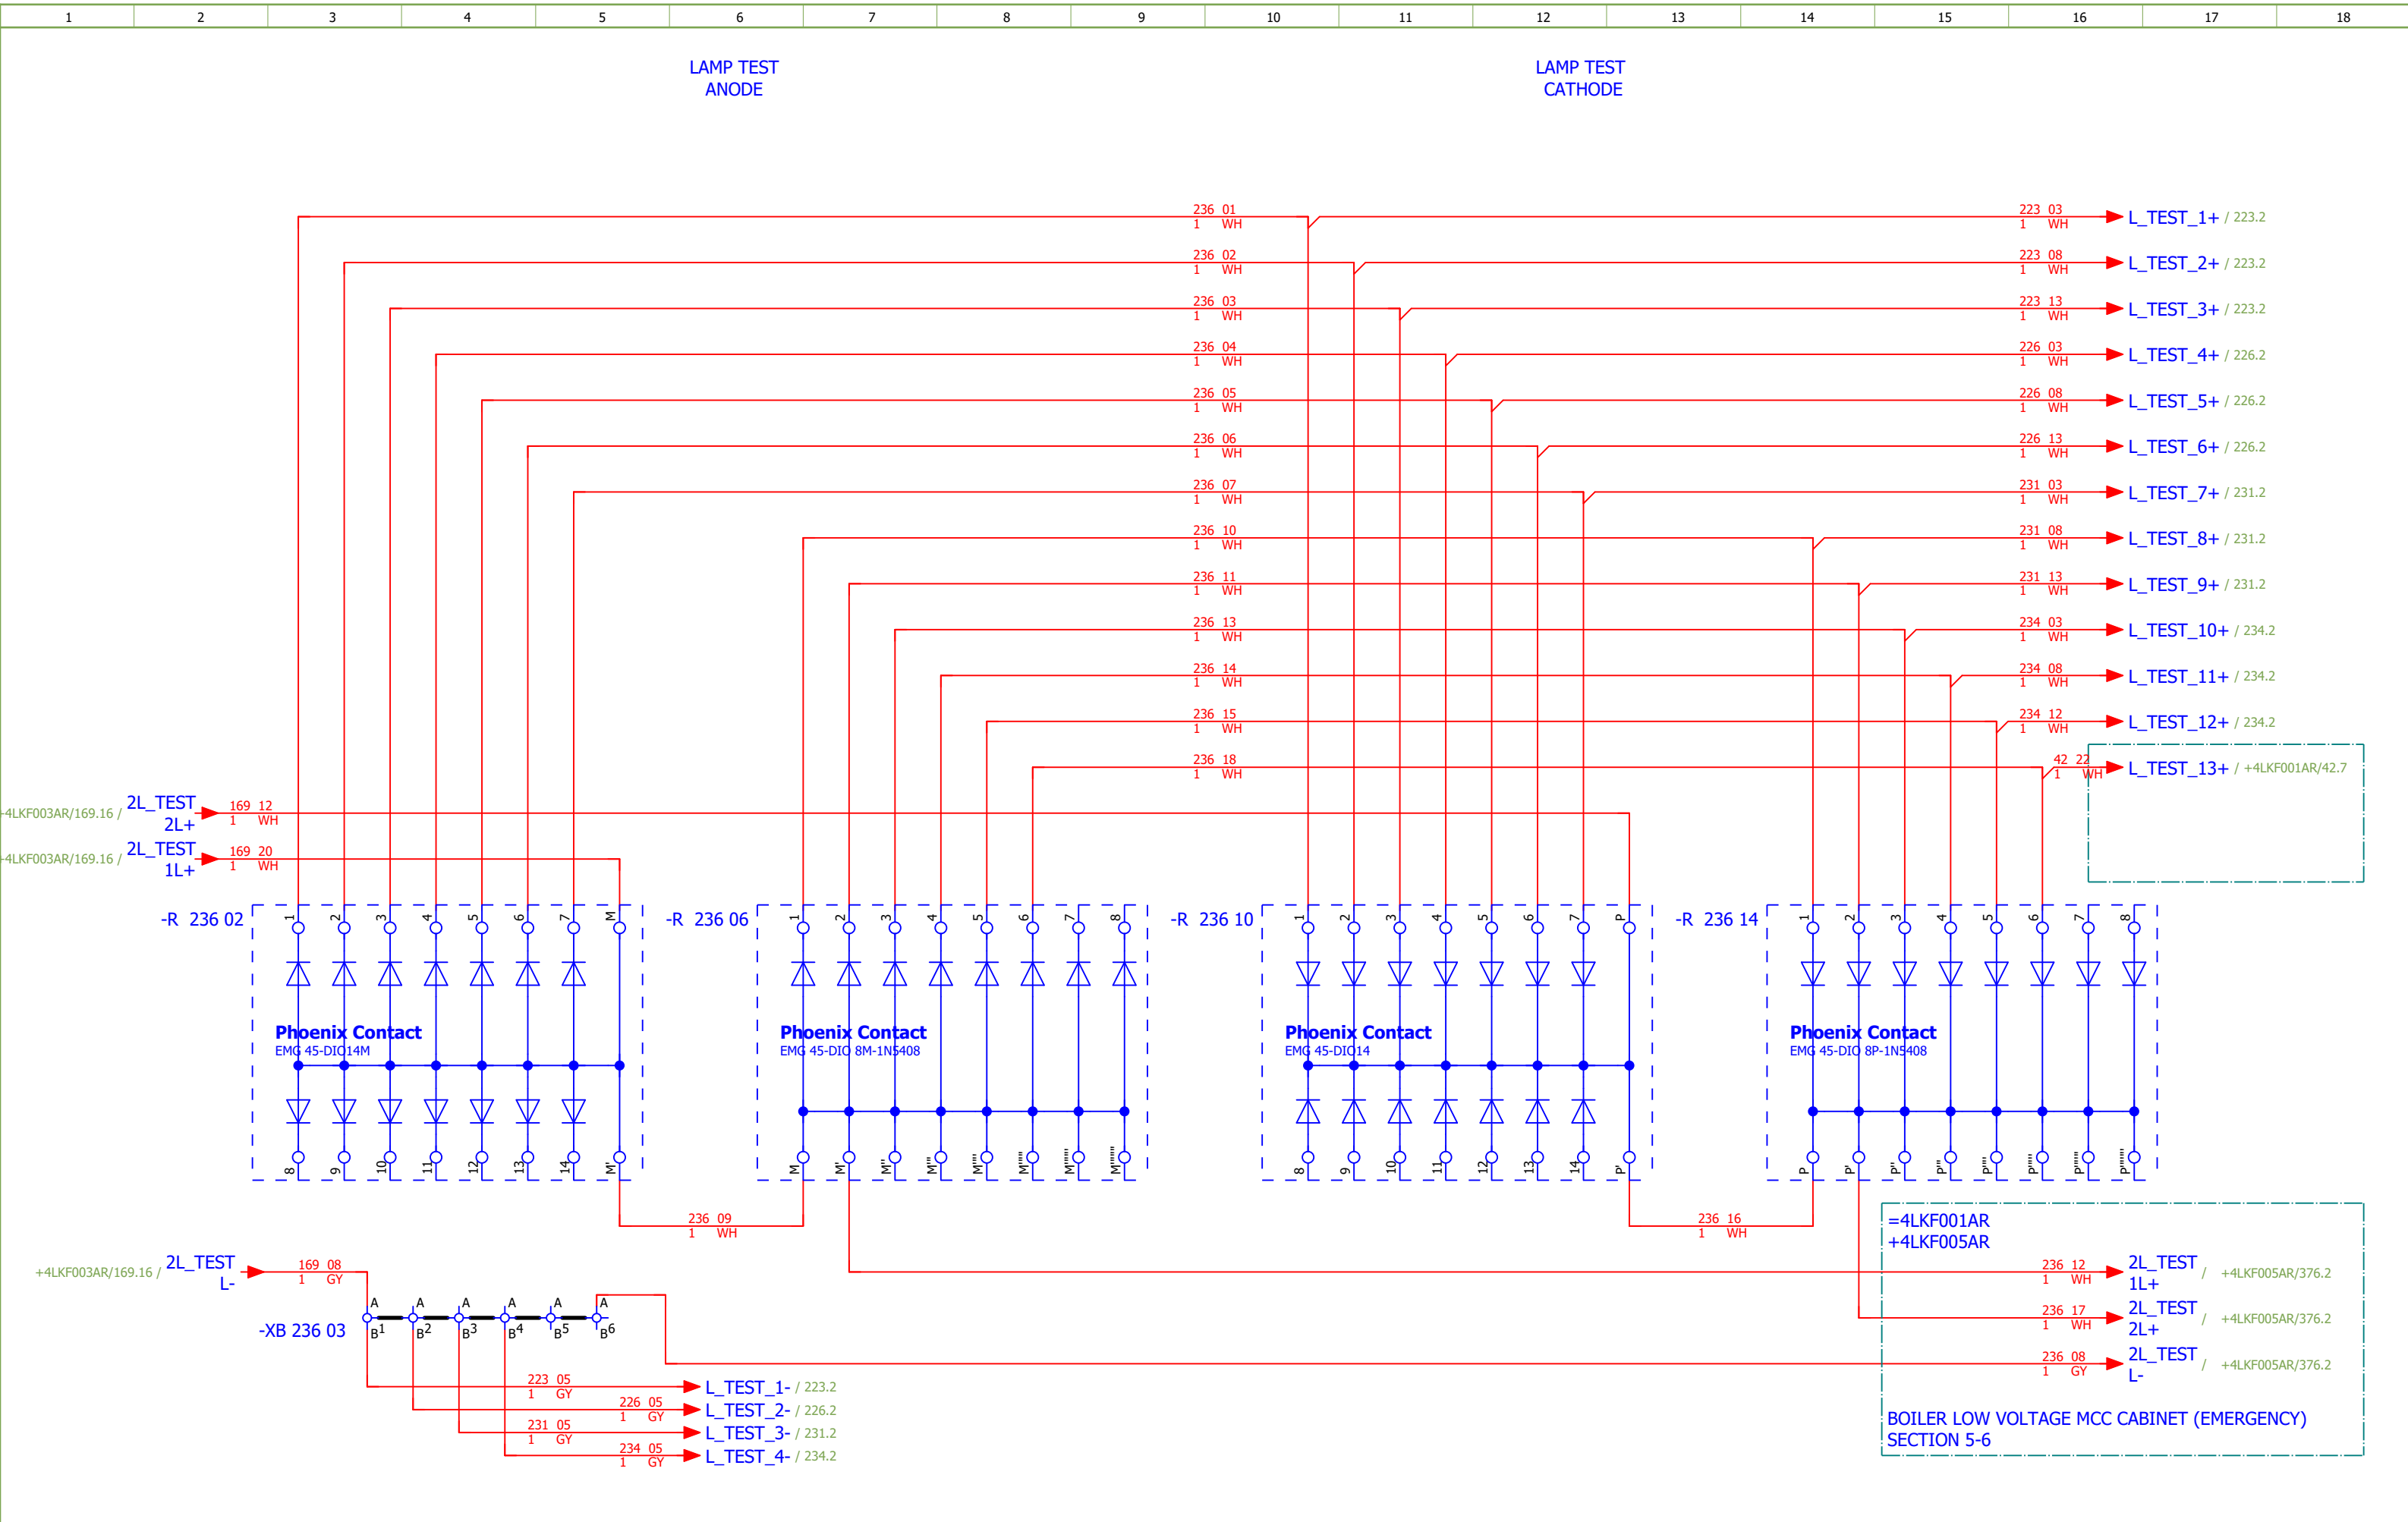

[illegible]

MEASUREMENT

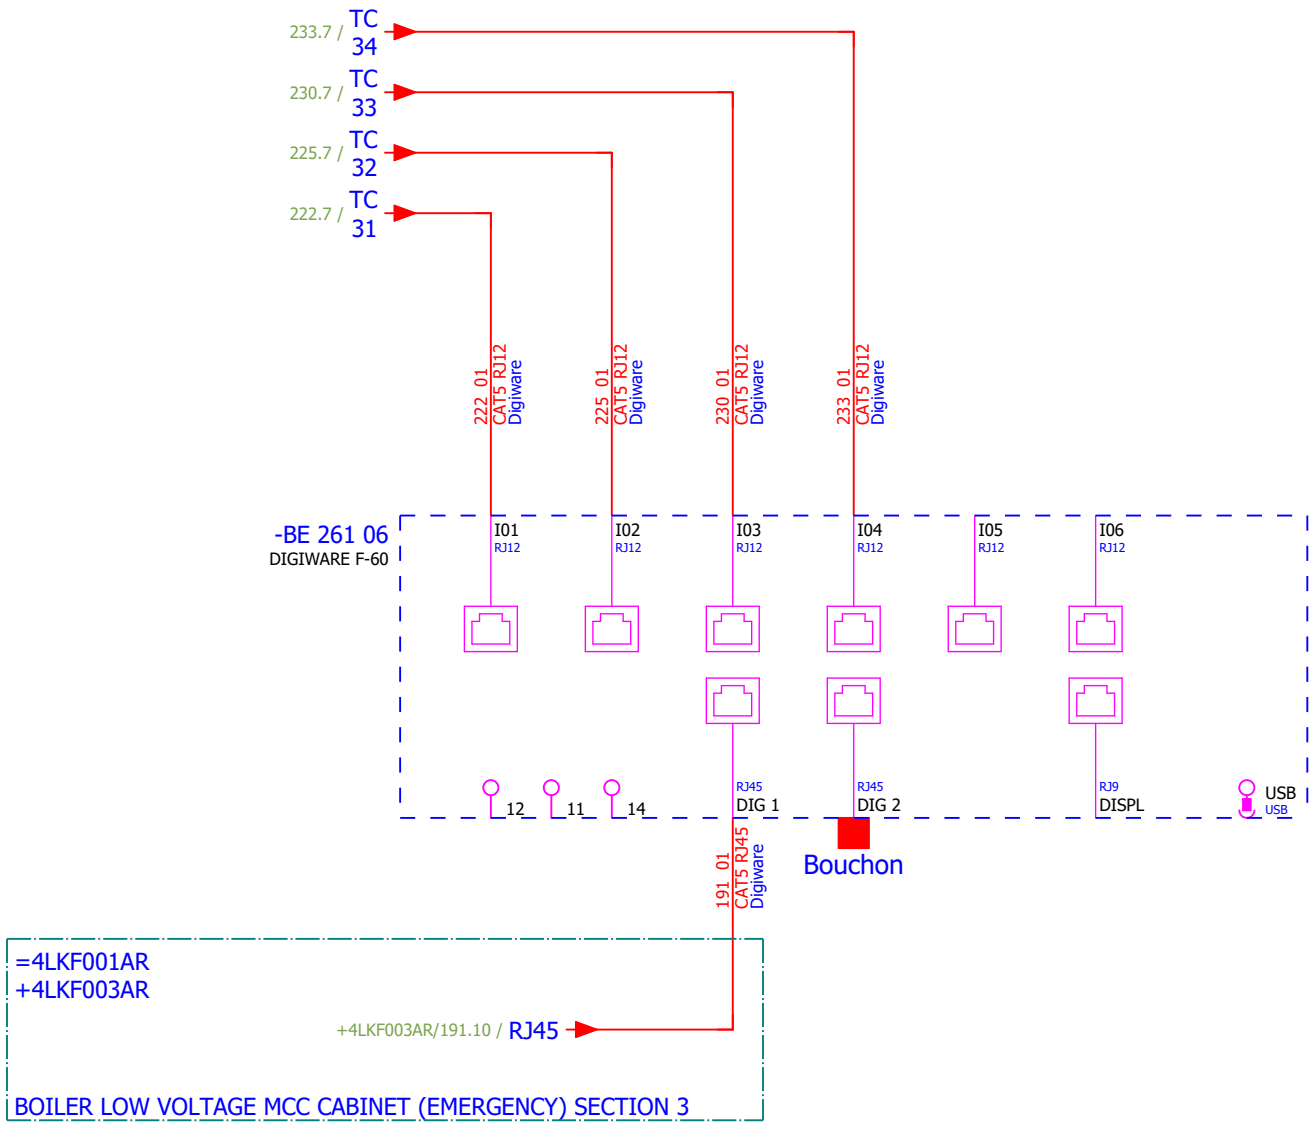


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
Sorting number	Part number	Quantity	Manufacturer	Device	Device description							Device designation					
1.	SOC.47290126	1	Socomec	Module location default ISOM DIGIWARE F-60	Network type - Power distribution, Control circuits, Medical Rated voltage - 24 VDC Type - Insulation Fault Locator Indication - Digital							-BE 261 06					
2.	SE.ZB4BVBG1	12	Schneider Electric	white light block with body/fixing collar integral LED 24...120VAC/DC	white light block with body/fixing collar integral LED 24...120VAC/DC							-HL 223 02...-HL 223 04;-HL 226 02...-HL 226 04;-HL 231 02...-HL 231 04;-HL 234 02...-HL 234 04					
3.	SE.ZB4BV043	5	Schneider Electric	Red pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Red							-HL 223 02;-HL 226 02;-HL 226 03;-HL 231 02;-HL 23 4 02					
4.	SE.ZBZ32	12	Schneider Electric	Harmony XB4	Legend holder, plastic							-HL 223 02...-HL 223 04;-HL 226 02...-HL 226 04;-HL 231 02...-HL 231 04;-HL 234 02...-HL 234 04					
5.	SE.ZB4BV033	3	Schneider Electric	Green pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Green							-HL 223 03;-HL 231 03;-HL 234 03					
6.	SE.ZB4BV053	4	Schneider Electric	Orange pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Orange							-HL 223 04;-HL 226 04;-HL 231 04;-HL 234 04					
7.	SE.RXM4AB2P7	8	Schneider Electric	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED							-K 223 15;-K 223 16;-K 227 08;-K 227 10;-K 231 15;-K 231 16;-K 234 15;-K 234 16					
8.	SE.RXZE2S114M	8	Schneider Electric	Socket, Harmony Electromechanical Relays, for RXM2 RXM4 relays	For RXM2/RXM4 relays Screw connectors Separate contact							-K 223 15;-K 223 16;-K 227 08;-K 227 10;-K 231 15;-K 231 16;-K 234 15;-K 234 16					
9.	SE.RXM041FU7	8	Schneider Electric	Protection diode	RC circuit 110...240 V a.c.							-K 223 15;-K 223 16;-K 227 08;-K 227 10;-K 231 15;-K 231 16;-K 234 15;-K 234 16					
10.	SE.LC1D12P7	5	Schneider Electric	TeSys Deca contactor - 3P(3 NO) - AC-3 - <lt/>= 440 V 12 A - 230 V AC coil	TeSys Deca contactor - 3P(3 NO) - AC-3 - <lt/>= 440 V 12 A - 230 V AC coil							-KM 222 05;-KM 225 05;-KM 225 07;-KM 230 05;-KM 2 33 05					
11.	SE.LADN31	5	Schneider Electric	Auxiliary contact block TeSys - 3 NO + 1 NC,screw-clamps terminals	Auxiliary contact block TeSys - 3 NO + 1 NC,screw-clamps terminals							-KM 222 05;-KM 225 05;-KM 225 07;-KM 230 05;-KM 2 33 05					
12.	SE.LAD4RCU	5	Schneider Electric	RC Transient Suppressor 110 TO 250 VAC	RC Transient Suppressor 110 TO 250 VAC							-KM 222 05;-KM 225 05;-KM 225 07;-KM 230 05;-KM 2 33 05					
13.	SE.LAD9R1V	1	Schneider Electric	Reversing mechanical interlock kit	Tesys D, reversing mechanical interlock kit, with electrical interlocking, for LC1D09 to LC1D38							-KM 225 05					
14.	SE.GV2P16	1	Schneider Electric	TeSys GV2P - Thermal Magnetic Motor Circuit Breaker	Motor circuit breaker, TeSys GV2, 3P, 9-14 A, thermal magnetic, screw clamp terminals							-Q 222 05					
15.	SE.GVAE11	4	Schneider Electric	Auxiliary contact block	1NO+1NC Front mounting For GV2							-Q 222 05;-Q 225 05;-Q 230 05;-Q 233 05					
16.	SE.GVAD0110	4	Schneider Electric	TeSys GV AD0110 - auxiliary contact - 1 NO + 1 NC (fault)	Add-on contact block,TeSys Deca Frame 2/3,1NC(fault)+1NO,side,for GV2/GV3(except GV3ME)							-Q 222 05;-Q 225 05;-Q 230 05;-Q 233 05					
17.	SE.A9F74202	8	Schneider Electric	2-pole MCB, 2A/C	Nominal current: 2 A Tripping curve: C							-Q 223 04;-Q 223 14;-Q 226 04;-Q 227 08;-Q 231 04;-Q 231 14;-Q 234 04;-Q 234 14					
18.	SE.GV2P08	3	Schneider Electric	TeSys GV2P - Thermal Magnetic Motor Circuit Breaker	Motor circuit breaker, TeSys GV2, 3P, 2.5-4 A, thermal magnetic, screw clamp terminals							-Q 225 05;-Q 230 05;-Q 233 05					
19.	SE.C10F3TM032	1	Schneider Electric	Circuit breaker, ComPacT NSX100B	36kA/415VAC 3 poles TMD trip unit 32A							-QB 221 09					
20.	SE.29450	1	Schneider Electric	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV							-QB 221 09					
21.	SE.LV429337T	1	Schneider Electric	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40							-QB 221 09					
22.	SE.LVS04033	1	Schneider Electric	LINERGY DP	LINERGY DP 3P D.BLK/COMPACT 250A 27HOLES							-QB 221 09					
23.	SE.LV429517	1	Schneider Electric	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250							-QB 221 09					
24.	PXC.2950129	1	Phoenix Contact	Component for protective circuit	Diode module, with 14 diodes, common anode, diode type 1N 4007							-R 236 02					


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
	Sorting number	Part number	Quantity	Manufacturer	Device	Device description							Device designation				
	1.	SOC.47290126	1	Socomec	Module location default ISOM DIGIWARE F-60	Network type - Power distribution, Control circuits, Medical Rated voltage - 24 VDC Type - Insulation Fault Locator Indication - Digital							-BE 261 06				
	2.	SE.ZB4BVBG1	12	Schneider Electric	white light block with body/fixing collar integral LED 24...120VAC/DC	white light block with body/fixing collar integral LED 24...120VAC/DC							-HL 223 02...-HL 223 04;-HL 226 02...-HL 226 04;-HL 231 02...-HL 231 04;-HL 234 02...-HL 234 04				
	3.	SE.ZB4BV043	5	Schneider Electric	Red pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Red											
	4.	SE.ZBZ32	12	Schneider Electric	Harmony XB4	Legend holder, plastic							-HL 223 02...-HL 223 04;-HL 226 02...-HL 226 04;-HL 231 02...-HL 231 04;-HL 234 02...-HL 234 04				
	5.	SE.ZB4BV033	3	Schneider Electric	Green pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Green											
	6.	SE.ZB4BV053	4	Schneider Electric	Orange pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Orange							-HL 223 04;-HL 226 04;-HL 231 04;-HL 234 04				
	7.	SE.RXM4AB2P7	8	Schneider Electric	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED											
	8.	SE.RXZE2S114M	8	Schneider Electric	Socket, Harmony Electromechanical Relays, for RXM2 RXM4 relays	For RXM2/RXM4 relays Screw connectors Separate contact							-K 223 15;-K 223 16;-K 227 08;-K 227 10;-K 231 15;-K 231 16;-K 234 15;-K 234 16				
	9.	SE.RXM041FU7	8	Schneider Electric	Protection diode	RC circuit 110...240 V a.c.											
	10.	SE.LC1D12P7	5	Schneider Electric	TeSys Deca contactor - 3P(3 NO) - AC-3 - <lt/>= 440 V 12 A - 230 V AC coil	TeSys Deca contactor - 3P(3 NO) - AC-3 - <lt/>= 440 V 12 A - 230 V AC coil							-KM 222 05;-KM 225 05;-KM 225 07;-KM 230 05;-KM 2 33 05				
	11.	SE.LADN31	5	Schneider Electric	Auxiliary contact block TeSys - 3 NO + 1 NC,screw-clamps terminals	Auxiliary contact block TeSys - 3 NO + 1 NC,screw-clamps terminals											
	12.	SE.LAD4RCU	5	Schneider Electric	RC Transient Suppressor 110 TO 250 VAC	RC Transient Suppressor 110 TO 250 VAC							-KM 222 05;-KM 225 05;-KM 225 07;-KM 230 05;-KM 2 33 05				
	13.	SE.LAD9R1V	1	Schneider Electric	Reversing mechanical interlock kit	Tesys D, reversing mechanical interlock kit, with electrical interlocking, for LC1D09 to LC1D38											
	14.	SE.GV2P16	1	Schneider Electric	TeSys GV2P - Thermal Magnetic Motor Circuit Breaker	Motor circuit breaker, TeSys GV2, 3P, 9-14 A, thermal magnetic, screw clamp terminals							-Q 222 05				
	15.	SE.GVAE11	4	Schneider Electric	Auxiliary contact block	1NO+1NC Front mounting For GV2											
	16.	SE.GVAD0110	4	Schneider Electric	TeSys GV AD0110 - auxiliary contact - 1 NO + 1 NC (fault)	Add-on contact block,TeSys Deca Frame 2/3,1NC(fault)+1NO,side,for GV2/GV3(except GV3ME)							-Q 222 05;-Q 225 05;-Q 230 05;-Q 233 05				
	17.	SE.A9F74202	8	Schneider Electric	2-pole MCB, 2A/C	Nominal current: 2 A Tripping curve: C											
	18.	SE.GV2P08	3	Schneider Electric	TeSys GV2P - Thermal Magnetic Motor Circuit Breaker	Motor circuit breaker, TeSys GV2, 3P, 2.5-4 A, thermal magnetic, screw clamp terminals							-Q 225 05;-Q 230 05;-Q 233 05				
	19.	SE.C10F3TM032	1	Schneider Electric	Circuit breaker, ComPacT NSX100B	36kA/415VAC 3 poles TMD trip unit 32A											
	20.	SE.29450	1	Schneider Electric	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV							-QB 221 09				
	21.	SE.LV429337T	1	Schneider Electric	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40											
	22.	SE.LVS04033	1	Schneider Electric	LINERGY DP	LINERGY DP 3P D.BLK/COMPACT 250A 27HOLES							-QB 221 09				
	23.	SE.LV429517	1	Schneider Electric	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250											
	24.	PXC.2950129	1	Phoenix Contact	Component for protective circuit	Diode module, with 14 diodes, common anode, diode type 1N 4007							-R 236 02				


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
	Sorting number	Part number	Quantity	Manufacturer	Device	Device description	Device designation										
	25.	PXC.2954882	1	Phoenix Contact	Component for protective circuit	Diode module, with eight diodes, common anode, diode type 1N 5408	-R 236 06										
	26.	PXC.2950116	1	Phoenix Contact	Component for protective circuit	Diode module, with 14 diodes, common cathode, diode type 1N 4007	-R 236 10										
	27.	PXC.2954879	1	Phoenix Contact	Component for protective circuit	Diode module, with eight diodes, common cathode, diode type 1N 5408	-R 236 14										
	28.	SE.XPSBAC34AP	5	Schneider Electric	Safety module	Harmony Safety Automation Estop or guard ,Harmony XPS, connected to supply terminals 48-240 V AC/DC , no inputs, screw	-RP 223 05;-RP 226 05;-RP 226 11;-RP 231 05;-RP 23 4 05										
	29.	SE.XB4BA21	3	Schneider Electric	Black flush complete pushbutton Ø22 spring return 1NO "unmarked"	Black flush complete pushbutton Ø22 spring return 1NO	-S 223 06;-S 231 06;-S 234 06										
	30.	SE.XB4BD33	5	Schneider Electric	Selector switch, BLACK, 1-0-2, 2NO	Metal Black Ø22 3 positions 2 NO	-S 223 06.1;-S 226 07;-S 226 07.1;-S 231 06.1;-S 234 06.1										
	31.	SE.ZBE101	3	Schneider Electric	Single contact block NO	Harmony XB4 Silver alloy 1 NO	-S 226 07.1										
	32.	SOC.47506015	4	Socomec	TORES LOCATION SENSOR DELTA IP-15 (15mm)	Maximal diameter of cable: 15mm	-TC 222 05;-TC 225 05;-TC 230 05;-TC 233 05										
	33.	SOC.47290590	4	Socomec	ISOM T-15	Feed-through terminal block, nom. voltage: 800 V Connection adaptor, ISOM T-15 to ISOM Digiware F-60 modules nominal current: 24 A	-TC 222 05;-TC 225 05;-TC 230 05;-TC 233 05										
	34.	PXC.3209510	147	Phoenix Contact	PT 2,5 Feed-through terminal block	number of connections: 2 number of positions: 1 connection method: Push-in connection Rated cross section: 2.5 mm2 cross section: 0.14 mm2 - 4 mm2	-X 222 05;-X 223 09;-X 224 06;-X 225 05;-X 226 09;-X 228 06;-X 230 05;-X 231 09;-X 232 06;-X 233 05;-X 234 09;-X 235 06;-XB 236 03;-XS 251 03;-XS 255 02										


Terminal diagram

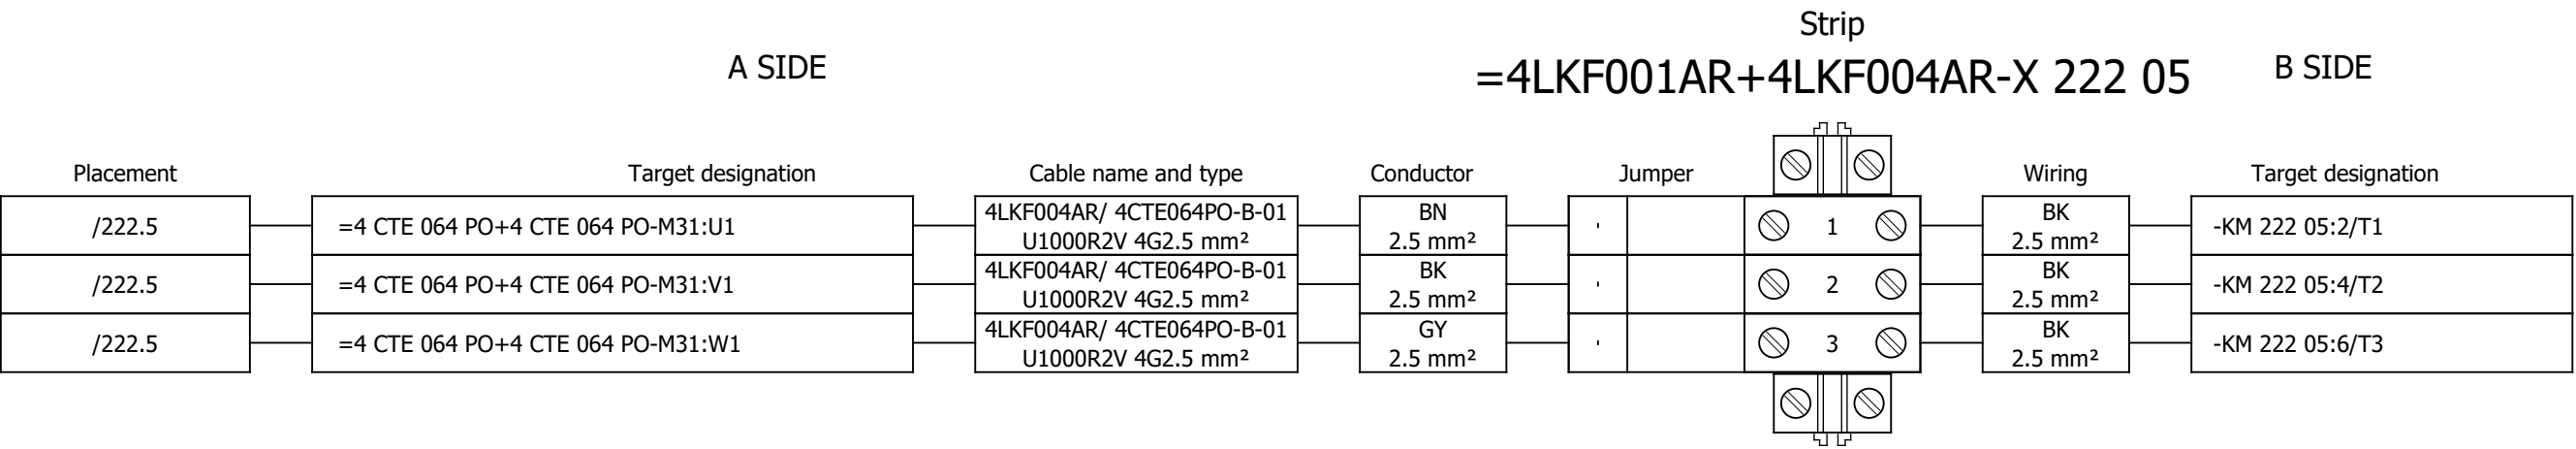


Terminal diagram

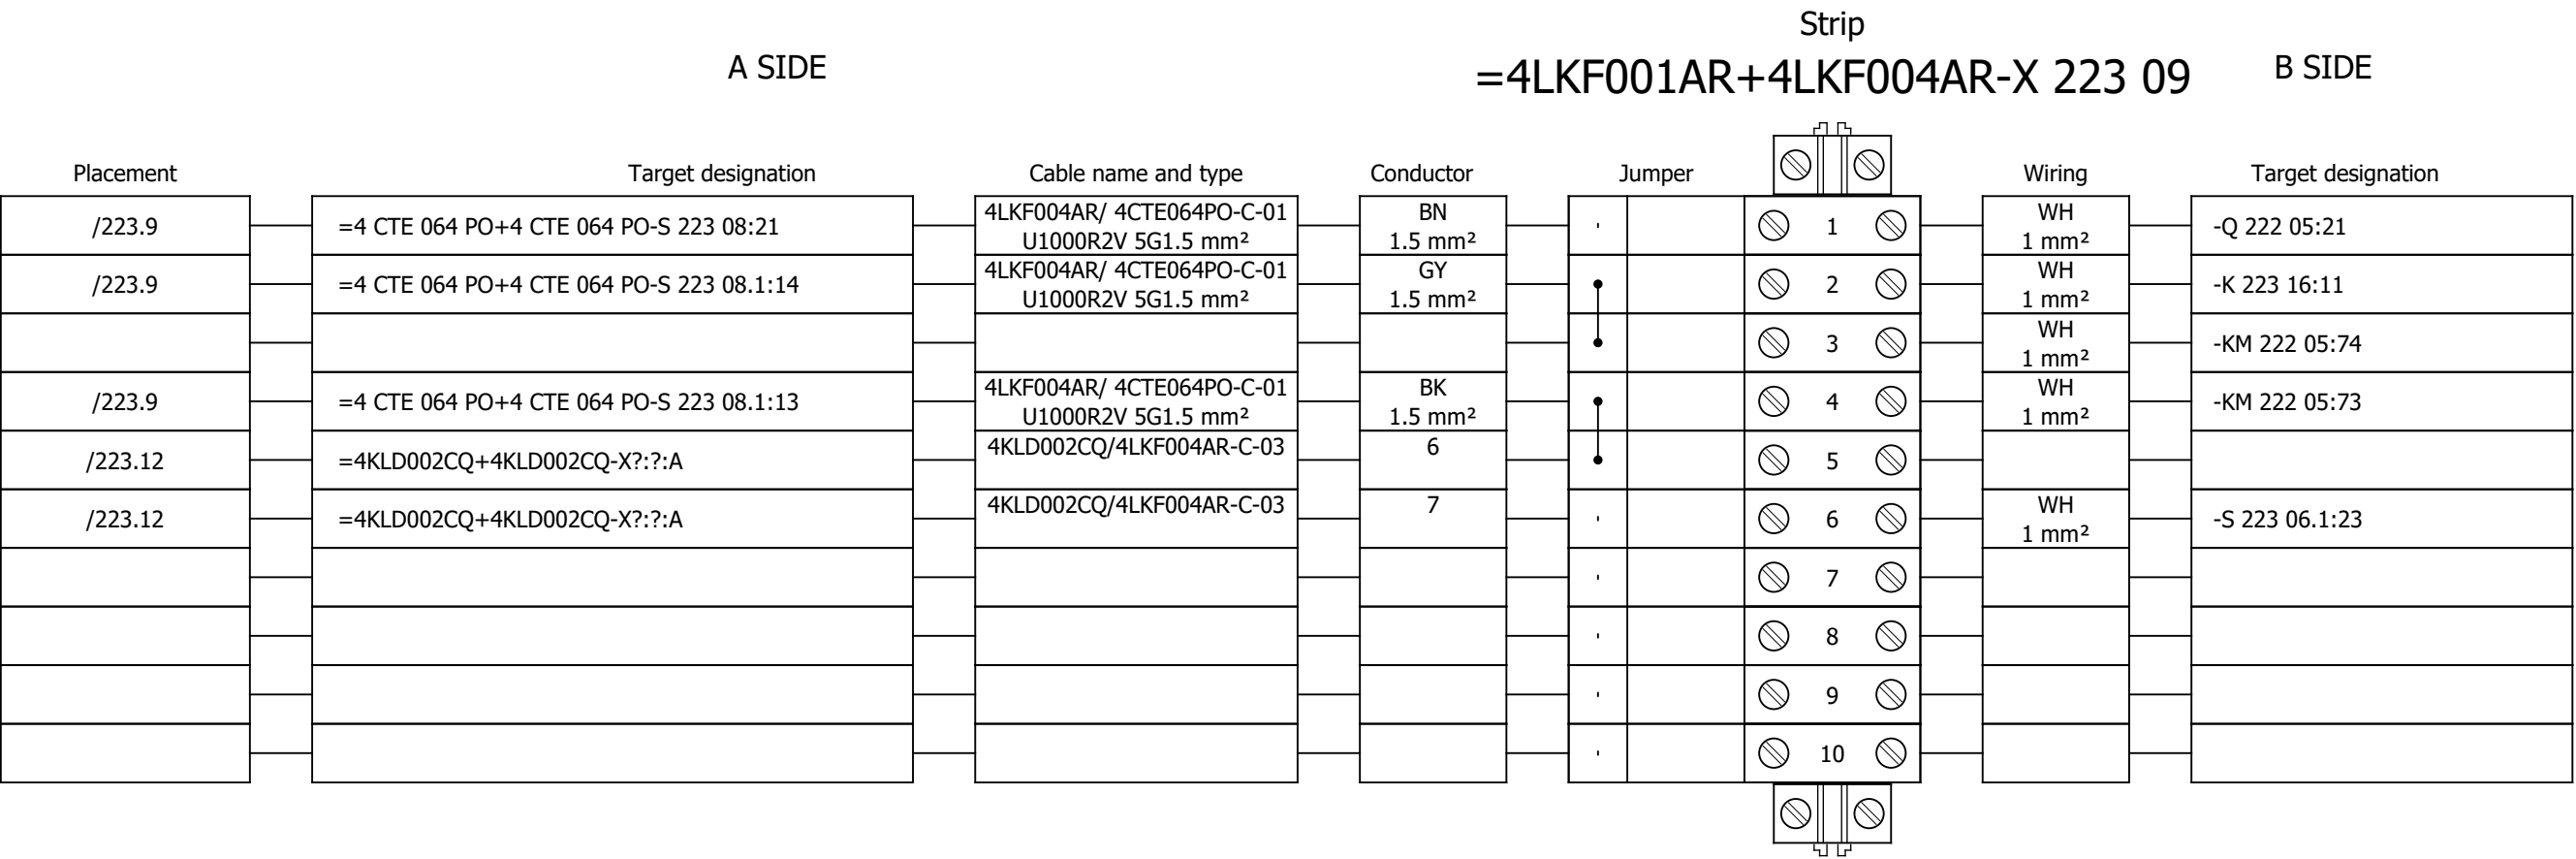



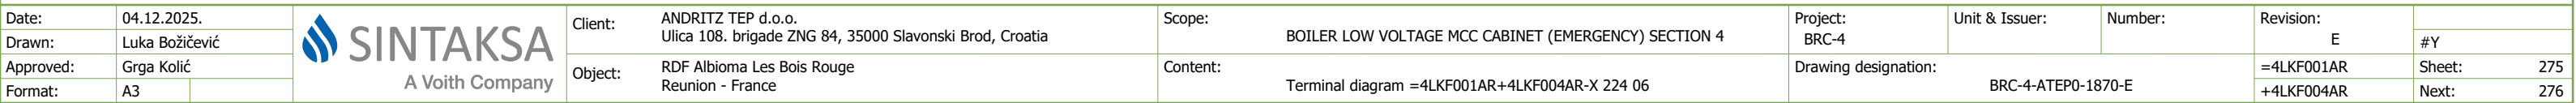


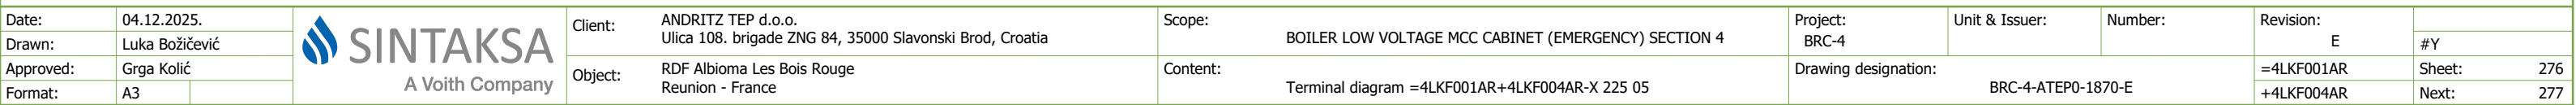


Terminal diagram

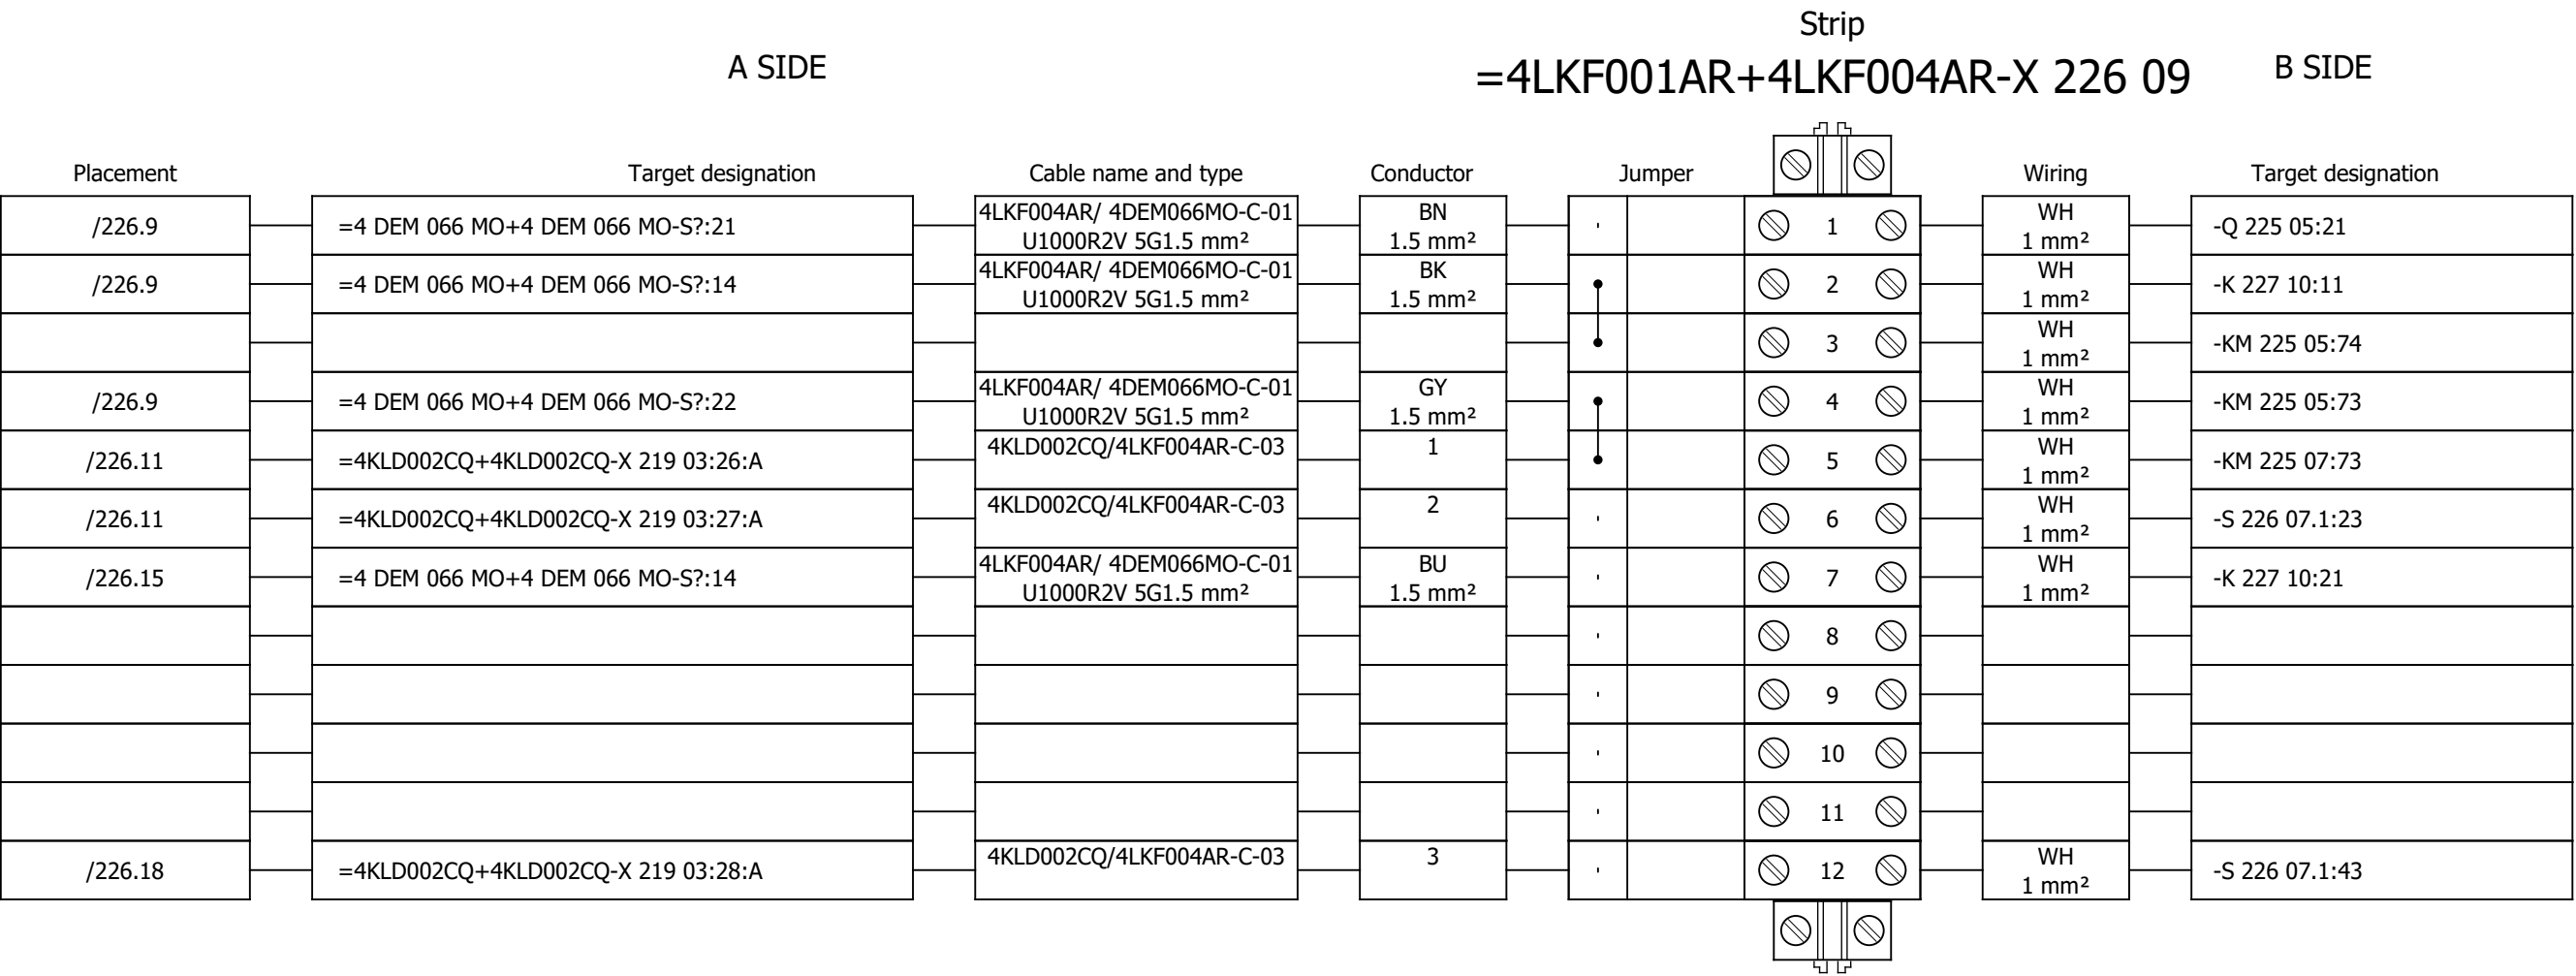


Terminal diagram

A SIDE				Strip				B SIDE				
				=4LKF001AR+4LKF004AR-X 228 06								
Placement	Target designation			Cable name and type	Conductor	Jumper		Wiring	Target designation			
/228.6	=4KLD002CQ+4KLD002CQ-X 043 07:14			4KLD002CQ/4LKF004AR-C-01	2		)1 					
							 2 	RD 1 mm²	-KM 225 05:83			
/228.11	=4 DEM 066 MO+4 DEM 066 MO-S?:31			4LKF004AR/ 4DEM066MO-C-02 U1000R2V 3G1.5 mm²	BN 1.5 mm²		 3 					
							 4 		=4 DEM 055 MO+4 DEM 055			
							 5 		=4 DEM 055 MO+4 DEM 055			
							 6 					
/228.8	=4KLD002CQ+4KLD002CQ-X 043 07:45			4KLD002CQ/4LKF004AR-C-01	5	,	 7 	RD 1 mm²	-KM 225 05:84			
/228.9	=4KLD002CQ+4KLD002CQ-X 043 07:46			4KLD002CQ/4LKF004AR-C-01	6	,	 8 	RD 1 mm²	-KM 225 07:84			
/228.11	=4 DEM 066 MO+4 DEM 066 MO-S?:32			4LKF004AR/ 4DEM066MO-C-02 U1000R2V 3G1.5 mm²	BU 1.5 mm²	,	)9 	RD 1 mm²	-K 227 10:31			
/228.11	=4KLD002CQ+4KLD002CQ-X 043 07:47			4KLD002CQ/4LKF004AR-C-01	7	,	 10 	RD 1 mm²	-S 226 07.1:54			
						,	 11 					
						,	 12 					
						,	 13 					
						,	 14 					
/229.6	=4KLD002CQ+4KLD002CQ-X 043 07:48			4KLD002CQ/4LKF004AR-C-01	8	,	 15 		=4 DEM 055 MO+4 DEM 055			
/229.9	=4KLD002CQ+4KLD002CQ-X 043 07:49			4KLD002CQ/4LKF004AR-C-01	9	,	 16 		=4 DEM 055 MO+4 DEM 055			
						,	 17 					
						,	 18 					
						,	 19 					
												


Terminal diagram

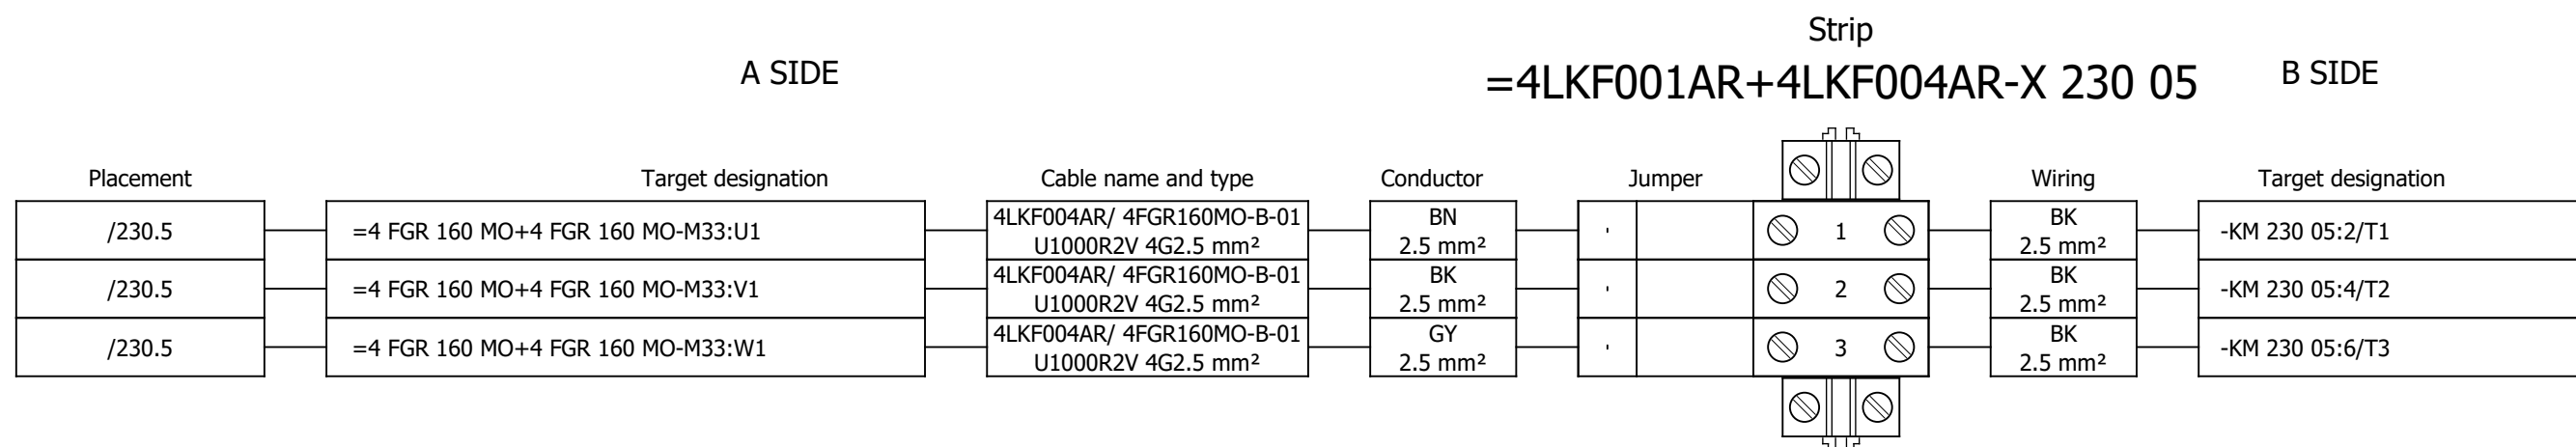


Strip
=4LKF001AR+4LKF004AR-X 231 09 B SIDE

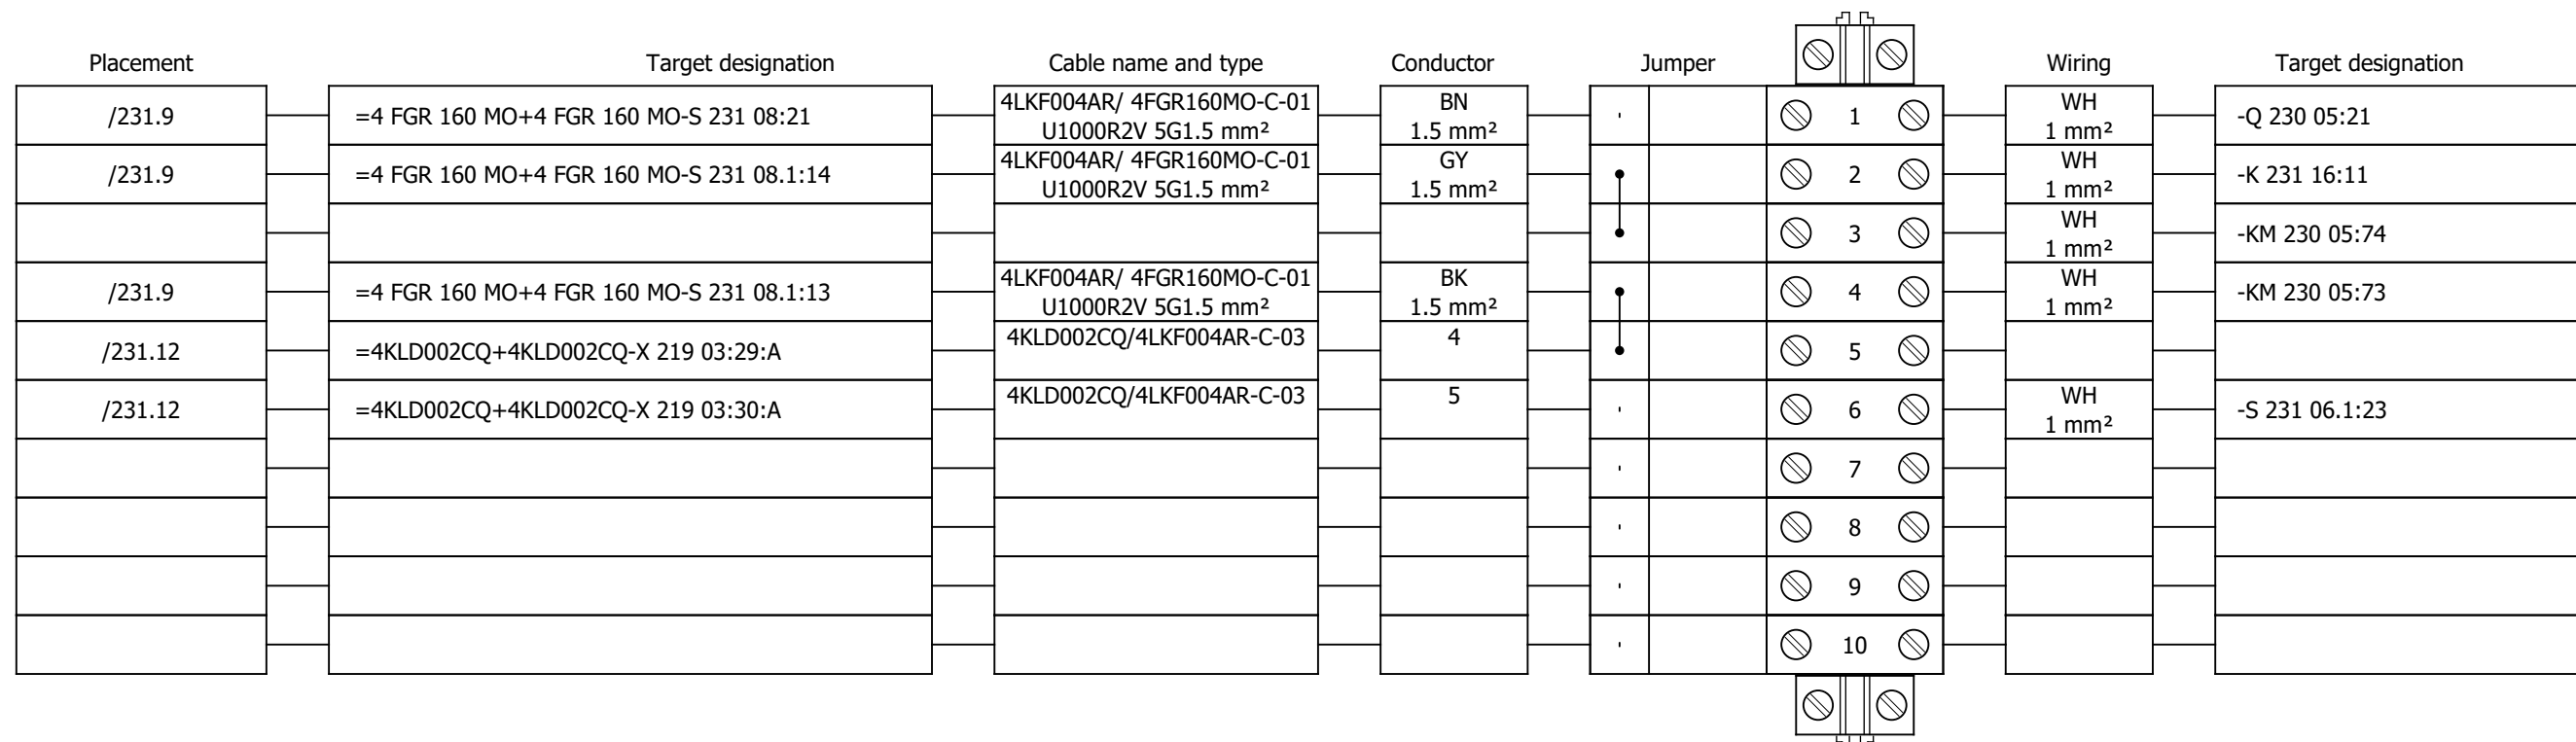


Terminal diagram

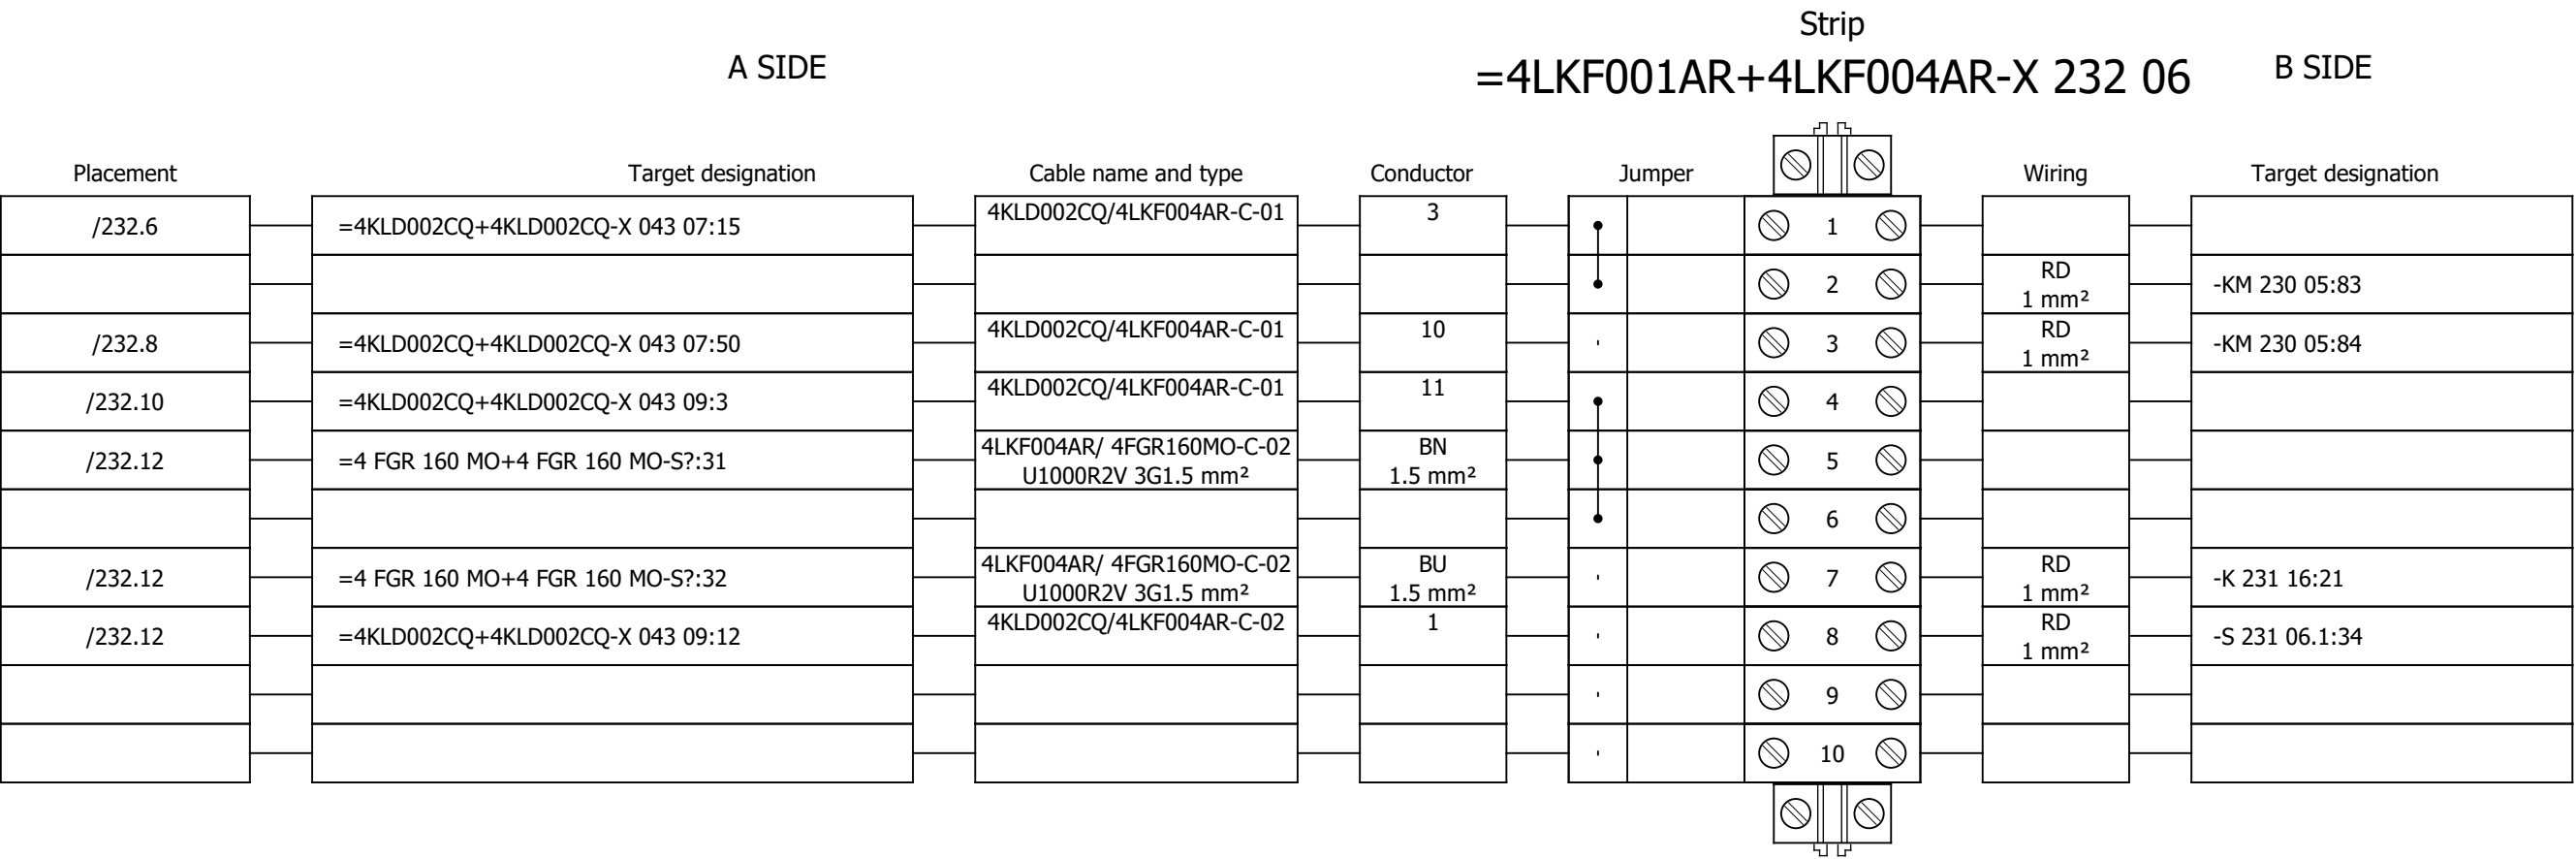



Terminal diagram

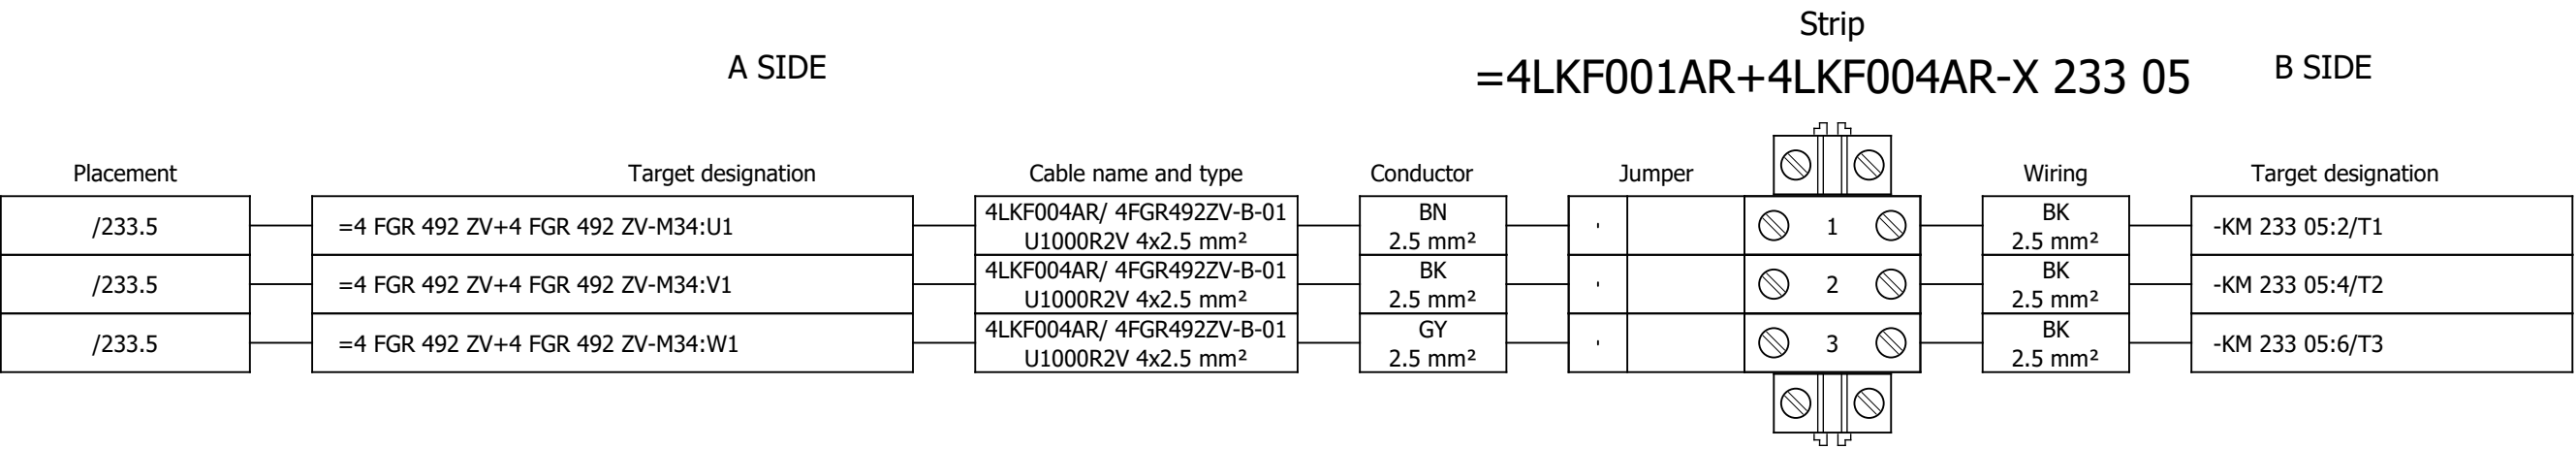


Terminal diagram

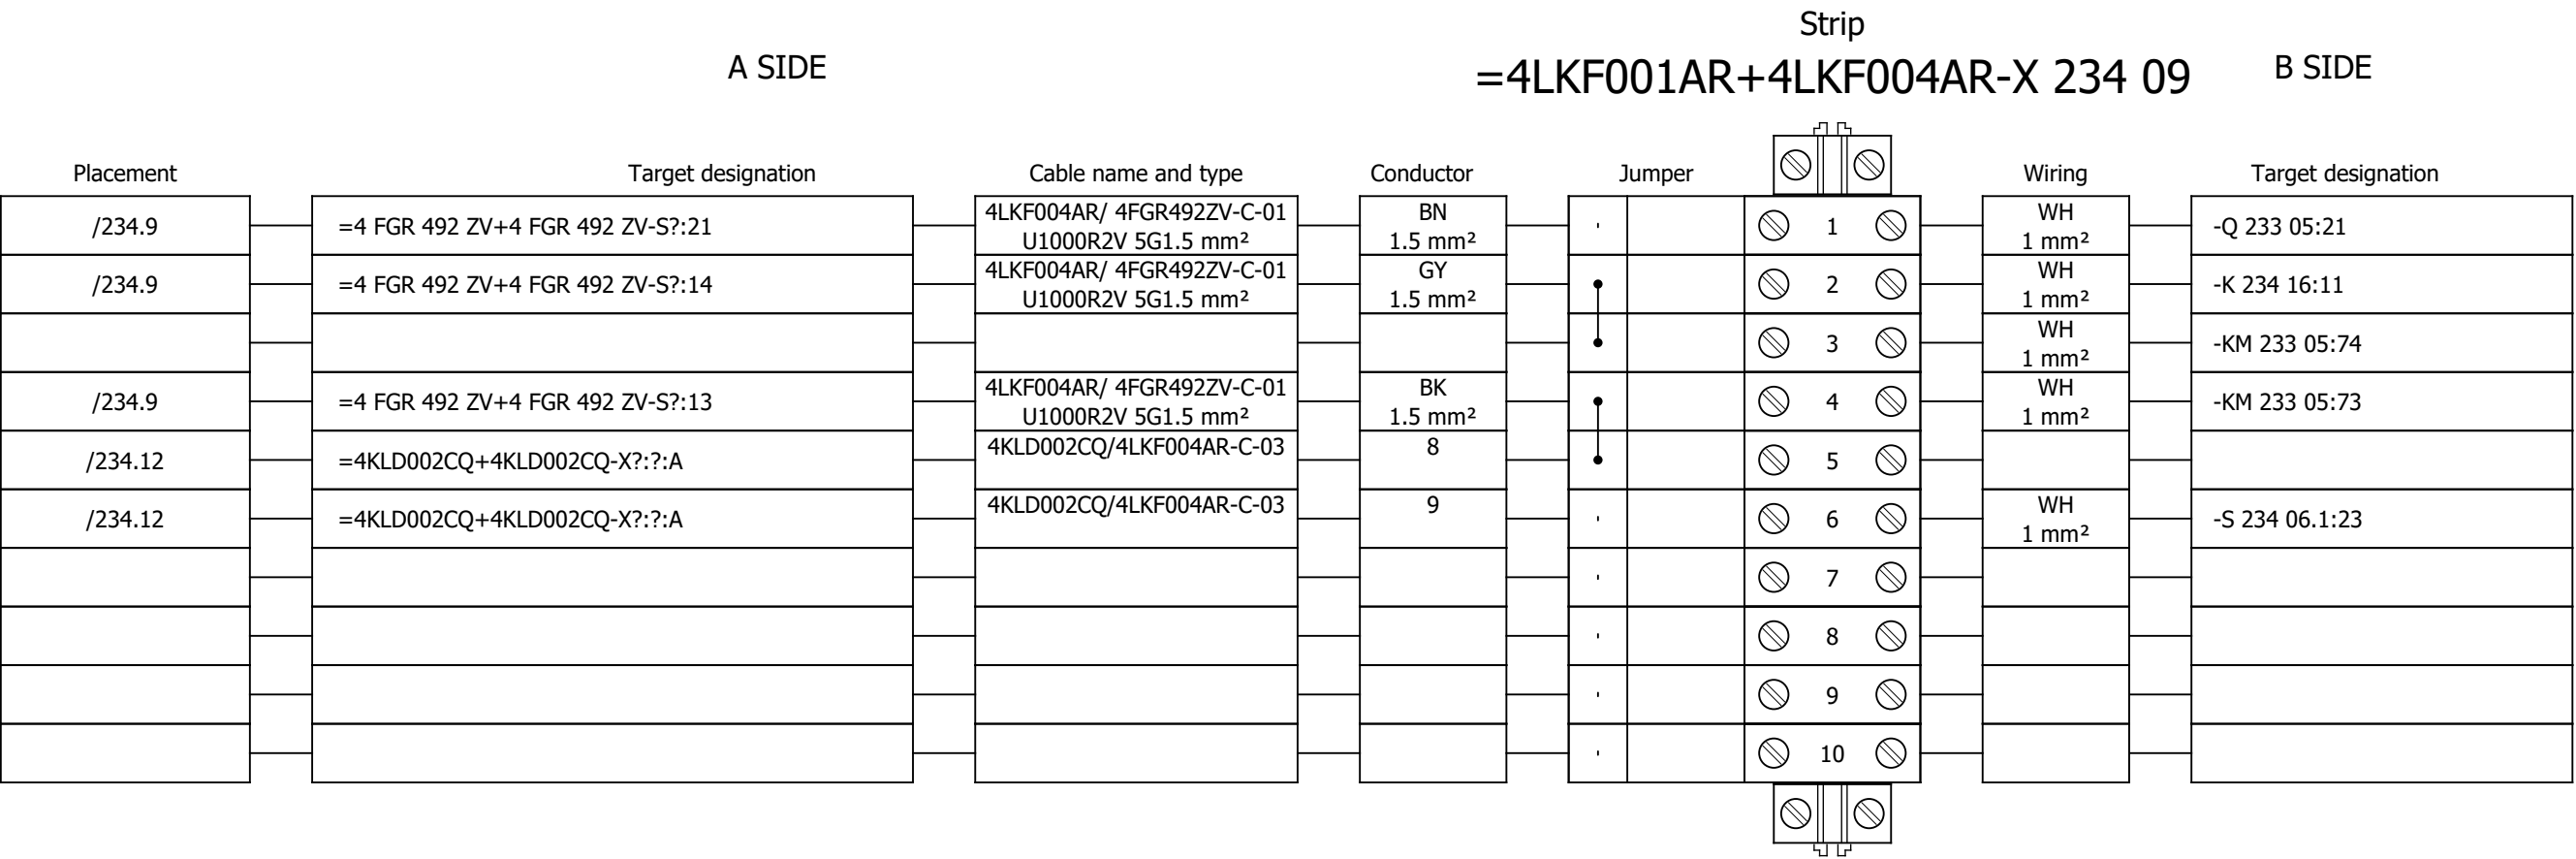

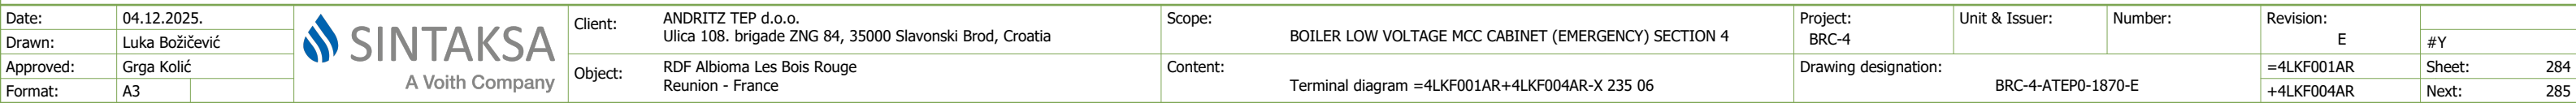

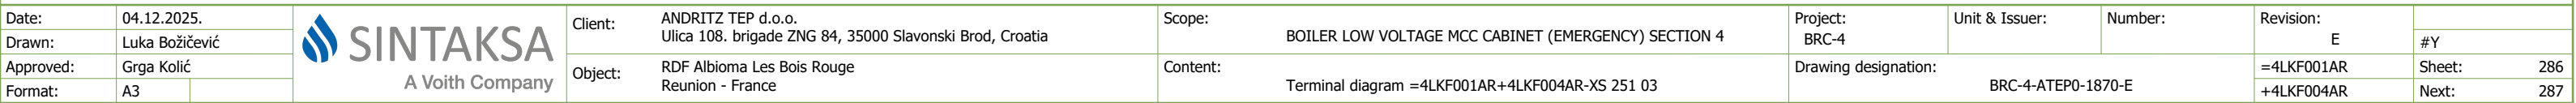


Terminal diagram


A SIDE										Strip		B SIDE					
										=4LKF001AR+4LKF004AR-XS 255 02							
Placement	Target designation				Cable name and type				Conductor	Jumper		Wiring	Target designation				
											 1 						
											 2 						
											 3 						
											 4 						
											 5 						
											 6 						
											 7 						
											 8 						
											 9 						
											 10 						
											 11 						
											 12 						
											 13 						
											 14 						
											 15 						
											 16 						
											 17 						
											 18 						
											 19 						
											 20 						
											 21 						
											 22 						
											 23 						
											 24 						
											 25 						


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 4		Project:	BRC-4	Unit & Issuer:		Number:		Revision:	E	
Drawn:	Luka Božičević																#Y
Approved:	Grga Kolić				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	Terminal diagram =4LKF001AR+4LKF004AR-XS 255 02		Drawing designation:					=4LKF001AR	Sheet:	288
Format:	A3									BRC-4-ATEP0-1870-E					+4LKF004AR	Next:	289

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
	Sorting number	Part number	Quantity	Manufacturer	Device	Device description							Device designation				
	25.	PXC.2954882	1	Phoenix Contact	Component for protective circuit	Diode module, with eight diodes, common anode, diode type 1N 5408							-R 236 06				
	26.	PXC.2950116	1	Phoenix Contact	Component for protective circuit	Diode module, with 14 diodes, common cathode, diode type 1N 4007							-R 236 10				
	27.	PXC.2954879	1	Phoenix Contact	Component for protective circuit	Diode module, with eight diodes, common cathode, diode type 1N 5408							-R 236 14				
	28.	SE.XPSBAC34AP	5	Schneider Electric	Safety module	Harmony Safety Automation Estop or guard ,Harmony XPS, connected to supply terminals 48-240 V AC/DC , no inputs, screw							-RP 223 05;-RP 226 05;-RP 226 11;-RP 231 05;-RP 23 4 05				
	29.	SE.XB4BA21	3	Schneider Electric	Black flush complete pushbutton Ø22 spring return 1NO "unmarked"	Black flush complete pushbutton Ø22 spring return 1NO							-S 223 06;-S 231 06;-S 234 06				
	30.	SE.XB4BD33	5	Schneider Electric	Selector switch, BLACK, 1-0-2, 2NO	Metal Black Ø22 3 positions 2 NO							-S 223 06.1;-S 226 07;-S 226 07.1;-S 231 06.1;-S 234 06.1				
	31.	SE.ZBE101	3	Schneider Electric	Single contact block NO	Harmony XB4 Silver alloy 1 NO							-S 226 07.1				
	32.	SOC.47506015	4	Socomec	TORES LOCATION SENSOR DELTA IP-15 (15mm)	Maximal diameter of cable: 15mm							-TC 222 05;-TC 225 05;-TC 230 05;-TC 233 05				
	33.	SOC.47290590	4	Socomec	ISOM T-15	Feed-through terminal block, nom. voltage: 800 V Connection adaptor, ISOM T-15 to ISOM Digiware F-60 modules nominal current: 24 A							-TC 222 05;-TC 225 05;-TC 230 05;-TC 233 05				
	34.	PXC.3209510	147	Phoenix Contact	PT 2,5 Feed-through terminal block	number of connections: 2 number of positions: 1 connection method: Push-in connection Rated cross section: 2.5 mm2 cross section: 0.14 mm2 - 4 mm2							-X 222 05;-X 223 09;-X 224 06;-X 225 05;-X 226 09;-X 228 06;-X 230 05;-X 231 09;-X 232 06;-X 233 05;-X 234 09;-X 235 06;-XB 236 03;-XS 251 03;-XS 255 02				

Terminal diagram

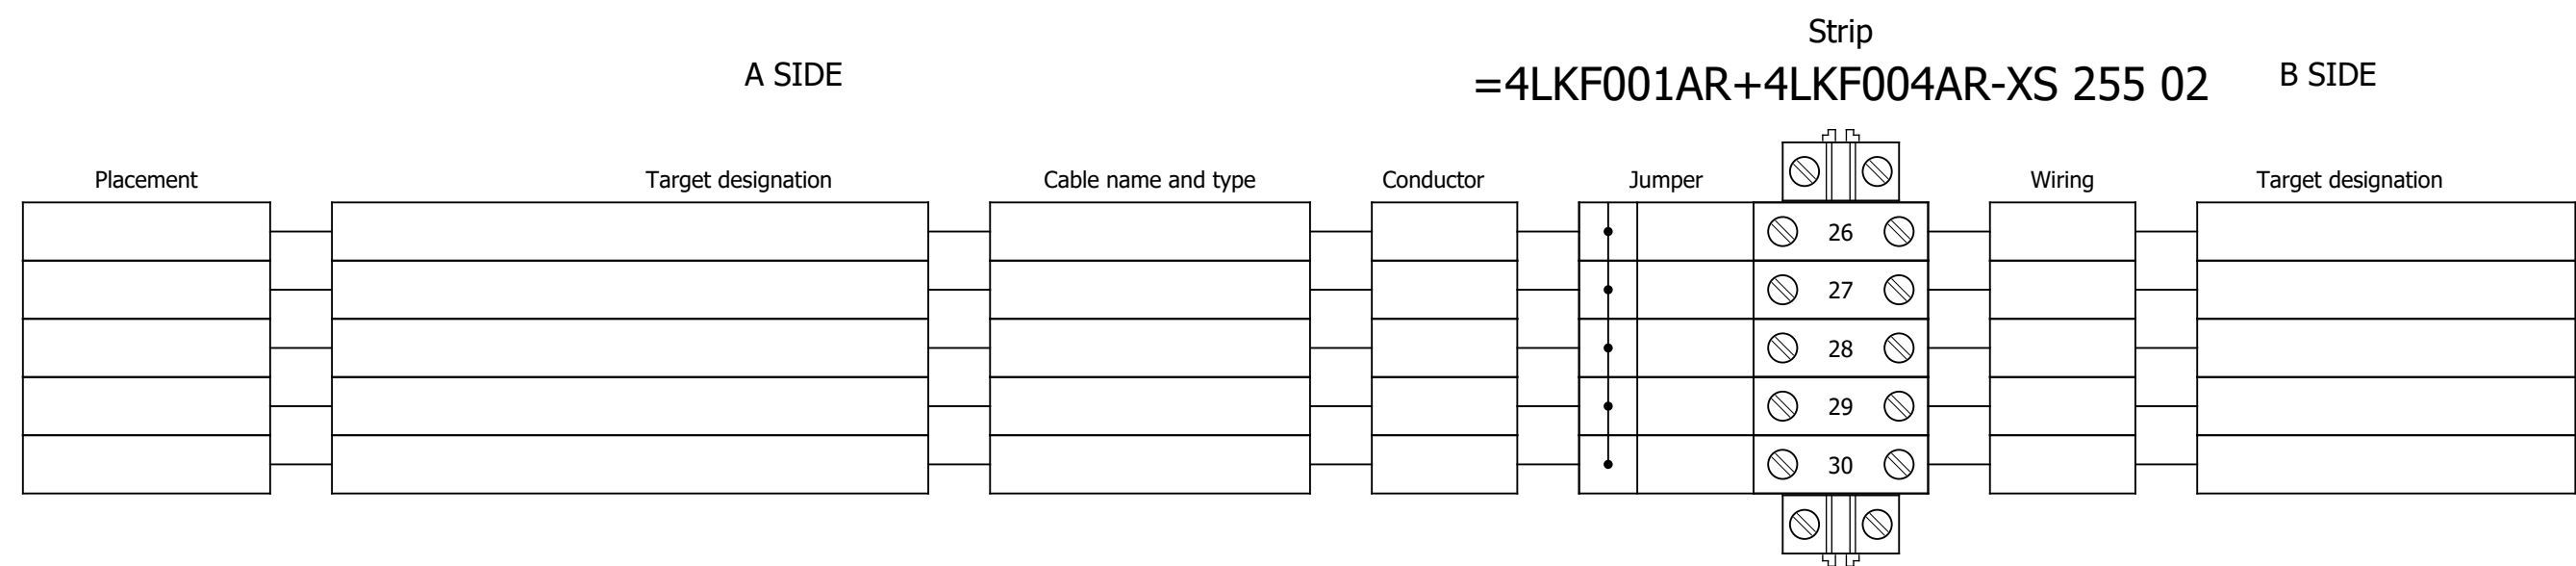

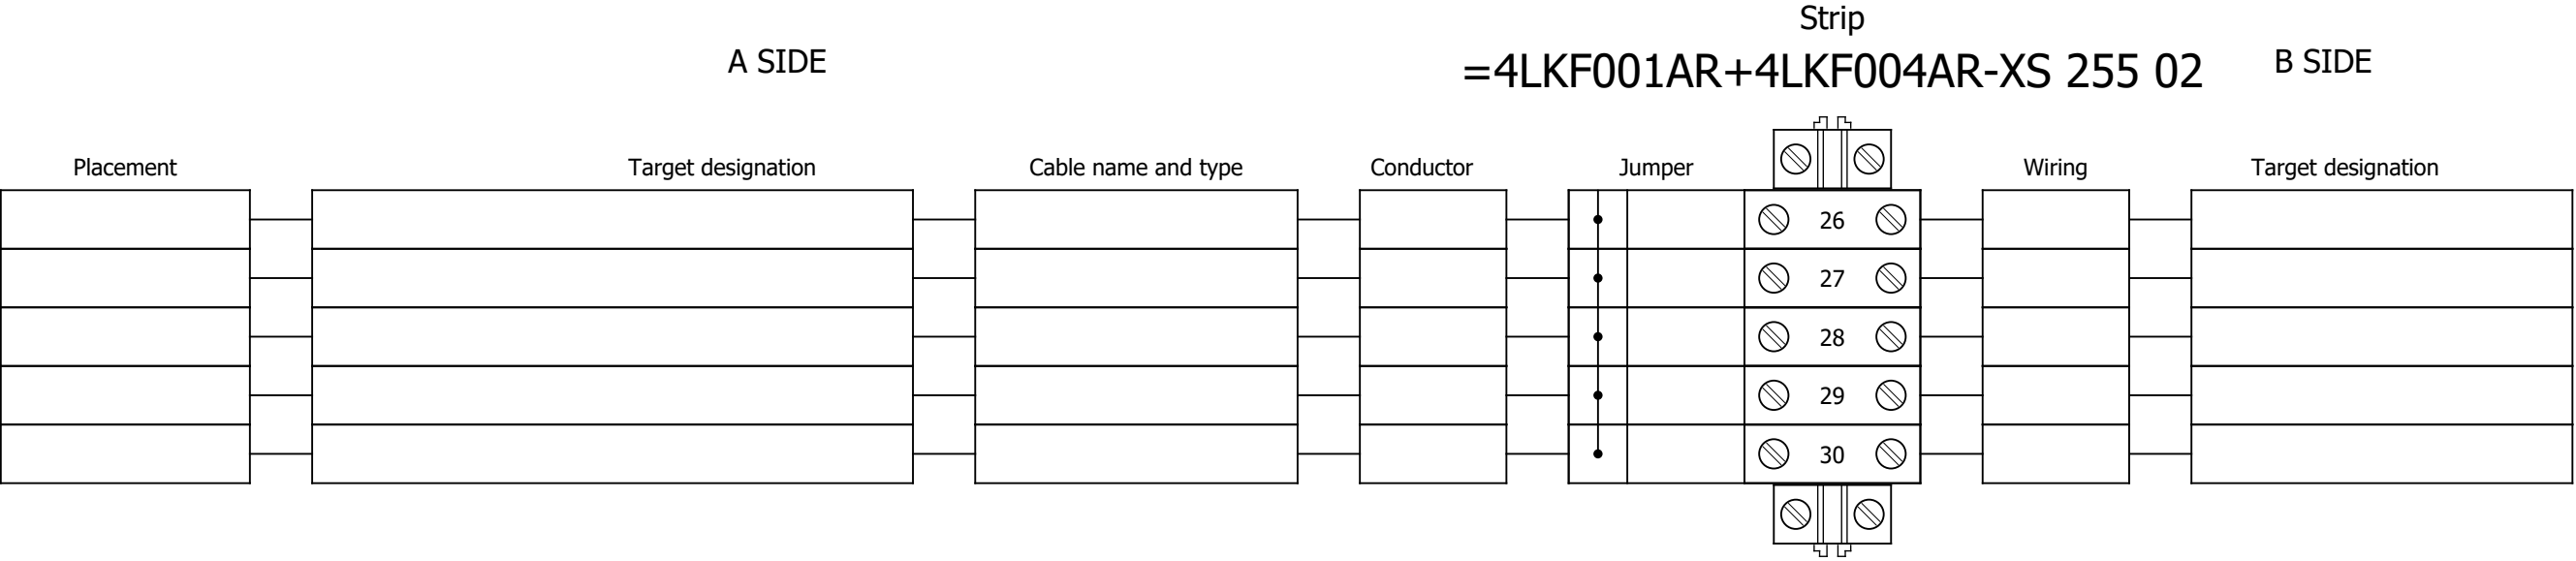

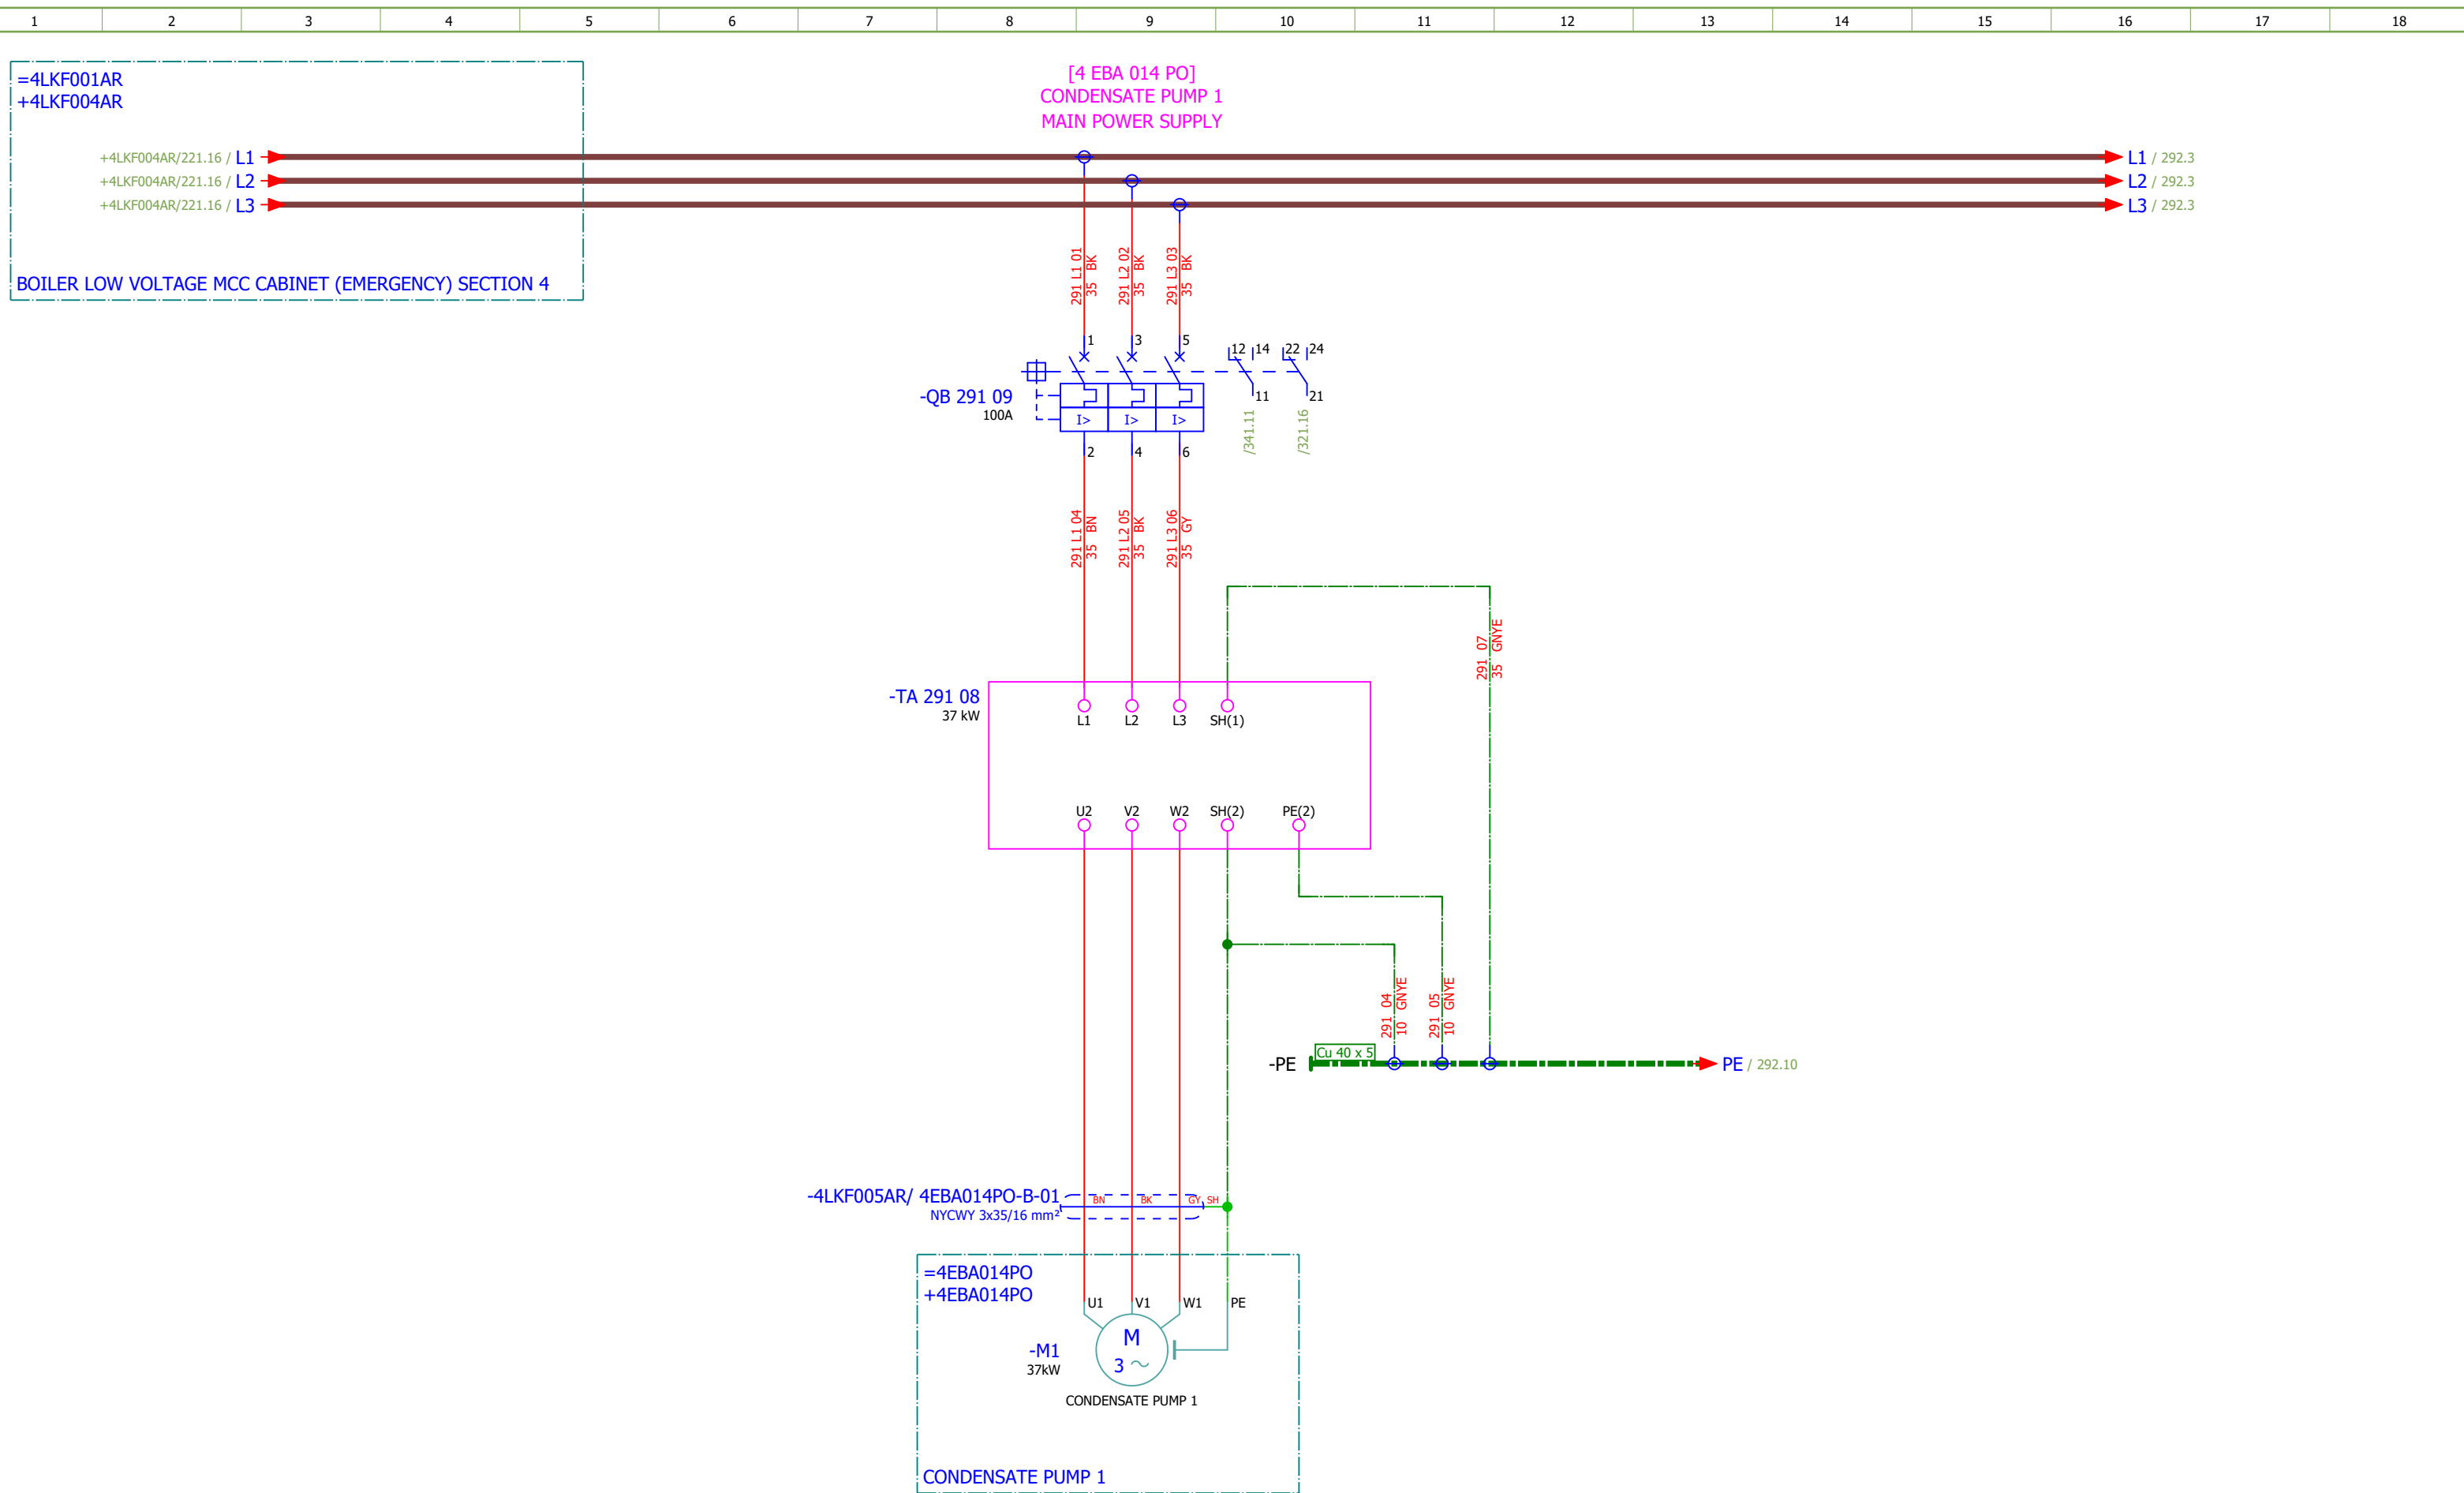

Date:	04.12.2025.	
Drawn:	Jere Radas	
Approved:	Grga Kolić	
Format:	A3	



SINTAKSA
A Voith Company

Client:

ANDRITZ TEP d.o.o.
Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia

Object:

RDF Albioma Les Bois Rouge
Reunion - France

Scope:

BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6

Content:

COOLING WATER PUMP 1 - MAIN POWER SUPPLY

Project:

BRC-4

Unit & Issuer:

ATEP0

Number:

1870

Revision:

E

#D

Drawing designation:

BRC-4-ATEP0-1870-E

=4LKF001AR


Sheet:

292


+4LKF005AR

Next:


293

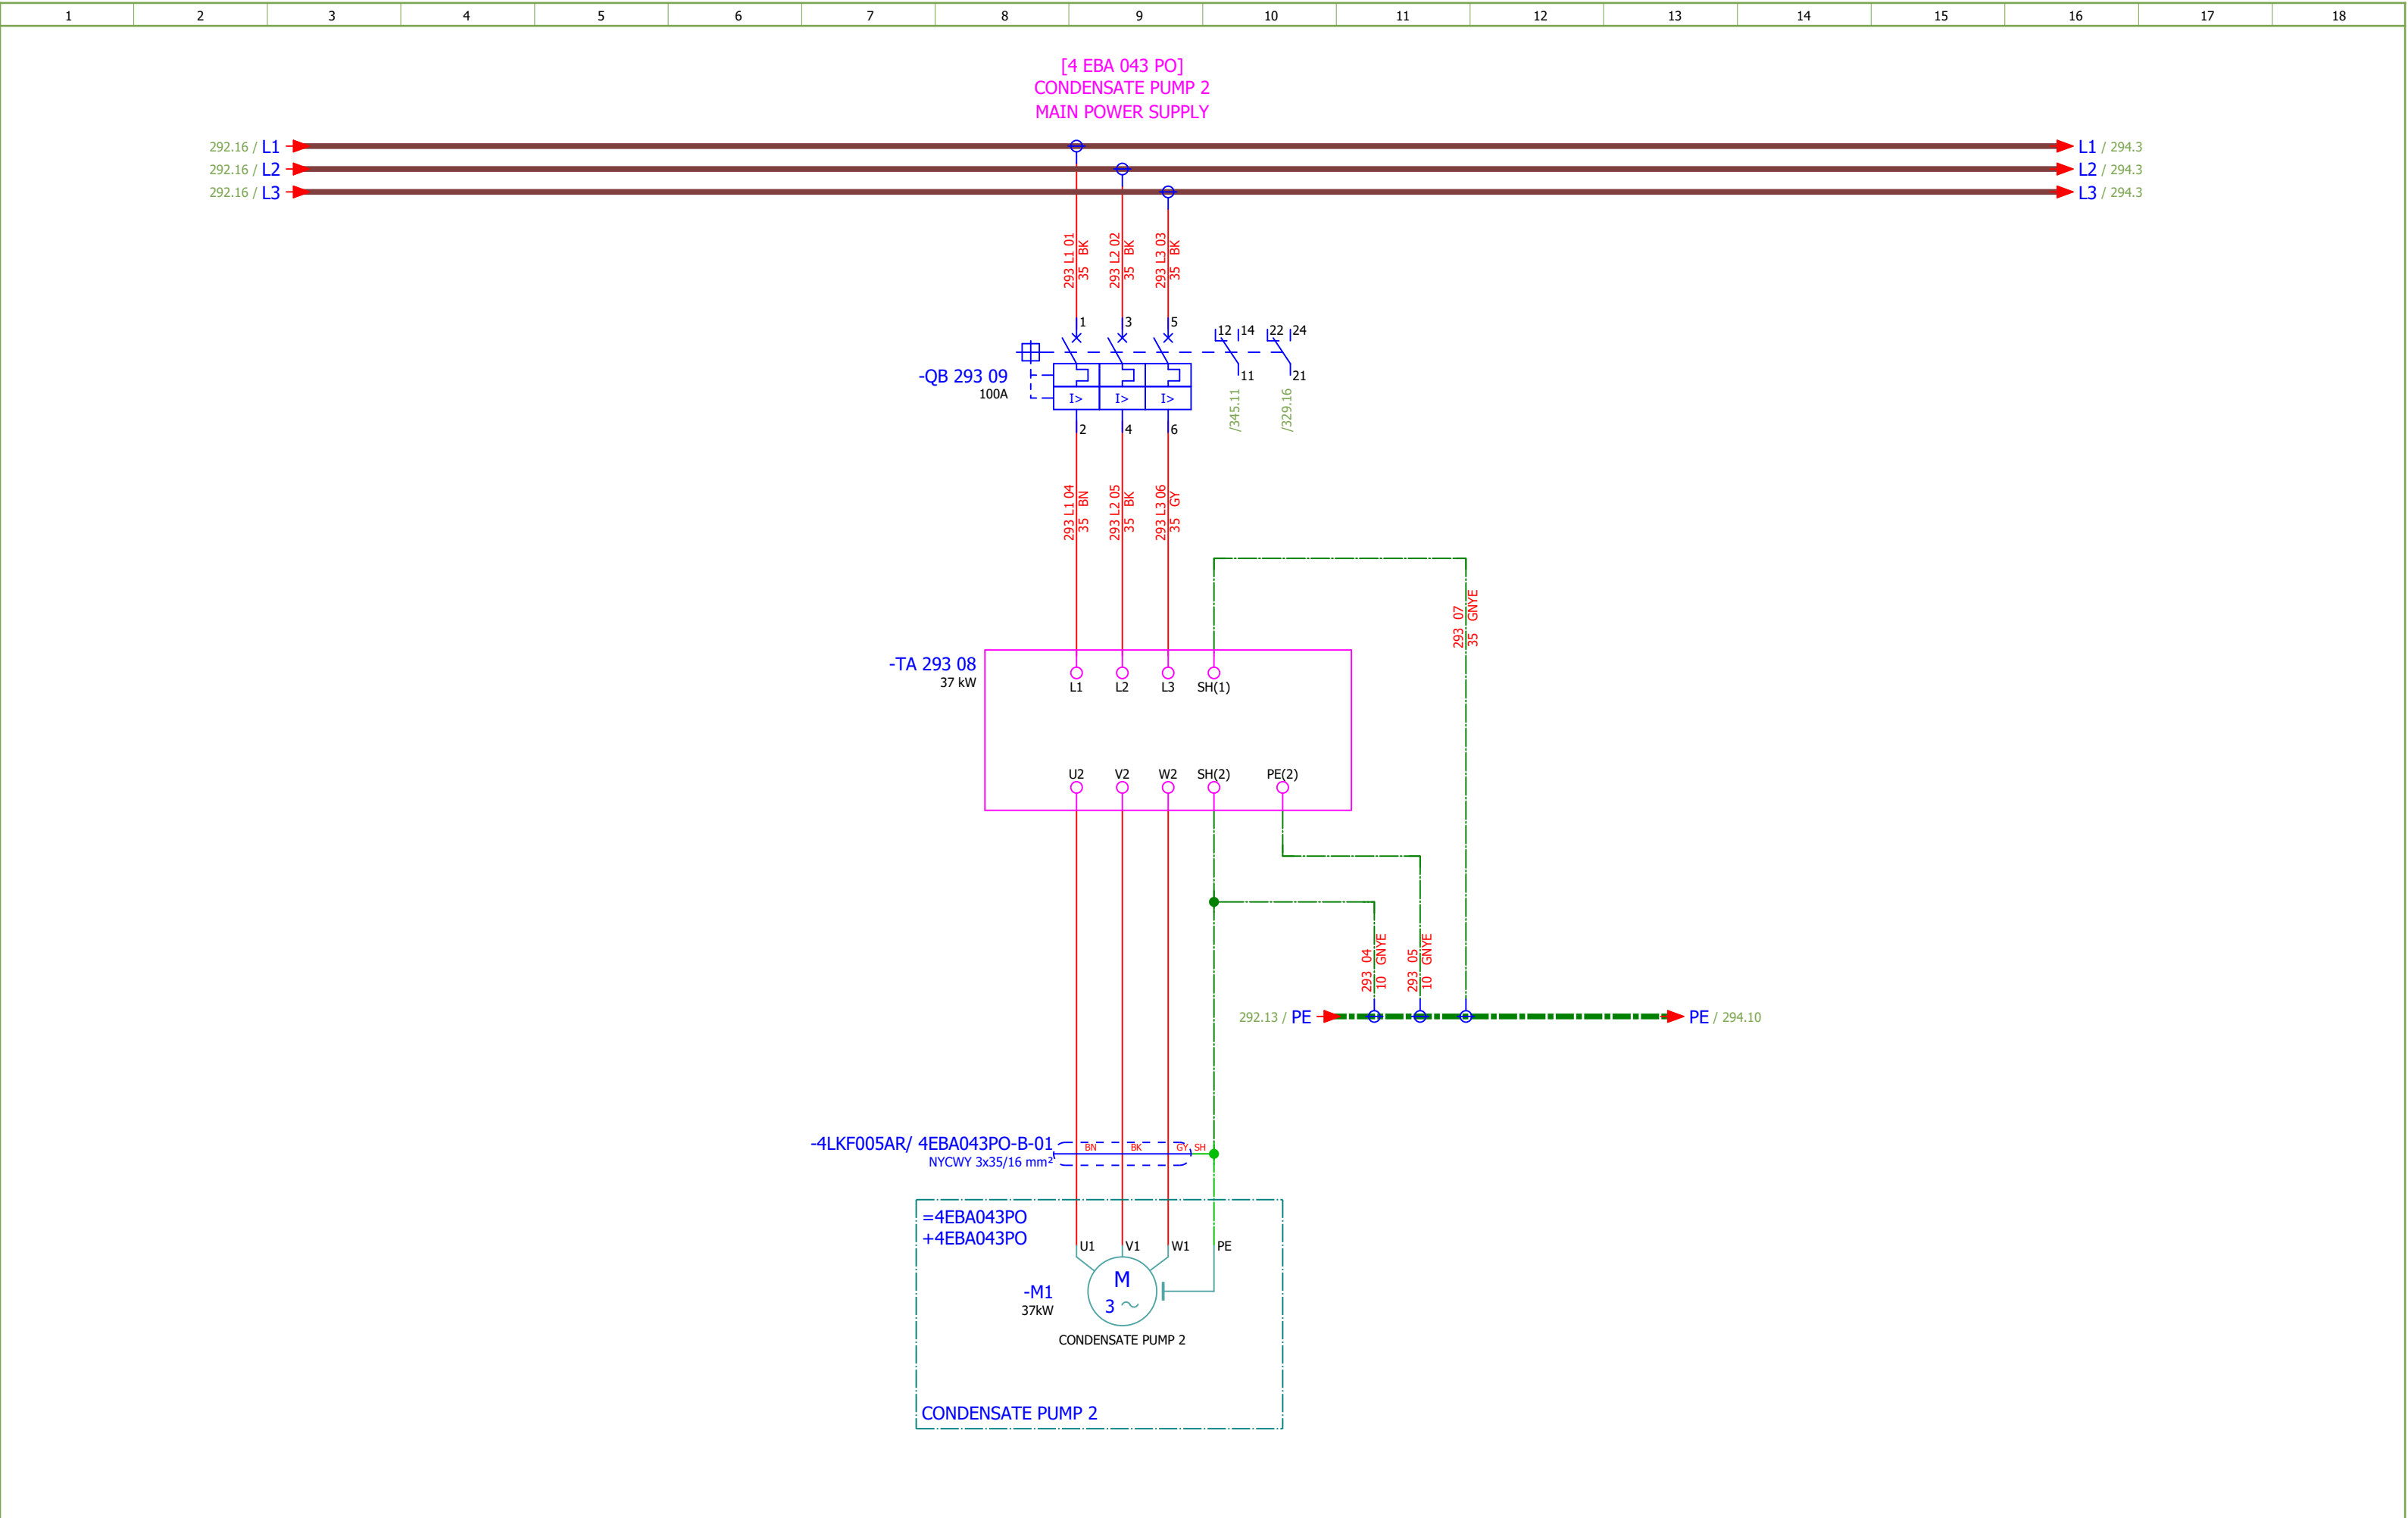


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Jere Radas			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	CONDENSATE PUMP 2 - MAIN POWER SUPPLY		Drawing designation: BRC-4-ATEP0-1870-E					=4LKF001AR	Sheet:	293	
Approved:	Grga Kolić													+4LKF005AR	Next:	294	
Format:	A3																

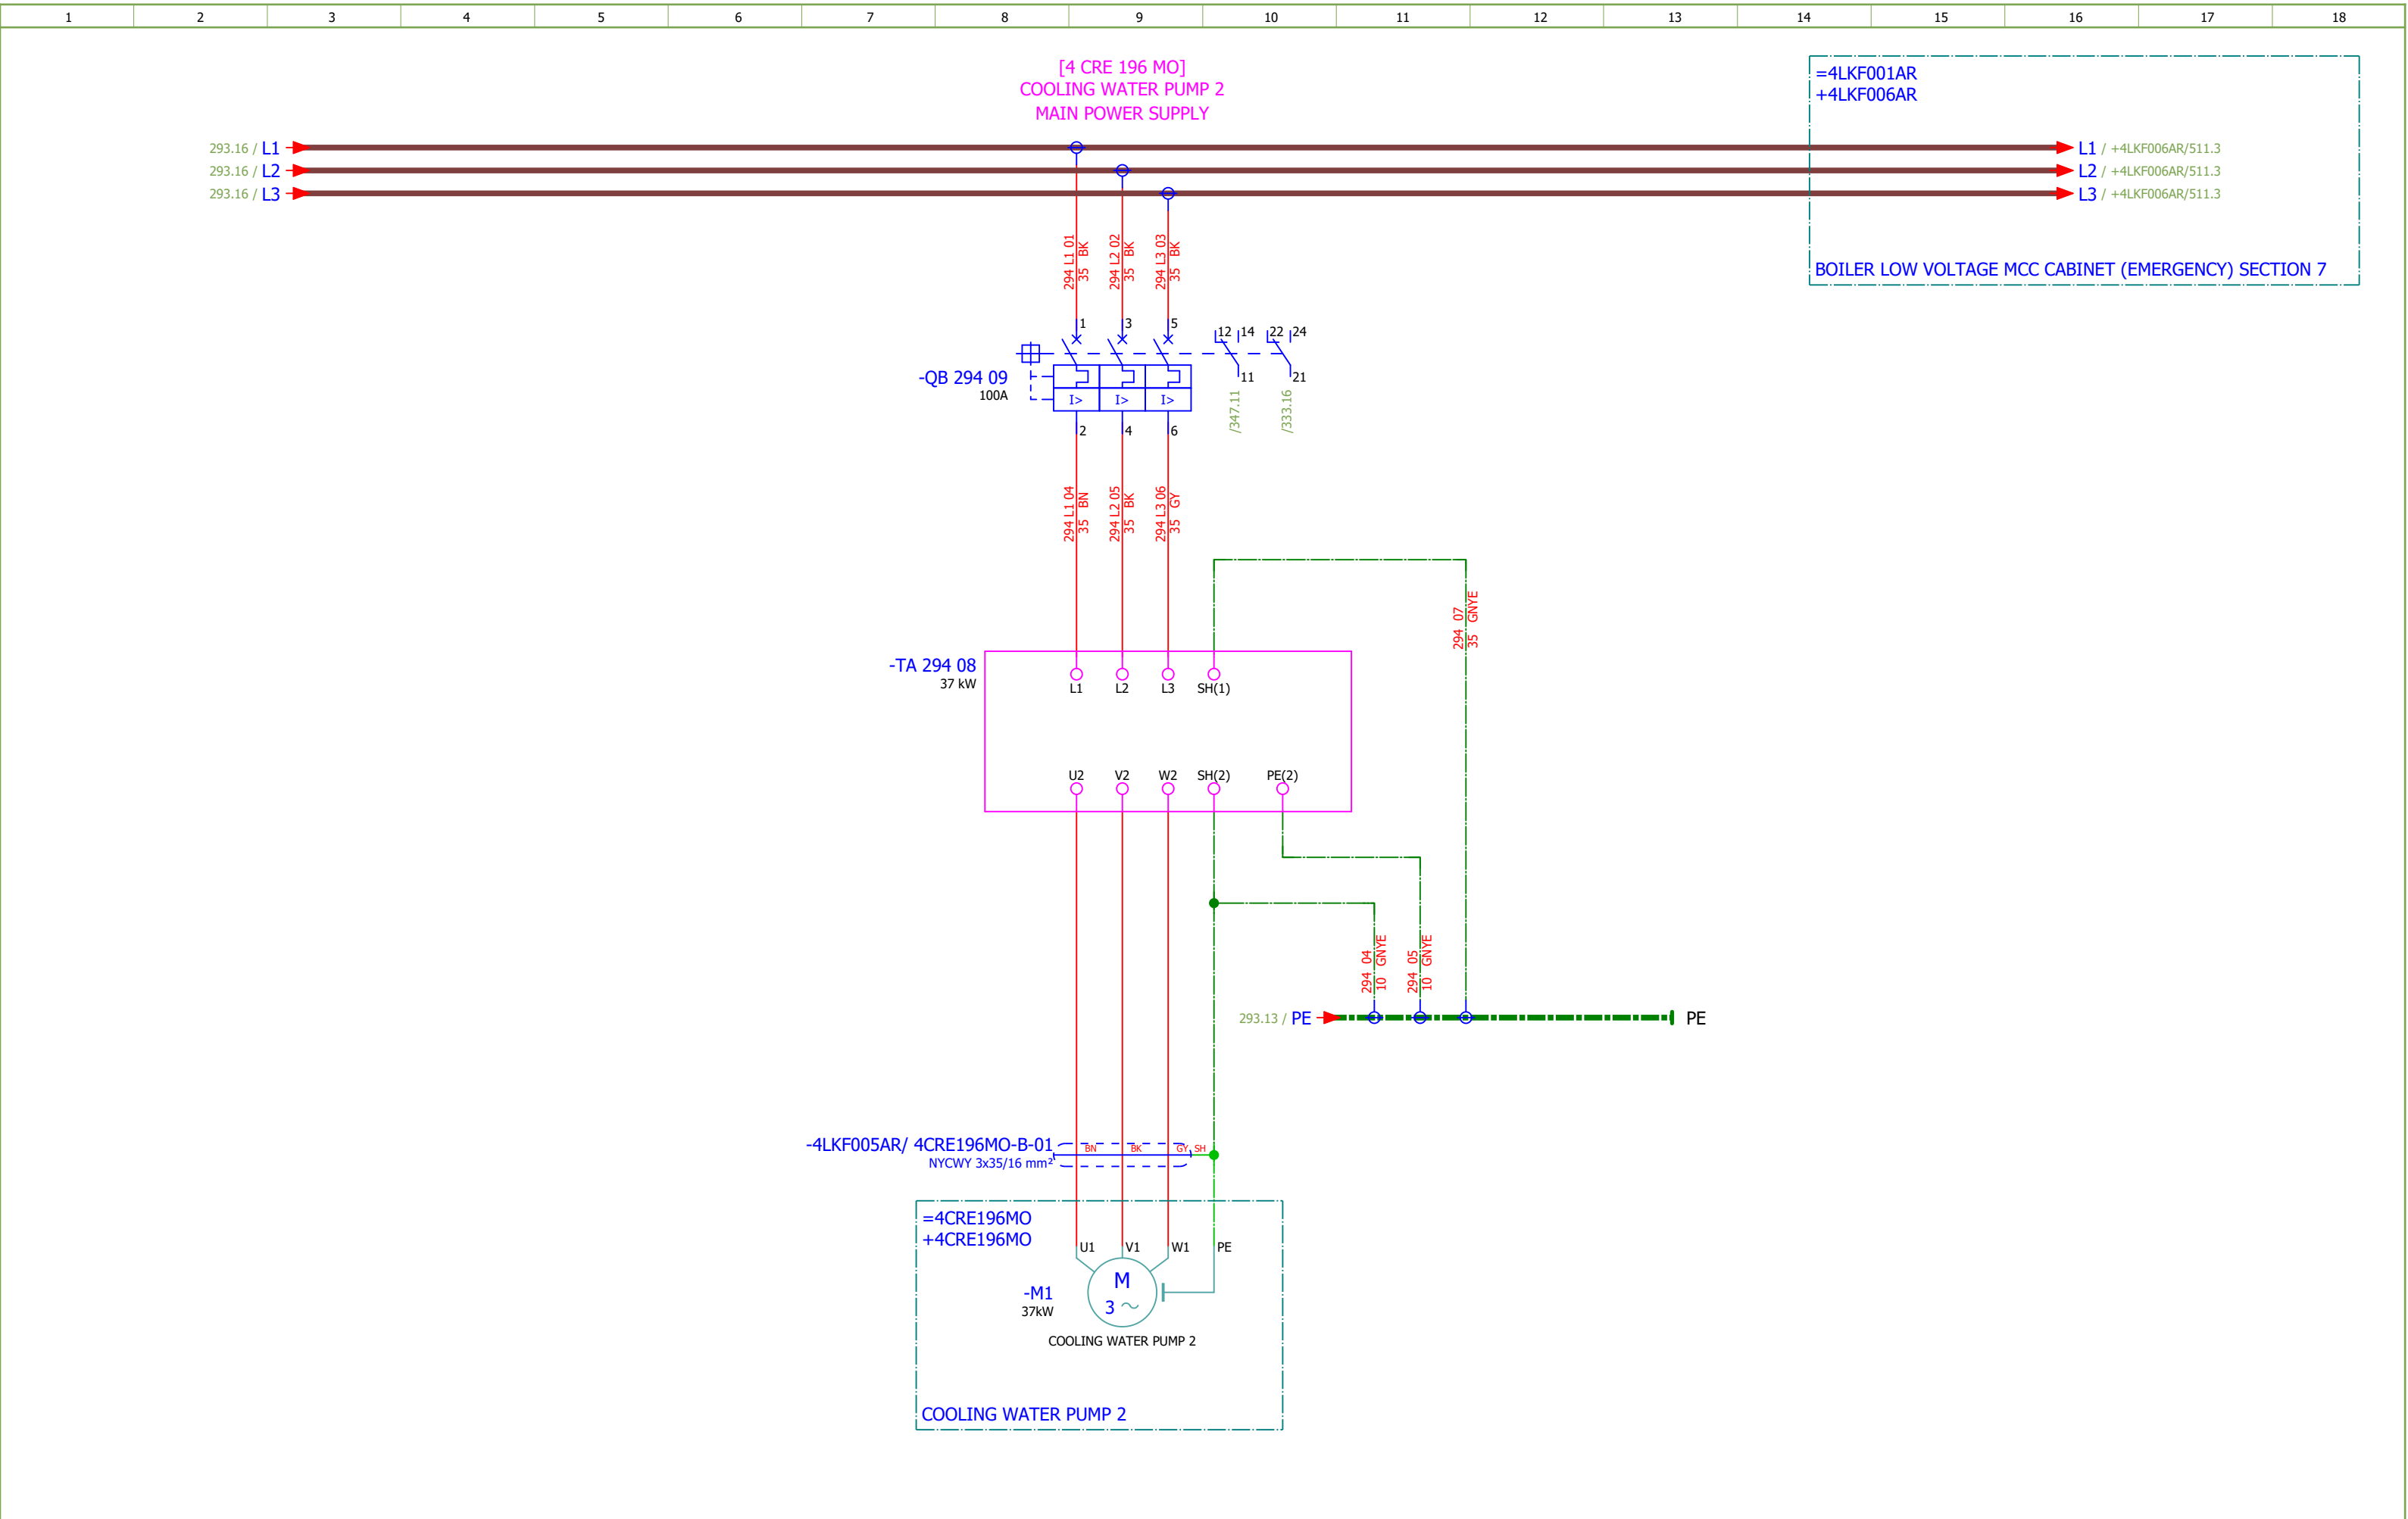



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----

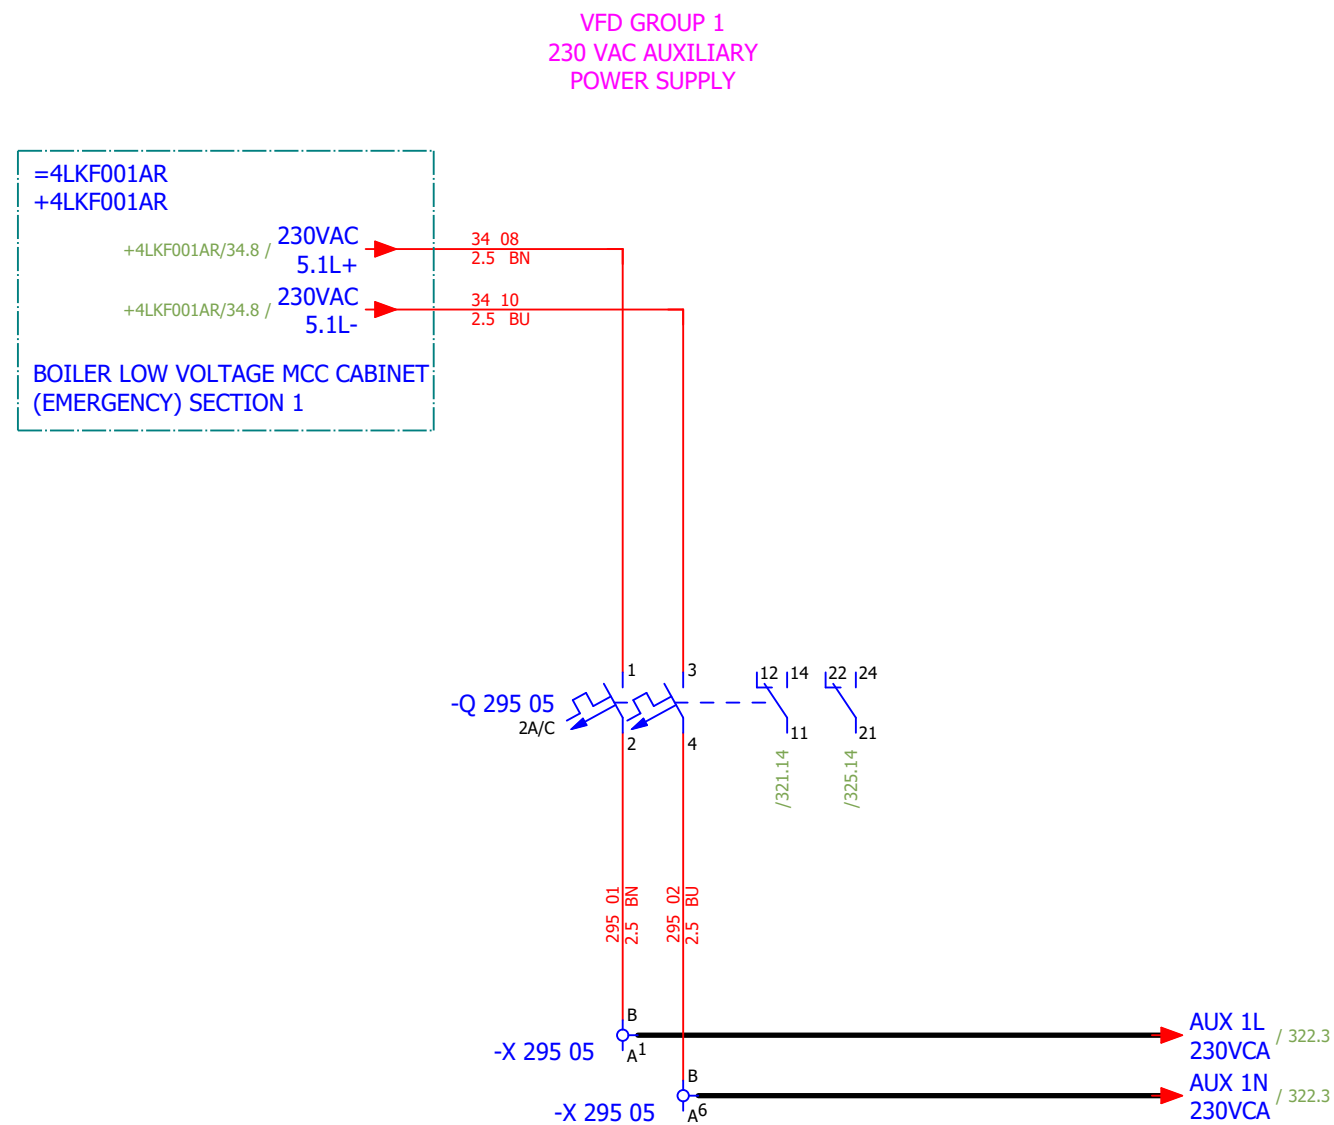

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E		
Drawn:	Jere Radas																#D	
Approved:	Grga Kolić				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	VFD GROUP 1 - 230 VAC AUXILIARY POWER SUPPLY		Drawing designation:		BRC-4-ATEP0-1870-E				=4LKF001AR	Sheet:	295
Format:	A3															+4LKF005AR	Next:	296

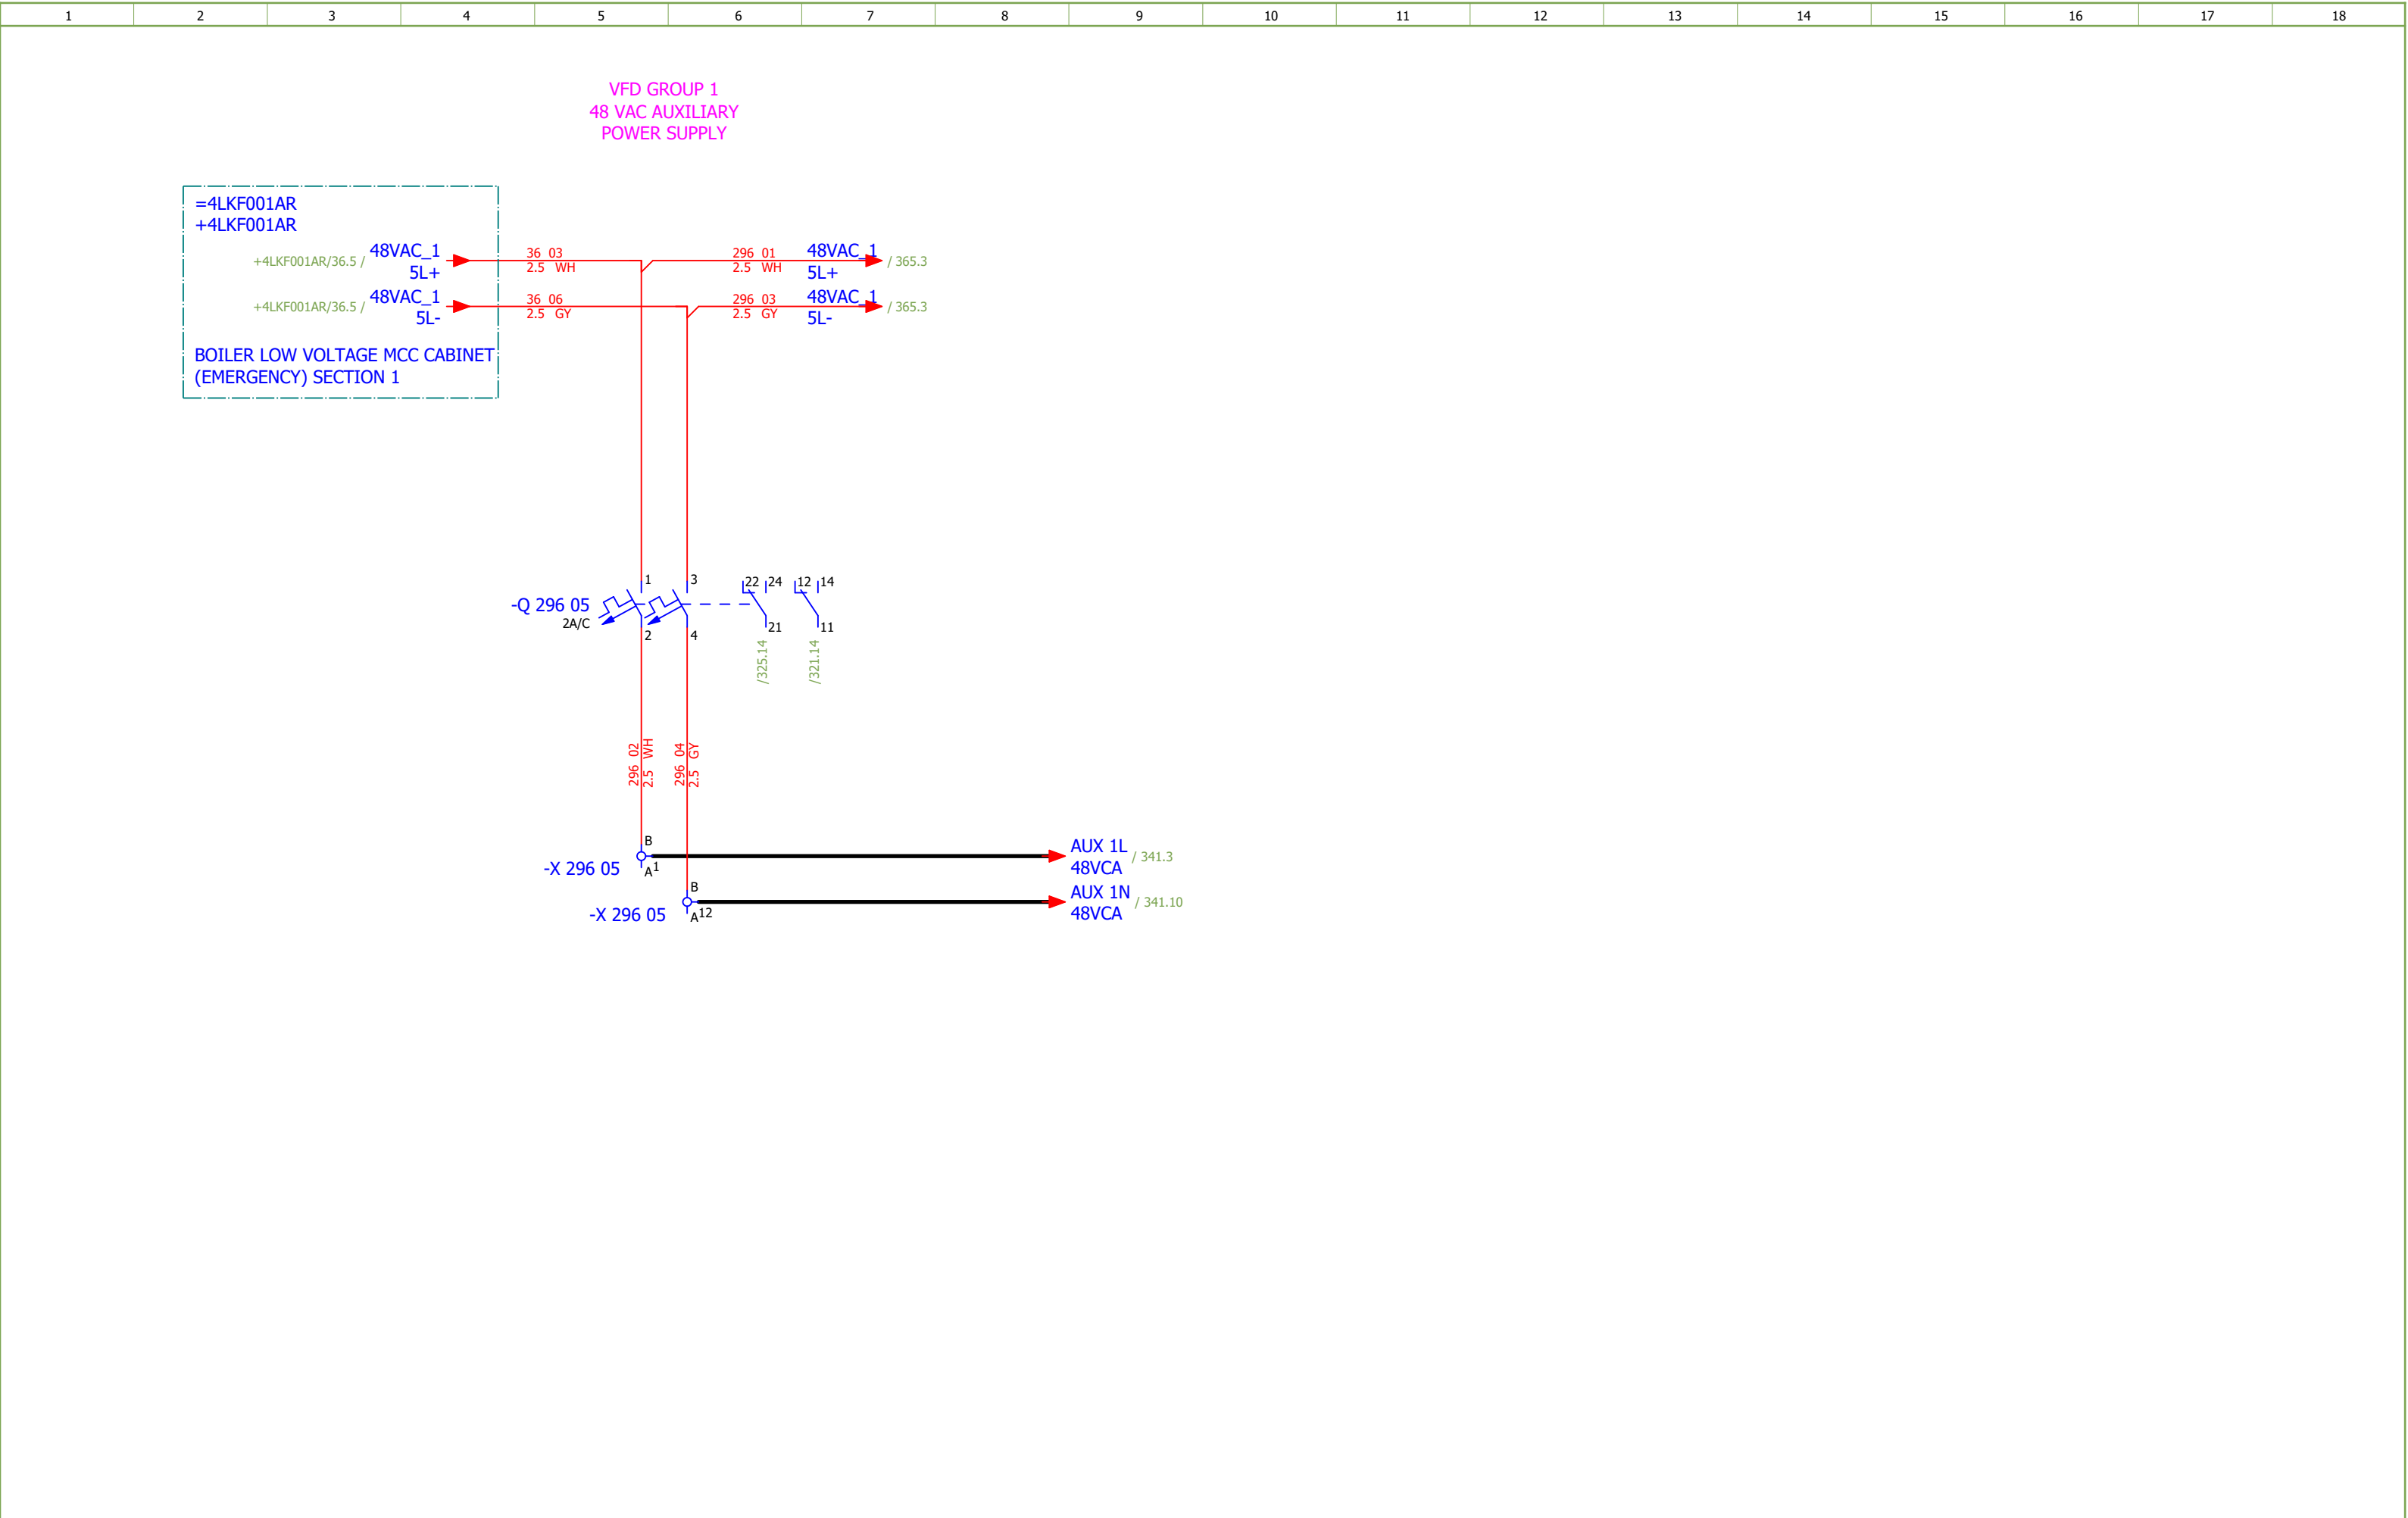

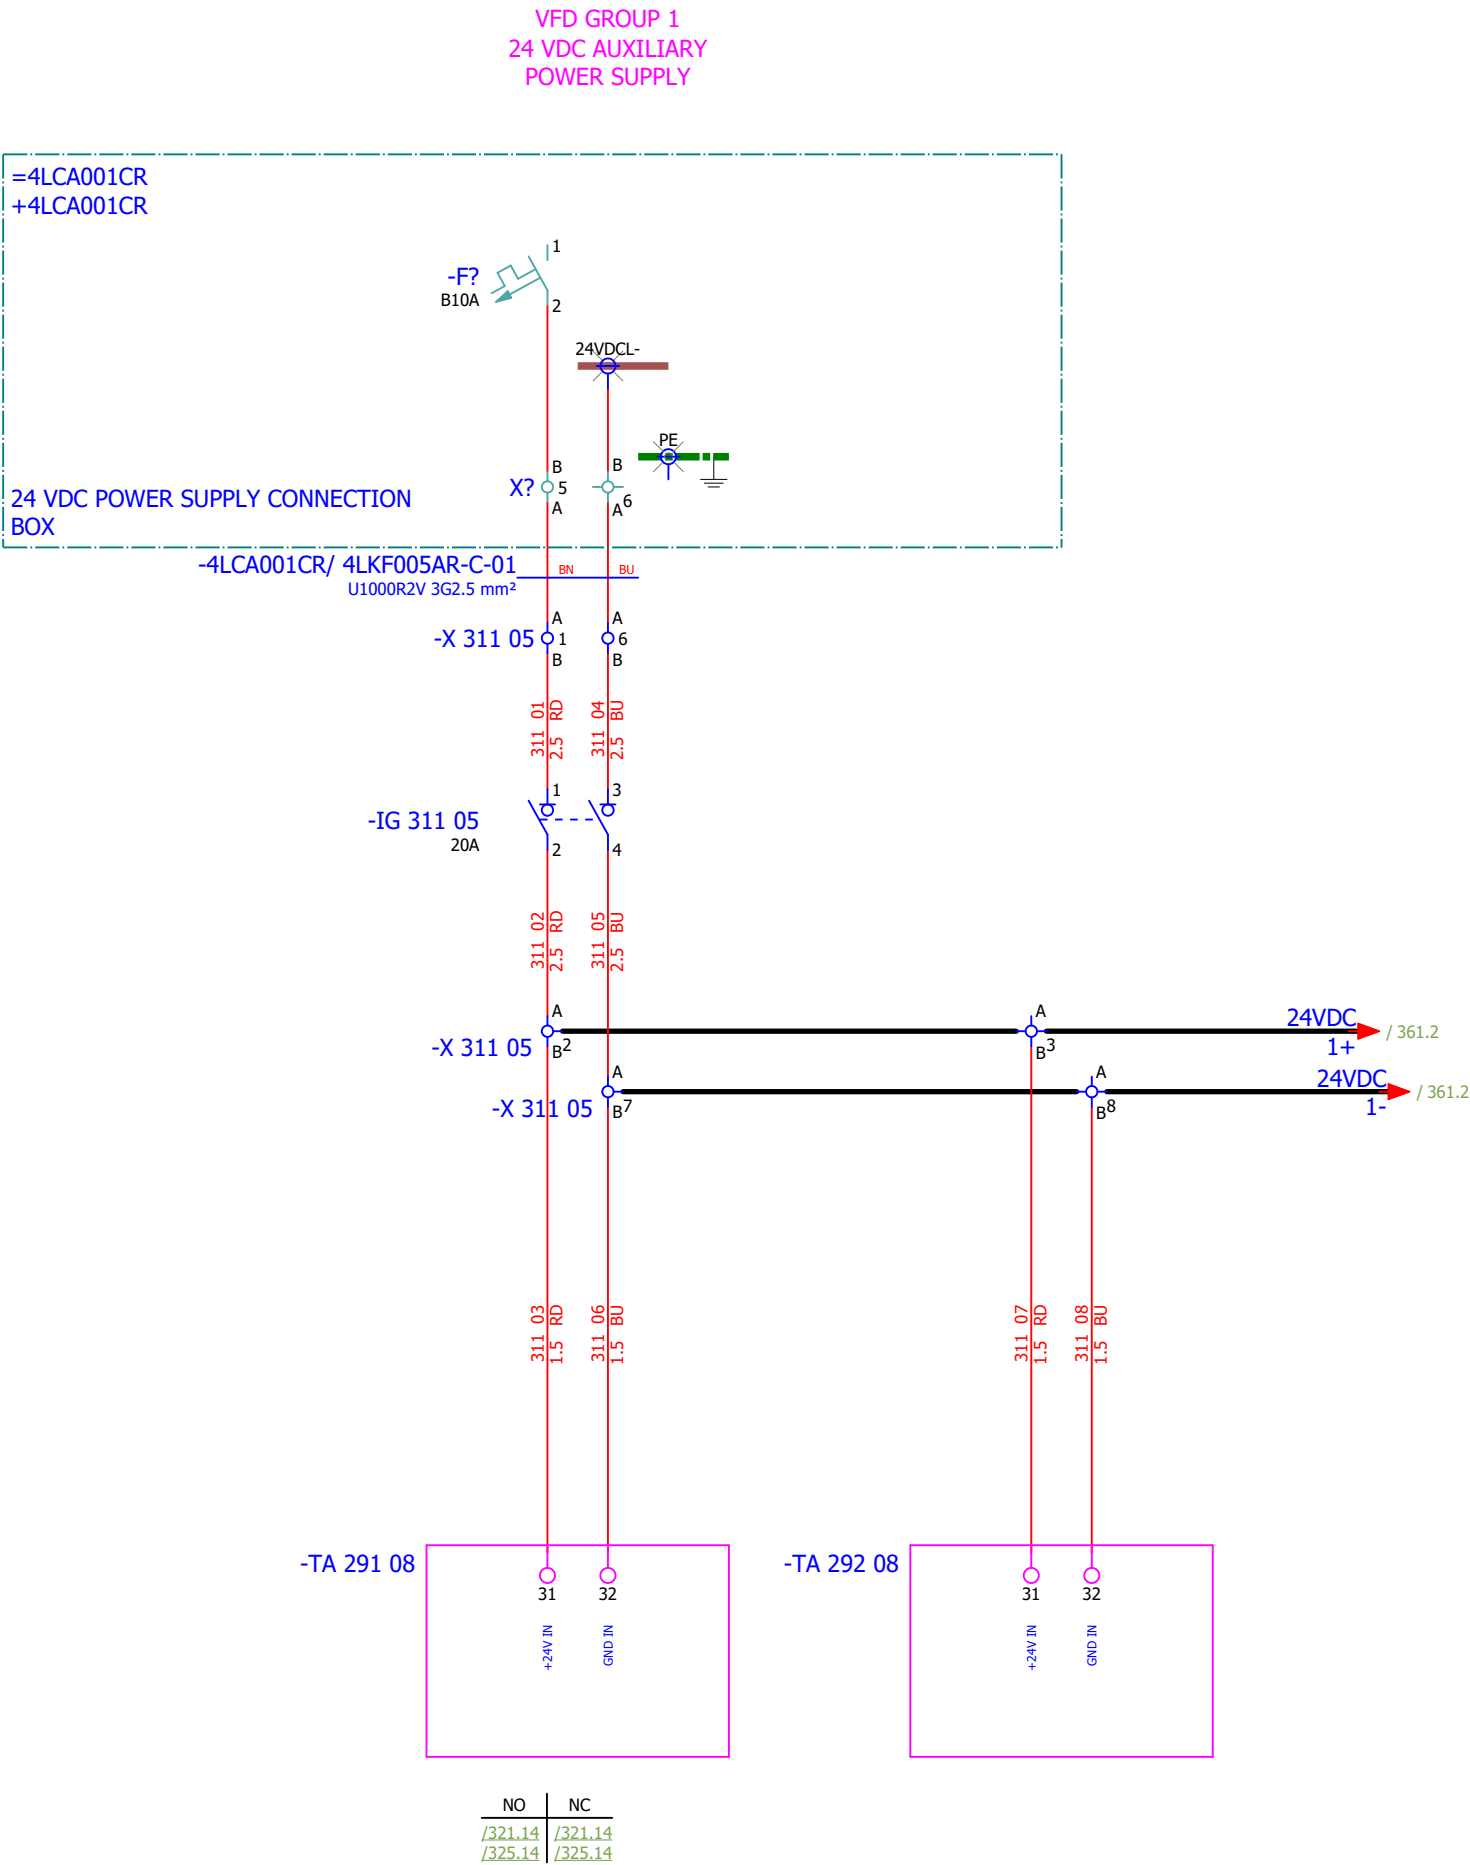


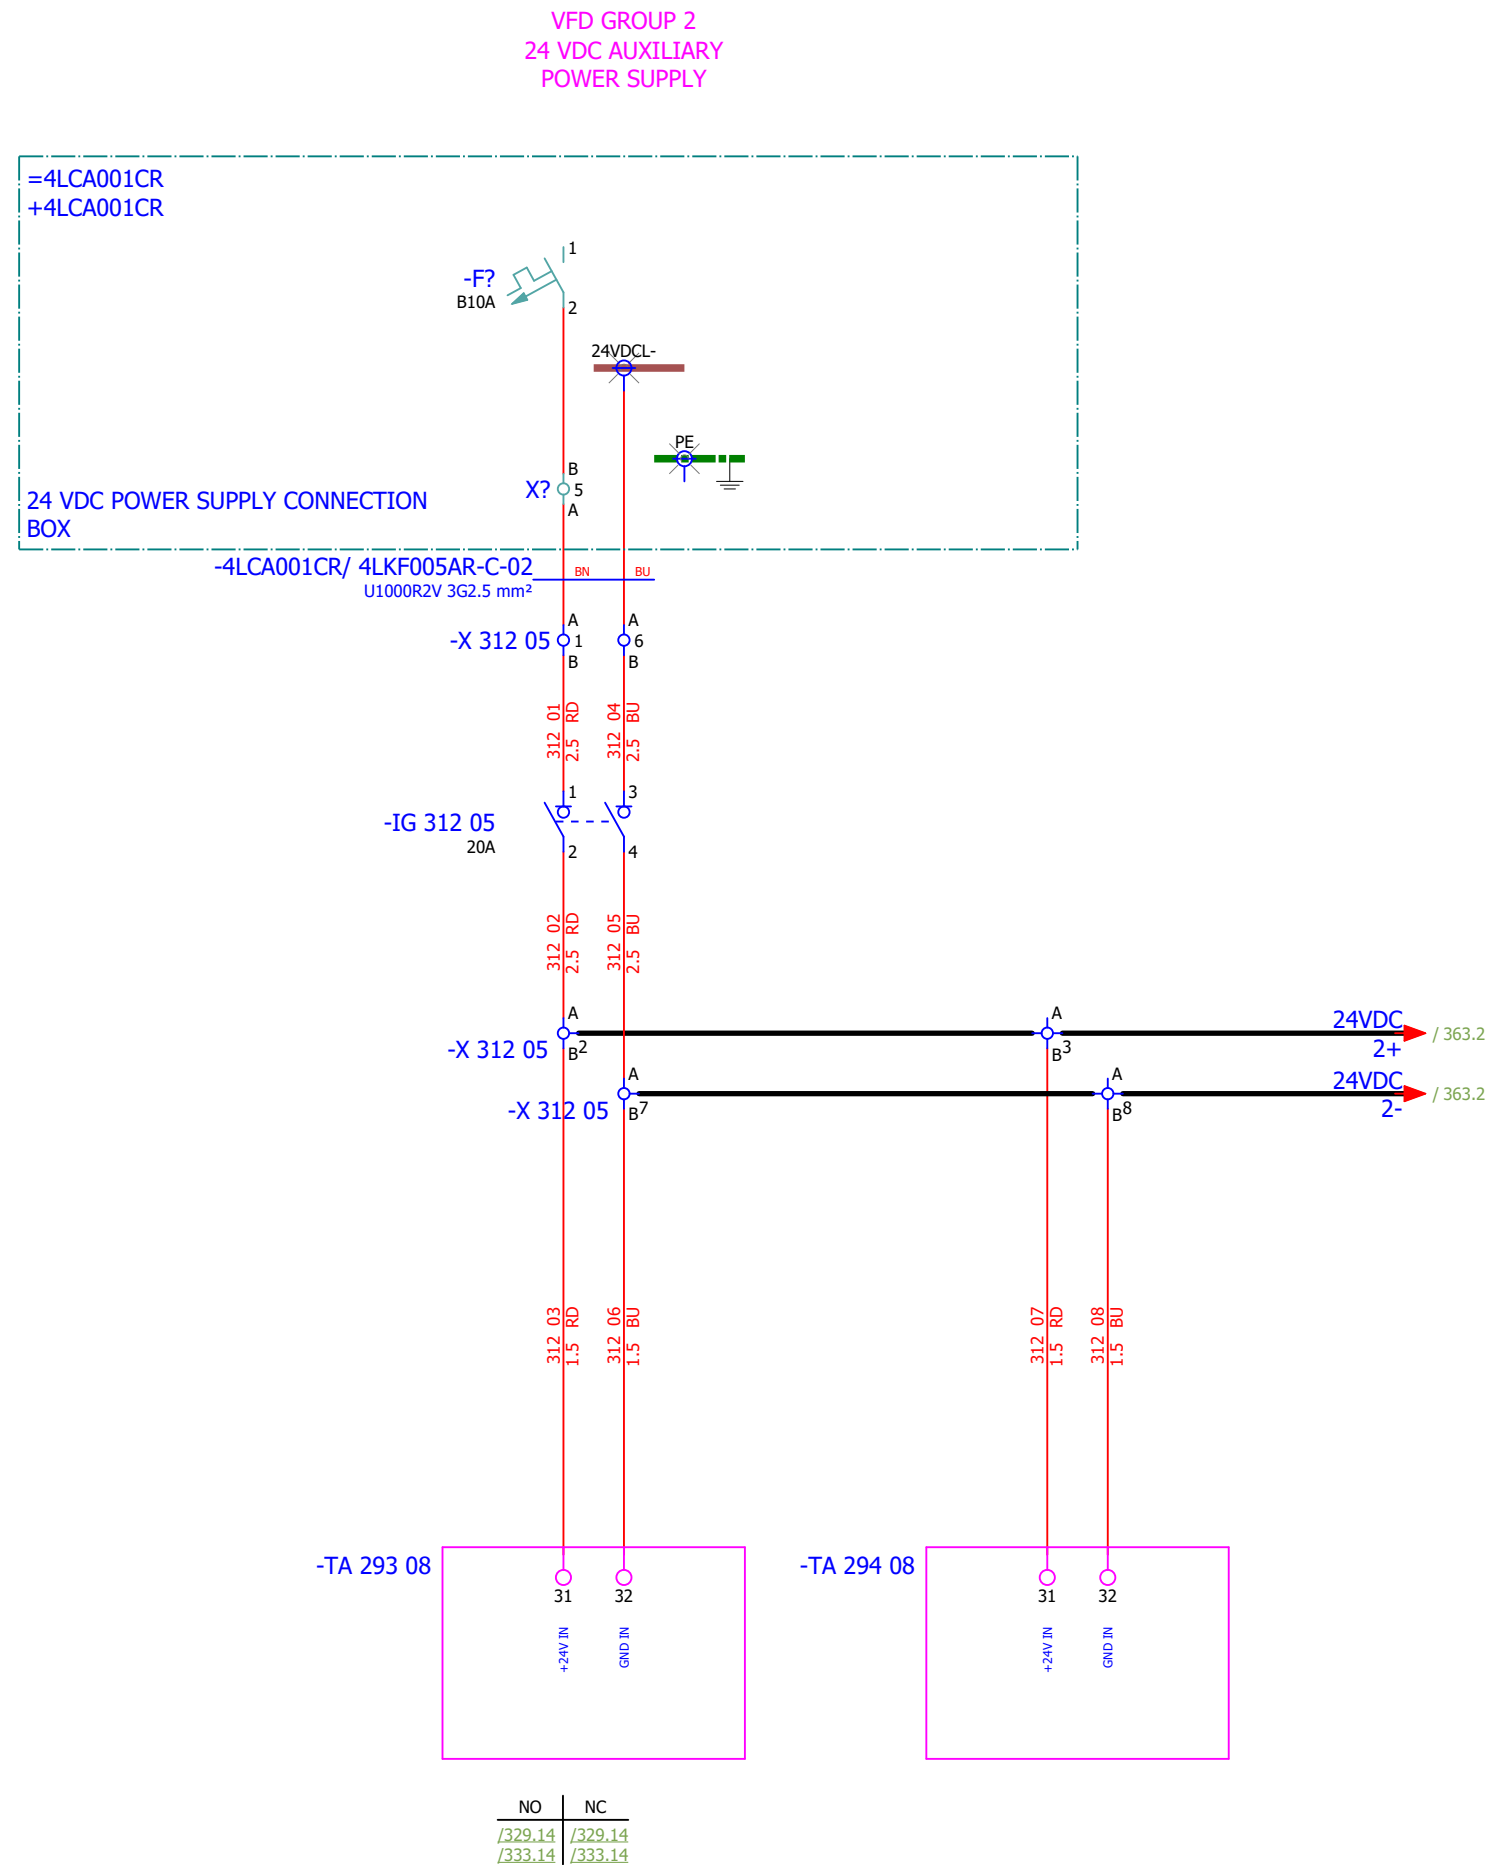


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6	Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E		
Drawn:	Jere Radas															#G	
Approved:	Grga Kolić																
Format:	A3				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	VFD GROUP 2 - 24 VDC AUXILIARY POWER SUPPLY	Drawing designation:			BRC-4-ATEP0-1870-E			=4LKF001AR		Sheet:
														+4LKF005AR		Next:	321


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Jere Radas			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	CONDENSATE PUMP 1 - DIGITAL INPUTS	Drawing designation:	BRC-4-ATEP0-1870-E								#MB
Approved:	Grga Kolić																
Format:	A3																


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Jere Radas																#MB
Approved:	Grga Kolić				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	CONDENSATE PUMP 1 - DIGITAL OUTPUTS		Drawing designation: BRC-4-ATEP0-1870-E				=4LKF001AR		Sheet:	322
Format:	A3								+4LKF005AR					Next:	323		

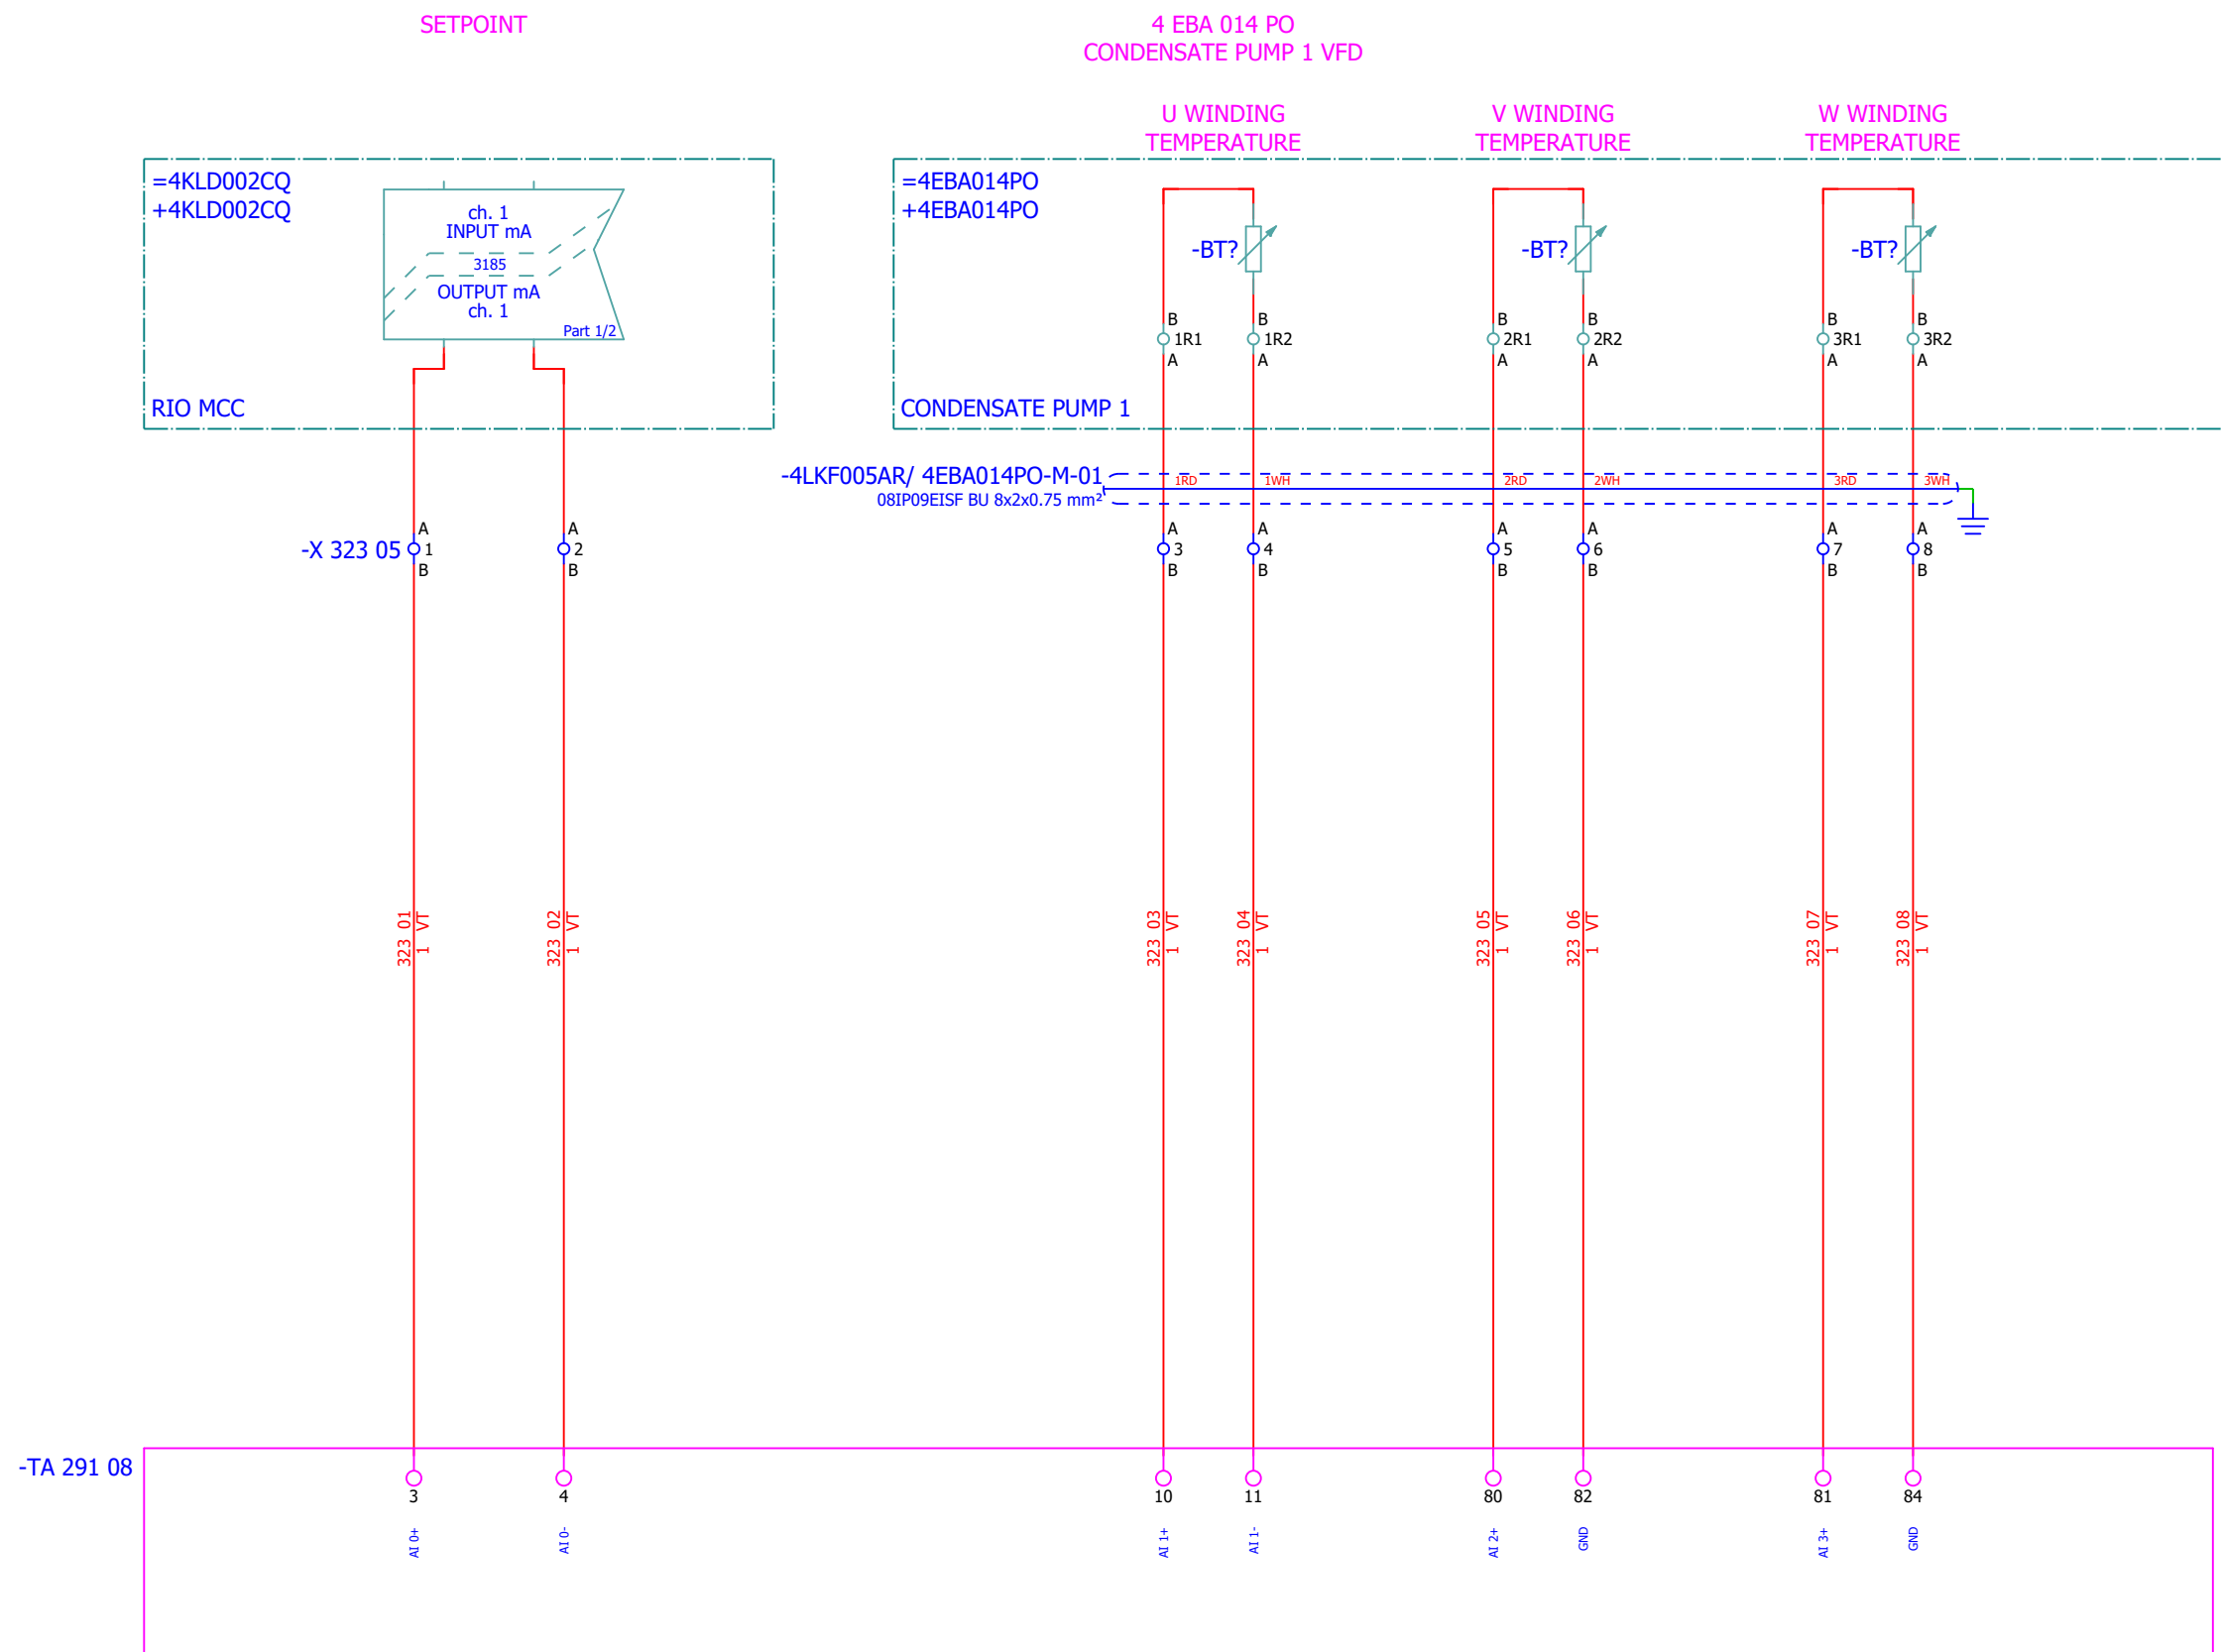

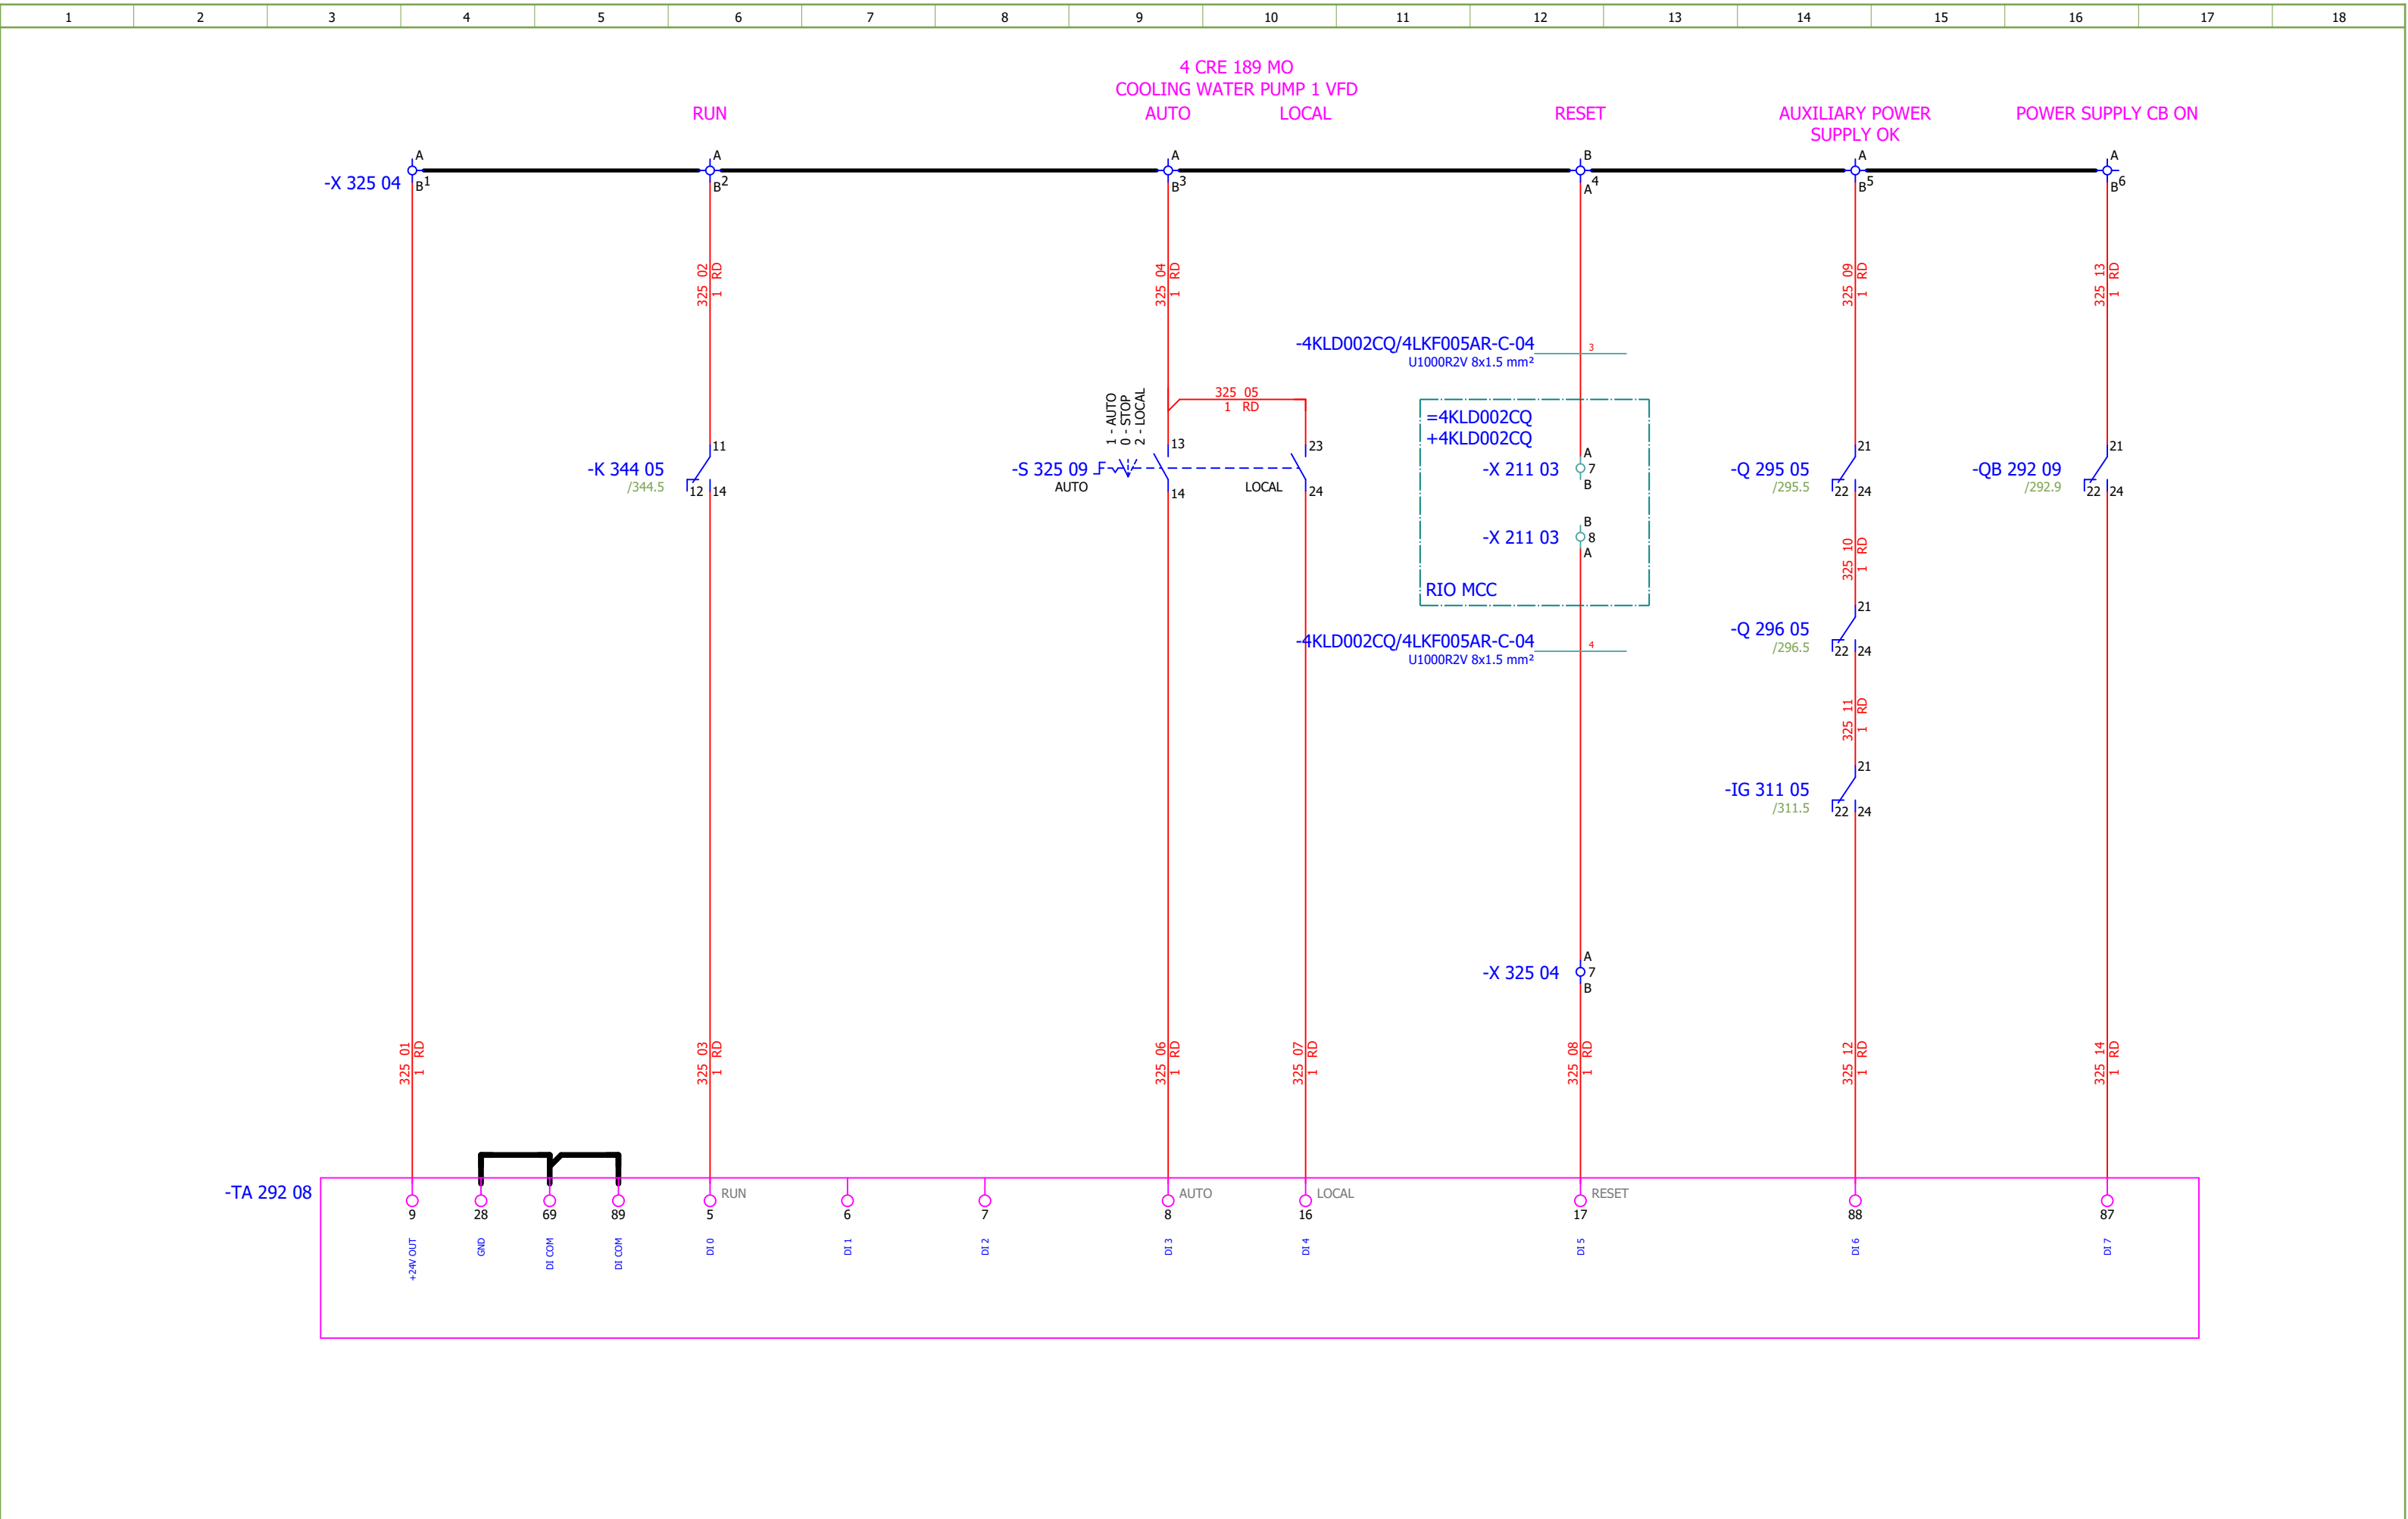


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E			
Drawn:	Jere Radas				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	COOLING WATER PUMP 1 - DIGITAL OUTPUTS	Drawing designation:	BRC-4-ATEP0-1870-E							#MB		
Approved:	Grga Kolić																		
Format:	A3																		
																	=4LKF001AR	Sheet:	326
																	+4LKF005AR	Next:	327

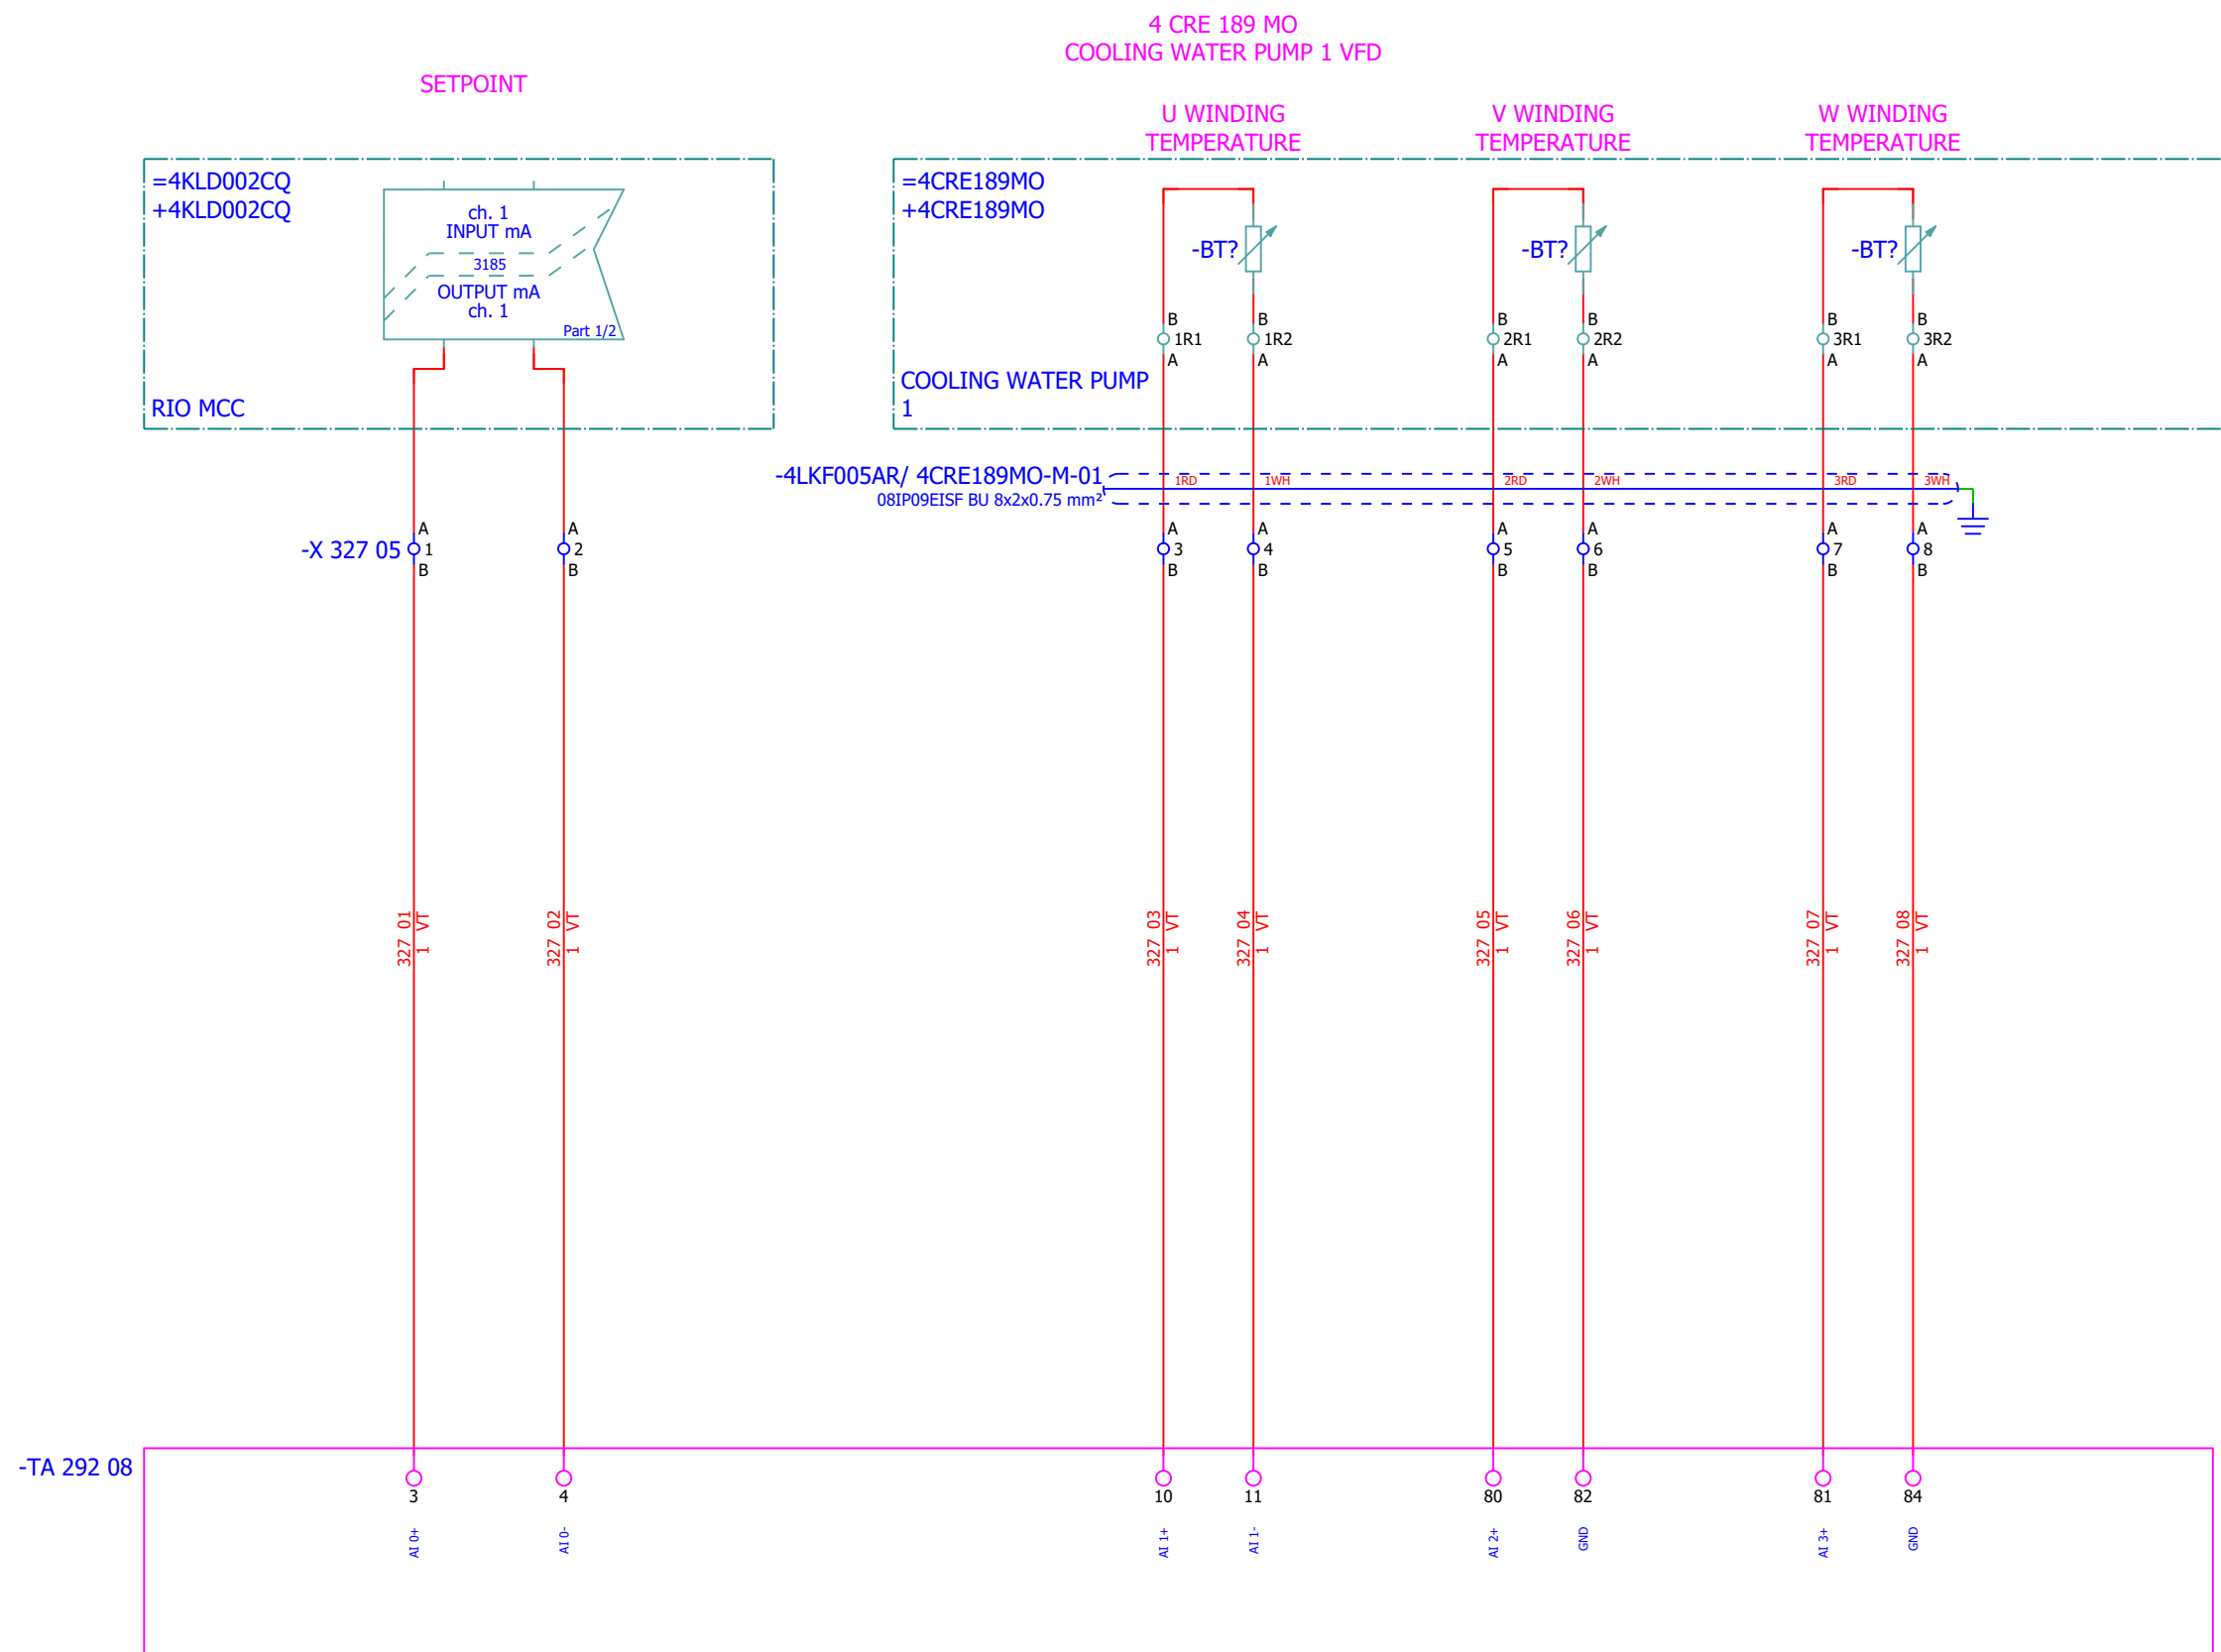


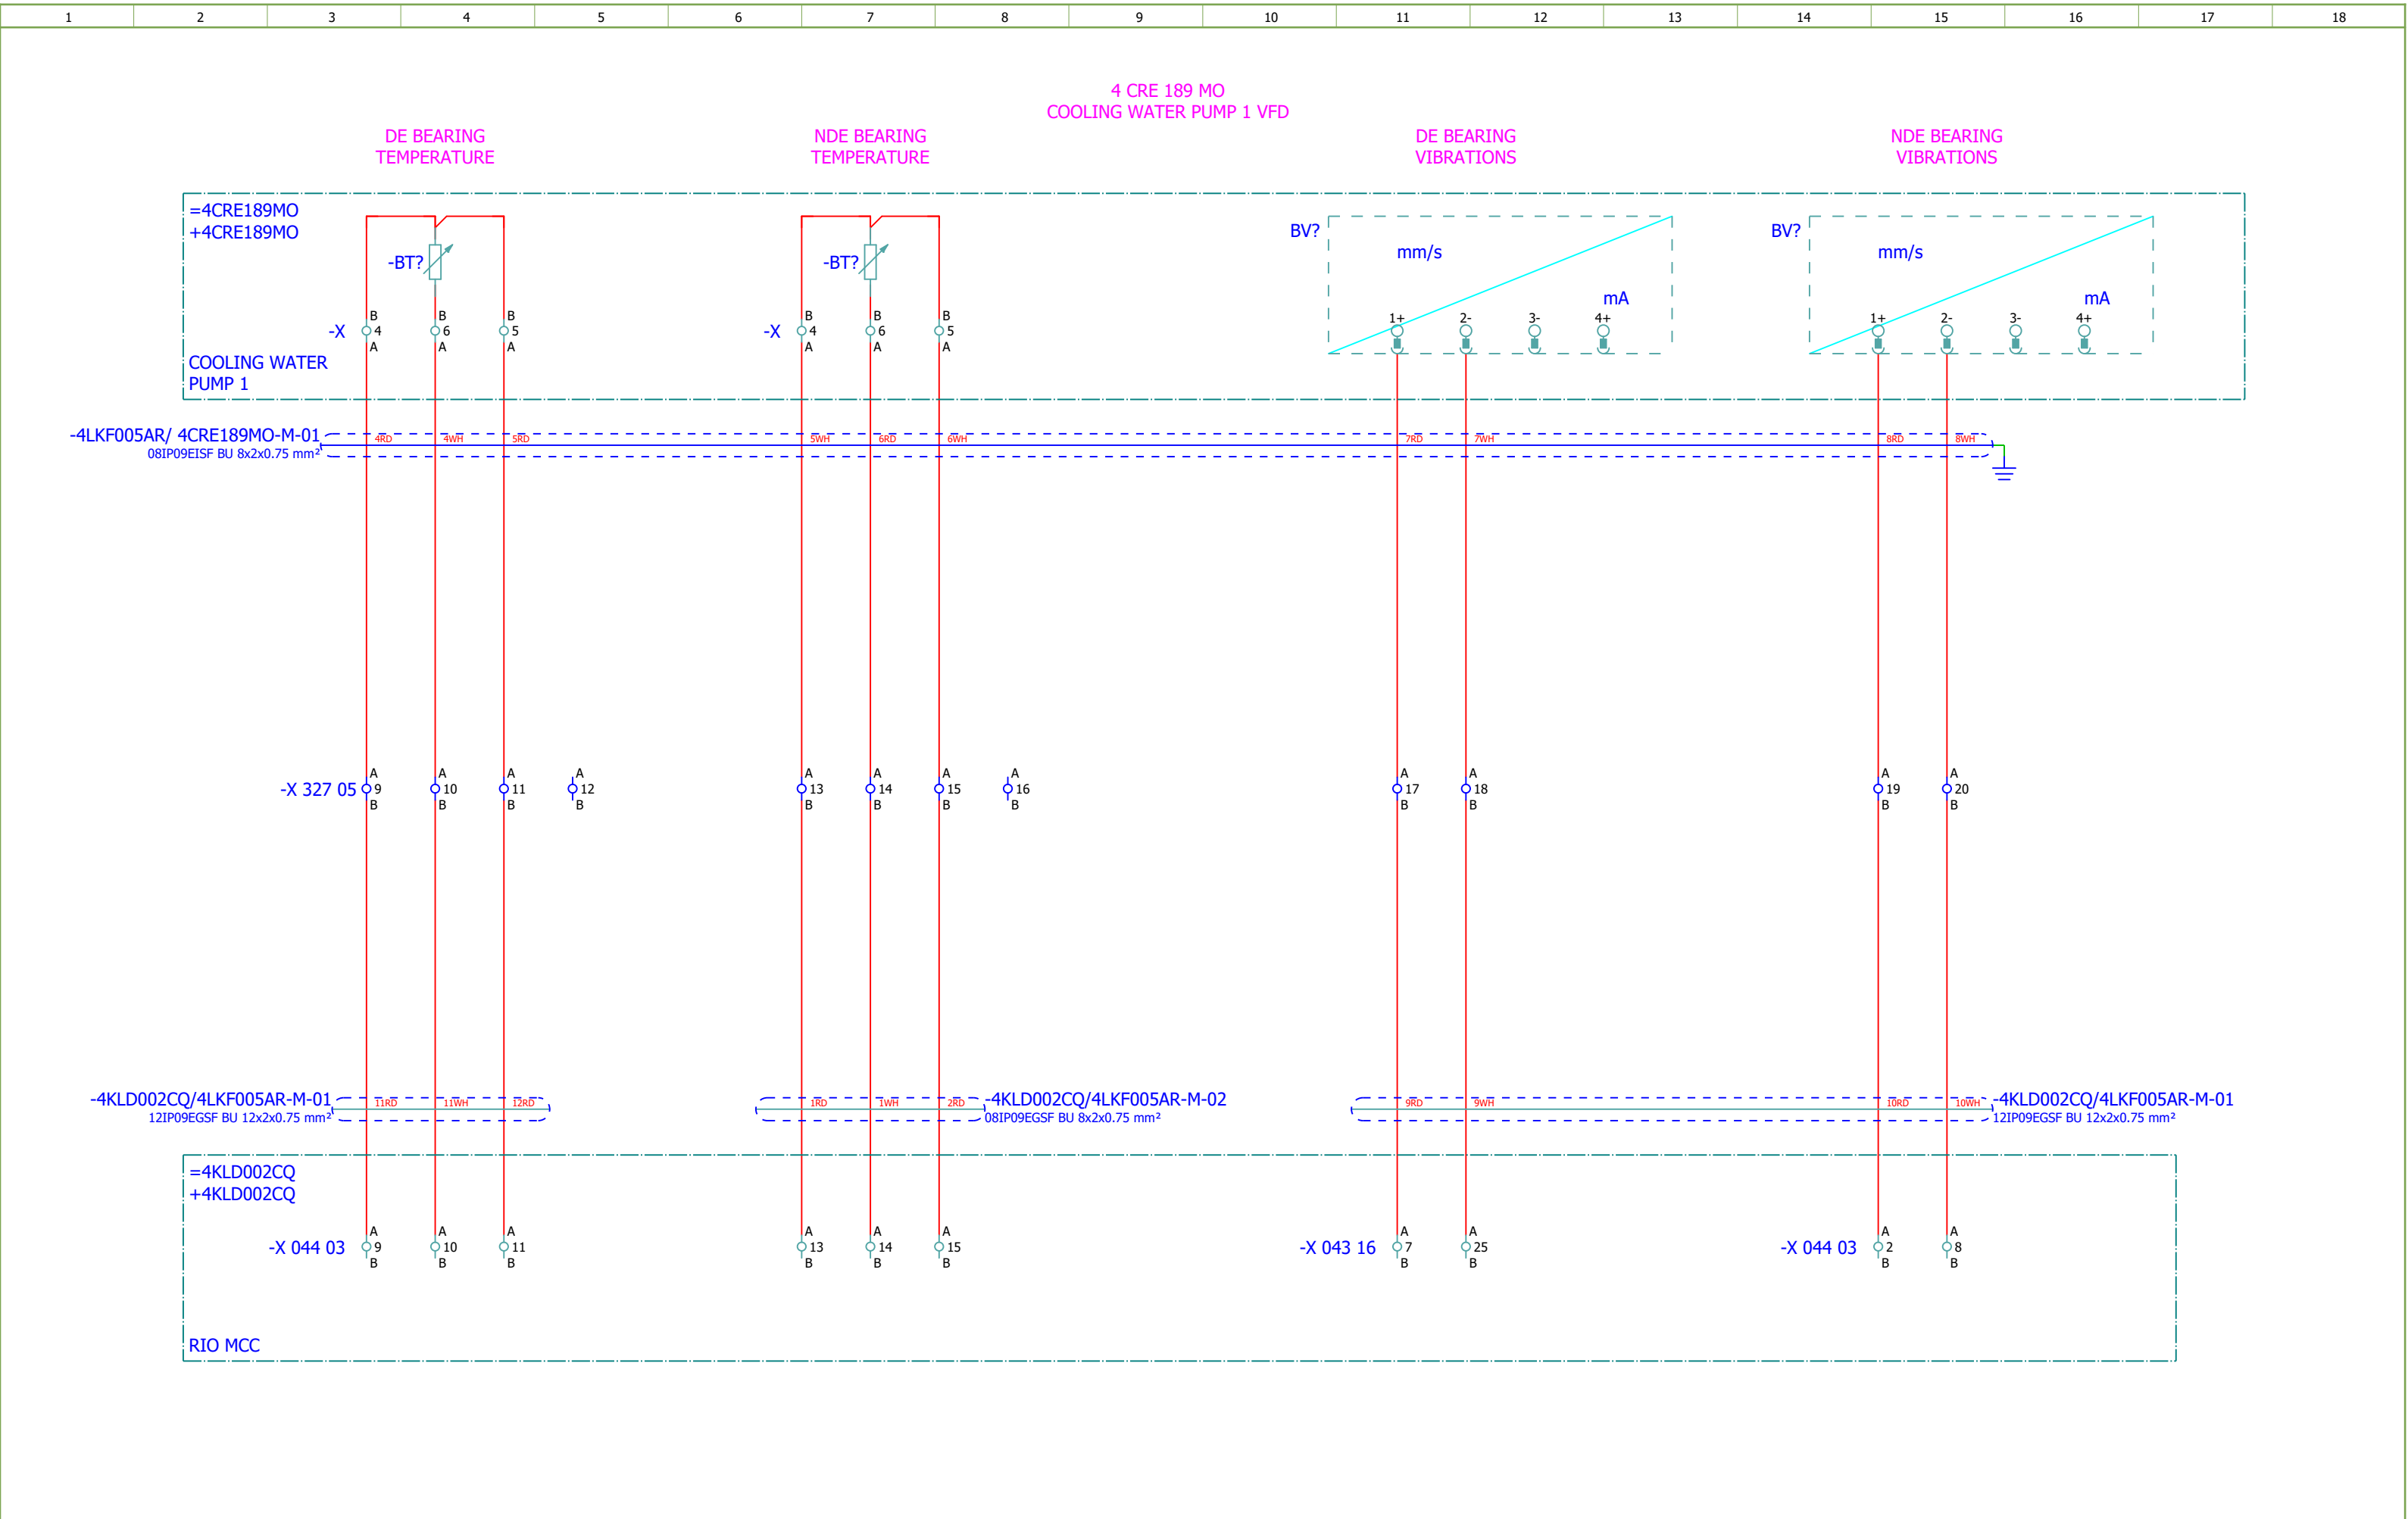


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Jere Radas			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	CONDENSATE PUMP 2 - DIGITAL OUTPUTS	Drawing designation: BRC-4-ATEP0-1870-E						=4LKF001AR	Sheet:	330	
Approved:	Grga Kolić													+4LKF005AR	Next:	331	
Format:	A3																

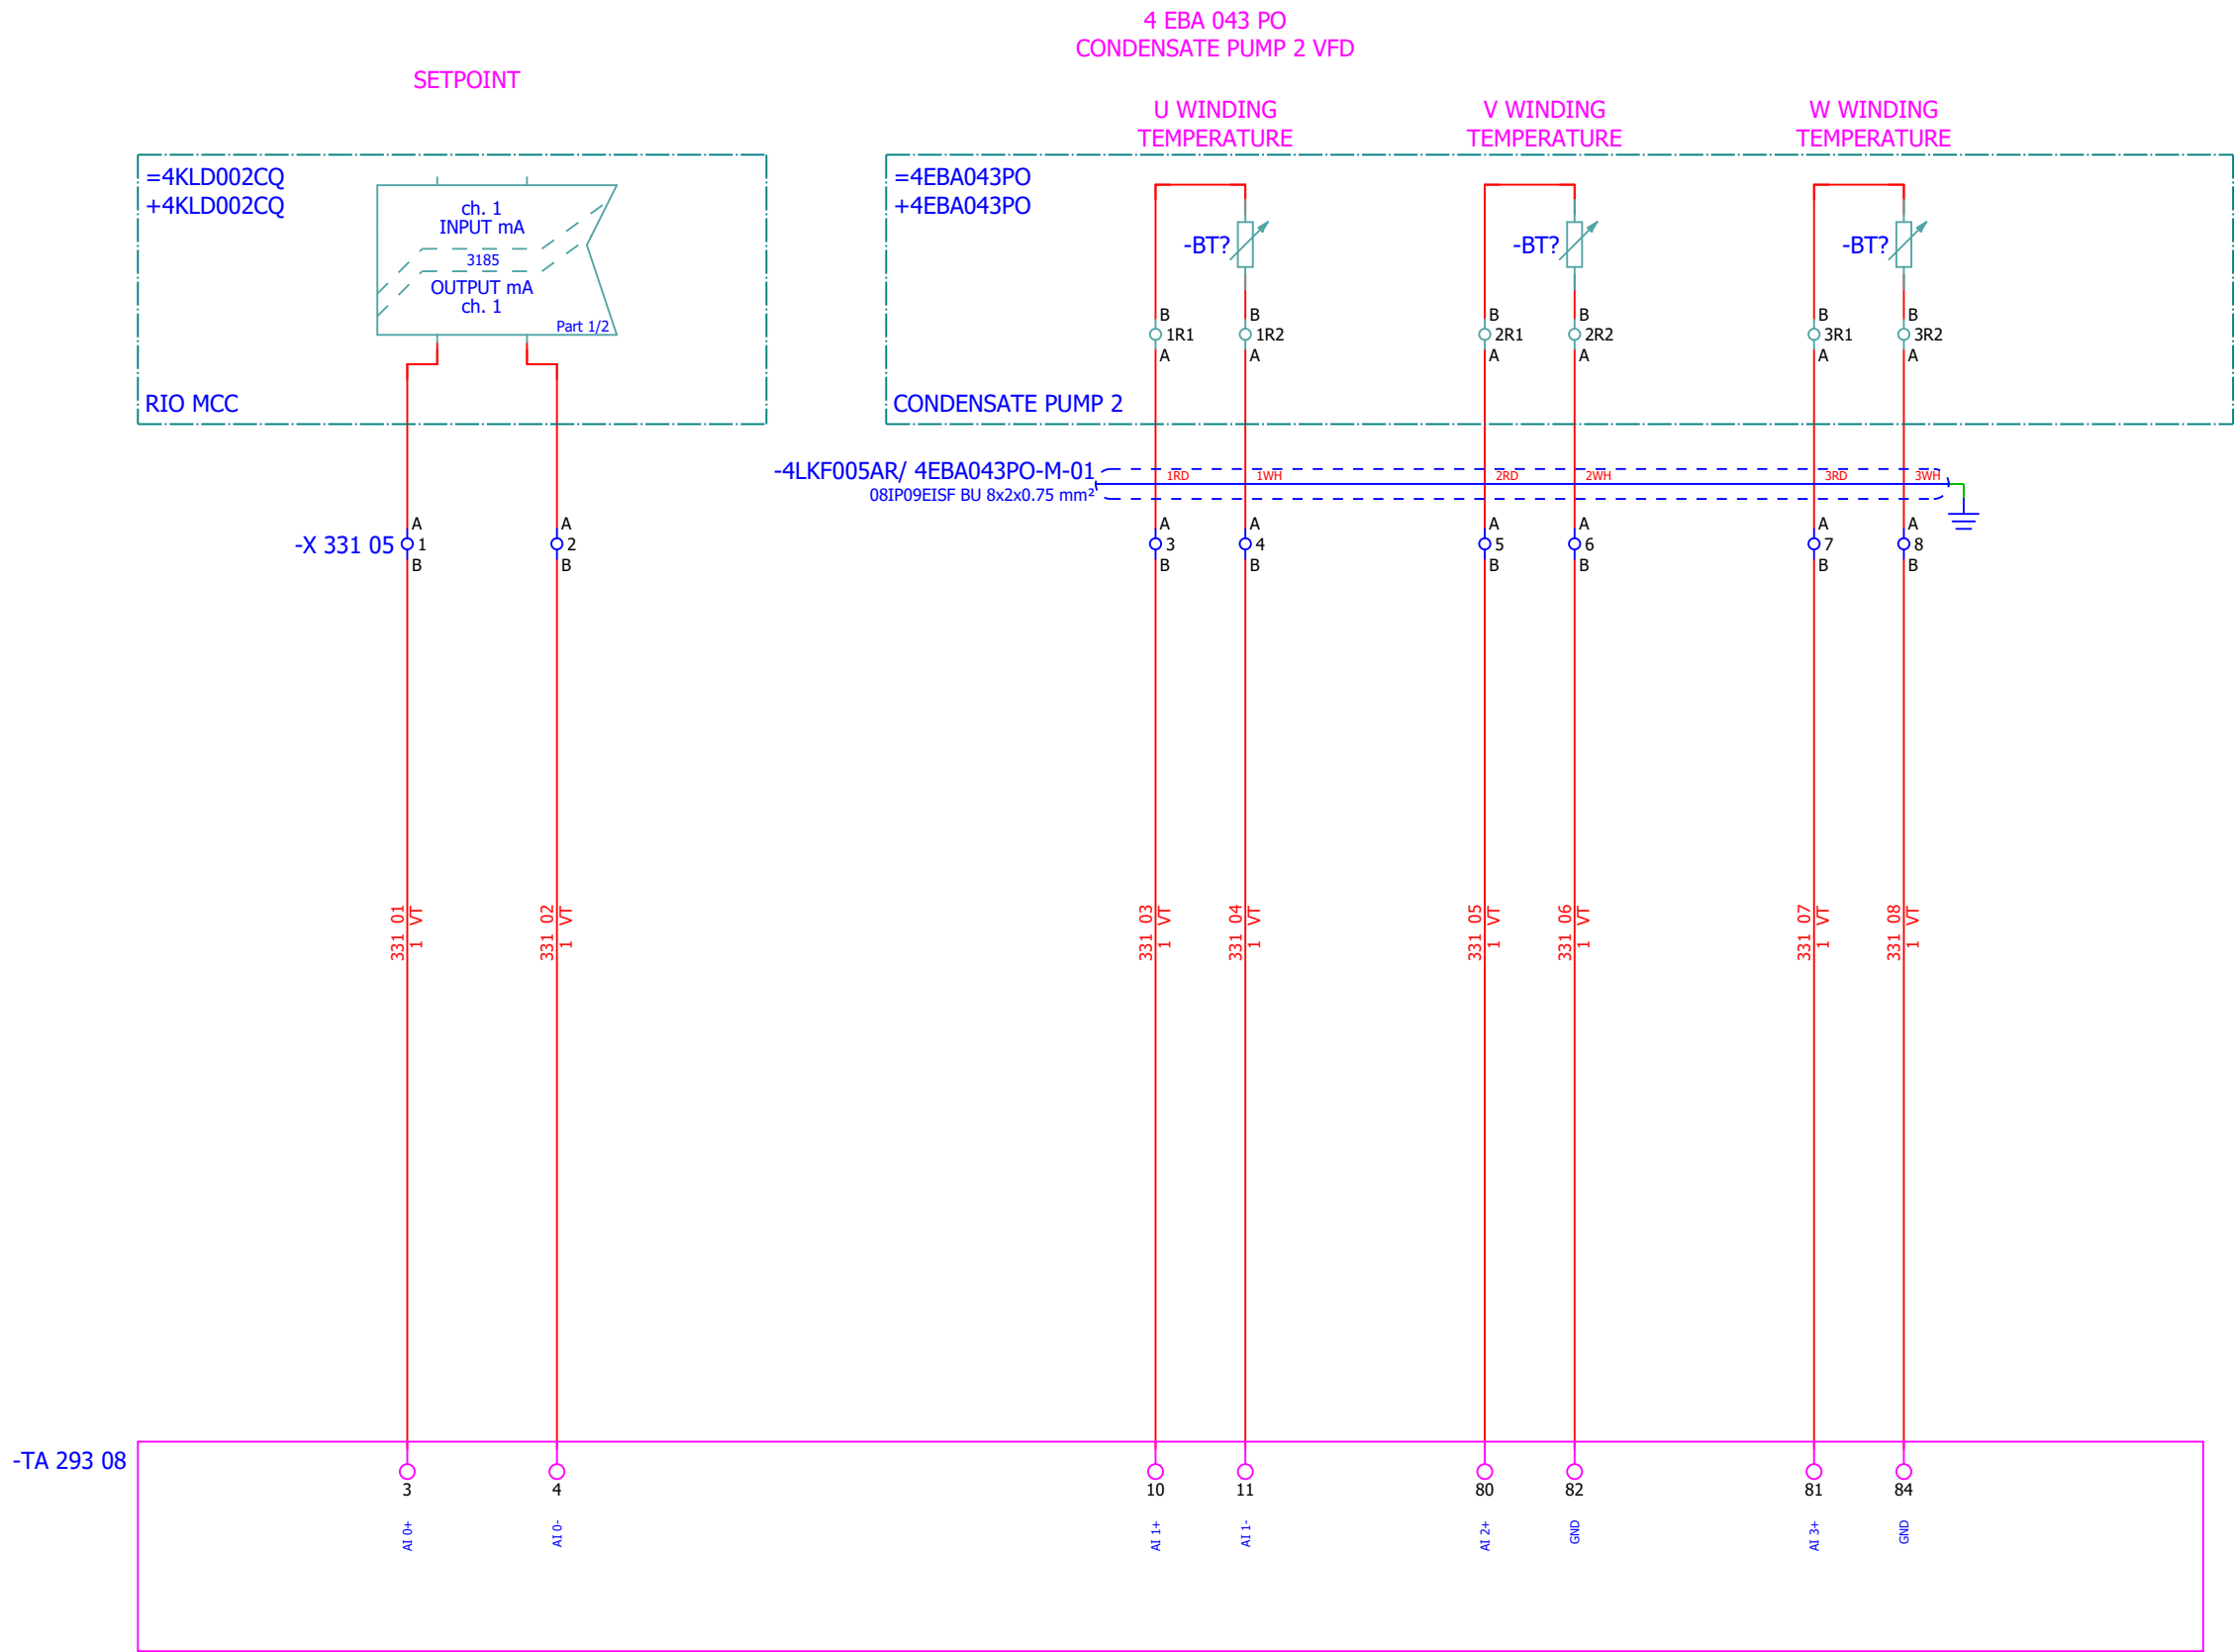


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	#MB			
Drawn:	Jere Radas			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	CONDENSATE PUMP 2 - ANALOG INPUTS		Drawing designation:			BRC-4-ATEP0-1870-E			=4LKF001AR		Sheet:	332		
Approved:	Grga Kolić																			
Format:	A3																			
																	+4LKF005AR		Next:	333

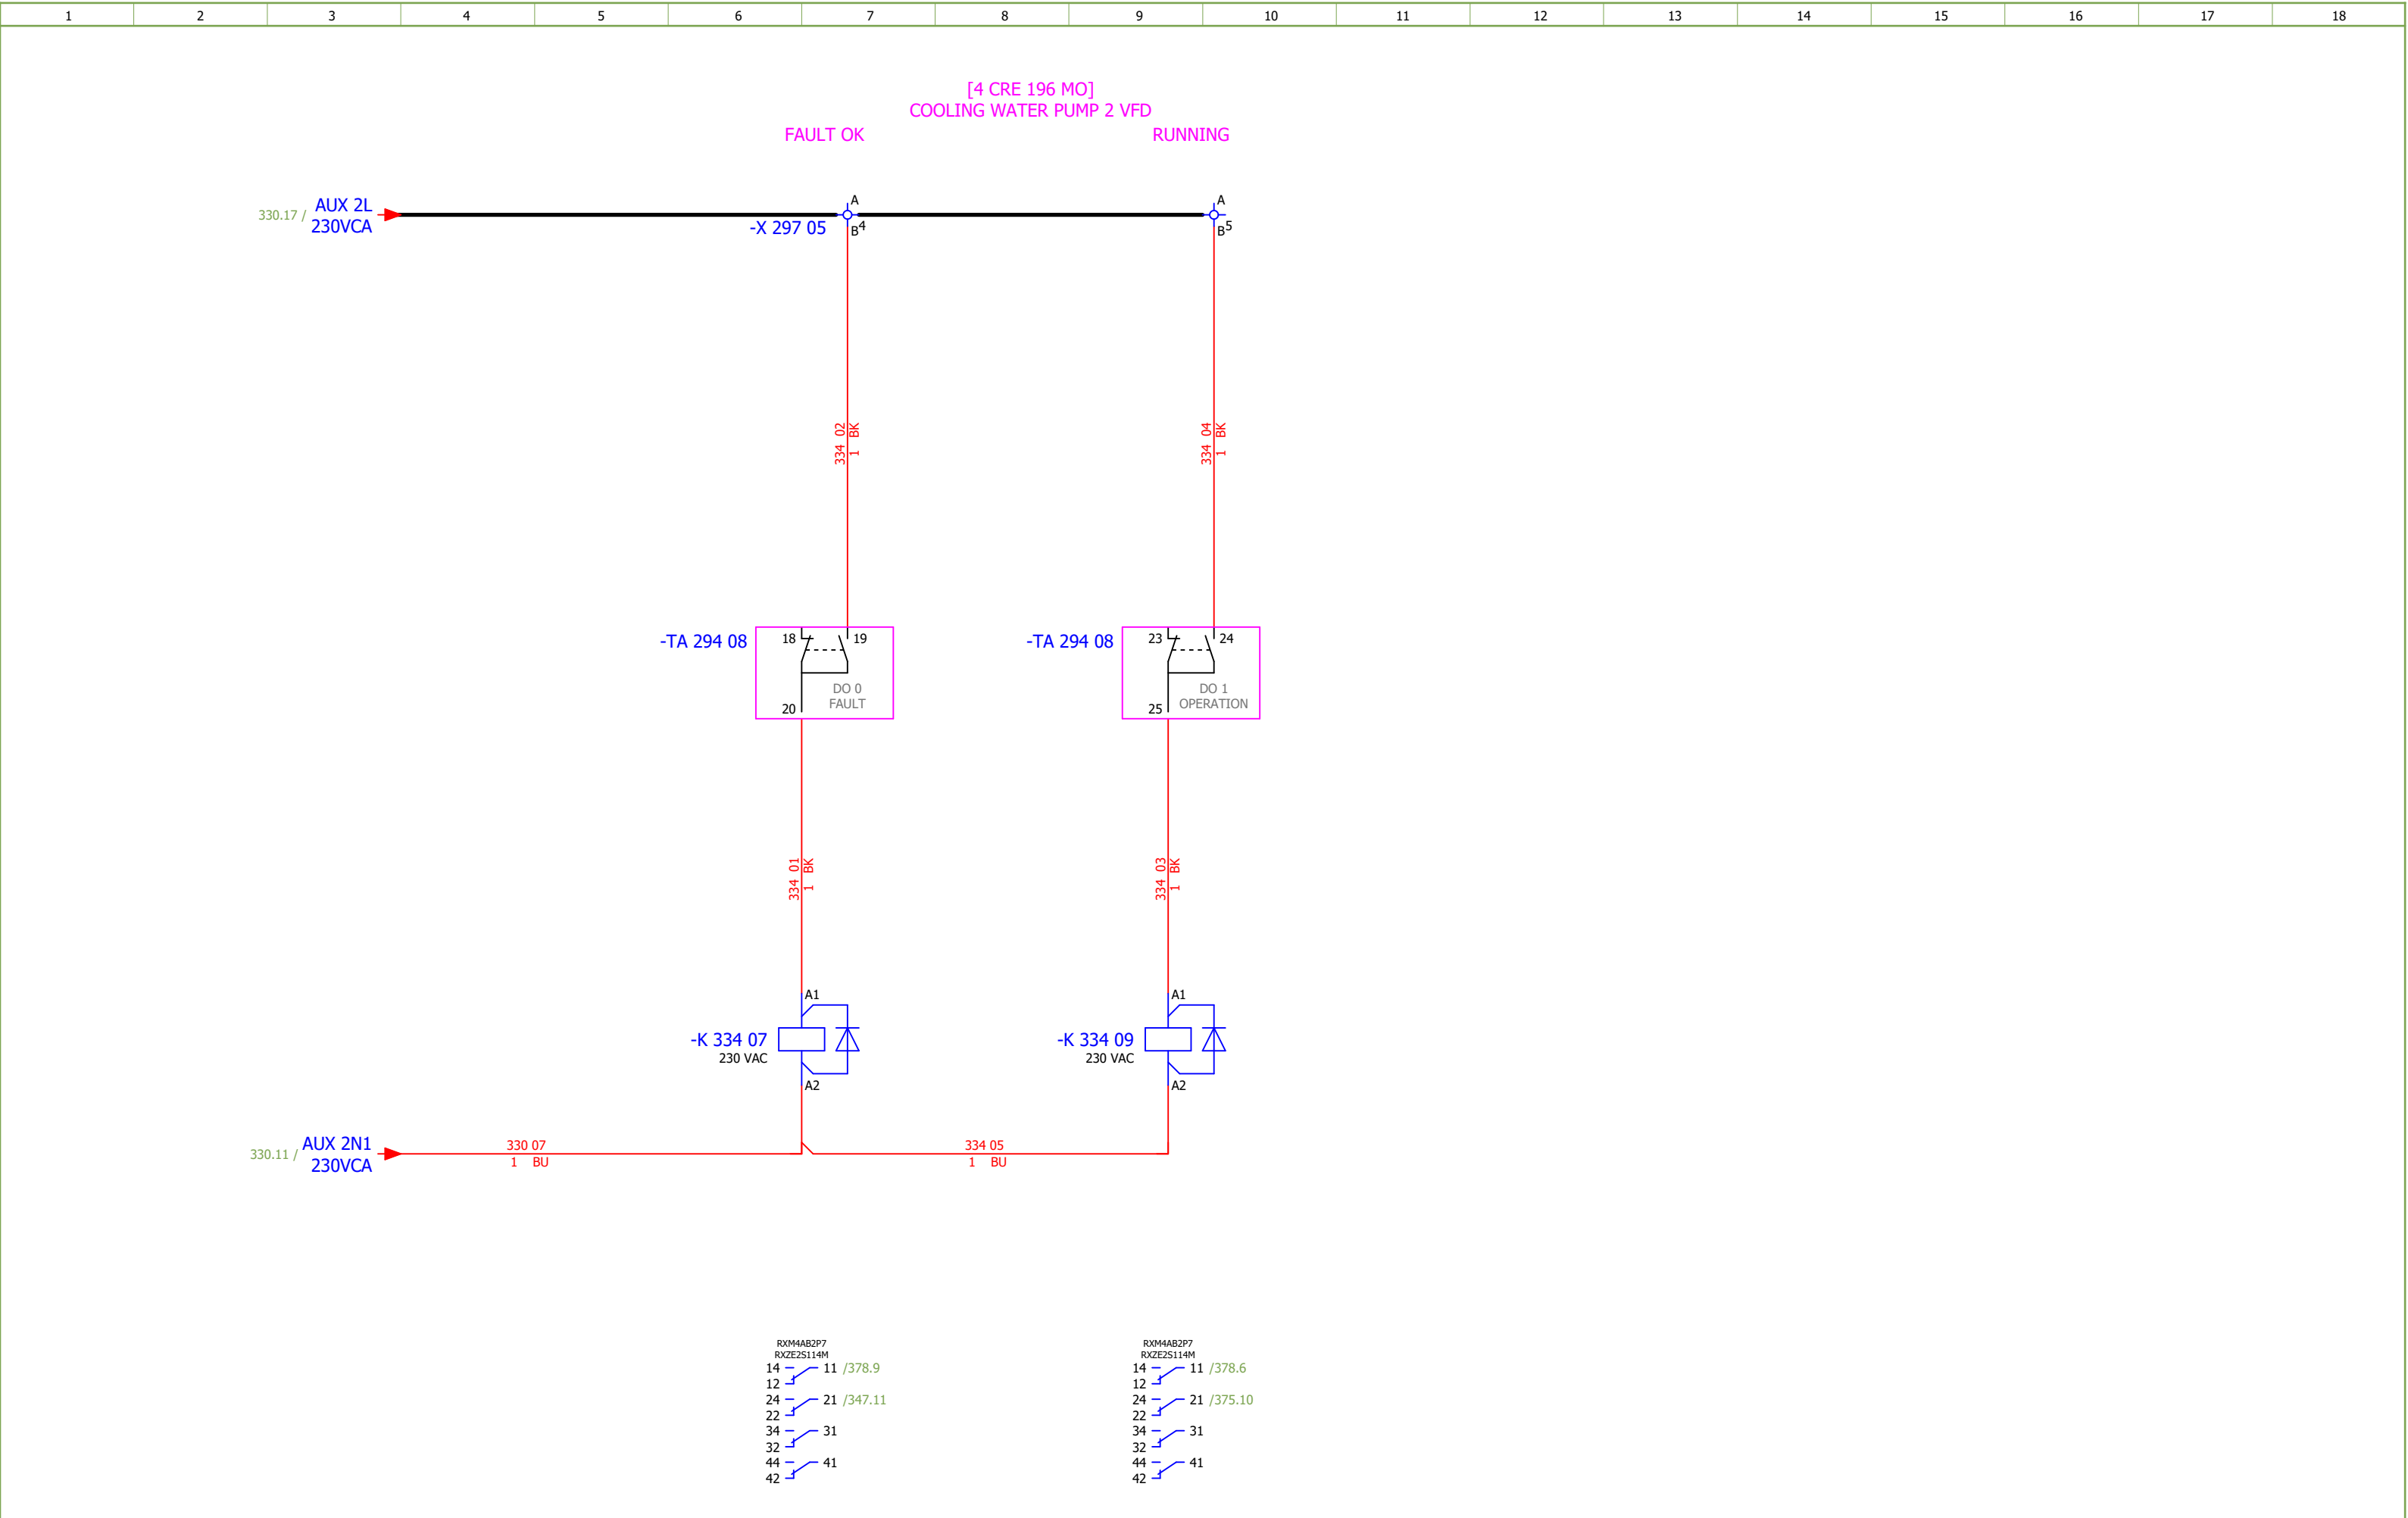


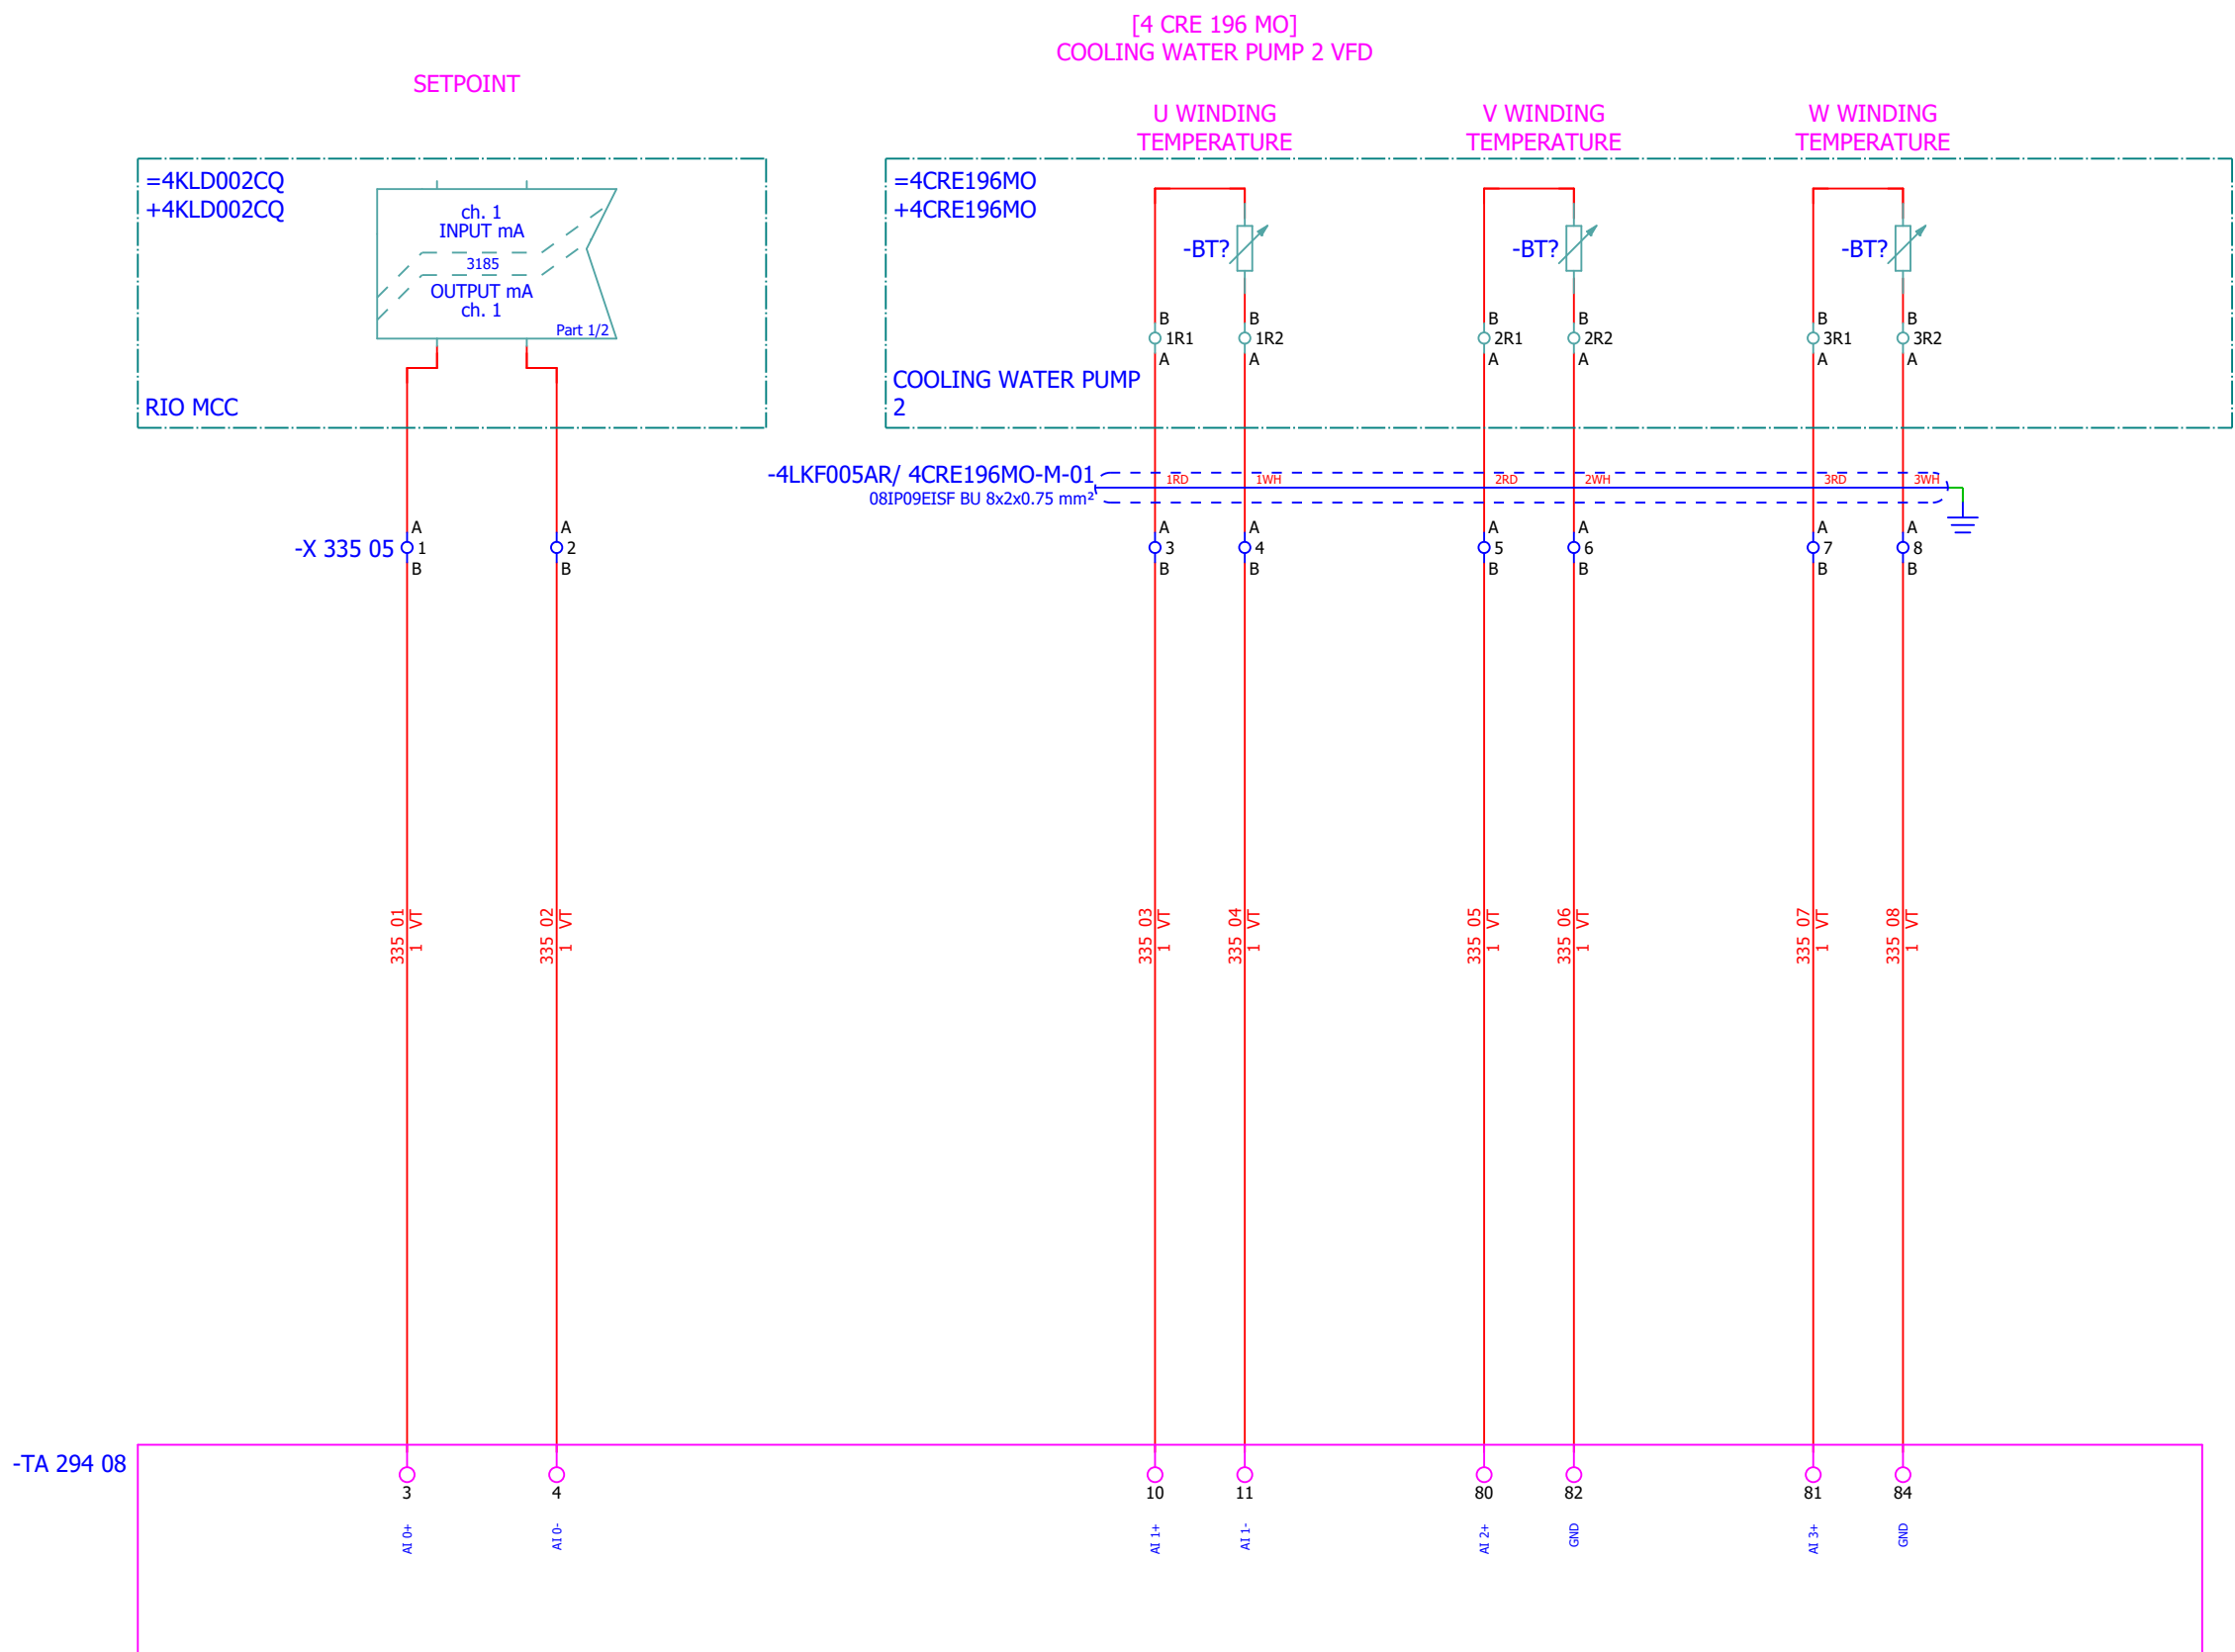


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Jere Radas																#MB
Approved:	Grga Kolić				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	VFD GROUP 1 - ANALOG OUTPUTS		Drawing designation: BRC-4-ATEP0-1870-E				=4LKF001AR		Sheet:	337
Format:	A3													+4LKF005AR		Next:	338

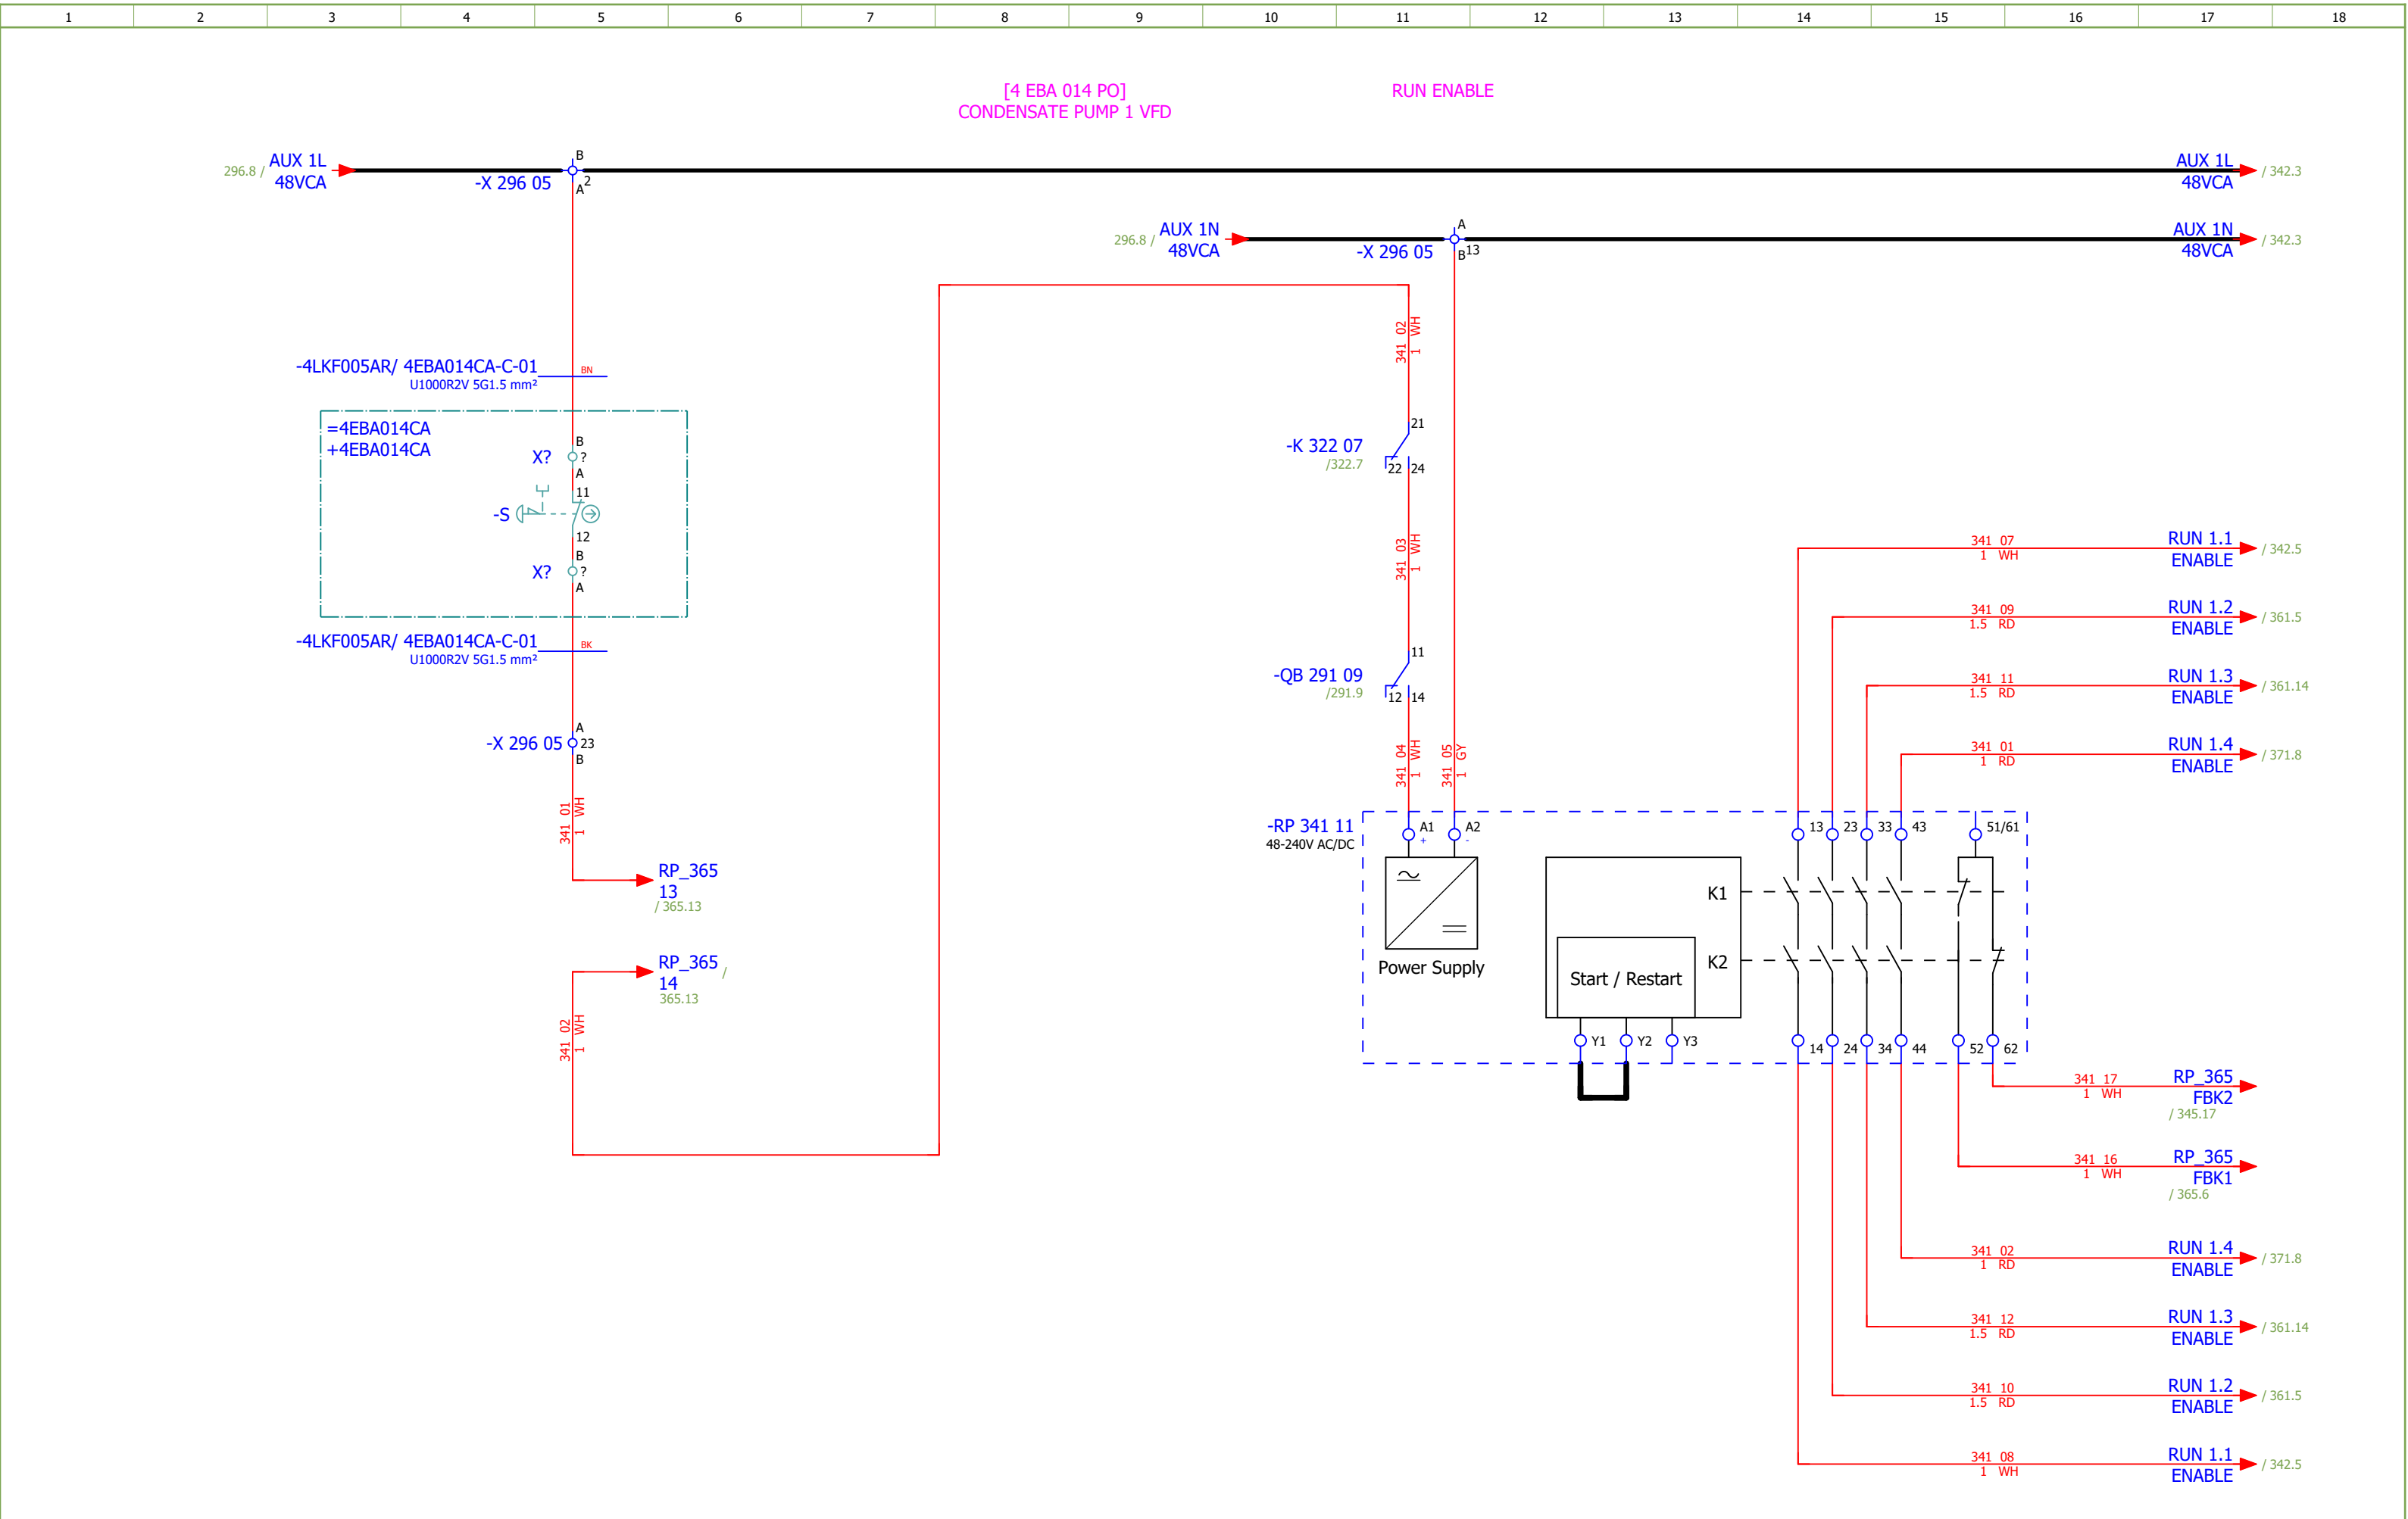


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E		
Drawn:	Jere Radas			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	CONDENSATE PUMP 1 - CONTROL		Drawing designation:				BRC-4-ATEP0-1870-E		=4LKF001AR	Sheet:	341	
Approved:	Grga Kolić															+4LKF005AR	Next:	342
Format:	A3																	

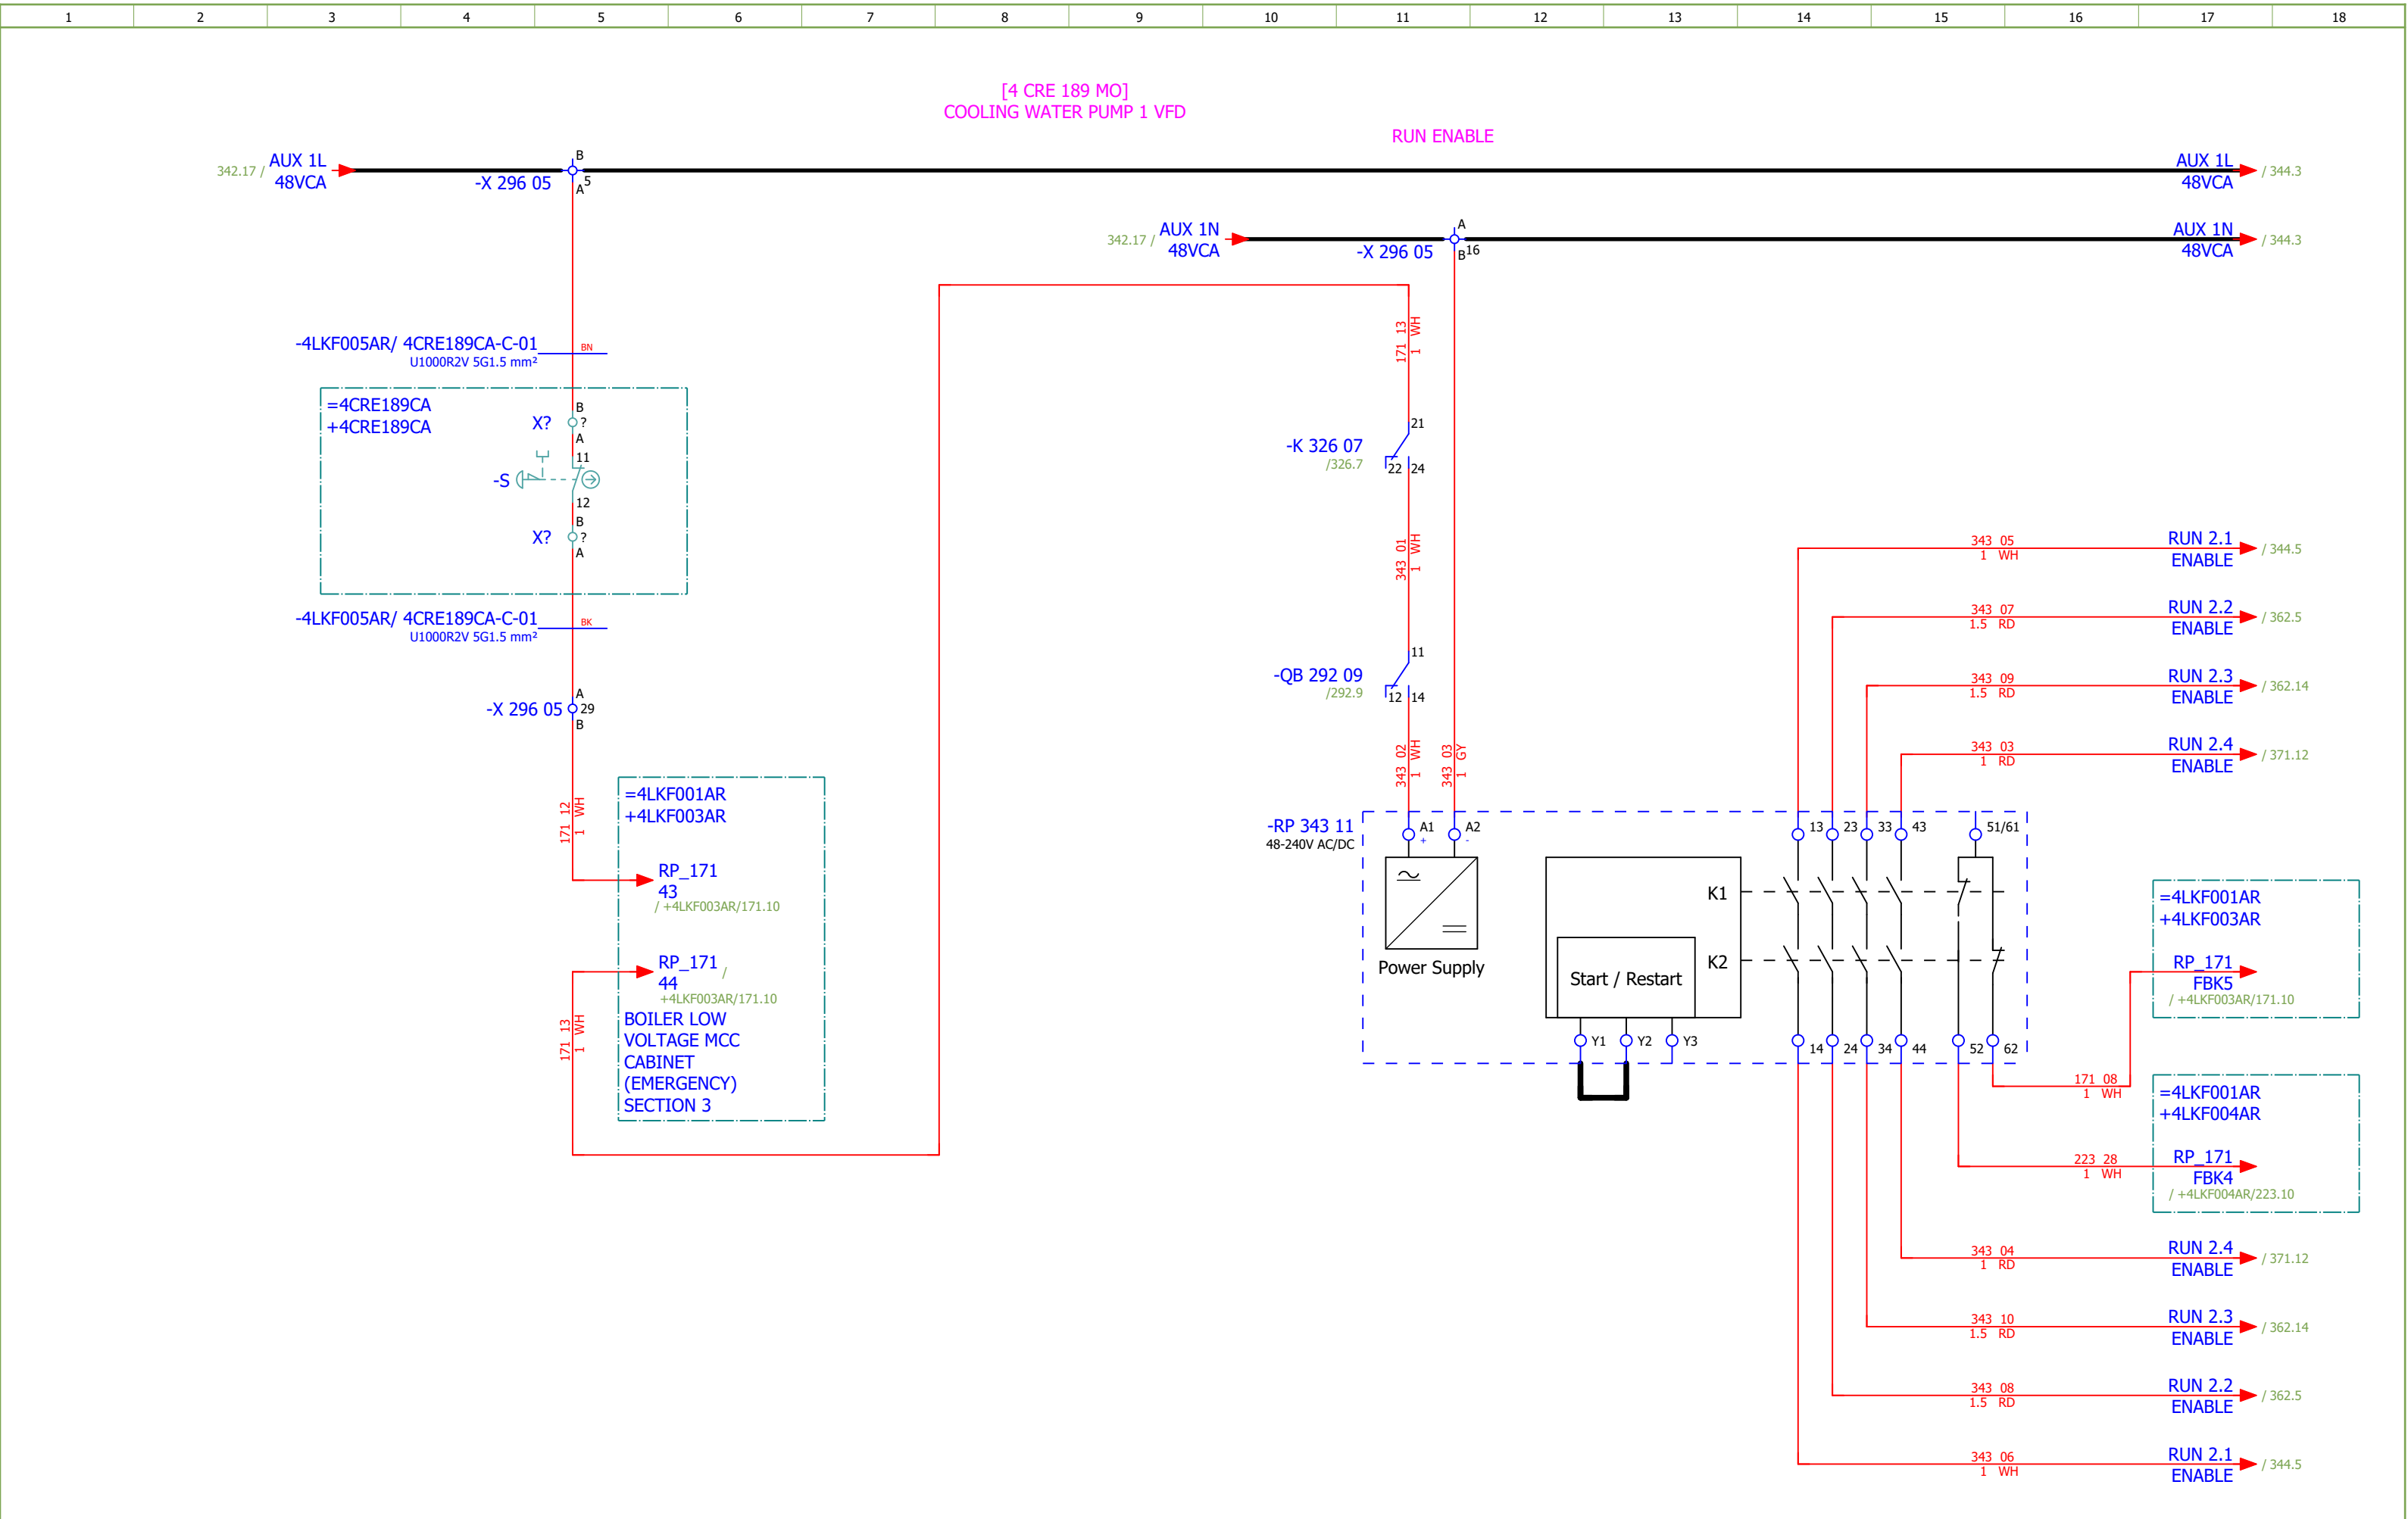


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E		
Drawn:	Jere Radas																#MC	
Approved:	Grga Kolić																	
Format:	A3				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	COOLING WATER PUMP 1 - CONTROL		Drawing designation: BRC-4-ATEP0-1870-E						=4LKF001AR	Sheet:	343
																+4LKF005AR	Next:	344

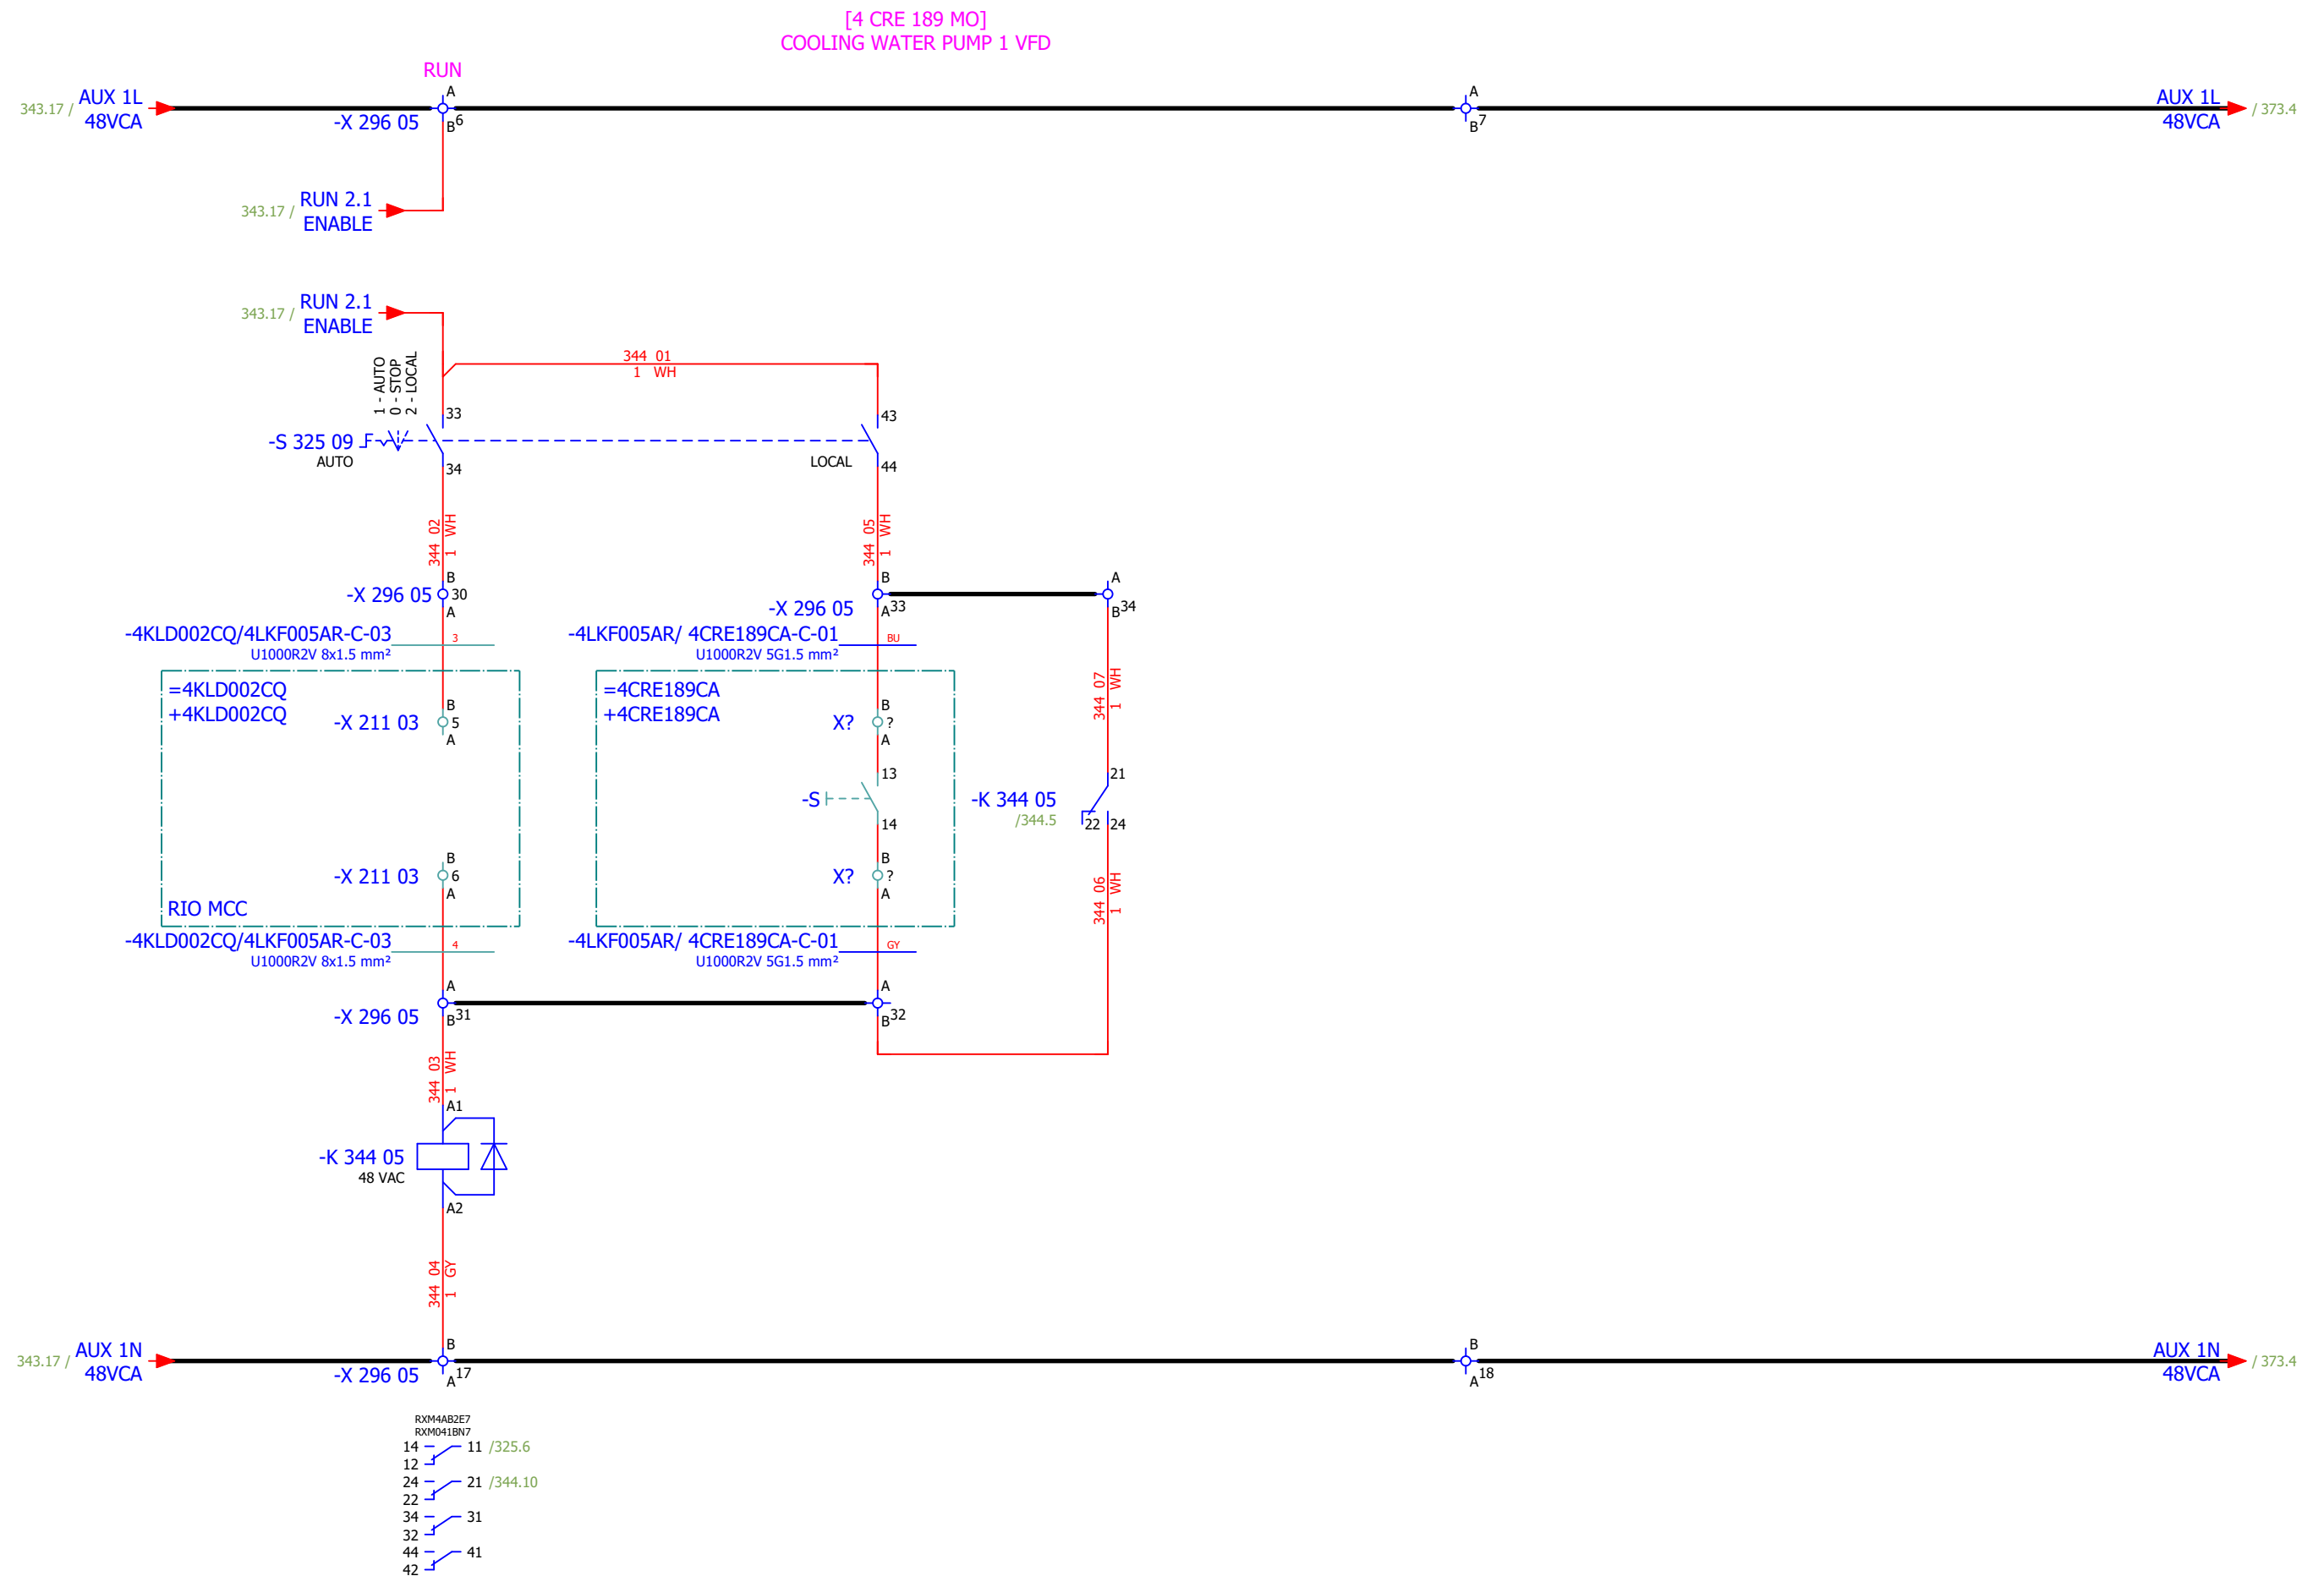


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6	Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Jere Radas															#MC
Approved:	Grga Kolić															
Format:	A3				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	COOLING WATER PUMP 1 - CONTROL	Drawing designation:			BRC-4-ATEP0-1870-E			=4LKF001AR	Sheet:
														+4LKF005AR	Next:	345

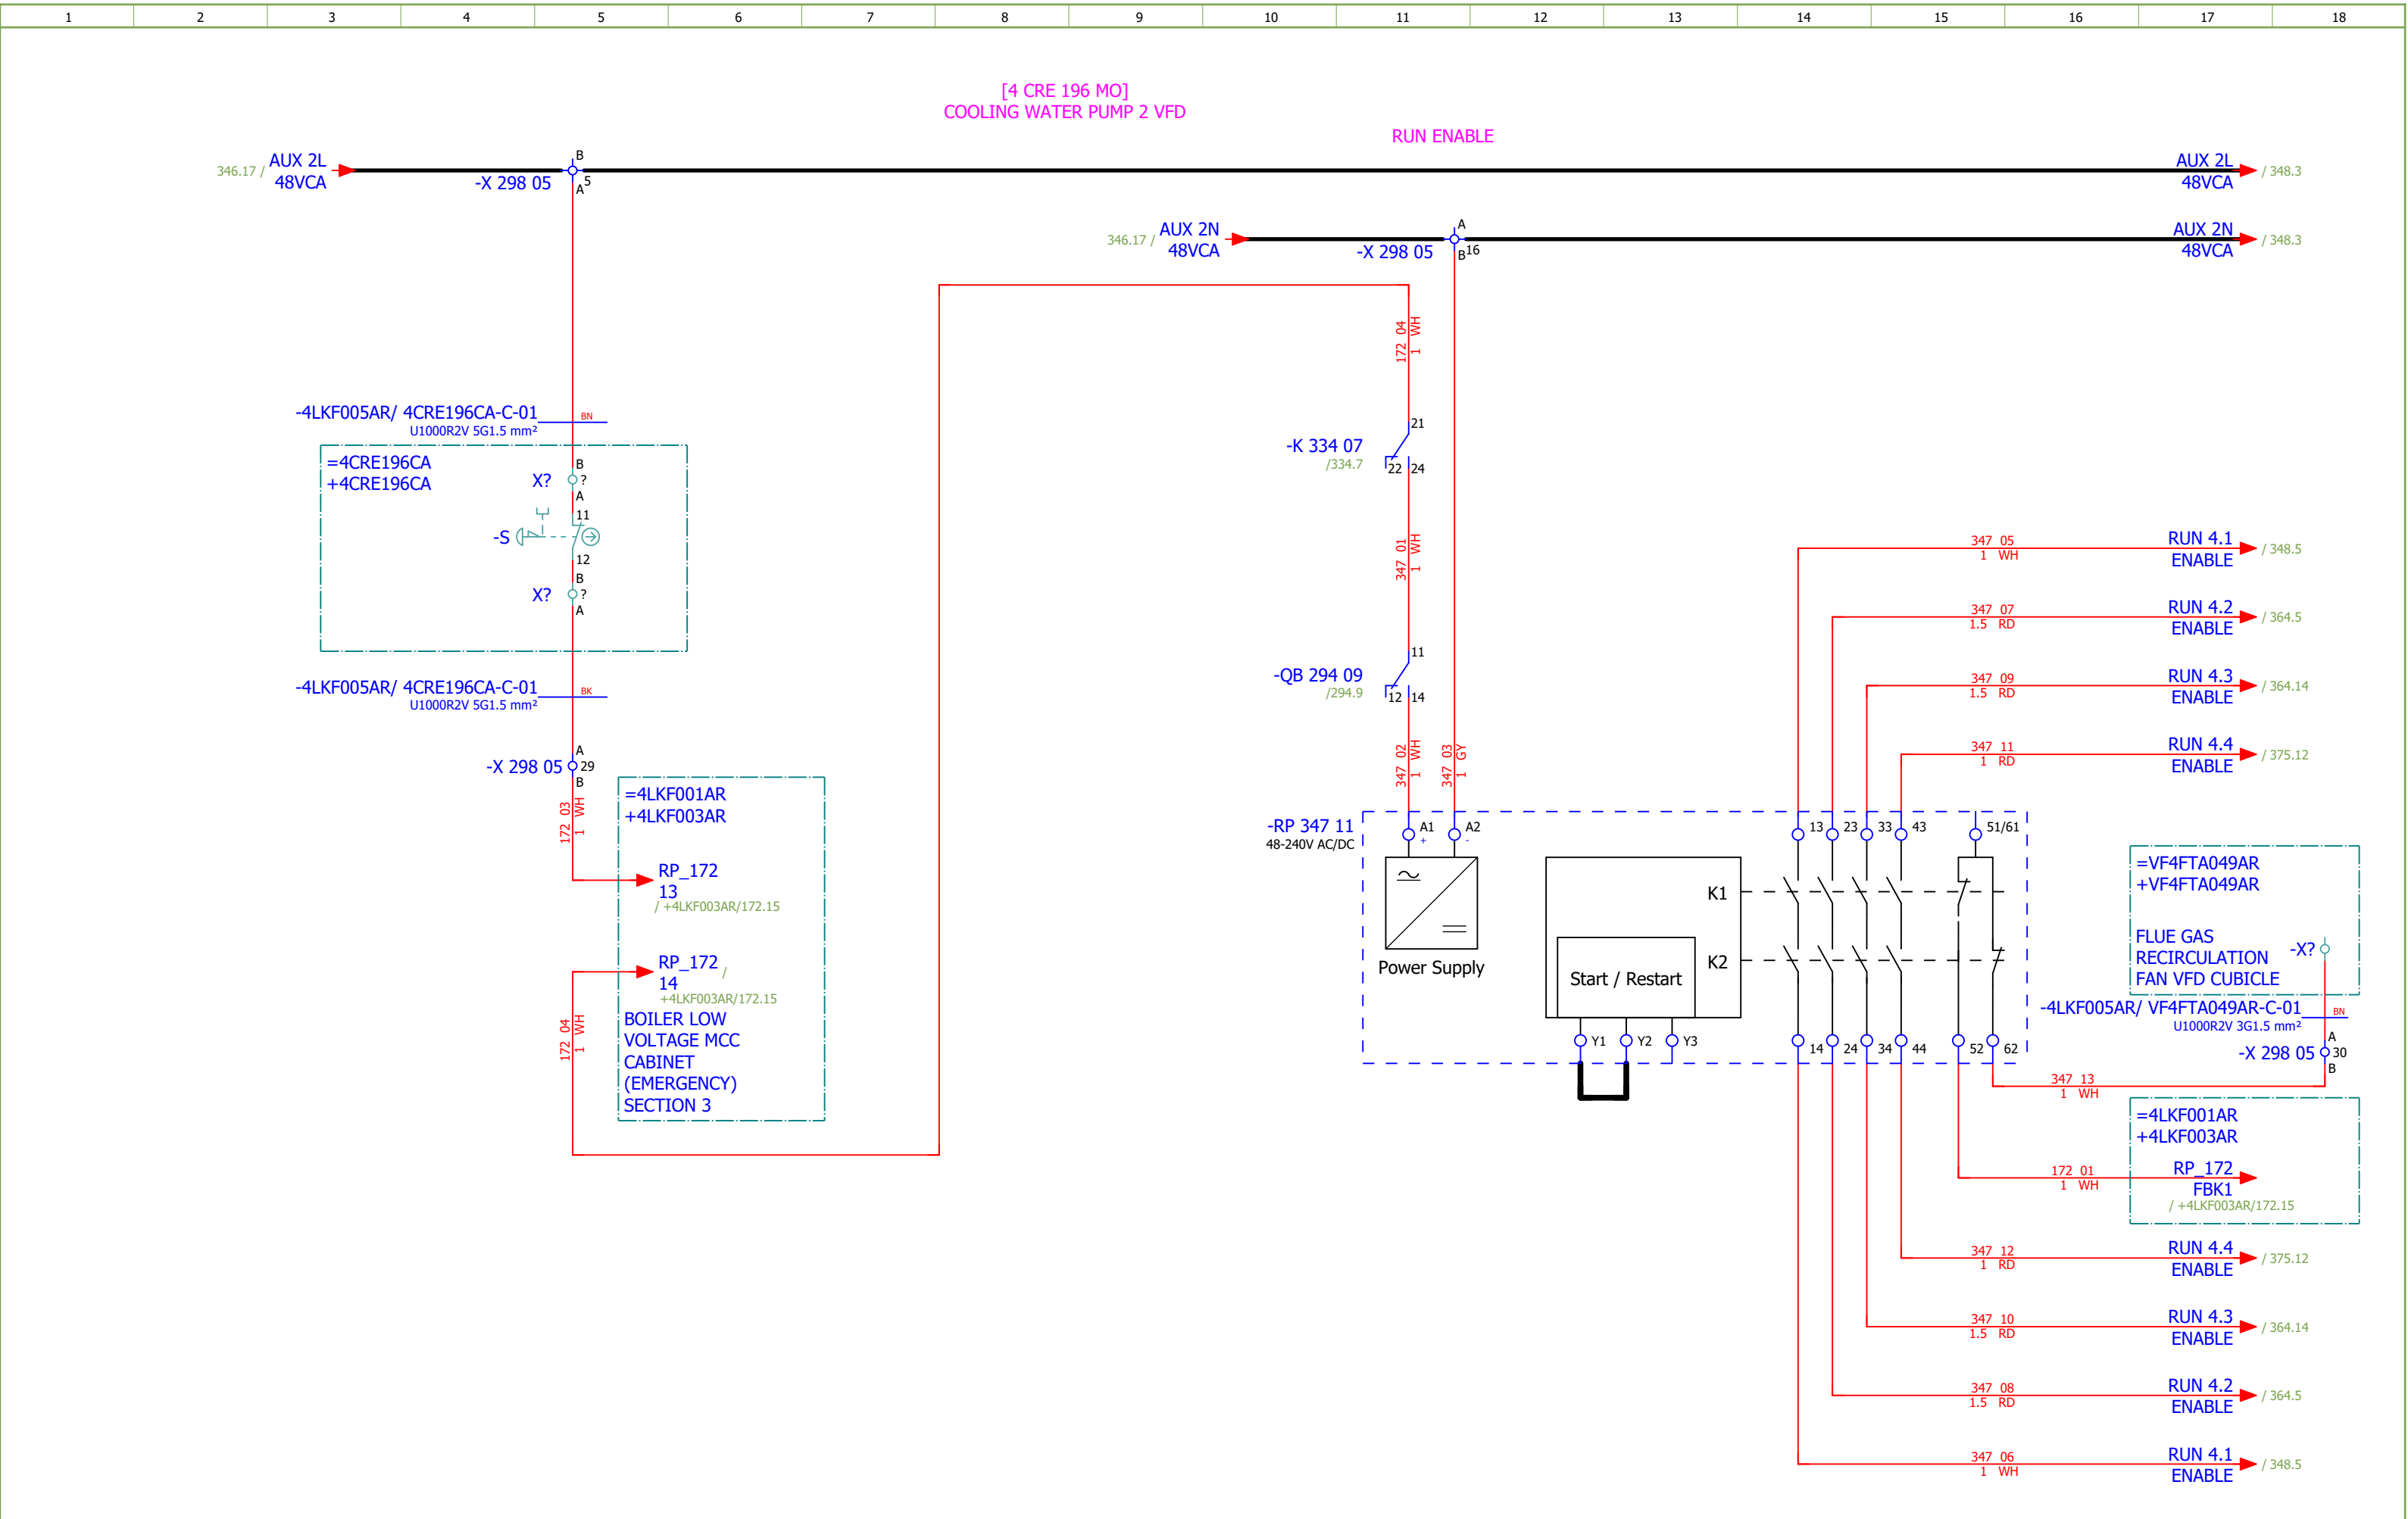

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E			
Drawn:	Jere Radas			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	COOLING WATER PUMP 2 - CONTROL	Drawing designation:	BRC-4-ATEP0-1870-E								#MC		
Approved:	Grga Kolić																=4LKF001AR	Sheet:	347
Format:	A3																+4LKF005AR	Next:	348

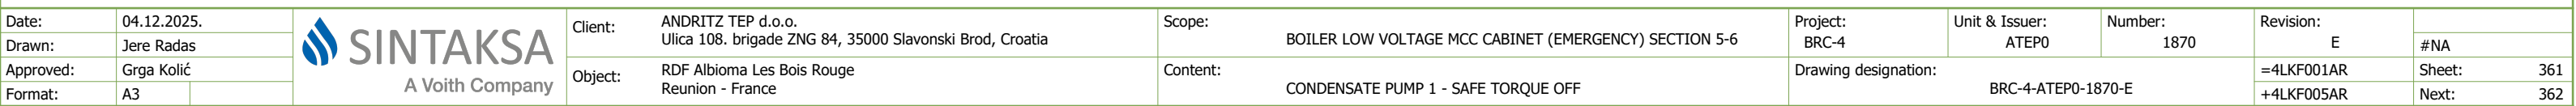

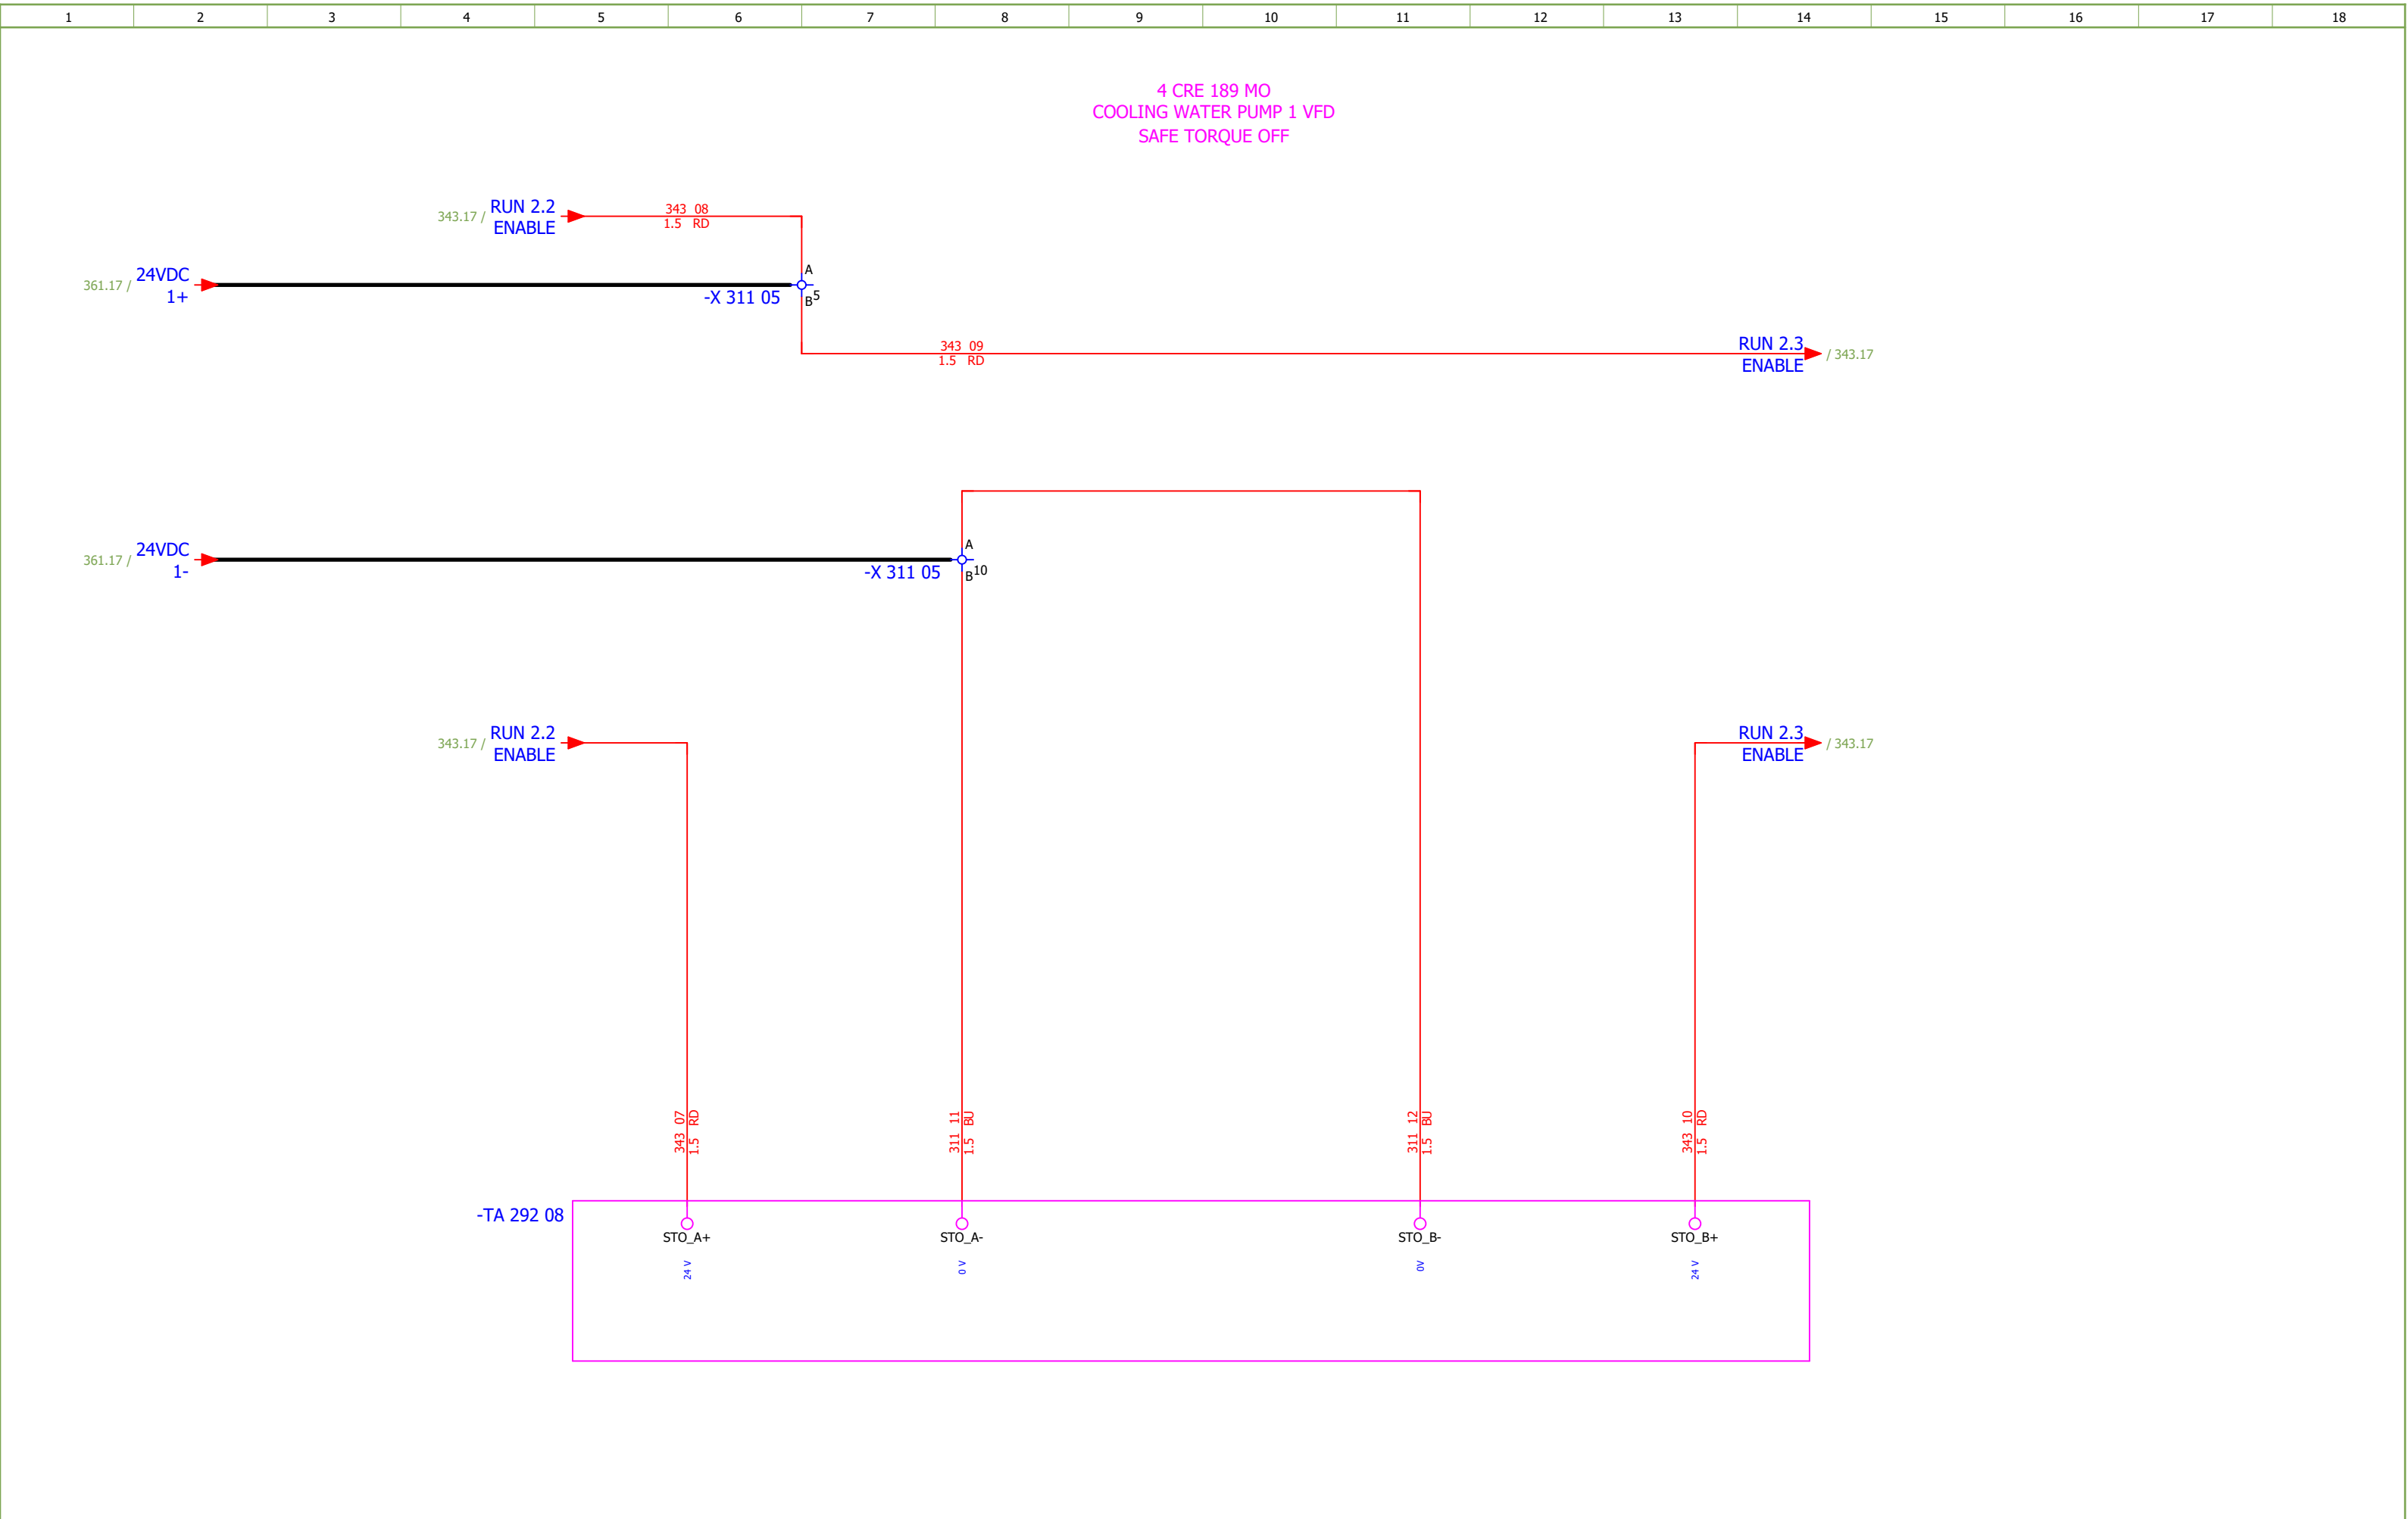


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6	Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Jere Radas															#NA
Approved:	Grga Kolić			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	COOLING WATER PUMP 1 - SAFE TORQUE OFF	Drawing designation:			BRC-4-ATEP0-1870-E			=4LKF001AR	Sheet:	362
Format:	A3													+4LKF005AR	Next:	363


CONTROL ZONE EMERGENCY STOP - TURBINE ZONE


[4 EBA 043 PO]
CONDENSATE PUMP 2

[4 EBA 014 PO]
CONDENSATE PUMP 1

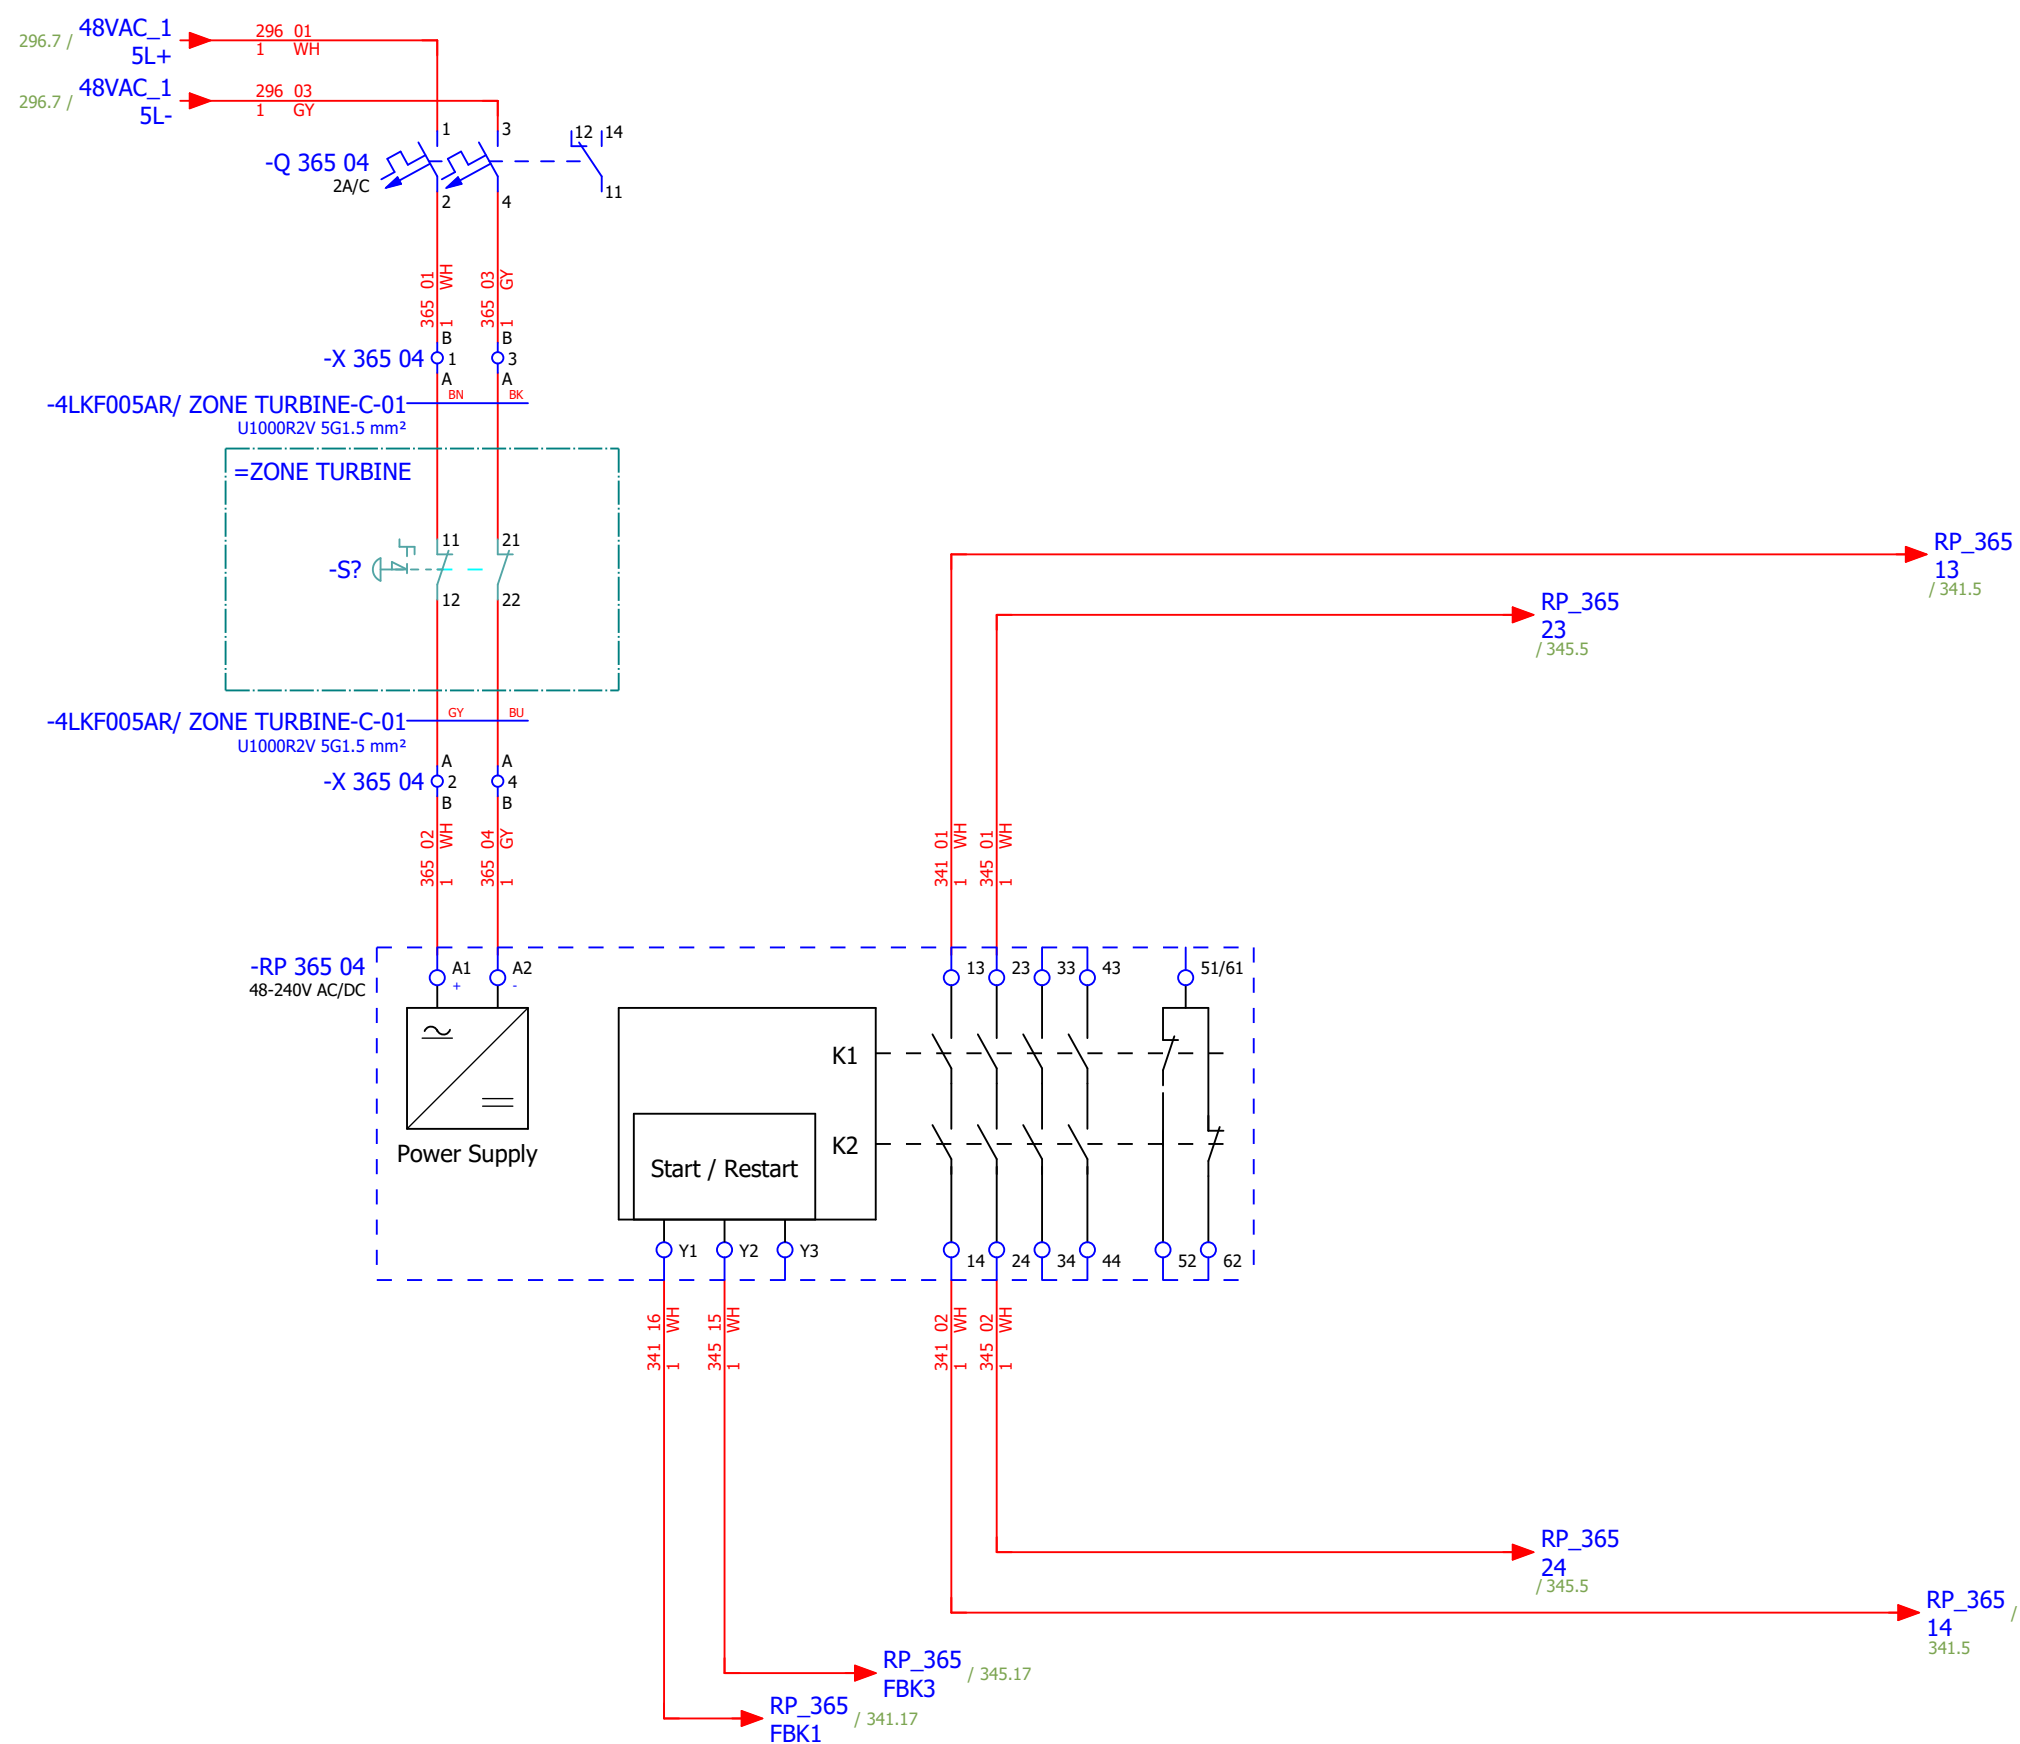



Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Jere Radas																#NA
Approved:	Grga Kolić																
Format:	A3				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	EMERGENCY SHUTDOWN - TURBINE ZONE		Drawing designation:			BRC-4-ATEP0-1870-E			=4LKF001AR	Sheet:
															+4LKF005AR	Next:	371

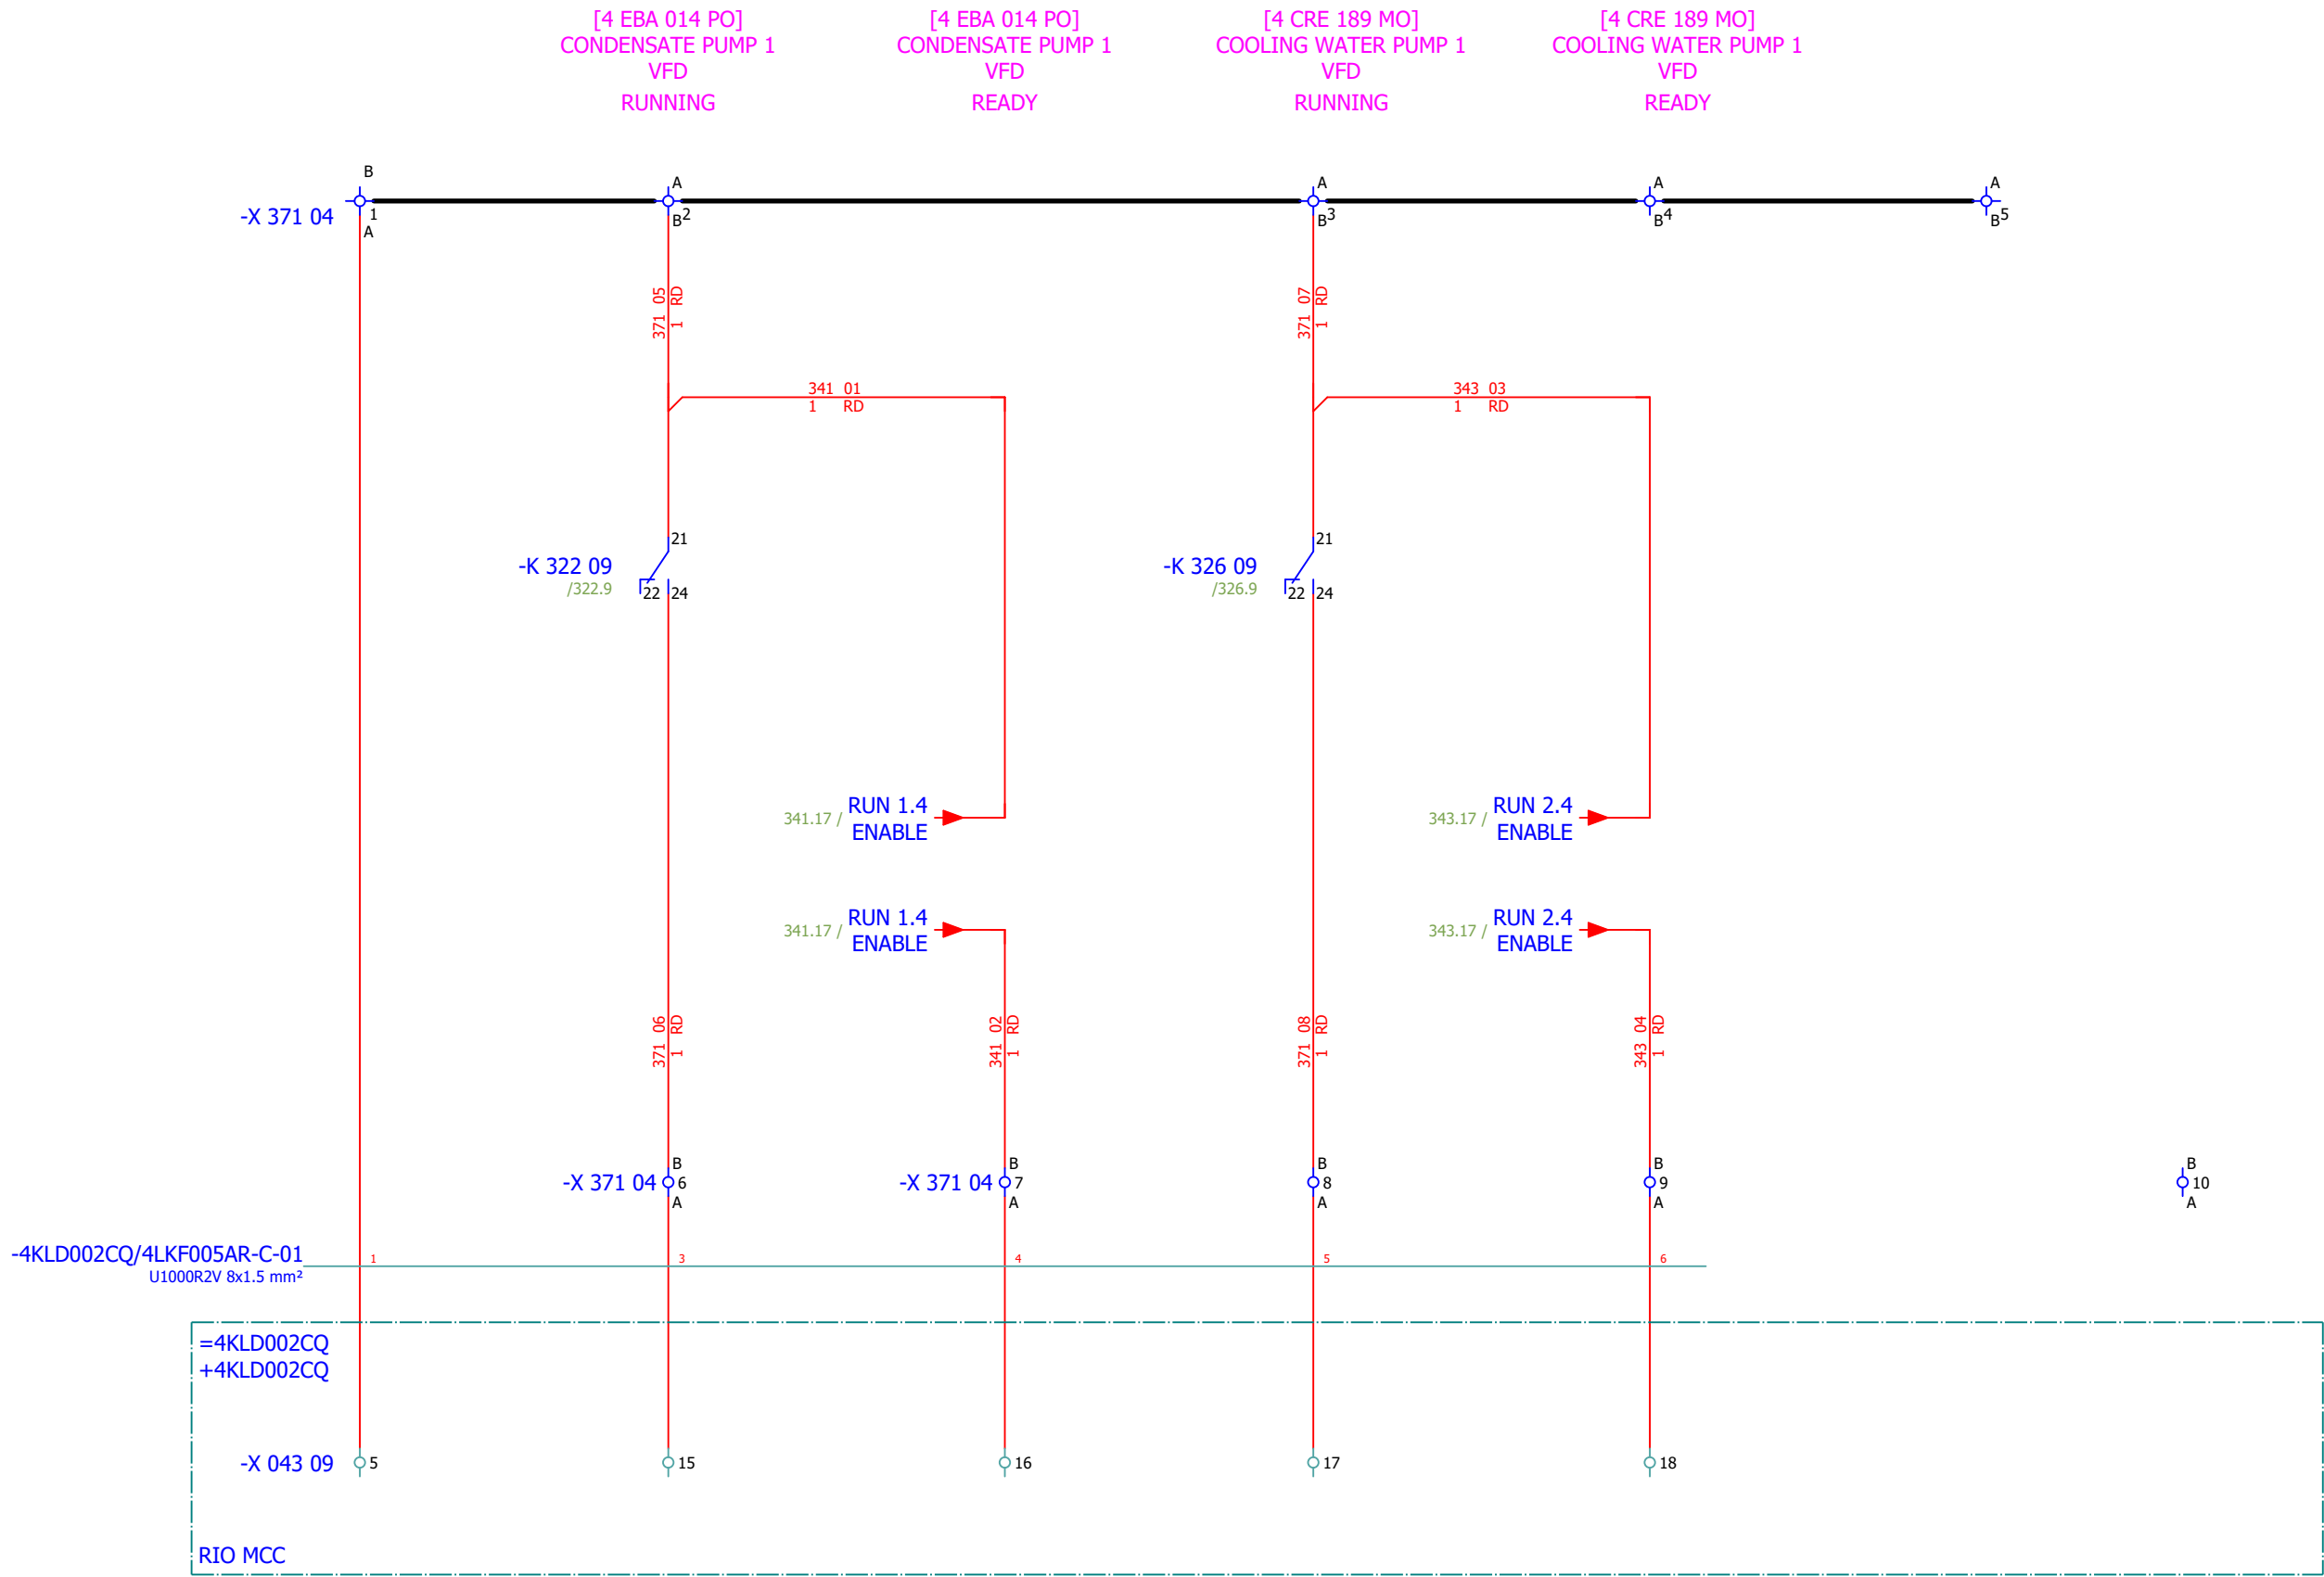

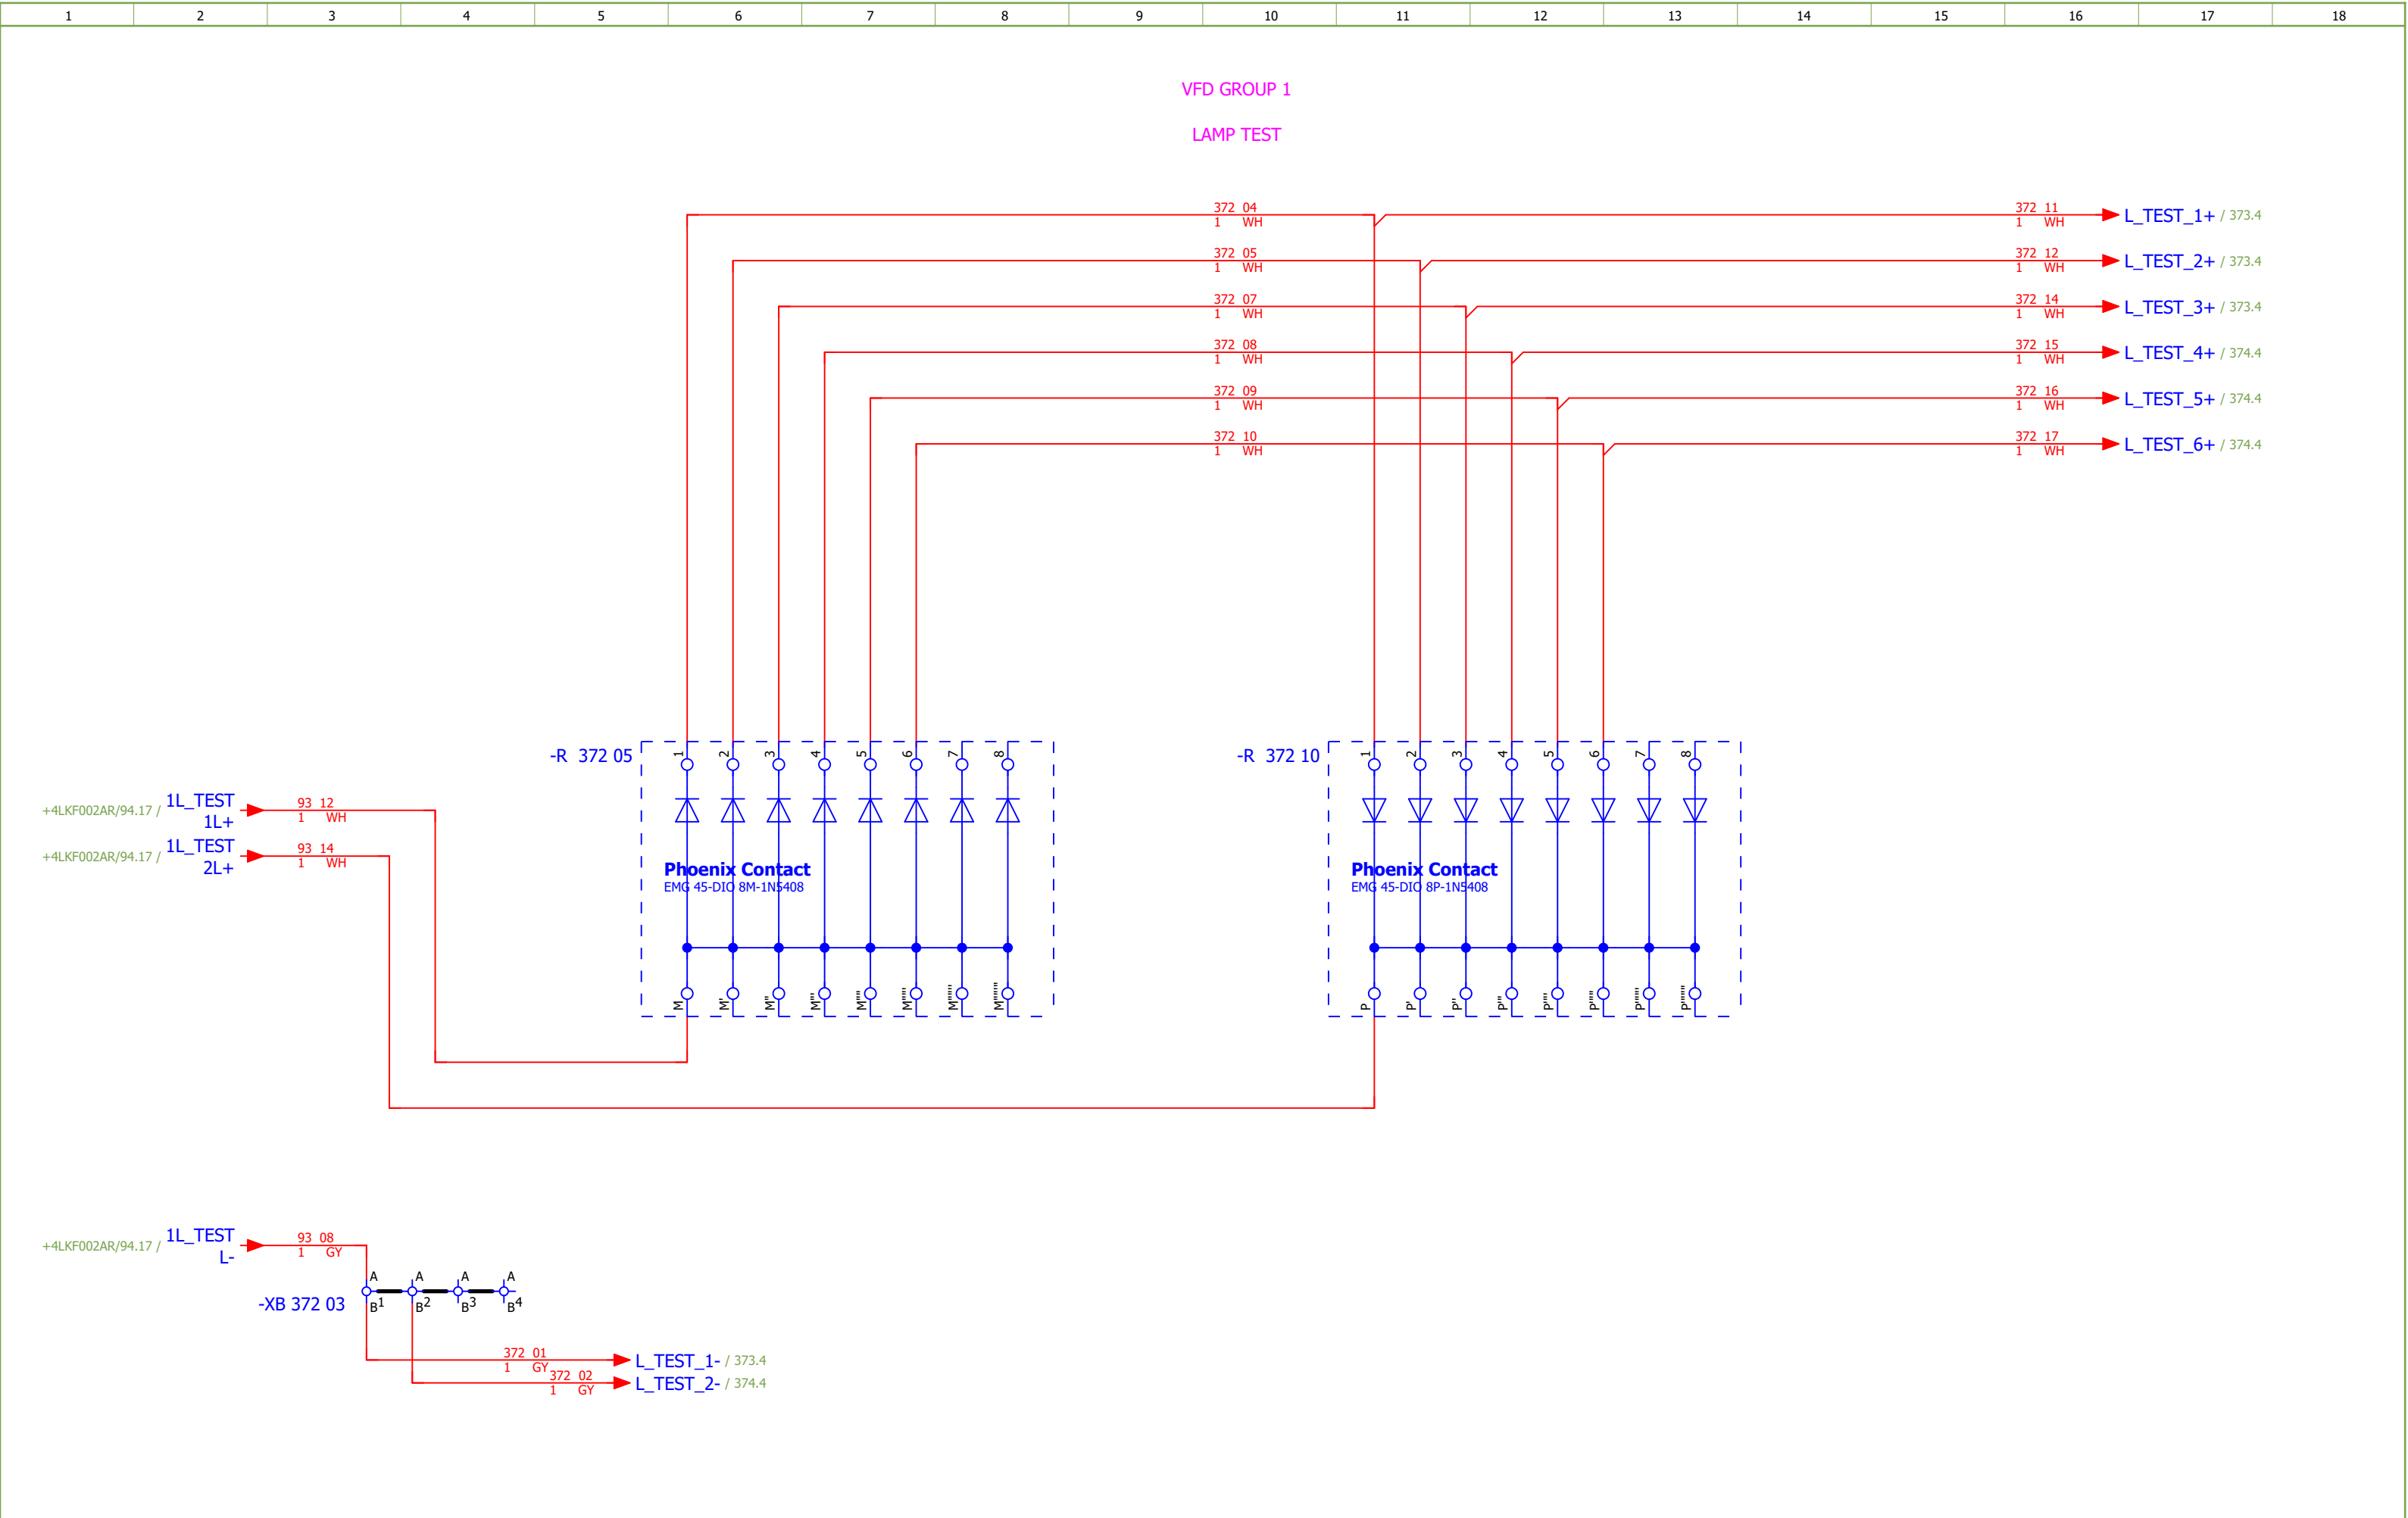


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6	Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Jere Radas															#QA
Approved:	Grga Kolić			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	VFD GROUP 1 - LAMP TEST	Drawing designation:	BRC-4-ATEP0-1870-E	=4LKF001AR	Sheet:	372				
Format:	A3										+4LKF005AR	Next:	373			

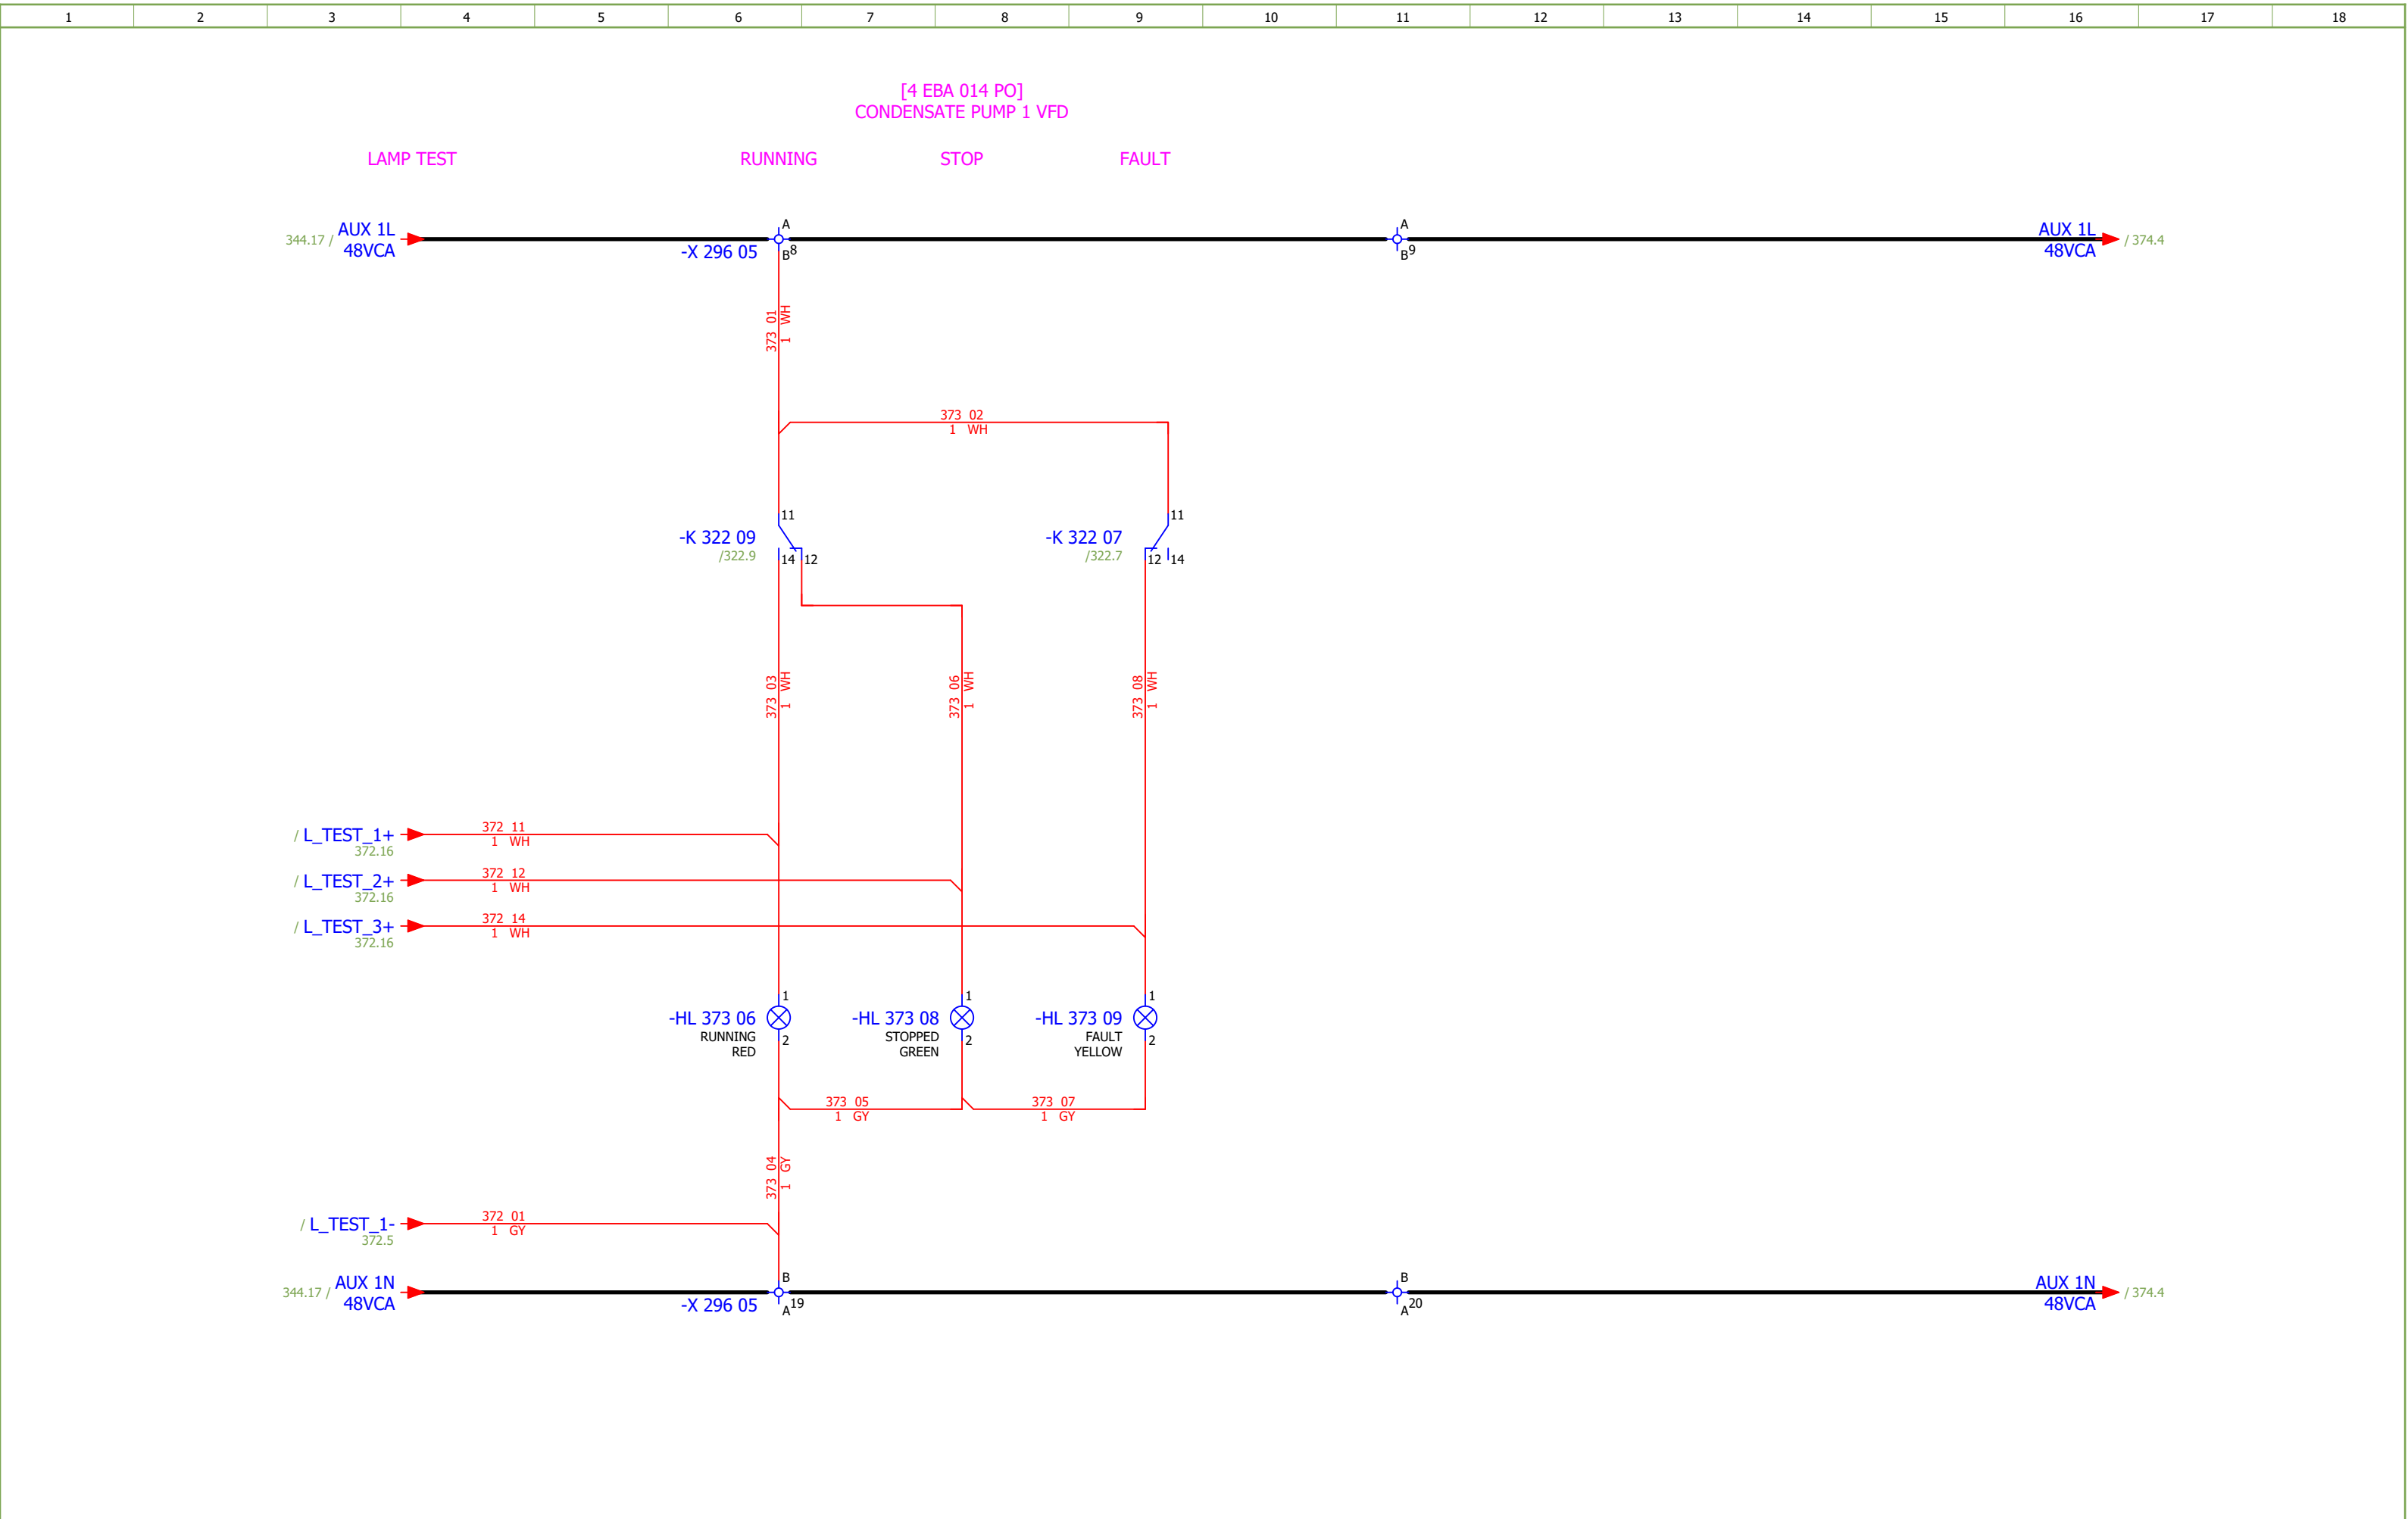

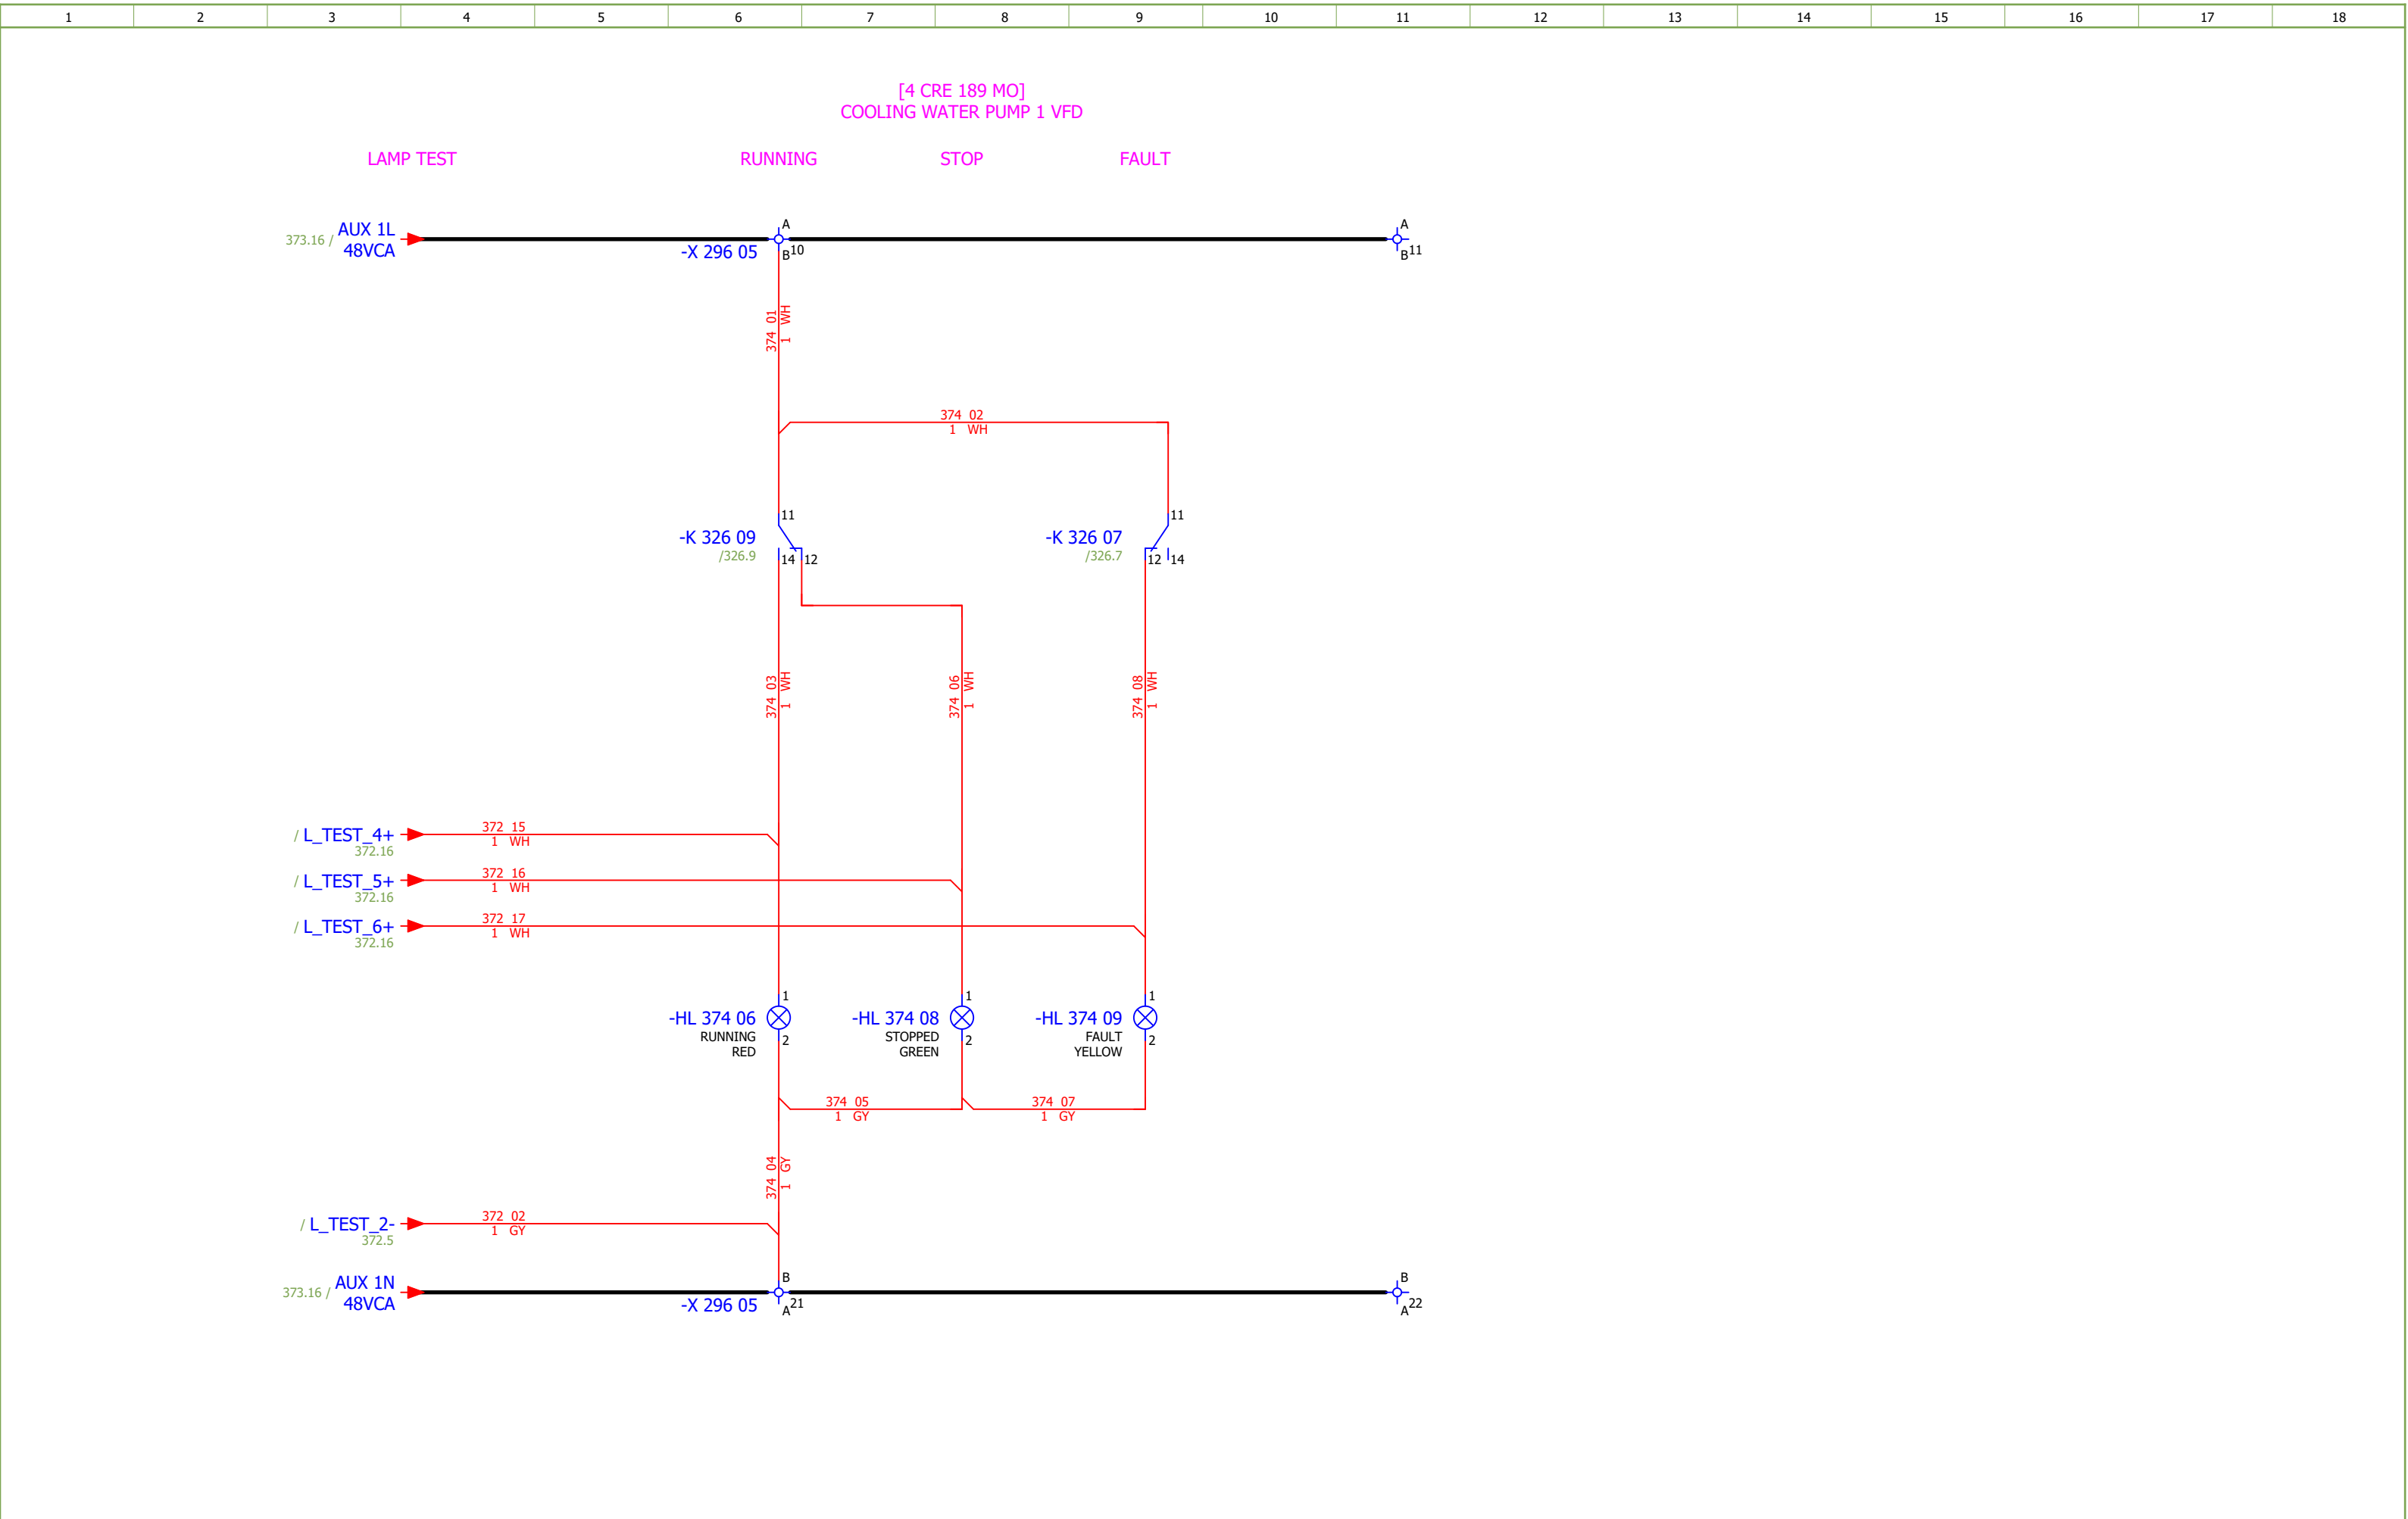

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E			
Drawn:	Jere Radas			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	VFD GROUP 2 - SIGNALIZATION TO PLC	Drawing designation:	BRC-4-ATEP0-1870-E									#QA	
Approved:	Grga Kolić																		
Format:	A3																		


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Jere Radas			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	VFD GROUP 2 - LAMP TEST	Drawing designation: BRC-4-ATEP0-1870-E							#QA		
Approved:	Grga Kolić														Sheet:	376	
Format:	A3														Next:	377	

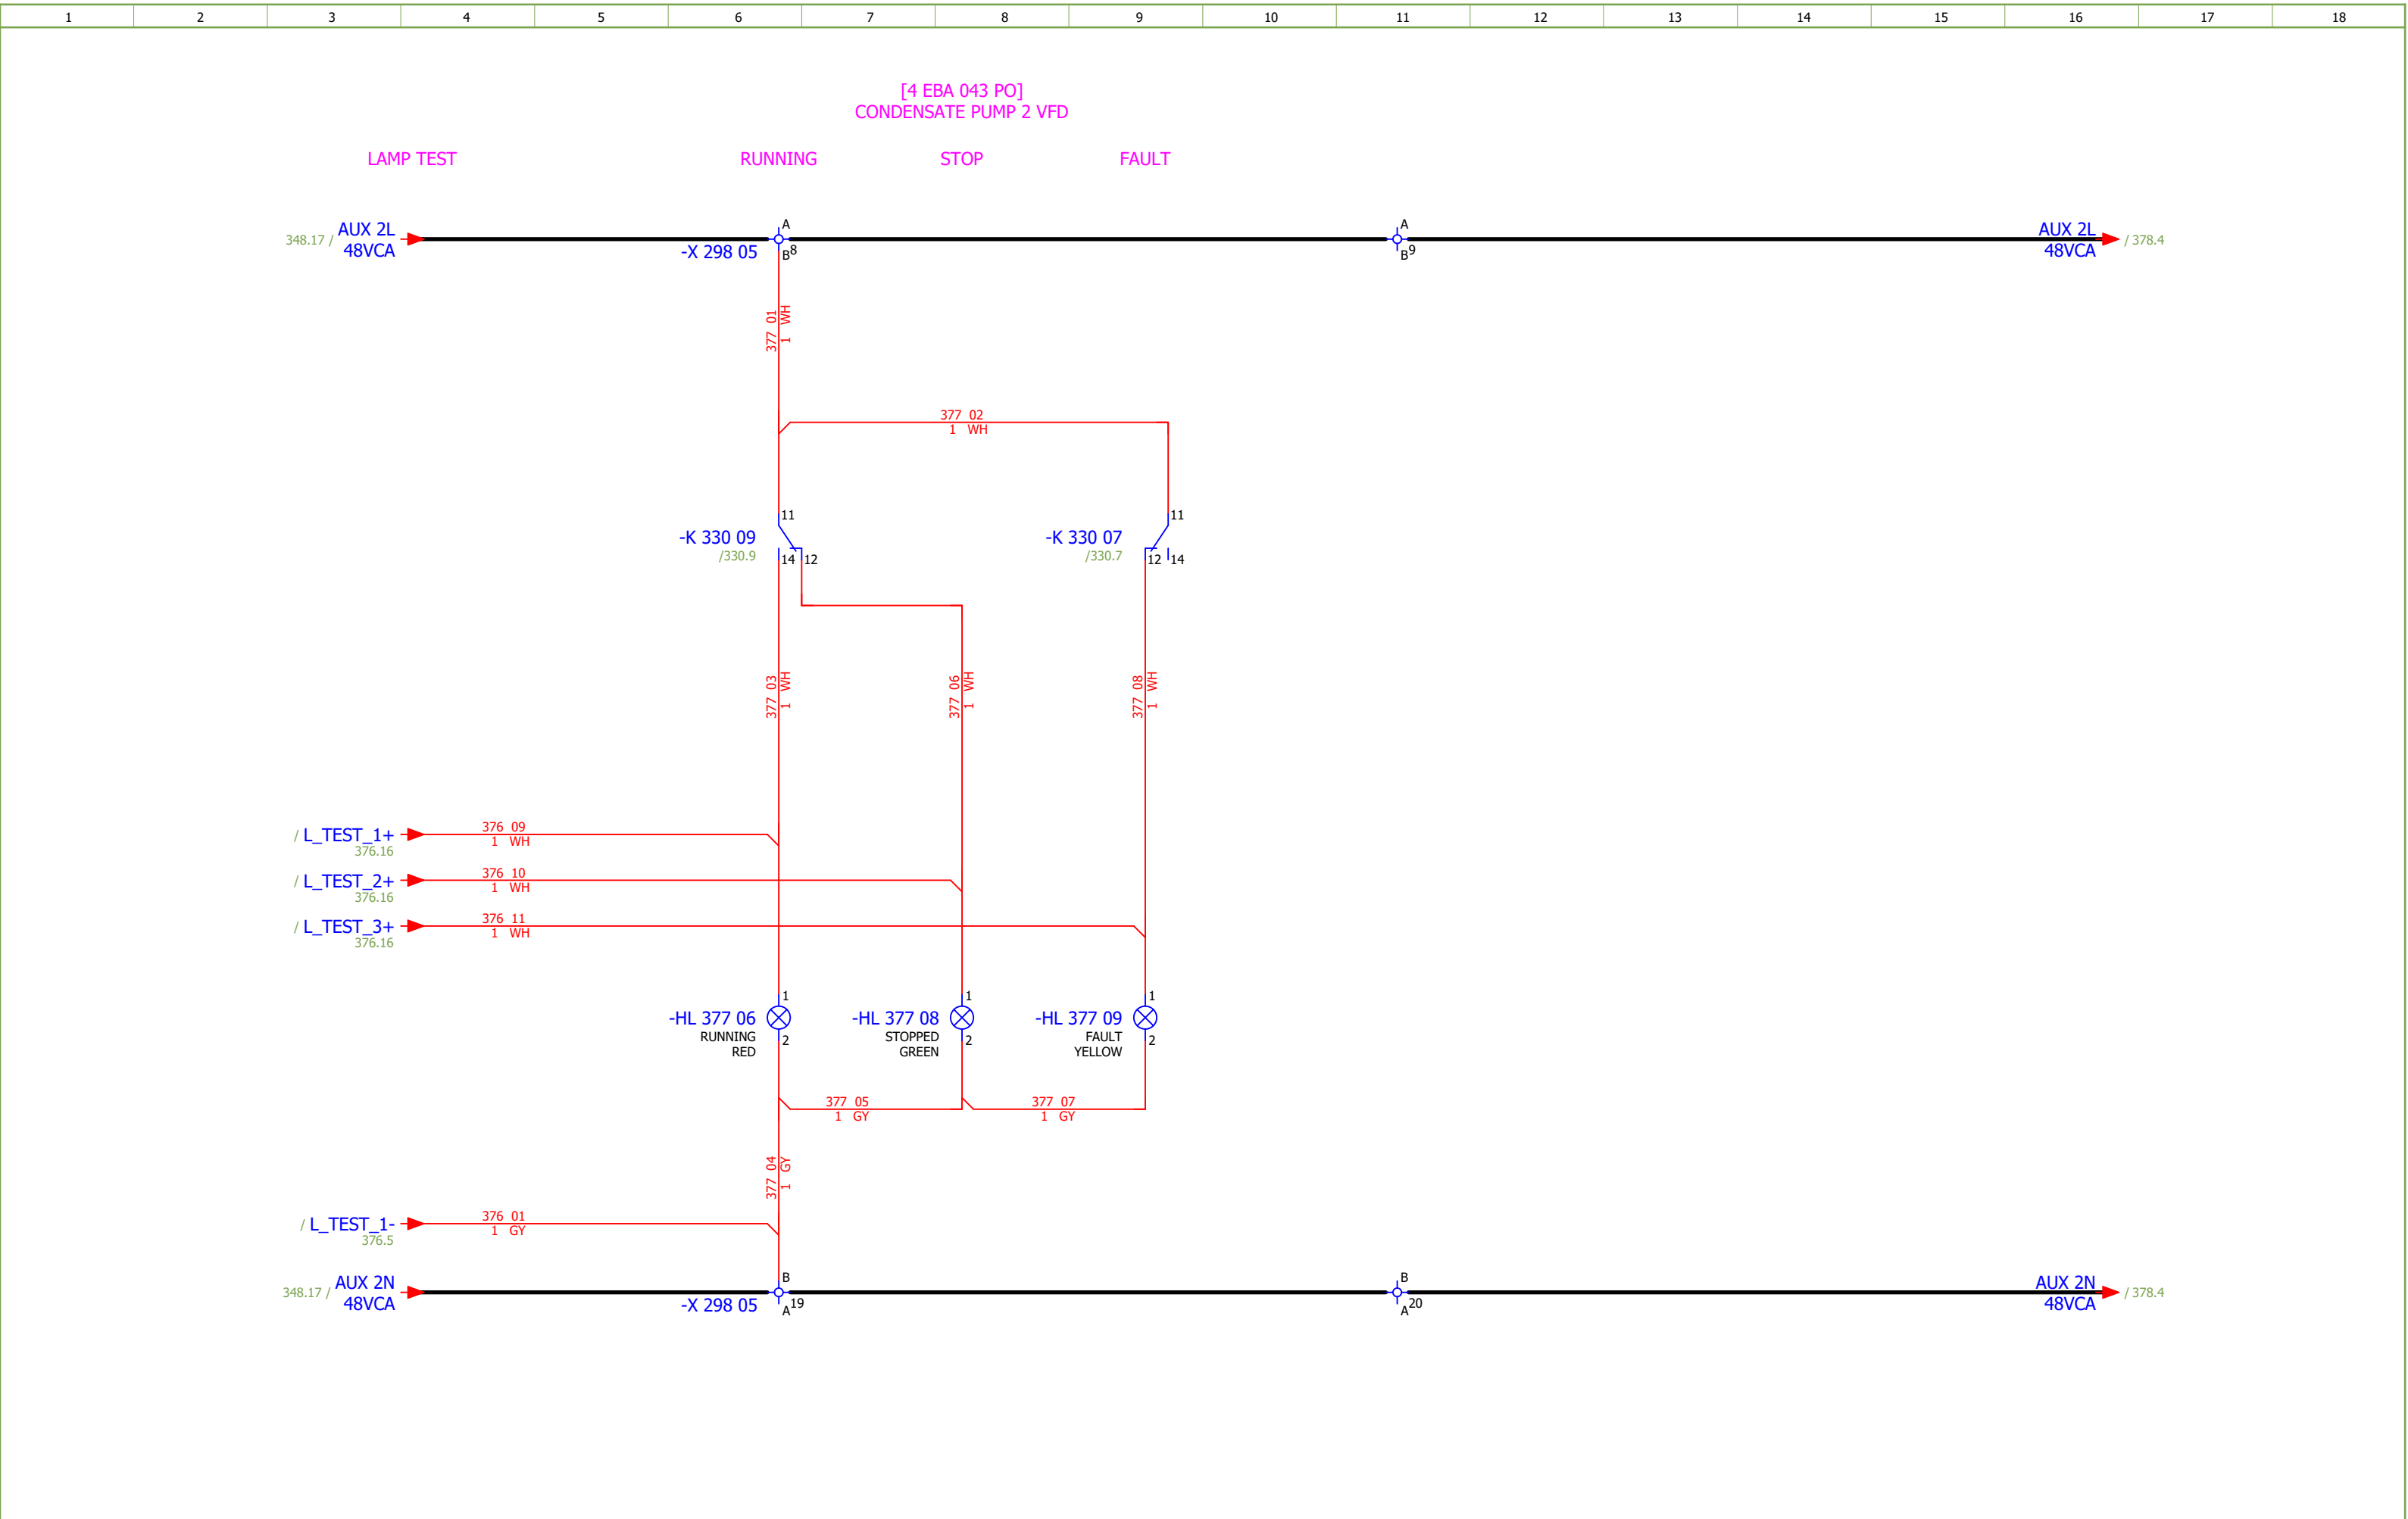

Date:	04.12.2025.		 SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E			
Drawn:	Jere Radas			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	CONDENSATE PUMP 2 - SIGNALIZATION LAMPS		Drawing designation: BRC-4-ATEP0-1870-E				=4LKF001AR	#QA					
Approved:	Grga Kolić													Sheet:	377				
Format:	A3													+4LKF005AR	Next:	378			


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
-X 391 03 B A B A B A B A B A B A B A B A B A B A B A -X 391 08 B A B A B A B A B A B A B A B A B A B A -X 391 04 A B¹ A B² A B³ A B⁴ A B⁵ A B⁶ A B⁷ A B⁸ A B⁹ A B¹⁰ A B¹¹ A B¹² A B¹³ A B¹⁴ A B¹⁵ A B¹⁶ A B¹⁷ A B¹⁸ A B¹⁹ A B²⁰ A B²¹ A B²² A B²³ A B²⁴ A B²⁵ -X 391 05 A B¹ A B² A B³ A B⁴ A B⁵ A B⁶ A B⁷ A B⁸ A B⁹ A B¹⁰ A B¹¹ A B¹² A B¹³ A B¹⁴ A B¹⁵ A B¹⁶ A B¹⁷ A B¹⁸ A B¹⁹ A B²⁰ A B²¹ A B²² A B²³ A B²⁴ A B²⁵																	

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----

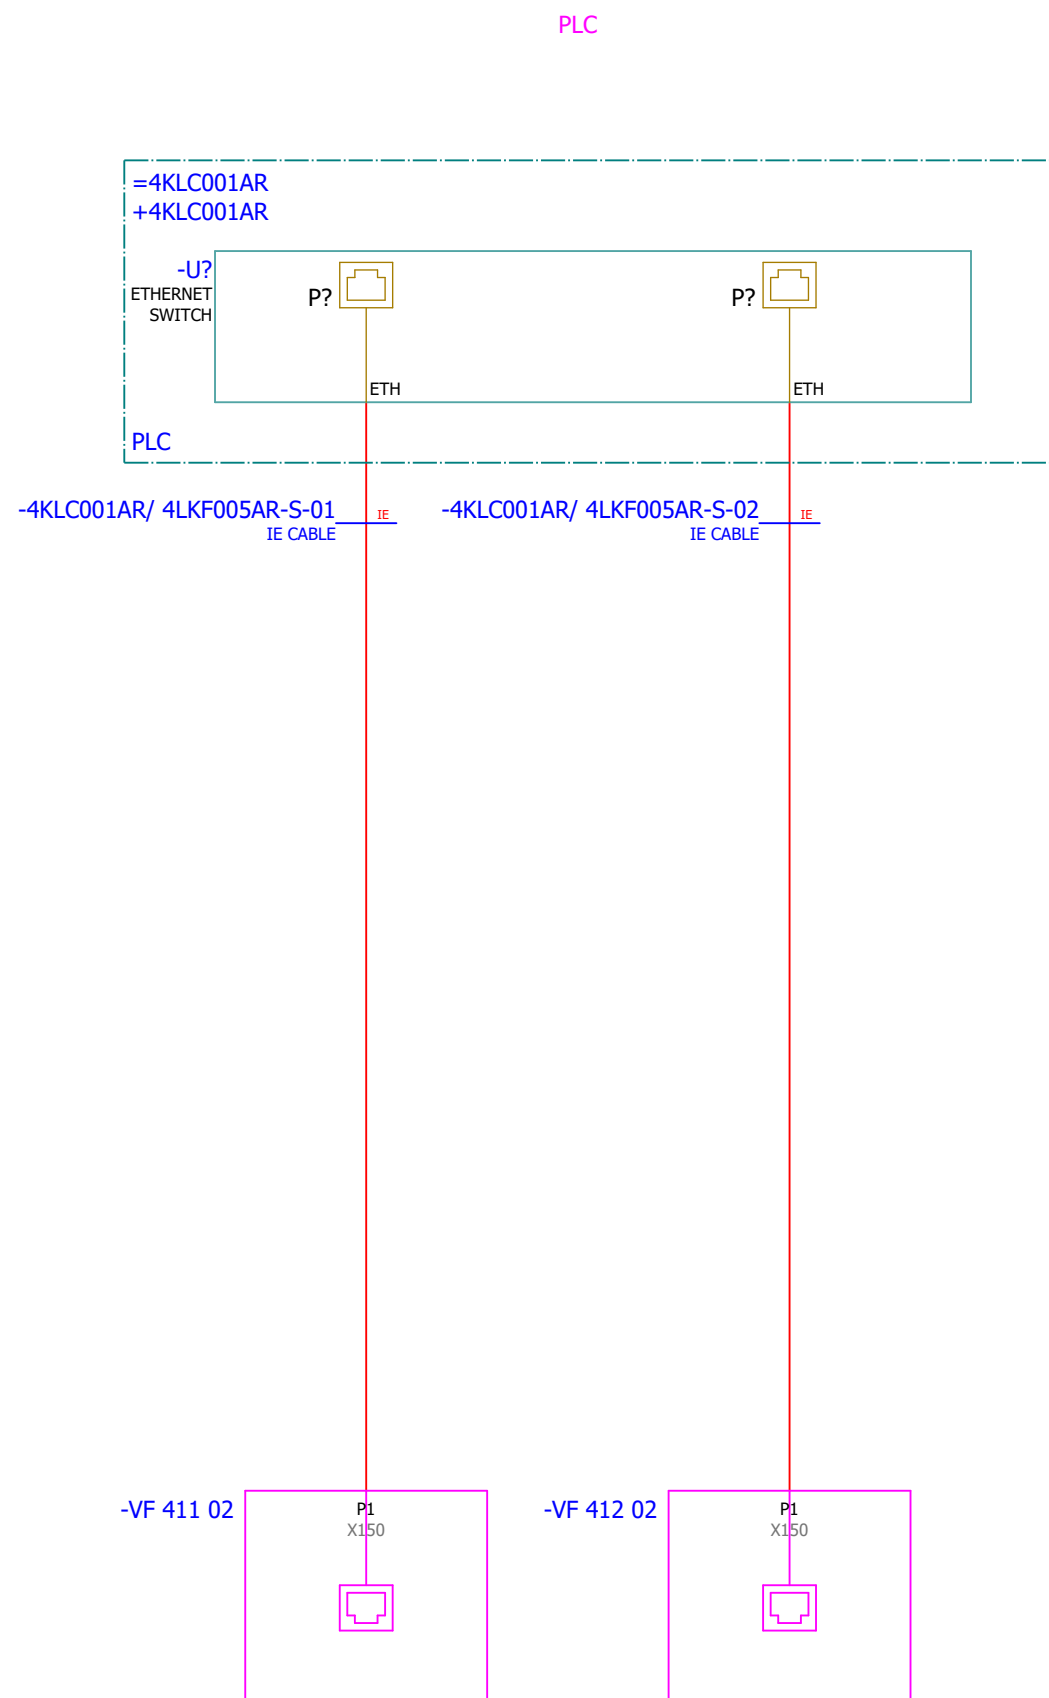

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6	Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Jere Radas			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	VFD GROUP 1 - COMMUNICATION	Drawing designation:	BRC-4-ATEP0-1870-E							#V
Approved:	Grga Kolić															
Format:	A3															

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----

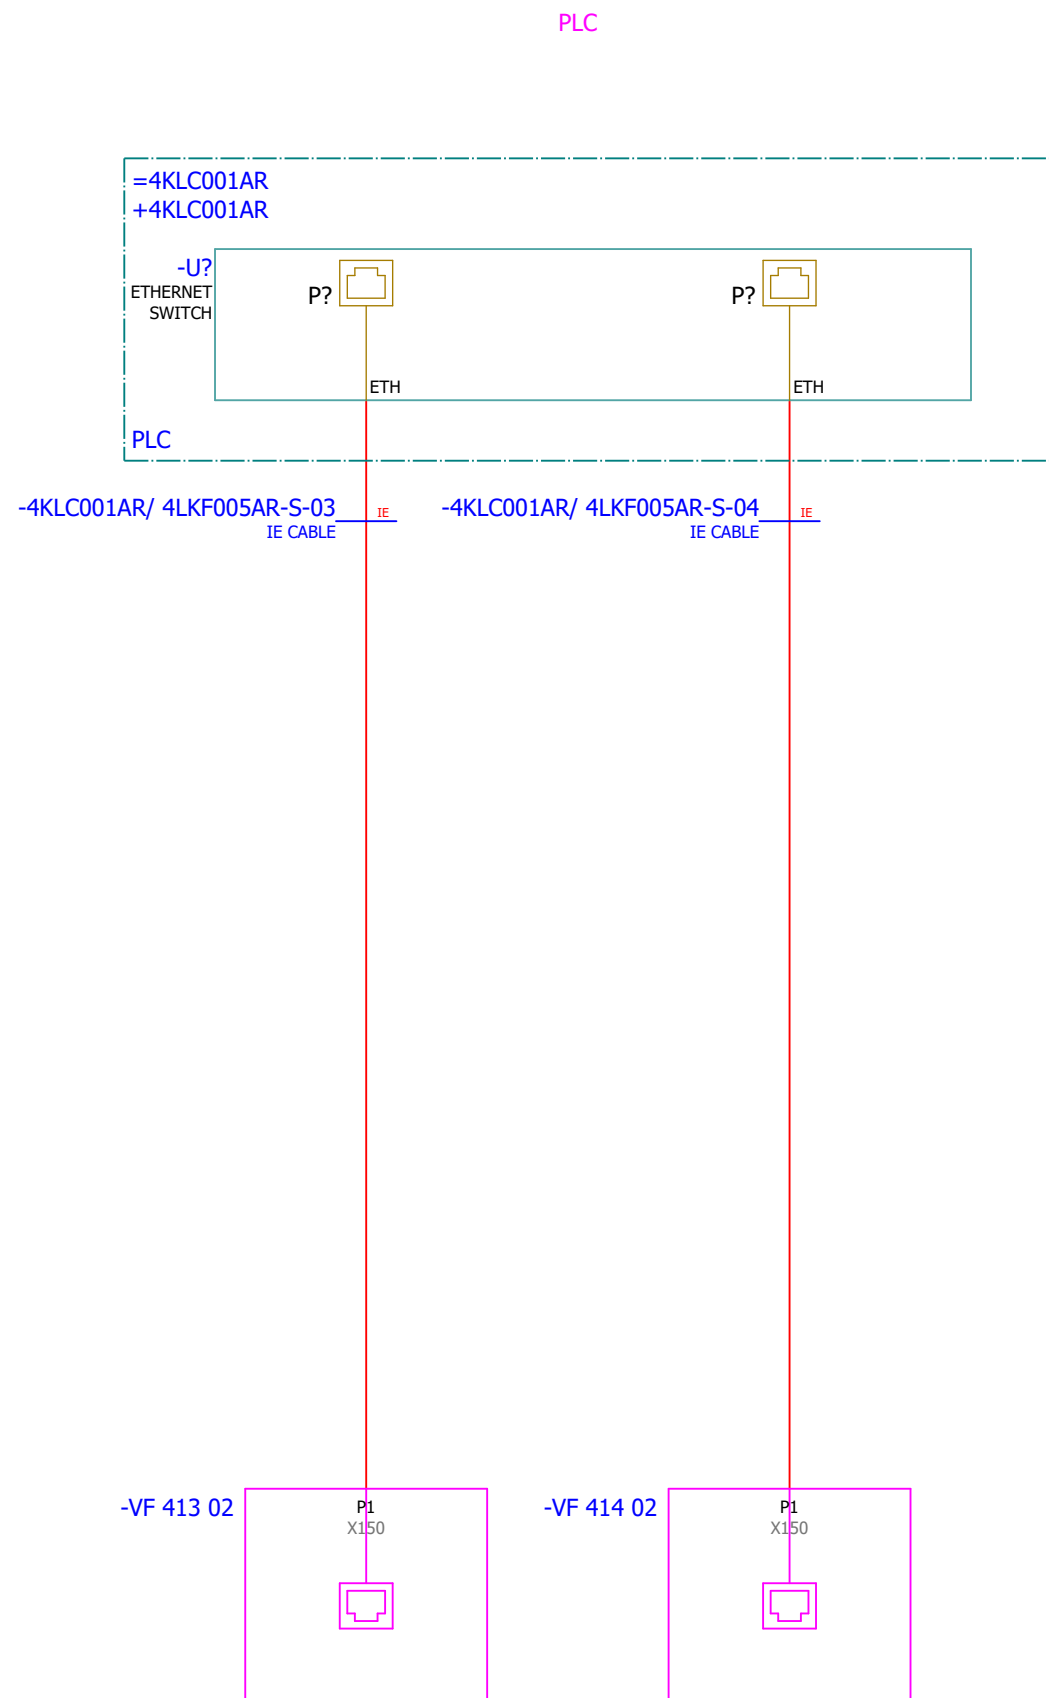


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6	Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1870	Revision:	E	
Drawn:	Jere Radas															#V
Approved:	Grga Kolić															
Format:	A3				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	VFD GROUP 2 - COMMUNICATION	Drawing designation:			BRC-4-ATEP0-1870-E		=4LKF001AR		Sheet:
													+4LKF005AR		Next:	410

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
	Sorting number	Part number	Quantity	Manufacturer	Device	Device description	Device designation										
	1.	SE.ZB4BVBG1	12	Schneider Electric	white light block with body/fixing collar integral LED 24...120VAC/DC	white light block with body/fixing collar integral LED 24...120VAC/DC	-HL 373 06;-HL 373 08;-HL 373 09;-HL 374 06;-HL 374 08;-HL 374 09;-HL 377 06;-HL 377 08;-HL 377 09;-HL 378 06;-HL 378 08;-HL 378 09										
	2.	SE.ZB4BV043	4	Schneider Electric	Red pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Red	-HL 373 06;-HL 374 06;-HL 377 06;-HL 378 06										
	3.	SE.ZB4BV033	4	Schneider Electric	Green pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Green	-HL 373 08;-HL 374 08;-HL 377 08;-HL 378 08										
	4.	SE.ZB4BV053	4	Schneider Electric	Orange pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC Head for pilot light: Orange	-HL 373 09;-HL 374 09;-HL 377 09;-HL 378 09										
	5.	SE.A9S60220	2	Schneider Electric	Control switch iSW, 2P, 20A	switch Acti9 iSW - 2 poles - 20 A - 415V	-IG 311 05;-IG 312 05										
	6.	SE.A9A15096	4	Schneider Electric	Auxiliary contact iOF, iSW, 3A	Auxiliary contact iOF, iSW, 3A	-IG 311 05;-IG 312 05										
	7.	SE.RXM4AB2P7	8	Schneider Electric	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED	-K 322 07;-K 322 09;-K 326 07;-K 326 09;-K 330 07;-K 330 09;-K 334 07;-K 334 09										
	8.	SE.RXZE2S114M	12	Schneider Electric	Socket, Harmony Electromechanical Relays, for RXM2 RXM4 relays	For RXM2/RXM4 relays Screw connectors Separate contact	-K 322 07;-K 322 09;-K 326 07;-K 326 09;-K 330 07;-K 330 09;-K 334 07;-K 334 09;-K 342 05;-K 344 05;-K 346 05;-K 348 05										
	9.	SE.RXM041FU7	8	Schneider Electric	Protection diode	RC circuit 110...240 V a.c.	-K 322 07;-K 322 09;-K 326 07;-K 326 09;-K 330 07;-K 330 09;-K 334 07;-K 334 09										
	10.	SE.RXZR335	12	Schneider Electric	Plastic maintaining clamp - for miniature relay socket RXZ	Plastic maintaining clamp - for miniature relay socket RXZ	-K 322 07;-K 322 09;-K 326 07;-K 326 09;-K 330 07;-K 330 09;-K 334 07;-K 334 09;-K 342 05;-K 344 05;-K 346 05;-K 348 05										
	11.	SE.RXM4AB2E7	4	Schneider Electric	Miniature Plug-in relay - Zelio RXM 4 C/O 48 V AC 6 A with LED	Miniature Plug-in relay - Zelio RXM 4 C/O 48 V AC 6 A with LED	-K 342 05;-K 344 05;-K 346 05;-K 348 05										
	12.	SE.RXM041BN7	4	Schneider Electric	Protection diode	RC circuit - 24..60 V AC - for RPZ/RXZ sockets	-K 342 05;-K 344 05;-K 346 05;-K 348 05										
	13.	SE.A9F74202	5	Schneider Electric	2-pole MCB, 2A/C	Nominal current: 2 A Tripping curve: C	-Q 295 05;-Q 296 05;-Q 297 05;-Q 298 05;-Q 365 04										
	14.	SE.A9A26904	8	Schneider Electric	Auxiliary contact iOF, iC60	100mA-6A, 24VAC-415VAC, 24-130 VDC	-Q 295 05;-Q 296 05;-Q 297 05;-Q 298 05										
	15.	SE.A9A26924	1	Schneider Electric	Auxiliary contact iOF, iC60	Auxiliary contact, Acti9, iOF, 1 OC, AC/DC	-Q 365 04										
	16.	SE.C10F3TM100	4	Schneider Electric	Circuit breaker ComPacT NSX100F, 36kA	Circuit breaker ComPacT NSX100F, 36kA at 415VAC, TMD trip unit 100A, 3 poles 3d	-QB 291 09;-QB 292 09;-QB 293 09;-QB 294 09										
	17.	SE.29450	8	Schneider Electric	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV	-QB 291 09;-QB 292 09;-QB 293 09;-QB 294 09										
	18.	SE.LV429337T	4	Schneider Electric	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40	-QB 291 09;-QB 292 09;-QB 293 09;-QB 294 09										
	19.	SE.LVS04033	4	Schneider Electric	LINERGY DP	LINERGY DP 3P D.BLK/COMPACT 250A 27HOLES	-QB 291 09;-QB 292 09;-QB 293 09;-QB 294 09										
	20.	SE.LV429517	4	Schneider Electric	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250	-QB 291 09;-QB 292 09;-QB 293 09;-QB 294 09										
	21.	PXC.2954882	2	Phoenix Contact	Component for protective circuit	Diode module, with eight diodes, common anode, diode type 1N 5408	-R 372 05;-R 376 05										
	22.	PXC.2954879	2	Phoenix Contact	Component for protective circuit	Diode module, with eight diodes, common cathode, diode type 1N 5408	-R 372 10;-R 376 10										
	23.	SE.XPSBAC34AP	5	Schneider Electric	Safety module	Harmony Safety Automation Estop or guard ,Harmony XPS, connected to supply terminals 48-240 V AC/DC , no inputs, screw	-RP 341 11;-RP 343 11;-RP 345 11;-RP 347 11;-RP 365 04										


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
	Sorting number	Part number	Quantity	Manufacturer	Device	Device description	Device designation										
	1.	SE.ZB4BVBG1	12	Schneider Electric	white light block with body/fixing collar integral LED 24...120VAC/DC	white light block with body/fixing collar integral LED 24...120VAC/DC	-HL 373 06;-HL 373 08;-HL 373 09;-HL 374 06;-HL 374 08;-HL 374 09;-HL 377 06;-HL 377 08;-HL 377 09;-HL 378 06;-HL 378 08;-HL 378 09										
	2.	SE.ZB4BV043	4	Schneider Electric	Red pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC	-HL 373 06;-HL 374 06;-HL 377 06;-HL 378 06										
	3.	SE.ZB4BV033	4	Schneider Electric	Green pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC	-HL 373 08;-HL 374 08;-HL 377 08;-HL 378 08										
	4.	SE.ZB4BV053	4	Schneider Electric	Orange pilot light head Ø22 plain lens for integral LED	Complete body light block assembly, Harmony XB4, metal, universal LED, body fixing collar, 24...120V AC DC	-HL 373 09;-HL 374 09;-HL 377 09;-HL 378 09										
	5.	SE.A9S60220	2	Schneider Electric	Control switch iSW, 2P, 20A	Head for pilot light: Orange switch Acti9 iSW - 2 poles - 20 A - 415V	-IG 311 05;-IG 312 05										
	6.	SE.A9A15096	4	Schneider Electric	Auxiliary contact iOF, iSW, 3A	Auxiliary contact iOF, iSW, 3A	-IG 311 05;-IG 312 05										
	7.	SE.RXM4AB2P7	8	Schneider Electric	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED	Miniature Plug-in relay - Zelio RXM 4 C/O 230 V AC 6 A with LED	-K 322 07;-K 322 09;-K 326 07;-K 326 09;-K 330 07;-K 330 09;-K 334 07;-K 334 09										
	8.	SE.RXZE2S114M	12	Schneider Electric	Socket, Harmony Electromechanical Relays, for RXM2 RXM4 relays	For RXM2/RXM4 relays Screw connectors Separate contact	-K 322 07;-K 322 09;-K 326 07;-K 326 09;-K 330 07;-K 330 09;-K 334 07;-K 334 09;-K 342 05;-K 344 05;-K 346 05;-K 348 05										
	9.	SE.RXM041FU7	8	Schneider Electric	Protection diode	RC circuit 110...240 V a.c.	-K 322 07;-K 322 09;-K 326 07;-K 326 09;-K 330 07;-K 330 09;-K 334 07;-K 334 09										
	10.	SE.RXZR335	12	Schneider Electric	Plastic maintaining clamp - for miniature relay socket RXZ	Plastic maintaining clamp - for miniature relay socket RXZ	-K 322 07;-K 322 09;-K 326 07;-K 326 09;-K 330 07;-K 330 09;-K 334 07;-K 334 09;-K 342 05;-K 344 05;-K 346 05;-K 348 05										
	11.	SE.RXM4AB2E7	4	Schneider Electric	Miniature Plug-in relay - Zelio RXM 4 C/O 48 V AC 6 A with LED	Miniature Plug-in relay - Zelio RXM 4 C/O 48 V AC 6 A with LED	-K 342 05;-K 344 05;-K 346 05;-K 348 05										
	12.	SE.RXM041BN7	4	Schneider Electric	Protection diode	RC circuit - 24..60 V AC - for RPZ/RXZ sockets	-K 342 05;-K 344 05;-K 346 05;-K 348 05										
	13.	SE.A9F74202	5	Schneider Electric	2-pole MCB, 2A/C	Nominal current: 2 A Tripping curve: C	-Q 295 05;-Q 296 05;-Q 297 05;-Q 298 05;-Q 365 04										
	14.	SE.A9A26904	8	Schneider Electric	Auxiliary contact iOF, iC60	100mA-6A, 24VAC-415VAC, 24-130 VDC	-Q 295 05;-Q 296 05;-Q 297 05;-Q 298 05										
	15.	SE.A9A26924	1	Schneider Electric	Auxiliary contact iOF, iC60	Auxiliary contact, Acti9, iOF, 1 OC, AC/DC	-Q 365 04										
	16.	SE.C10F3TM100	4	Schneider Electric	Circuit breaker ComPacT NSX100F, 36kA	Circuit breaker ComPacT NSX100F, 36kA at 415VAC, TMD trip unit 100A, 3 poles 3d	-QB 291 09;-QB 292 09;-QB 293 09;-QB 294 09										
	17.	SE.29450	8	Schneider Electric	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV	Auxiliary contact 1 OF or 1 SD or 1 SDE or 1 SDV	-QB 291 09;-QB 292 09;-QB 293 09;-QB 294 09										
	18.	SE.LV429337T	4	Schneider Electric	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40	Direct rotary handle, ComPacT NSX 100/160/250, black handle, IP40	-QB 291 09;-QB 292 09;-QB 293 09;-QB 294 09										
	19.	SE.LVS04033	4	Schneider Electric	LINERGY DP	LINERGY DP 3P D.BLK/COMPACT 250A 27HOLES	-QB 291 09;-QB 292 09;-QB 293 09;-QB 294 09										
	20.	SE.LV429517	4	Schneider Electric	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250	Insulation accessories 1 long terminal shield for breaker or plug-in base, 3P - NSX100...250	-QB 291 09;-QB 292 09;-QB 293 09;-QB 294 09										
	21.	PXC.2954882	2	Phoenix Contact	Component for protective circuit	Diode module, with eight diodes, common anode, diode type 1N 5408	-R 372 05;-R 376 05										
	22.	PXC.2954879	2	Phoenix Contact	Component for protective circuit	Diode module, with eight diodes, common cathode, diode type 1N 5408	-R 372 10;-R 376 10										
	23.	SE.XPSBAC34AP	5	Schneider Electric	Safety module	Harmony Safety Automation Estop or guard ,Harmony XPS, connected to supply terminals 48-240 V AC/DC , no inputs, screw	-RP 341 11;-RP 343 11;-RP 345 11;-RP 347 11;-RP 365 04										

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
	Sorting number	Part number	Quantity	Manufacturer	Device	Device description							Device designation				
	24.	SE.XB4BD33	4	Schneider Electric	Selector switch, BLACK, 1-0-2, 2NO	Metal Black Ø22 3 positions 2 NO							-S 321 09;-S 325 09;-S 329 09;-S 333 09				
	25.	SE.ZBE101	16	Schneider Electric	Single contact block NO	Harmony XB4 Silver alloy Feed-through terminal block, nom. voltage: 800 V 1 NO nominal current: 24 A							-S 321 09;-S 325 09;-S 329 09;-S 333 09				
	26.	PXC.3209510	325	Phoenix Contact	PT 2,5 Feed-through terminal block	number of connections: 2 number of positions: 1 connection method: Push-in connection Rated cross section: 2.5 mm2 cross section: 0.14 mm2 - 4 mm2 mounting type: NS 35/7,5, NS 35/15 color: gray							-X 295 05;-X 296 05;-X 297 05;-X 298 05;-X 311 05;-X 312 05;-X 321 04;-X 323 05;-X 325 04;-X 327 05;-X 329 04;-X 331 05;-X 333 04;-X 335 05;-X 337 08;-X 338 08;-X 365 04;-X 371 04;-X 375 04;-X 391 03...-X 391 05;-X 391 08;-XB 372 03;-XB 376 03				

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
	Sorting number	Part number	Quantity	Manufacturer	Device	Device description							Device designation				
	24.	SE.XB4BD33	4	Schneider Electric	Selector switch, BLACK, 1-0-2, 2NO	Metal Black Ø22 3 positions 2 NO							-S 321 09;-S 325 09;-S 329 09;-S 333 09				
	25.	SE.ZBE101	16	Schneider Electric	Single contact block NO	Harmony XB4 Silver alloy Feed-through terminal block, nom. voltage: 800 V 1 NO nominal current: 24 A							-S 321 09;-S 325 09;-S 329 09;-S 333 09				
	26.	PXC.3209510	325	Phoenix Contact	PT 2,5 Feed-through terminal block	number of connections: 2 number of positions: 1 connection method: Push-in connection Rated cross section: 2.5 mm2 cross section: 0.14 mm2 - 4 mm2 mounting type: NS 35/7,5, NS 35/15 color: gray							-X 295 05;-X 296 05;-X 297 05;-X 298 05;-X 311 05;-X 312 05;-X 321 04;-X 323 05;-X 325 04;-X 327 05;-X 329 04;-X 331 05;-X 333 04;-X 335 05;-X 337 08;-X 338 08;-X 365 04;-X 371 04;-X 375 04;-X 391 03...-X 391 05;-X 391 08;-XB 372 03;-XB 376 03				

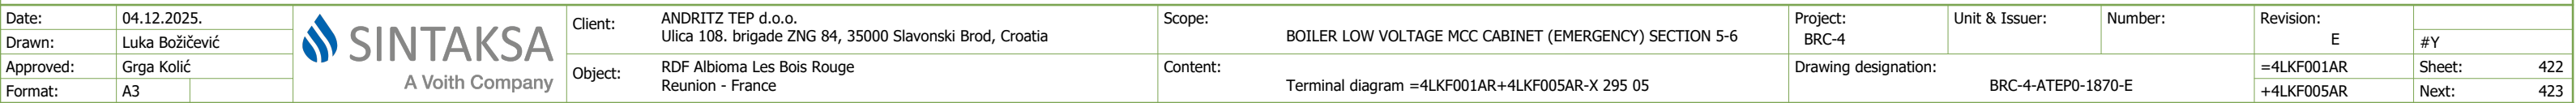


Terminal diagram


A SIDE										Strip		B SIDE					
										=4LKF001AR+4LKF005AR-X 296 05							
Placement	Target designation			Cable name and type			Conductor	Jumper		Wiring			Target designation				
/341.5	=4EBA014CA+4EBA014CA-X?:?:B			4LKF005AR/ 4EBA014CA-C-01 U1000R2V 5G1.5 mm²			BN 1.5 mm²		 1 	WH 2.5 mm²			-Q 296 05:2				
									 2 								
									 3 	WH 1 mm²			-RP 341 11:13				
/343.5	=4CRE189CA+4CRE189CA-X?:?:B			4LKF005AR/ 4CRE189CA-C-01 U1000R2V 5G1.5 mm²			BN 1.5 mm²		 4 								
									 5 								
									 6 	WH 1 mm²			-RP 343 11:13				
									 7 								
									 8 	WH 1 mm²			-K 322 09:11				
									 9 								
									 10 	WH 1 mm²			-K 326 09:11				
									 11 								
									 12 	GY 2.5 mm²			-Q 296 05:4				
									 13 	GY 1 mm²			-RP 341 11:A2				
									 14 	GY 1 mm²			-K 342 05:A2				
									 15 								
									 16 	GY 1 mm²			-RP 343 11:A2				
									 17 	GY 1 mm²			-K 344 05:A2				
									 18 								
									 19 	GY 1 mm²			-HL 373 06:2				
									 	GY 1 mm²			-XB 372 03:1:B				
									 21 	GY 1 mm²			-HL 374 06:2				
									 	GY 1 mm²			-XB 372 03:2:B				
									 22 								
/341.5	=4EBA014CA+4EBA014CA-X?:?:A			4LKF005AR/ 4EBA014CA-C-01 U1000R2V 5G1.5 mm²			BK 1.5 mm²	,	 23 	WH 1 mm²			-RP 365 04:13				

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6		Project:	BRC-4	Unit & Issuer:		Number:		Revision:	E	
Drawn:	Luka Božičević																#Y
Approved:	Grga Kolić				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	Terminal diagram =4LKF001AR+4LKF005AR-X 296 05		Drawing designation:					=4LKF001AR	Sheet:	424
Format:	A3									BRC-4-ATEP0-1870-E					+4LKF005AR	Next:	425


Terminal diagram

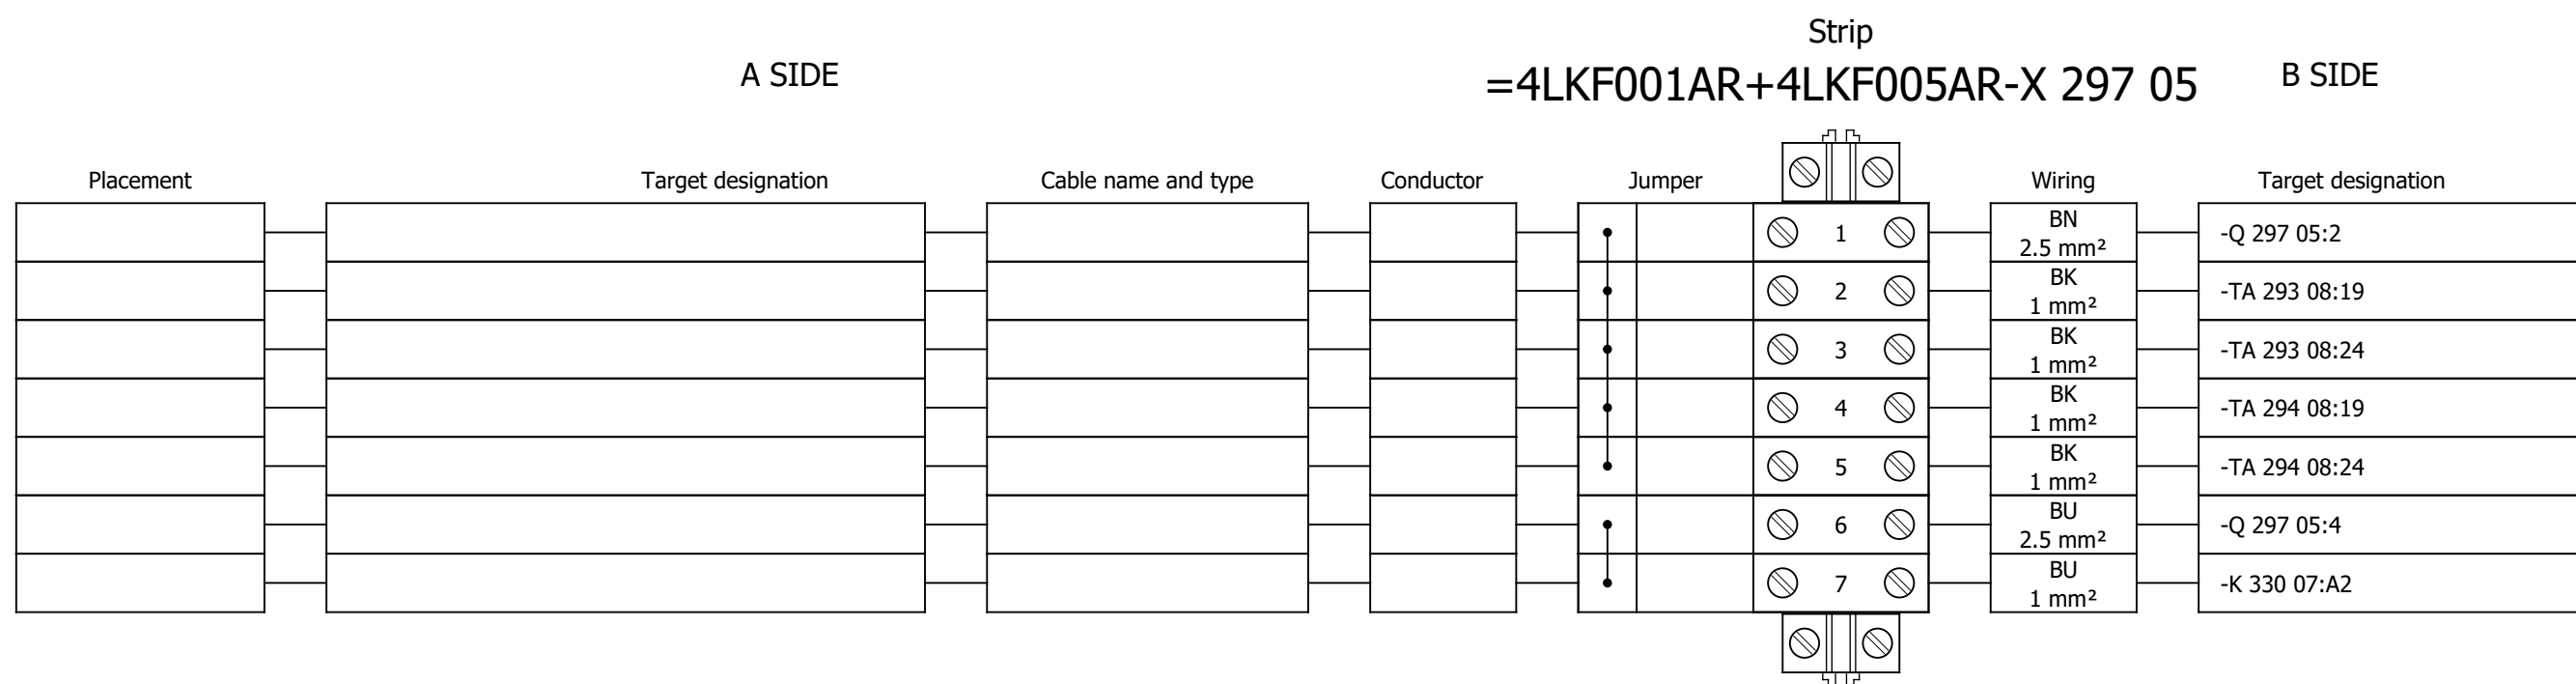


Terminal diagram


A SIDE				Strip				B SIDE			
				=4LKF001AR+4LKF005AR-X 298 05							
Placement	Target designation	Cable name and type	Conductor	Jumper			Wiring	Target designation			
/345.5	=4EBA043CA+4EBA043CA-X?:?:B	4LKF005AR/ 4EBA043CA-C-01 U1000R2V 5G1.5 mm²	BN 1.5 mm²			 1 	WH 2.5 mm²	-Q 298 05:2			
						 2 					
						 3 	WH 1 mm²	-RP 345 11:13			
/347.5	=4CRE196CA+4CRE196CA-X?:?:B	4LKF005AR/ 4CRE196CA-C-01 U1000R2V 5G1.5 mm²	BN 1.5 mm²			 4 					
						 5 					
						 6 	WH 1 mm²	-RP 347 11:13			
						 7 					
						 8 	WH 1 mm²	-K 330 09:11			
						 9 					
						 10 	WH 1 mm²	-K 334 09:11			
						 11 					
						 12 	GY 2.5 mm²	-Q 298 05:4			
						 13 	GY 1 mm²	-RP 345 11:A2			
						 14 	GY 1 mm²	-K 346 05:A2			
						 15 					
						 16 	GY 1 mm²	-RP 347 11:A2			
						 17 	GY 1 mm²	-K 348 05:A2			
						 18 					
						 19 	GY 1 mm²	-HL 377 06:2			
						 	GY 1 mm²	-XB 376 03:1:B			
						 20 					
						 21 	GY 1 mm²	-HL 378 06:2			
						 	GY 1 mm²	-XB 376 03:2:B			
						 22 					
/345.5	=4EBA043CA+4EBA043CA-X?:?:A	4LKF005AR/ 4EBA043CA-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²	,		 23 	WH 1 mm²	-RP 365 04:23			

Terminal diagram


A SIDE										Strip		B SIDE					
										=4LKF001AR+4LKF005AR-X 298 05							
Placement	Target designation			Cable name and type			Conductor	Jumper		Wiring			Target designation				
/345.5	=4EBA043CA+4EBA043CA-X?:?:B			4LKF005AR/ 4EBA043CA-C-01 U1000R2V 5G1.5 mm²			BN 1.5 mm²		 1 	WH 2.5 mm²			-Q 298 05:2				
									 2 								
									 3 	WH 1 mm²			-RP 345 11:13				
/347.5	=4CRE196CA+4CRE196CA-X?:?:B			4LKF005AR/ 4CRE196CA-C-01 U1000R2V 5G1.5 mm²			BN 1.5 mm²		 4 								
									 5 								
									 6 	WH 1 mm²			-RP 347 11:13				
									 7 								
									 8 	WH 1 mm²			-K 330 09:11				
									 9 								
									 10 	WH 1 mm²			-K 334 09:11				
									 11 								
									 12 	GY 2.5 mm²			-Q 298 05:4				
									 13 	GY 1 mm²			-RP 345 11:A2				
									 14 	GY 1 mm²			-K 346 05:A2				
									 15 								
									 16 	GY 1 mm²			-RP 347 11:A2				
									 17 	GY 1 mm²			-K 348 05:A2				
									 18 								
									 19 	GY 1 mm²			-HL 377 06:2				
									 20 	GY 1 mm²			-XB 376 03:1:B				
									 21 	GY 1 mm²			-HL 378 06:2				
									 22 	GY 1 mm²			-XB 376 03:2:B				
									 23 								
/345.5	=4EBA043CA+4EBA043CA-X?:?:A			4LKF005AR/ 4EBA043CA-C-01 U1000R2V 5G1.5 mm²			BK 1.5 mm²	,		WH 1 mm²			-RP 365 04:23				

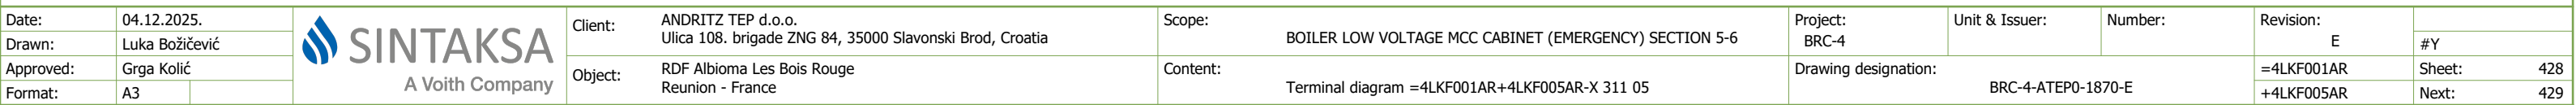






















Terminal diagram

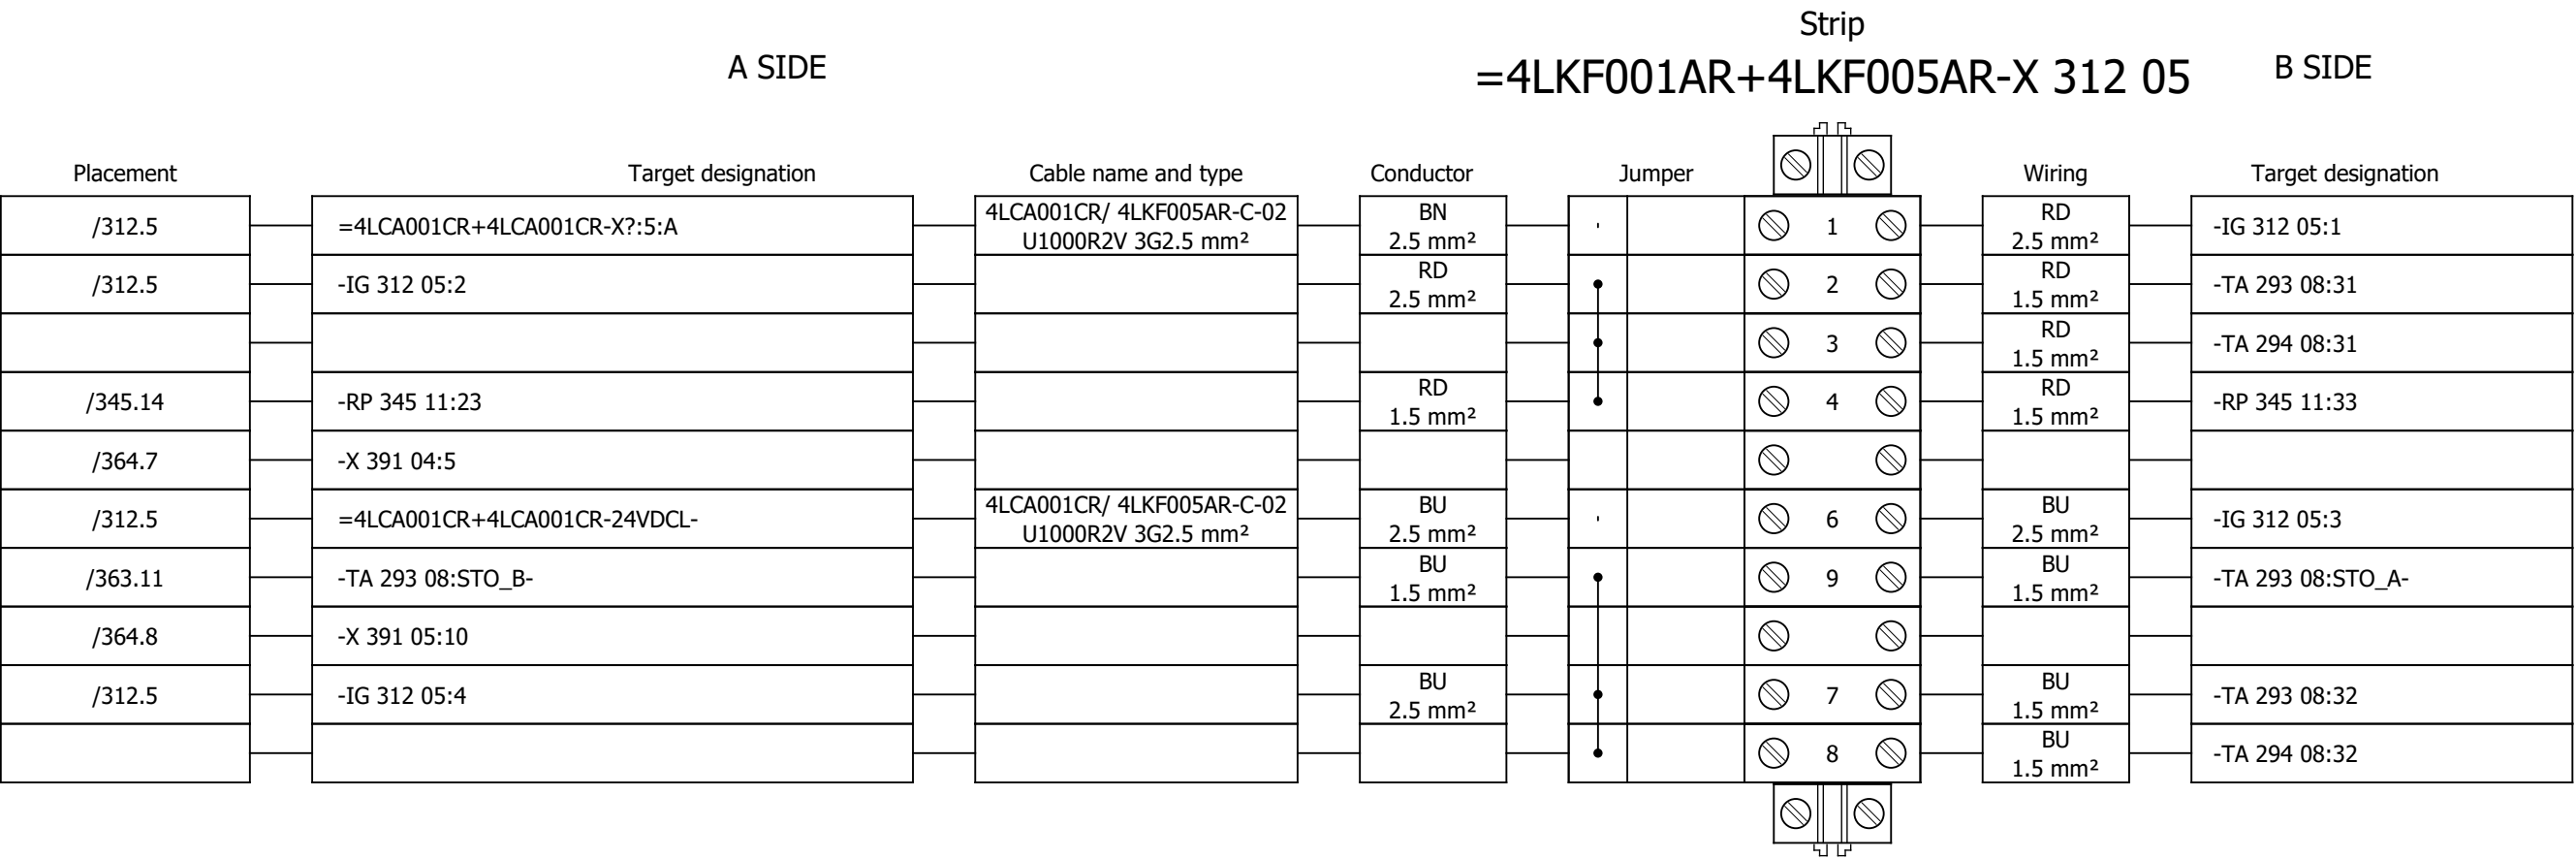


Terminal diagram

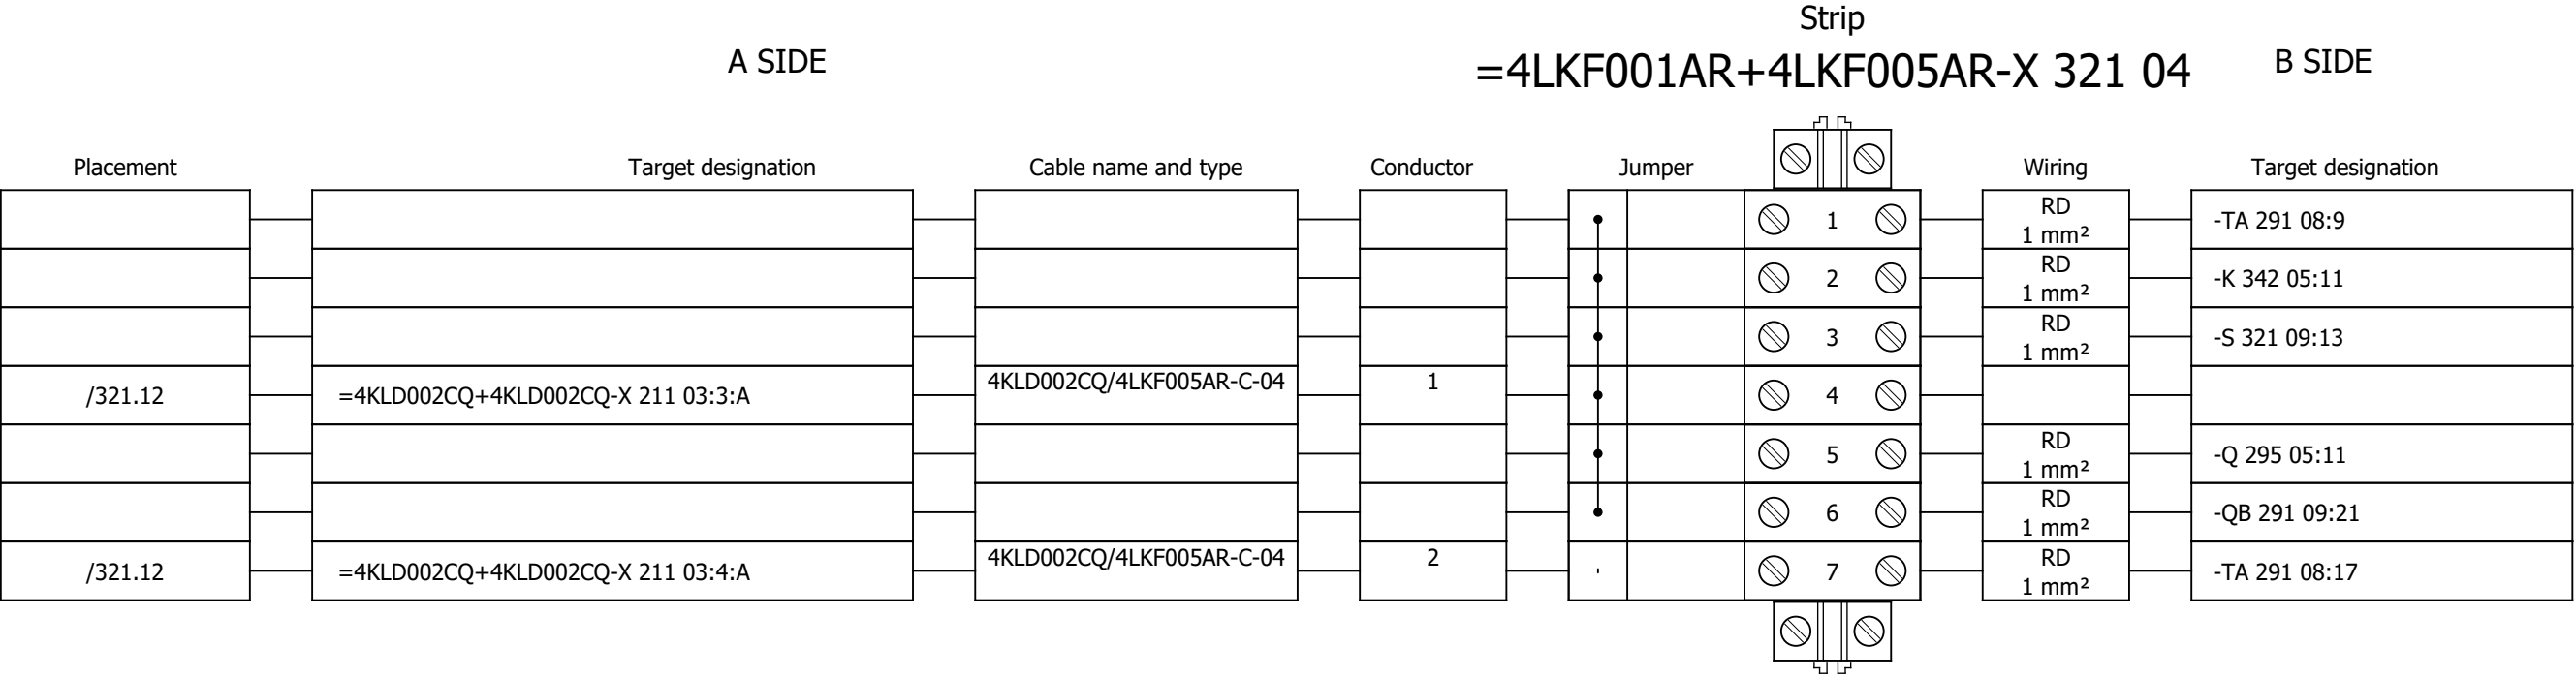



Terminal diagram


A SIDE										Strip		B SIDE					
										=4LKF001AR+4LKF005AR-X 323 05							
Placement	Target designation		Cable name and type		Conductor		Jumper				Wiring	Target designation					
/323.5							,				VT 1 mm²	-TA 291 08:3					
/323.5							,				VT 1 mm²	-TA 291 08:4					
/323.9	1R1:A		4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.75 mm²		1RD 0.75 mm²		,				VT 1 mm²	-TA 291 08:10					
/323.10	1R2:A		4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.75 mm²		1WH 0.75 mm²		,				VT 1 mm²	-TA 291 08:11					
/323.11	2R1:A		4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.75 mm²		2RD 0.75 mm²		,				VT 1 mm²	-TA 291 08:80					
/323.12	2R2:A		4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.75 mm²		2WH 0.75 mm²		,				VT 1 mm²	-TA 291 08:82					
/323.13	3R1:A		4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.75 mm²		3RD 0.75 mm²		,				VT 1 mm²	-TA 291 08:81					
/323.14	3R2:A		4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.75 mm²		3WH 0.75 mm²		,				VT 1 mm²	-TA 291 08:84					
/324.3	=4EBA014PO+4EBA014PO-X:4:A		4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.75 mm²		4RD 0.75 mm²		,				1RD	=4KLD002CQ+4KLD002CQ-X					
/324.4	=4EBA014PO+4EBA014PO-X:6:A		4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.75 mm²		4WH 0.75 mm²		,				1WH	=4KLD002CQ+4KLD002CQ-X					
/324.4	=4EBA014PO+4EBA014PO-X:5:A		4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.75 mm²		5RD 0.75 mm²		,				2RD	=4KLD002CQ+4KLD002CQ-X					
							,										
/324.7	=4EBA014PO+4EBA014PO-X:4:A		4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.75 mm²		5WH 0.75 mm²		,				2WH	=4KLD002CQ+4KLD002CQ-X					
/324.7	=4EBA014PO+4EBA014PO-X:6:A		4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.75 mm²		6RD 0.75 mm²		,				3RD	=4KLD002CQ+4KLD002CQ-X					
/324.8	=4EBA014PO+4EBA014PO-X:5:A		4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.75 mm²		6WH 0.75 mm²		,				3WH	=4KLD002CQ+4KLD002CQ-X					
							,										
/324.11	=4EBA014PO+4EBA014PO-BV?:1+		4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.75 mm²		7RD 0.75 mm²		,				4RD	=4KLD002CQ+4KLD002CQ-X					
/324.11	=4EBA014PO+4EBA014PO-BV?:2-		4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.75 mm²		7WH 0.75 mm²		,				4WH	=4KLD002CQ+4KLD002CQ-X					
/324.15	=4EBA014PO+4EBA014PO-BV?:1+		4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.75 mm²		8RD 0.75 mm²		,				5RD	=4KLD002CQ+4KLD002CQ-X					
/324.15	=4EBA014PO+4EBA014PO-BV?:2-		4LKF005AR/ 4EBA014PO-M-01 08IP09EISF BU 8x2x0.75 mm²		8WH 0.75 mm²		,				5WH	=4KLD002CQ+4KLD002CQ-X					

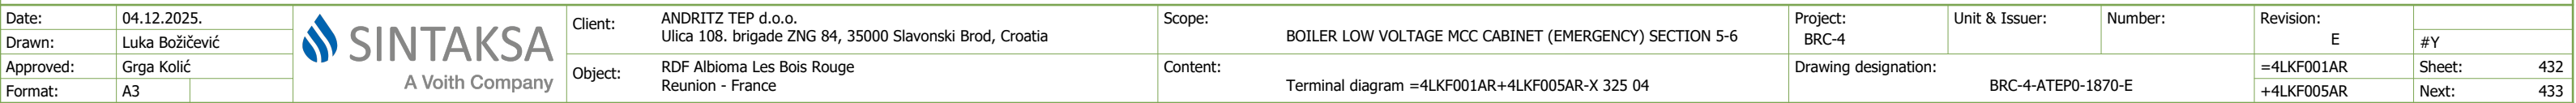



Terminal diagram

A SIDE				Strip				B SIDE			
				=4LKF001AR+4LKF005AR-X 327 05							
Placement	Target designation	Cable name and type	Conductor	Jumper			Wiring			Target designation	
/327.5				'		1	VT 1 mm ²			-TA 292 08:3	
/327.5				'		2	VT 1 mm ²			-TA 292 08:4	
/327.9	1R1:A	4LKF005AR/ 4CRE189MO-M-01 08IP09EISF BU 8x2x0.75 mm ²	1RD 0.75 mm ²	'		3	VT 1 mm ²			-TA 292 08:10	
/327.10	1R2:A	4LKF005AR/ 4CRE189MO-M-01 08IP09EISF BU 8x2x0.75 mm ²	1WH 0.75 mm ²	'		4	VT 1 mm ²			-TA 292 08:11	
/327.11	2R1:A	4LKF005AR/ 4CRE189MO-M-01 08IP09EISF BU 8x2x0.75 mm ²	2RD 0.75 mm ²	'		5	VT 1 mm ²			-TA 292 08:80	
/327.12	2R2:A	4LKF005AR/ 4CRE189MO-M-01 08IP09EISF BU 8x2x0.75 mm ²	2WH 0.75 mm ²	'		6	VT 1 mm ²			-TA 292 08:82	
/327.13	3R1:A	4LKF005AR/ 4CRE189MO-M-01 08IP09EISF BU 8x2x0.75 mm ²	3RD 0.75 mm ²	'		7	VT 1 mm ²			-TA 292 08:81	
/327.14	3R2:A	4LKF005AR/ 4CRE189MO-M-01 08IP09EISF BU 8x2x0.75 mm ²	3WH 0.75 mm ²	'		8	VT 1 mm ²			-TA 292 08:84	
/328.3	=4CRE189MO+4CRE189MO-X:4:A	4LKF005AR/ 4CRE189MO-M-01 08IP09EISF BU 8x2x0.75 mm ²	4RD 0.75 mm ²	'		9	11RD			=4KLD002CQ+4KLD002CQ-X	
/328.4	=4KLD002CQ+4KLD002CQ-X 044 03:10:A	4KLD002CQ/4LKF005AR-M-01	11WH	'		10	4WH 0.75 mm ²			=4CRE189MO+4CRE189MO-X:6:A	
/328.4	=4KLD002CQ+4KLD002CQ-X 044 03:11:A	4KLD002CQ/4LKF005AR-M-01	12RD	'		11	5RD 0.75 mm ²			=4CRE189MO+4CRE189MO-X:5:A	
				'		12					
/328.7	=4KLD002CQ+4KLD002CQ-X 044 03:13:A	4KLD002CQ/4LKF005AR-M-02	1RD	'		13	5WH 0.75 mm ²			=4CRE189MO+4CRE189MO-X:4:A	
/328.7	=4KLD002CQ+4KLD002CQ-X 044 03:14:A	4KLD002CQ/4LKF005AR-M-02	1WH	'		14	6RD 0.75 mm ²			=4CRE189MO+4CRE189MO-X:6:A	
/328.8	=4KLD002CQ+4KLD002CQ-X 044 03:15:A	4KLD002CQ/4LKF005AR-M-02	2RD	'		15	6WH 0.75 mm ²			=4CRE189MO+4CRE189MO-X:5:A	
				'		16					
/328.11	=4KLD002CQ+4KLD002CQ-X 043 16:7:A	4KLD002CQ/4LKF005AR-M-01	9RD	'		17	7RD 0.75 mm ²			=4CRE189MO+4CRE189MO-BV?:1+	
/328.11	=4KLD002CQ+4KLD002CQ-X 043 16:25:A	4KLD002CQ/4LKF005AR-M-01	9WH	'		18	7WH 0.75 mm ²			=4CRE189MO+4CRE189MO-BV?:2-	
/328.15	=4KLD002CQ+4KLD002CQ-X 044 03:2:A	4KLD002CQ/4LKF005AR-M-01	10RD	'		19	8RD 0.75 mm ²			=4CRE189MO+4CRE189MO-BV?:1+	
/328.15	=4KLD002CQ+4KLD002CQ-X 044 03:8:A	4KLD002CQ/4LKF005AR-M-01	10WH	'		20	8WH 0.75 mm ²			=4CRE189MO+4CRE189MO-BV?:2-	




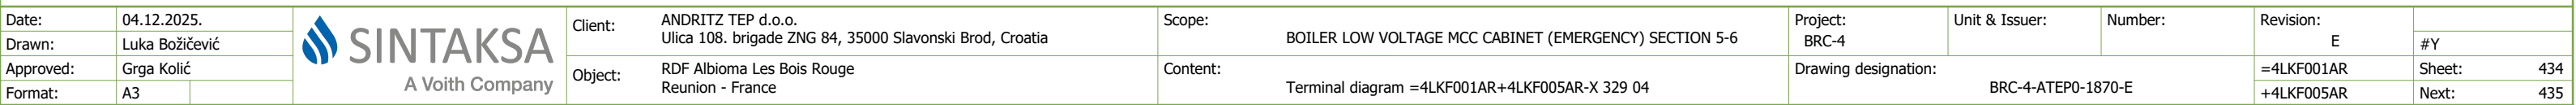



Terminal diagram

A SIDE					Strip					=4LKF001AR+4LKF005AR-X 331 05					B SIDE				
Placement		Target designation		Cable name and type		Conductor		Jumper				Wiring		Target designation					
/331.5								,		 1 		VT 1 mm ²		-TA 293 08:3					
/331.5								,		 2 		VT 1 mm ²		-TA 293 08:4					
/331.9			1R1:A		4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.75 mm ²		1RD 0.75 mm ²	,		 3 		VT 1 mm ²		-TA 293 08:10					
/331.10			1R2:A		4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.75 mm ²		1WH 0.75 mm ²	,		 4 		VT 1 mm ²		-TA 293 08:11					
/331.11			2R1:A		4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.75 mm ²		2RD 0.75 mm ²	,		 5 		VT 1 mm ²		-TA 293 08:80					
/331.12			2R2:A		4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.75 mm ²		2WH 0.75 mm ²	,		 6 		VT 1 mm ²		-TA 293 08:82					
/331.13			3R1:A		4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.75 mm ²		3RD 0.75 mm ²	,		 7 		VT 1 mm ²		-TA 293 08:81					
/331.14			3R2:A		4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.75 mm ²		3WH 0.75 mm ²	,		 8 		VT 1 mm ²		-TA 293 08:84					
/332.3			=4EBA043PO+4EBA043PO-X:4:A		4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.75 mm ²		4RD 0.75 mm ²	,		 9 		1RD		=4KLD002CQ+4KLD002CQ-X					
/332.4			=4EBA043PO+4EBA043PO-X:6:A		4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.75 mm ²		4WH 0.75 mm ²	,		 10 		1WH		=4KLD002CQ+4KLD002CQ-X					
/332.4			=4EBA043PO+4EBA043PO-X:5:A		4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.75 mm ²		5RD 0.75 mm ²	,		 11 		2RD		=4KLD002CQ+4KLD002CQ-X					
								,		 12 									
/332.7			=4EBA043PO+4EBA043PO-X:4:A		4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.75 mm ²		5WH 0.75 mm ²	,		 13 		2WH		=4KLD002CQ+4KLD002CQ-X					
/332.7			=4EBA043PO+4EBA043PO-X:6:A		4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.75 mm ²		6RD 0.75 mm ²	,		 14 		3RD		=4KLD002CQ+4KLD002CQ-X					
/332.8			=4EBA043PO+4EBA043PO-X:5:A		4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.75 mm ²		6WH 0.75 mm ²	,		 15 		3WH		=4KLD002CQ+4KLD002CQ-X					
								,		 16 									
/332.11			=4EBA043PO+4EBA043PO-BV?:1+		4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.75 mm ²		7RD 0.75 mm ²	,		 17 		4RD		=4KLD002CQ+4KLD002CQ-X					
/332.11			=4EBA043PO+4EBA043PO-BV?:2-		4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.75 mm ²		7WH 0.75 mm ²	,		 18 		4WH		=4KLD002CQ+4KLD002CQ-X					
/332.15			=4EBA043PO+4EBA043PO-BV?:1+		4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.75 mm ²		8RD 0.75 mm ²	,		 19 		5RD		=4KLD002CQ+4KLD002CQ-X					
/332.15			=4EBA043PO+4EBA043PO-BV?:2-		4LKF005AR/ 4EBA043PO-M-01 08IP09EISF BU 8x2x0.75 mm ²		8WH 0.75 mm ²	,		 20 		5WH		=4KLD002CQ+4KLD002CQ-X					
																			


Terminal diagram

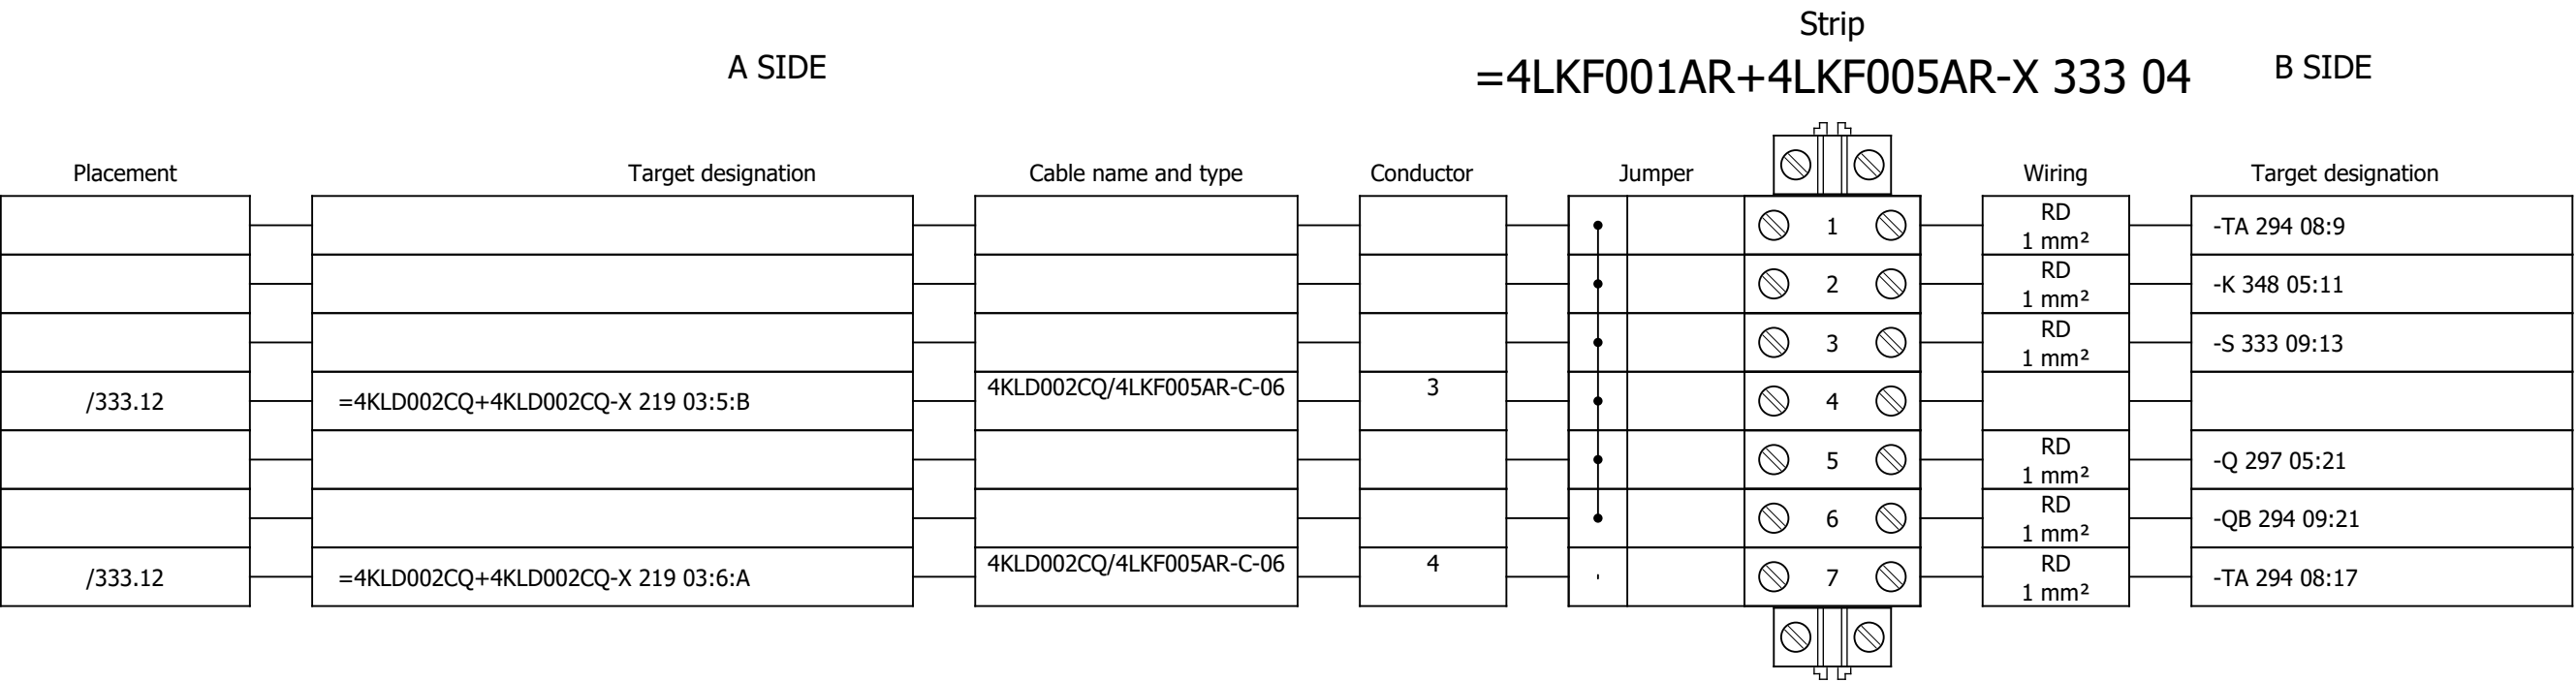


Terminal diagram

A SIDE				Strip				=4LKF001AR+4LKF005AR-X 335 05				B SIDE			
Placement		Target designation		Cable name and type		Conductor		Jumper				Wiring		Target designation	
/335.5								,			1		VT 1 mm²		-TA 294 08:3
/335.5								,			2		VT 1 mm²		-TA 294 08:4
/335.9			1R1:A		4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.75 mm²		1RD 0.75 mm²	,			3		VT 1 mm²		-TA 294 08:10
/335.10			1R2:A		4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.75 mm²		1WH 0.75 mm²	,			4		VT 1 mm²		-TA 294 08:11
/335.11			2R1:A		4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.75 mm²		2RD 0.75 mm²	,			5		VT 1 mm²		-TA 294 08:80
/335.12			2R2:A		4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.75 mm²		2WH 0.75 mm²	,			6		VT 1 mm²		-TA 294 08:82
/335.13			3R1:A		4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.75 mm²		3RD 0.75 mm²	,			7		VT 1 mm²		-TA 294 08:81
/335.14			3R2:A		4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.75 mm²		3WH 0.75 mm²	,			8		VT 1 mm²		-TA 294 08:84
/336.3			=4CRE196MO+4CRE196MO-X:4:A		4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.75 mm²		4RD 0.75 mm²	,			9				=4KLD002CQ+4KLD002CQ-X
/336.4			=4CRE196MO+4CRE196MO-X:6:A		4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.75 mm²		4WH 0.75 mm²	,			10				=4KLD002CQ+4KLD002CQ-X
/336.4			=4CRE196MO+4CRE196MO-X:5:A		4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.75 mm²		5RD 0.75 mm²	,			11				=4KLD002CQ+4KLD002CQ-X
								,			12				
/336.7			=4CRE196MO+4CRE196MO-X:4:A		4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.75 mm²		5WH 0.75 mm²	,			13				=4KLD002CQ+4KLD002CQ-X
/336.7			=4CRE196MO+4CRE196MO-X:6:A		4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.75 mm²		6RD 0.75 mm²	,			14				=4KLD002CQ+4KLD002CQ-X
/336.8			=4CRE196MO+4CRE196MO-X:5:A		4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.75 mm²		6WH 0.75 mm²	,			15				=4KLD002CQ+4KLD002CQ-X
								,			16				
/336.11			=4CRE196MO+4CRE196MO-BV?:1+		4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.75 mm²		7RD 0.75 mm²	,			17				=4KLD002CQ+4KLD002CQ-X
/336.11			=4CRE196MO+4CRE196MO-BV?:2-		4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.75 mm²		7WH 0.75 mm²	,			18				=4KLD002CQ+4KLD002CQ-X
/336.15			=4CRE196MO+4CRE196MO-BV?:1+		4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.75 mm²		8RD 0.75 mm²	,			19				=4KLD002CQ+4KLD002CQ-X
/336.15			=4CRE196MO+4CRE196MO-BV?:2-		4LKF005AR/ 4CRE196MO-M-01 08IP09EISF BU 8x2x0.75 mm²		8WH 0.75 mm²	,			20				=4KLD002CQ+4KLD002CQ-X
															

Terminal diagram

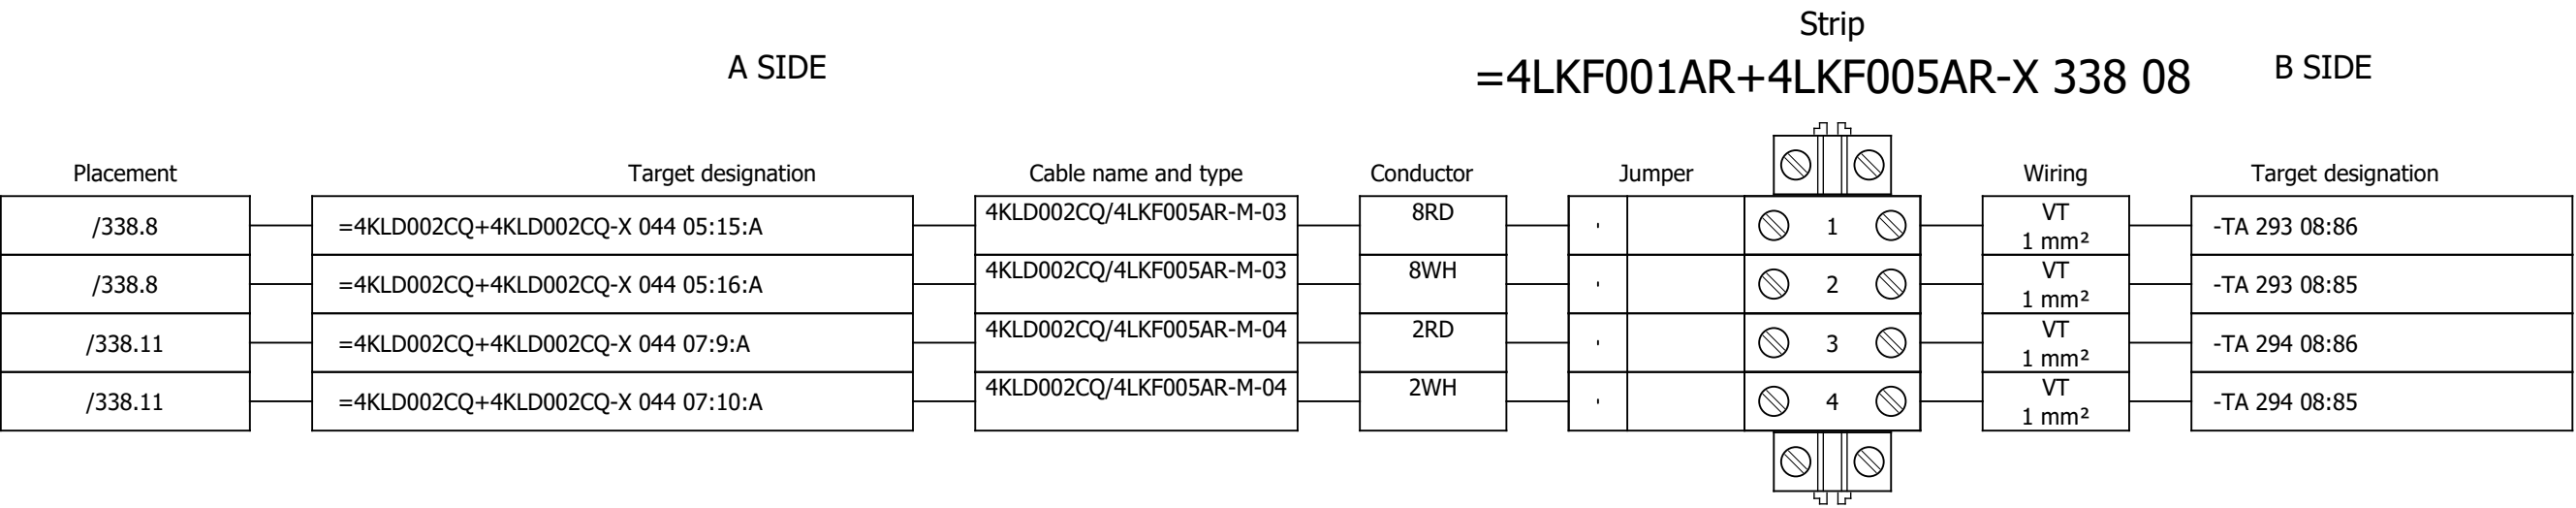


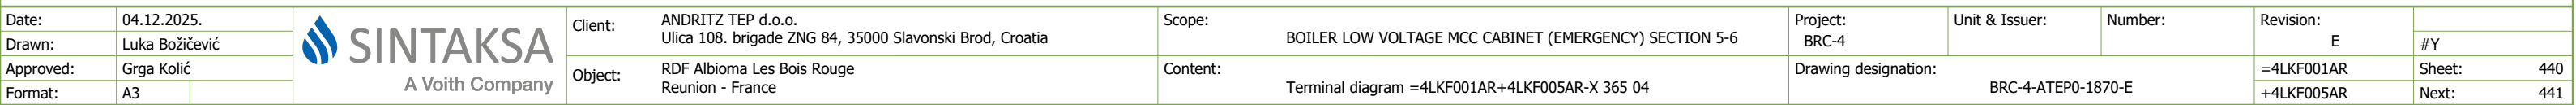



Strip
=4LKF001AR+4LKF005AR-X 371 04 B SIDE

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6		Project:	BRC-4	Unit & Issuer:		Number:		Revision:	E	
Drawn:	Luka Božičević																#Y
Approved:	Grga Kolić				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	Terminal diagram =4LKF001AR+4LKF005AR-X 371 04		Drawing designation:					=4LKF001AR	Sheet:	441
Format:	A3									BRC-4-ATEP0-1870-E					+4LKF005AR	Next:	442

Terminal diagram

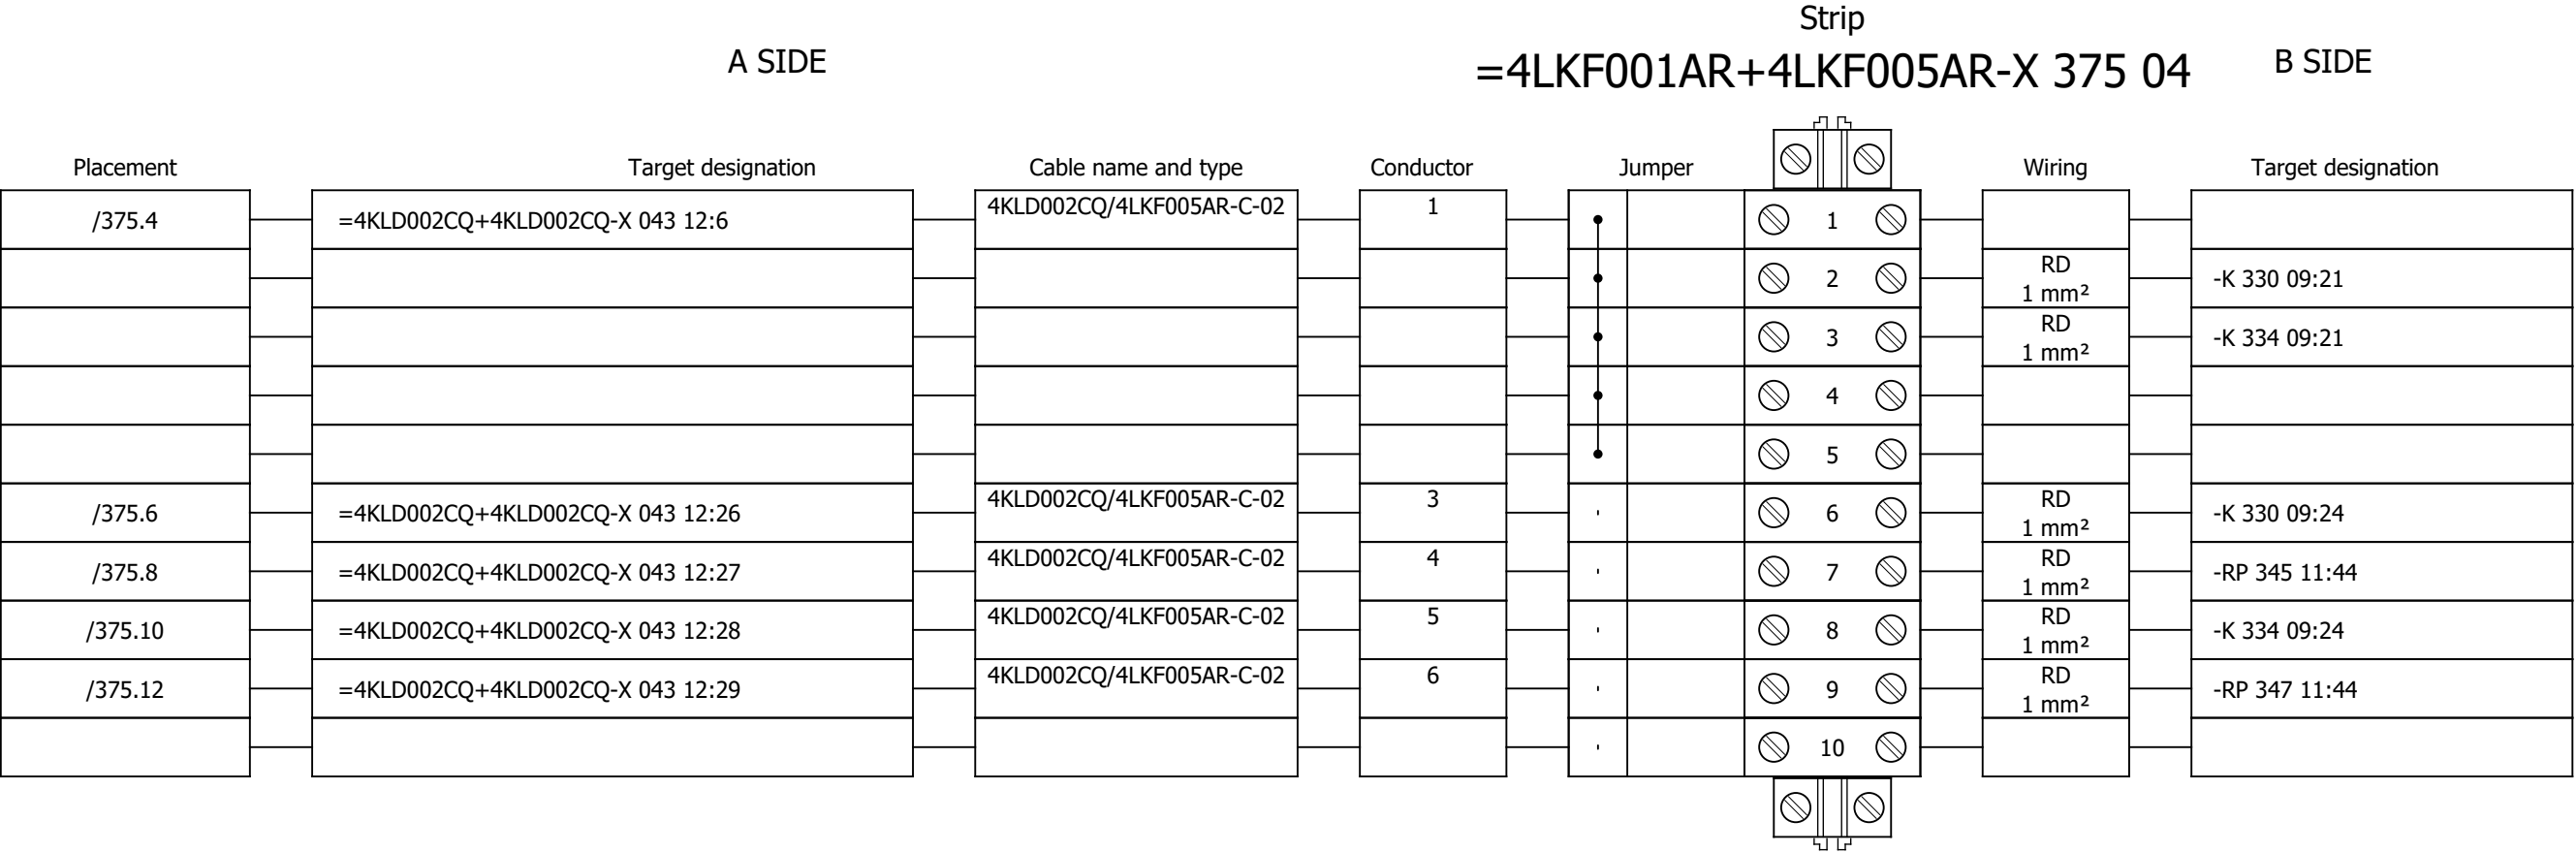


Terminal diagram

A SIDE												Strip						B SIDE	
												=4LKF001AR+4LKF005AR-X 391 03							
Placement	Target designation				Cable name and type				Conductor	Jumper				Wiring	Target designation				
										,		 1 							
										,		 2 							
										,		 3 							
										,		 4 							
										,		 5 							
										,		 6 							
										,		 7 							
										,		 8 							
										,		 9 							
										,		 10 							
										,		 11 							
										,		 12 							
																			

Terminal diagram

Strip									
A SIDE					B SIDE				
=4LKF001AR+4LKF005AR-X 391 04									
Placement	Target designation	Cable name and type	Conductor	Jumper	Wiring	Target designation			
/347.14	-RP 347 11:23		RD 1.5 mm²	·	 5 	-RP 347 11:33			
/363.7	-X 312 05:4				 1 				
				·	 7 				
				·	 2 				
				·	 8 				
				·	 3 				
				·	 9 				
				·	 4 				
				·	 10 				
				·	 5 				
				·	 11 				
				·	 6 				
				·	 12 				
				·	 13 				
				·	 14 				
				·	 15 				
				·	 16 				
				·	 17 				
				·	 18 				
				·	 19 				
				·	 20 				
				·	 21 				
				·	 22 				
				·	 23 				

Terminal diagram

Strip																	
A SIDE									B SIDE								
Placement	Target designation			Cable name and type			Conductor	Jumper		Wiring	Target designation						
/347.14	-RP 347 11:23						RD 1.5 mm²	.	 5 	RD 1.5 mm²	-RP 347 11:33						
/363.7	-X 312 05:4								 1 								
								•	 7 								
								•	 2 								
								•	 8 								
								•	 3 								
								•	 9 								
								•	 4 								
								•	 10 								
								•	 5 								
								•	 11 								
								•	 6 								
								•	 12 								
								•	 13 								
								•	 14 								
								•	 15 								
								•	 16 								
								•	 17 								
								•	 18 								
								•	 19 								
								•	 20 								
								•	 21 								
								•	 22 								
								•	 23 								


Strip
=4LKF001AR+4LKF005AR-X 391 05 B SIDE

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 5-6		Project:	BRC-4	Unit & Issuer:	Number:	Revision:	E	
Drawn:	Luka Božičević														#Y
Approved:	Grga Kolić														
Format:	A3				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	Terminal diagram =4LKF001AR+4LKF005AR-X 391 05		Drawing designation:		BRC-4-ATEP0-1870-E		=4LKF001AR	Sheet:
													+4LKF005AR	Next:	447


Terminal diagram

Strip									
A SIDE					B SIDE				
=4LKF001AR+4LKF005AR-X 391 05									
Placement	Target designation	Cable name and type	Conductor	Jumper	Wiring	Target designation			
/364.11	-TA 294 08:STO_B-		BU 1.5 mm²		BU 1.5 mm²	-TA 294 08:STO_A-			
/363.8	-X 312 05:9								
						</			


Terminal diagram

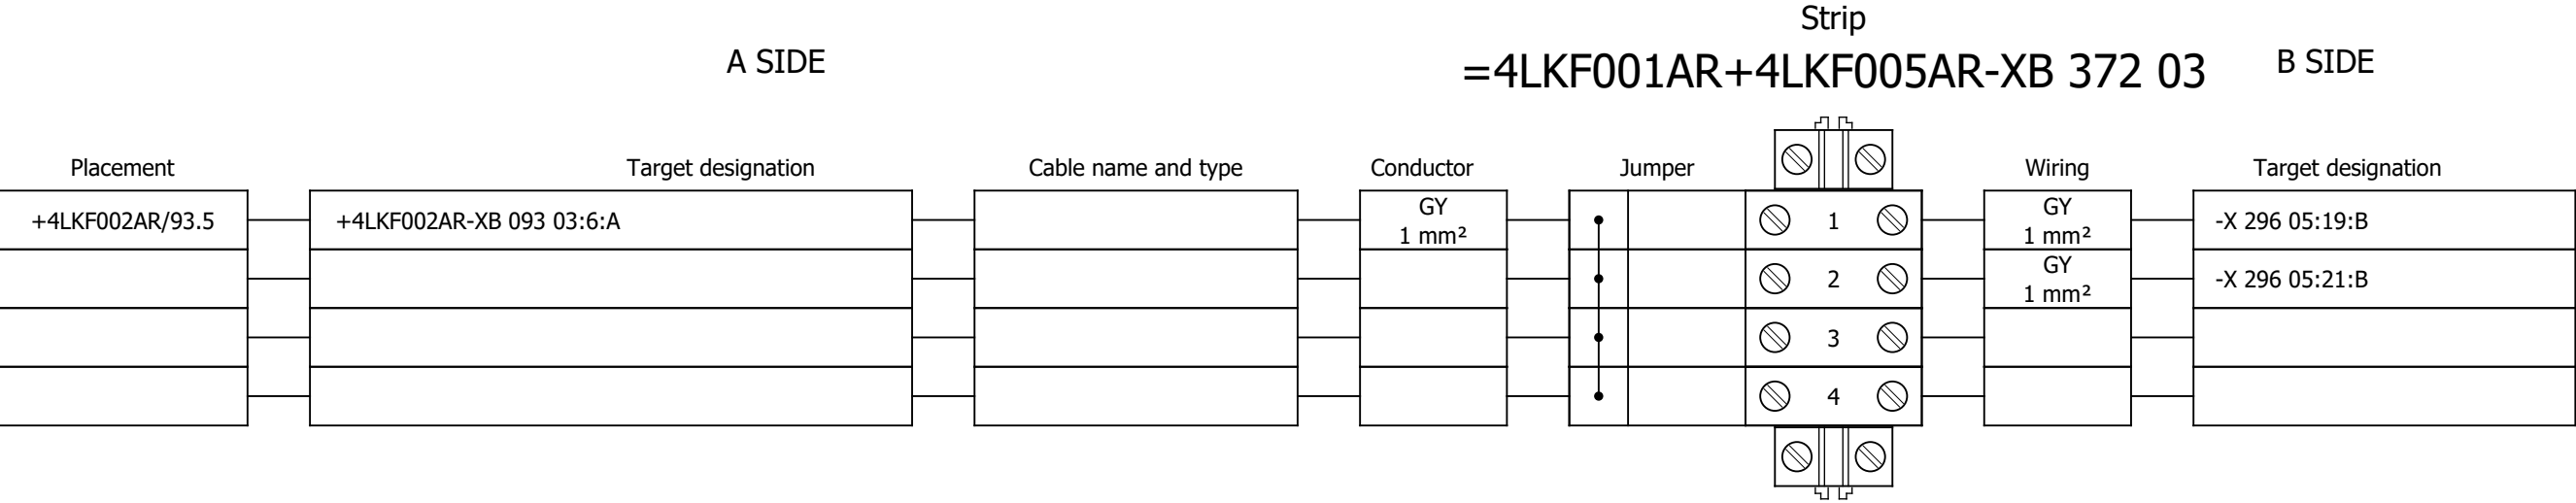


Terminal diagram

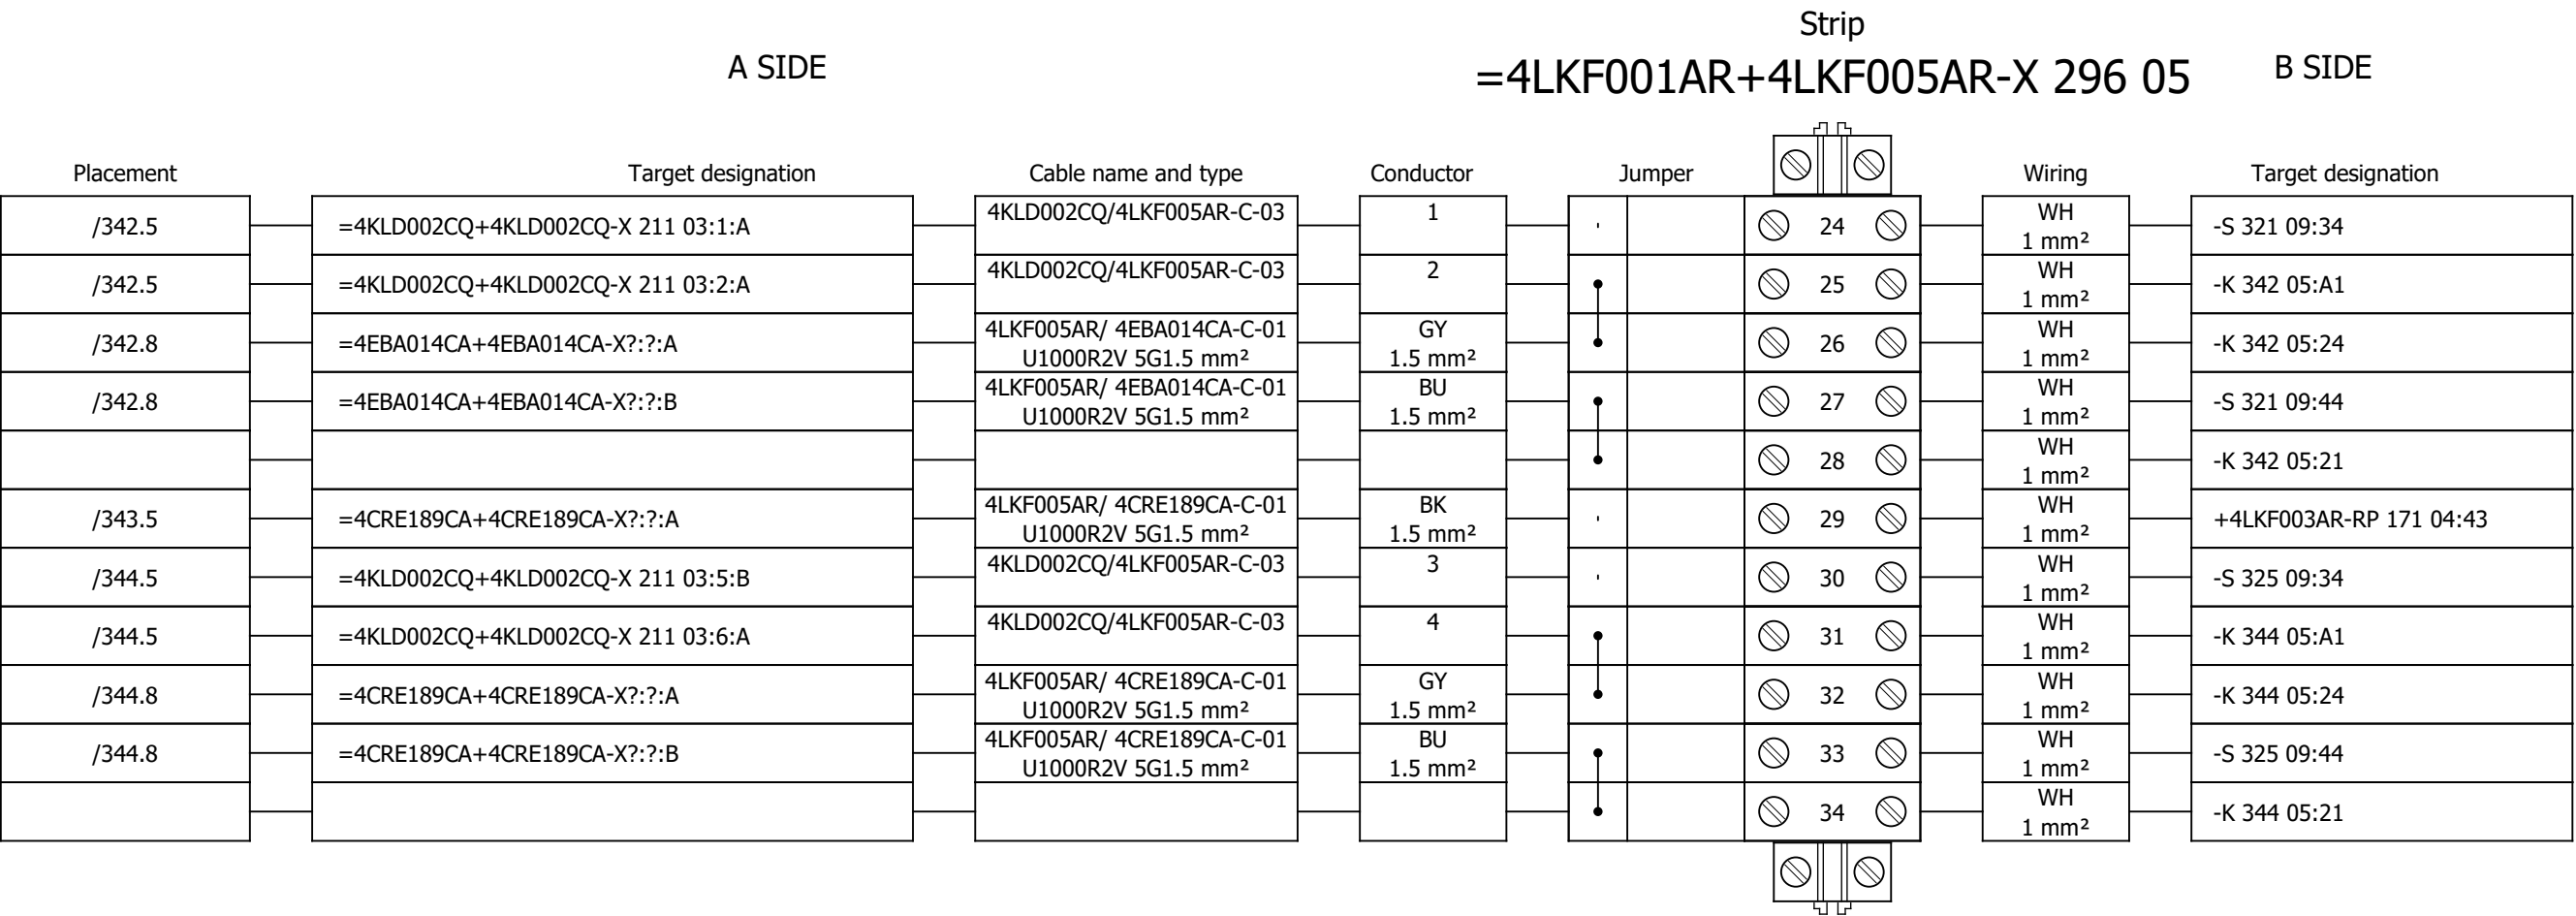


Terminal diagram

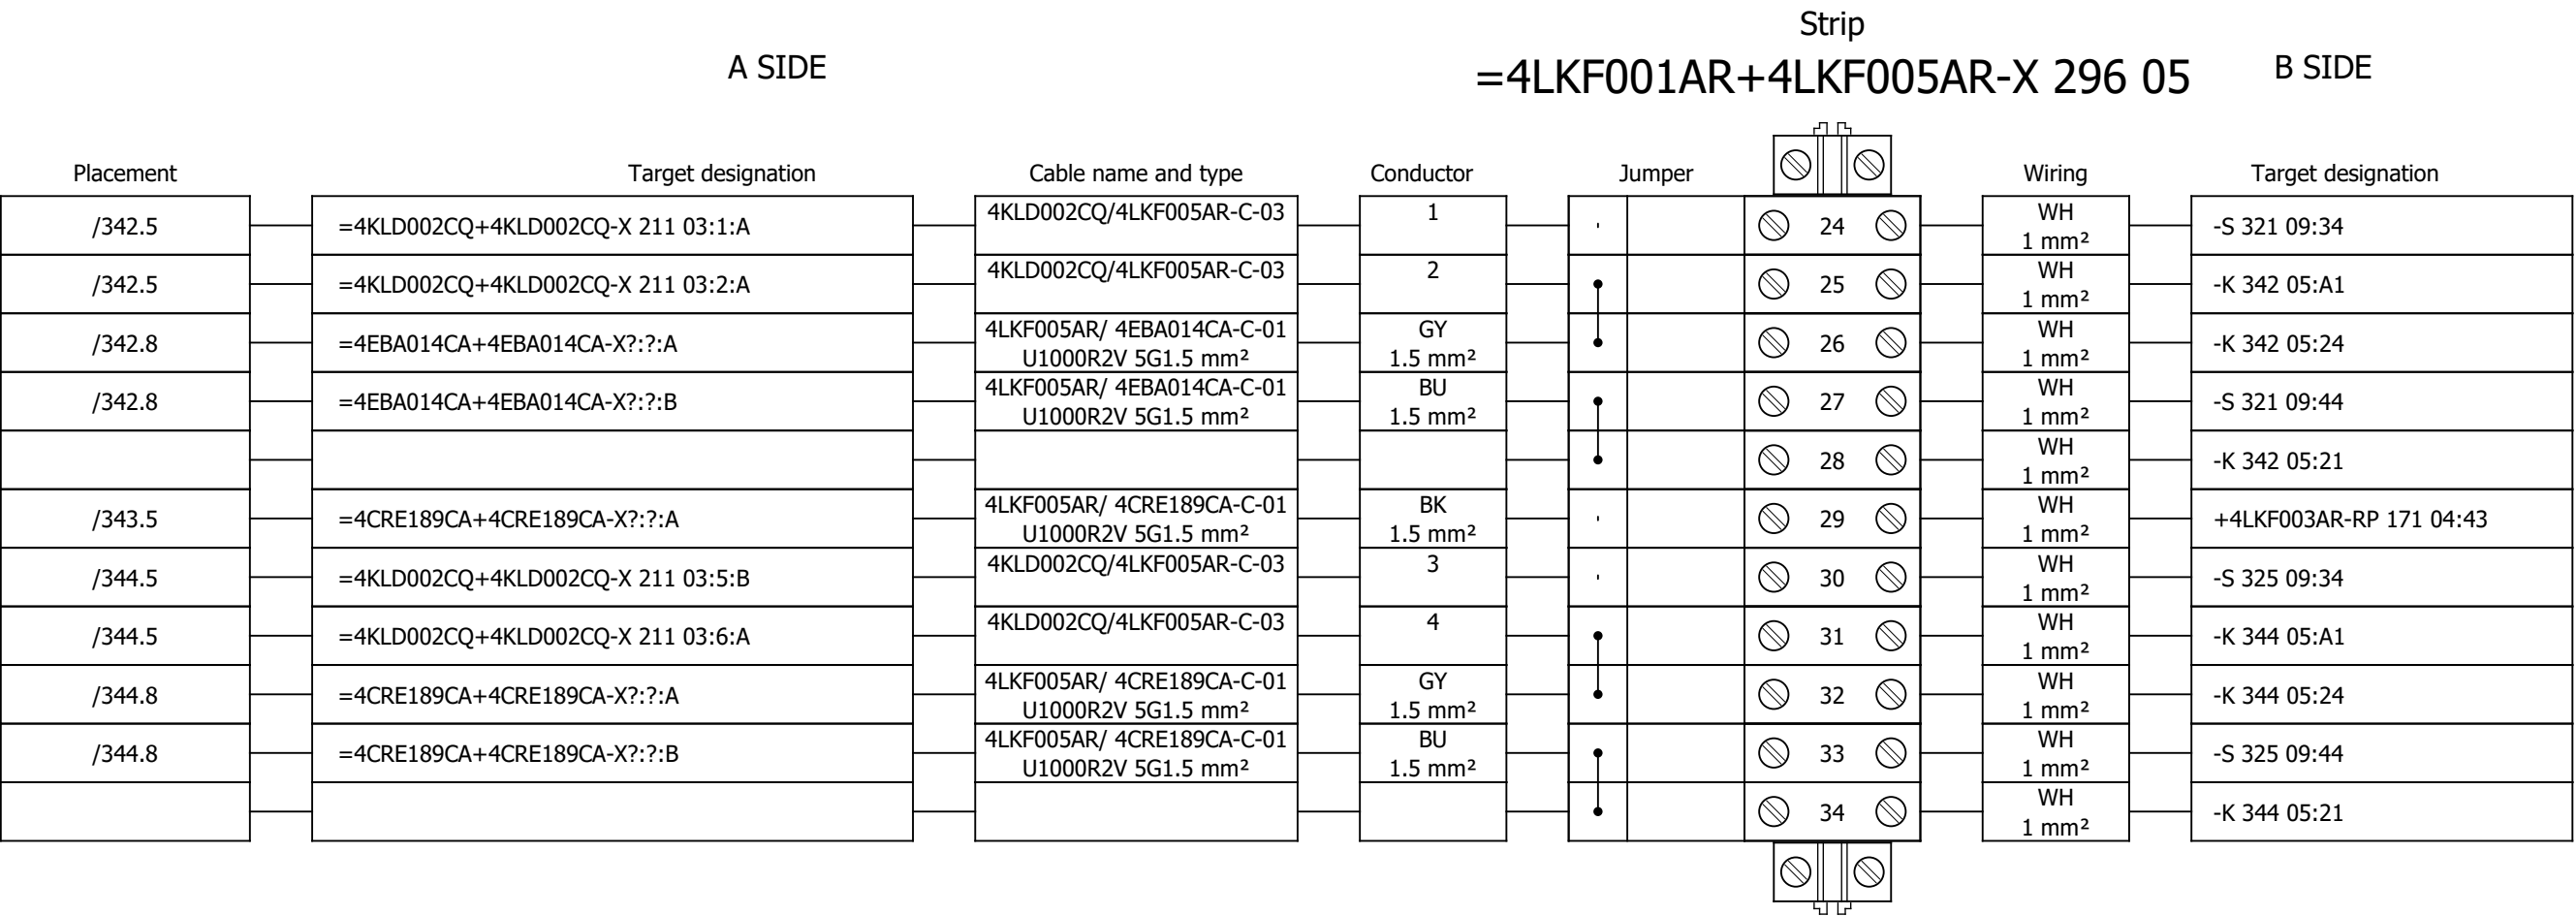


Terminal diagram

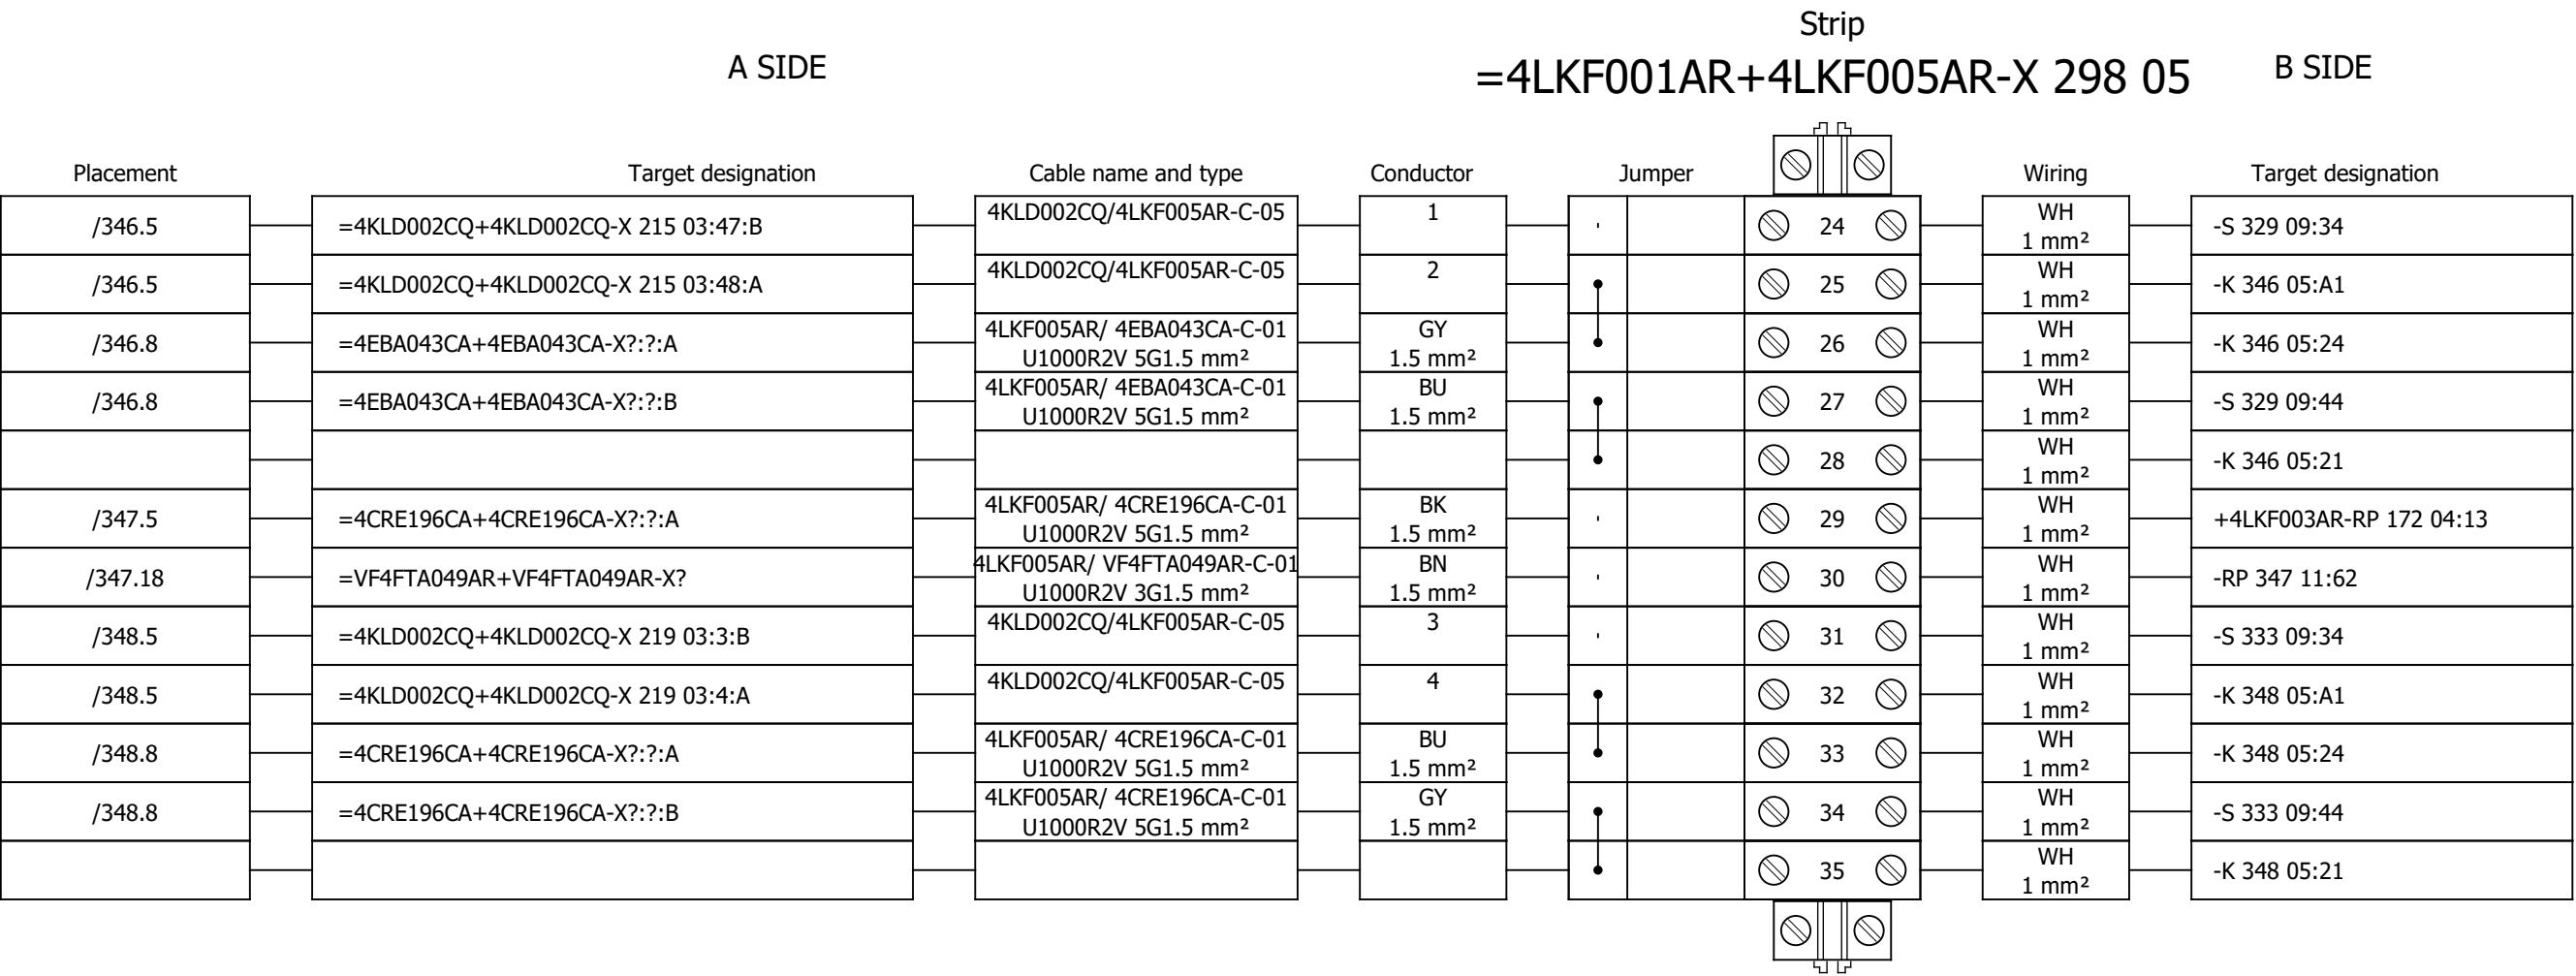


Terminal diagram

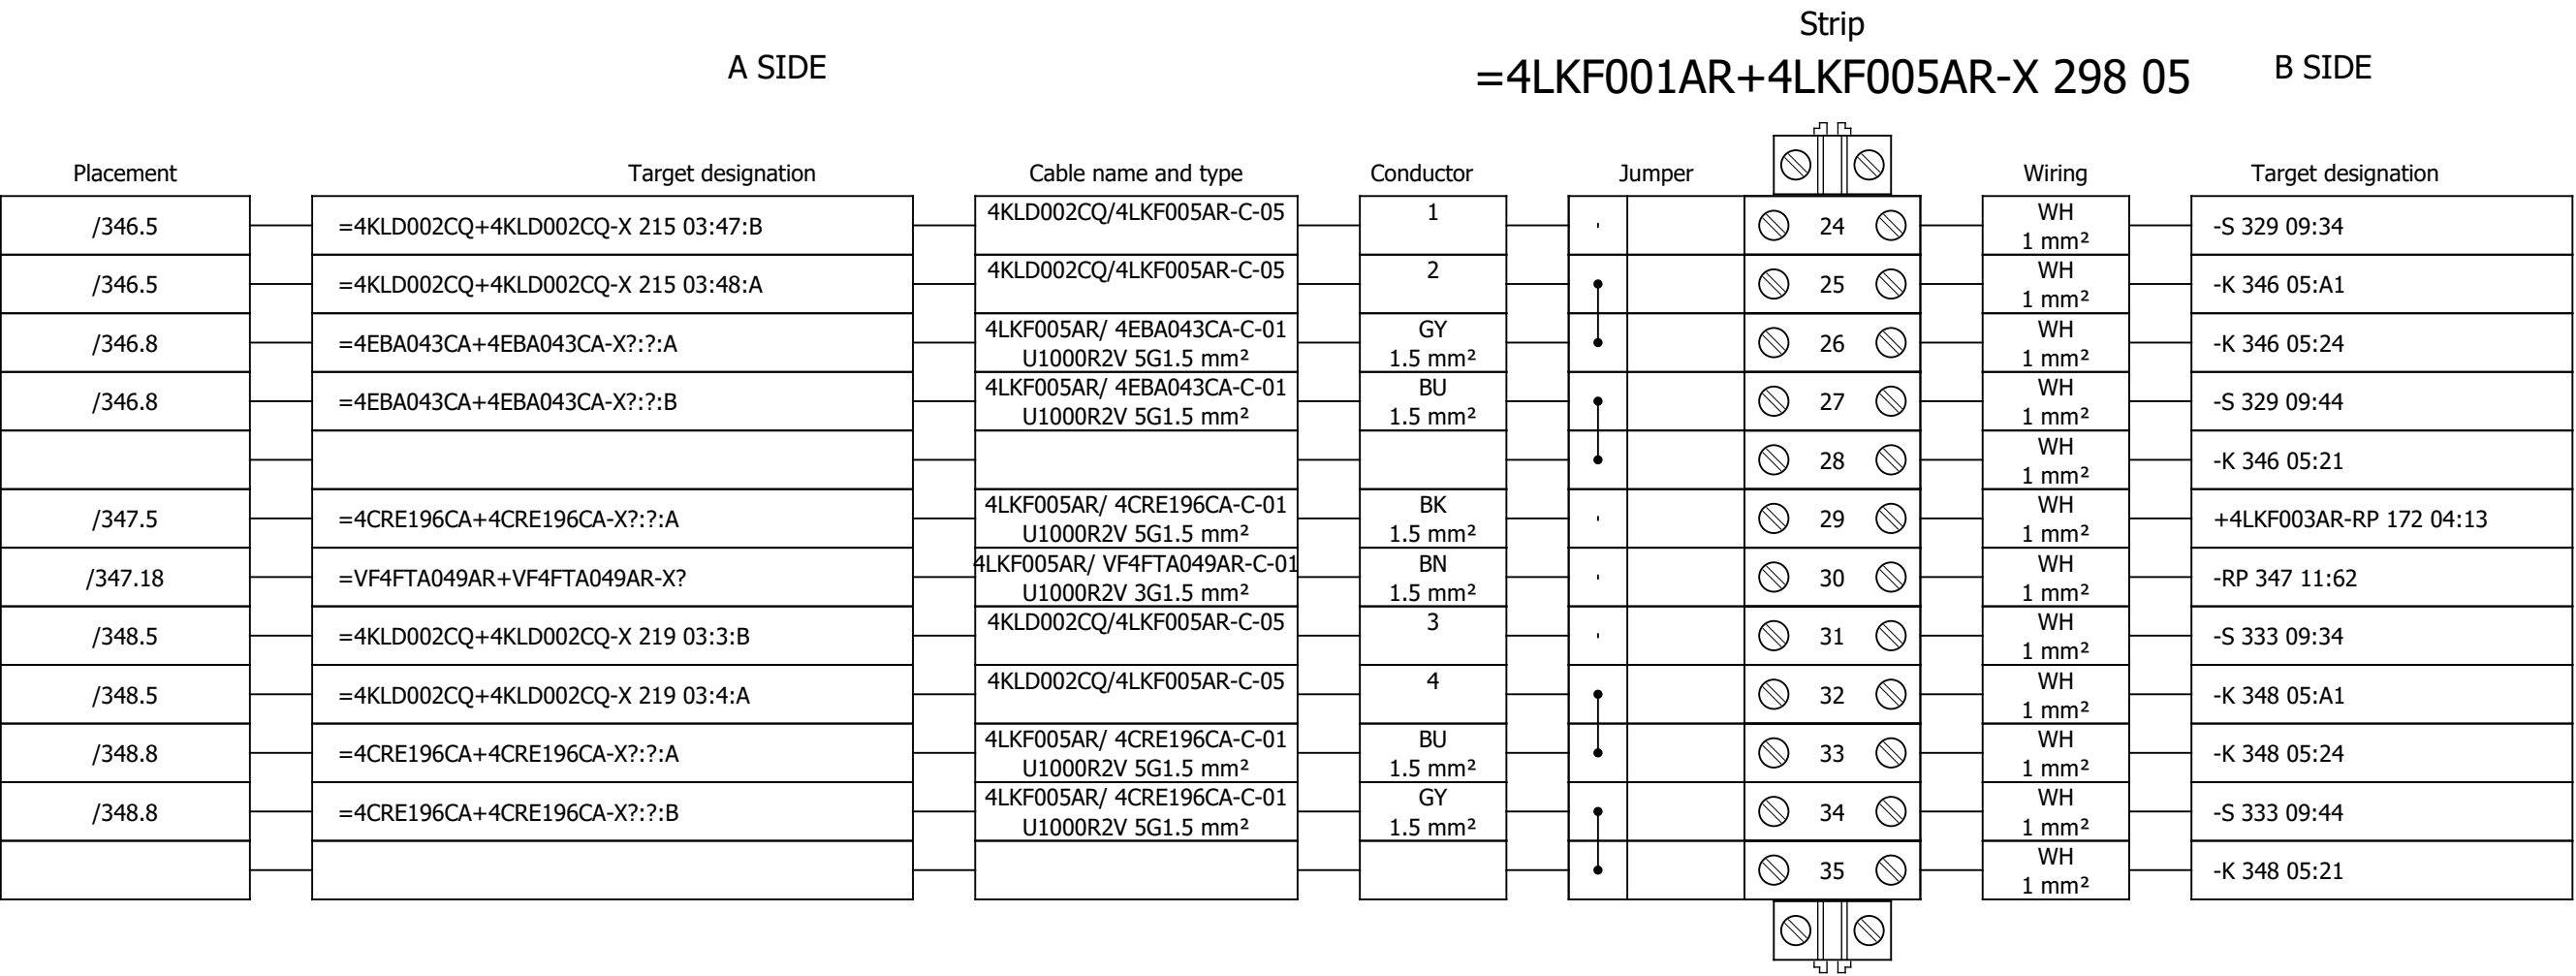


Terminal diagram

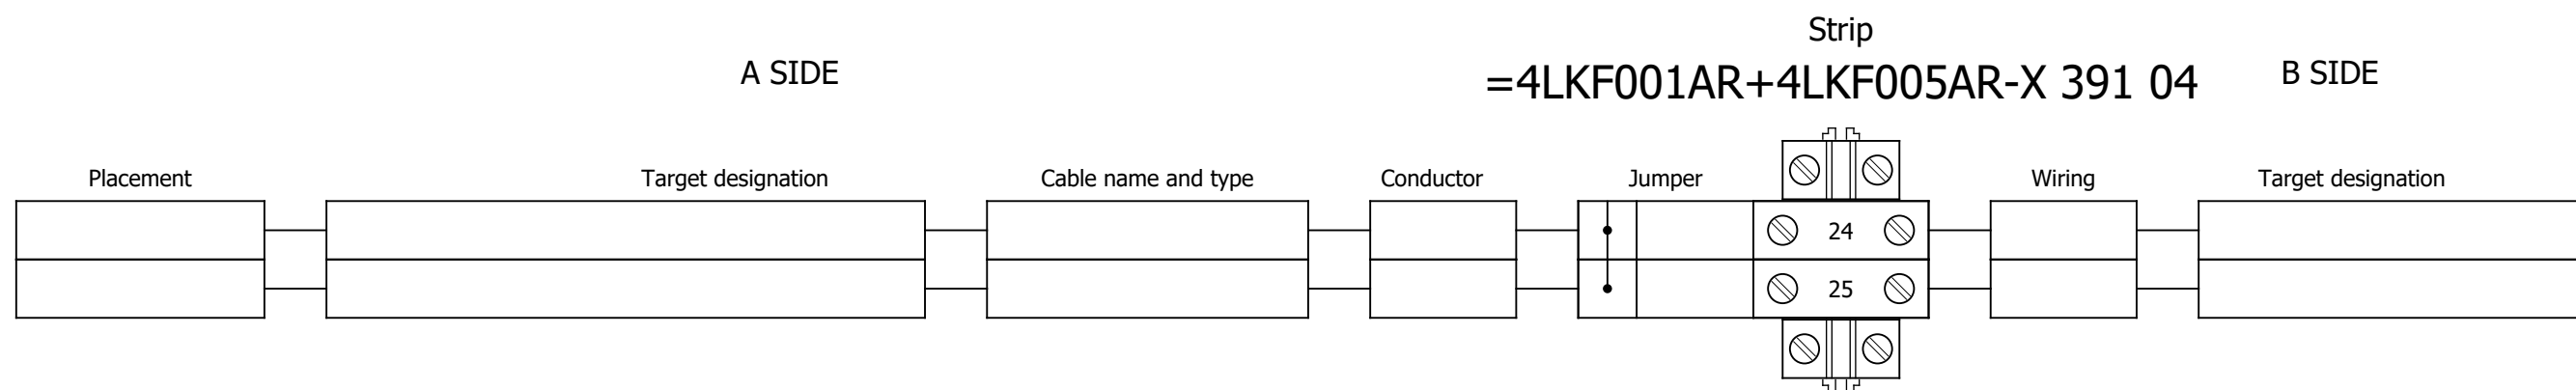


Terminal diagram

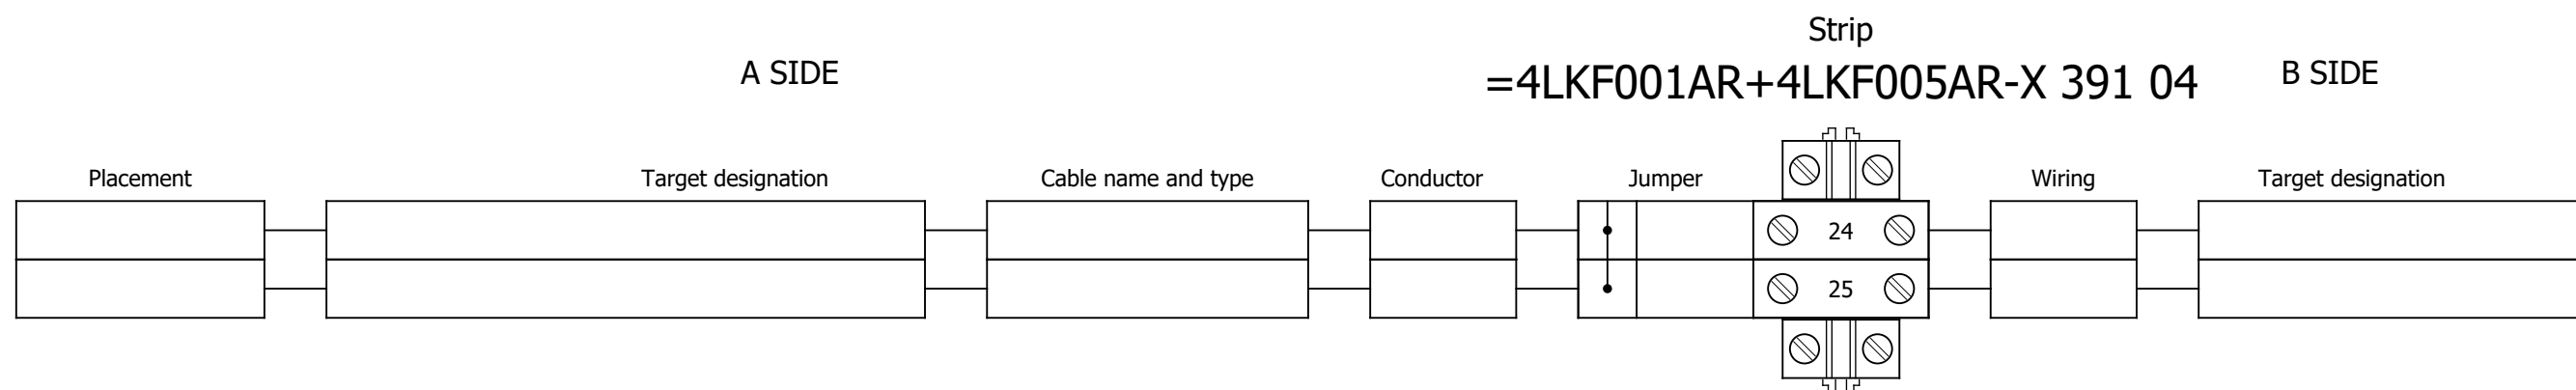


Terminal diagram

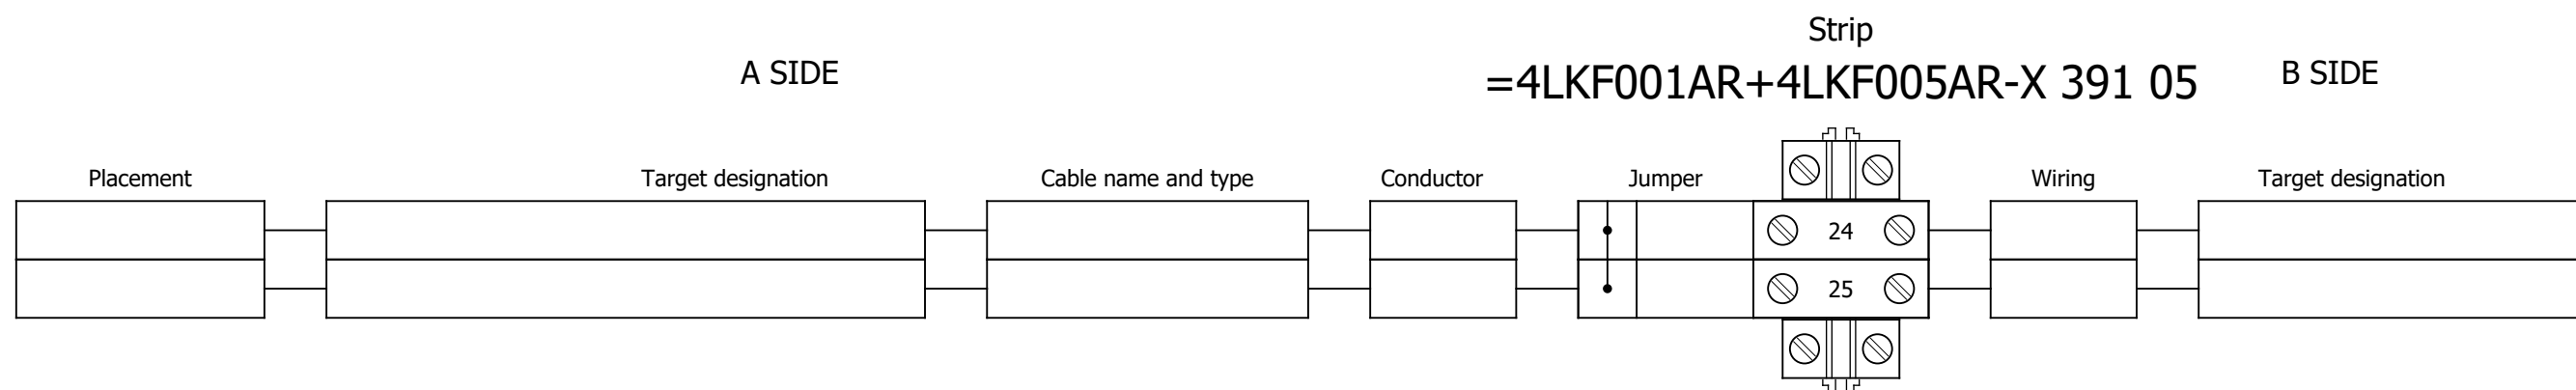


Terminal diagram

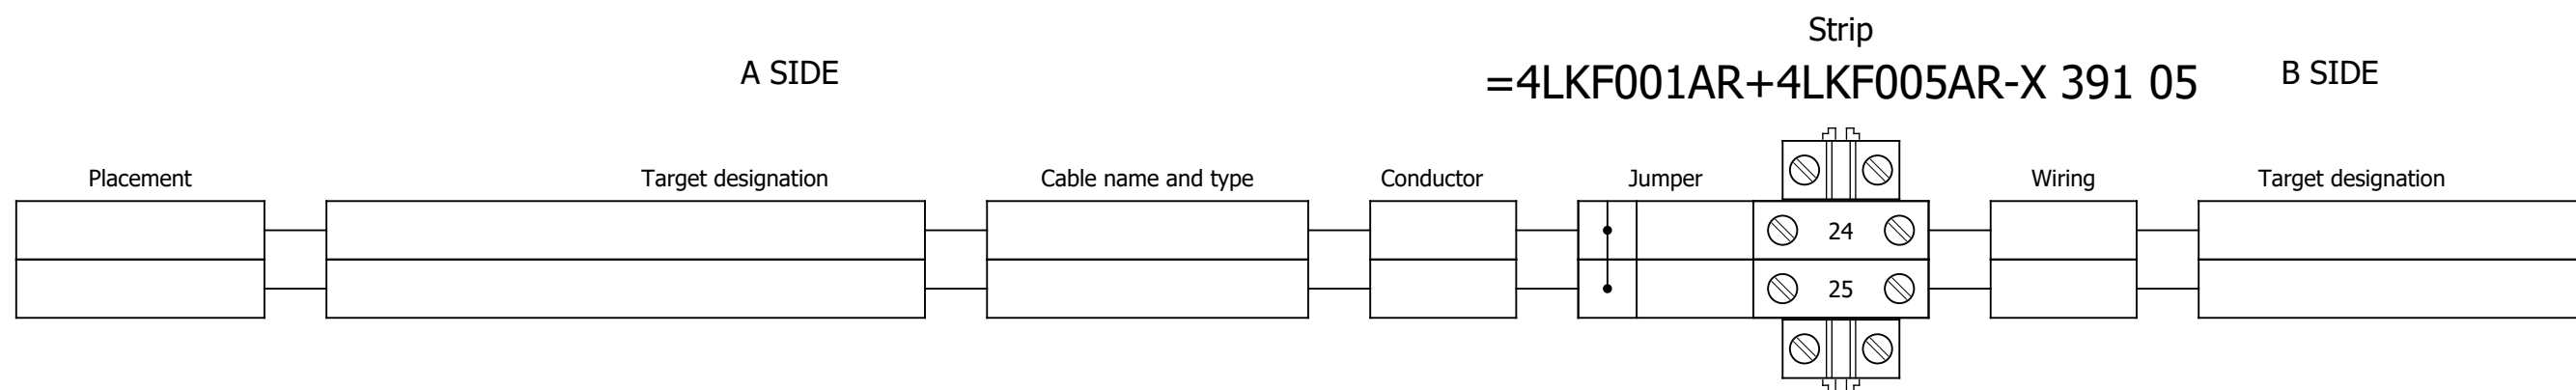


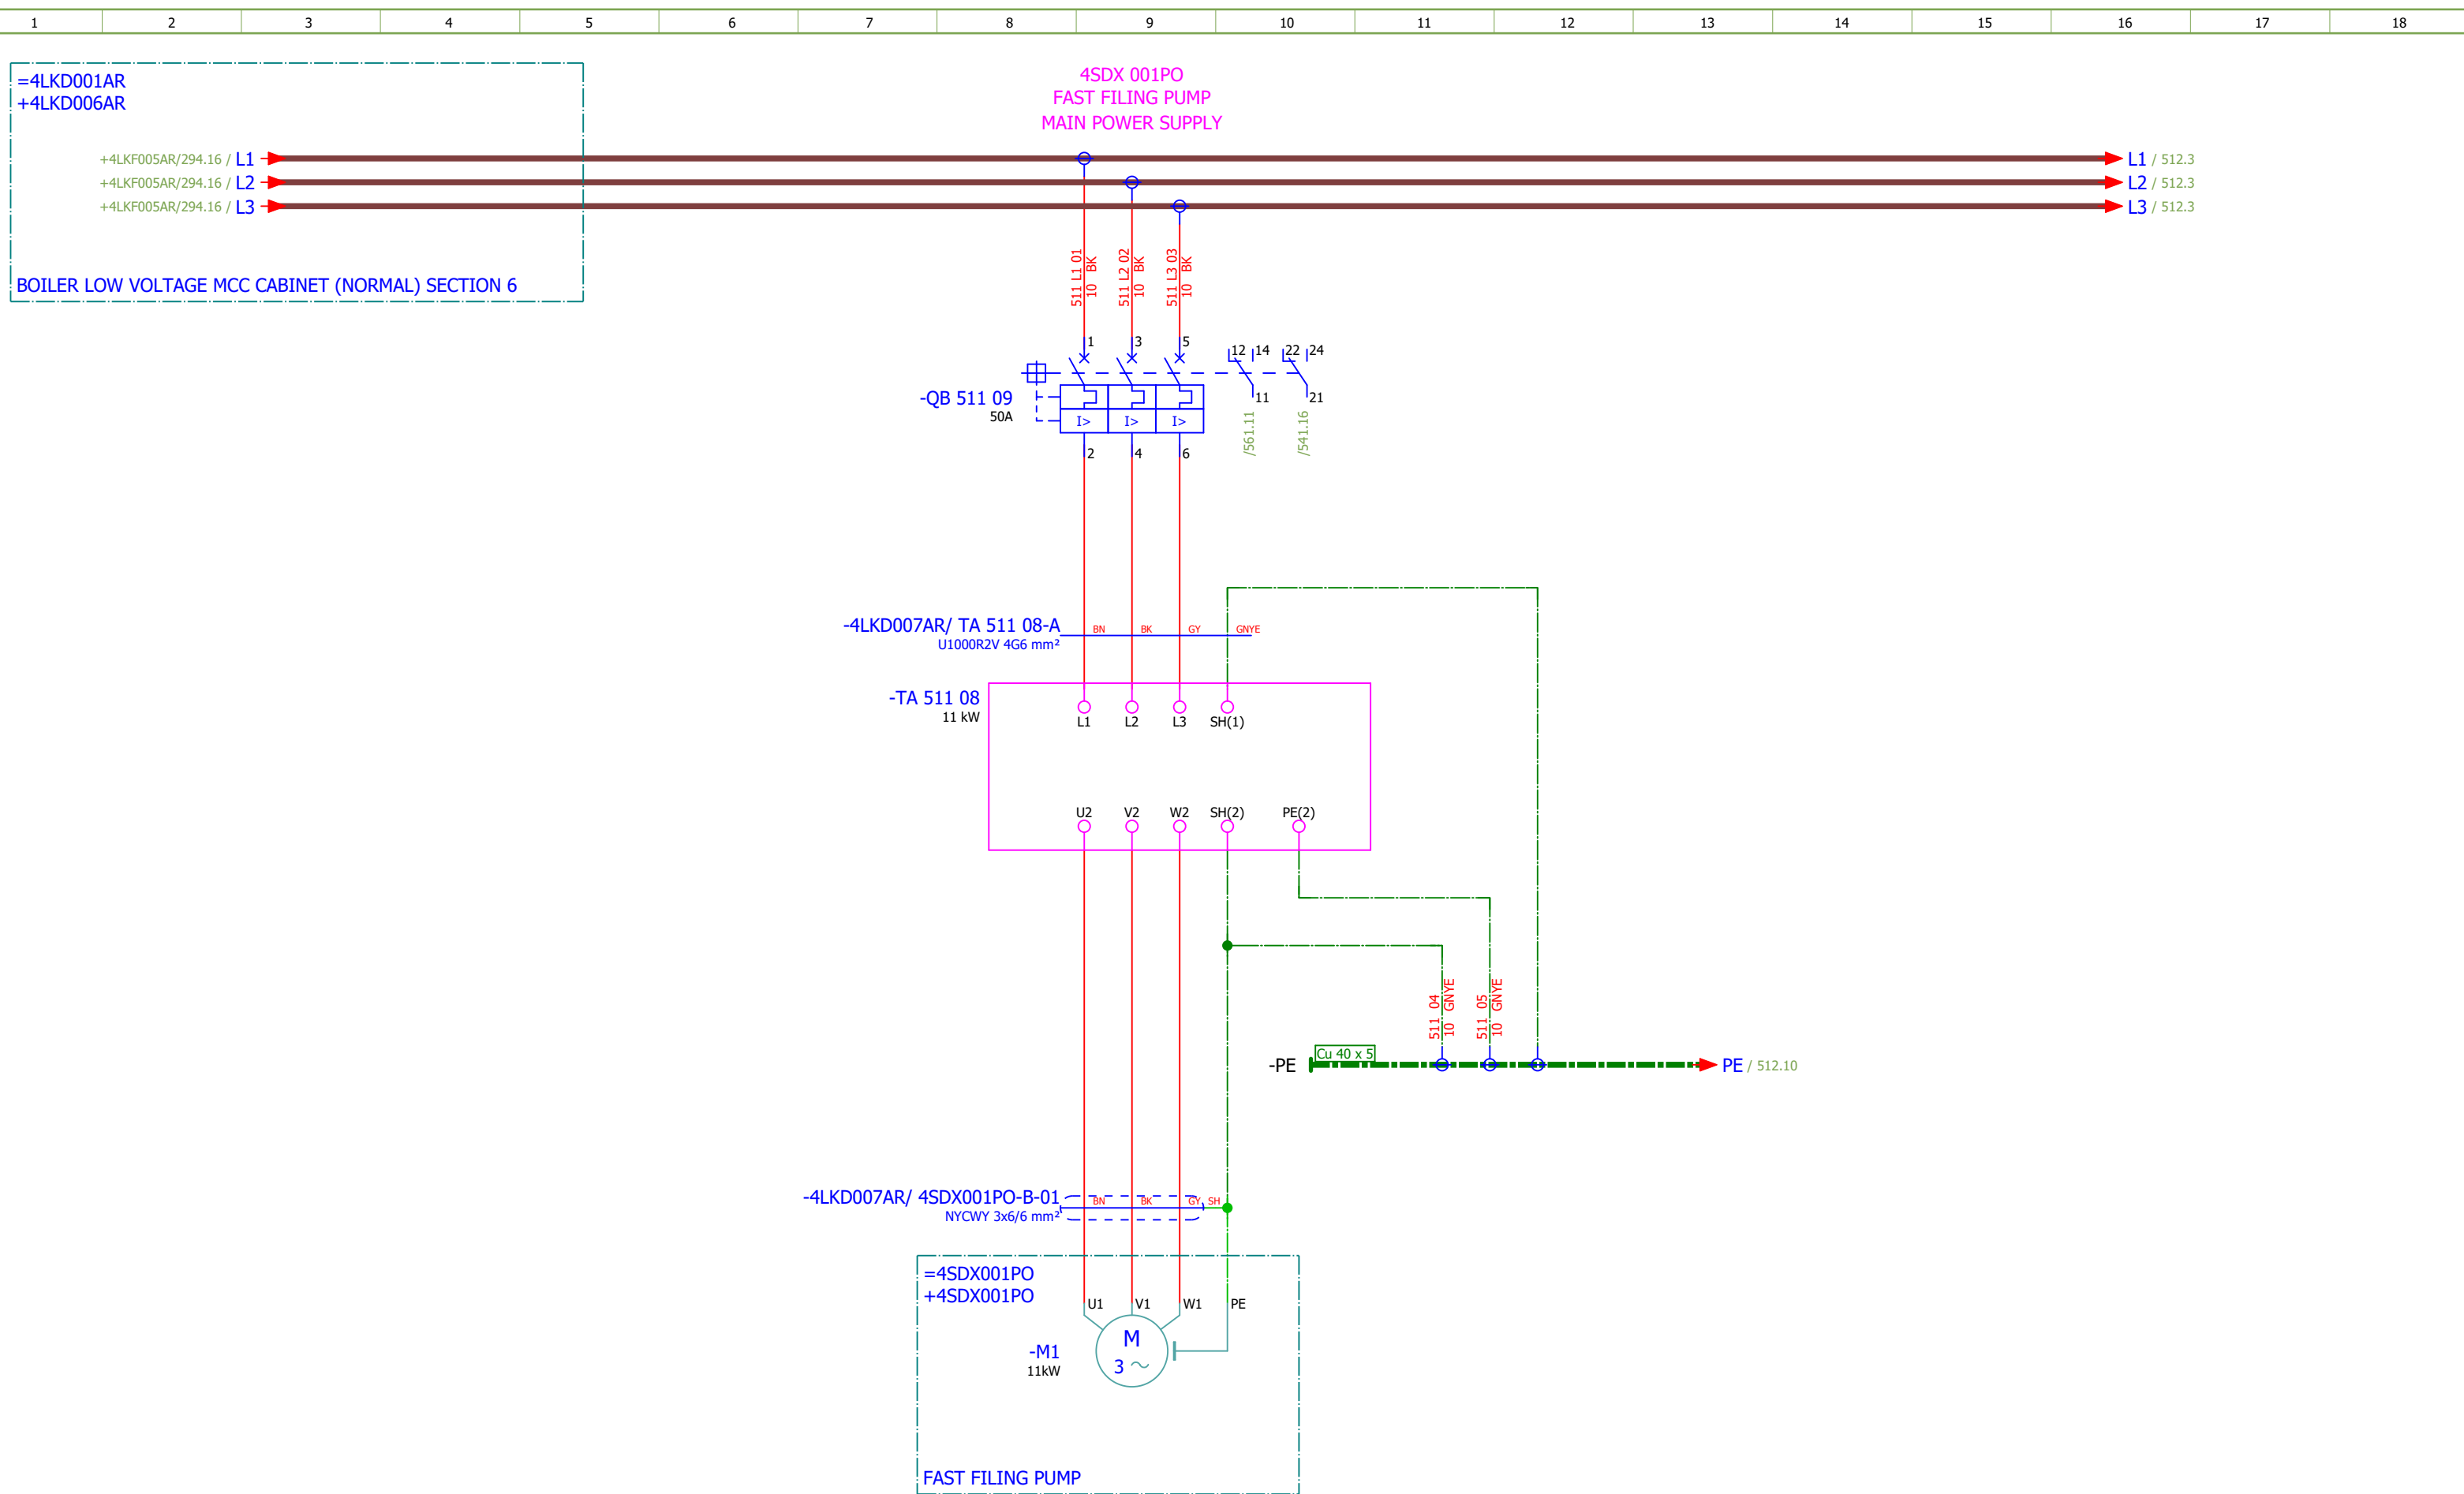


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7	Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F	
Drawn:	Luka Božičević															#D
Approved:	Grga Kolić															
Format:	A3				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	FAST FILING PUMP - MAIN POWER SUPPLY	Drawing designation:			BRC-4-ATEP0-1874-F			=4LKF001AR	Sheet:
														+4LKF006AR	Next:	512

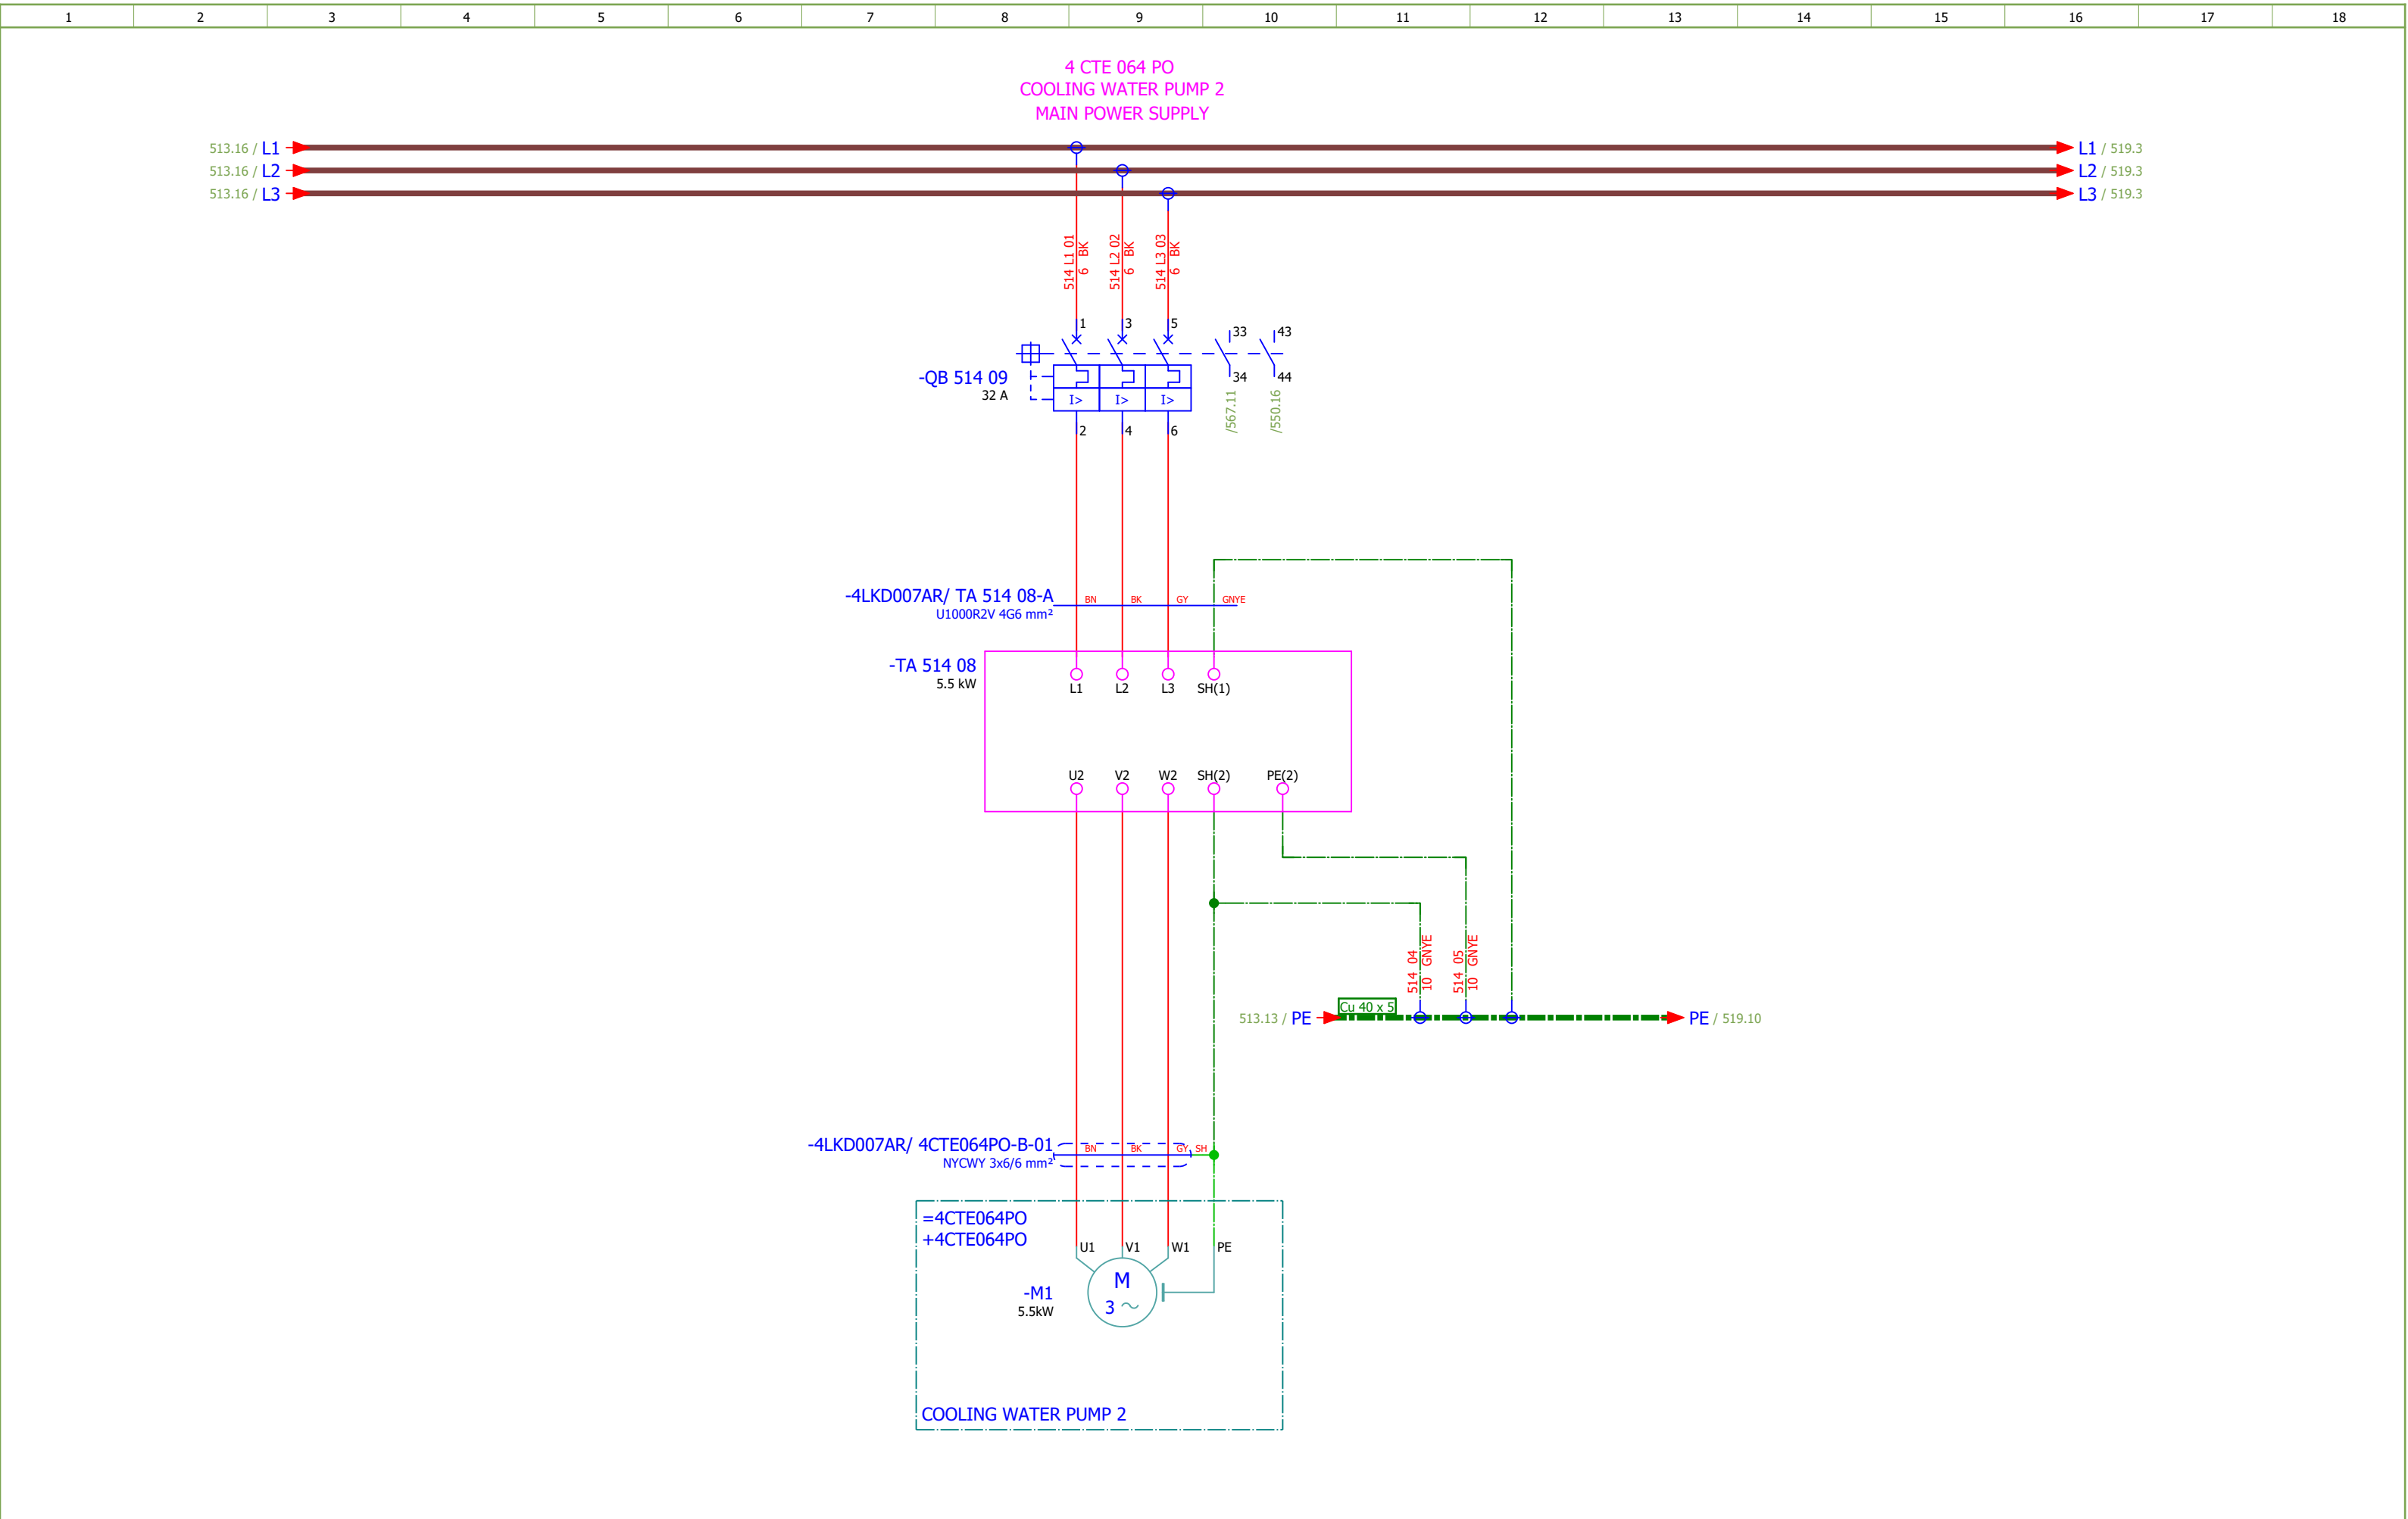


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F	
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	COOLING WATER PUMP 2 - MAIN POWER SUPPLY		Drawing designation: BRC-4-ATEP0-1874-F					=4LKF001AR	Sheet:	514	
Approved:	Grga Kolić													+4LKF006AR	Next:	515	
Format:	A3																

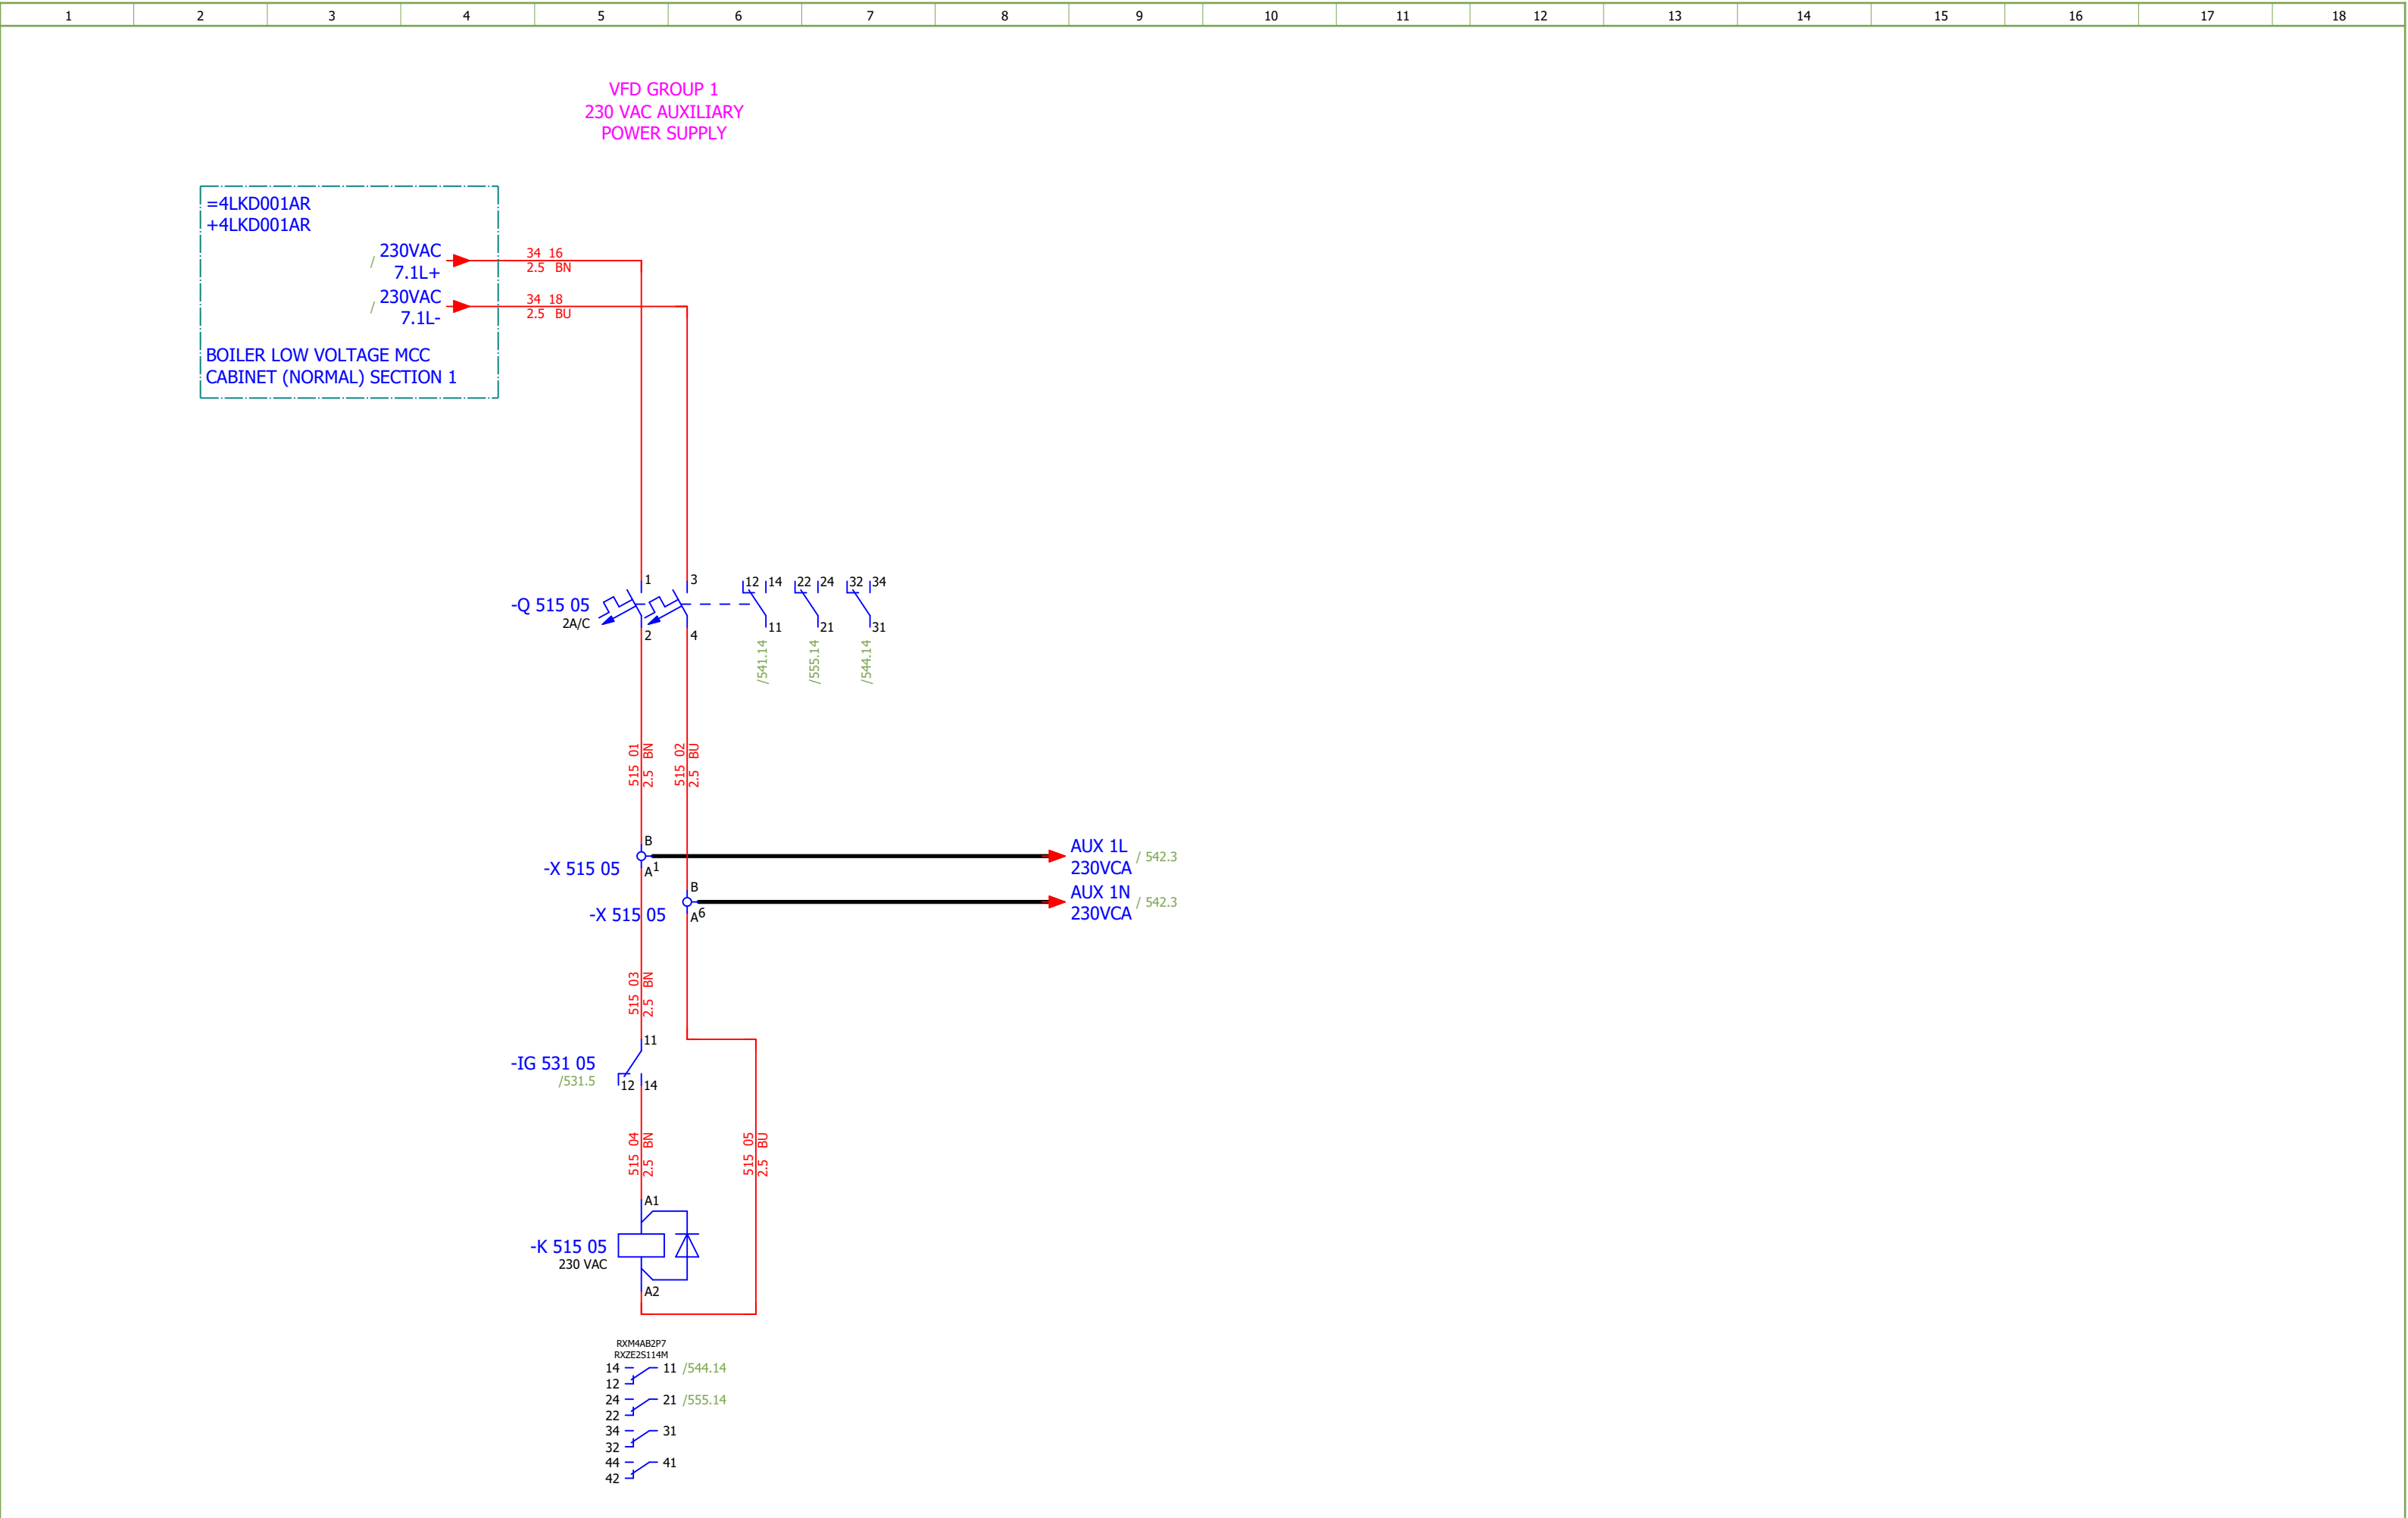


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----

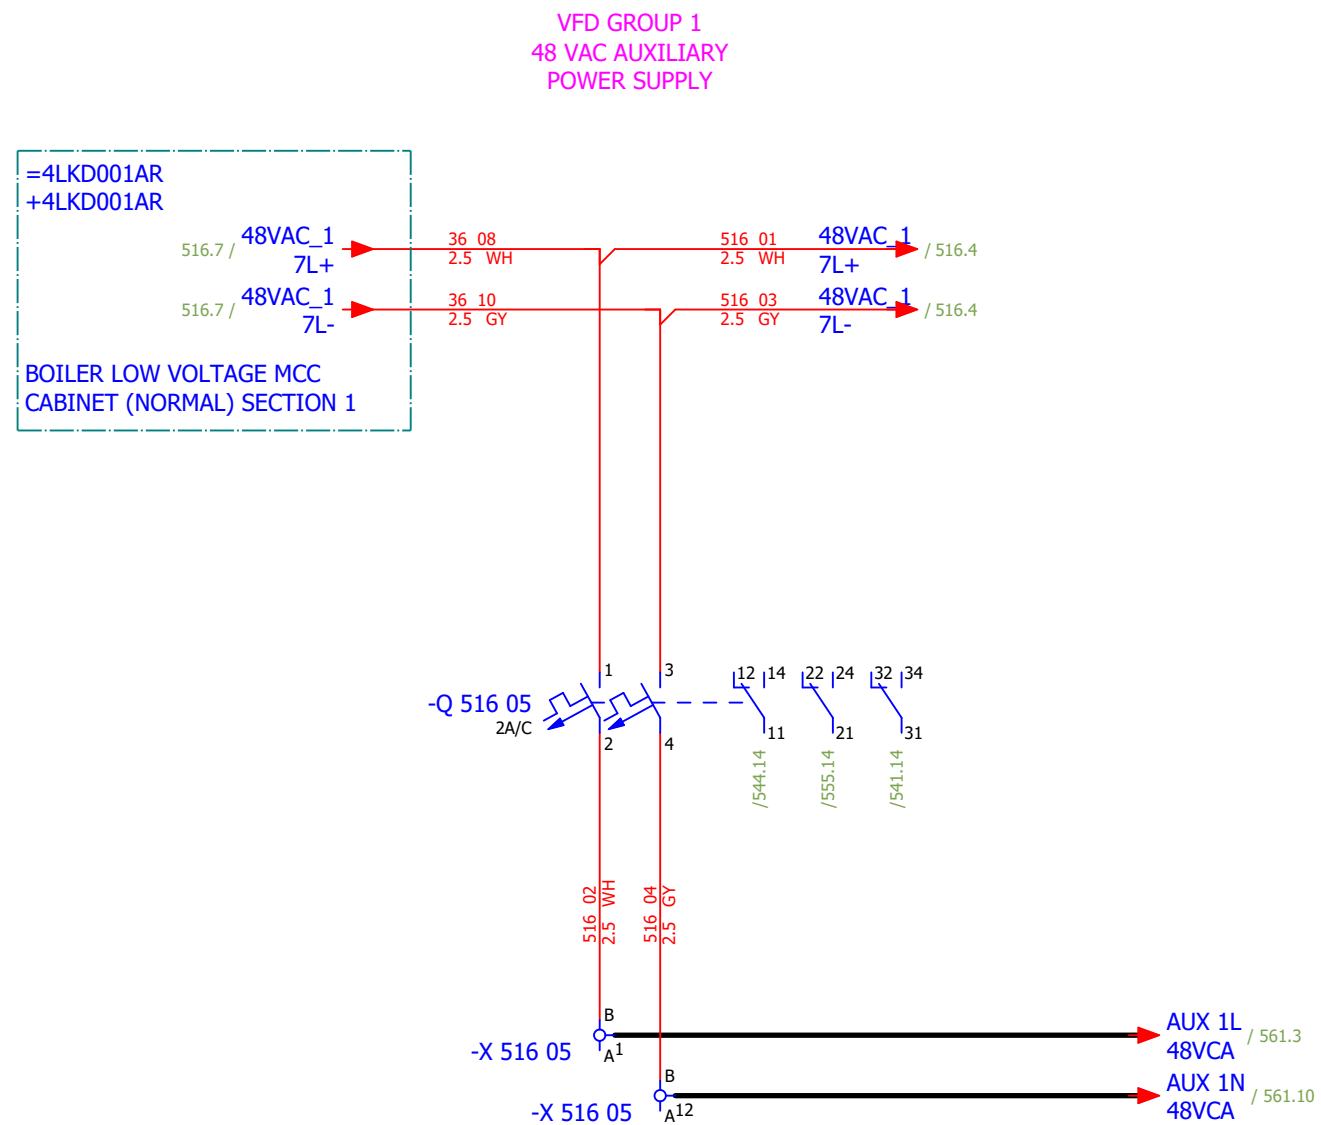


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7	Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F	
Drawn:	Luka Božičević															#D
Approved:	Grga Kolić															
Format:	A3				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	VFD GROUP 1 - 48 VAC AUXILIARY POWER SUPPLY	Drawing designation:			BRC-4-ATEP0-1874-F		=4LKF001AR		Sheet:
													+4LKF006AR		Next:	517

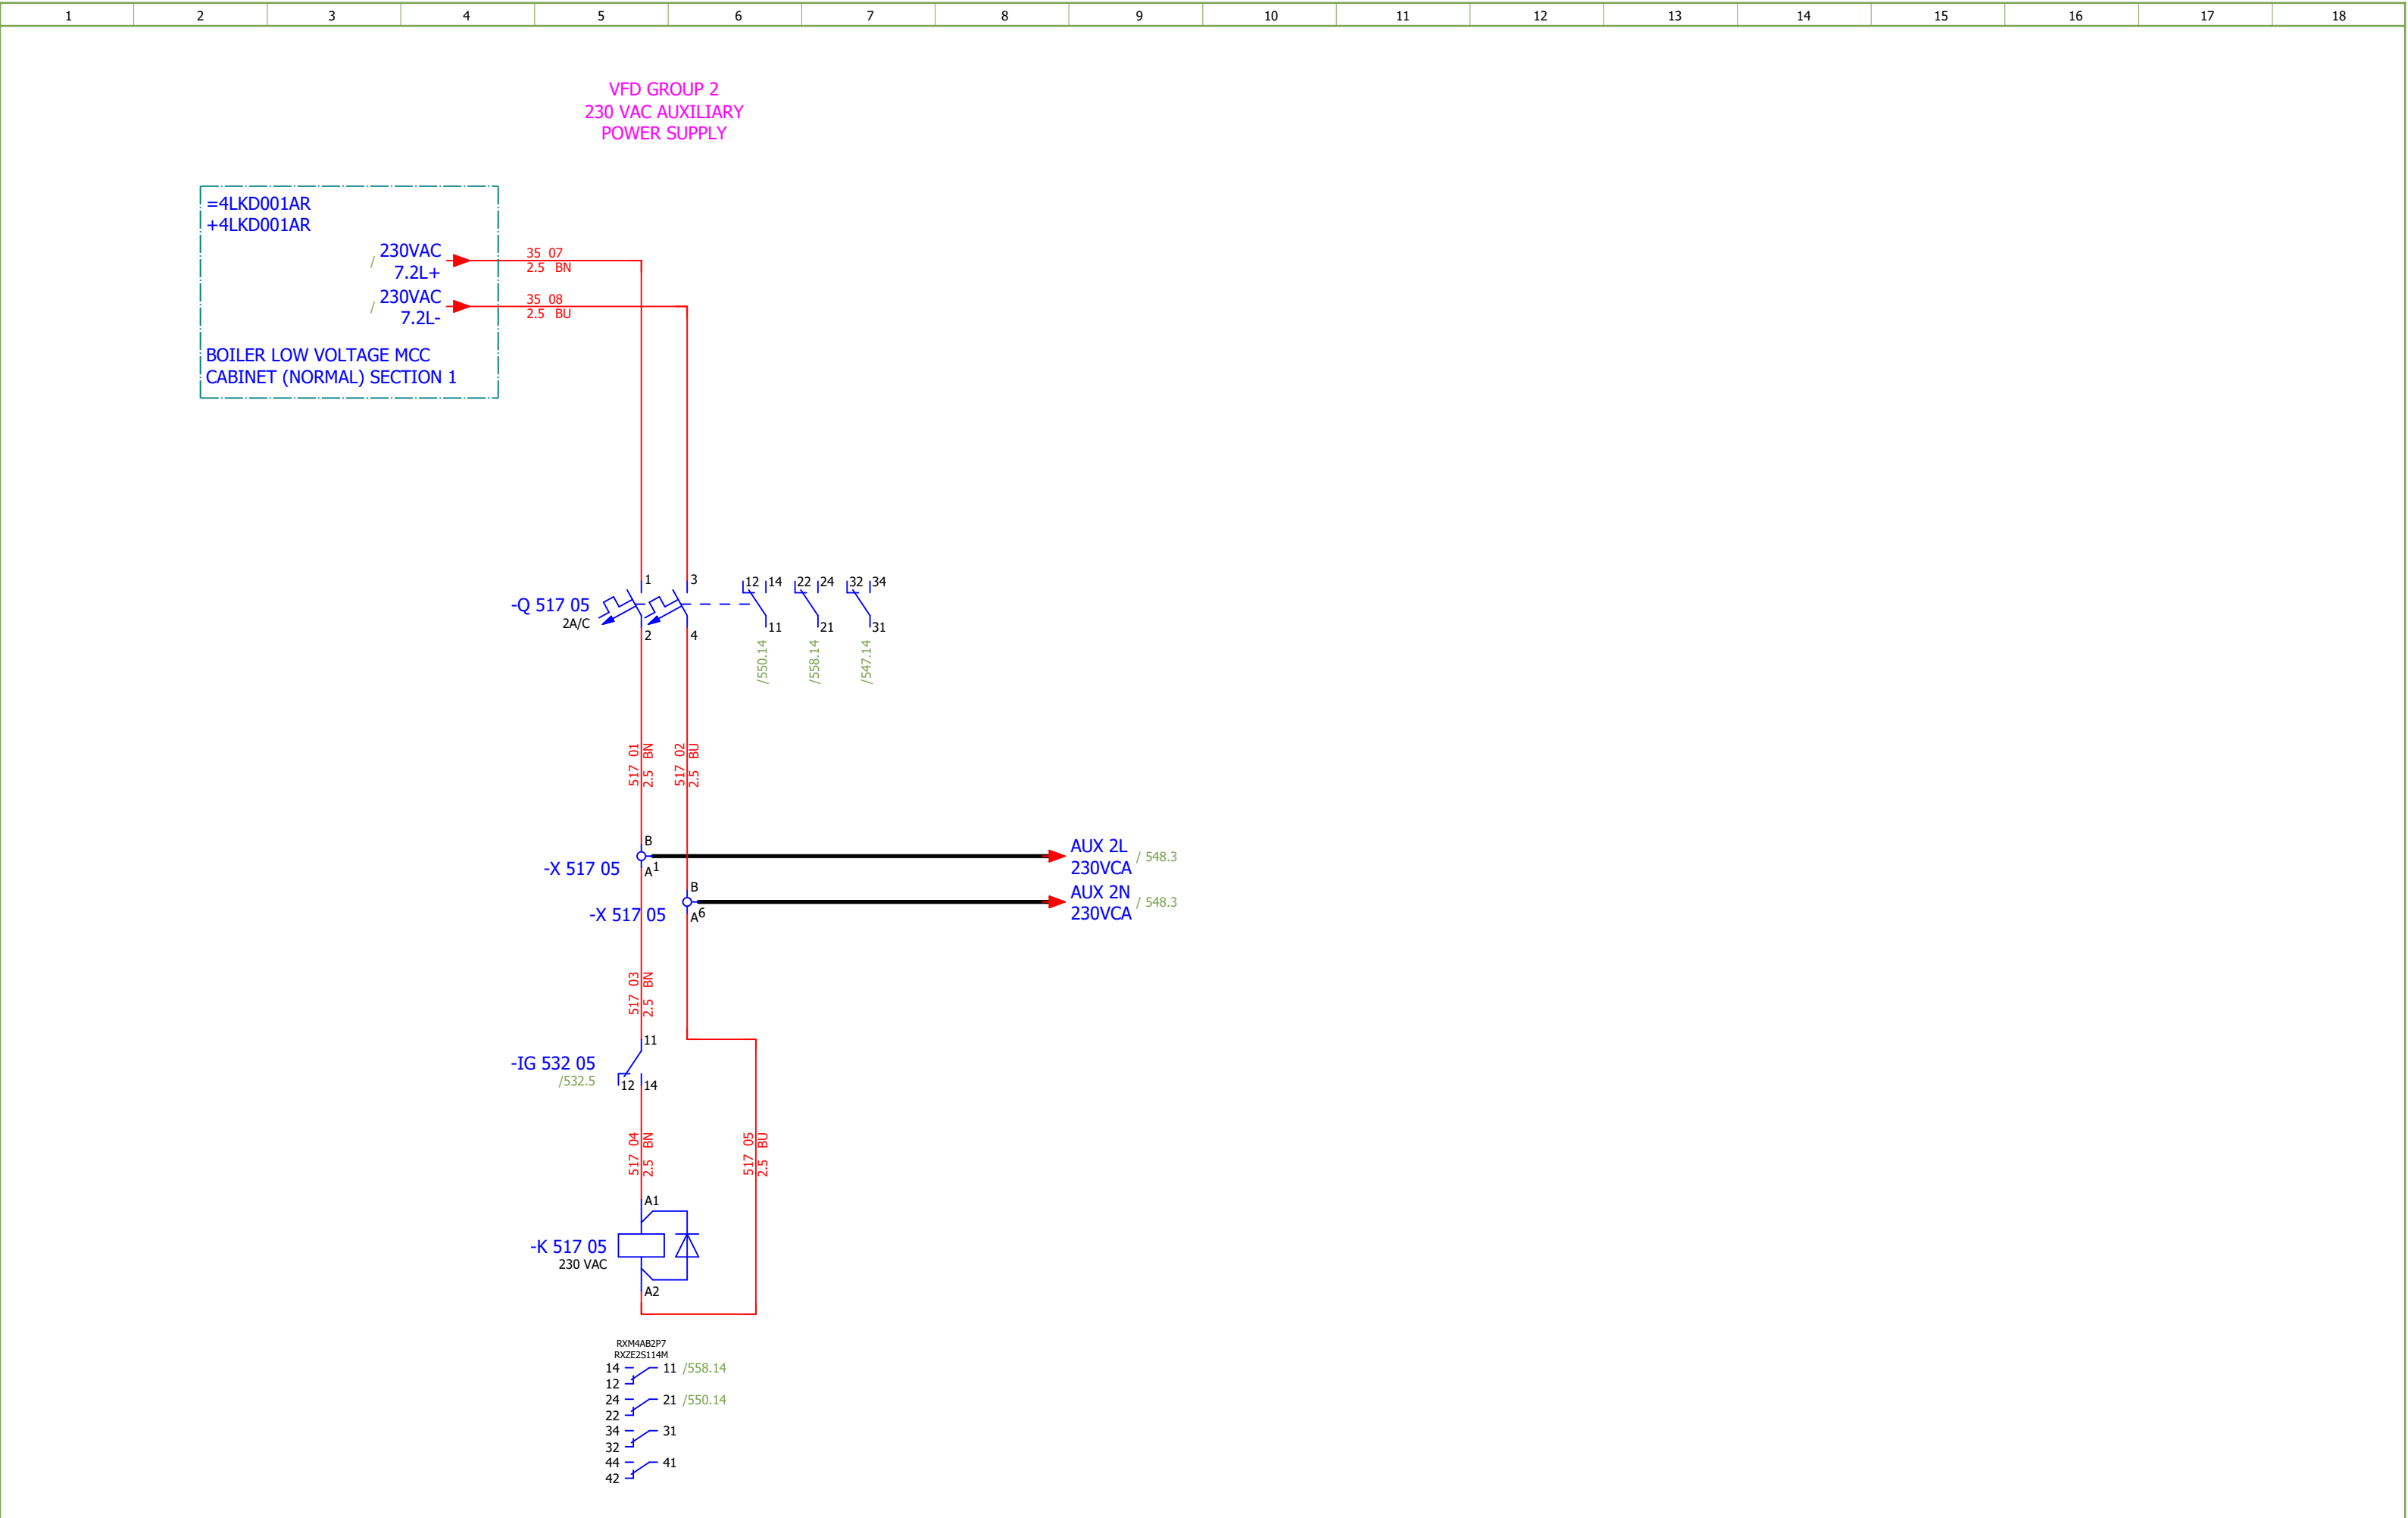


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F						
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	VFD GROUP 2 - 230 VAC AUXILIARY POWER SUPPLY		Drawing designation: BRC-4-ATEP0-1874-F				=4LKF001AR	Sheet:	517							
Approved:	Grga Kolić															+4LKF006AR	Next:	518				
Format:	A3																					

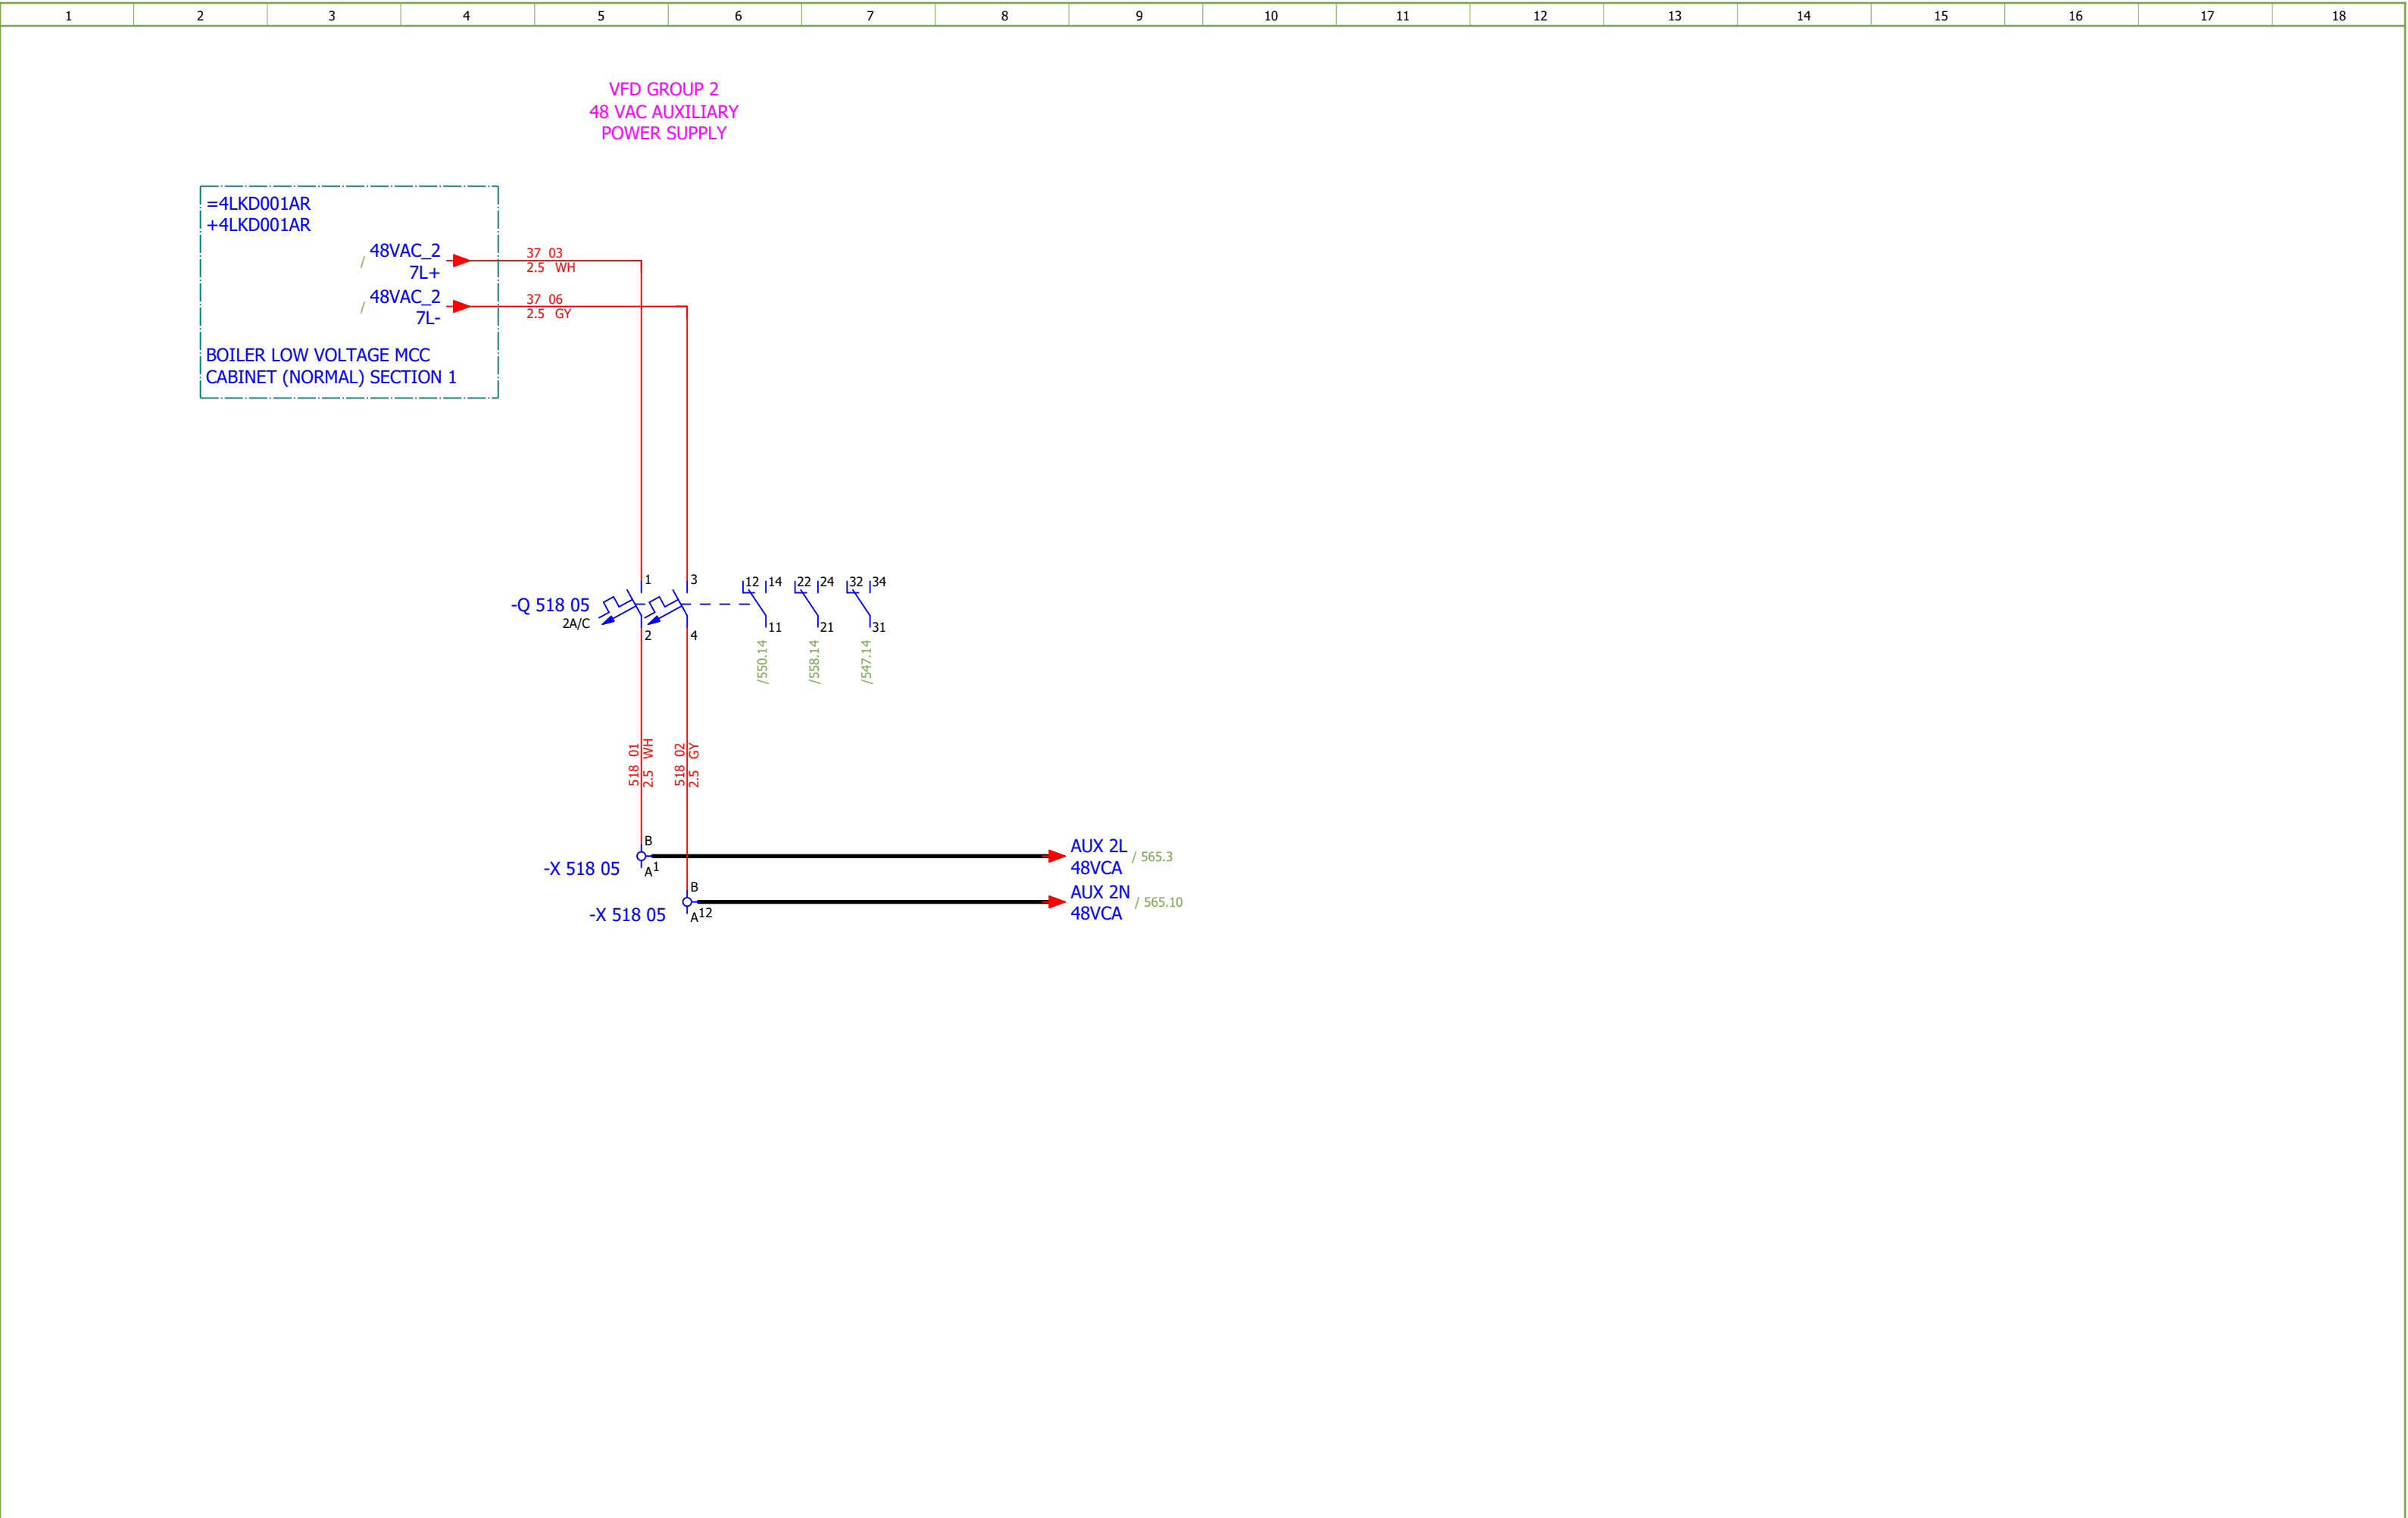


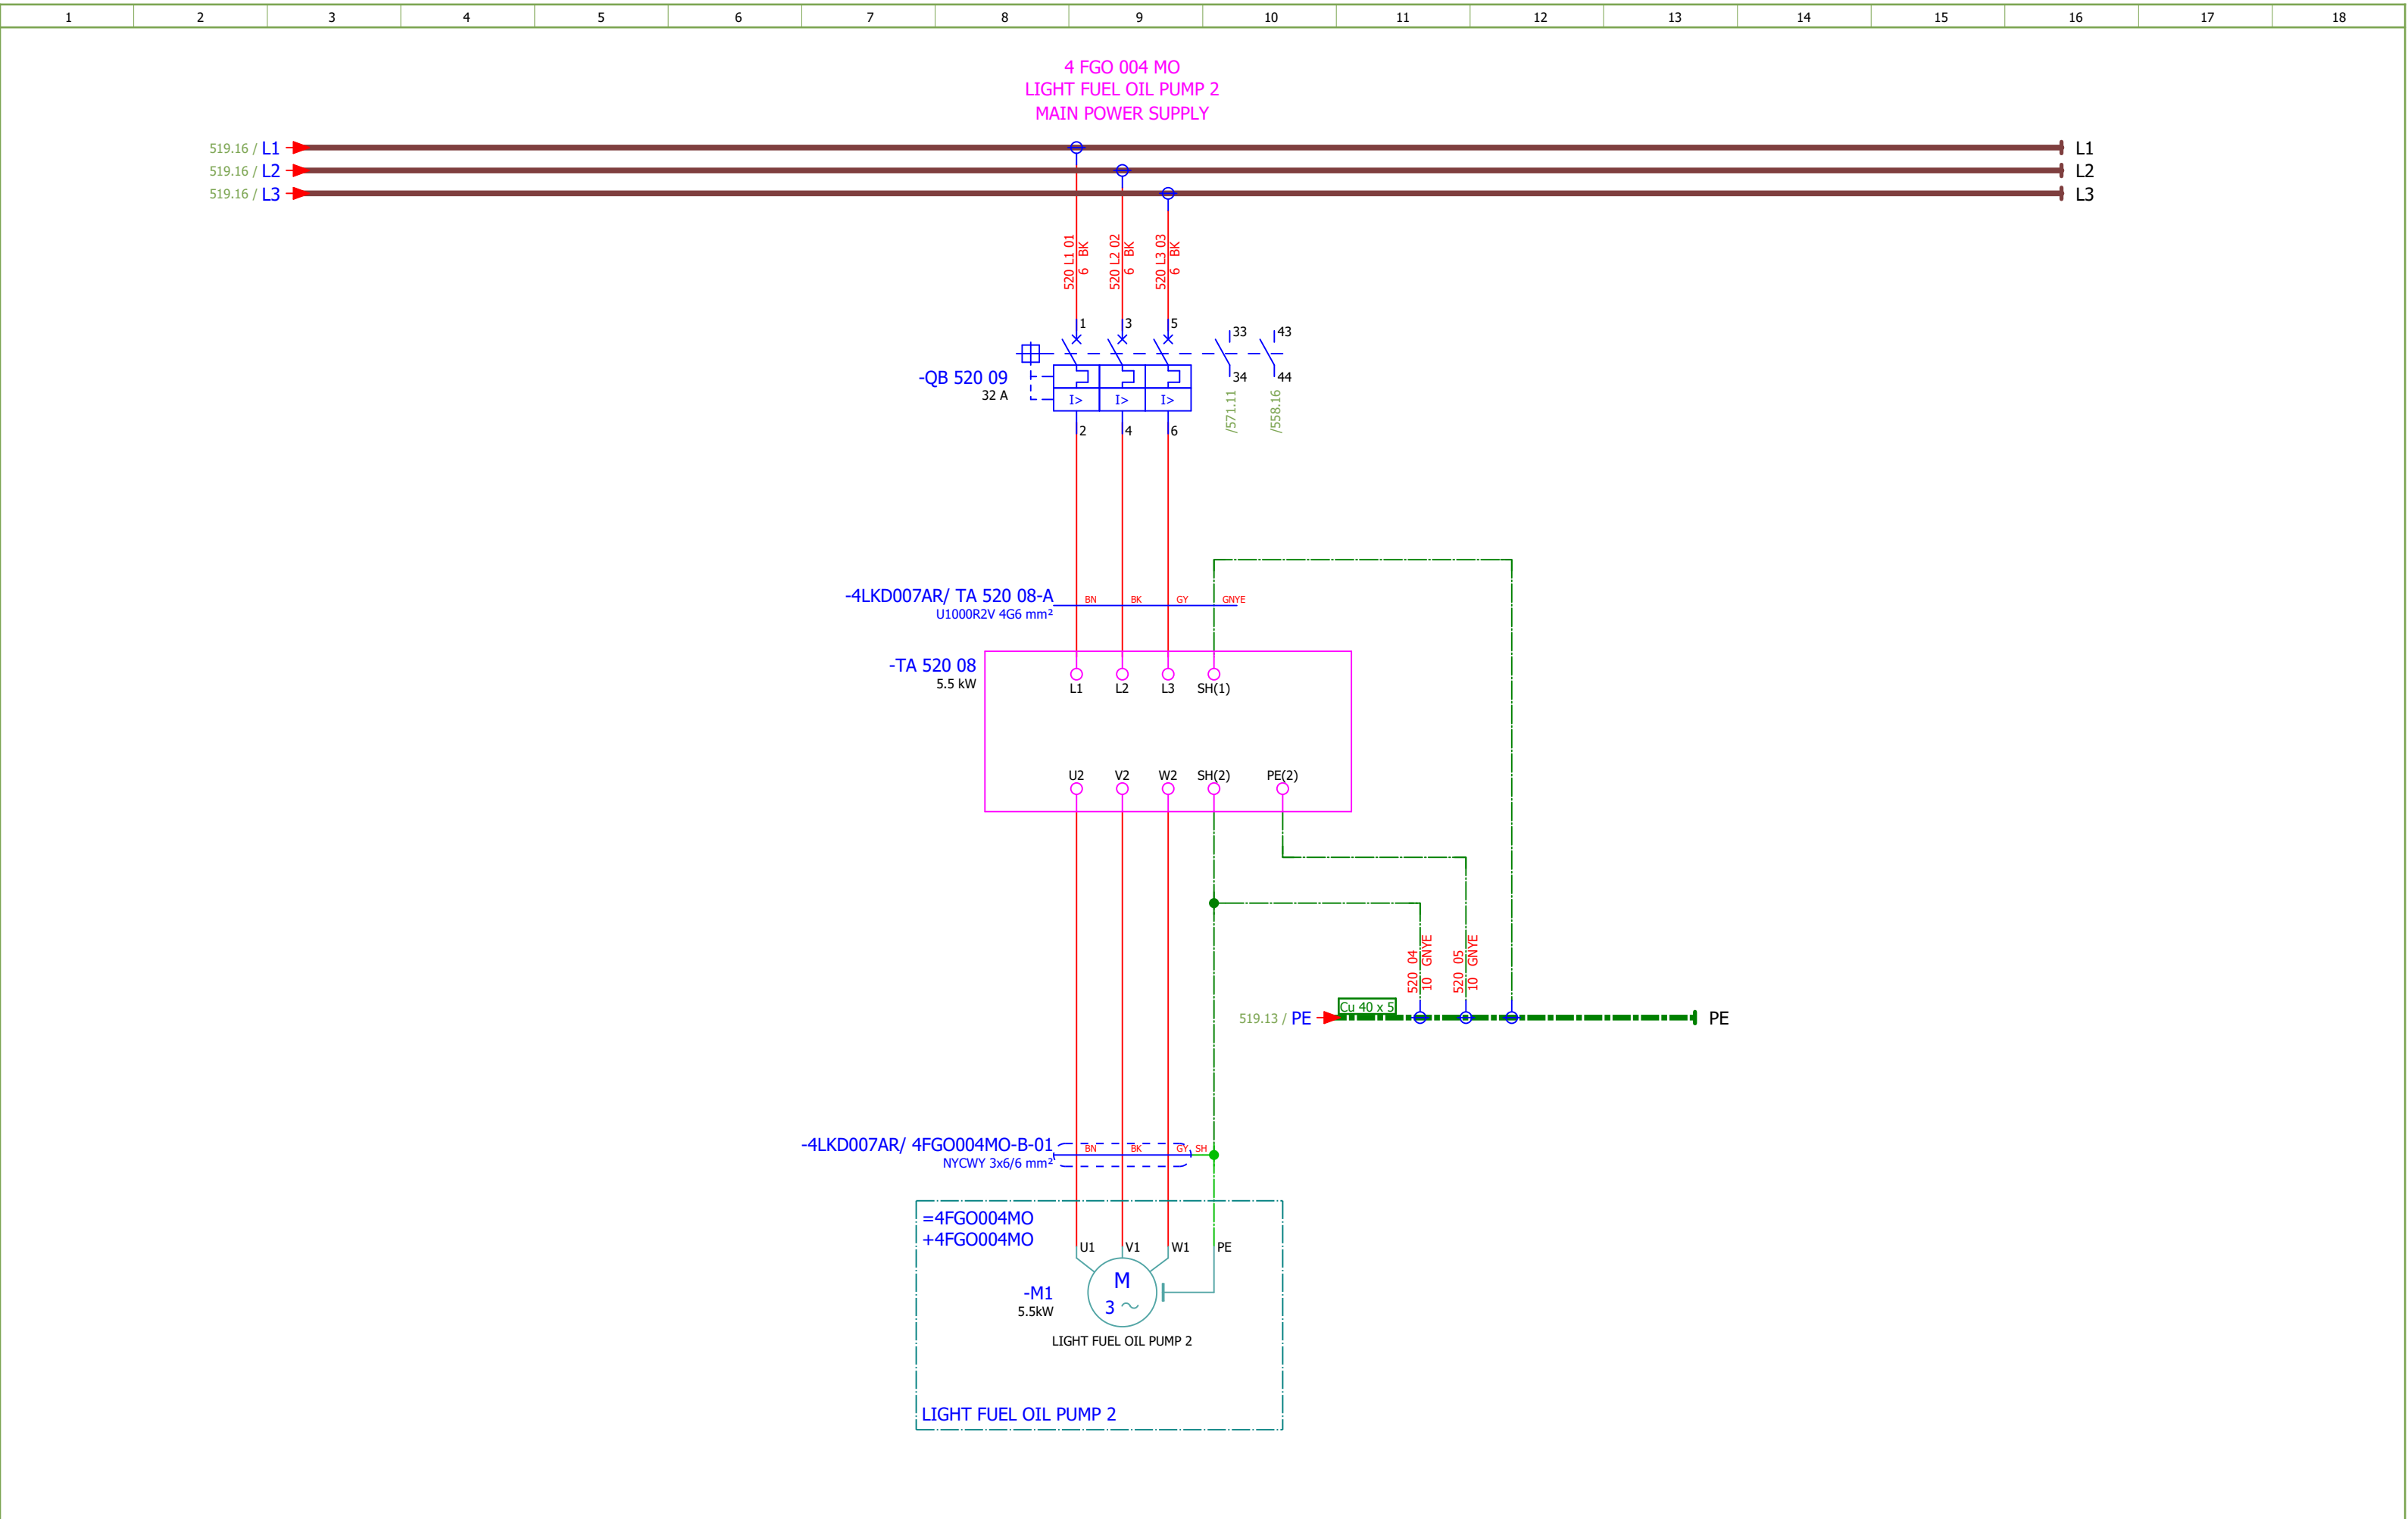


Date:	04.12.2025.		Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7	Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F	
Drawn:	Luka Božičević		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	LIGHT FUEL OIL PUMP 2 - MAIN POWER SUPPLY	Drawing designation:	BRC-4-ATEP0-1874-F						#D	
Approved:	Grga Kolić												=4LKFO01AR	Sheet:	520
Format:	A3												+4LKFO06AR	Next:	531

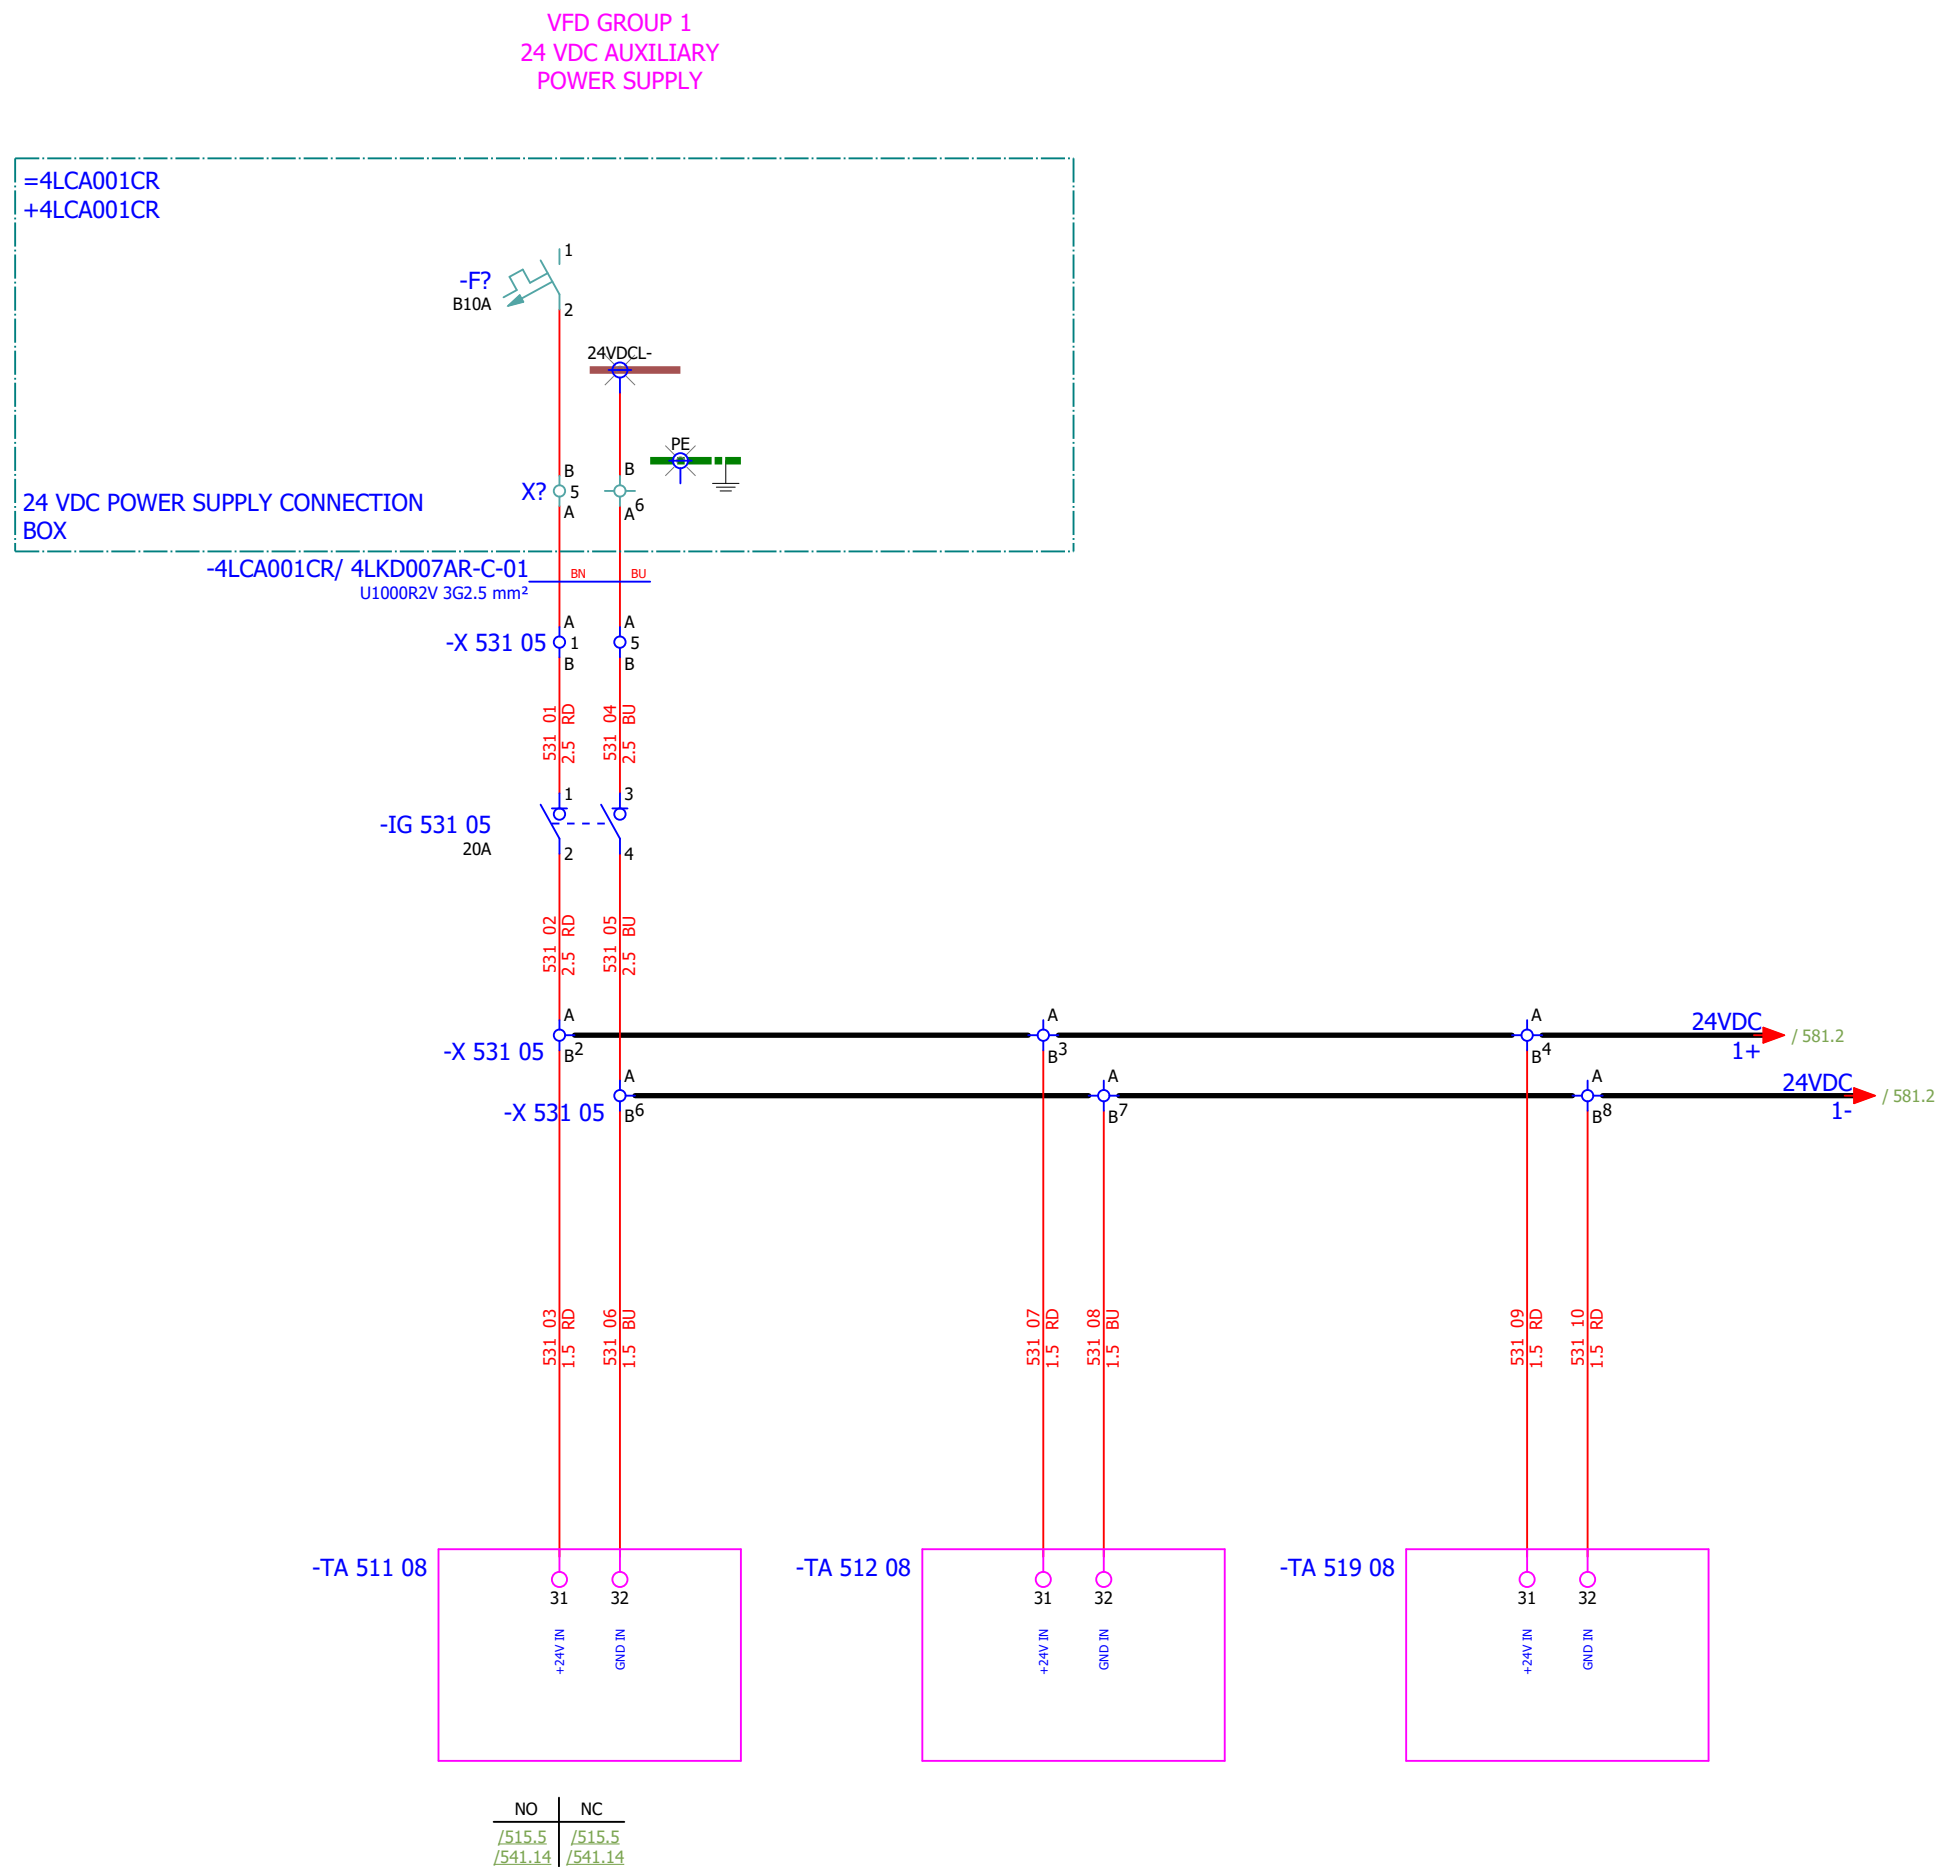



Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F	
Drawn:	Luka Božičević																#G
Approved:	Grga Kolić																
Format:	A3				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	VFD GROUP 1 - 24 VDC AUXILIARY POWER SUPPLY		Drawing designation: BRC-4-ATEP0-1874-F				=4LKF001AR		Sheet:	531
															+4LKF006AR	Next:	532

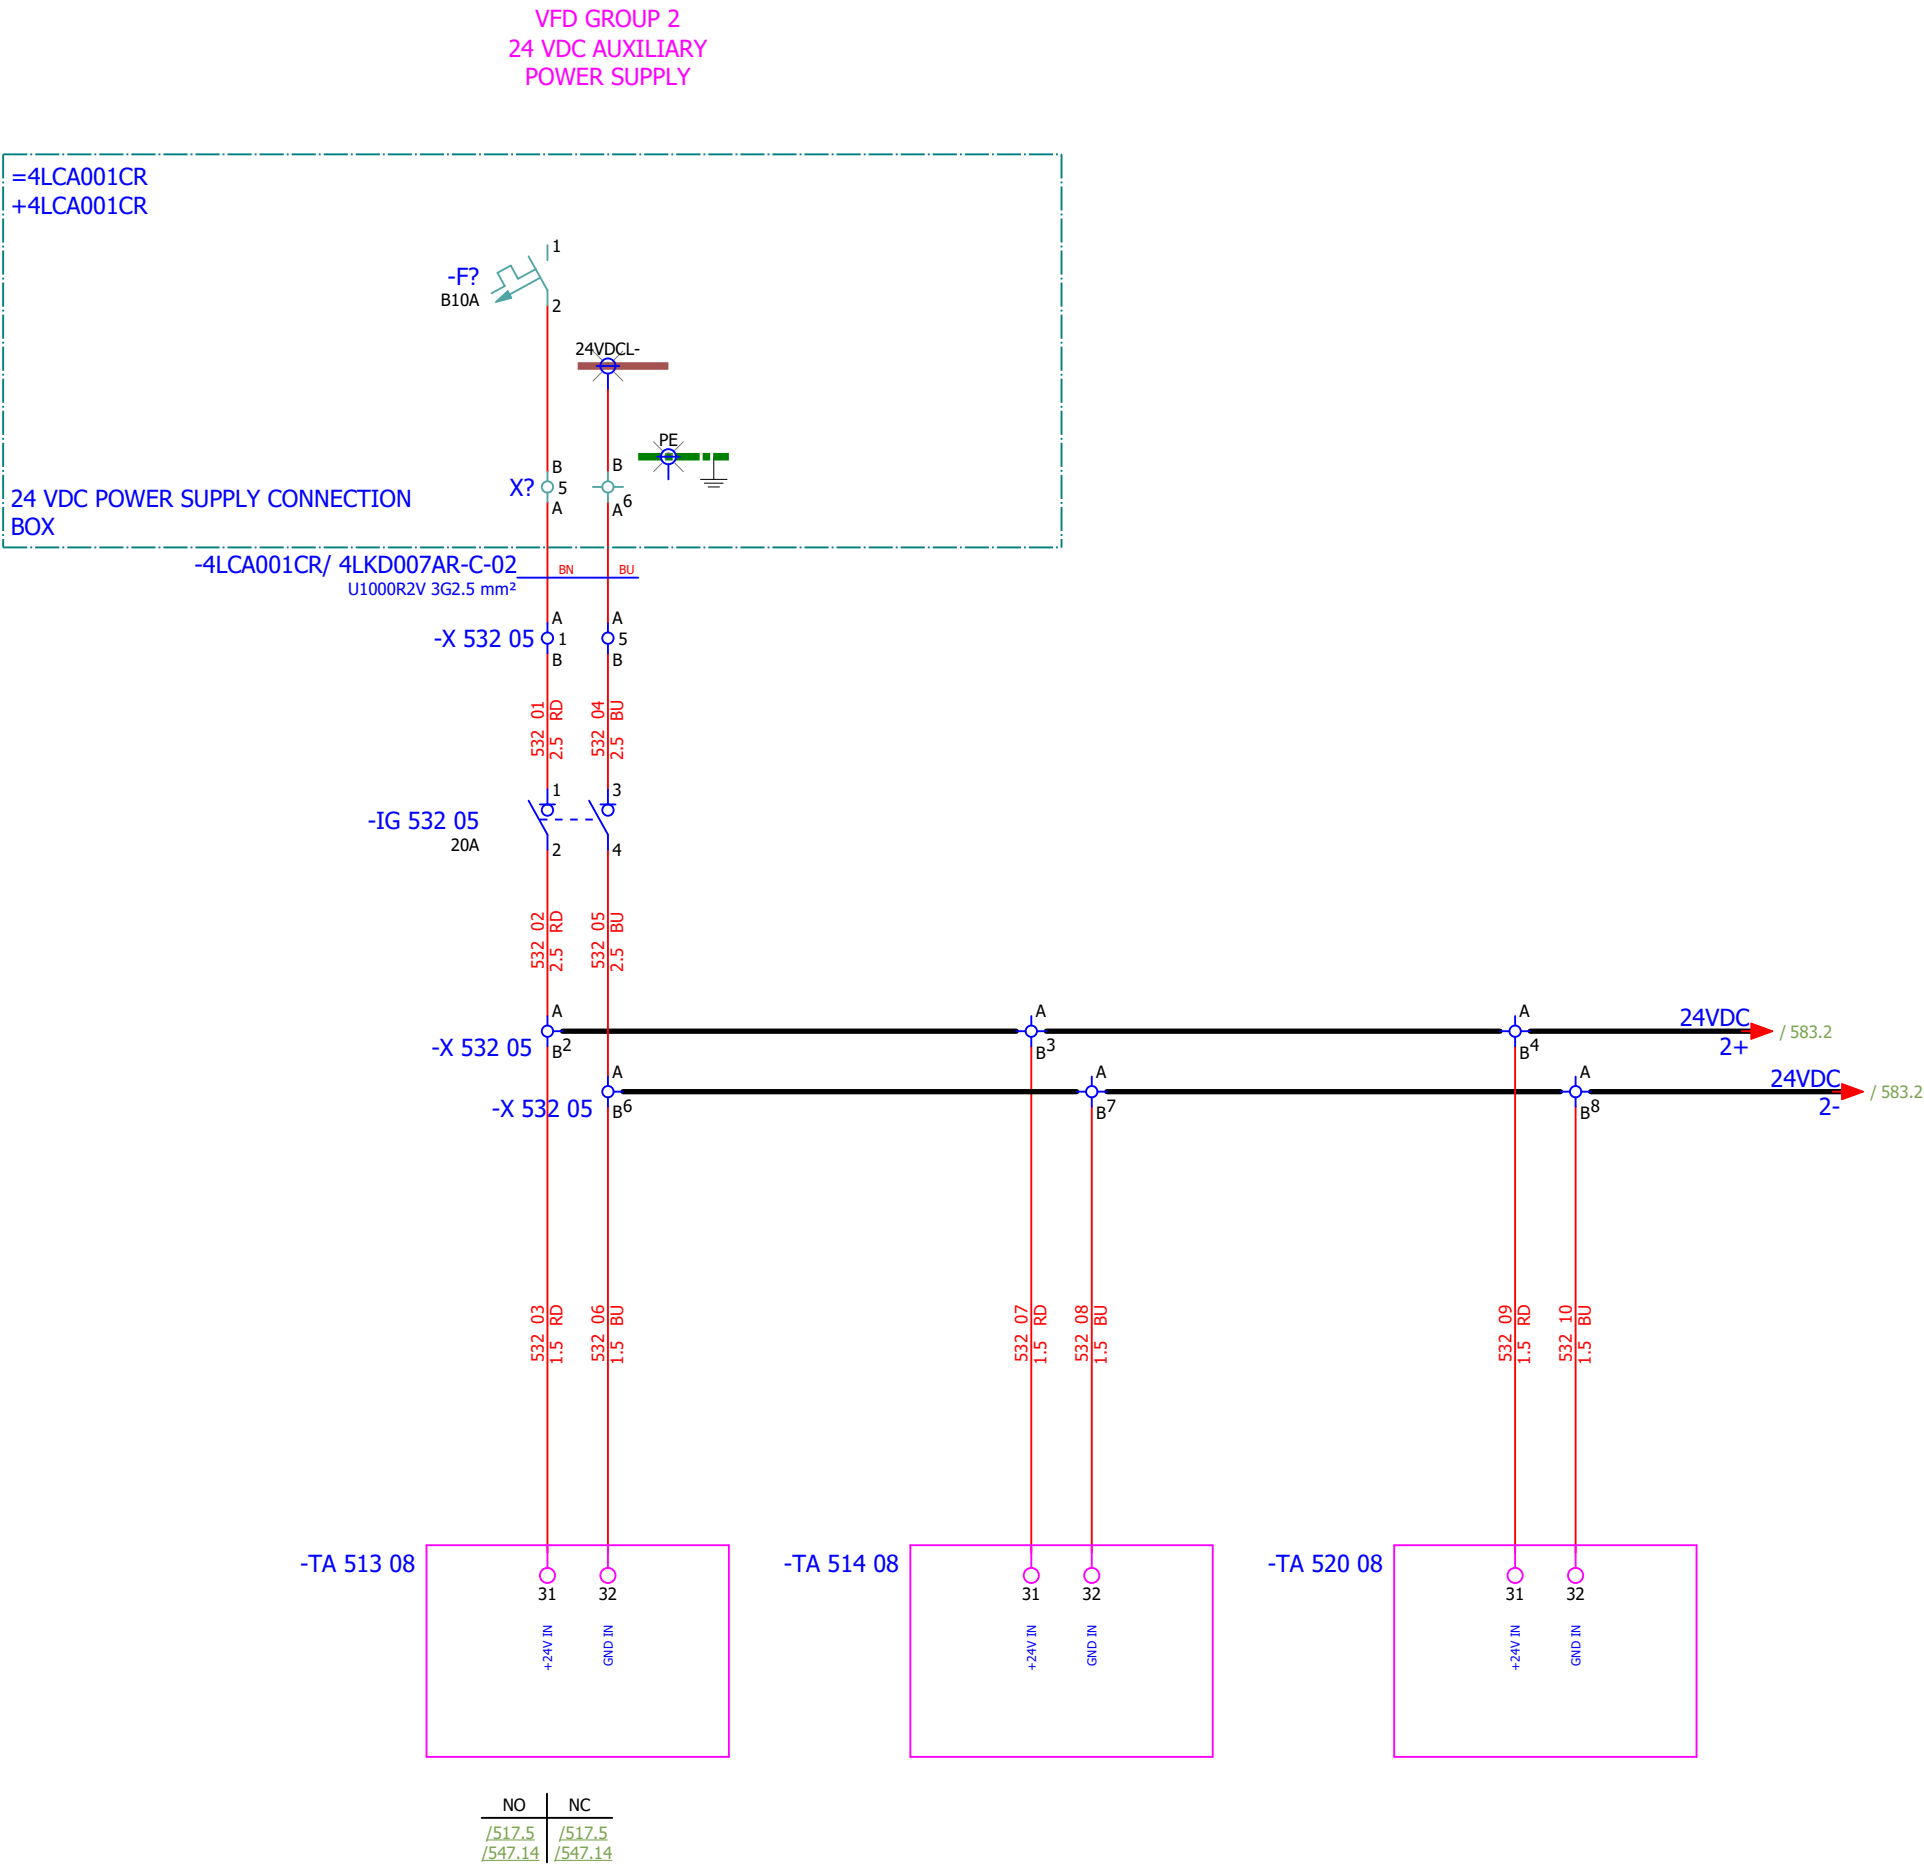

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F	
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	FAST FILING PUMP - DIGITAL INPUTS		Drawing designation:				BRC-4-ATEP0-1874-F		=4LKF001AR	Sheet:	541
Approved:	Grga Kolić														+4LKF006AR	Next:	542
Format:	A3																

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F	
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	FAST FILING PUMP - DIGITAL OUTPUTS	Drawing designation:	BRC-4-ATEP0-1874-F								#MB
Approved:	Grga Kolić																
Format:	A3																

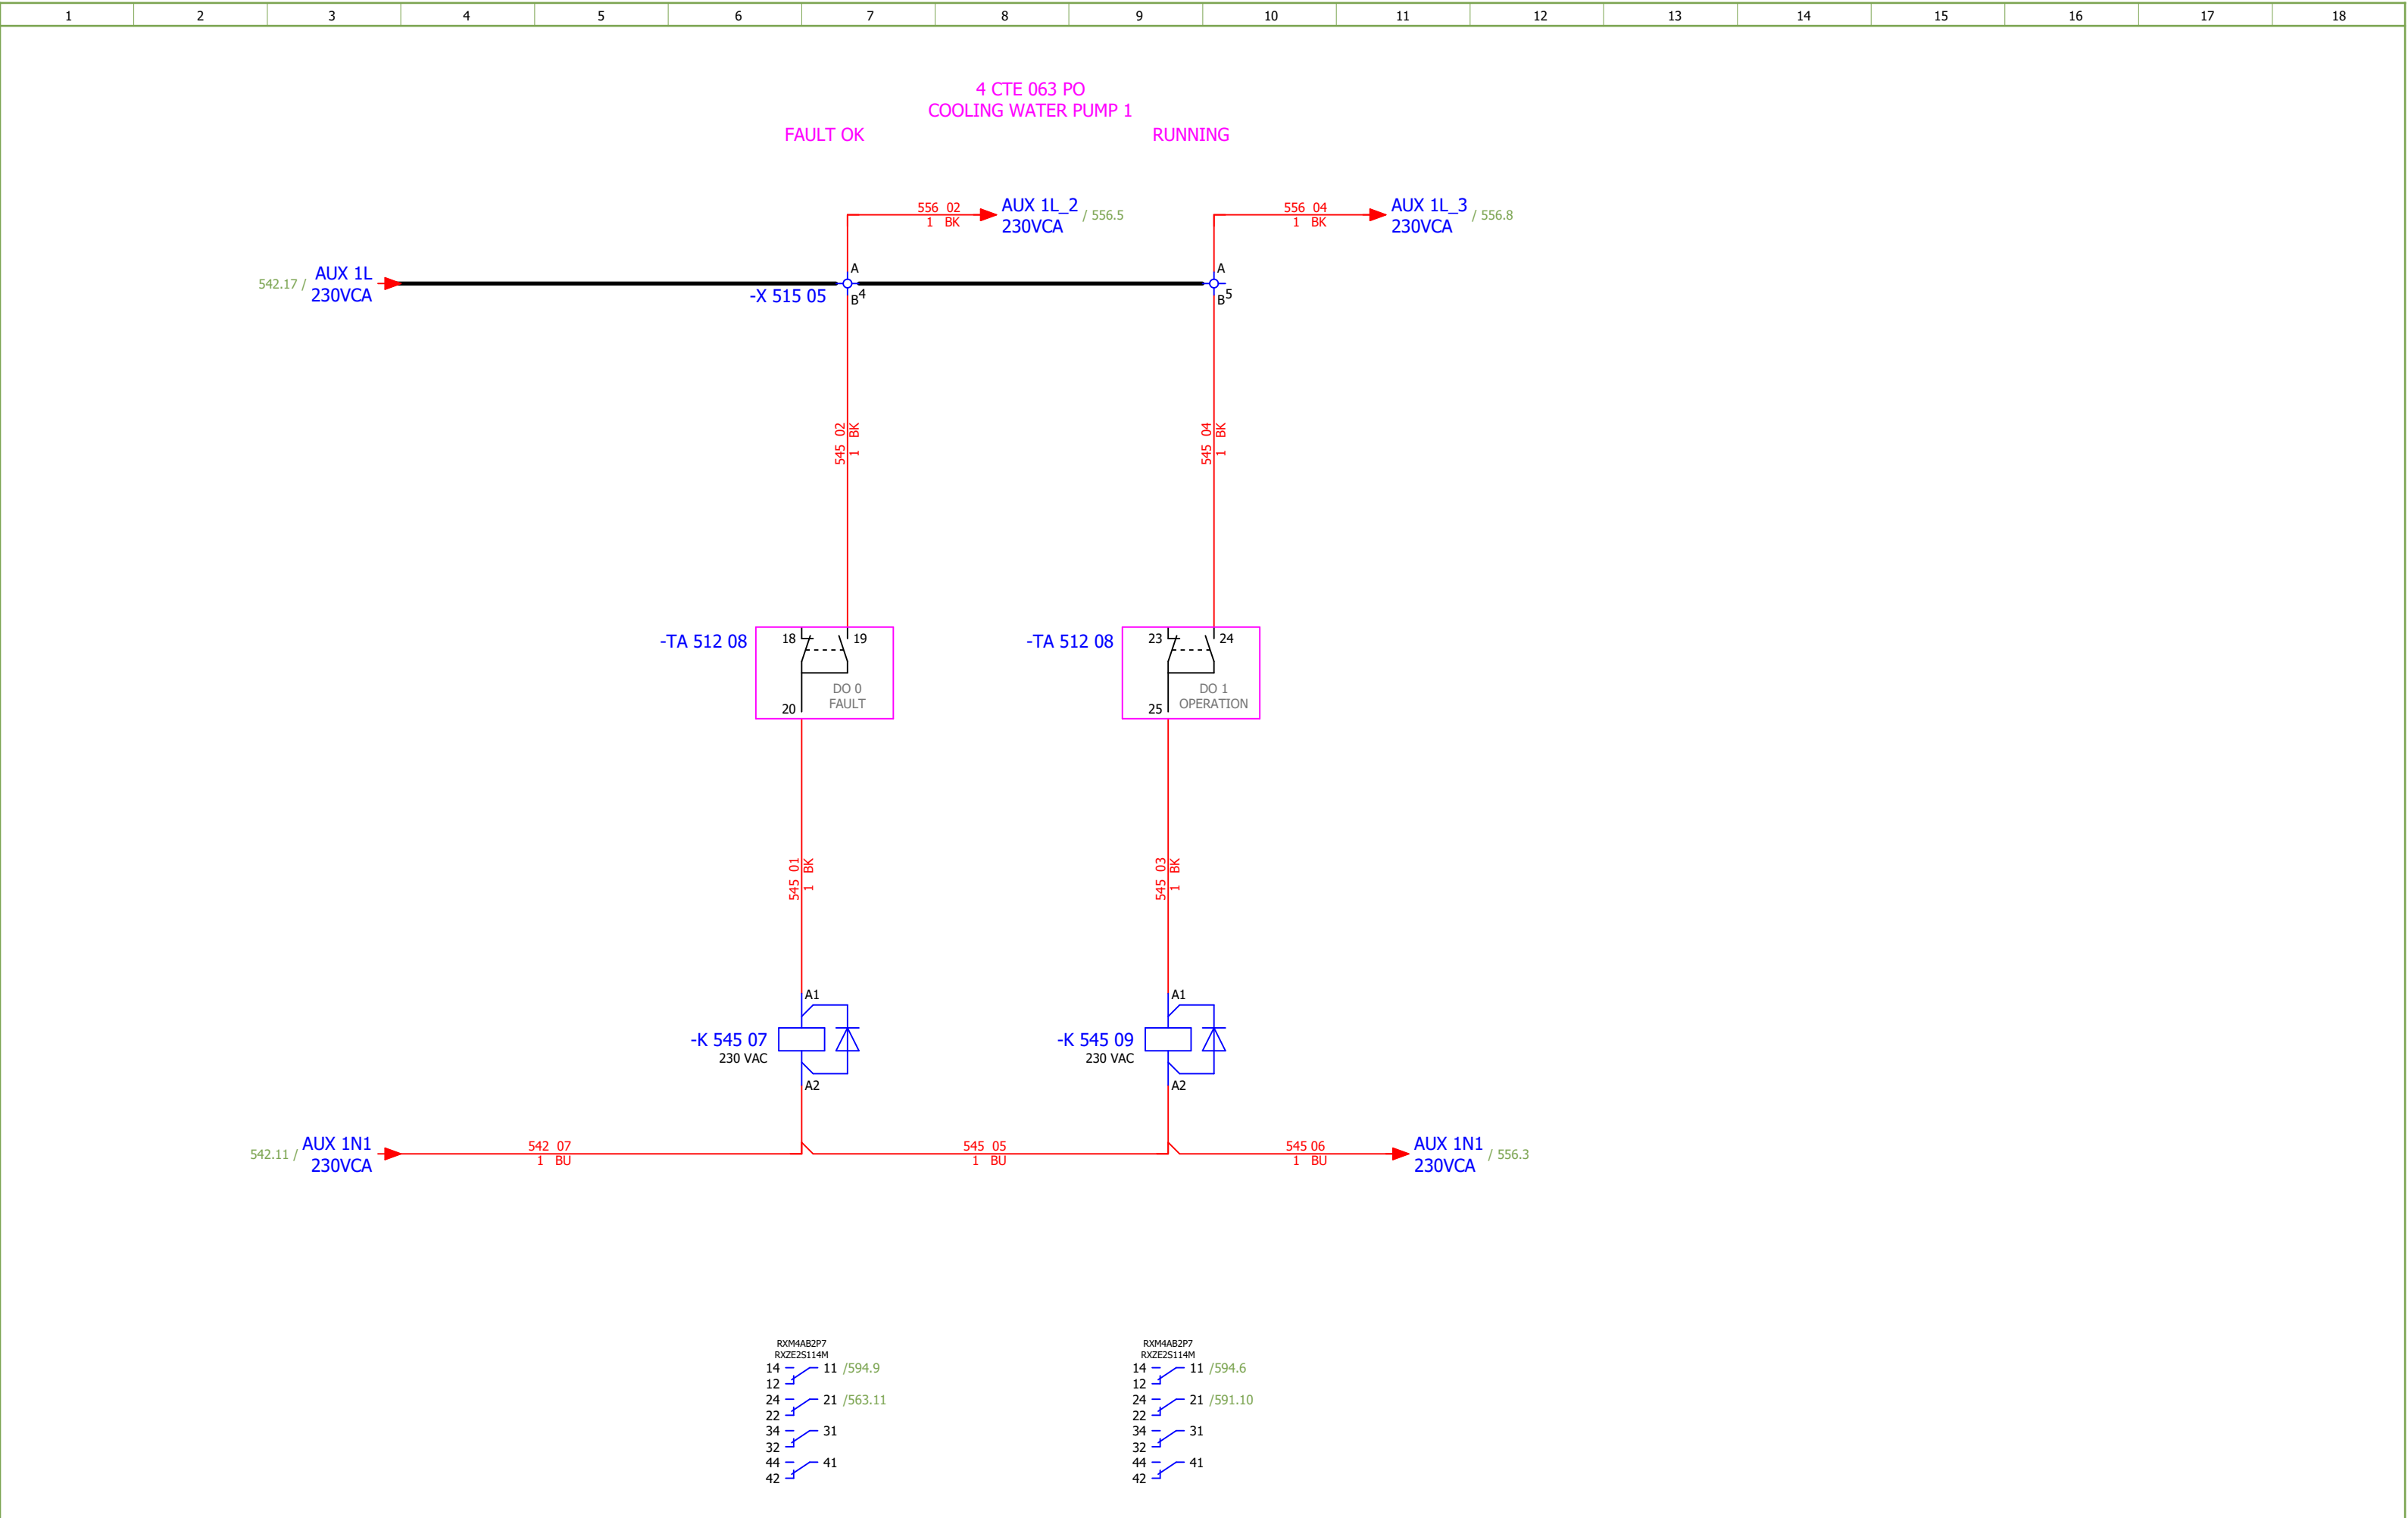


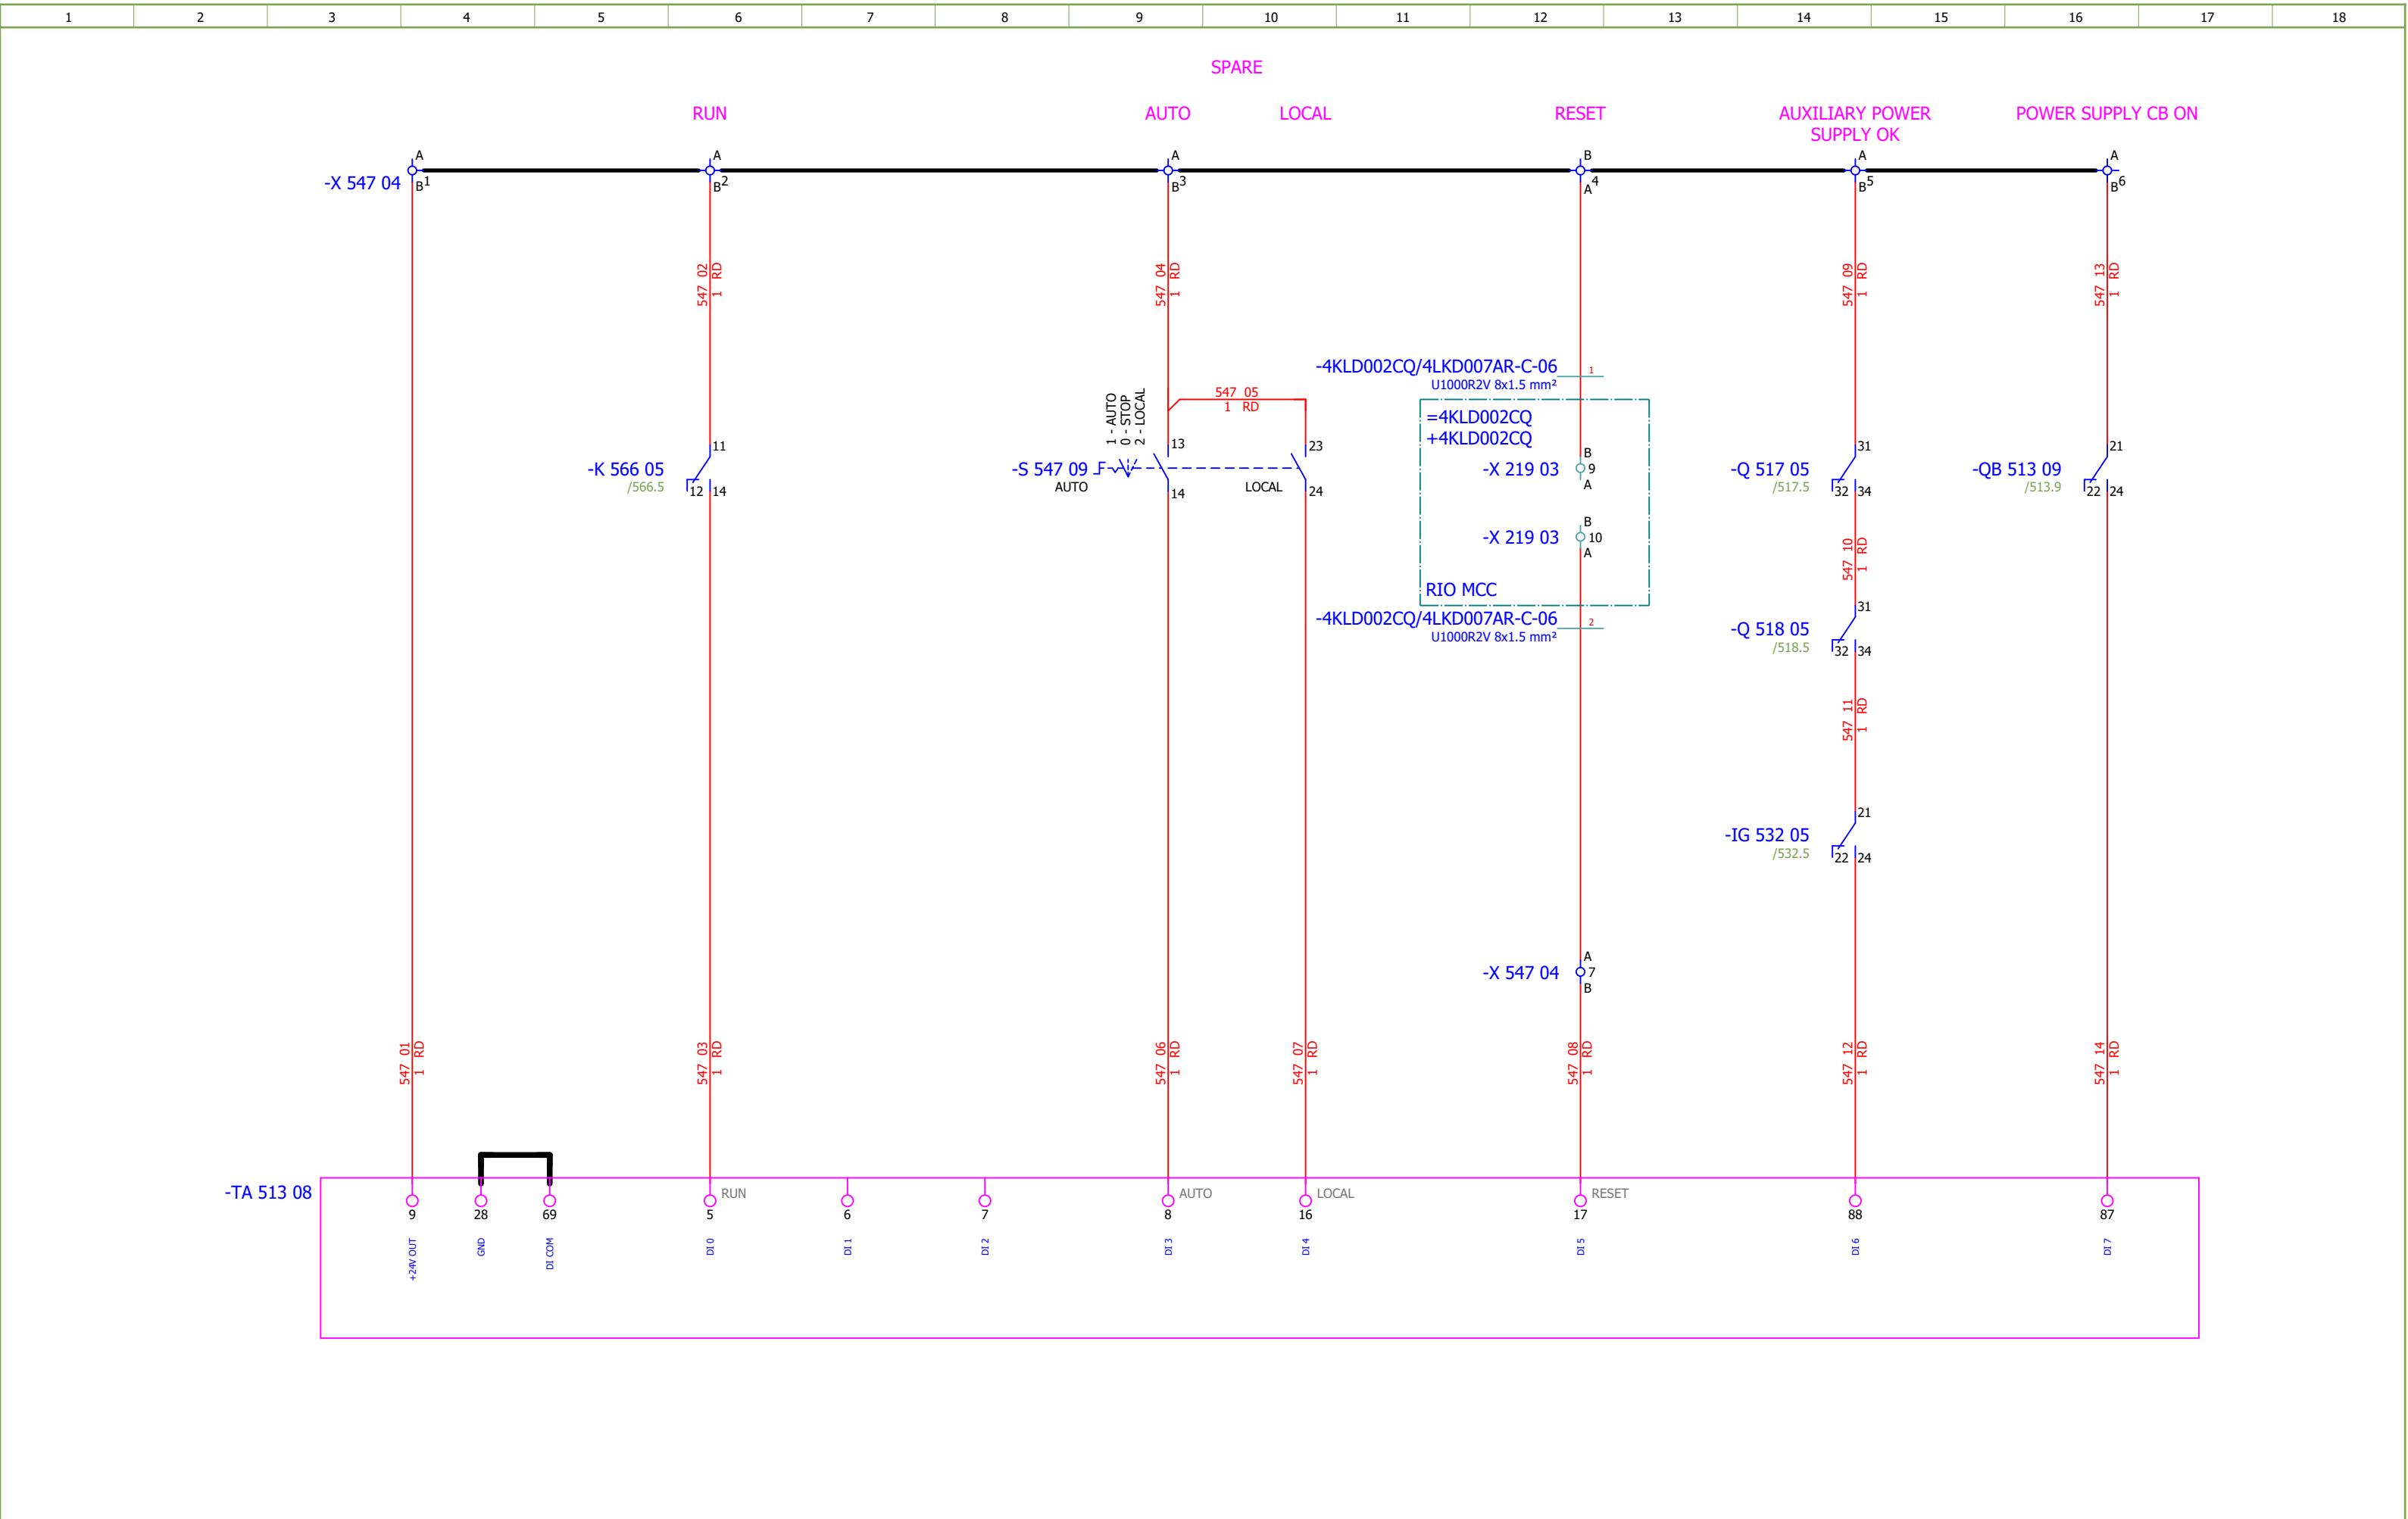


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F	
Drawn:	Luka Božičević				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	SPARE - DIGITAL OUTPUTS	Drawing designation:	BRC-4-ATEP0-1874-F							#MB
Approved:	Grga Kolić																
Format:	A3																

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F	
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	SPARE - ANALOG INPUTS	Drawing designation: BRC-4-ATEP0-1874-F					=4LKF001AR	Sheet:	549		
Approved:	Grga Kolić												+4LKF006AR	Next:	550		
Format:	A3																

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F	
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	COOLING WATER PUMP 2 - DIGITAL OUTPUTS	Drawing designation: BRC-4-ATEP0-1874-F						=4LKF001AR	Sheet:	551	
Approved:	Grga Kolić													+4LKF006AR	Next:	552	
Format:	A3																

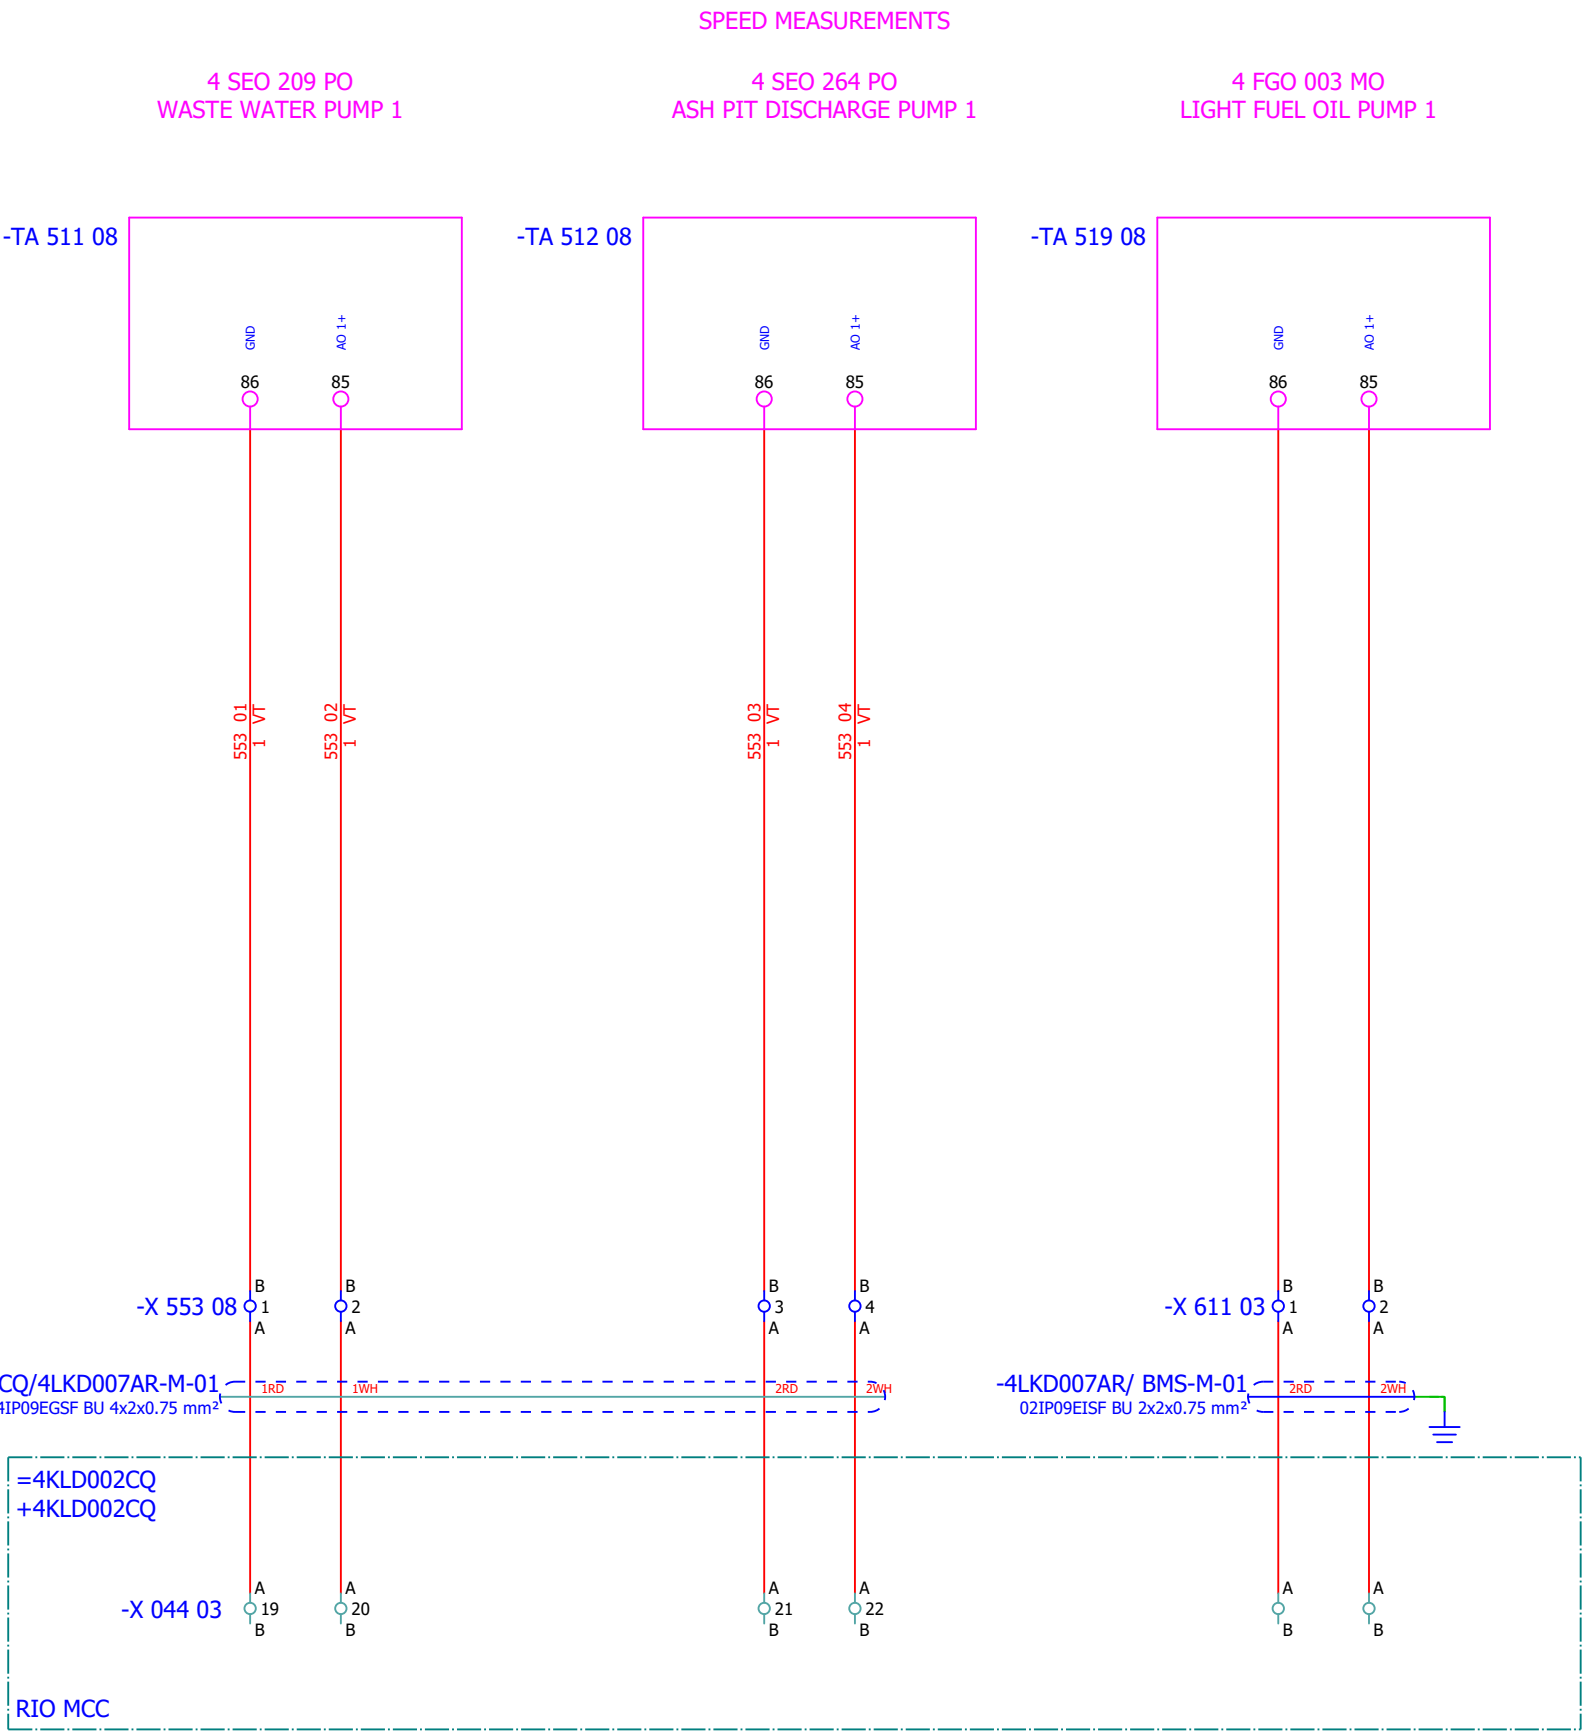

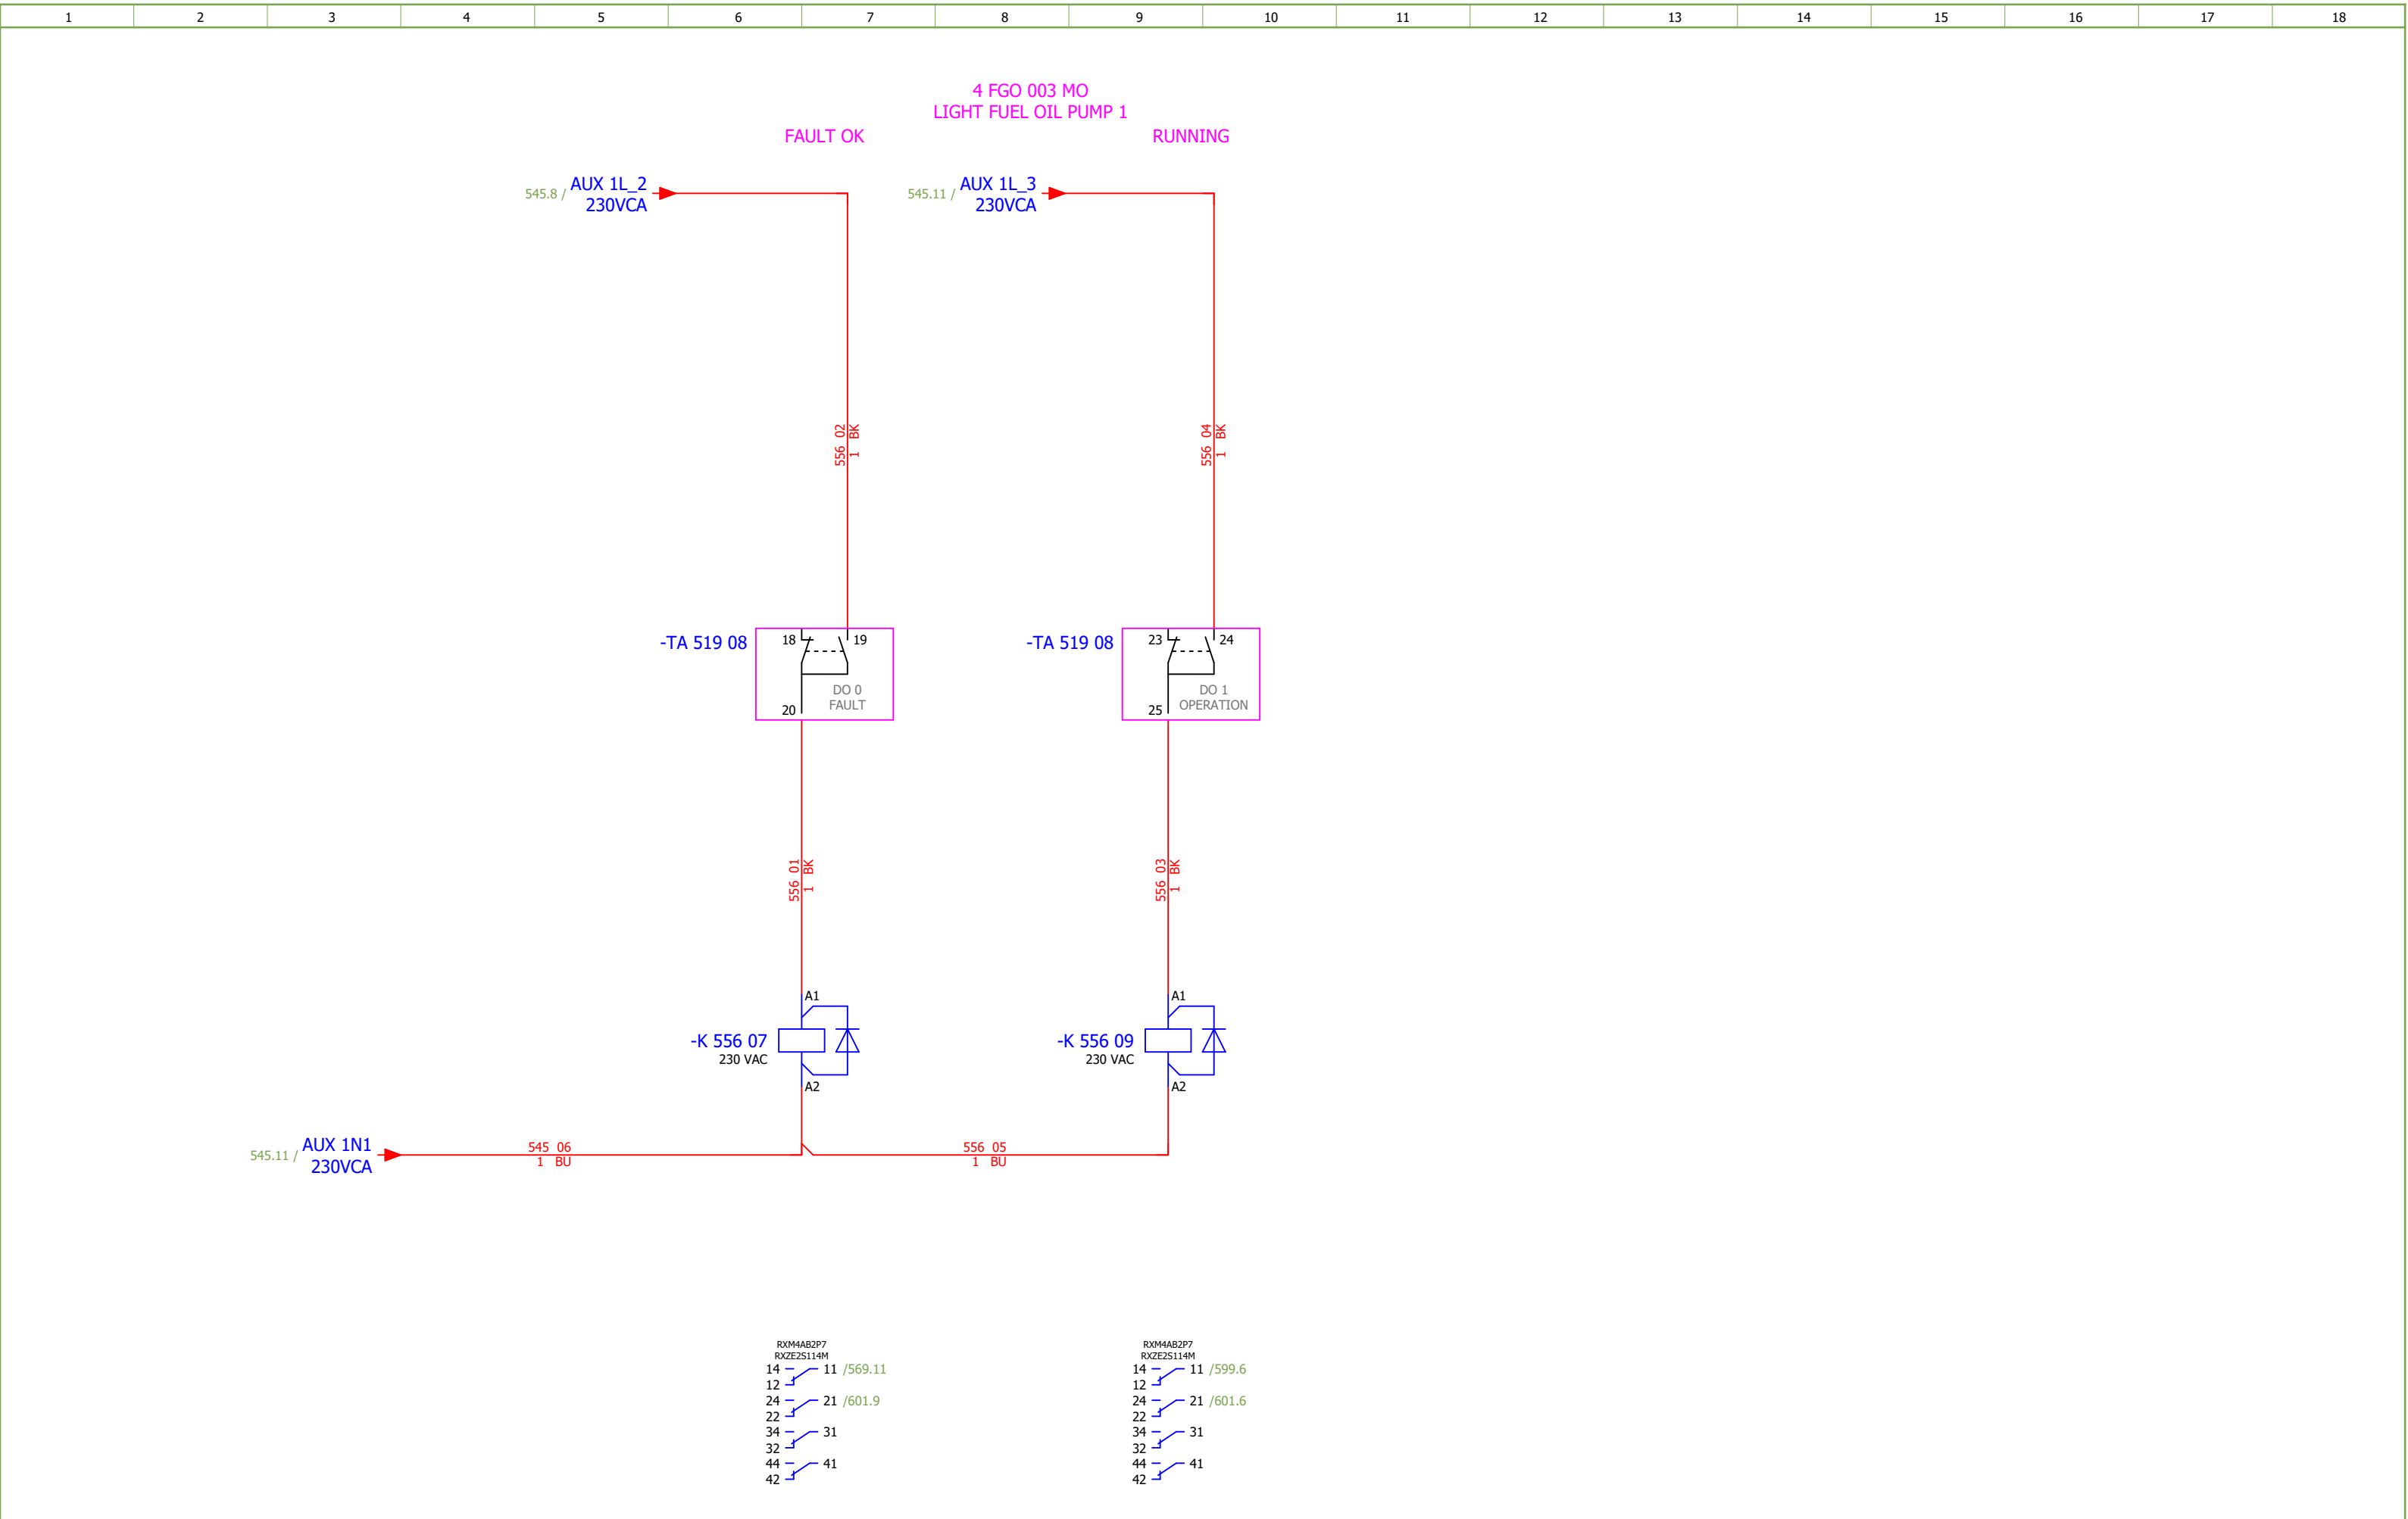


Date:	04.12.2025.		Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7	Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F	
Drawn:	Luka Božičević		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	LIGHT FUEL OIL PUMP 1 - DIGITAL OUTPUTS	Drawing designation:	BRC-4-ATEP0-1874-F							#MB
Approved:	Grga Kolić												=4LKF001AR	Sheet:	556
Format:	A3												+4LKF006AR	Next:	557


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----

4 FGO 003 MO
LIGHT FUEL OIL PUMP 1


SETPOINT

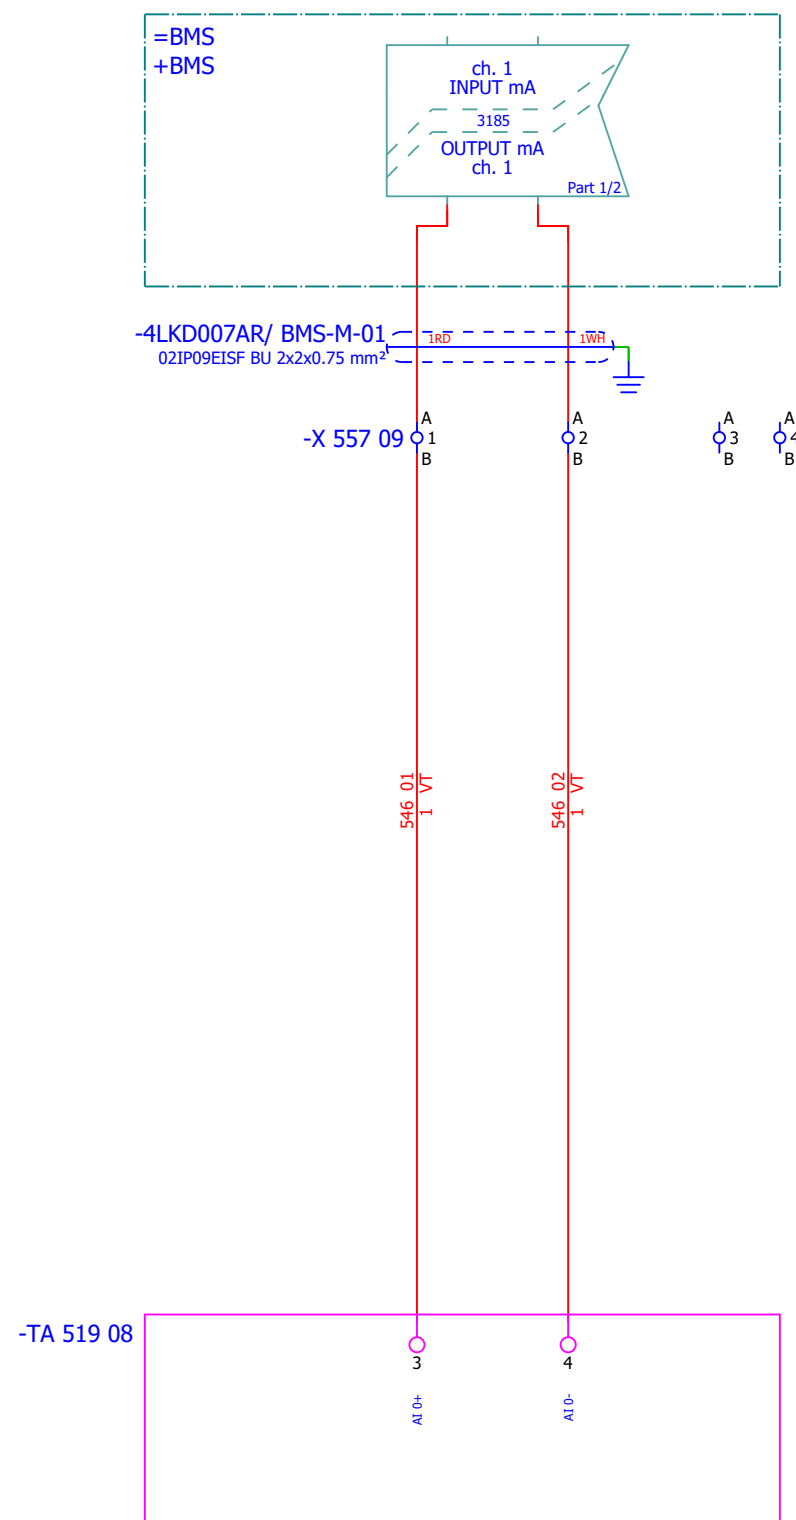


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F		
Drawn:	Luka Božičević																#MB	
Approved:	Grga Kolić				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	LIGHT FUEL OIL PUMP 2 - DIGITAL OUTPUTS		Drawing designation:			BRC-4-ATEP0-1874-F			=4LKF001AR	Sheet:	559
Format:	A3														+4LKF006AR	Next:	560	

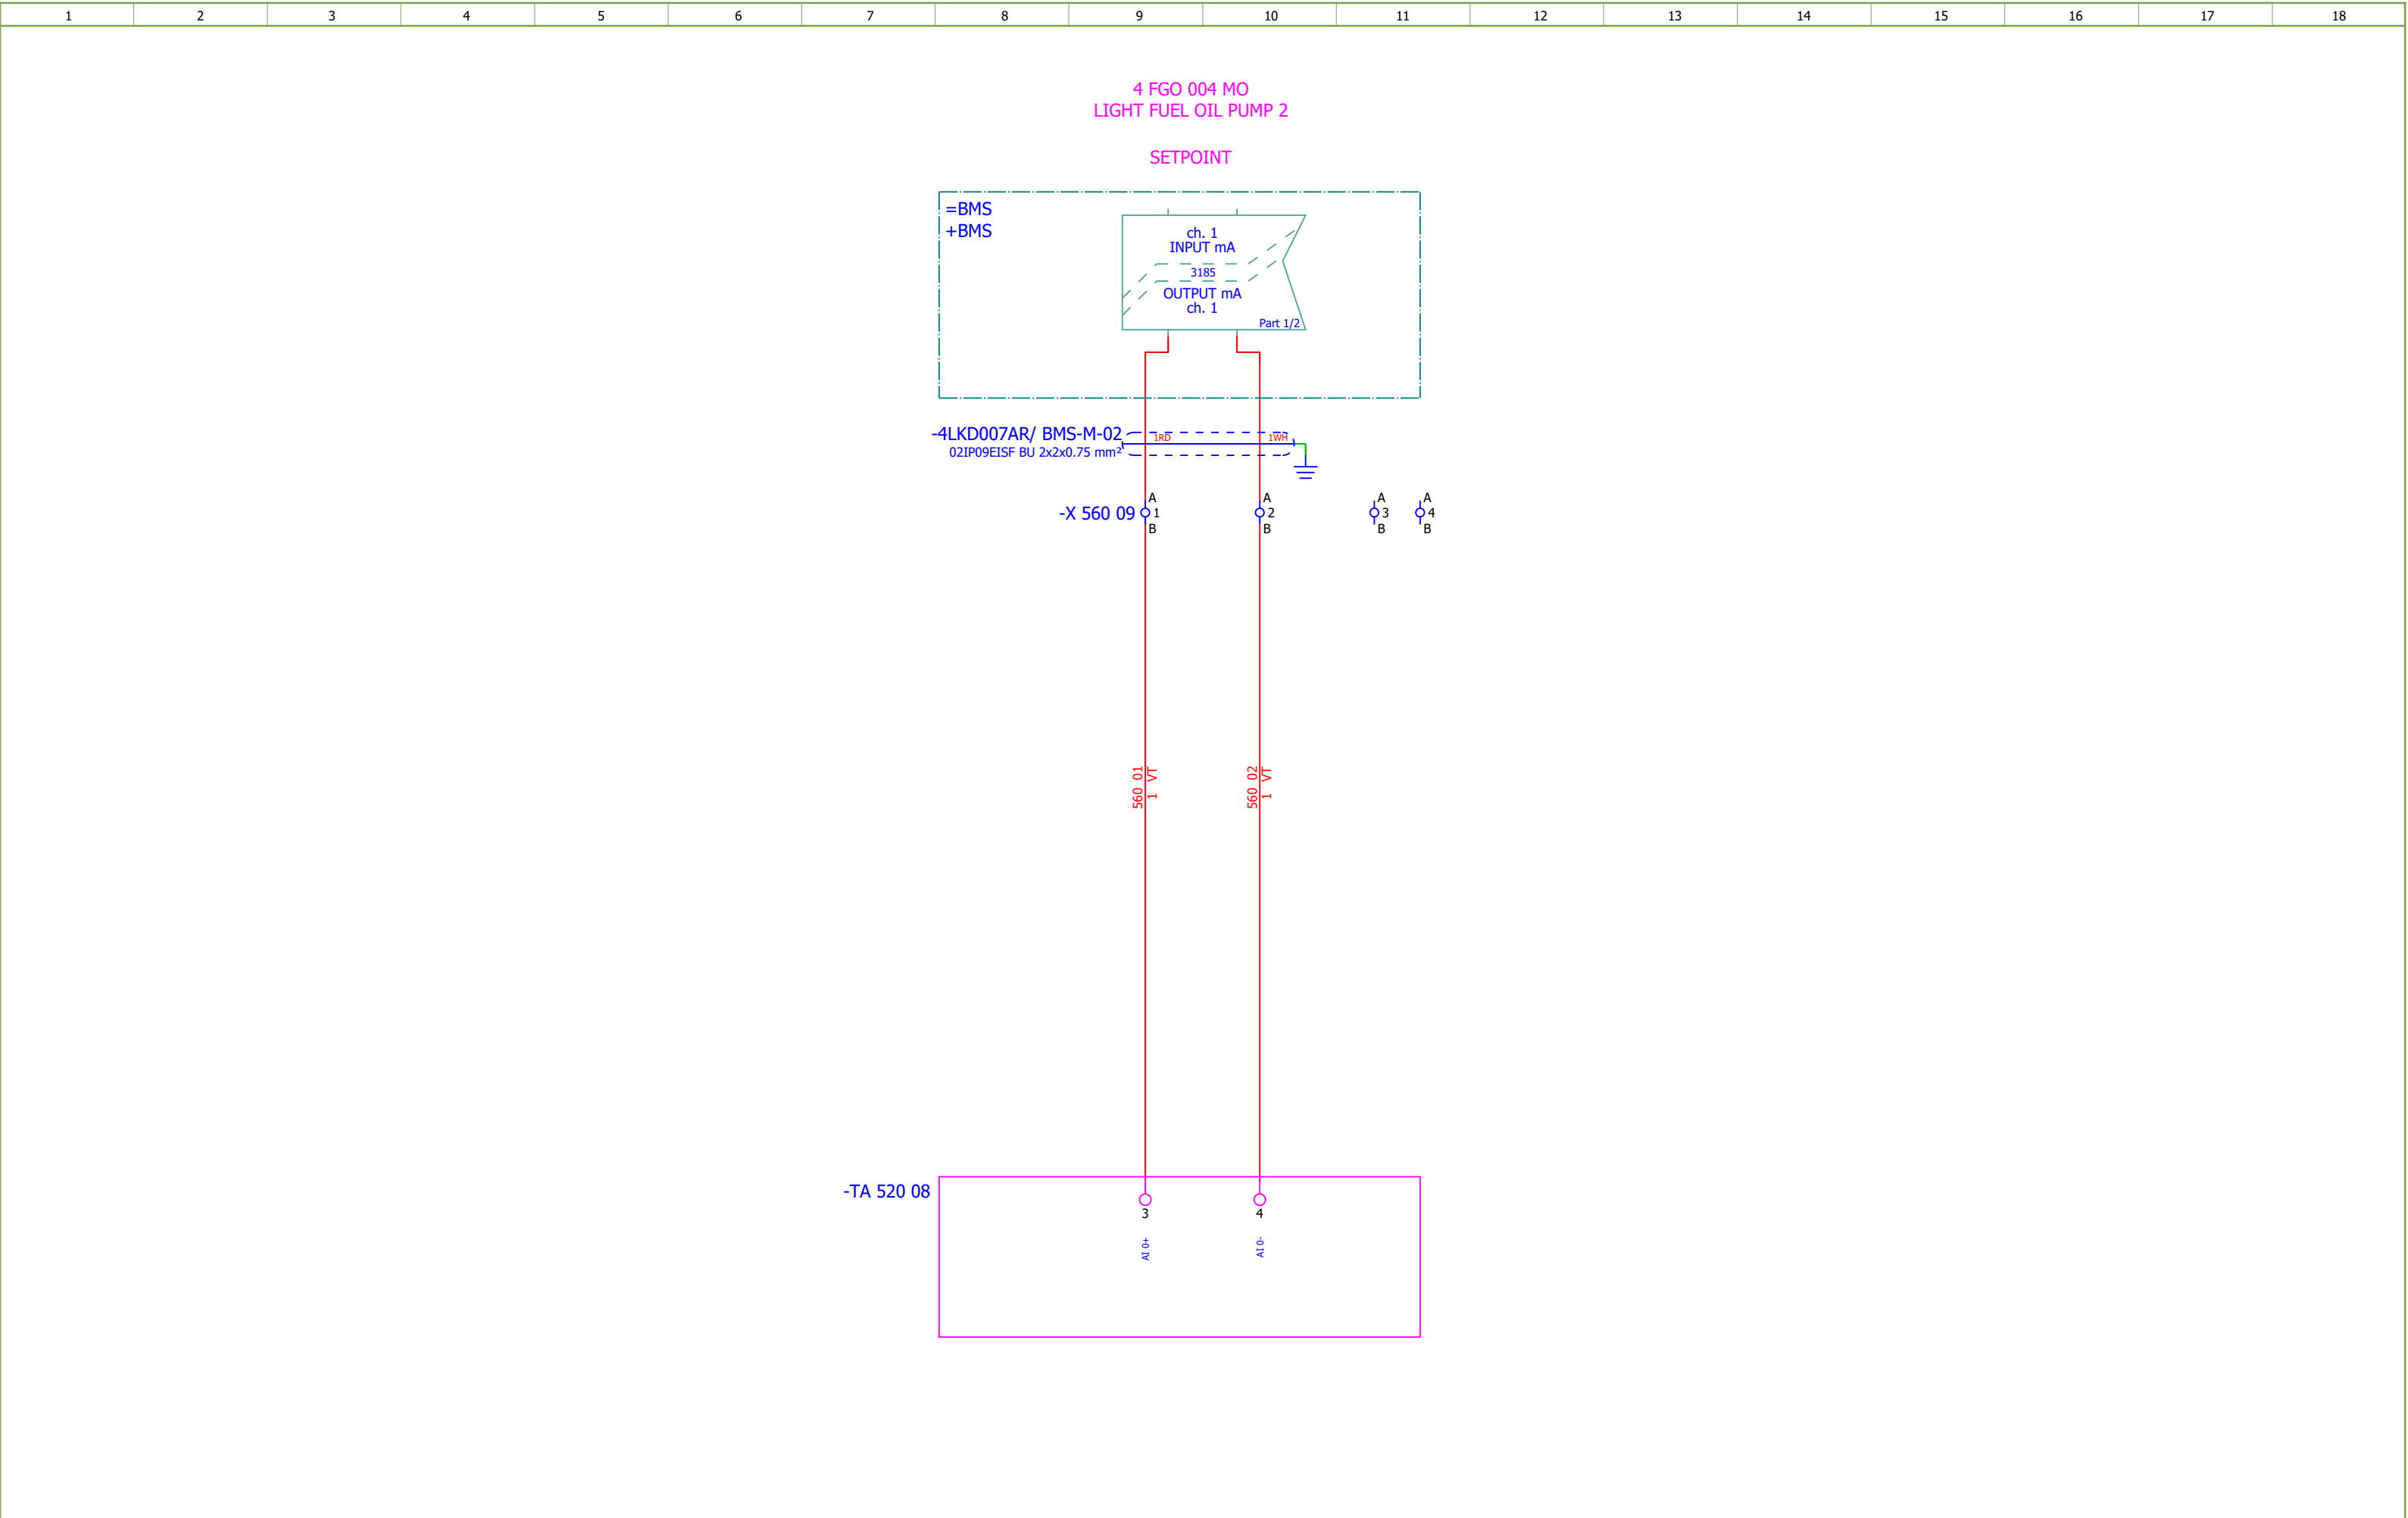


Date:	04.12.2025.	 SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7	Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F	
Drawn:	Luka Božičević		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	LIGHT FUEL OIL PUMP 2 - ANALOG INPUTS	Drawing designation:		BRC-4-ATEP0-1874-F				=4LKF001AR		#MB
Approved:	Grga Kolić												+4LKF006AR		Sheet: 560
Format:	A3														Next: 561

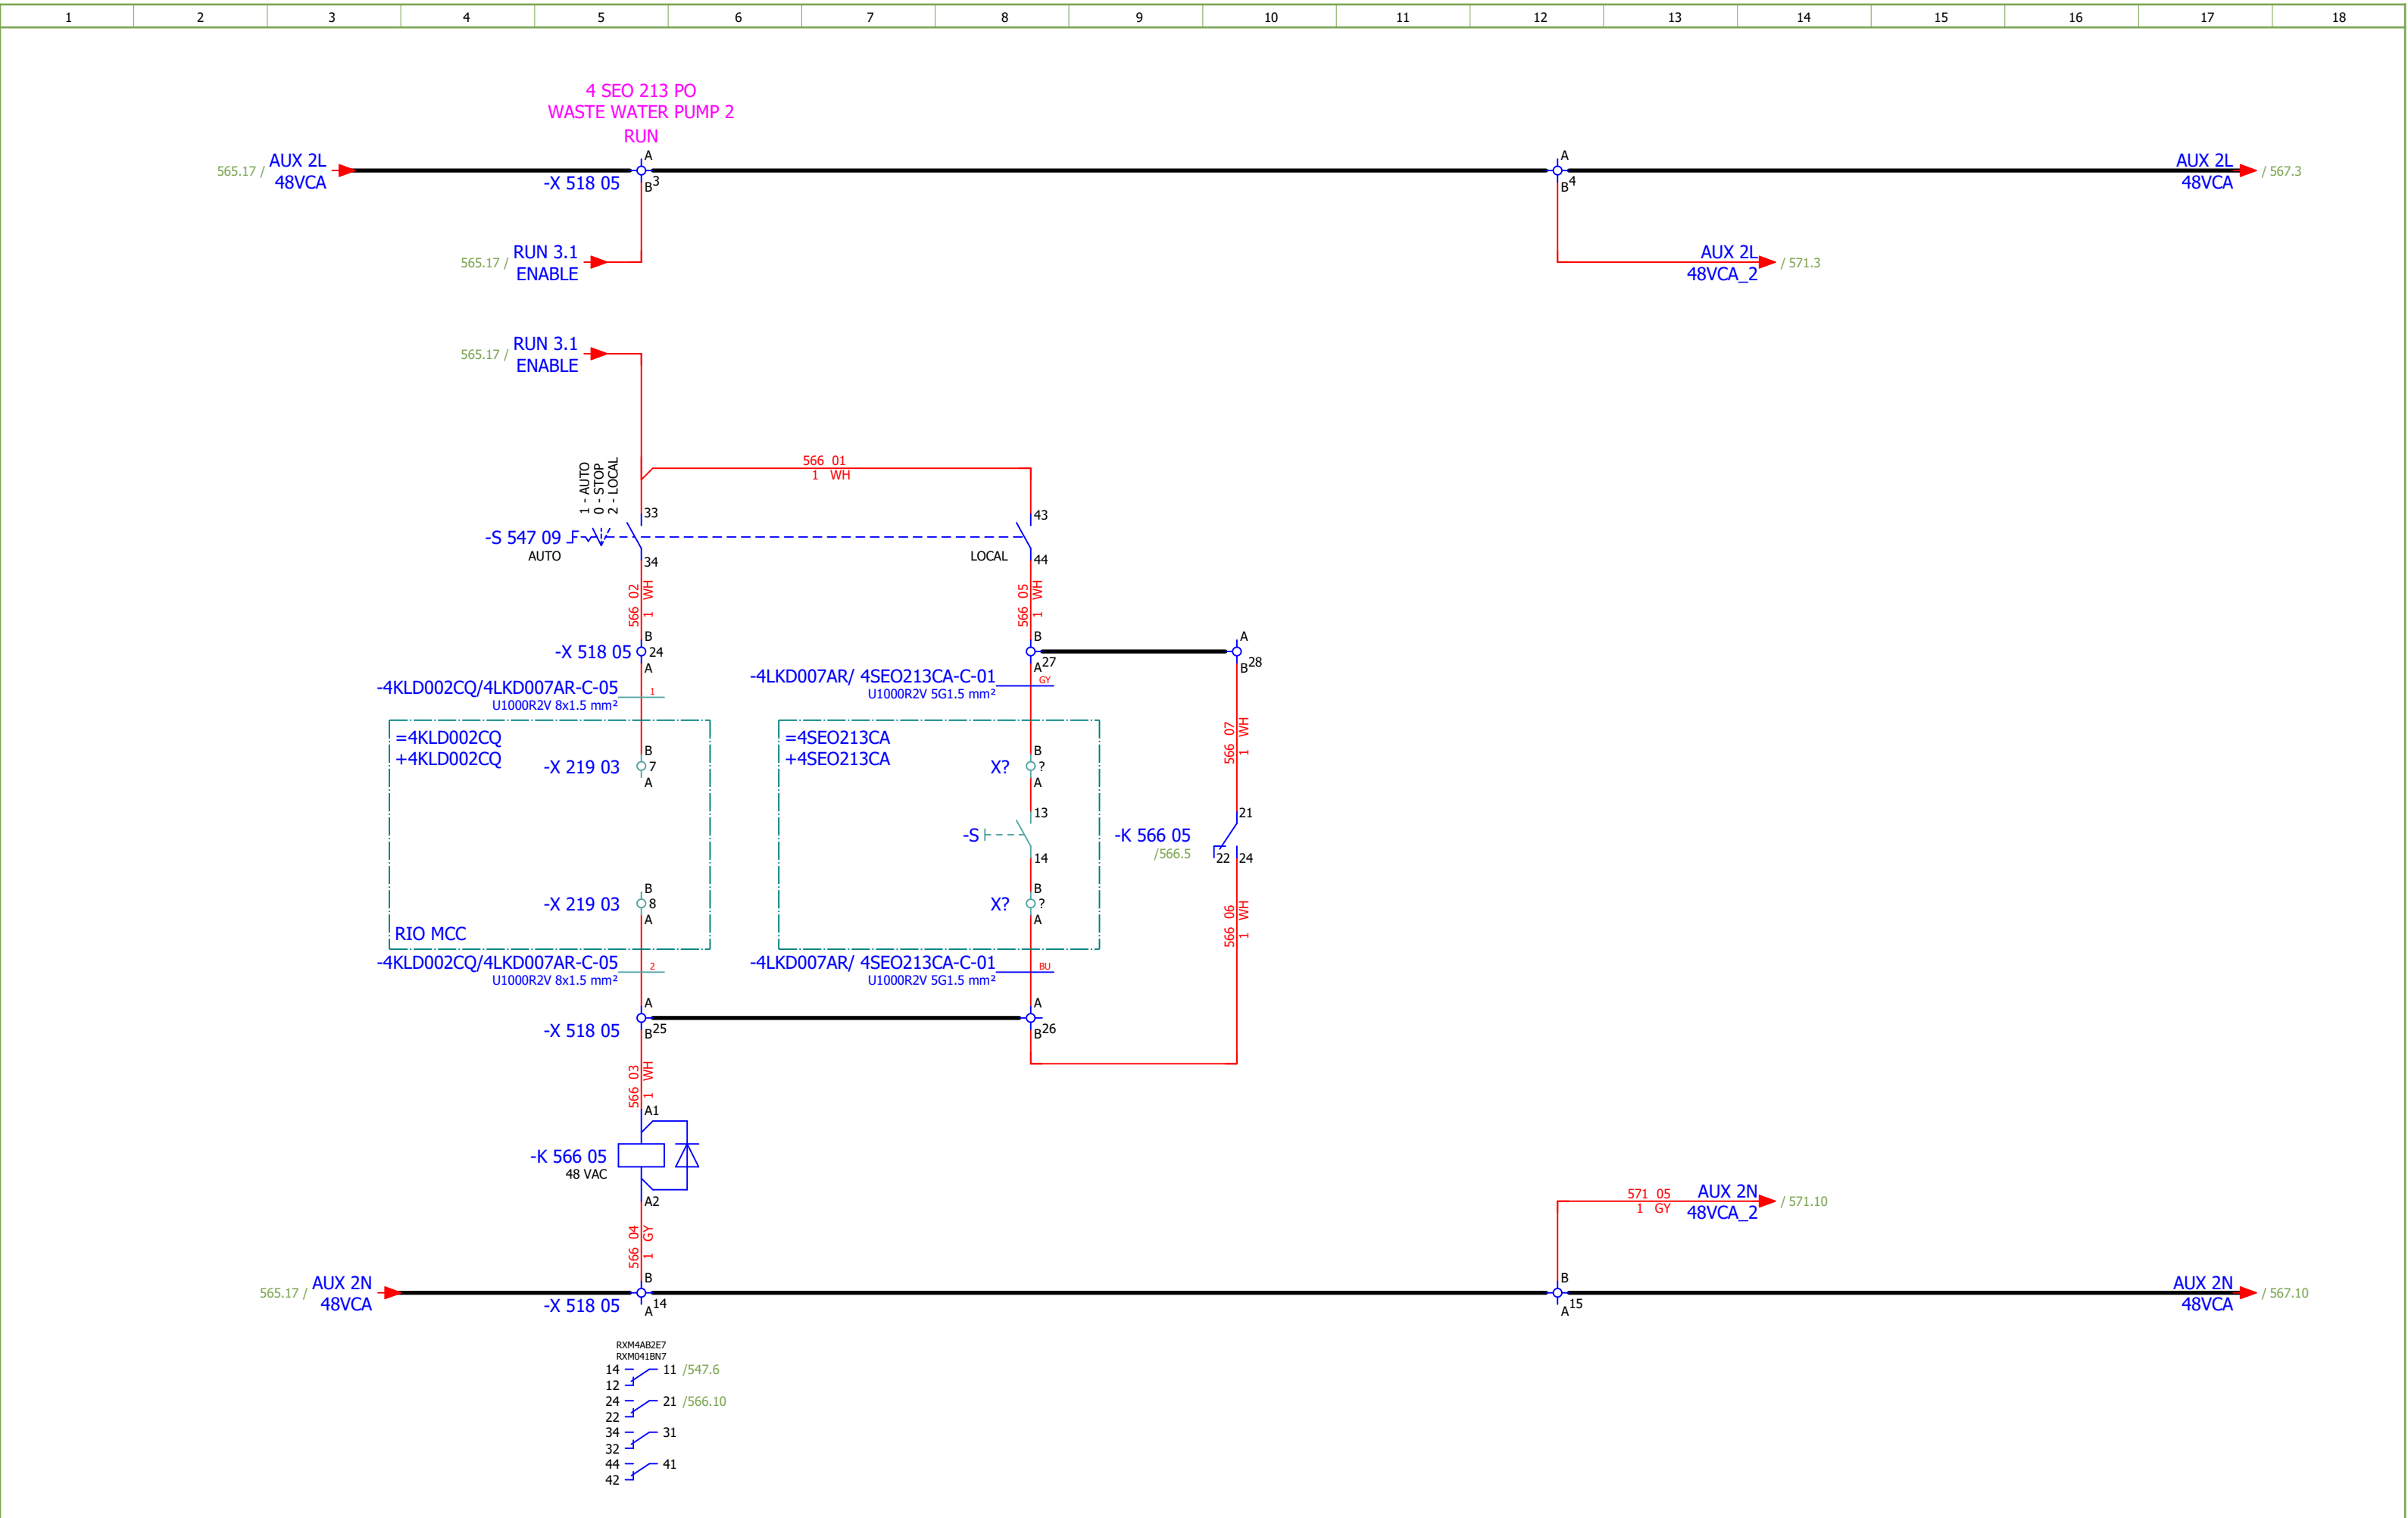


Date:	04.12.2025.		Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7	Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F	
Drawn:	Luka Božičević		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	WASTE WATER PUMP 2 - CONTROL	Drawing designation:			BRC-4-ATEP0-1874-F			=4LKF001AR	Sheet:	566
Approved:	Grga Kolić												+4LKF006AR	Next:	567
Format:	A3														

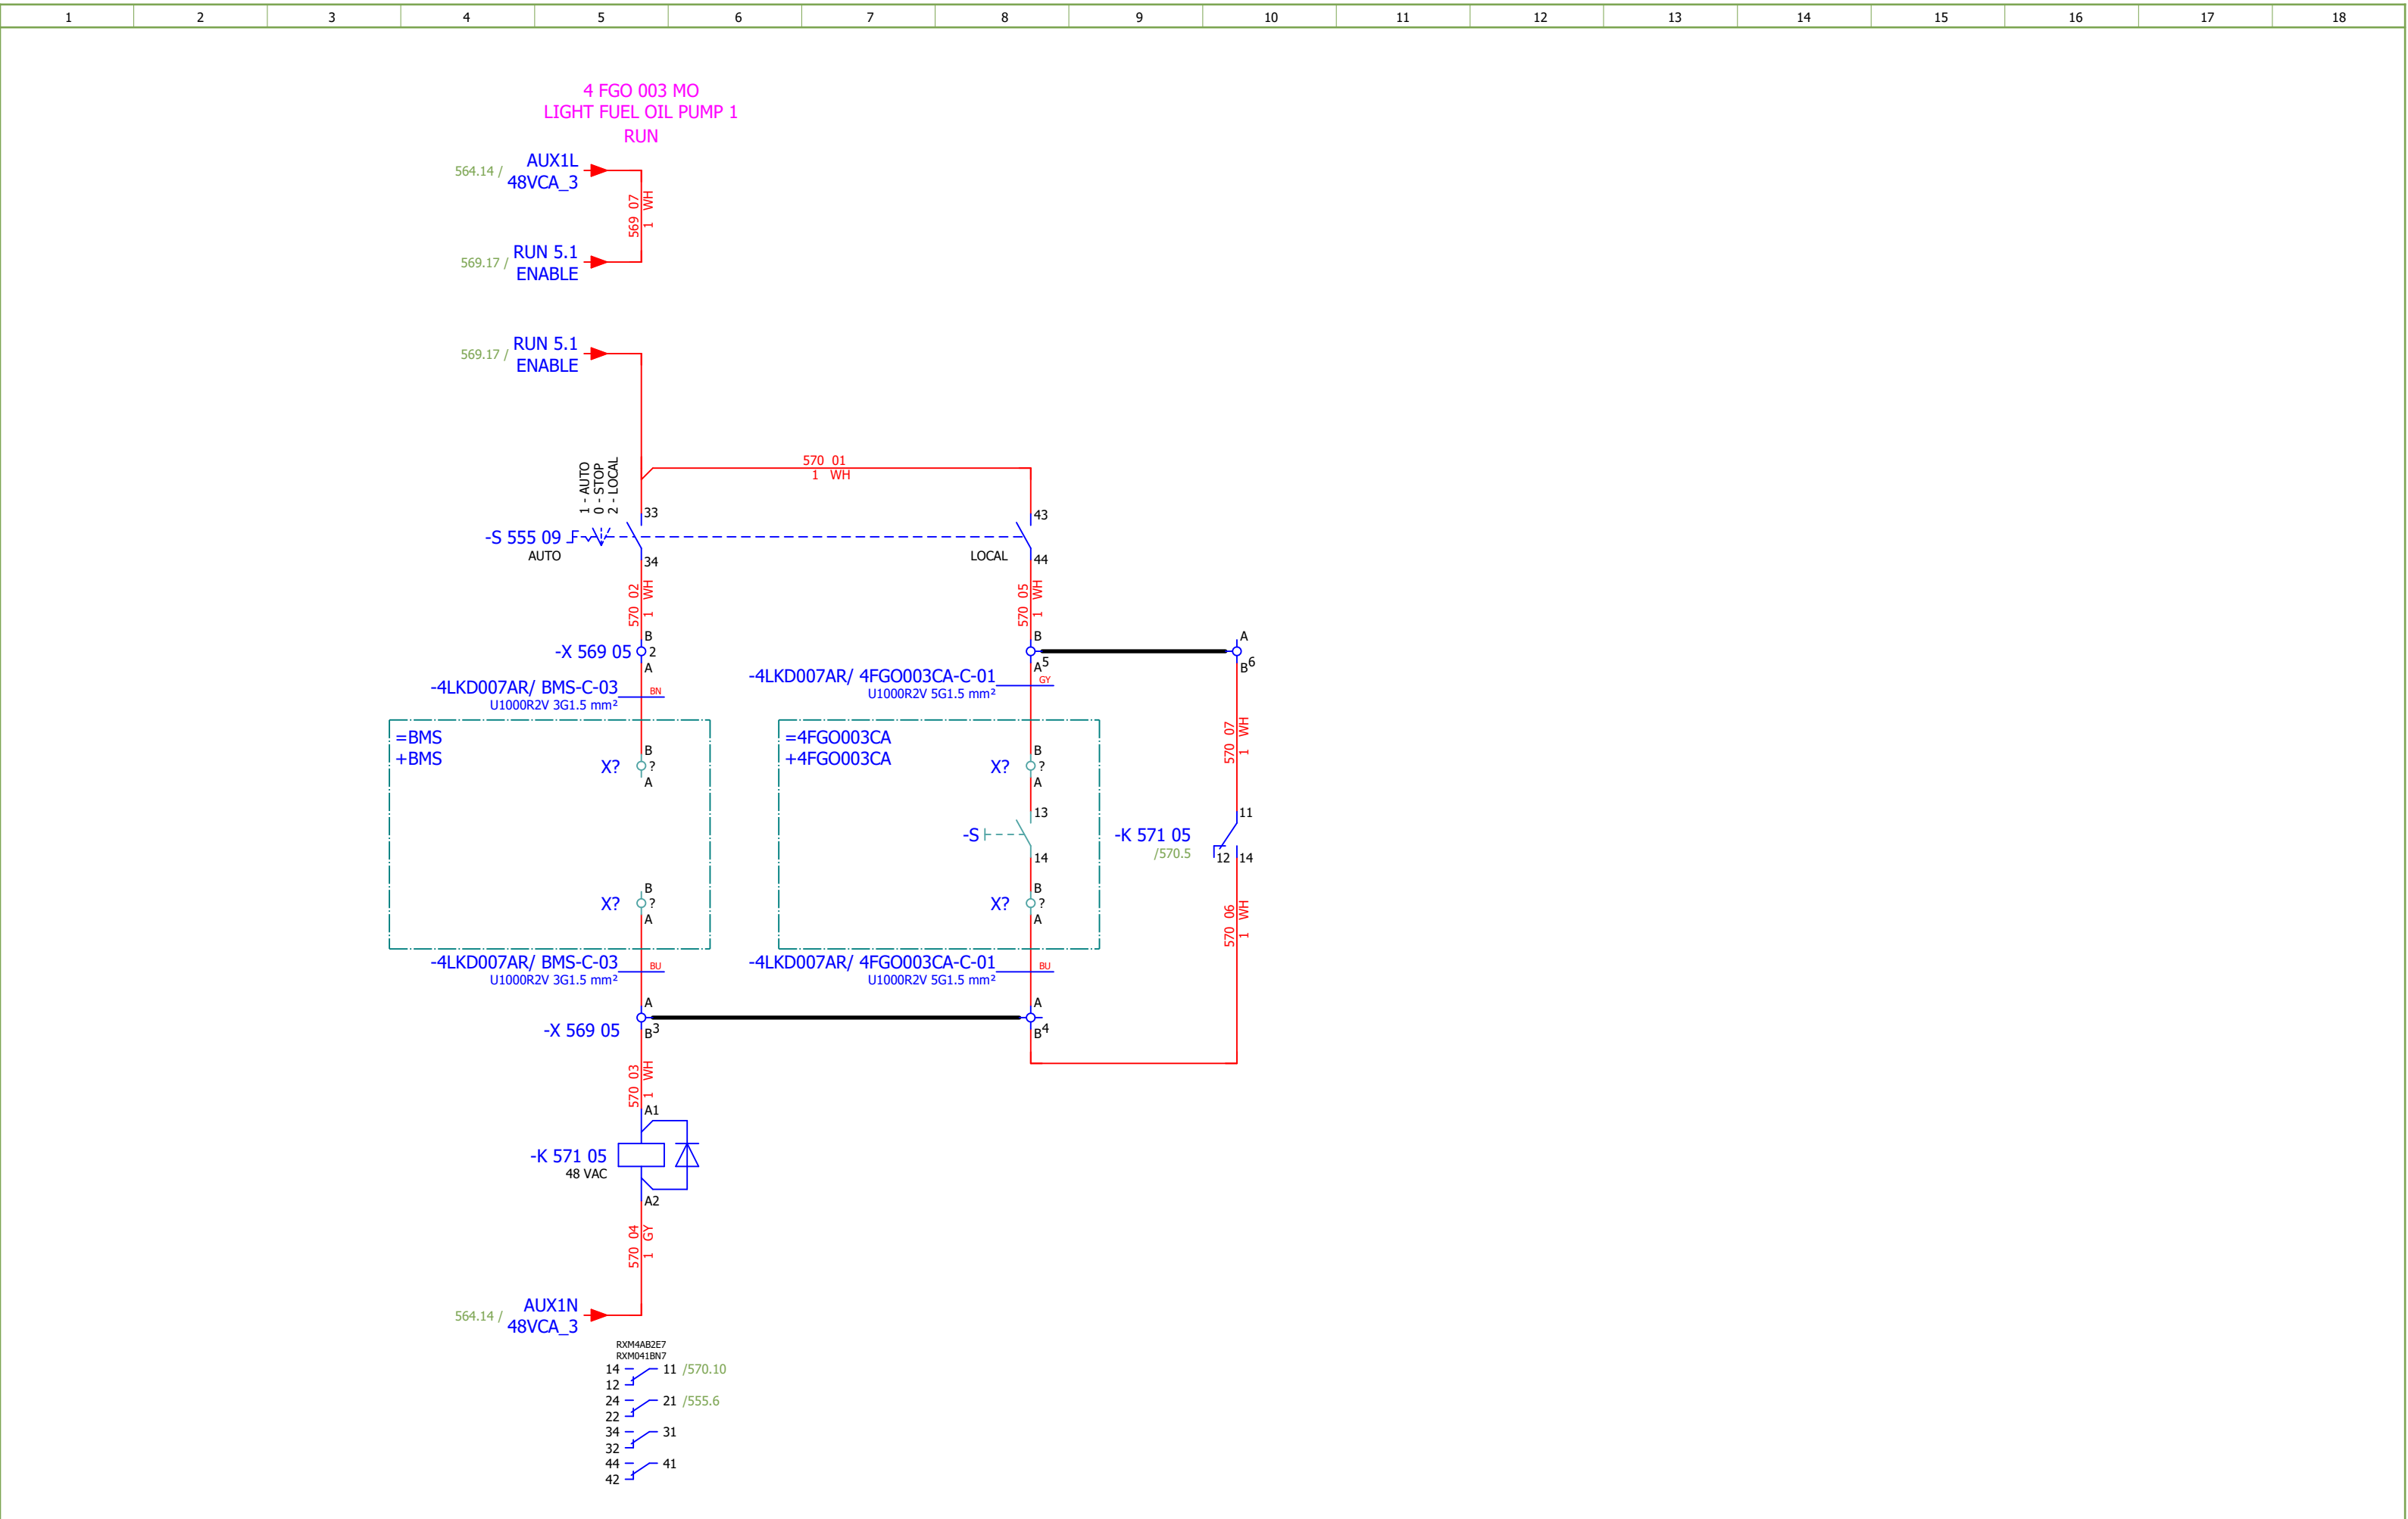



Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F			
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	LIGHT FUEL OIL PUMP 1 - CONTROL		Drawing designation: BRC-4-ATEP0-1874-F					=4LKF001AR	Sheet:	570			
Approved:	Grga Kolić													+4LKF006AR	Next:	571			
Format:	A3																		

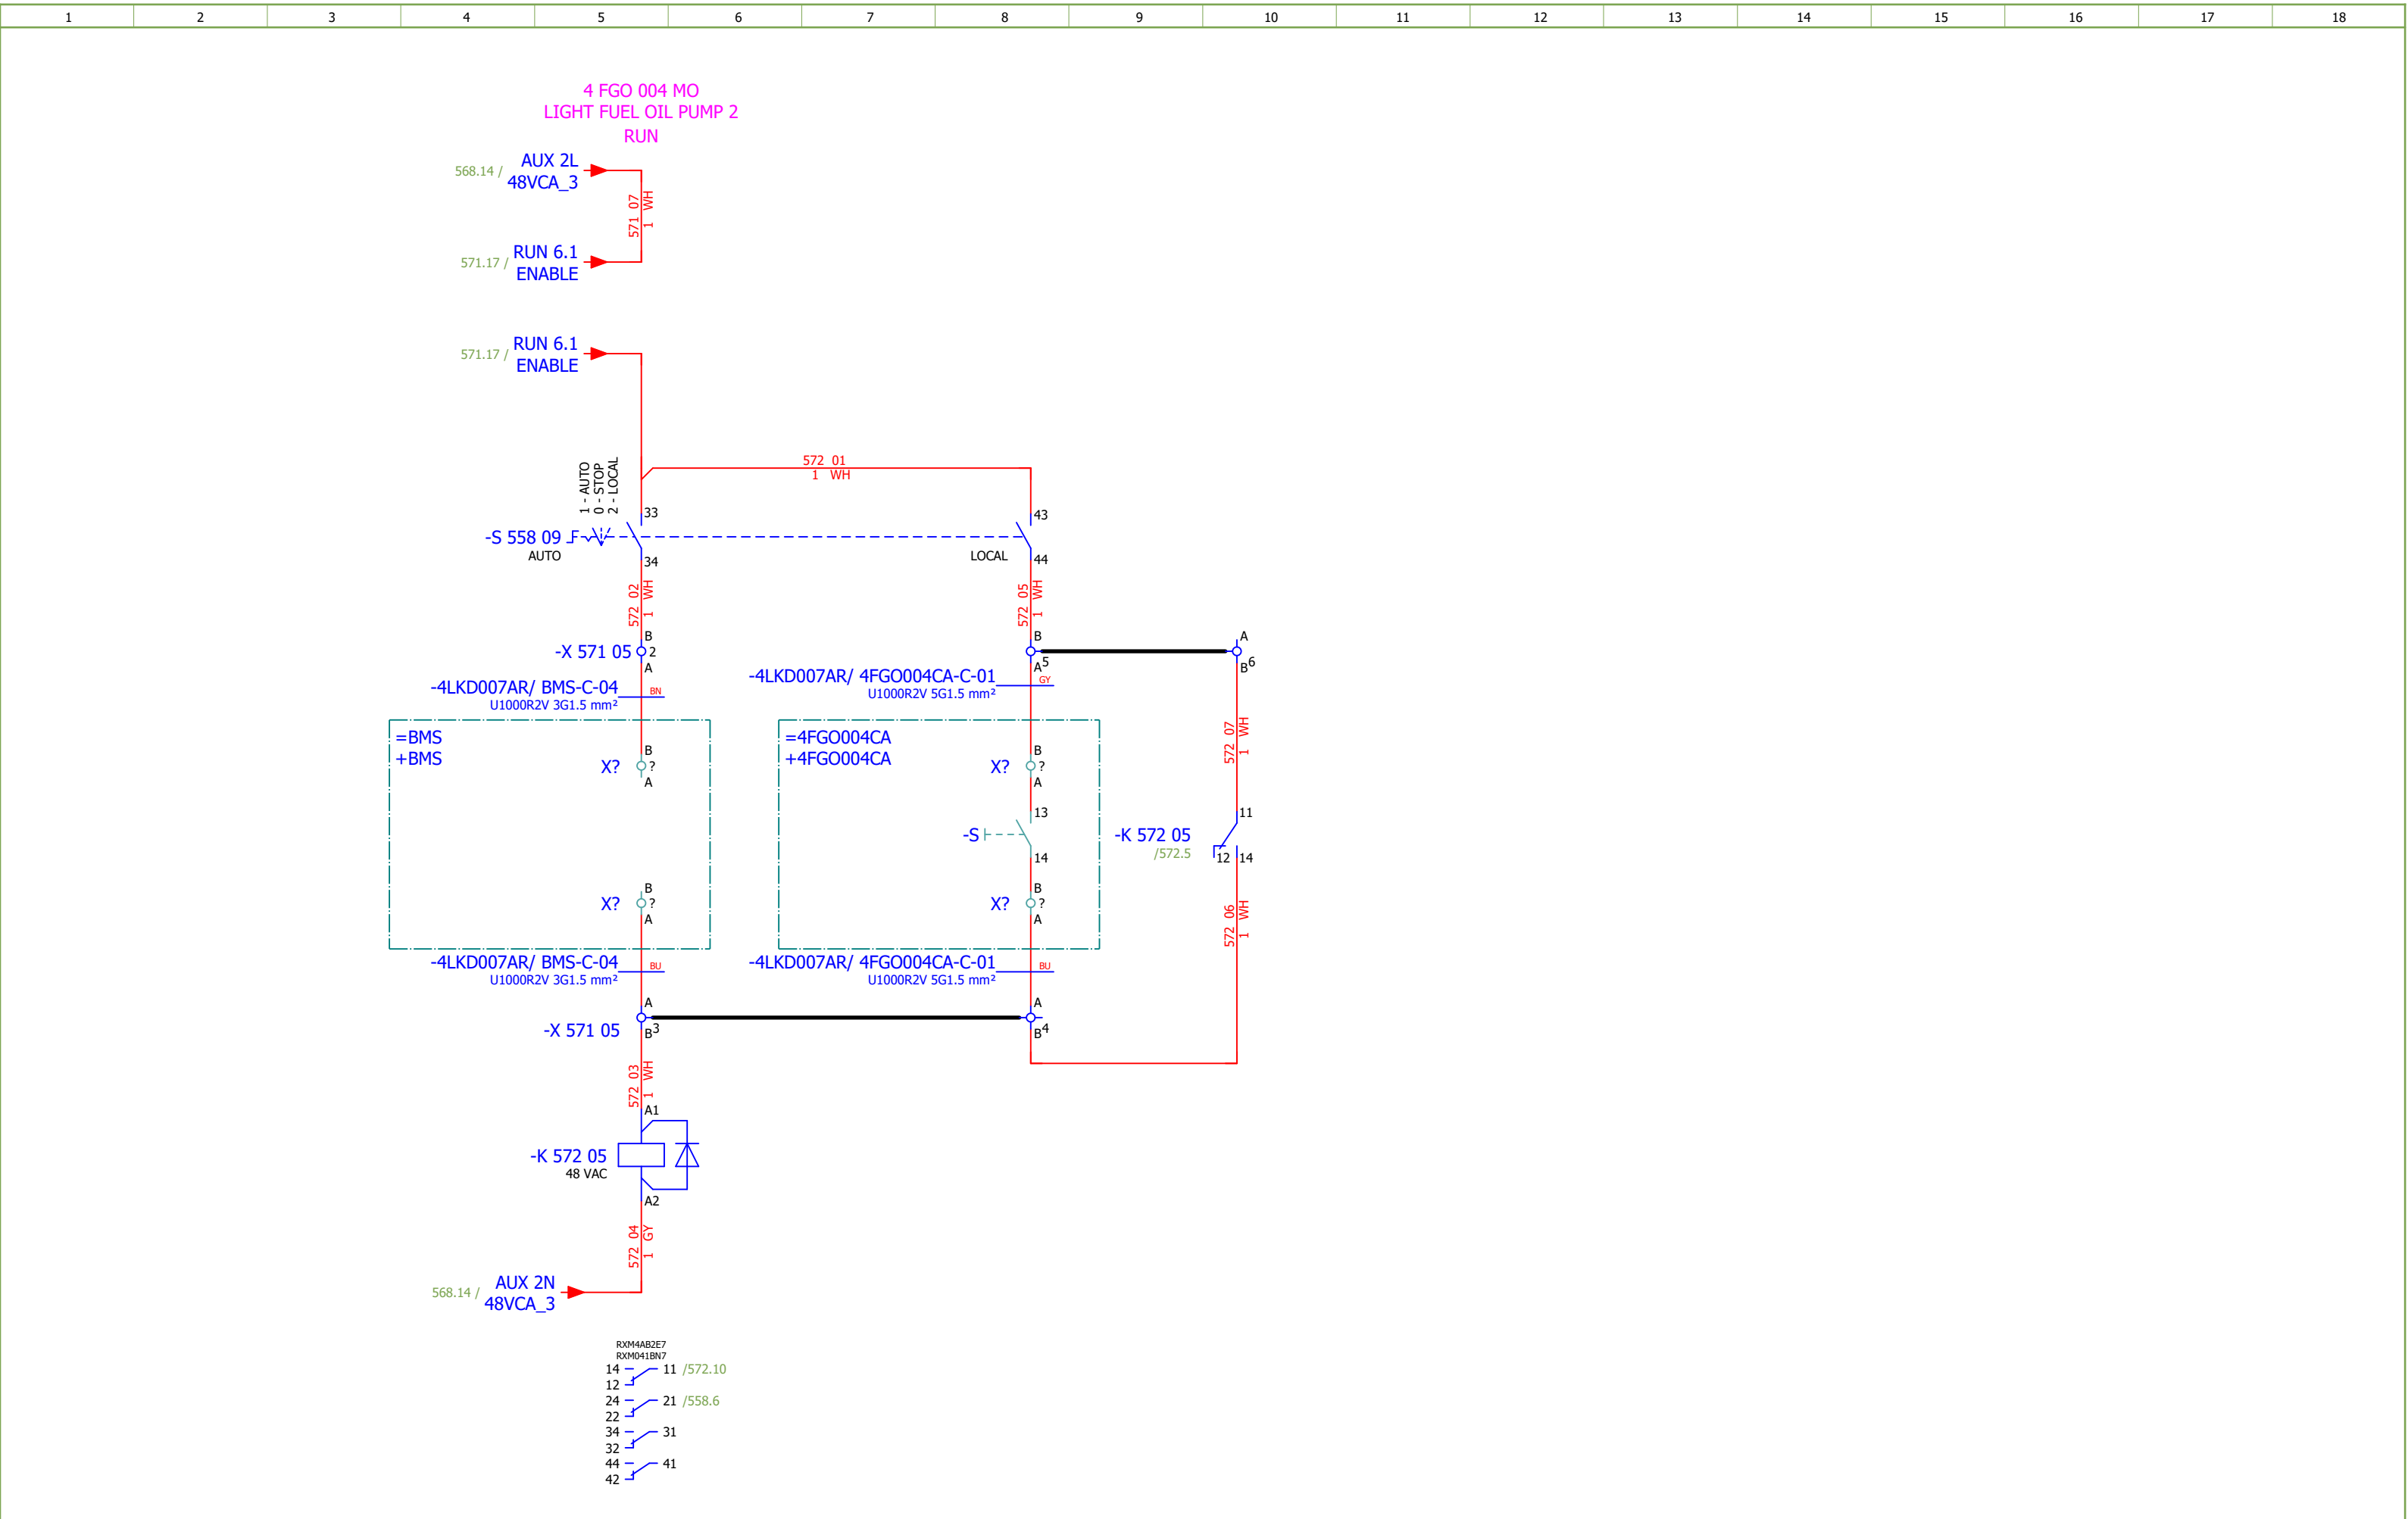


Date:	04.12.2025.		Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7	Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F	
Drawn:	Luka Božičević		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	LIGHT FUEL OIL PUMP 2 - CONTROL	Drawing designation:			BRC-4-ATEP0-1874-F			=4LKFO01AR	Sheet:	572
Approved:	Grga Kolić												+4LKFO06AR	Next:	581
Format:	A3														

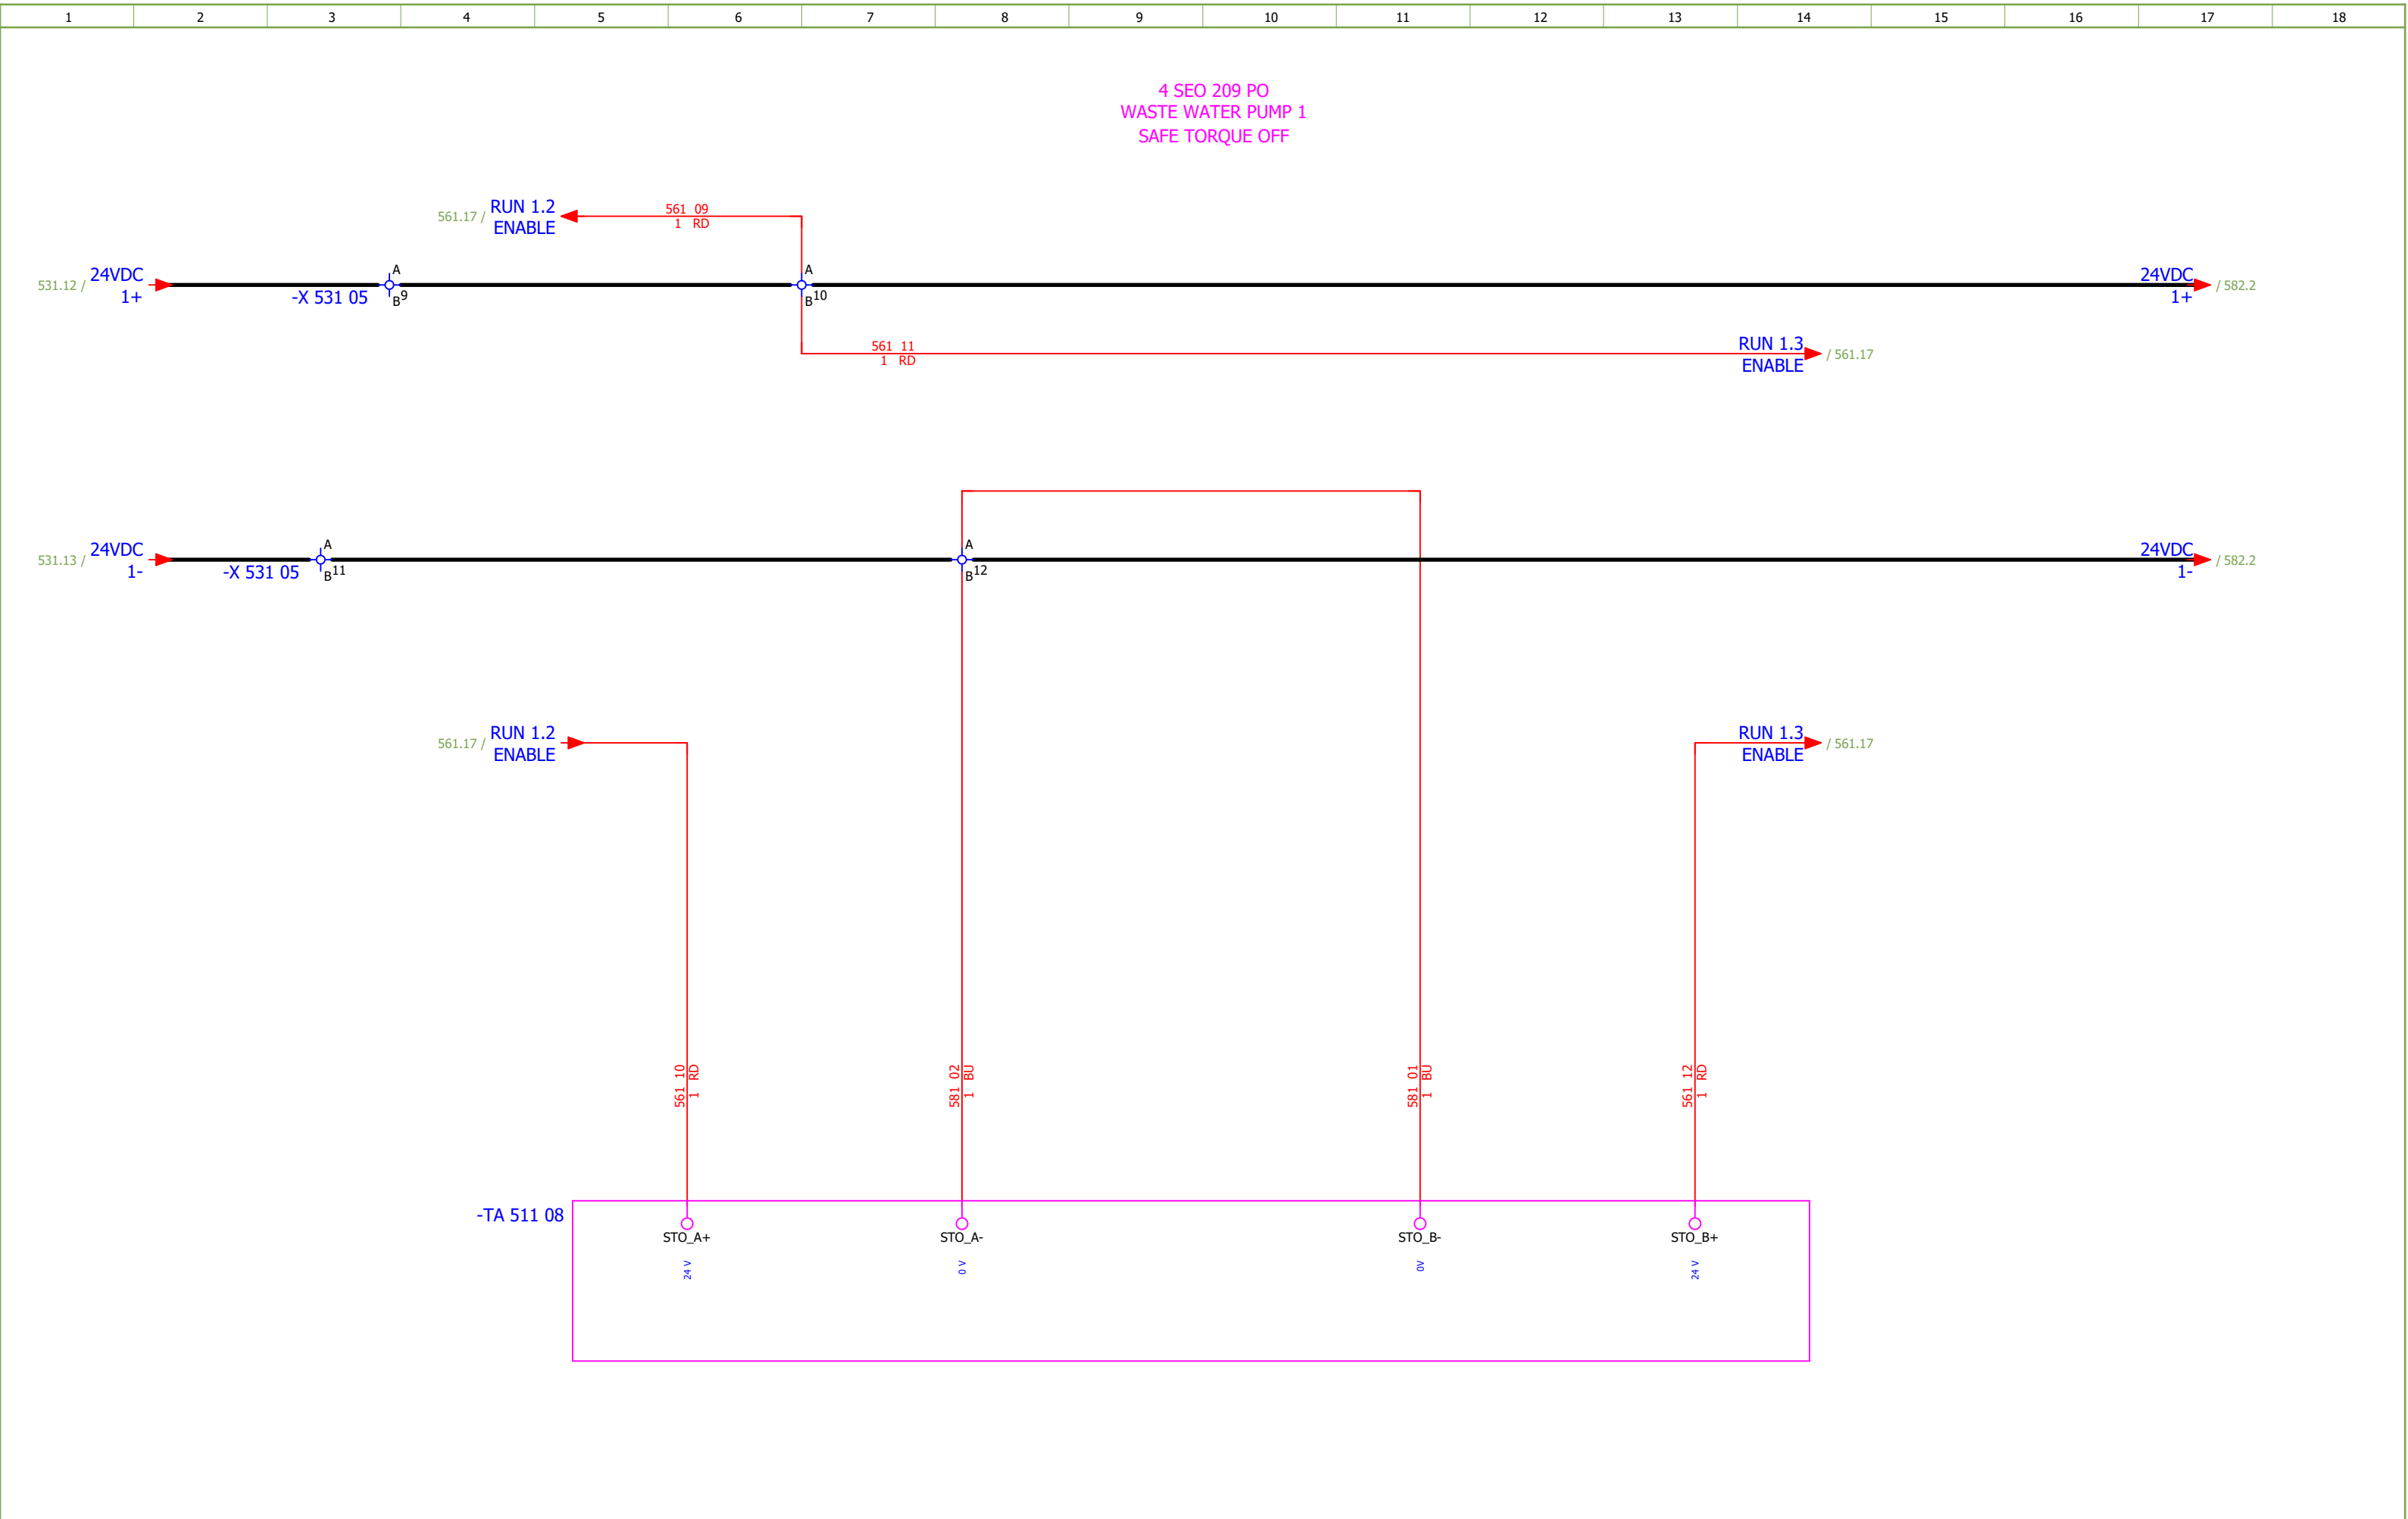


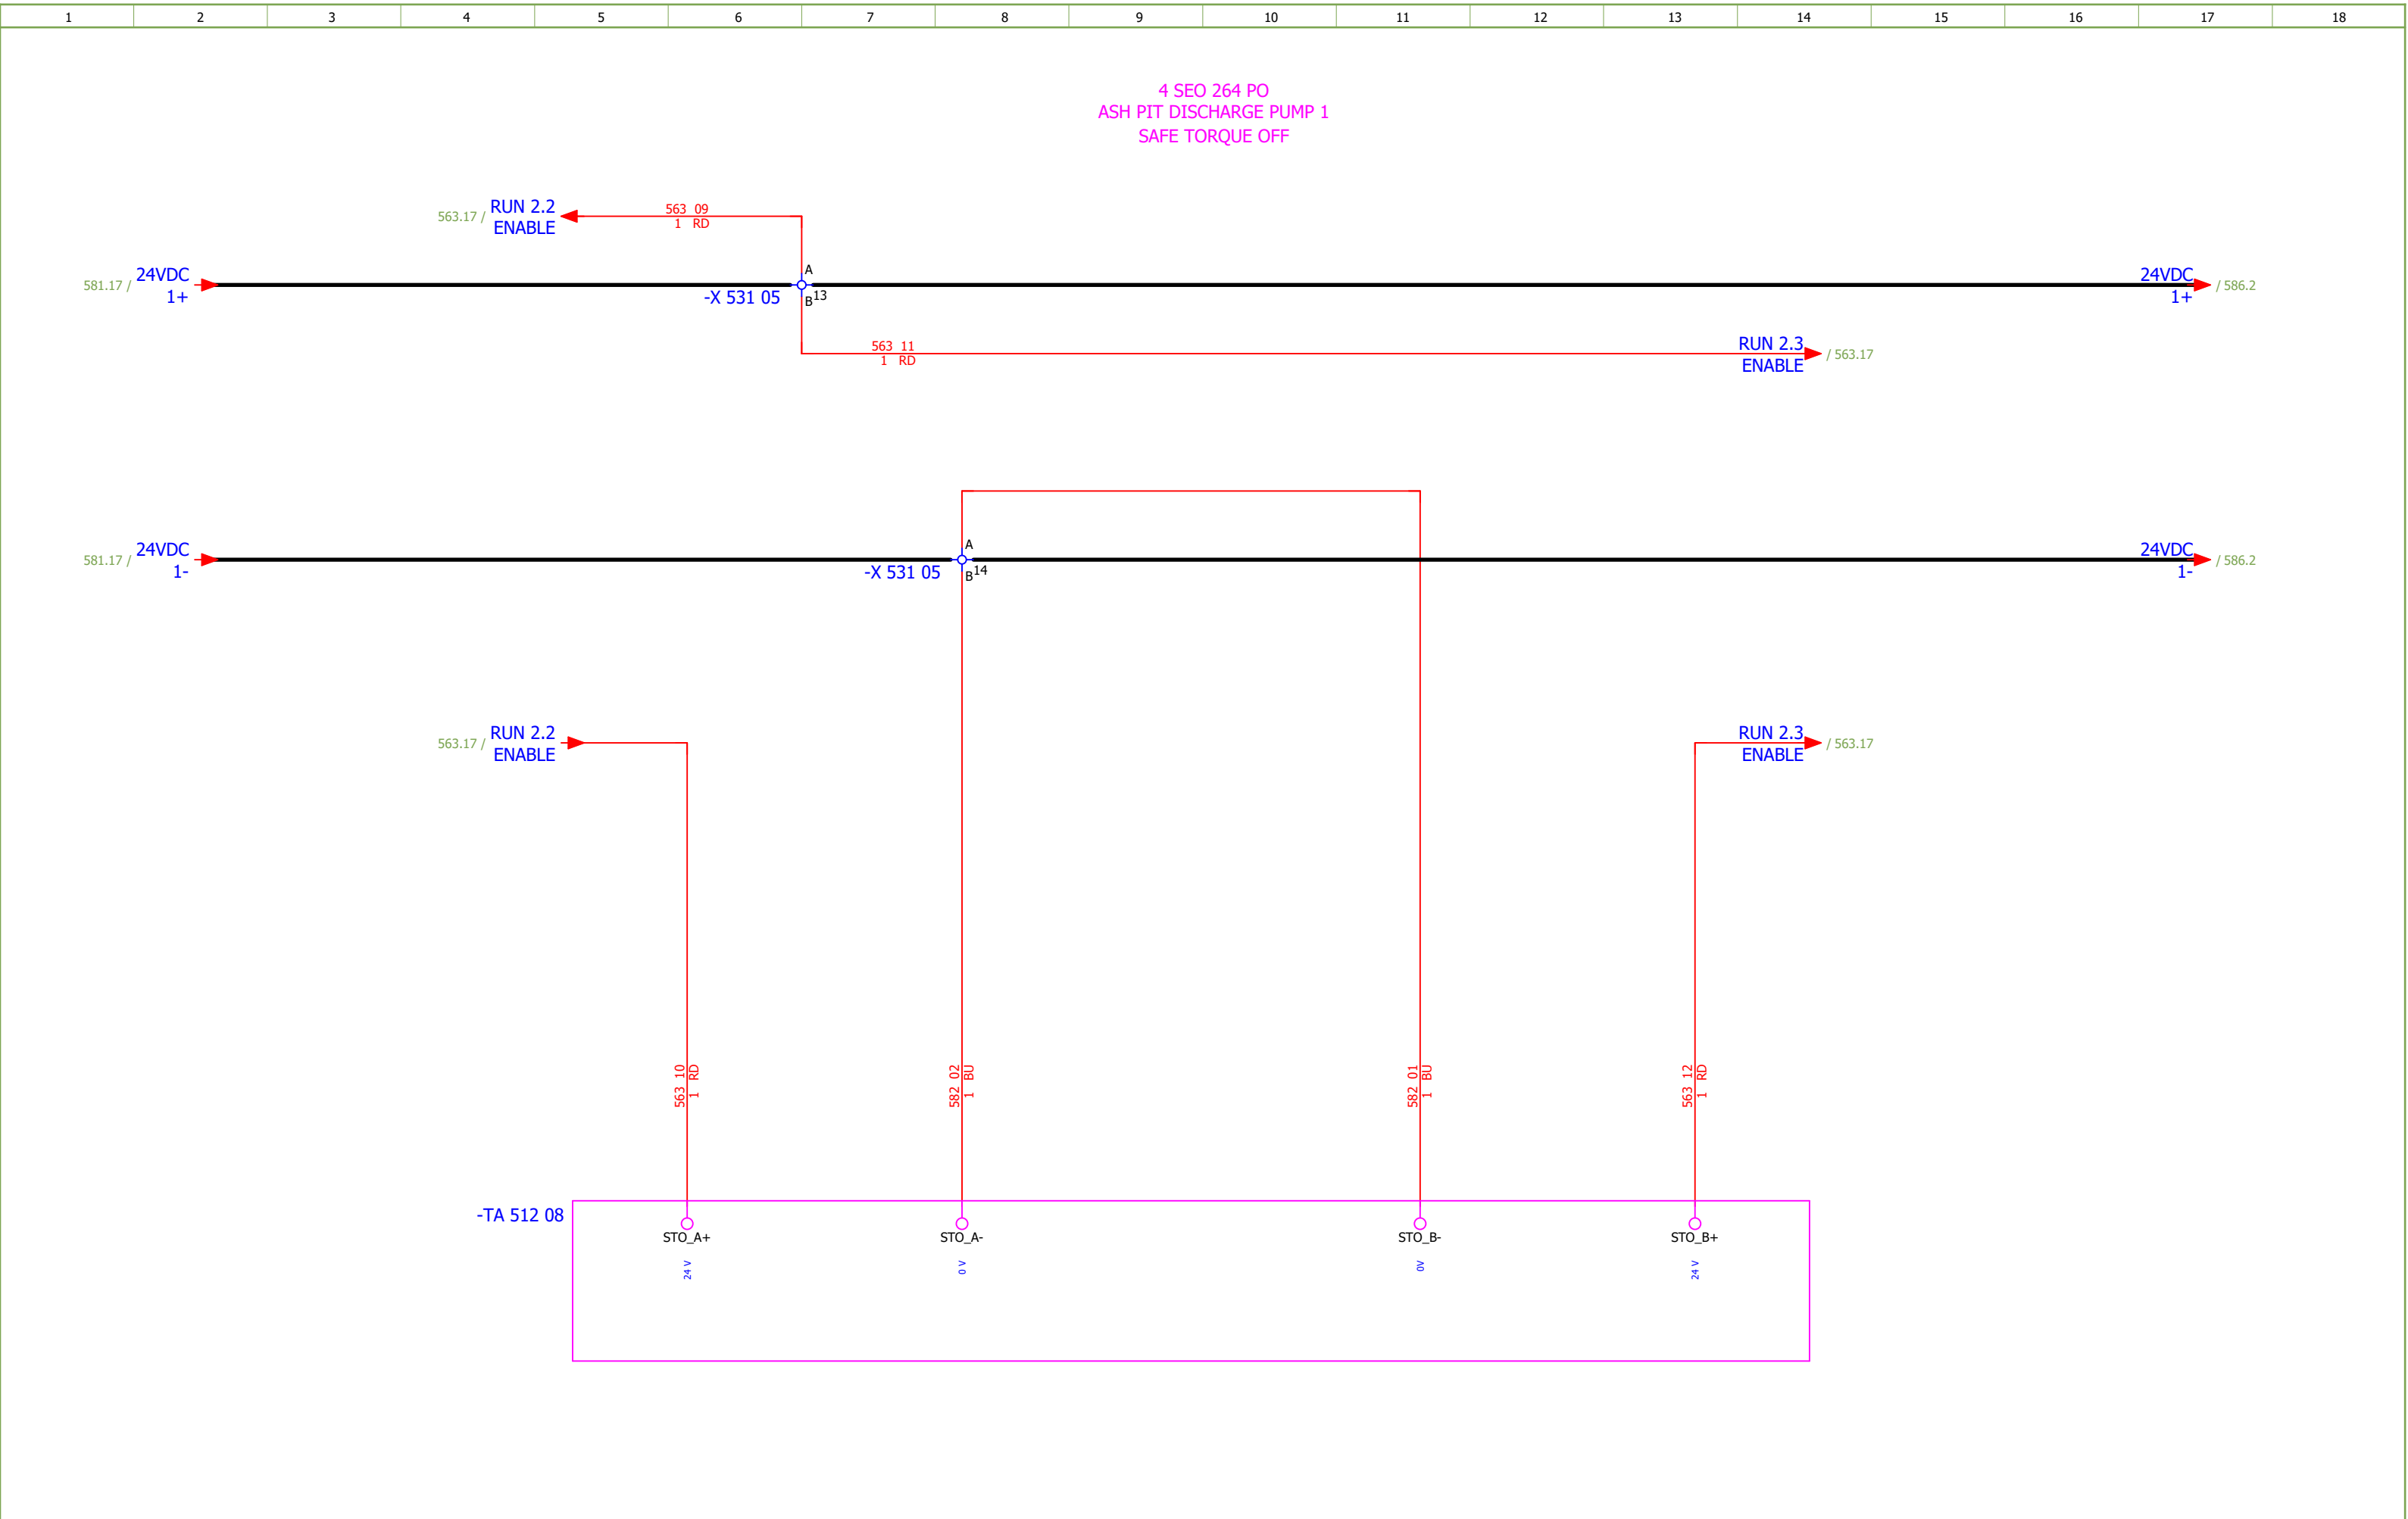

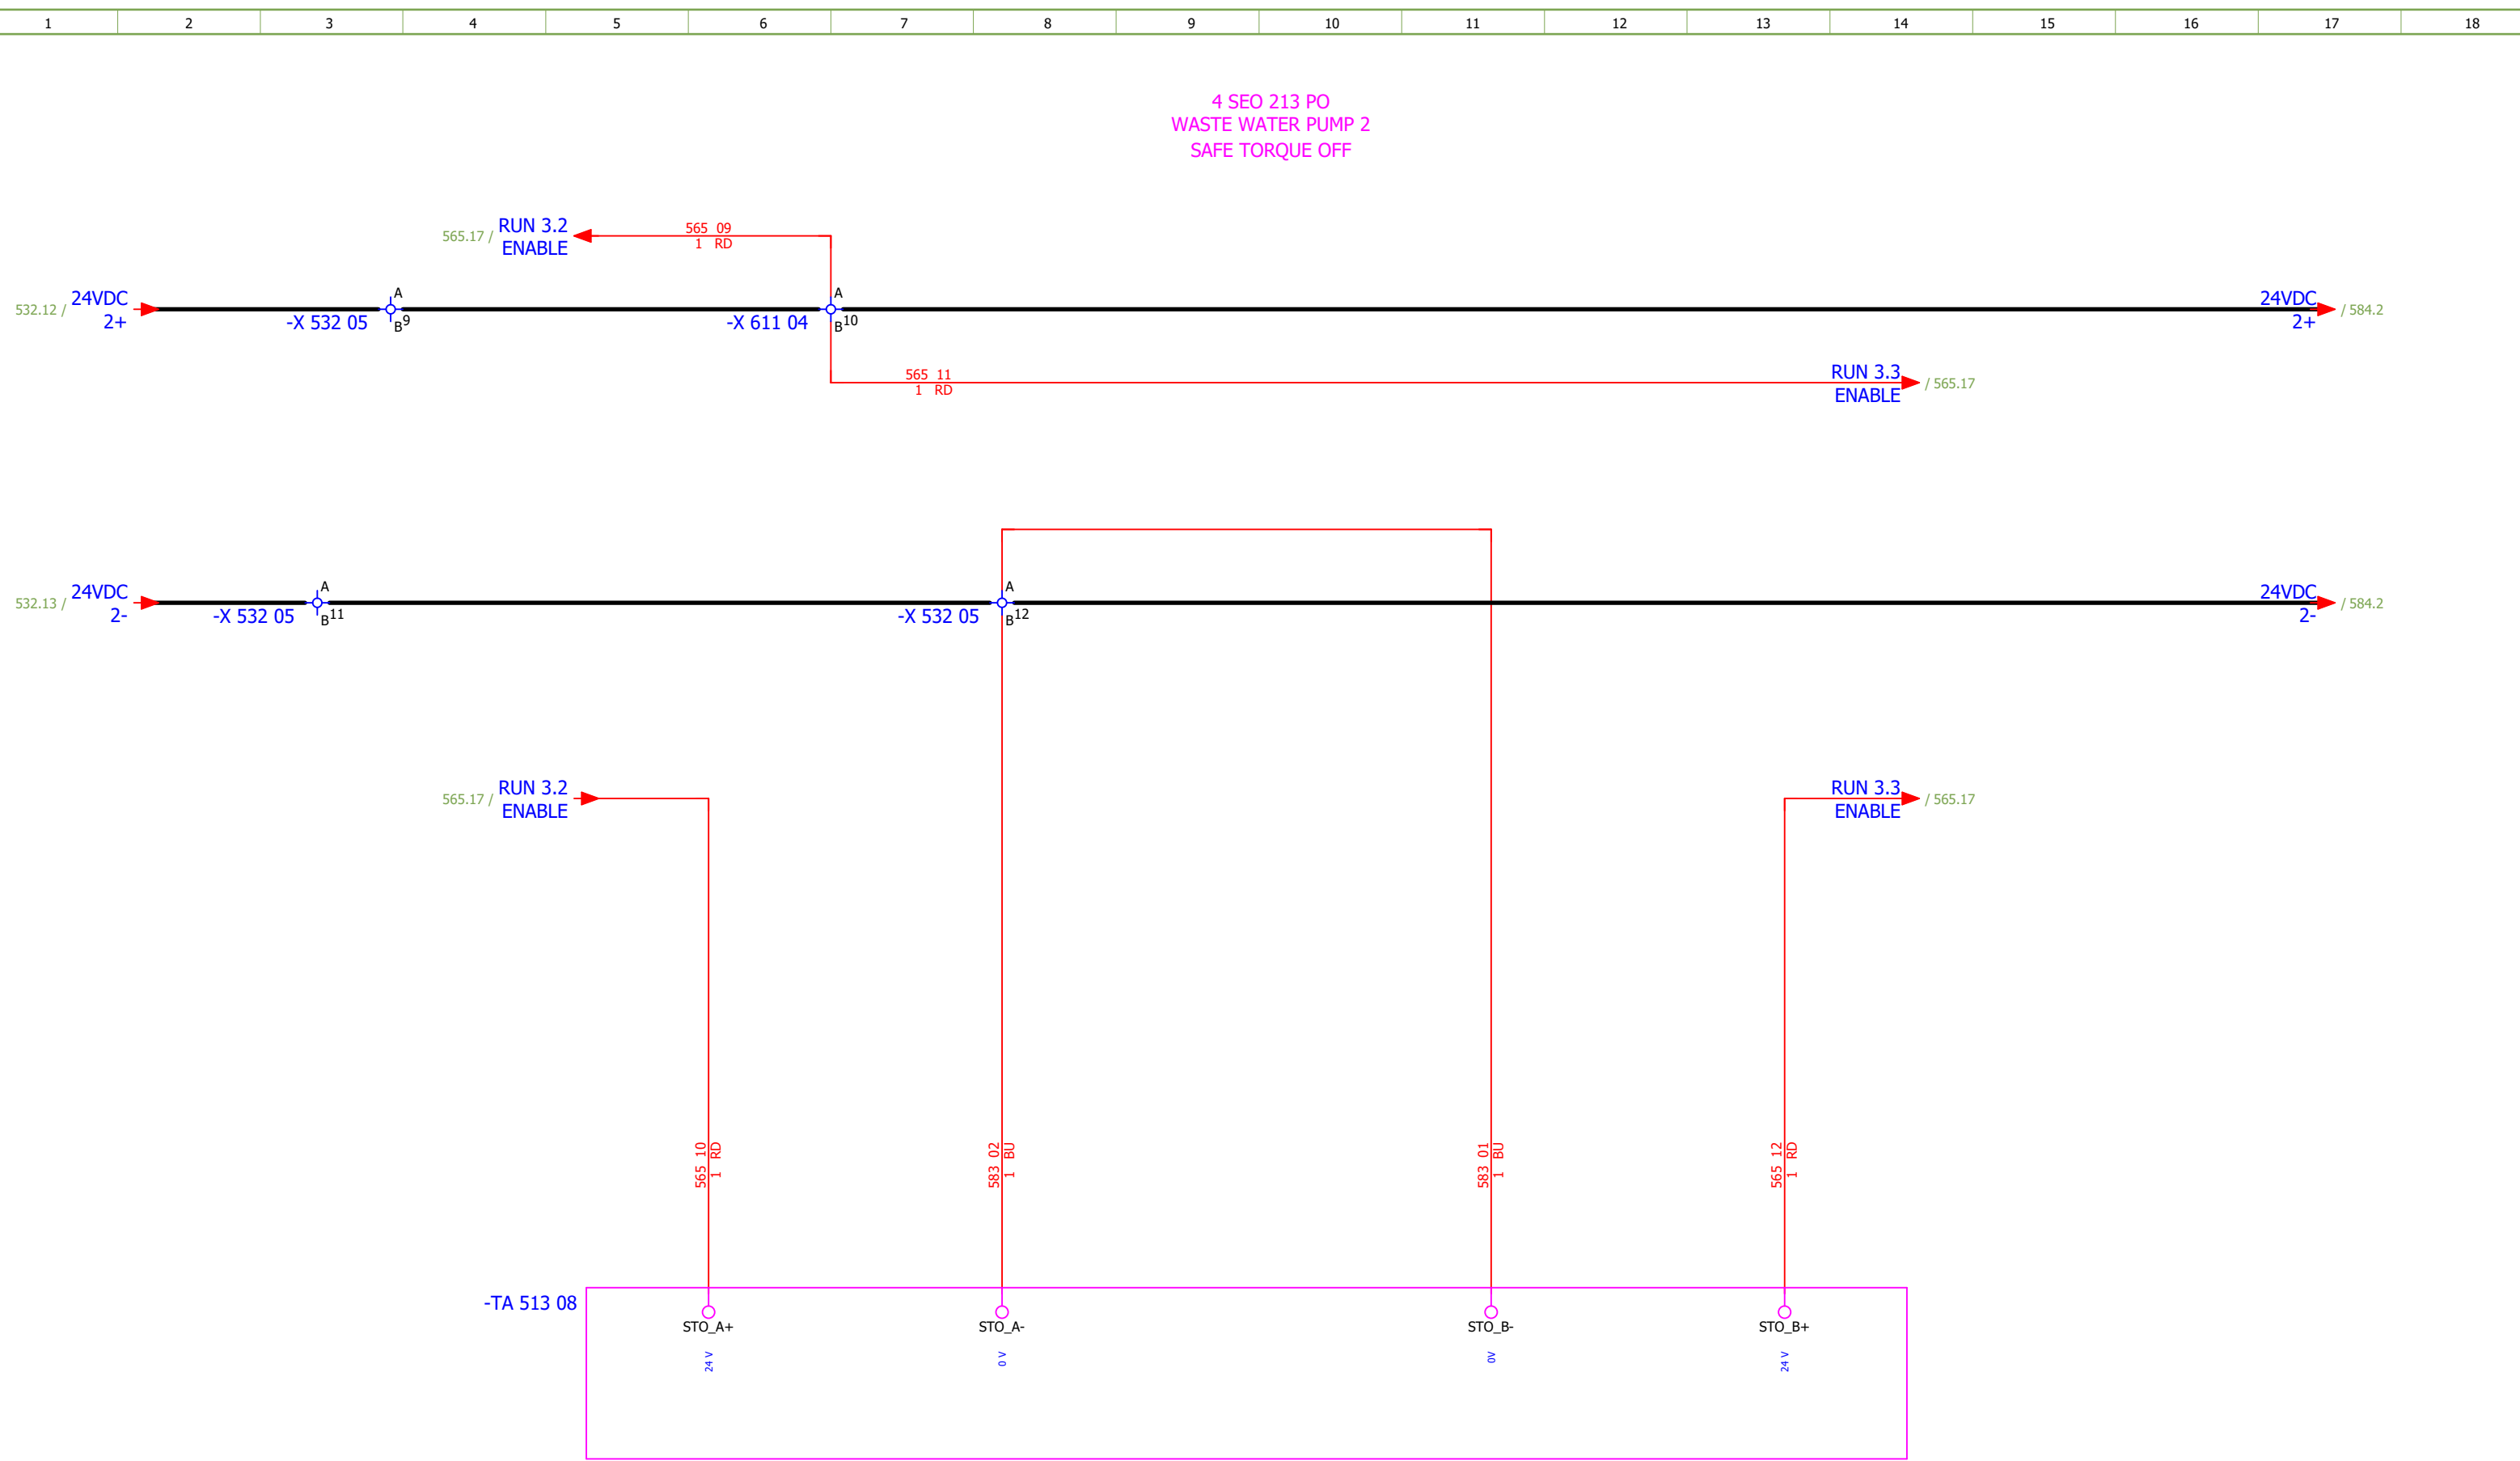


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7	Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F	
Drawn:	Luka Božičević															#NA
Approved:	Grga Kolić															
Format:	A3				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	WASTE WATER PUMP 2 - SAFE TORQUE OFF	Drawing designation:				BRC-4-ATEP0-1874-F		=4LKF001AR	Sheet:
														+4LKF006AR	Next:	584

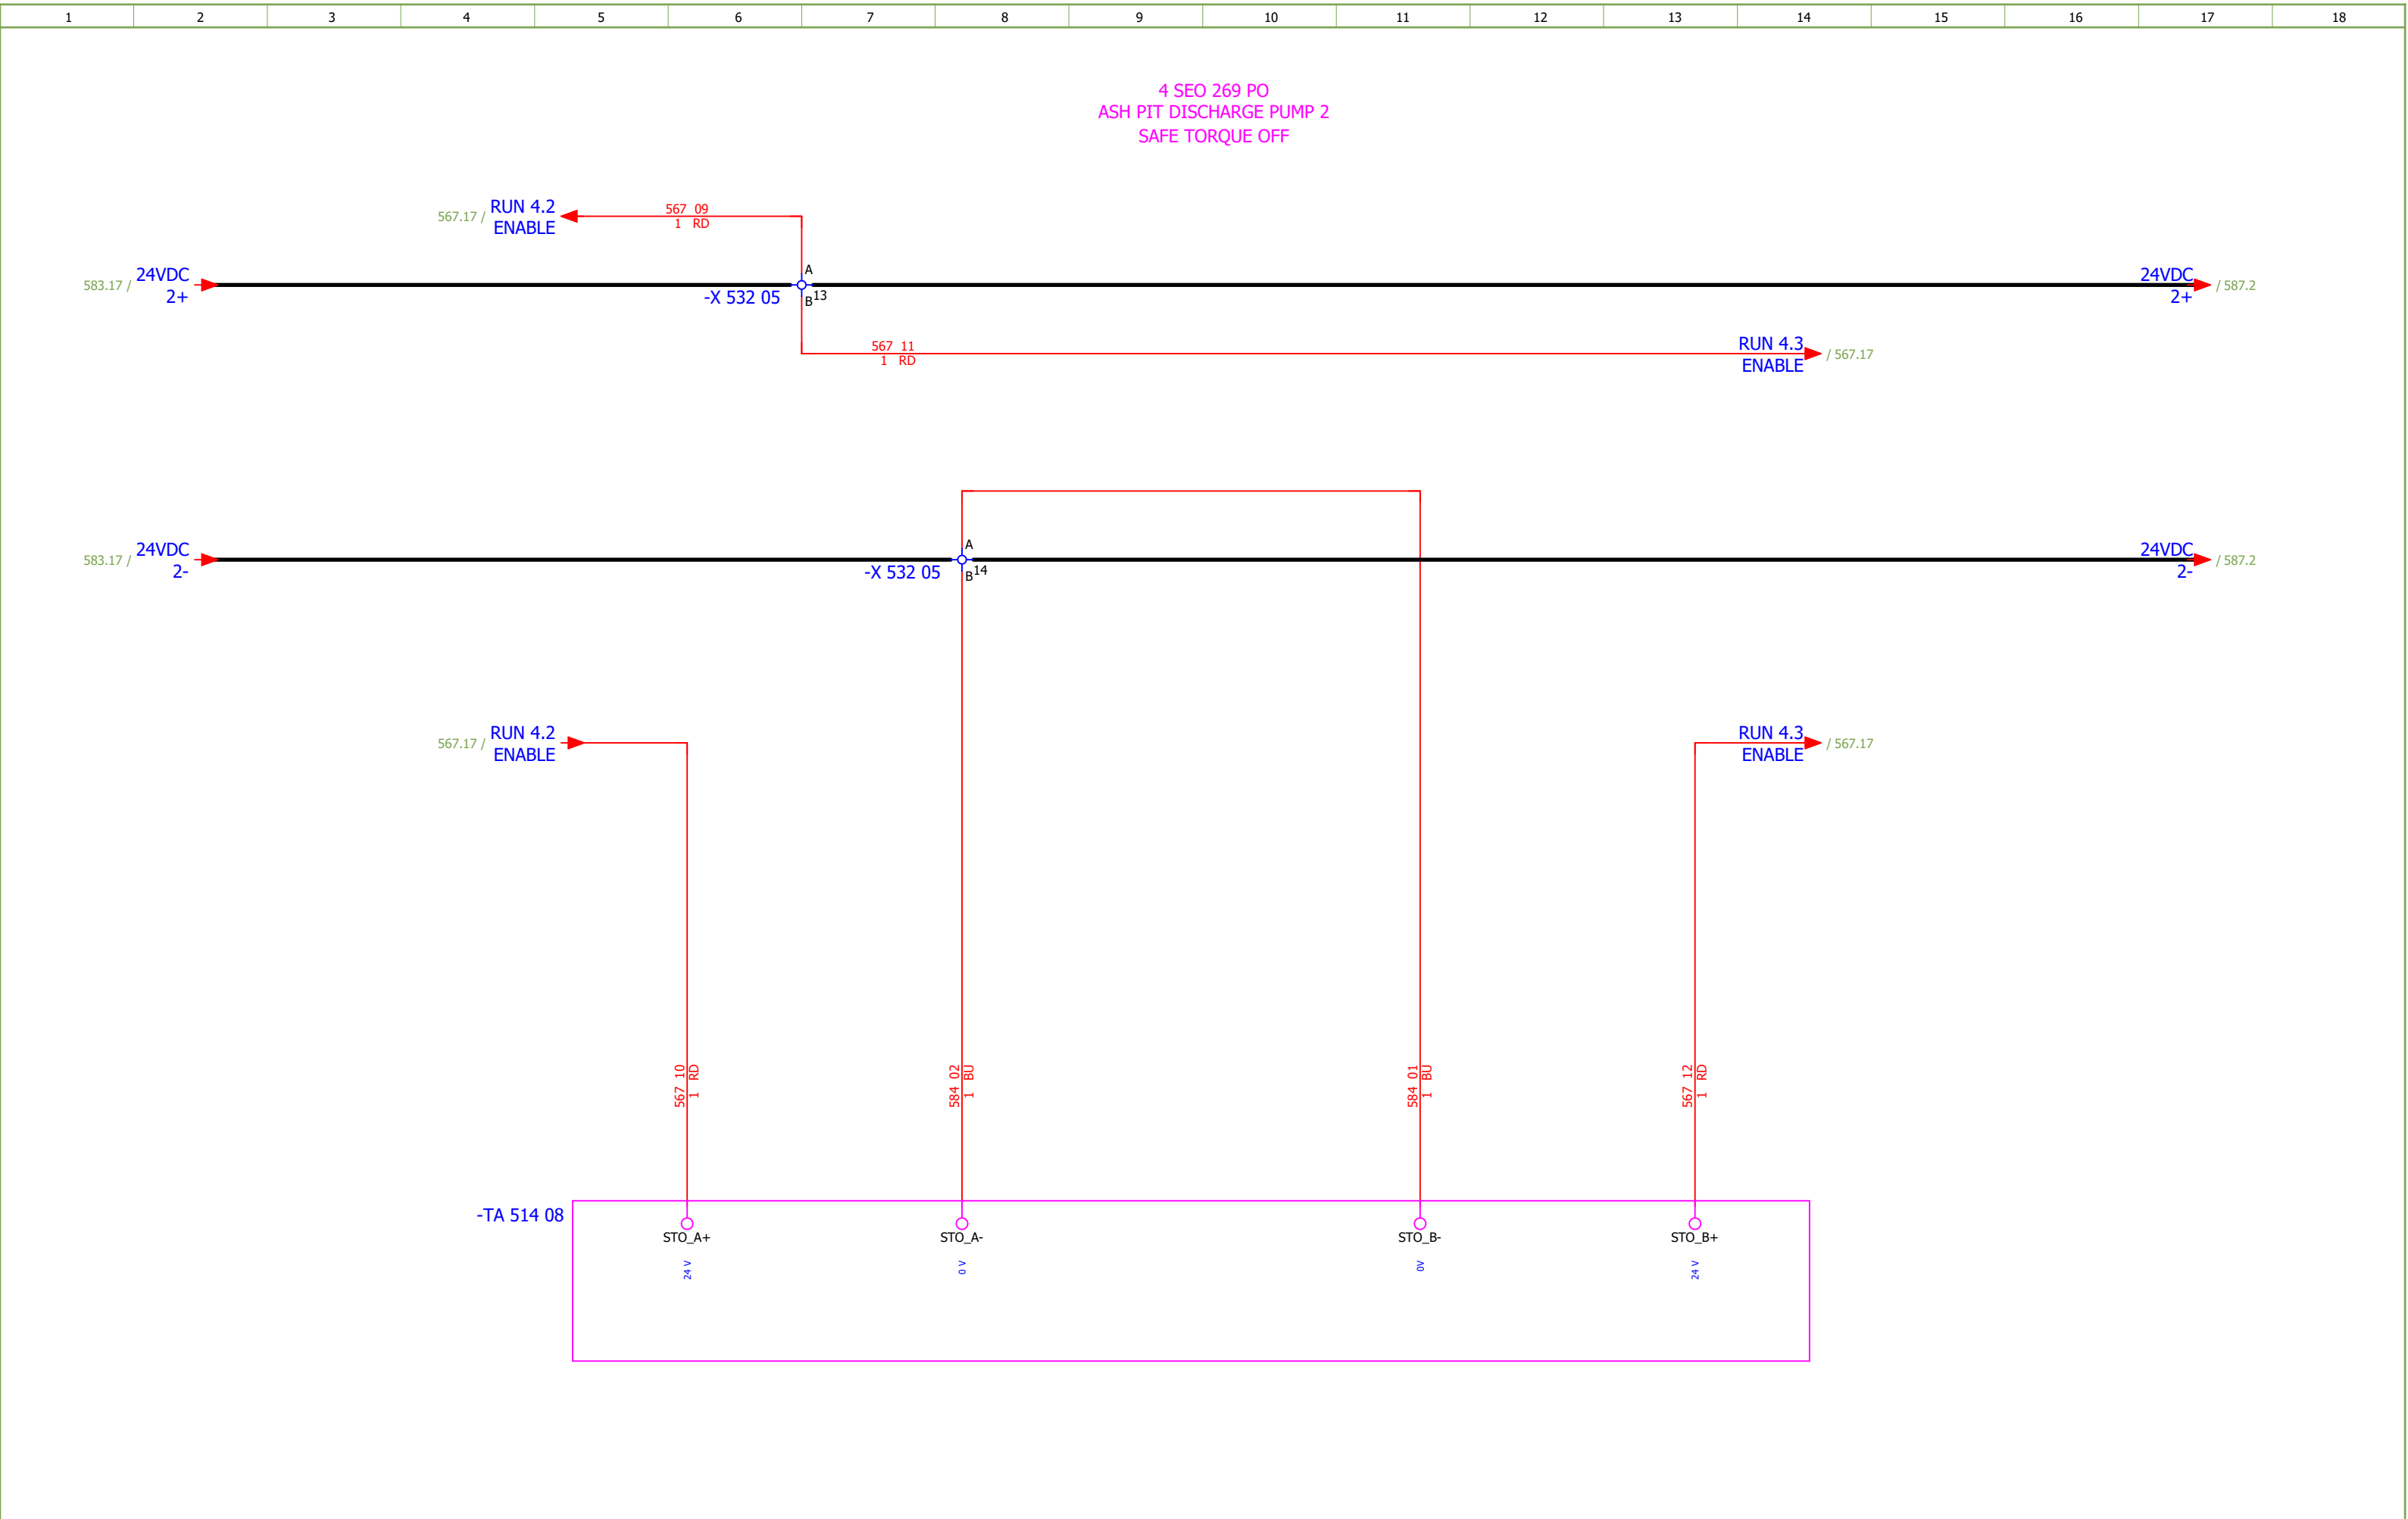

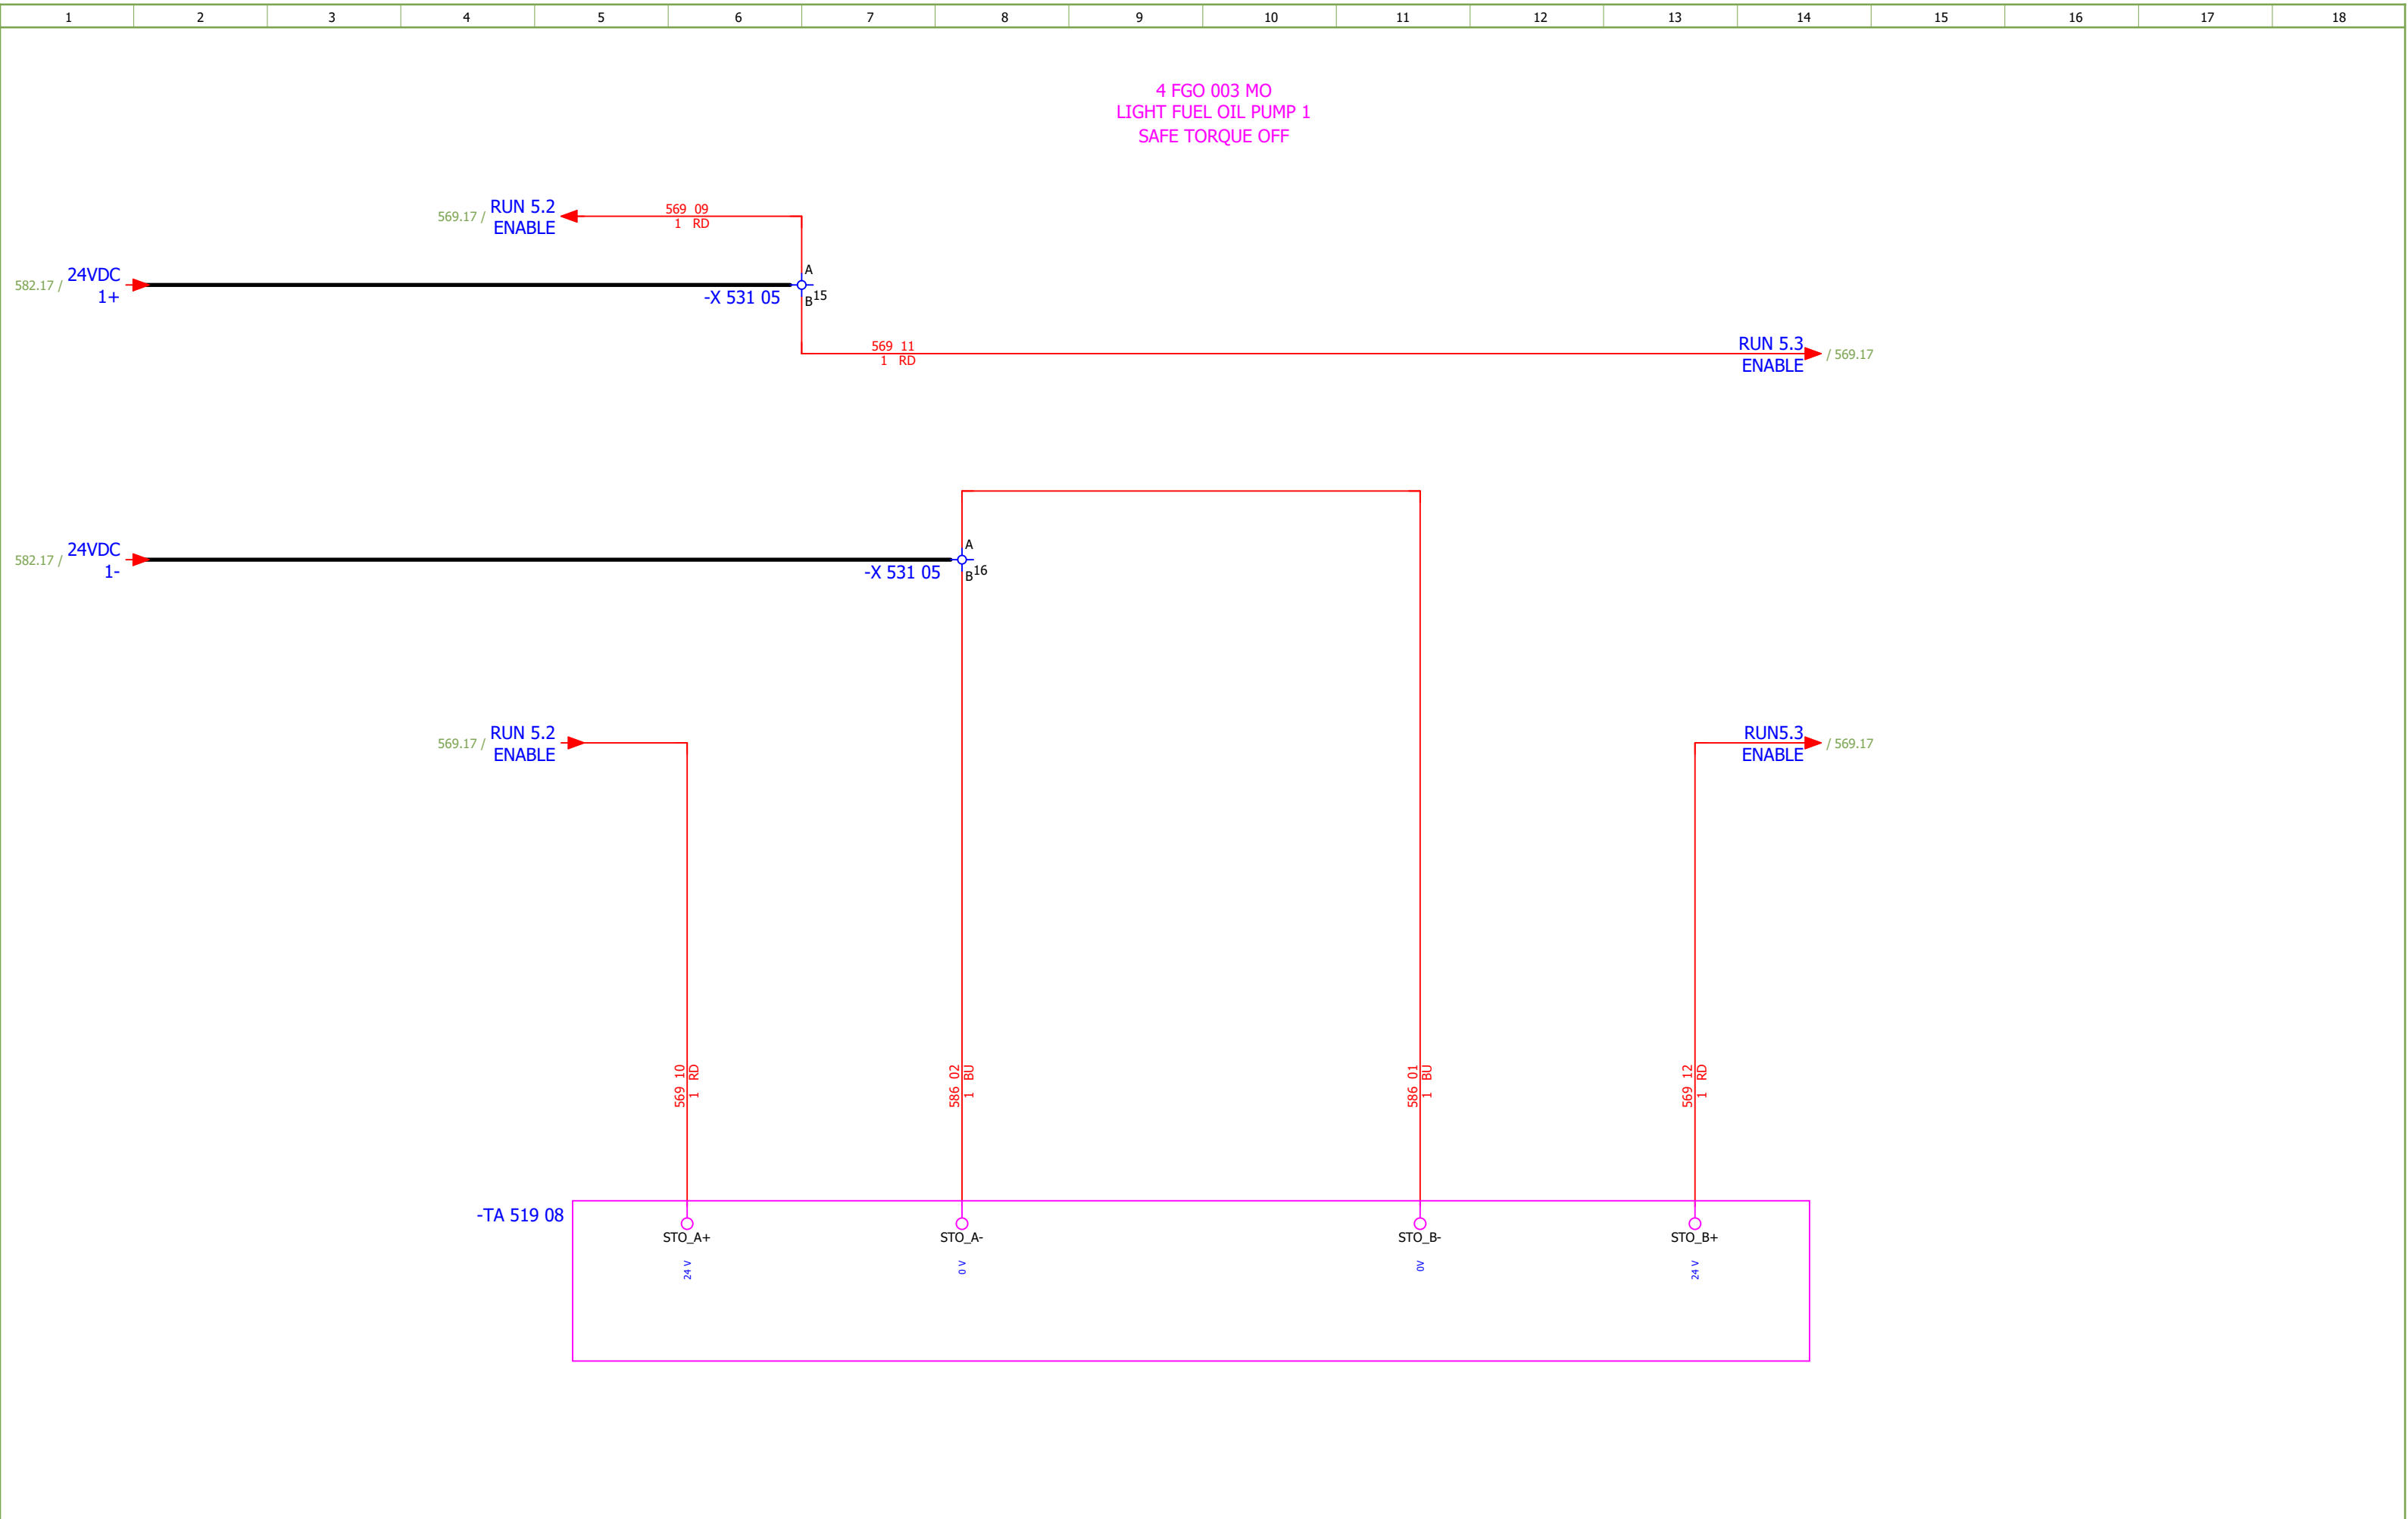


Date:	04.12.2025.		 SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F		
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	LIGHT FUEL OIL PUMP 1 - SAFE TORQUE OFF		Drawing designation:					BRC-4-ATEP0-1874-F		=4LKF001AR	Sheet:	586
Approved:	Grga Kolić															+4LKF006AR	Next:	587
Format:	A3																	


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7	Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F				
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	VFD GROUP 1 - LAMP TEST	Drawing designation: BRC-4-ATEP0-1874-F						#QA					
Approved:	Grga Kolić																		
Format:	A3																		
																Sheet:	592		
																		Next:	593

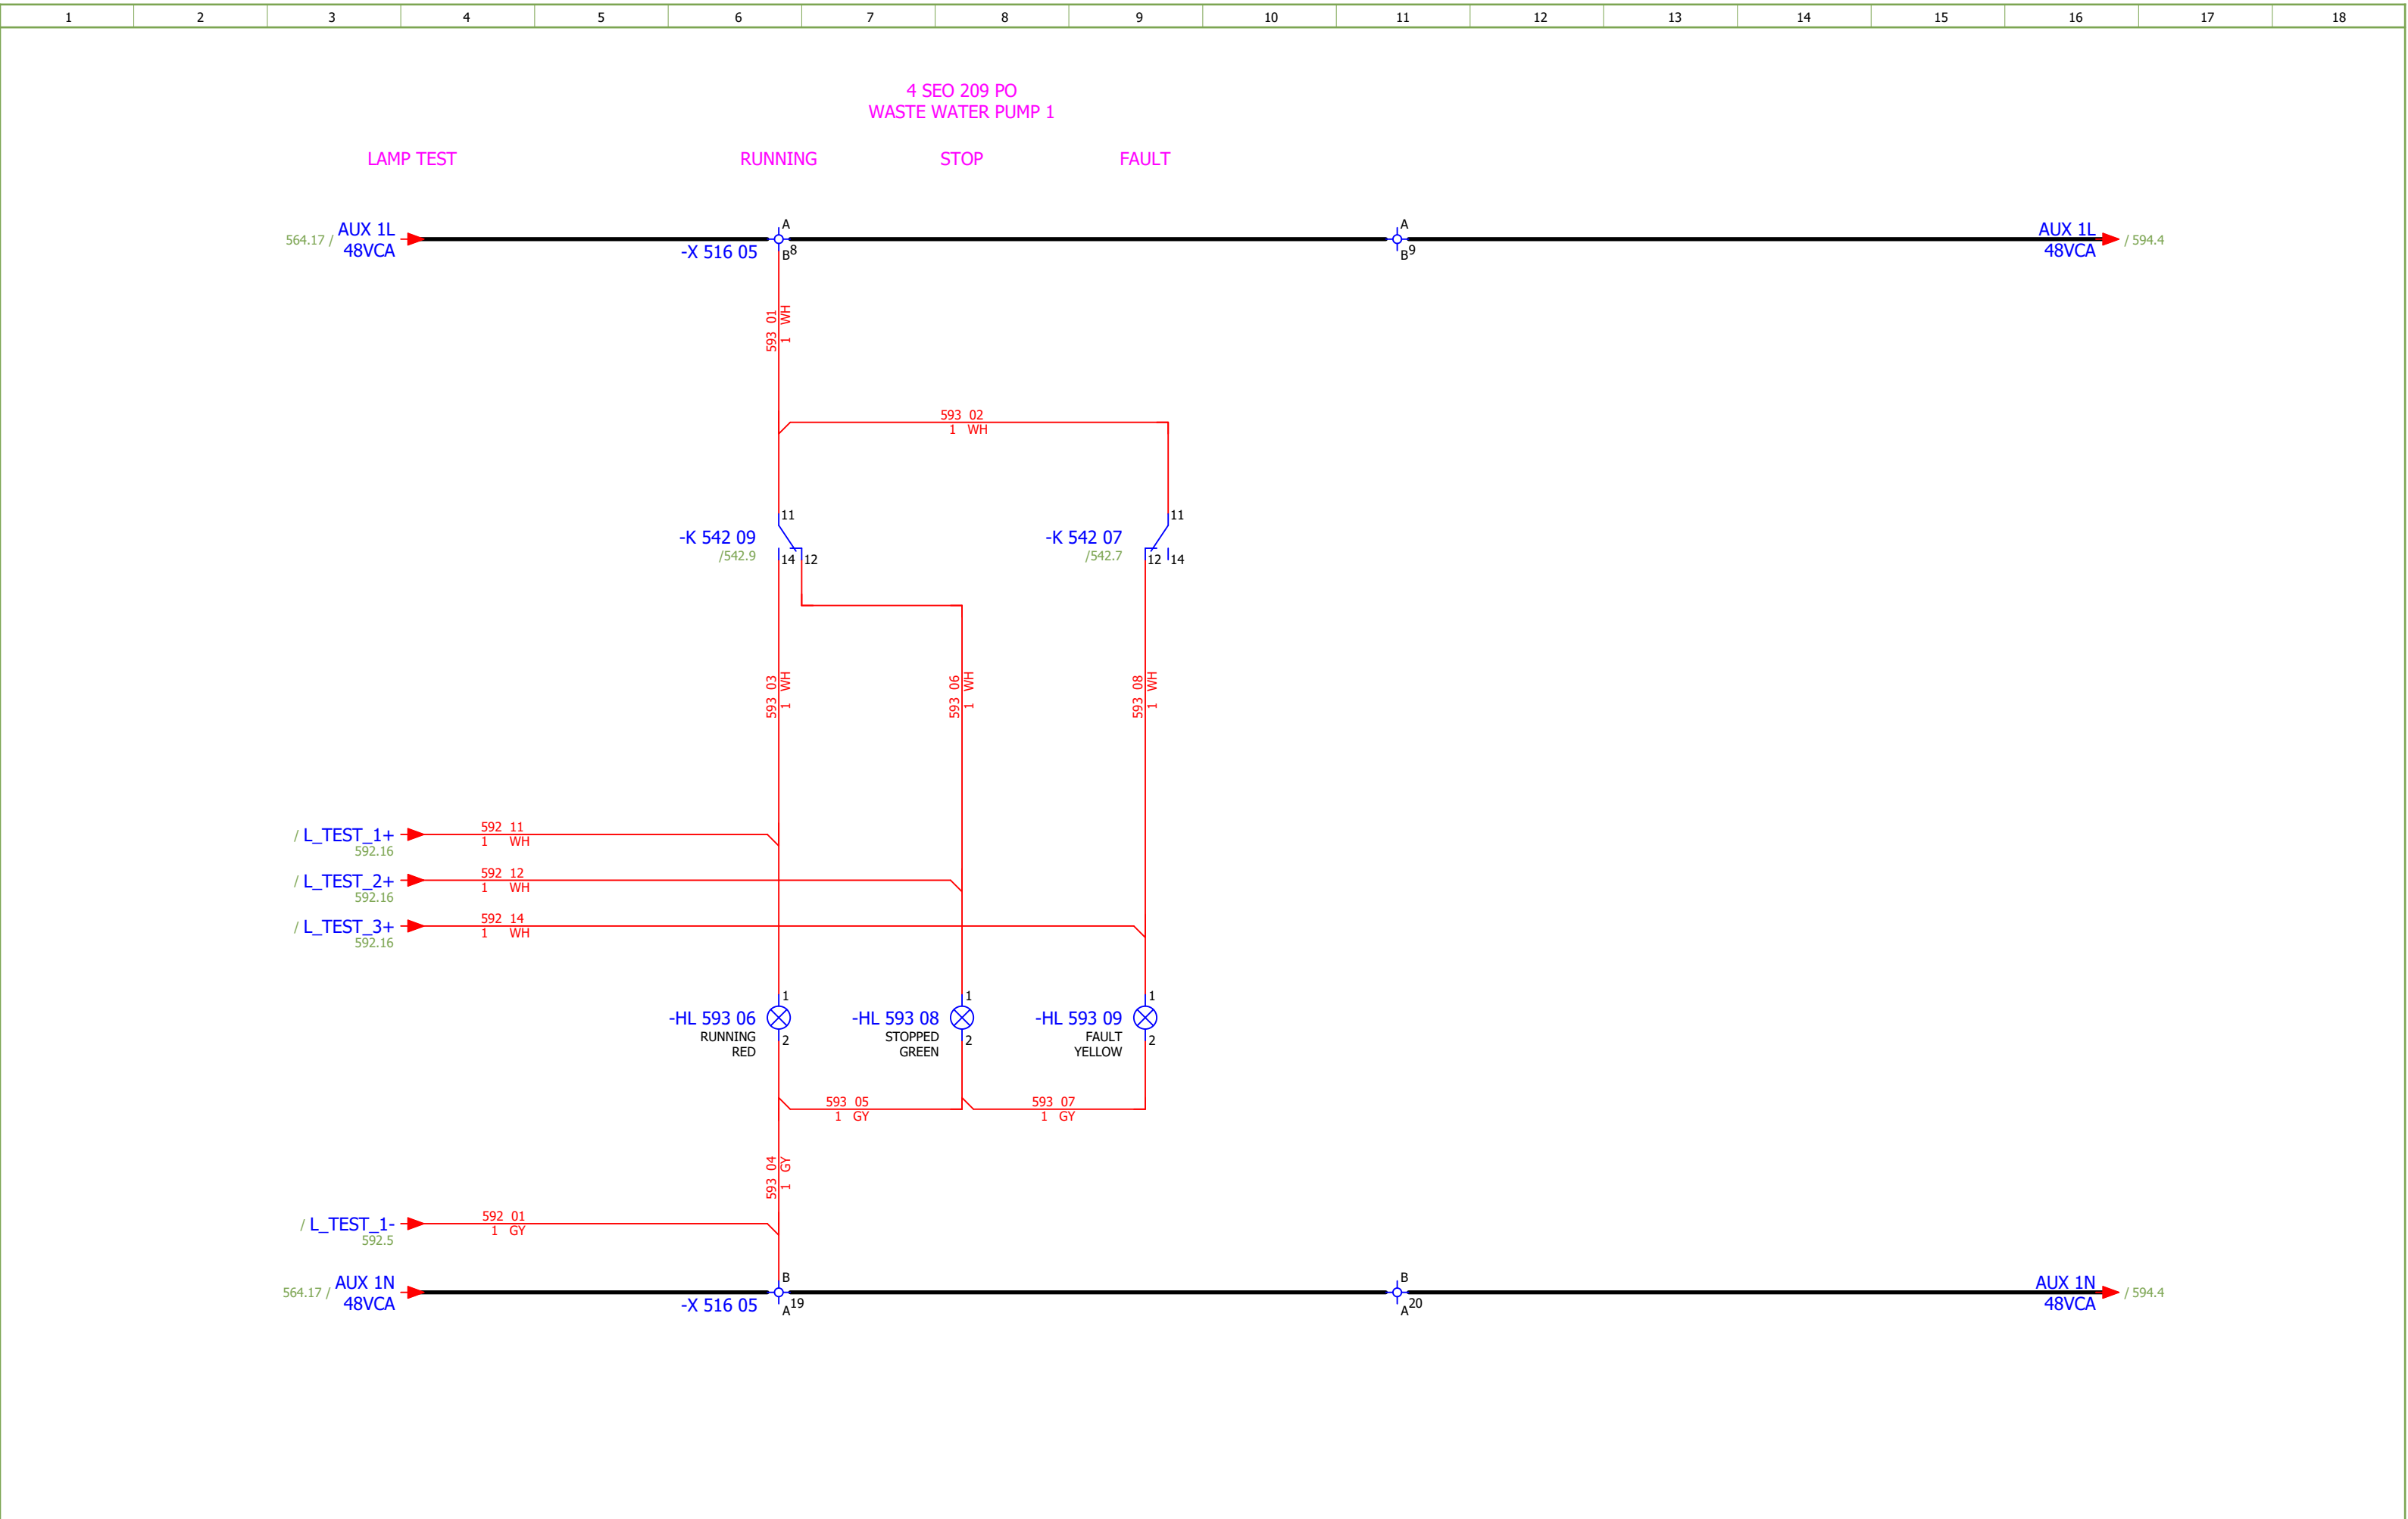

Date:	04.12.2025.		 SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F	
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	WASTE WATER PUMP 1 - SIGNALIZATION LAMPS		Drawing designation: BRC-4-ATEP0-1874-F				=4LKF001AR		#QA		
Approved:	Grga Kolić												+4LKF006AR		Sheet:	593	
Format:	A3														Next:	594	

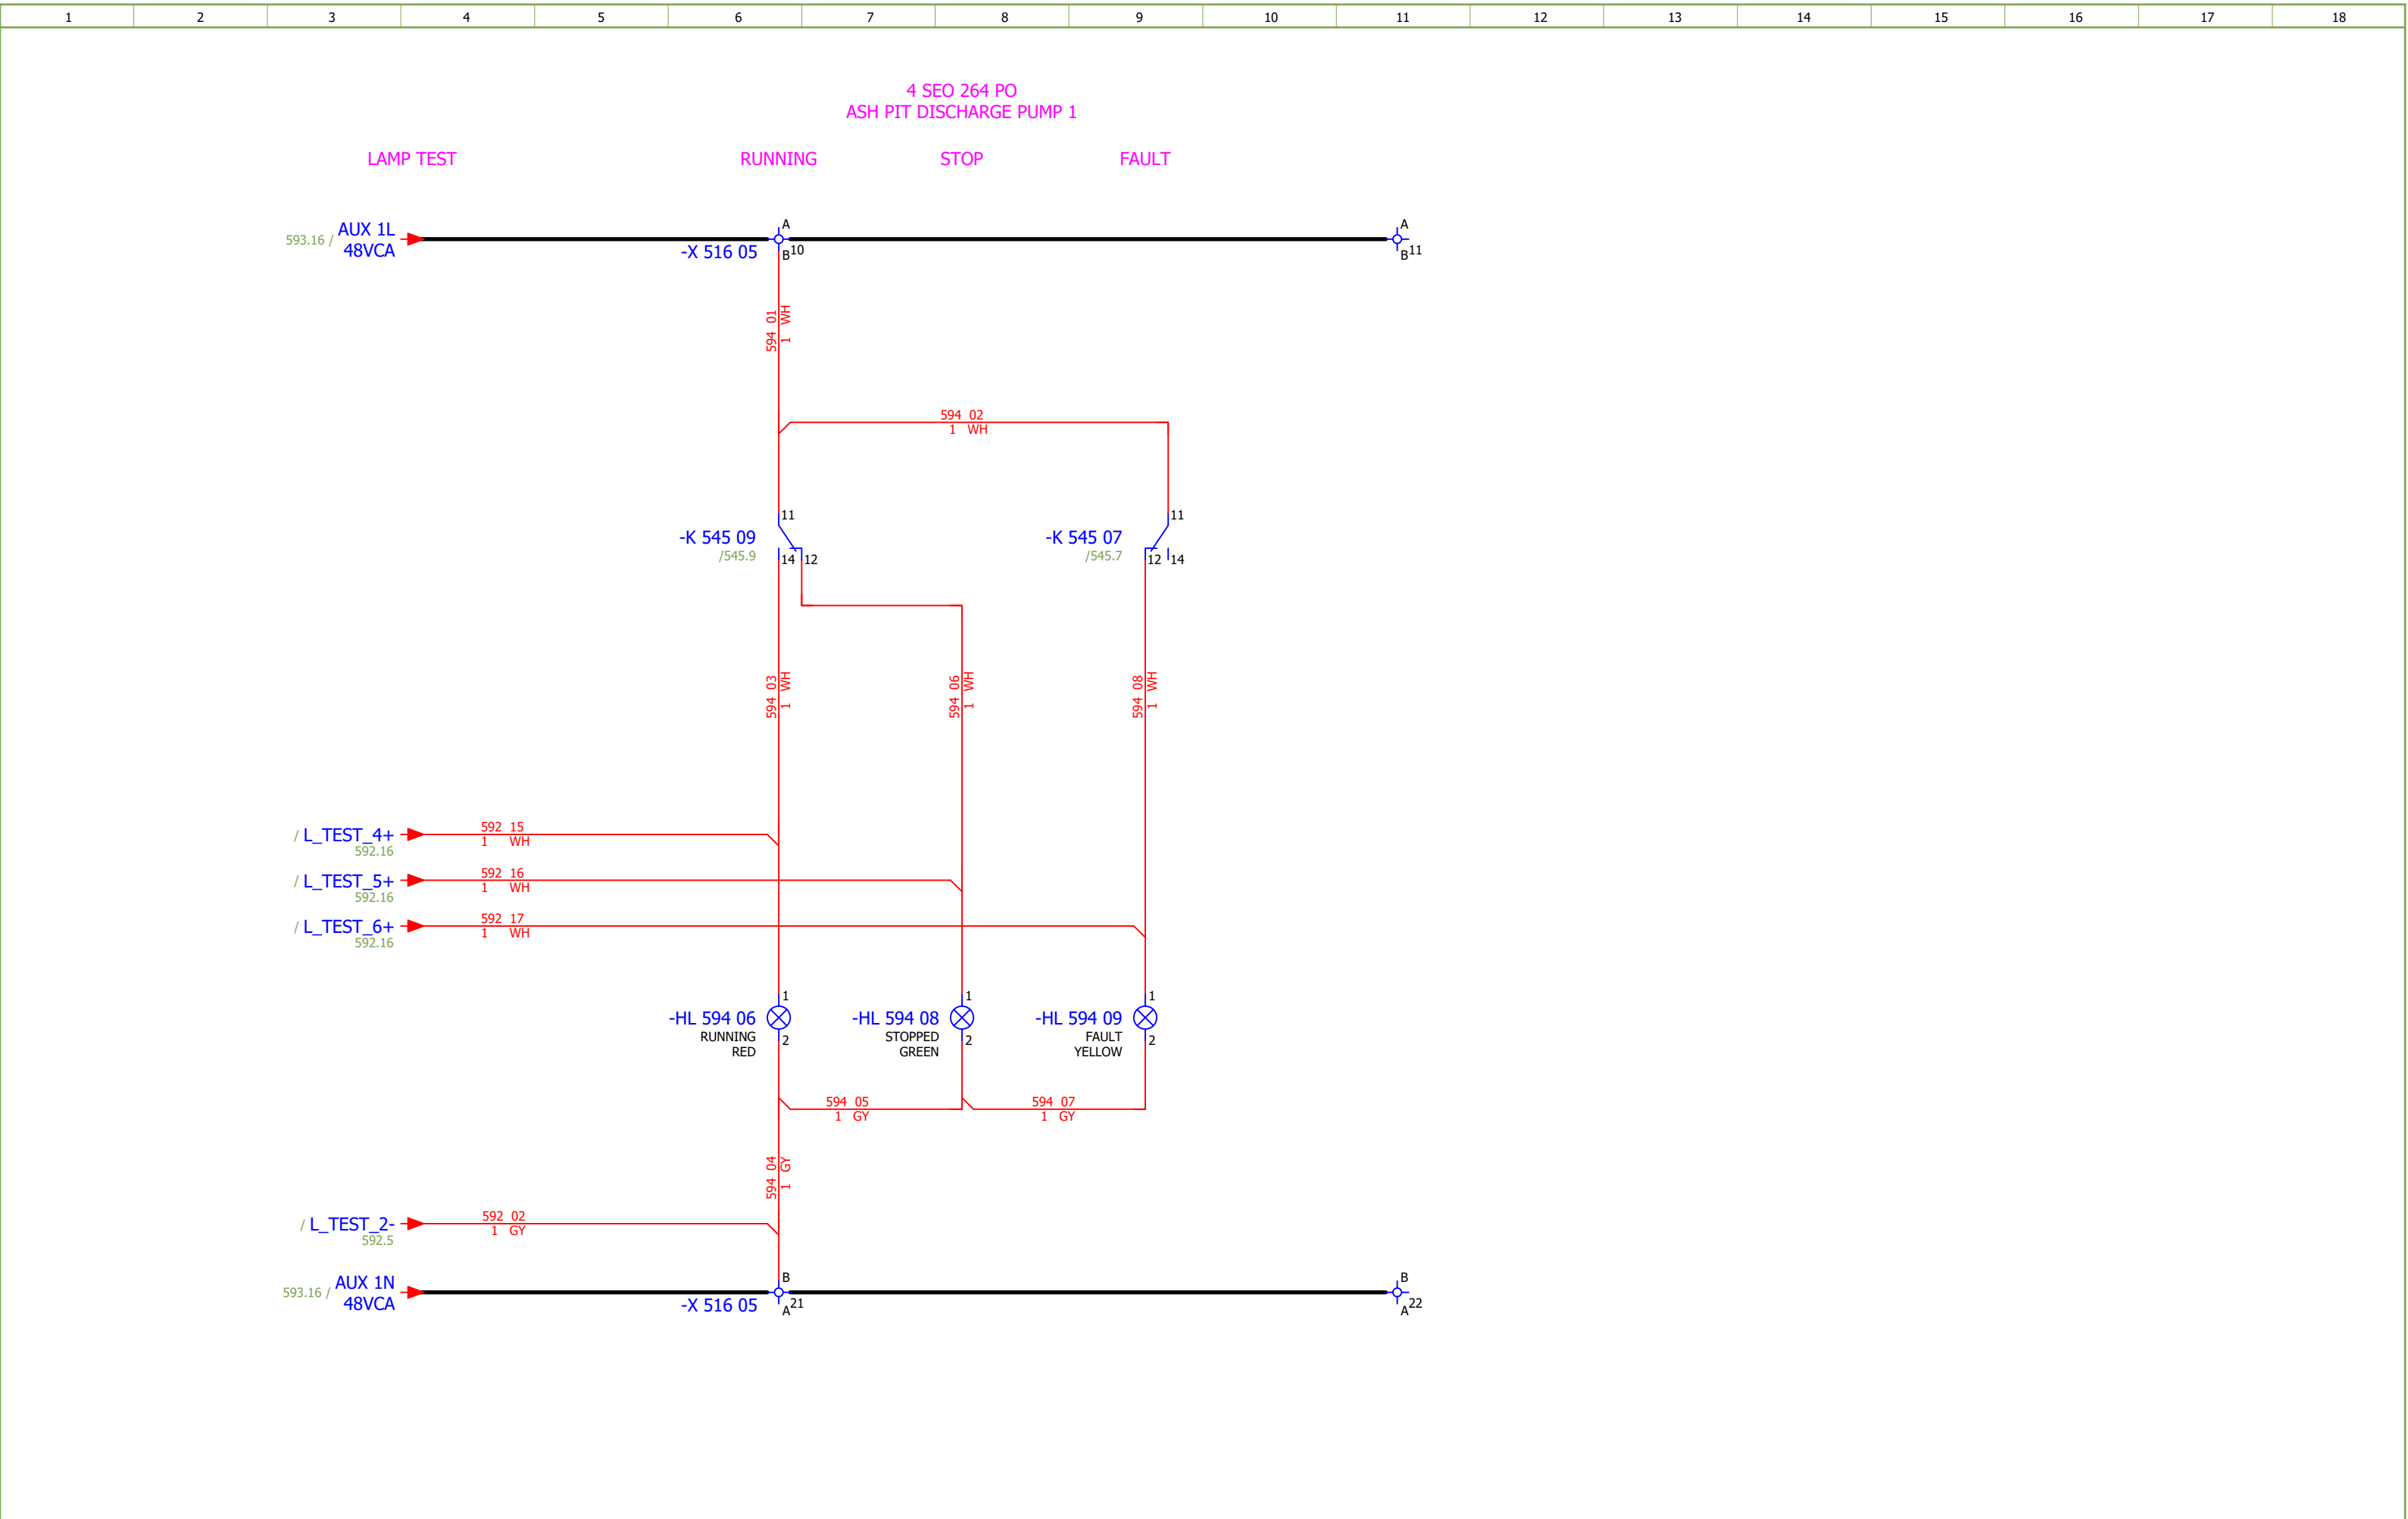

Date:	04.12.2025.		 SINTAKSA A Voith Company	Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F	
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	WASTE WATER BOTTOM ASH PIT DISCHARGE PUMP 1 - SIGNALIZATION LAMPS		Drawing designation:			BRC-4-ATEP0-1874-F			=4LKF001AR	#QA	
Approved:	Grga Kolić														+4LKF006AR	Sheet:	594
Format:	A3															Next:	595

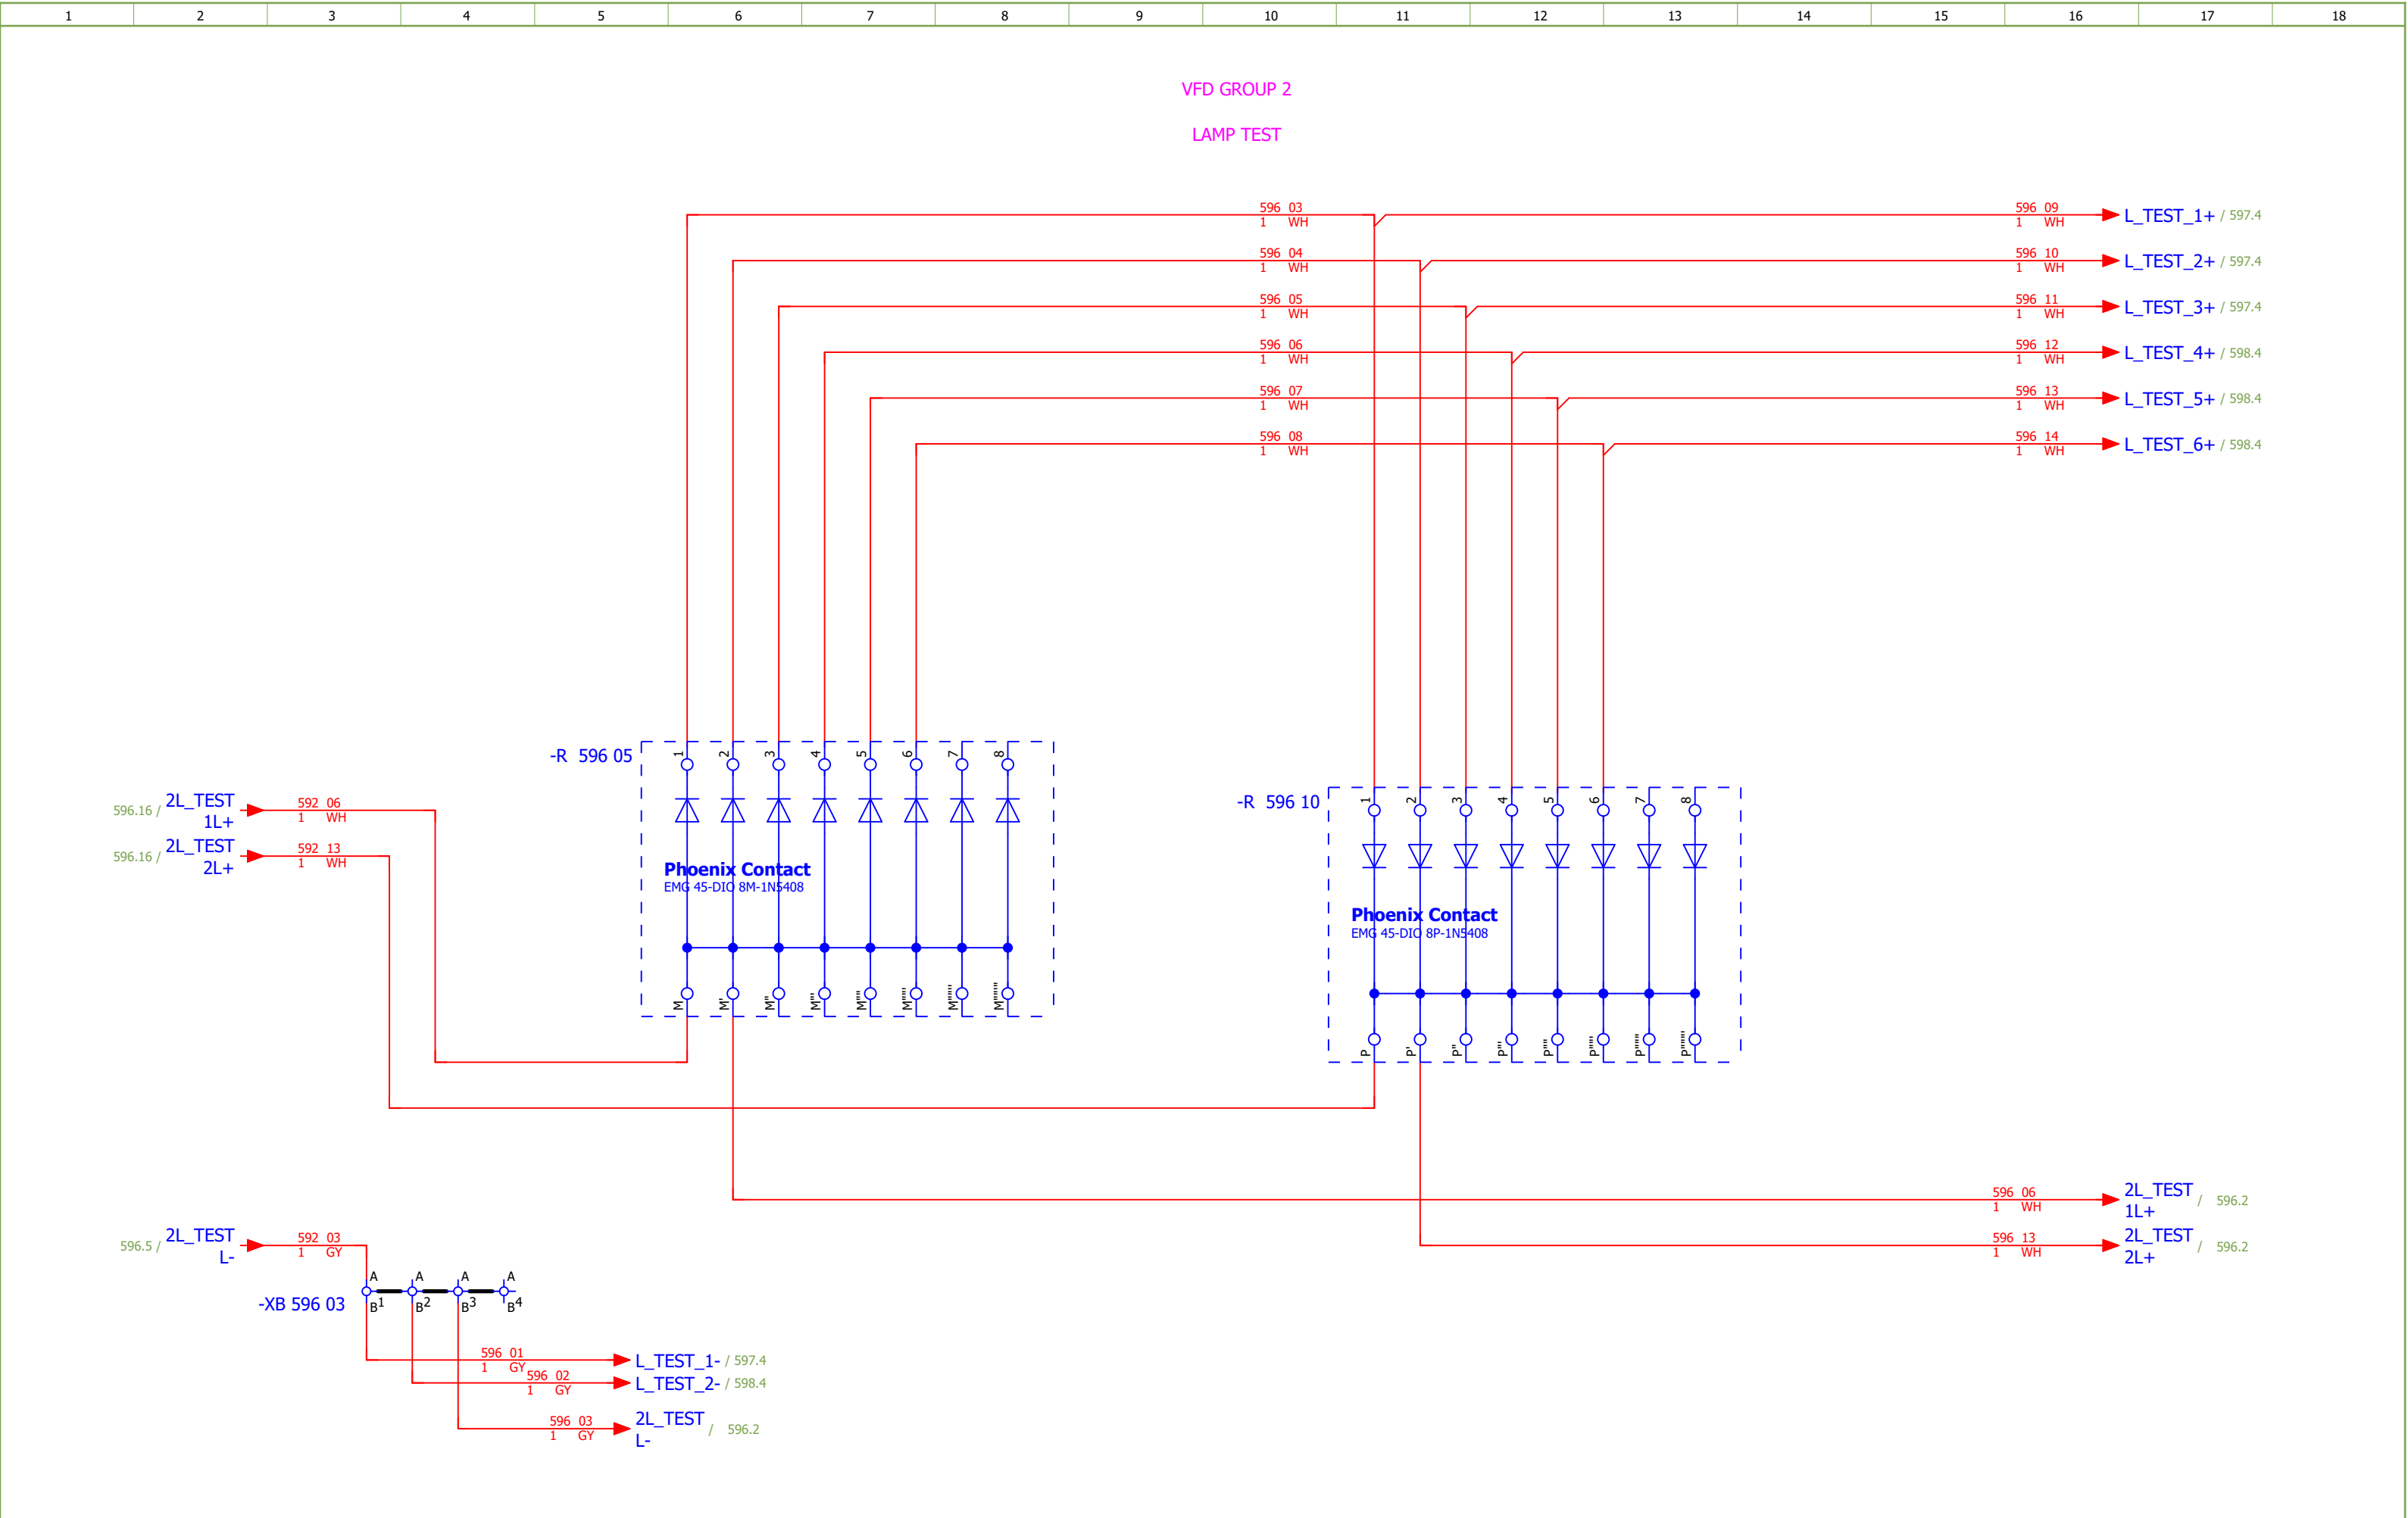

Date:	04.12.2025.		Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7	Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F	
Drawn:	Luka Božičević		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	VFD GROUP 2 - LAMP TEST	Drawing designation:	BRC-4-ATEP0-1874-F						#QA	
Approved:	Grga Kolić												=4LKF001AR	Sheet:	596
Format:	A3												+4LKF006AR	Next:	597

Date:	04.12.2025.	
Drawn:	Luka Božičević	
Approved:	Grga Kolić	
Format:	A3	



Client:

ANDRITZ TEP d.o.o.
Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia

Object:

RDF Albioma Les Bois Rouge
Reunion - France

Scope:

BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7

Content:

WASTE WATER PUMP 2 - SIGNALIZATION LAMPS

Project:

BRC-4

Unit & Issuer:

ATEP0

Number:

1874

Drawing designation:

BRC-4-ATEP0-1874-F

Revision:

F

=4LKf001AR

+4LKf006AR

#QA

Sheet:
Next:

597
598

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F	
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	WASTE WATER BOTTOM ASH PIT DISCHARGE PUMP 2 - SIGNALIZATION LAMPS	Drawing designation:	BRC-4-ATEP0-1874-F				=4LKF001AR	Sheet:	598		
Approved:	Grga Kolić												+4LKF006AR	Next:	599		
Format:	A3																


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F	
Drawn:	Luka Božičević				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	LIGHT FUEL OIL PUMPS - LAMP TEST	Drawing designation: BRC-4-ATEP0-1874-F					=4LKf001AR	Sheet:	600	
Approved:	Grga Kolić													+4LKf006AR	Next:	601	
Format:	A3																

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F		
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	LIGHT FUEL OIL PUMP 1 - SIGNALIZATION LAMPS	Drawing designation:	BRC-4-ATEP0-1874-F									#QA
Approved:	Grga Kolić																	
Format:	A3																	
																	Sheet:	601
																	Next:	602


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F	
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	LIGHT FUEL OIL PUMP 2 - SIGNALIZATION LAMPS	Drawing designation: BRC-4-ATEP0-1874-F						=4LKF001AR	Sheet:	602	
Approved:	Grga Kolić													+4LKF006AR	Next:	611	
Format:	A3																

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
-X 611 03 B A B A B A B A B A B A -X 611 08 B A B A B A B A B A B A B A B A B A -X 611 04 A B⁹ A B¹⁰ A B¹¹ A B¹² A B¹³ A B¹⁴ A B¹⁵ A B¹⁶ A B¹⁷ A B¹⁸ A B¹⁹ A B²⁰ A B²¹ A B²² A B²³ A B²⁴ A B²⁵ A B⁹ A B¹⁰ A B¹¹ A B¹² A B¹³ A B¹⁴ A B¹⁵ A B¹⁶ A B¹⁷ A B¹⁸ A B¹⁹ A B²⁰ A B²¹ A B²² A B²³ A B²⁴ A B²⁵																	
Date:	04.12.2025.		Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7	Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F	#QB		
Drawn:	Luka Božičević		Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	SPARE CONTACTS	Drawing designation:	BRC-4-ATEP0-1874-F	=4LKF001AR	Sheet:	611						
Approved:	Grga Kolić									Next:	621						
Format:	A3																

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----

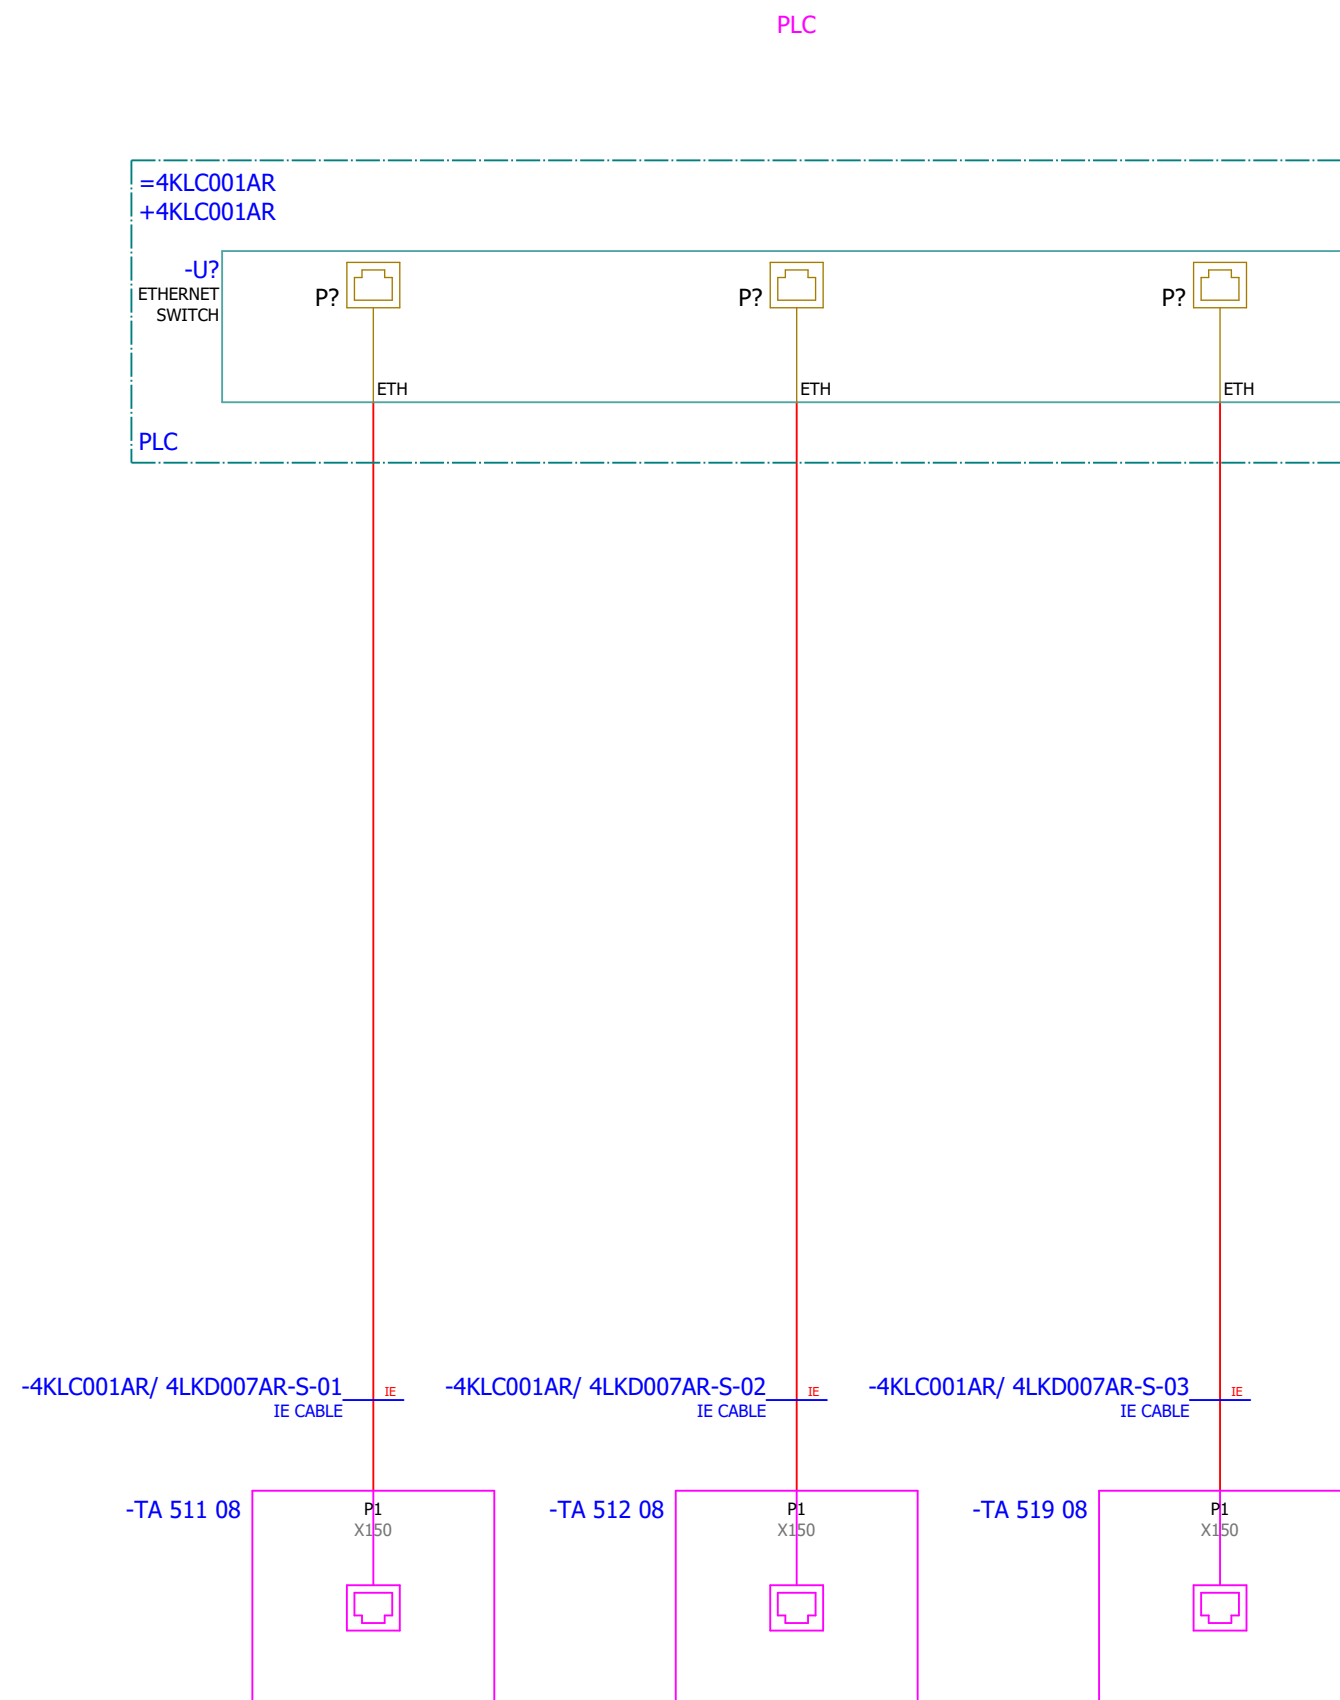


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7		Project:	BRC-4	Unit & Issuer:	ATEP0	Number:	1874	Revision:	F	
Drawn:	Luka Božičević																#V
Approved:	Grga Kolić																
Format:	A3				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	VFD GROUP 1 - COMMUNICATION		Drawing designation:			BRC-4-ATEP0-1874-F		=4LKF001AR		Sheet:
														+4LKF006AR		Next:	622

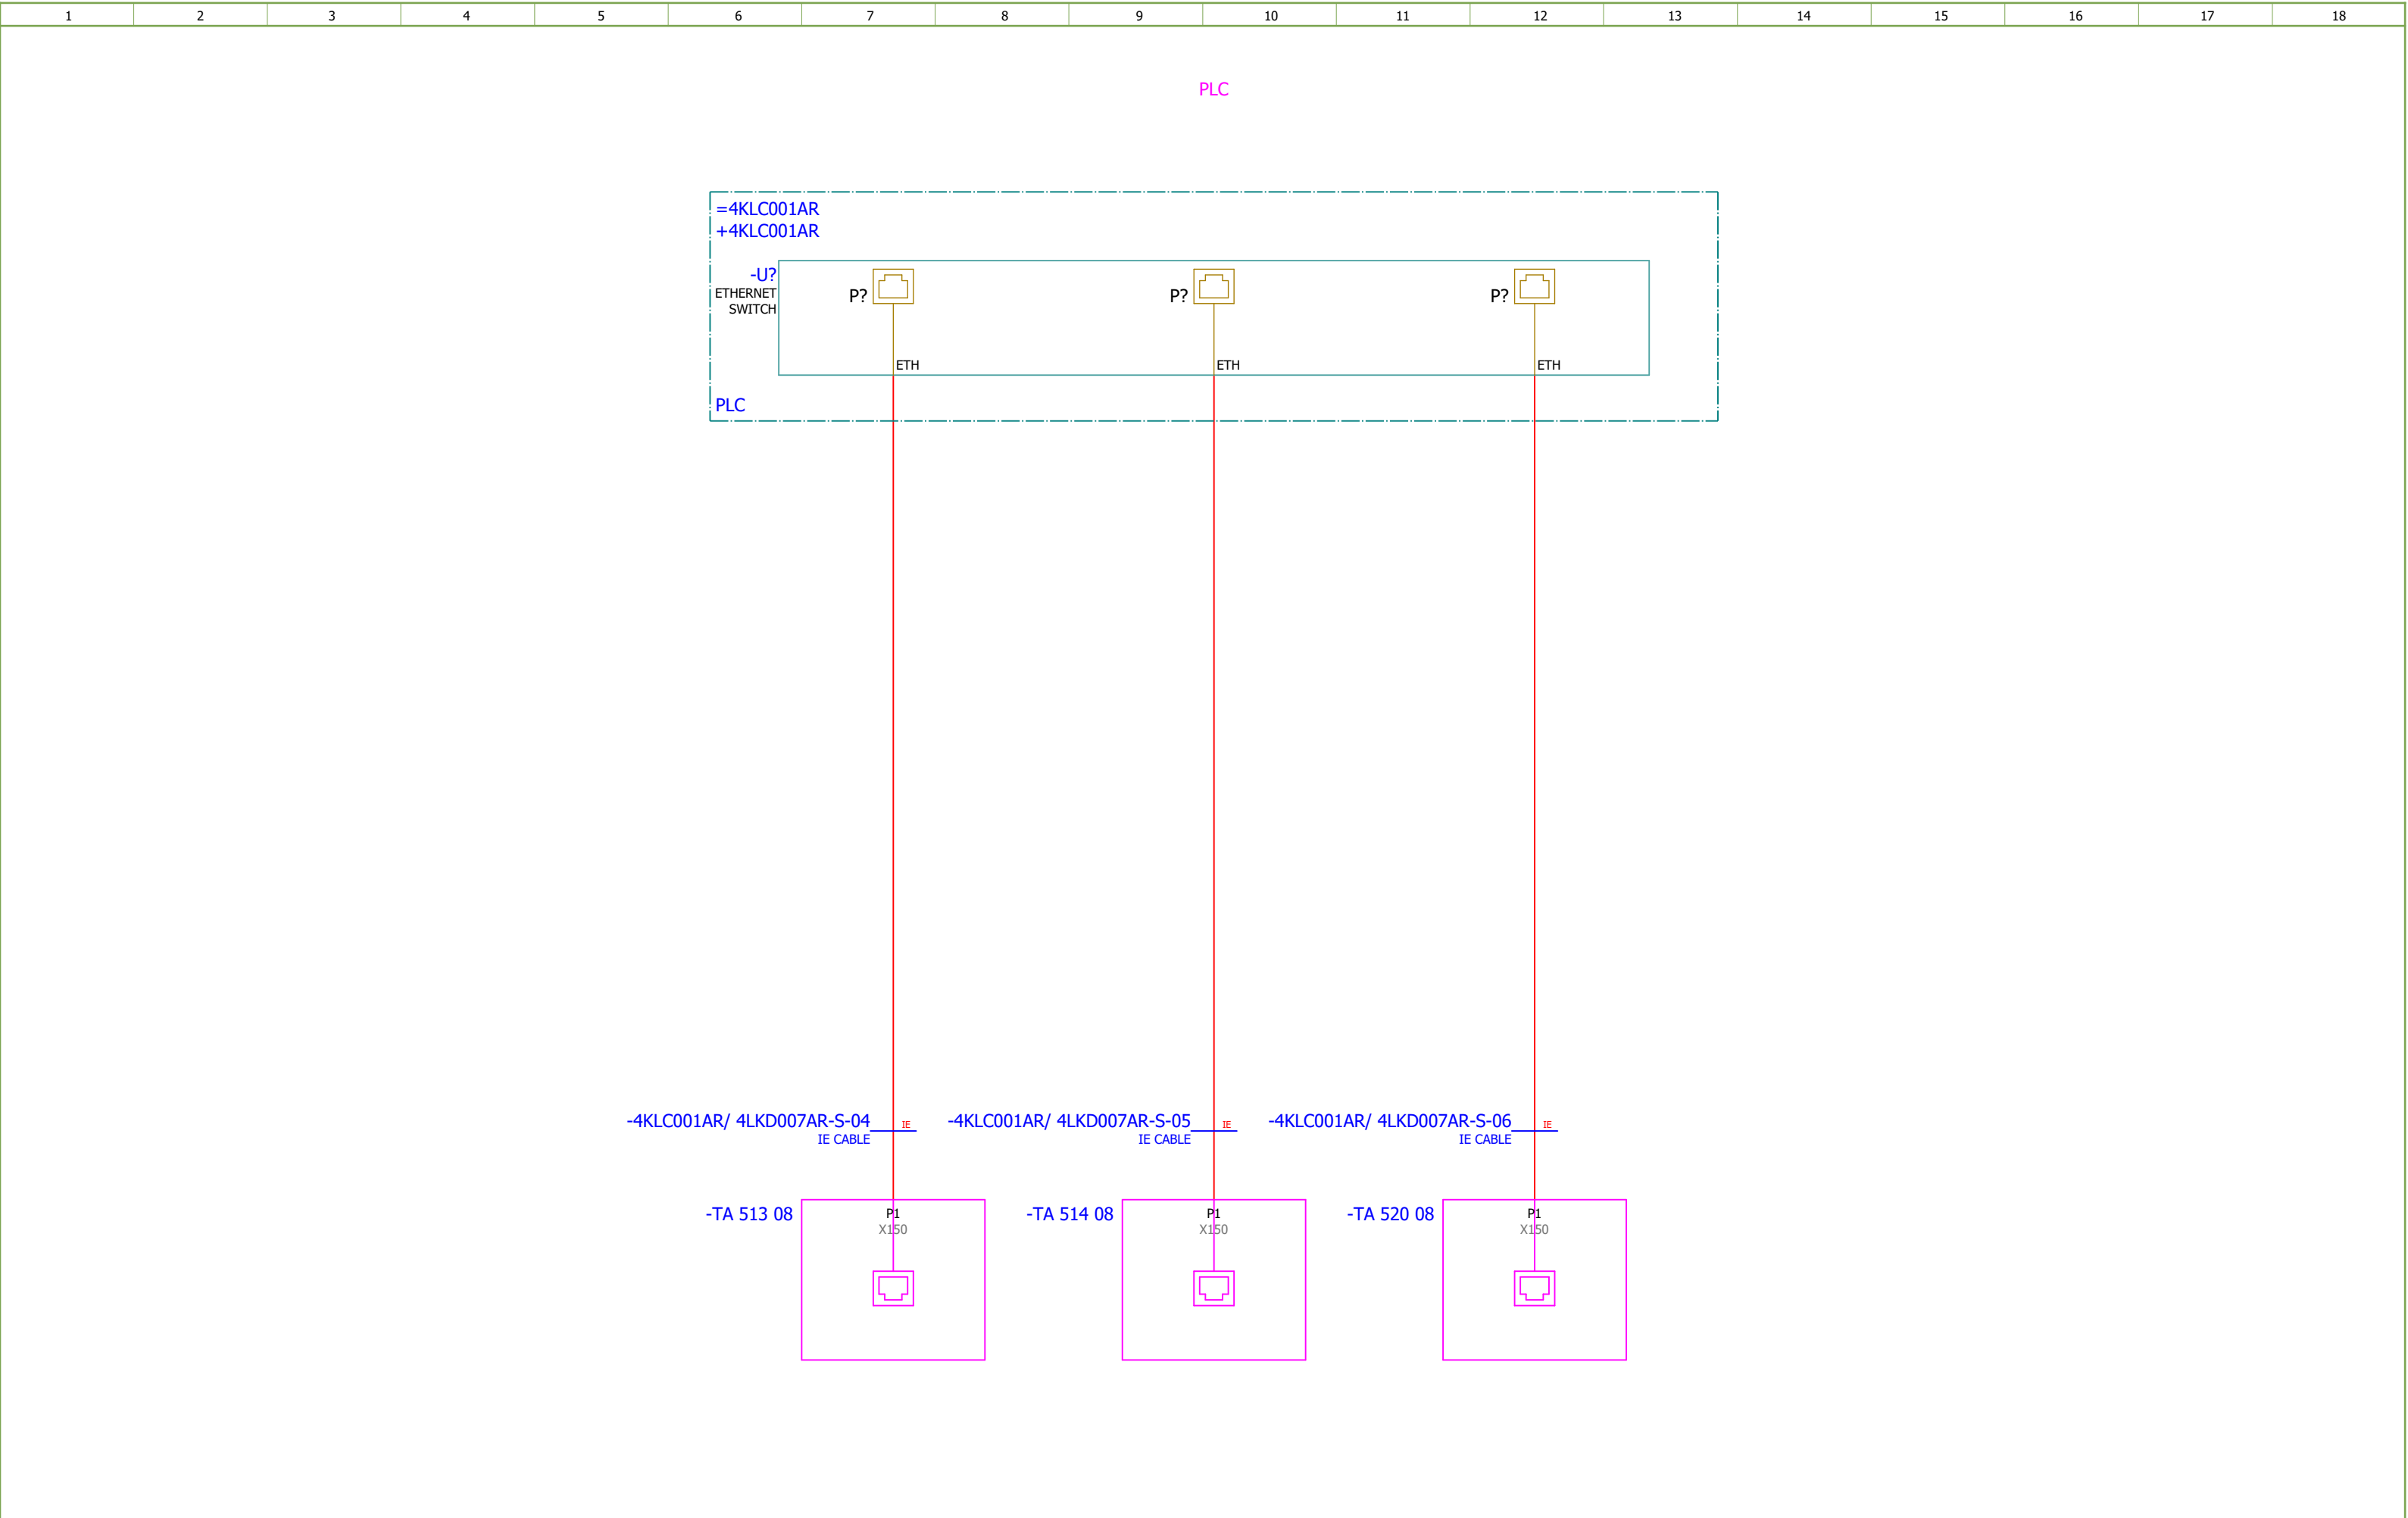


Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7		Project:	BRC-4	Unit & Issuer:	Number:	Revision:			
Drawn:	Luka Božičević			Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	Summarized parts list	Drawing designation:	BRC-4-ATEP0-1874-F					F	#Z	
Approved:	Grga Kolić													=4LKF001AR	Sheet:	630
Format:	A3													+4LKF006AR	Next:	631


Terminal diagram

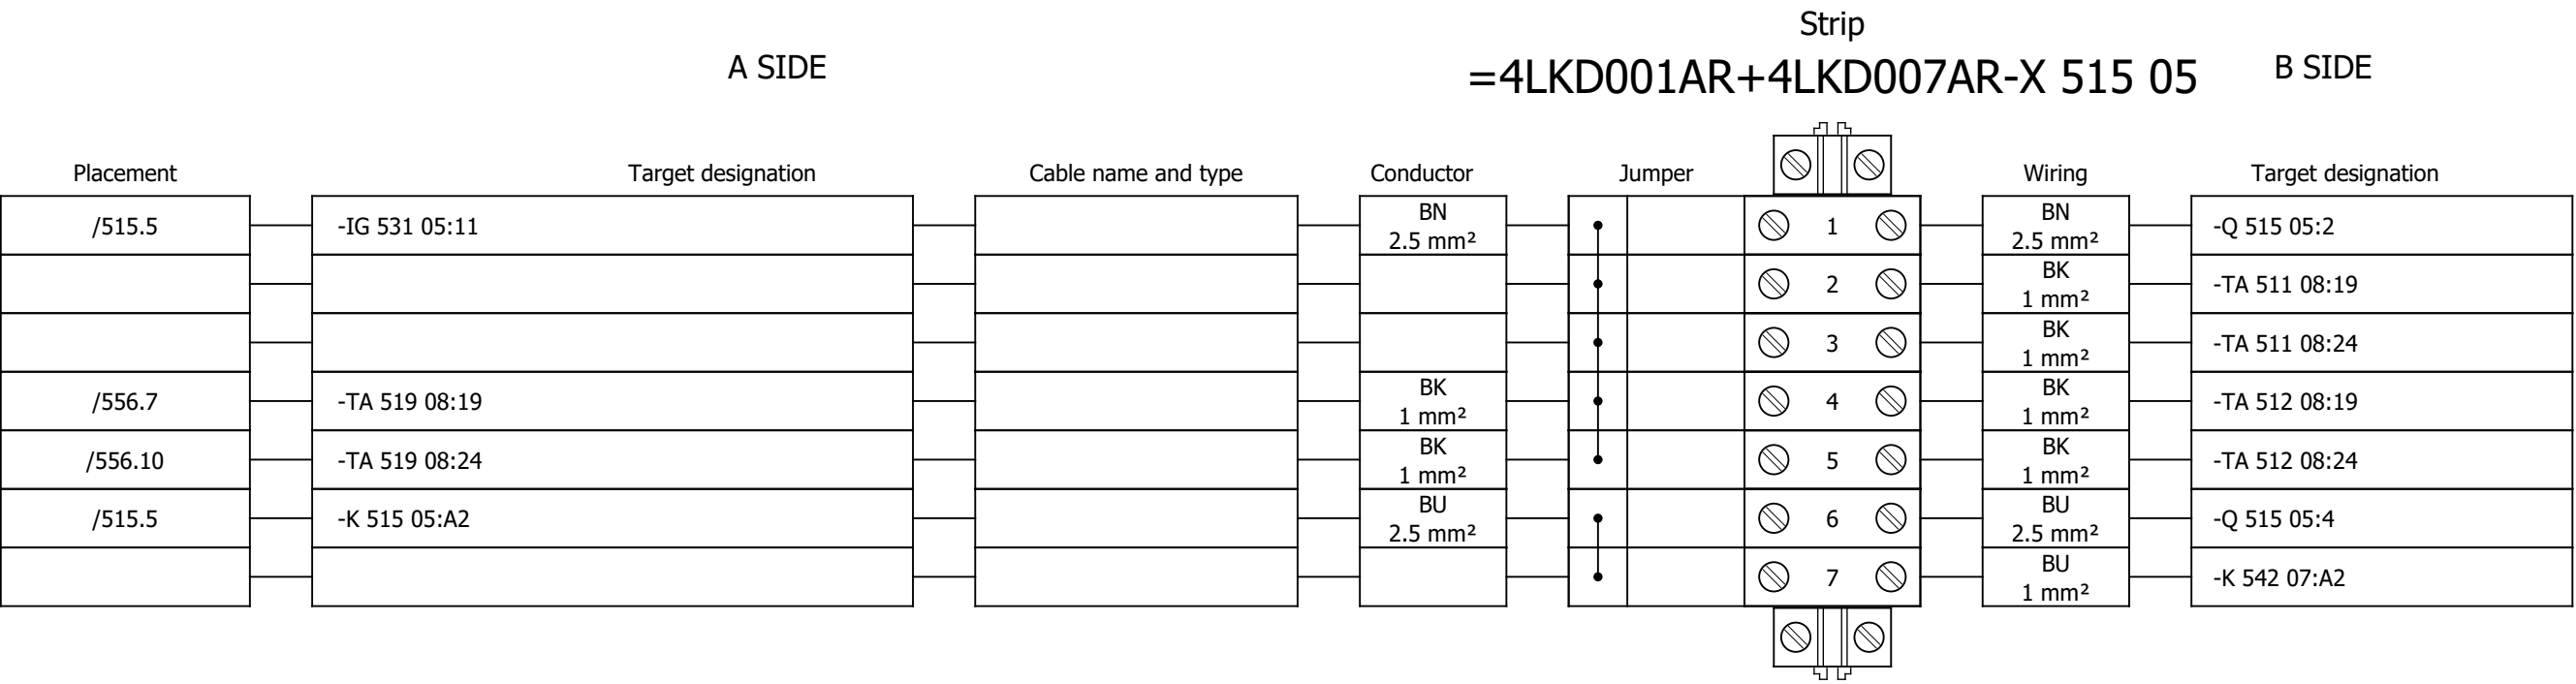


Terminal diagram

A SIDE										Strip		B SIDE					
										=4LKD001AR+4LKD007AR-X 516 05							
Placement	Target designation			Cable name and type			Conductor	Jumper		Wiring		Target designation					
/561.5	=4SEO209CA+4SEO209CA-X?:?:B			4LKD007AR/ 4SEO209CA-C-01 U1000R2V 5G1.5 mm²			BN 1.5 mm²		 1 	WH 2.5 mm²		-Q 516 05:2					
									 2 								
									 3 	WH 1 mm²		-RP 561 11:13					
/563.5	=4ERF264CA+4ERF264CA-X?:?:B			4LKD007AR/ 4ERF264CA-C-01 U1000R2V 5G1.5 mm²			BN 1.5 mm²		 4 	BN 1.5 mm²		=4FGO003CA+4FGO003CA-X?:?:B					
									 5 								
									 6 	WH 1 mm²		-RP 563 11:13					
									 7 	WH 1 mm²		-RP 569 11:13					
									 8 	WH 1 mm²		-K 542 09:11					
									 9 								
									 10 	WH 1 mm²		-K 545 09:11					
									 11 								
									 12 	GY 2.5 mm²		-Q 516 05:4					
									 13 	GY 1 mm²		-RP 561 11:A2					
									 14 	GY 1 mm²		-K 562 05:A2					
									 15 	GY 1 mm²		-RP 569 11:A2					
									 16 	GY 1 mm²		-RP 563 11:A2					
									 17 	GY 1 mm²		-K 564 05:A2					
									 18 	GY 1 mm²		-K 571 05:A2					
									 19 	GY 1 mm²		-HL 593 06:2					
									 	GY 1 mm²		-XB 592 03:1:B					
									 21 	GY 1 mm²		-HL 594 06:2					
									 	GY 1 mm²		-XB 592 03:2:B					
/561.5	=4SEO209CA+4SEO209CA-X?:?:A			4LKD007AR/ 4SEO209CA-C-01 U1000R2V 5G1.5 mm²			BK 1.5 mm²	,	 23 	WH 1 mm²		-RP 585 04:13					


Terminal diagram

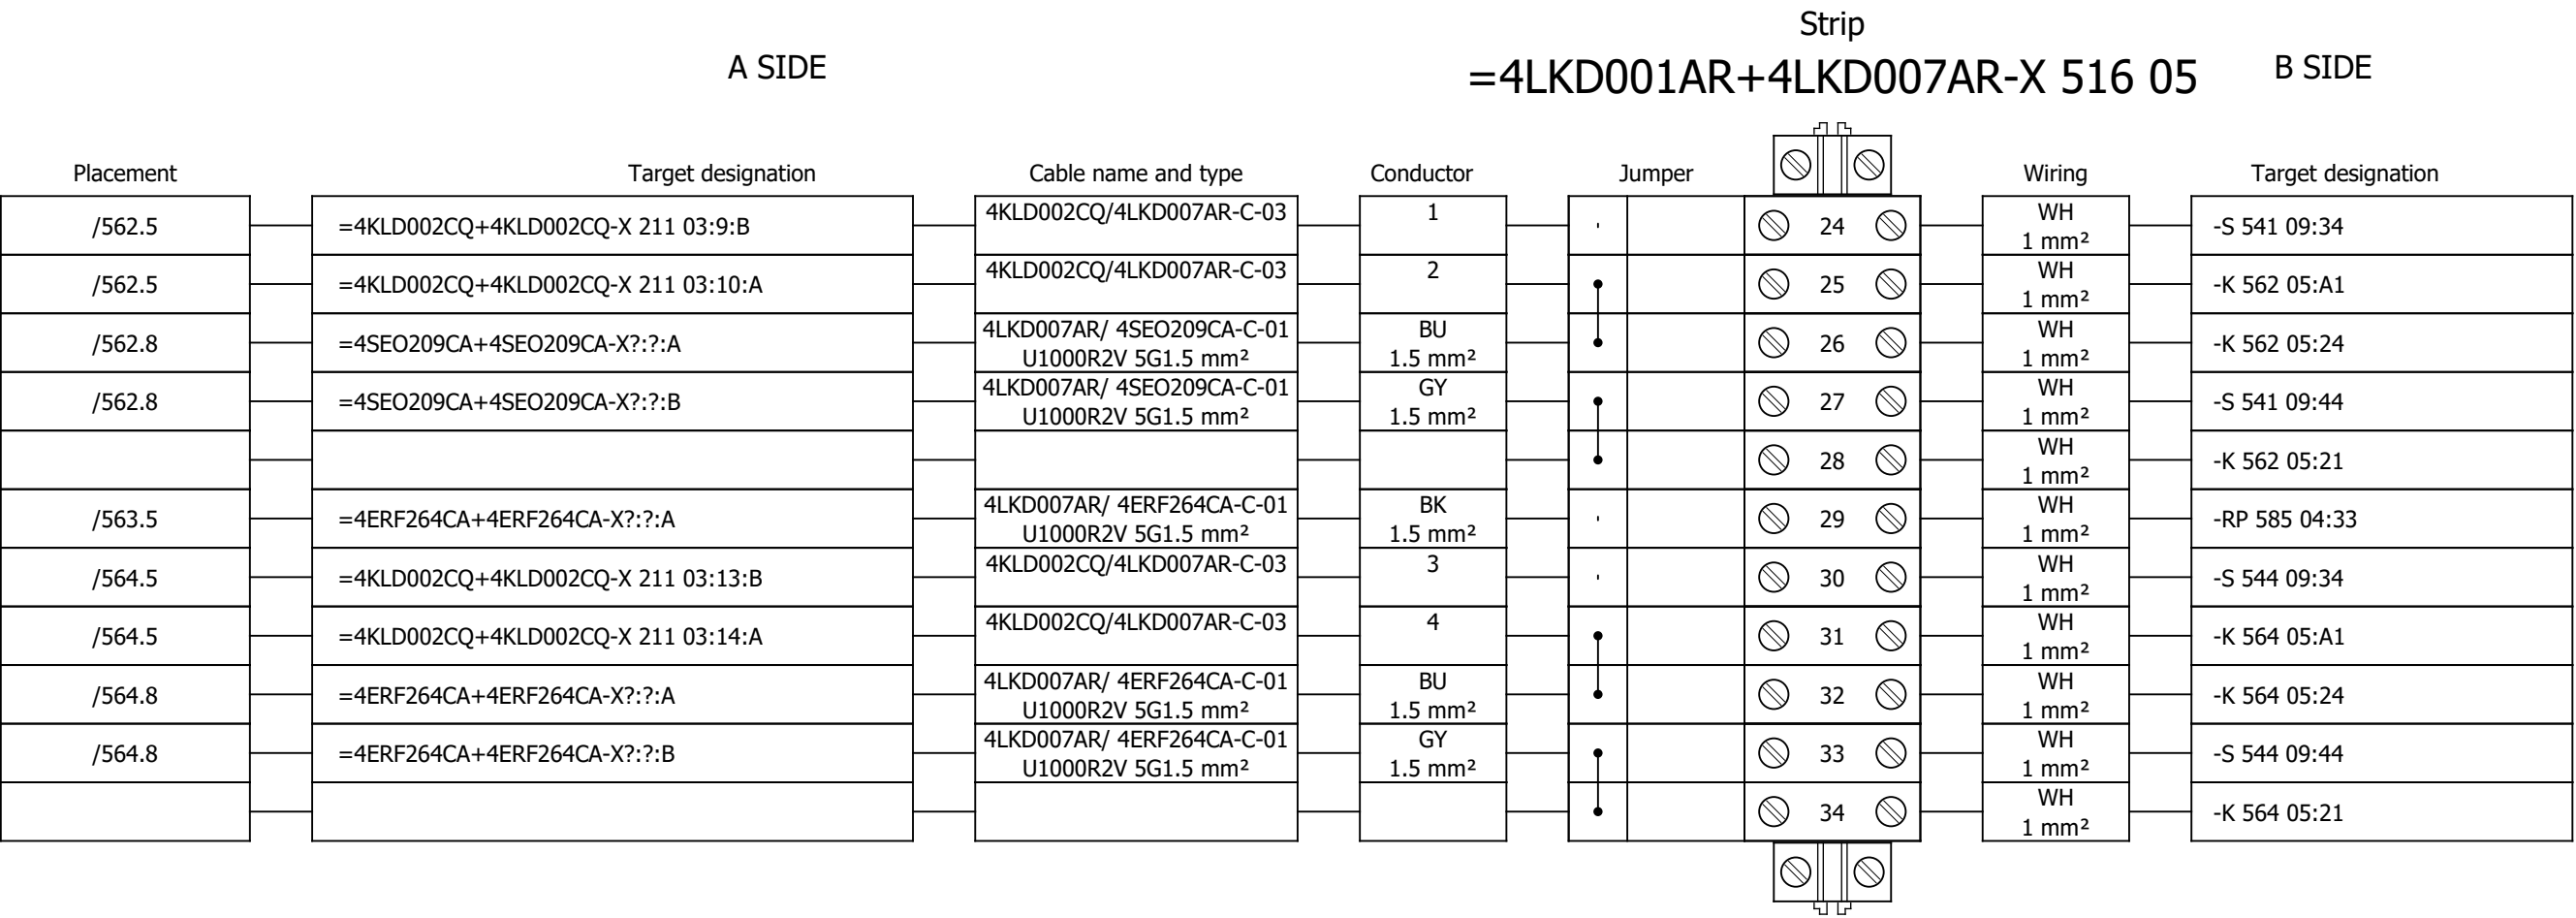


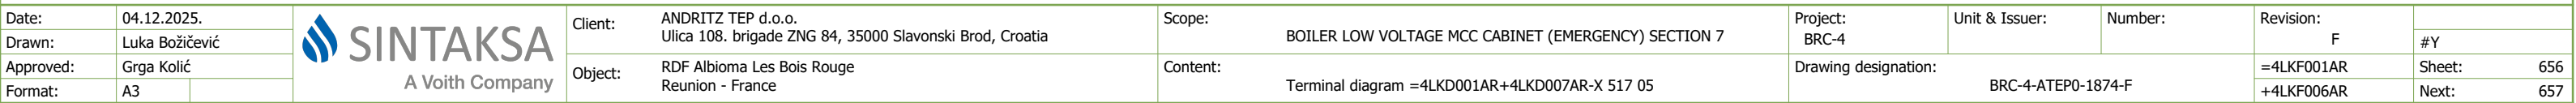



Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7		Project:	BRC-4	Unit & Issuer:		Number:		Revision:	F		
Drawn:	Luka Božičević																#Y	
Approved:	Grga Kolić				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	Terminal diagram =4LKD001AR+4LKD007AR-X 518 05		Drawing designation:						=4LKF001AR	Sheet:	657
Format:	A3											BRC-4-ATEP0-1874-F				+4LKF006AR	Next:	658

Terminal diagram


A SIDE				Strip =4LKD001AR+4LKD007AR-X 518 05				B SIDE	
Placement	Target designation	Cable name and type	Conductor	Jumper				Wiring	Target designation
							22		
/565.5	=4SEO213CA+4SEO213CA-X?:?:A	4LKD007AR/ 4SEO213CA-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²	,			23		-RP 585 04:23
/566.5	=4KLD002CQ+4KLD002CQ-X 219 03:7:B	4KLD002CQ/4LKD007AR-C-05	1	,			24		-S 547 09:34
/566.5	=4KLD002CQ+4KLD002CQ-X 219 03:8:A	4KLD002CQ/4LKD007AR-C-05	2				25		-K 566 05:A1
/566.8	=4SEO213CA+4SEO213CA-X?:?:A	4LKD007AR/ 4SEO213CA-C-01 U1000R2V 5G1.5 mm²	BU 1.5 mm²				26		-K 566 05:24
/566.8	=4SEO213CA+4SEO213CA-X?:?:B	4LKD007AR/ 4SEO213CA-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²				27		-S 547 09:44
							28		-K 566 05:21
/567.5	=4ERF269CA+4ERF269CA-X?:?:A	4LKD007AR/ 4ERF269CA-C-01 U1000R2V 5G1.5 mm²	BK 1.5 mm²	,			29		-RP 585 04:43
/568.5	=4KLD002CQ+4KLD002CQ-X 219 03:11:B	4KLD002CQ/4LKD007AR-C-05	3	,			30		-S 550 09:34
/568.5	=4KLD002CQ+4KLD002CQ-X 219 03:12:A	4KLD002CQ/4LKD007AR-C-05	4				31		-K 568 05:A1
/568.8	=4ERF269CA+4ERF269CA-X?:?:A	4LKD007AR/ 4ERF269CA-C-01 U1000R2V 5G1.5 mm²	BU 1.5 mm²				32		-K 568 05:24
/568.8	=4ERF269CA+4ERF269CA-X?:?:B	4LKD007AR/ 4ERF269CA-C-01 U1000R2V 5G1.5 mm²	GY 1.5 mm²				33		-S 550 09:44
							34		-K 568 05:21

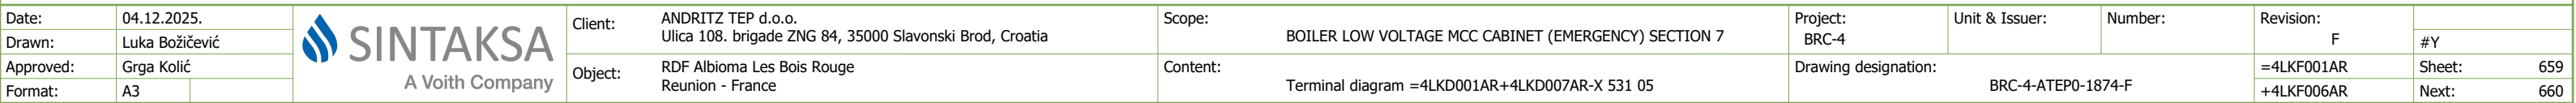


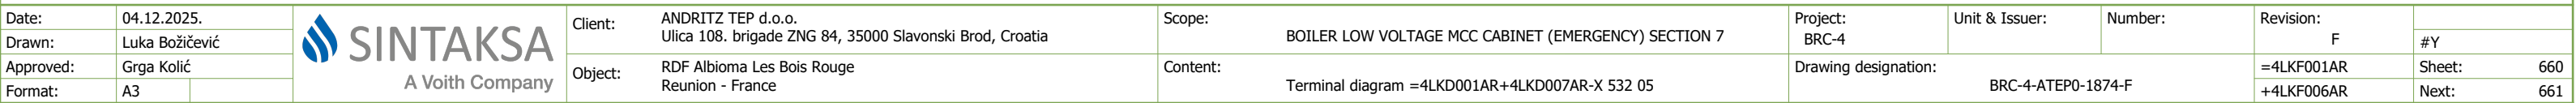

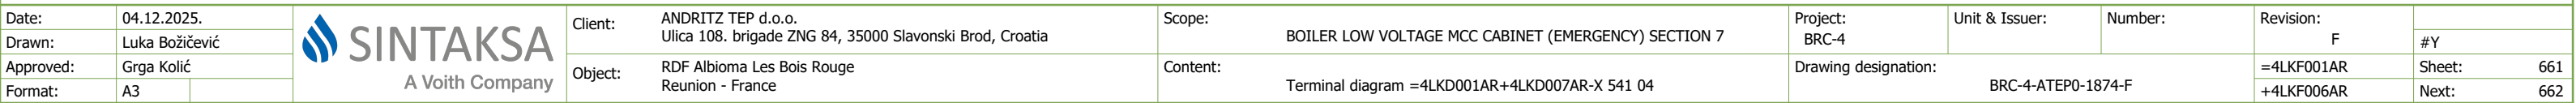



Terminal diagram

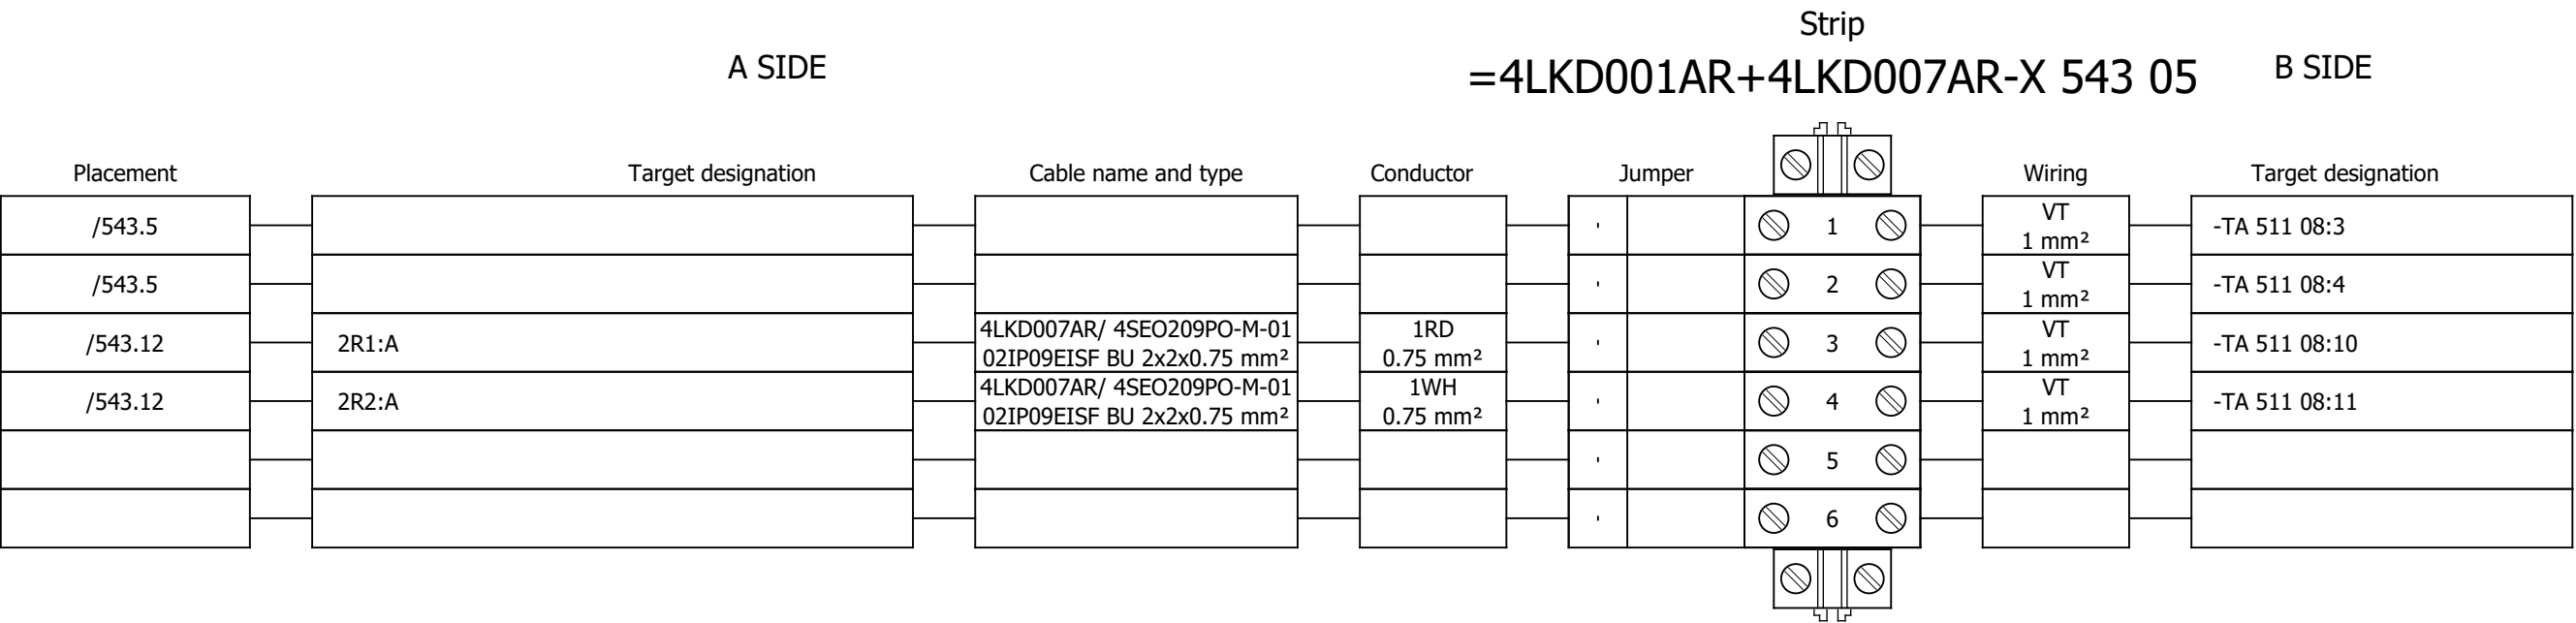

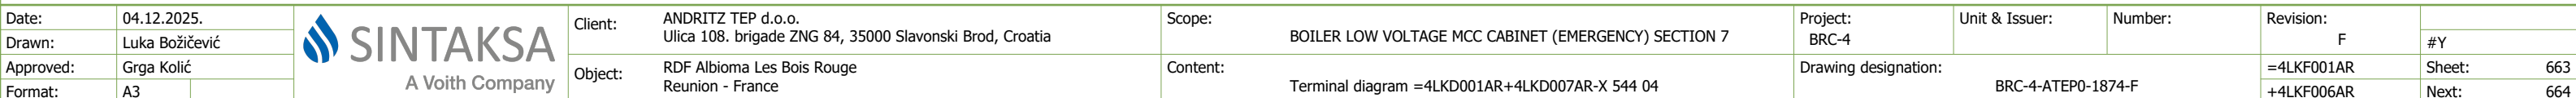


Terminal diagram

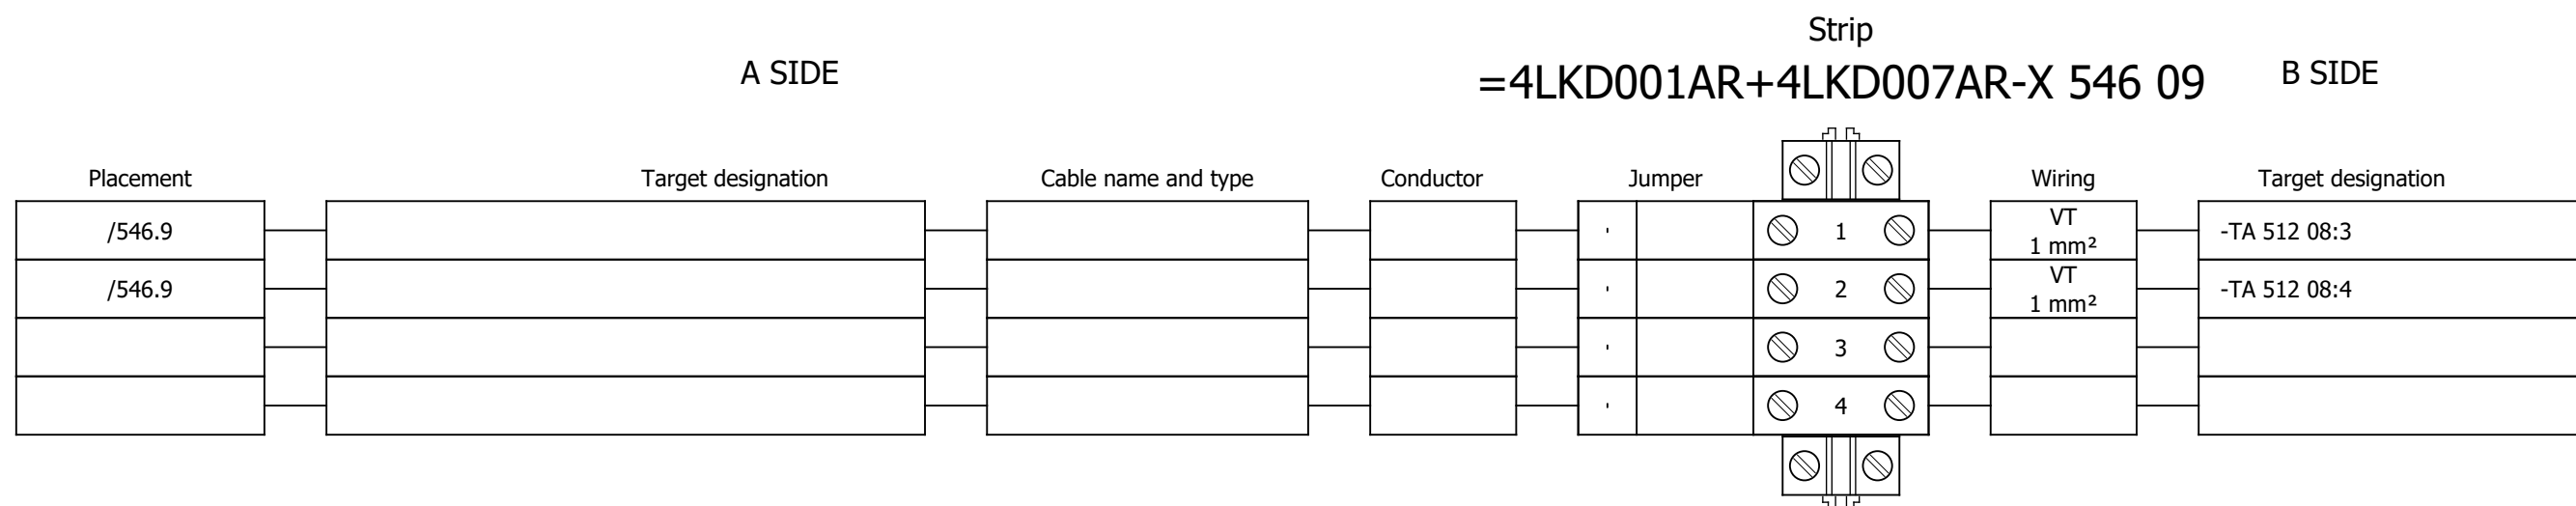


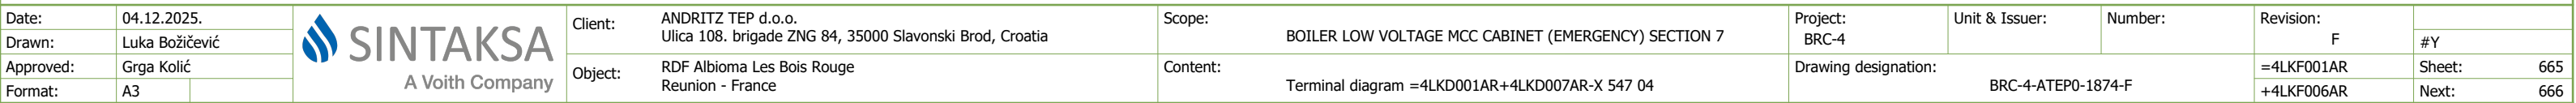


Terminal diagram

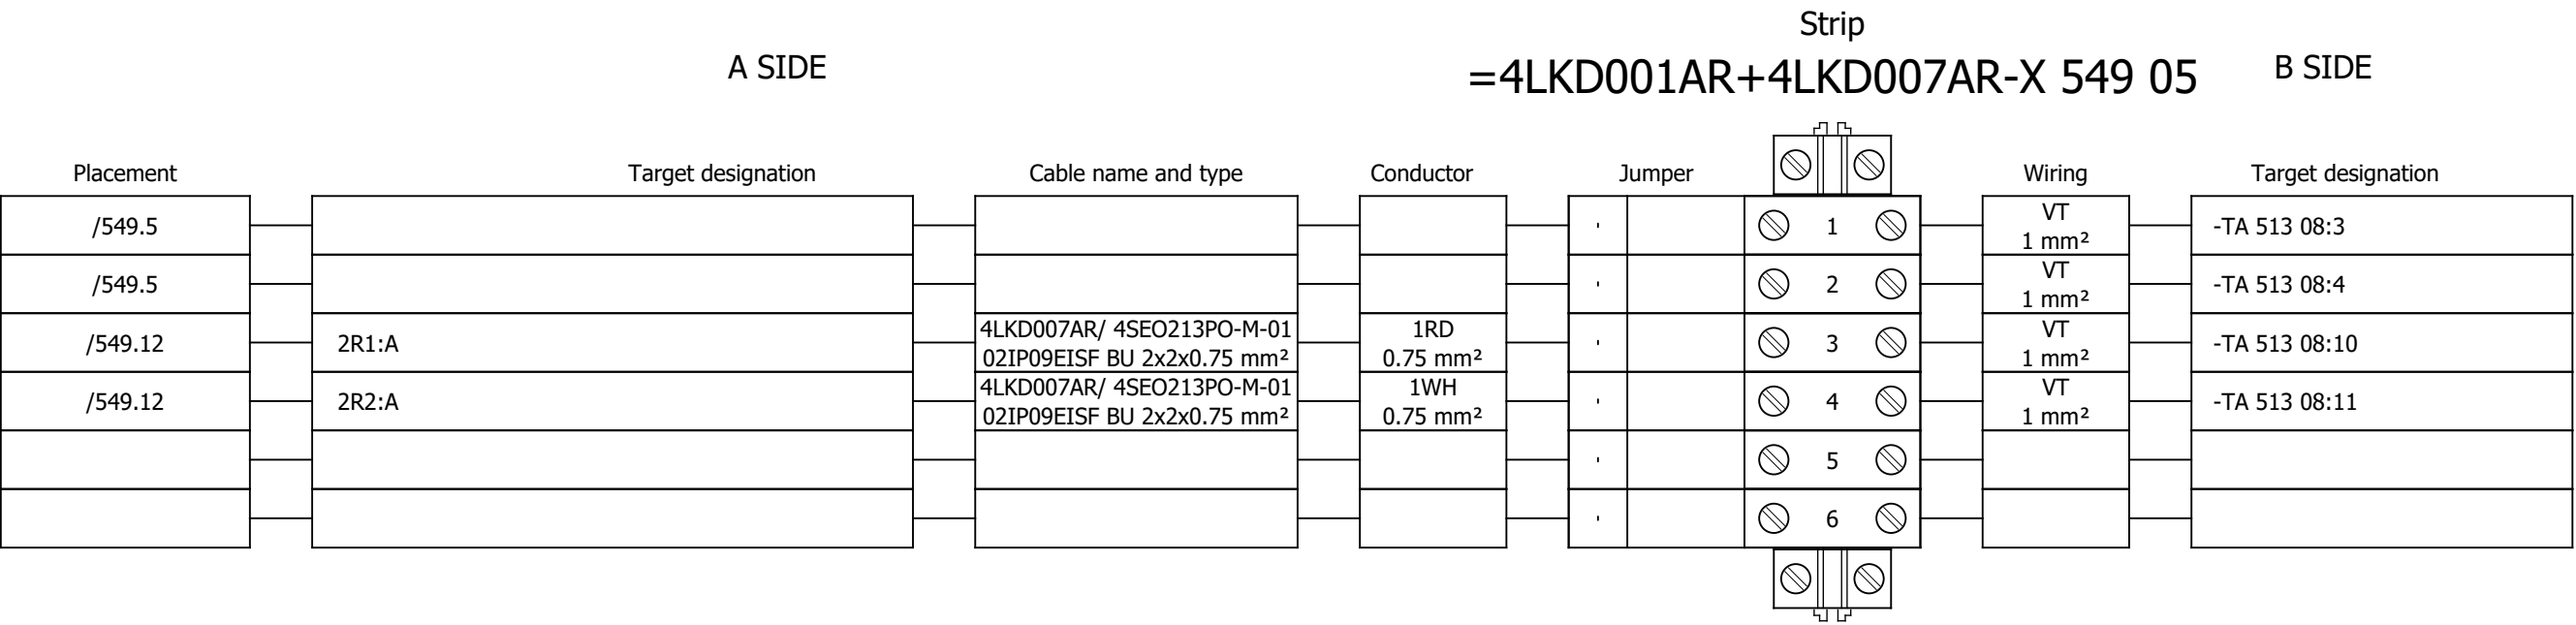


Terminal diagram

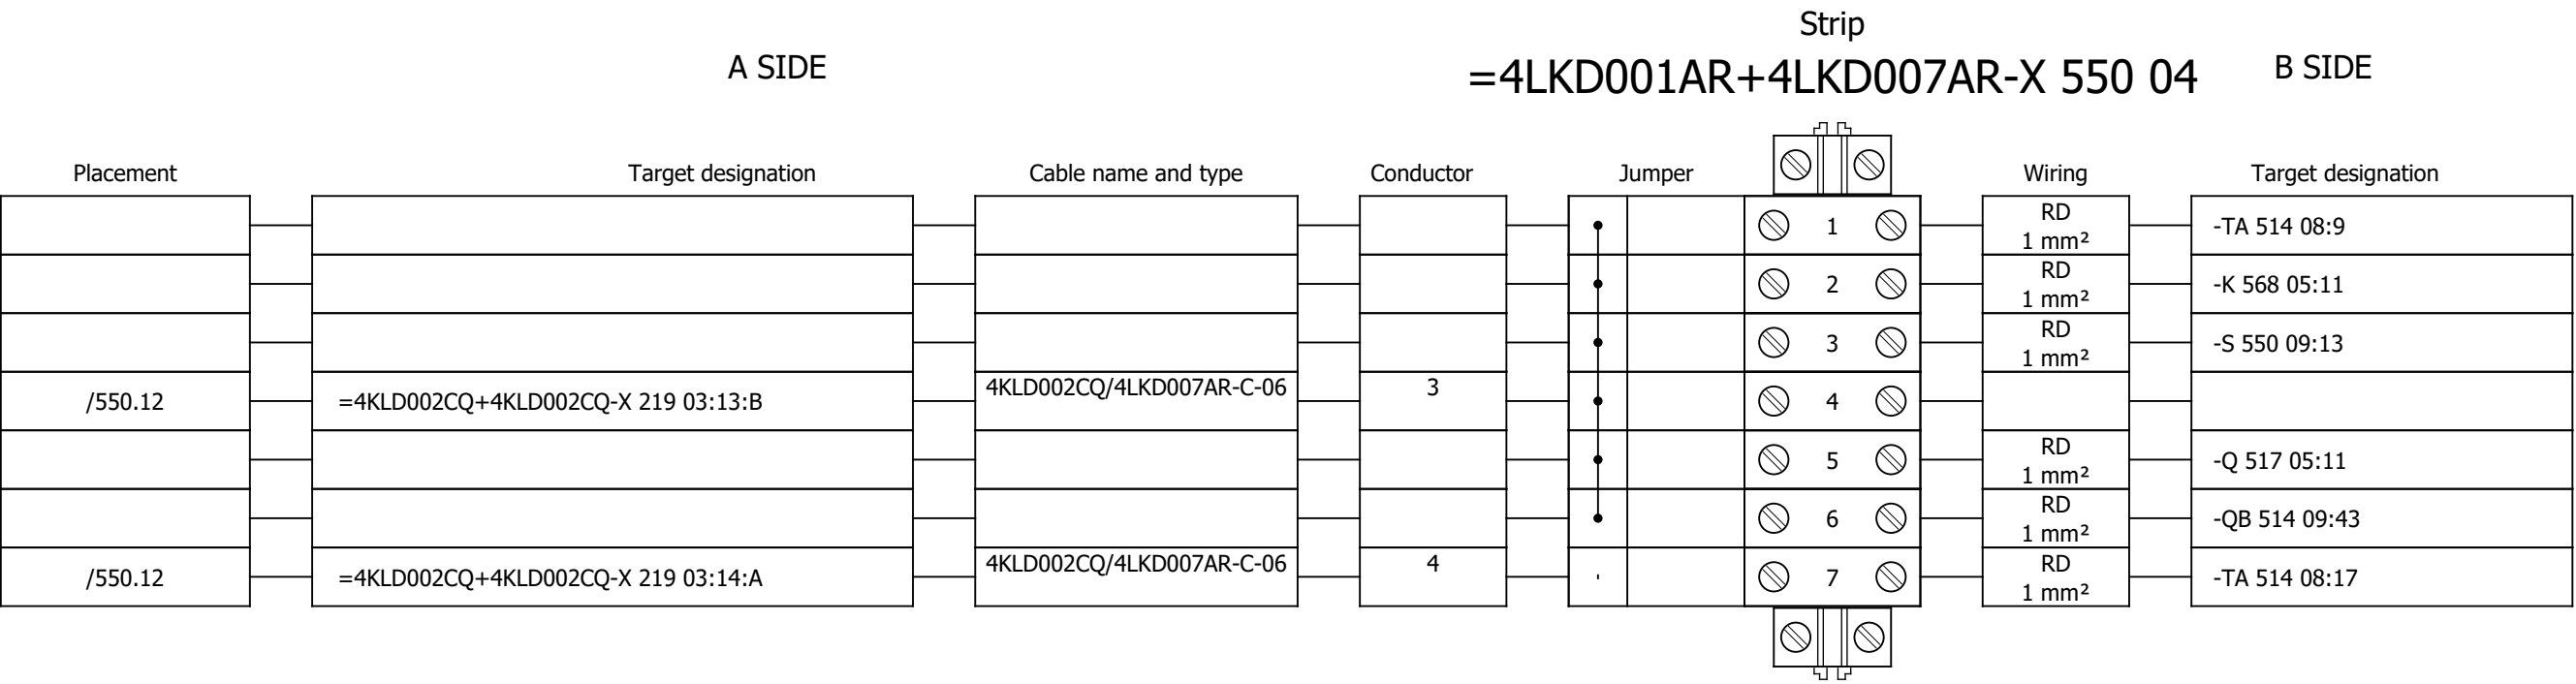


Terminal diagram

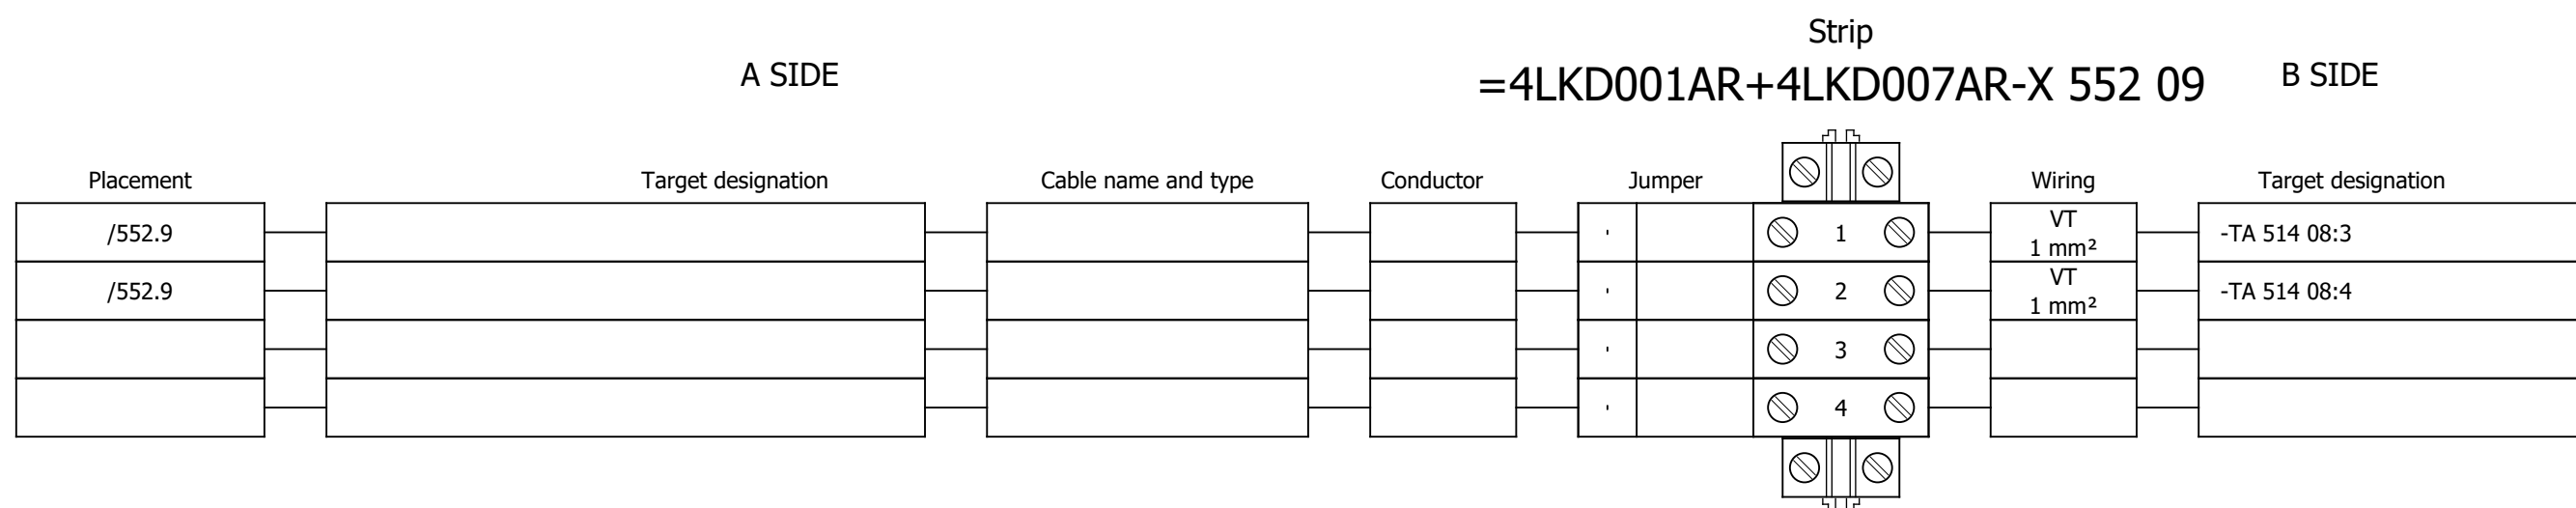


Terminal diagram

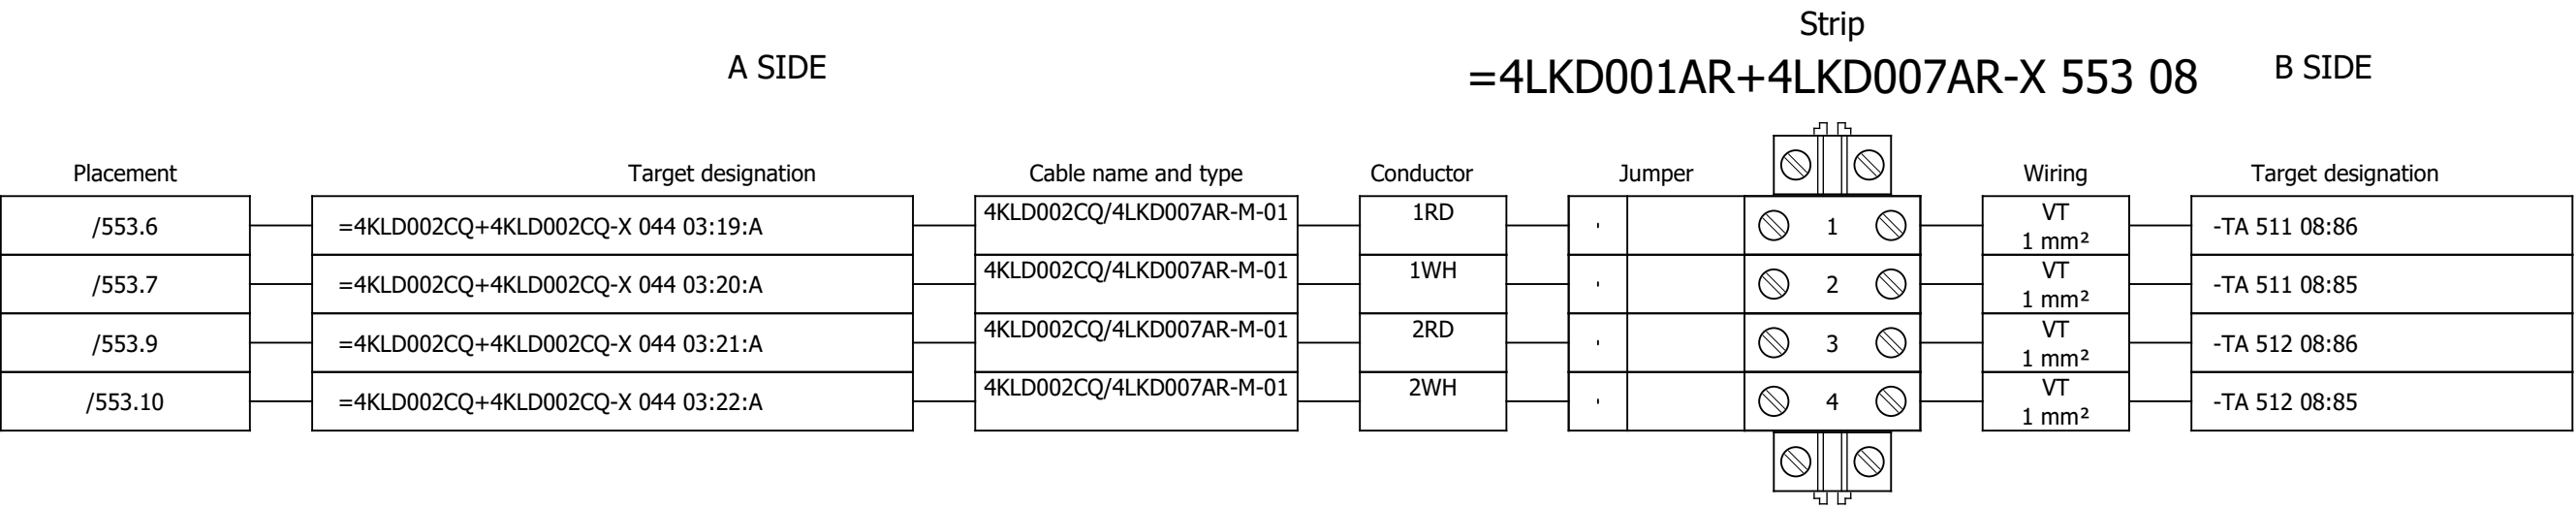


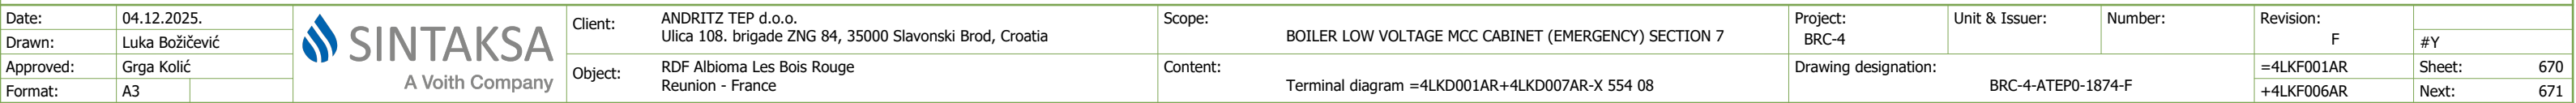


Terminal diagram

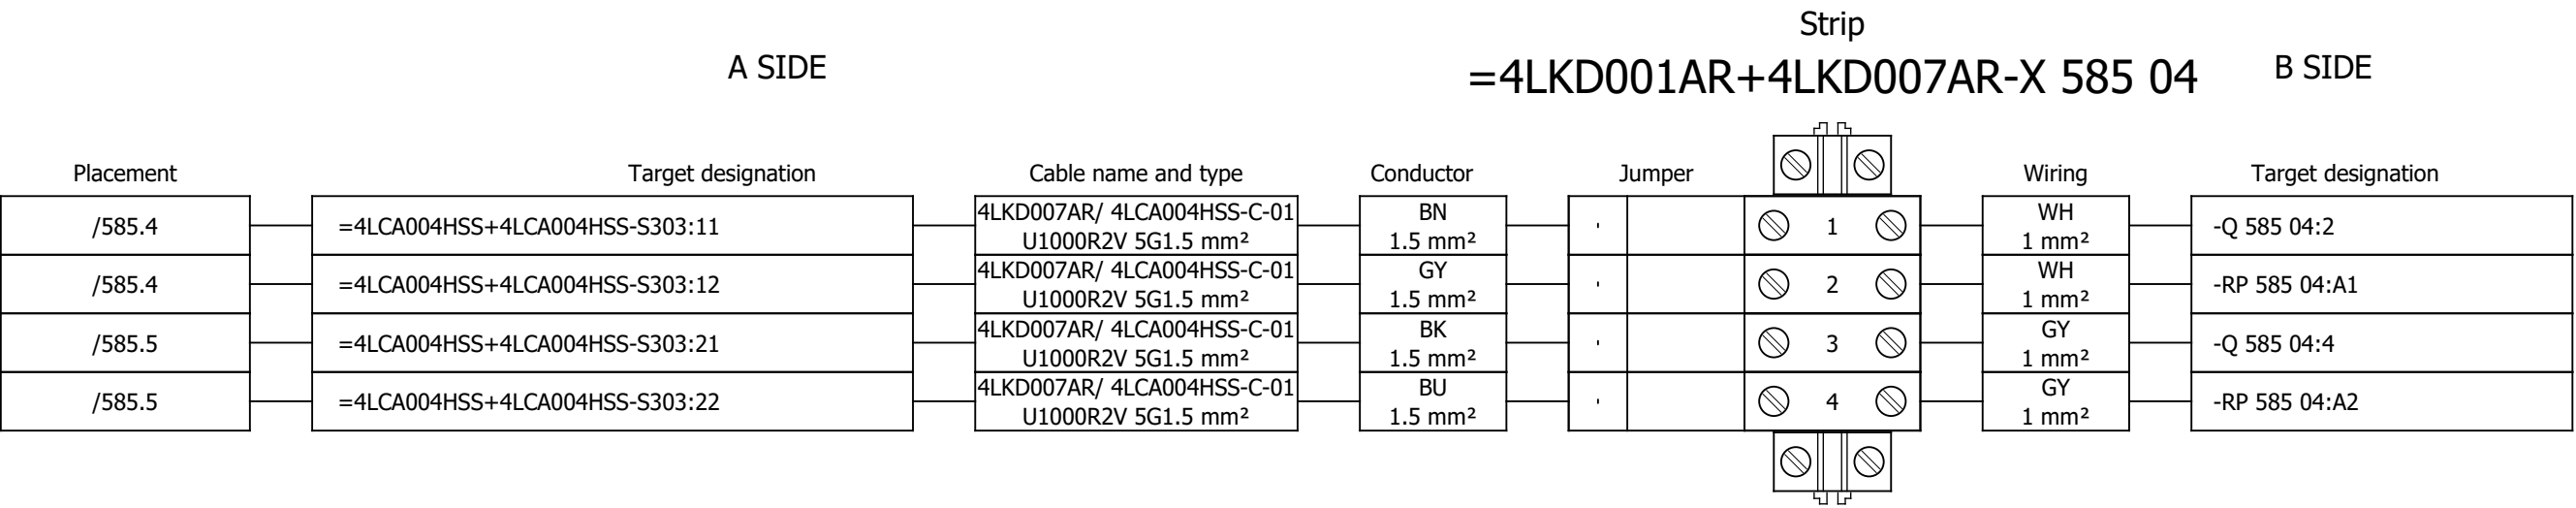

Terminal diagram

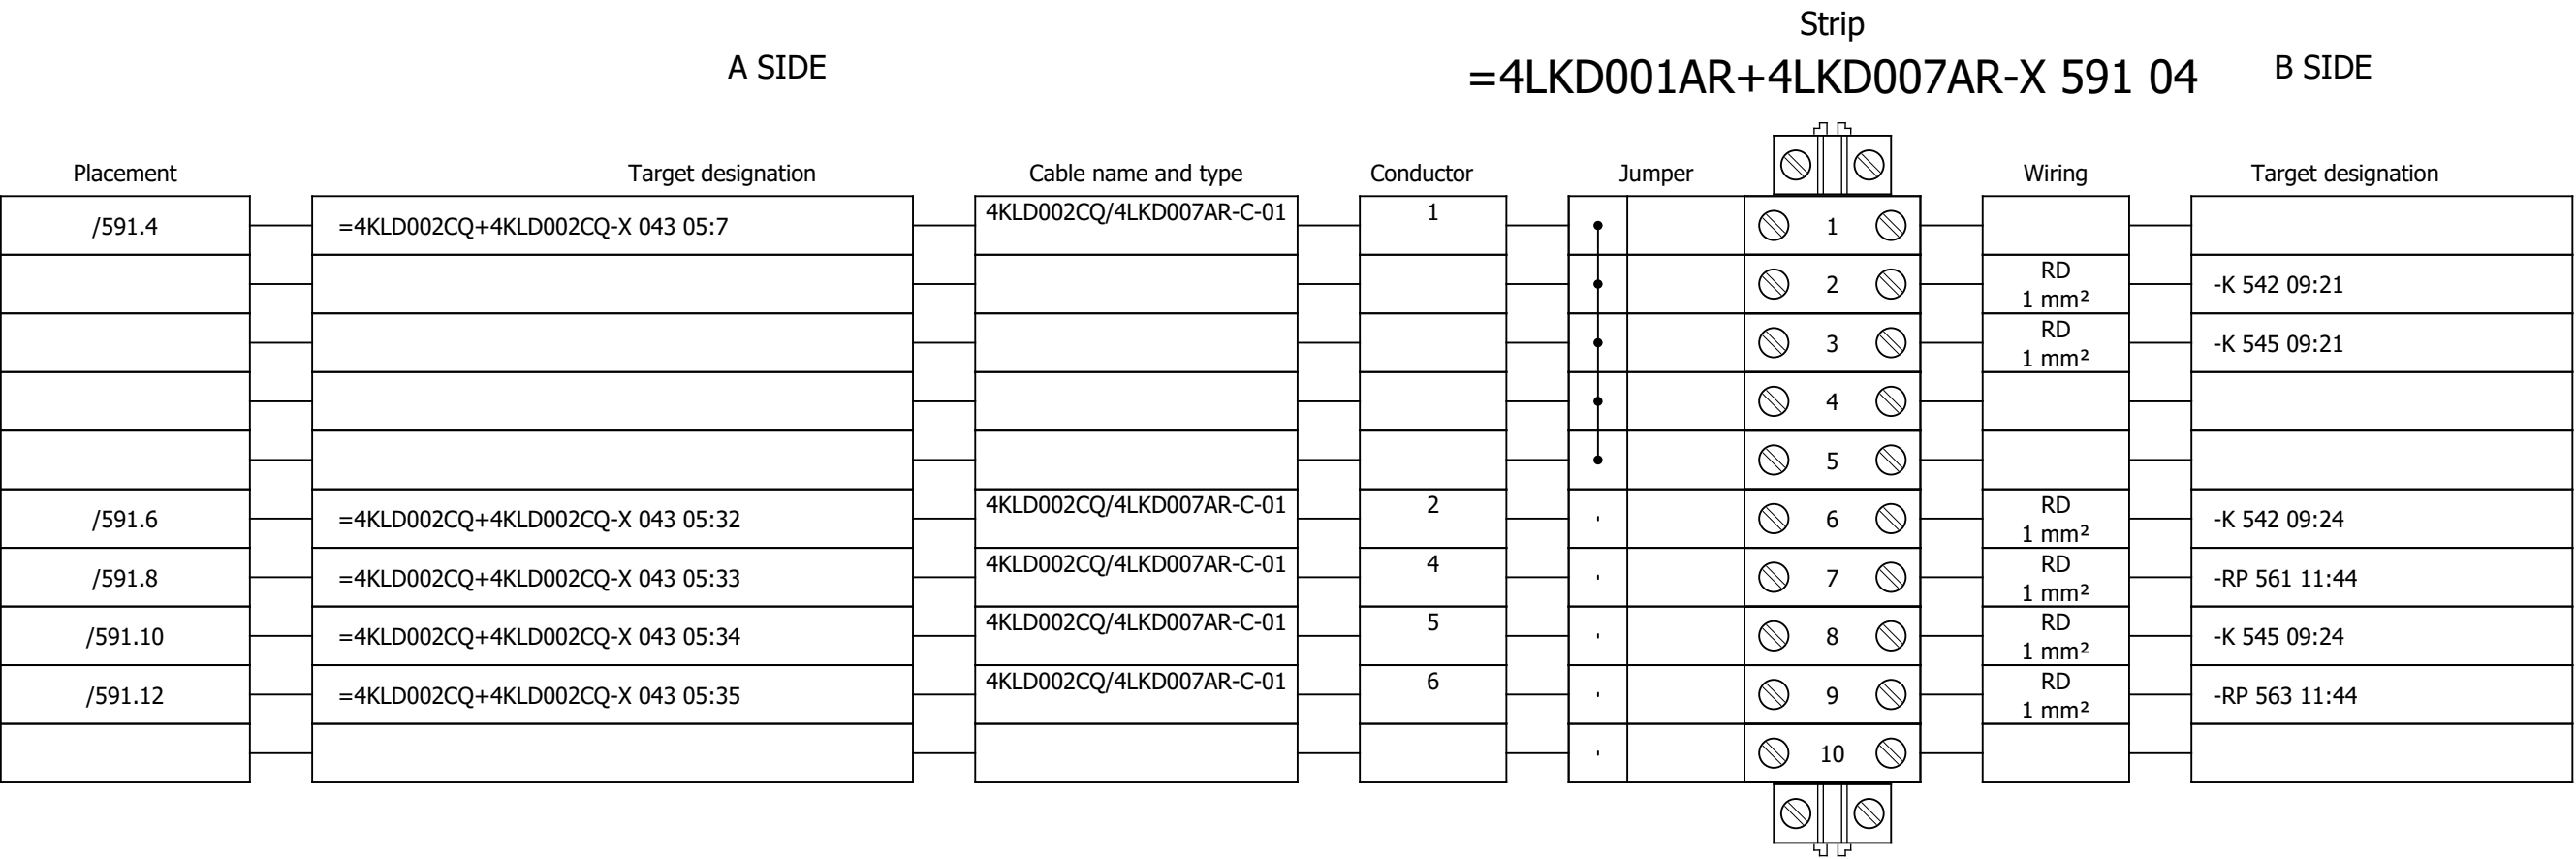


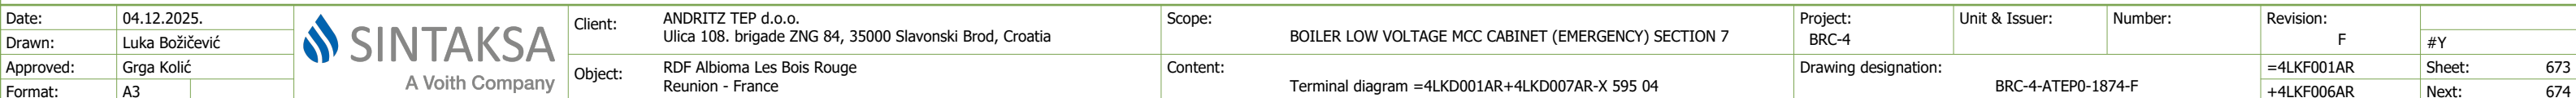


Strip
=4LKD001AR+4LKD007AR-X 611 03 B SIDE

Date:	04.12.2025.			Client:	ANDRITZ TEP d.o.o. Ulica 108. brigade ZNG 84, 35000 Slavonski Brod, Croatia	Scope:	BOILER LOW VOLTAGE MCC CABINET (EMERGENCY) SECTION 7	Project:	BRC-4	Unit & Issuer:		Number:		Revision:	F		
Drawn:	Luka Božičević															#Y	
Approved:	Grga Kolić				Object:	RDF Albioma Les Bois Rouge Reunion - France	Content:	Terminal diagram =4LKD001AR+4LKD007AR-X 611 03	Drawing designation:						=4LKF001AR	Sheet:	674
Format:	A3								BRC-4-ATEP0-1874-F						+4LKF006AR	Next:	675


Terminal diagram

A SIDE					Strip =4LKD001AR+4LKD007AR-X 611 04					B SIDE	
Placement	Target designation		Cable name and type	Conductor	Jumper				Wiring	Target designation	
/531.11	-X 531 05:4:A			RD 1 mm²	•		 1 				
/532.11	-X 532 05:4:A			RD 1 mm²	•		 5 				
/561.14	-RP 561 11:23			RD 1 mm²	•		 2 	RD 1 mm²	-RP 561 11:33		
/565.14	-RP 565 11:23			RD 1 mm²	•		 6 	RD 1 mm²	-RP 565 11:33		
/563.14	-RP 563 11:23			RD 1 mm²	•		 3 	RD 1 mm²	-RP 563 11:33		
/567.14	-RP 567 11:23			RD 1 mm²	•		 7 	RD 1 mm²	-RP 567 11:33		
/569.14	-RP 569 11:23			RD 1 mm²	•		 4 	RD 1 mm²	-RP 569 11:33		
/571.14	-RP 571 11:23			RD 1 mm²	•		 8 	RD 1 mm²	-RP 571 11:33		
					•		 9 				
					•		 10 				
					•		 11 				
					•		 12 				
					•		 13 				
					•		 14 				
					•		 15 				
					•		 16 				
					•		 17 				
					•		 18 				
					•		 19 				
					•		 20 				
					•		 21 				
					•		 22 				
					•		 23 				
					•		24				


Terminal diagram

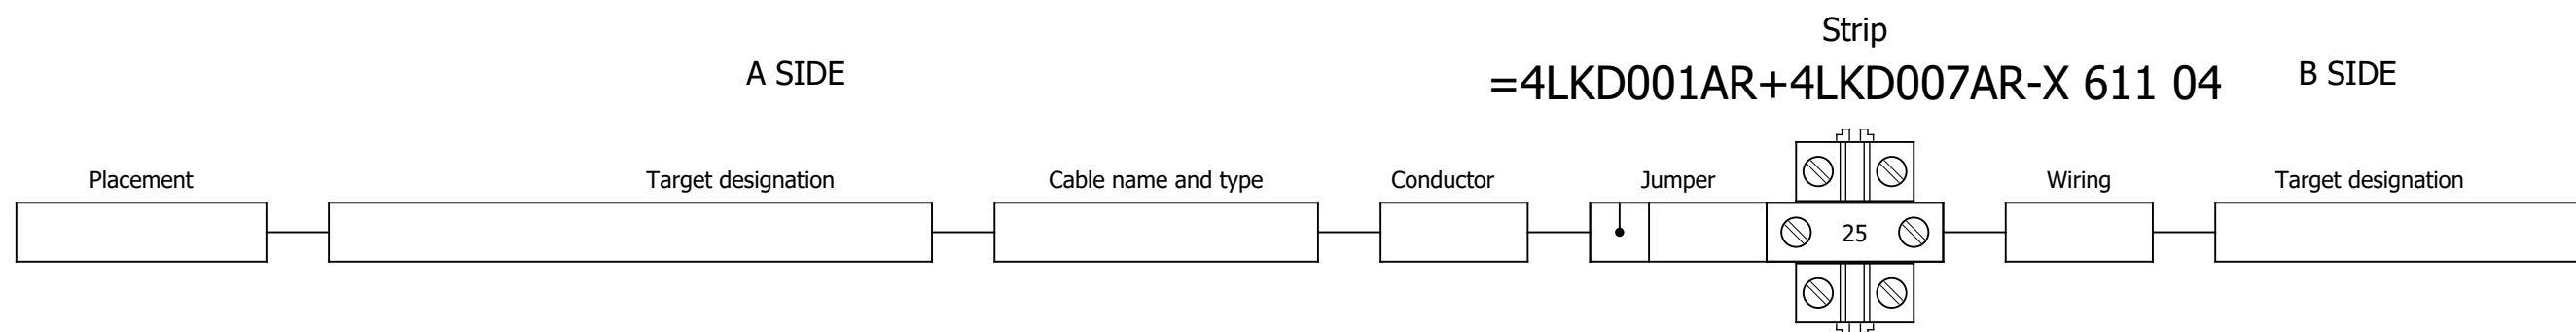


Terminal diagram

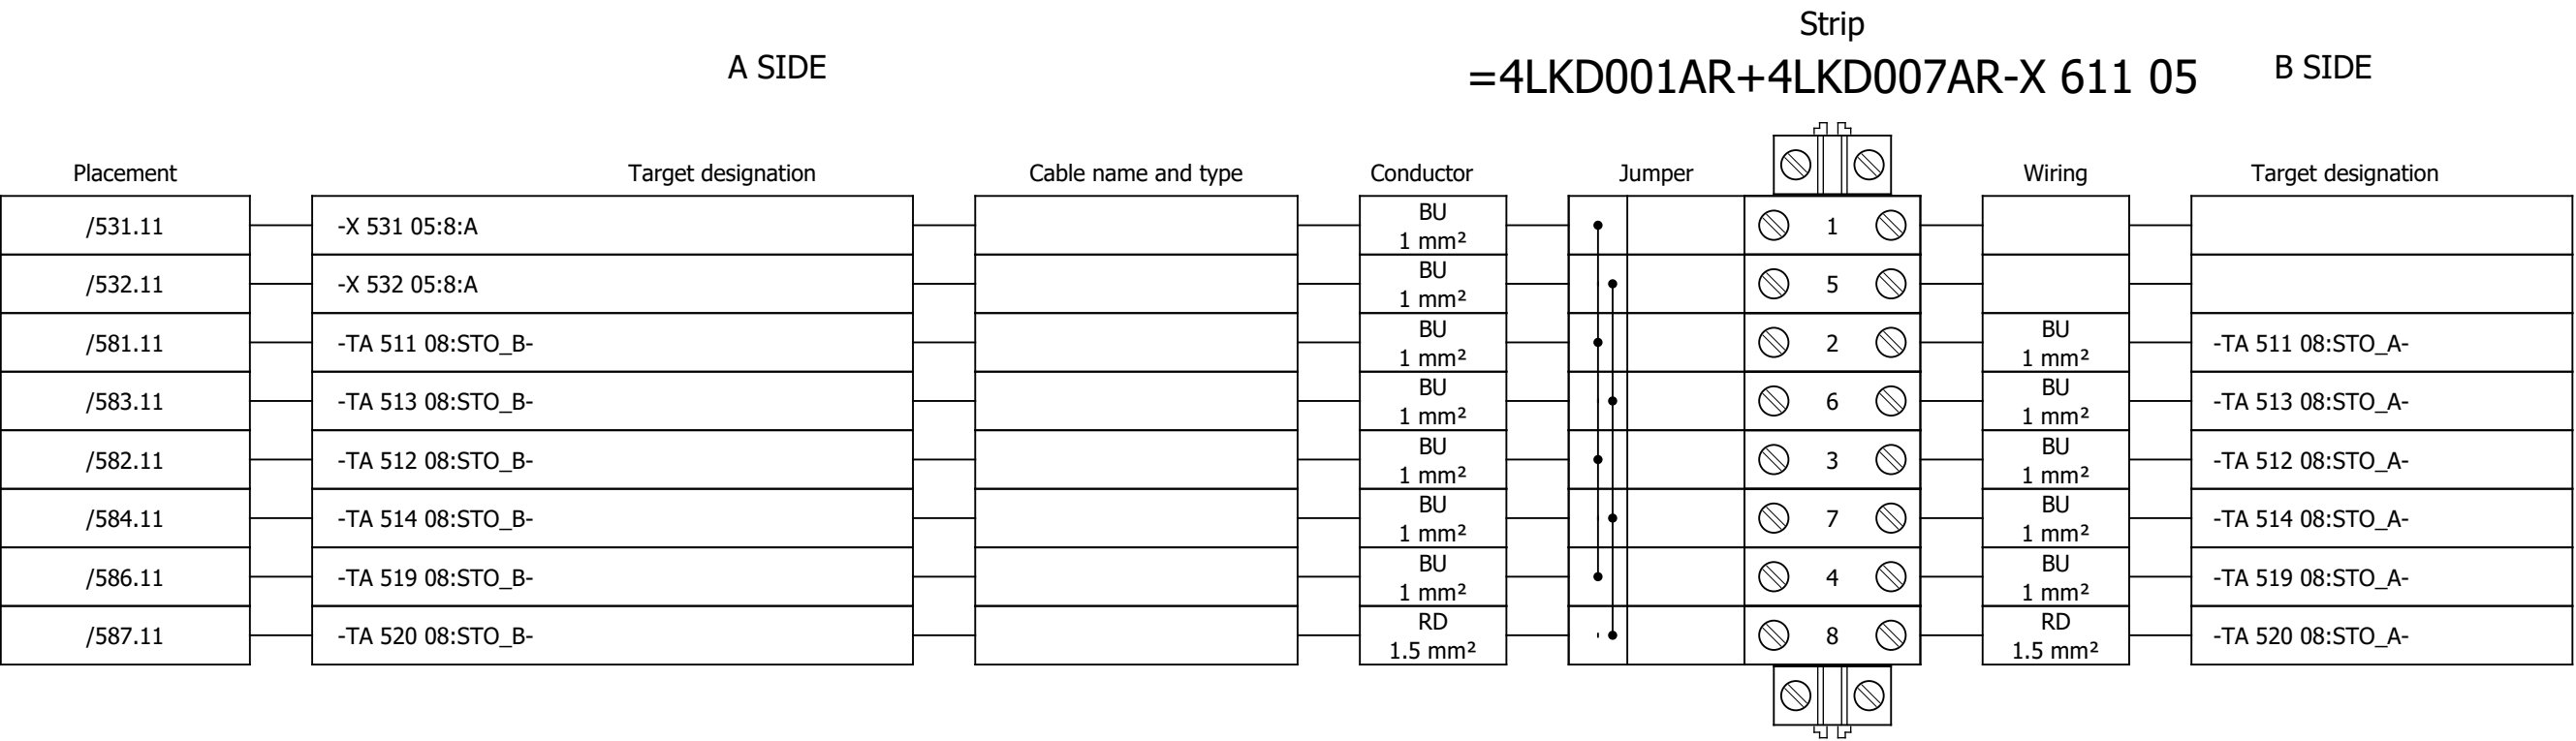

Terminal diagram

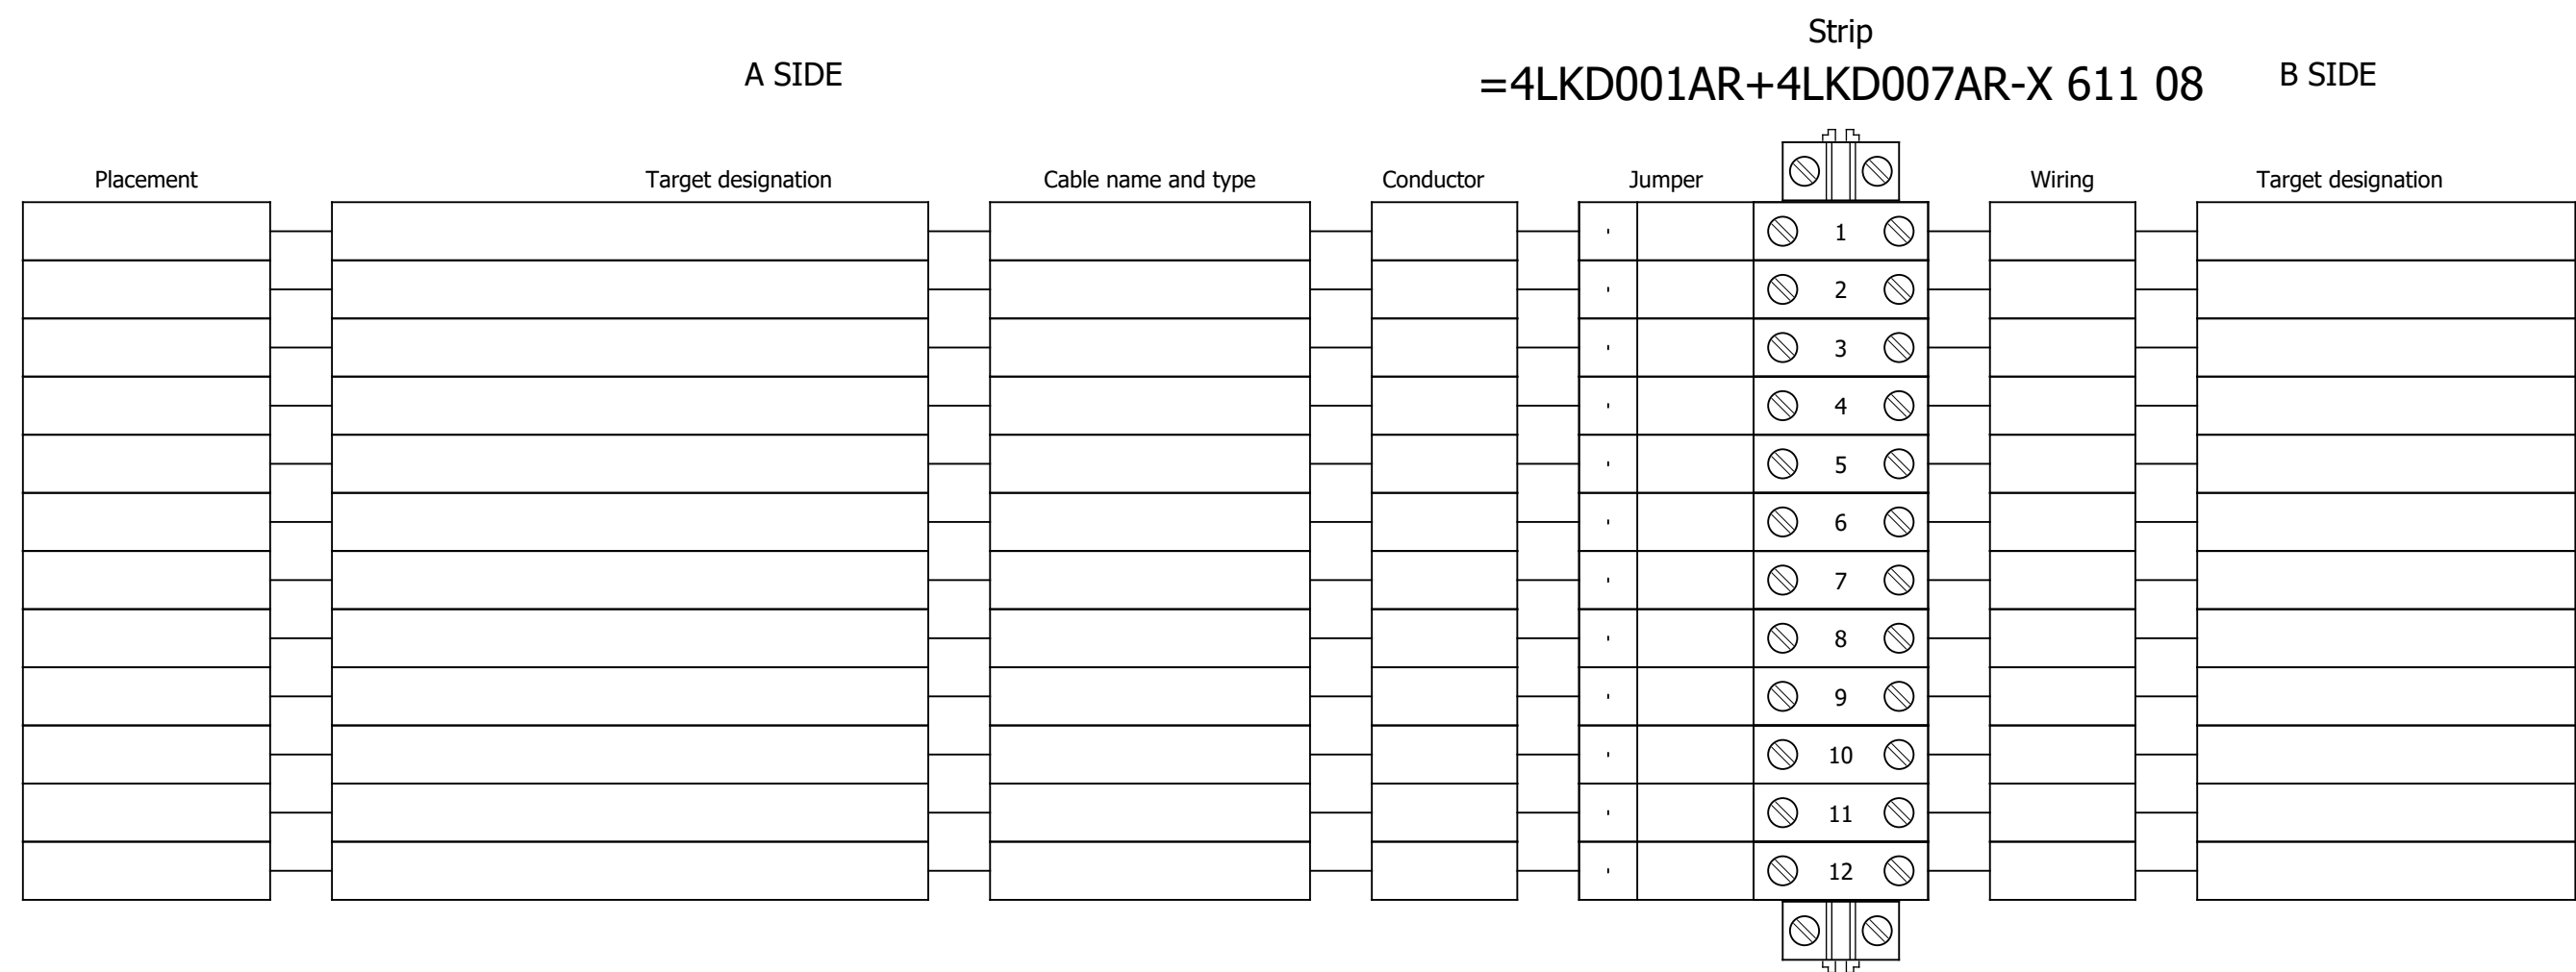

Terminal diagram

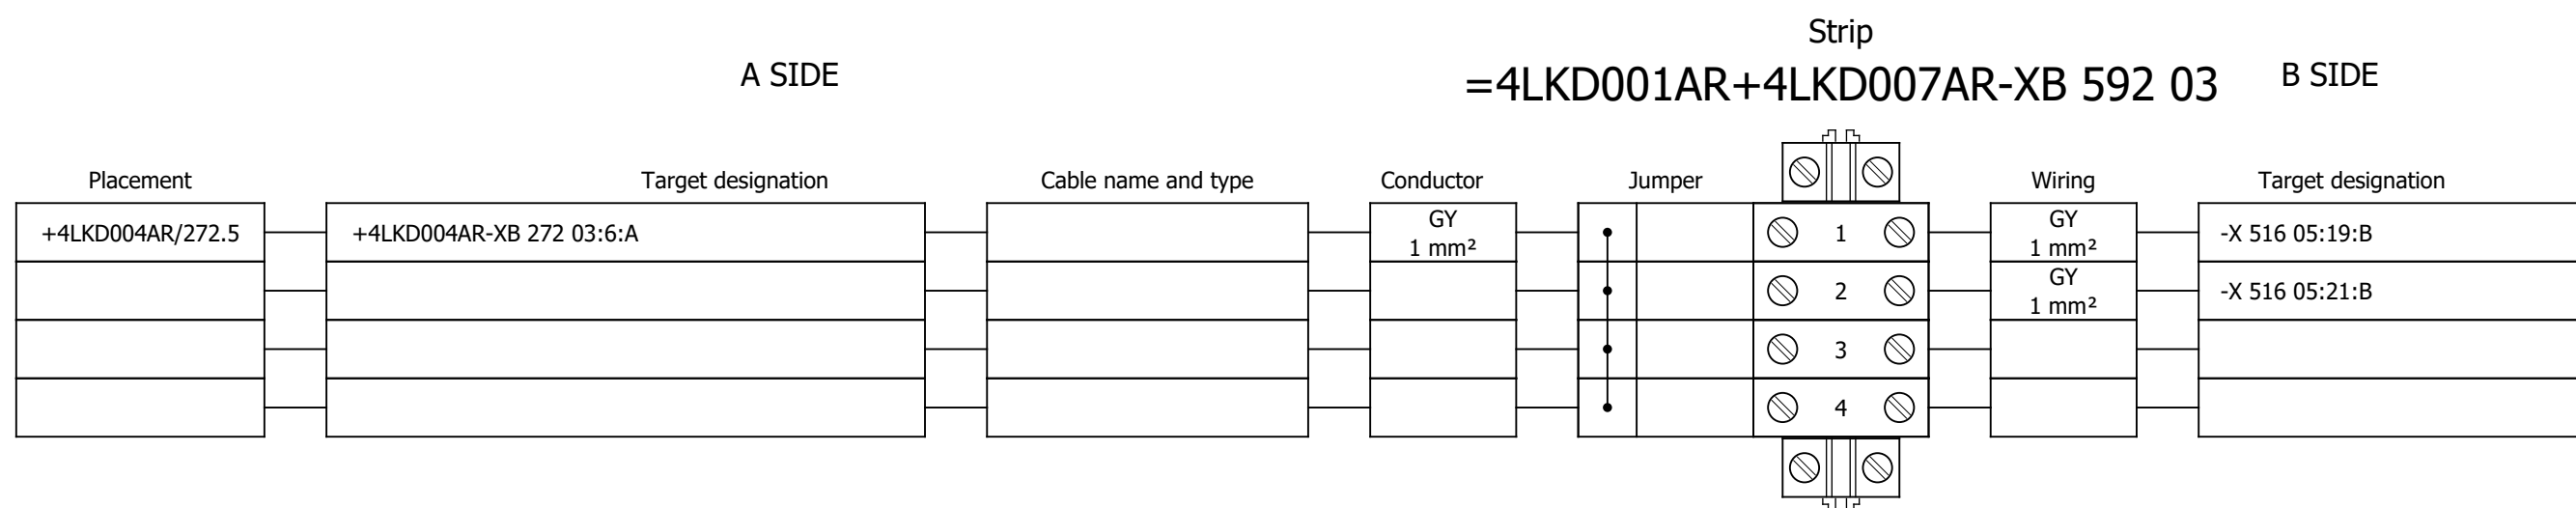

Terminal diagram

