THE NEAR SIDE - The Last 300 Metres • A0 Boards

The submitted area averages 1,188 m wide (594 m half-width); 99.98% lies within 650 m of the inferred spine. Near side 51.1%, seepage ring 34.1%, link ring 14.8%.

Criterion: any move claiming to bring AI into the city must first explain how it gets from the park edge to a door an ordinary person can reach. Three covenants: crossable - closable - countable

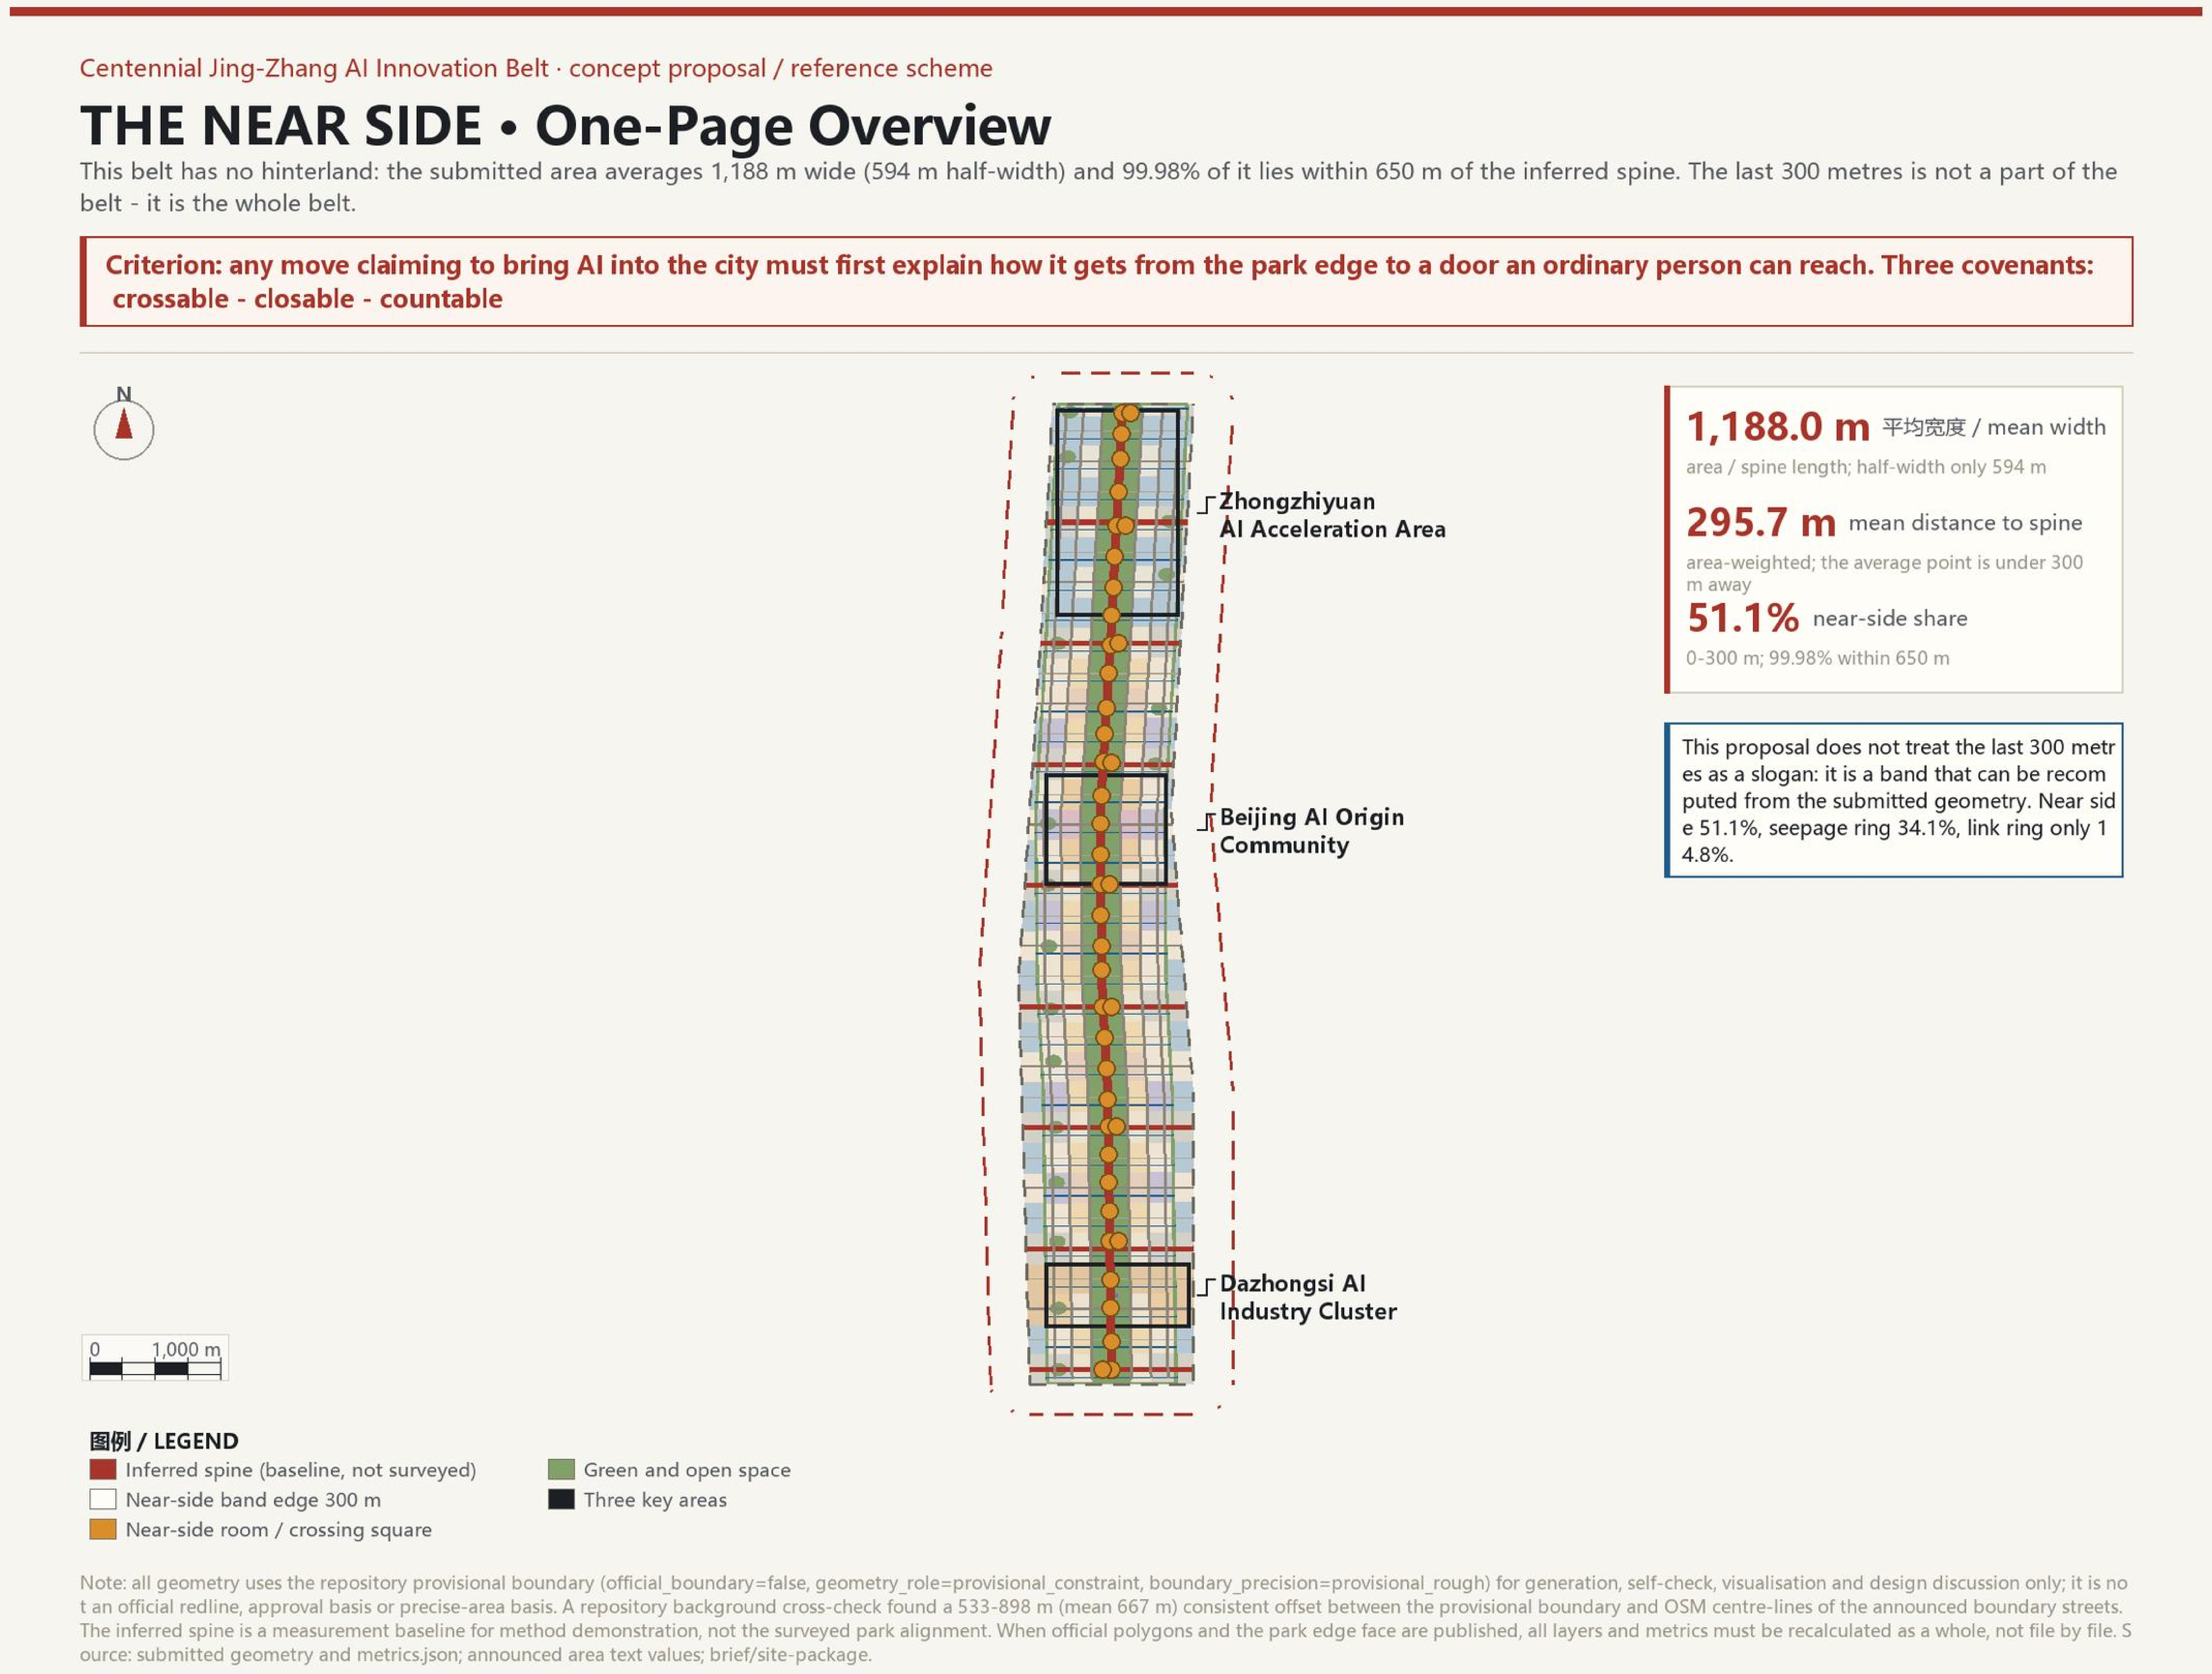

Fig. 1 One-page overview: three rings, inferred spine, 33 near-side units and three key areas

11.41 km2	30.5%	10.2%	100%
Site area (formal core metric)	Green ratio (formal core metric)	Public-space ratio (formal core metric)	24h passages covering near-side units (33/33)

Three Rings / 三环分带

Ring	Distance	Area	Share	Design action
Near side	0-300 m	583 ha	51.1%	33 near-side units; one 24h passage plus one near-side living room each
Seepage ring	300-500 m	389 ha	34.1%	Institute and community public interfaces; ground-floor frontage targets
Link ring	>500 m	169 ha	14.8%	Regional synergy interfaces; keep status quo, minimal intervention

Crossable
At least one 24h public passage in every near-side unit

Closable
Every AI scenario can be switched off; a human path remains

Countable
Every committed metric ships with a formula and can be recomputed

Public-interest commitments (extract)
24h passages cover 33/33 near-side units (100%); human fallback covers 8/12 AI scenarios (66.7%), the remaining 4 completed before phase 2.
A fully recalculated version ships within 30 days of the official boundary and park edge face being published.

Near-Side Unit Ledger (sample) / 近端单元台账样例

Unit	Location	Main obstacle	Proposed facility	Responsible role	Test
NU-01	Dazhongsi front	Detour to cross after exit	Crossing square + arrival hall	Operator / streets	Exit to ground floor <=5 min
NU-07	Retail edge	No ground-floor doors	Living room + AI wayfinding	Property / community	Frontage ratio >=75%
NU-13	Institute wall	Wall and gate control	Public interface + 24h path	Institute / streets	At least one 24h path

Unit	Location	Main obstacle	Proposed facility	Responsible role	Test
NU-19	Mixed block	Dead ends, kerb parking	Barrier-list priority repair	Streets / owners	Repair ratio >=60%
NU-27	Zhongzhiyuan test street	No controlled test site	Test reserve + test street	Committee / firms	Two consecutive audits passed
NU-33	Qinghe edge	Protective greenbelt closed	Linear public living room	Landscape / streets	Continuous accessible frontage

Note: all geometry uses the repository provisional boundary (official_boundary=false, geometry_role=provisional_constraint, boundary_precision=provisional_rough) for generation, self-check, visualisation and design discussion only; not an official redline, approval basis or precise-area basis. The inferred spine is a measurement baseline, not the surveyed park alignment. All layers and metrics are recalculated when official data is published.

Centennial Jing-Zhang AI Innovation Belt

THE NEAR SIDE - The Last 300 Metres • A0 Boards

The submitted area averages 1,188 m wide (594 m half-width); 99.98% lies within 650 m of the inferred spine. Near side 51.1%, seepage ring 34.1%, link ring 14.8%.

Criterion: any move claiming to bring AI into the city must first explain how it gets from the park edge to a door an ordinary person can reach. Three covenants: crossable - closable - countable

Centennial Jing-Zhang AI Innovation Belt · concept proposal / reference scheme

Land-Use Structure and the Three Rings

Land use is a complete partition of the submitted area (no gaps, no overlaps). The three rings are measured from the park edge face: near side 0-300 m, seepage ring 300-500 m, link ring beyond 500 m, each with its own renewal action and phasing.

Criterion: any move claiming to bring AI into the city must first explain how it gets from the park edge to a door an ordinary person can reach. Three covenants: crossable - closable - countable

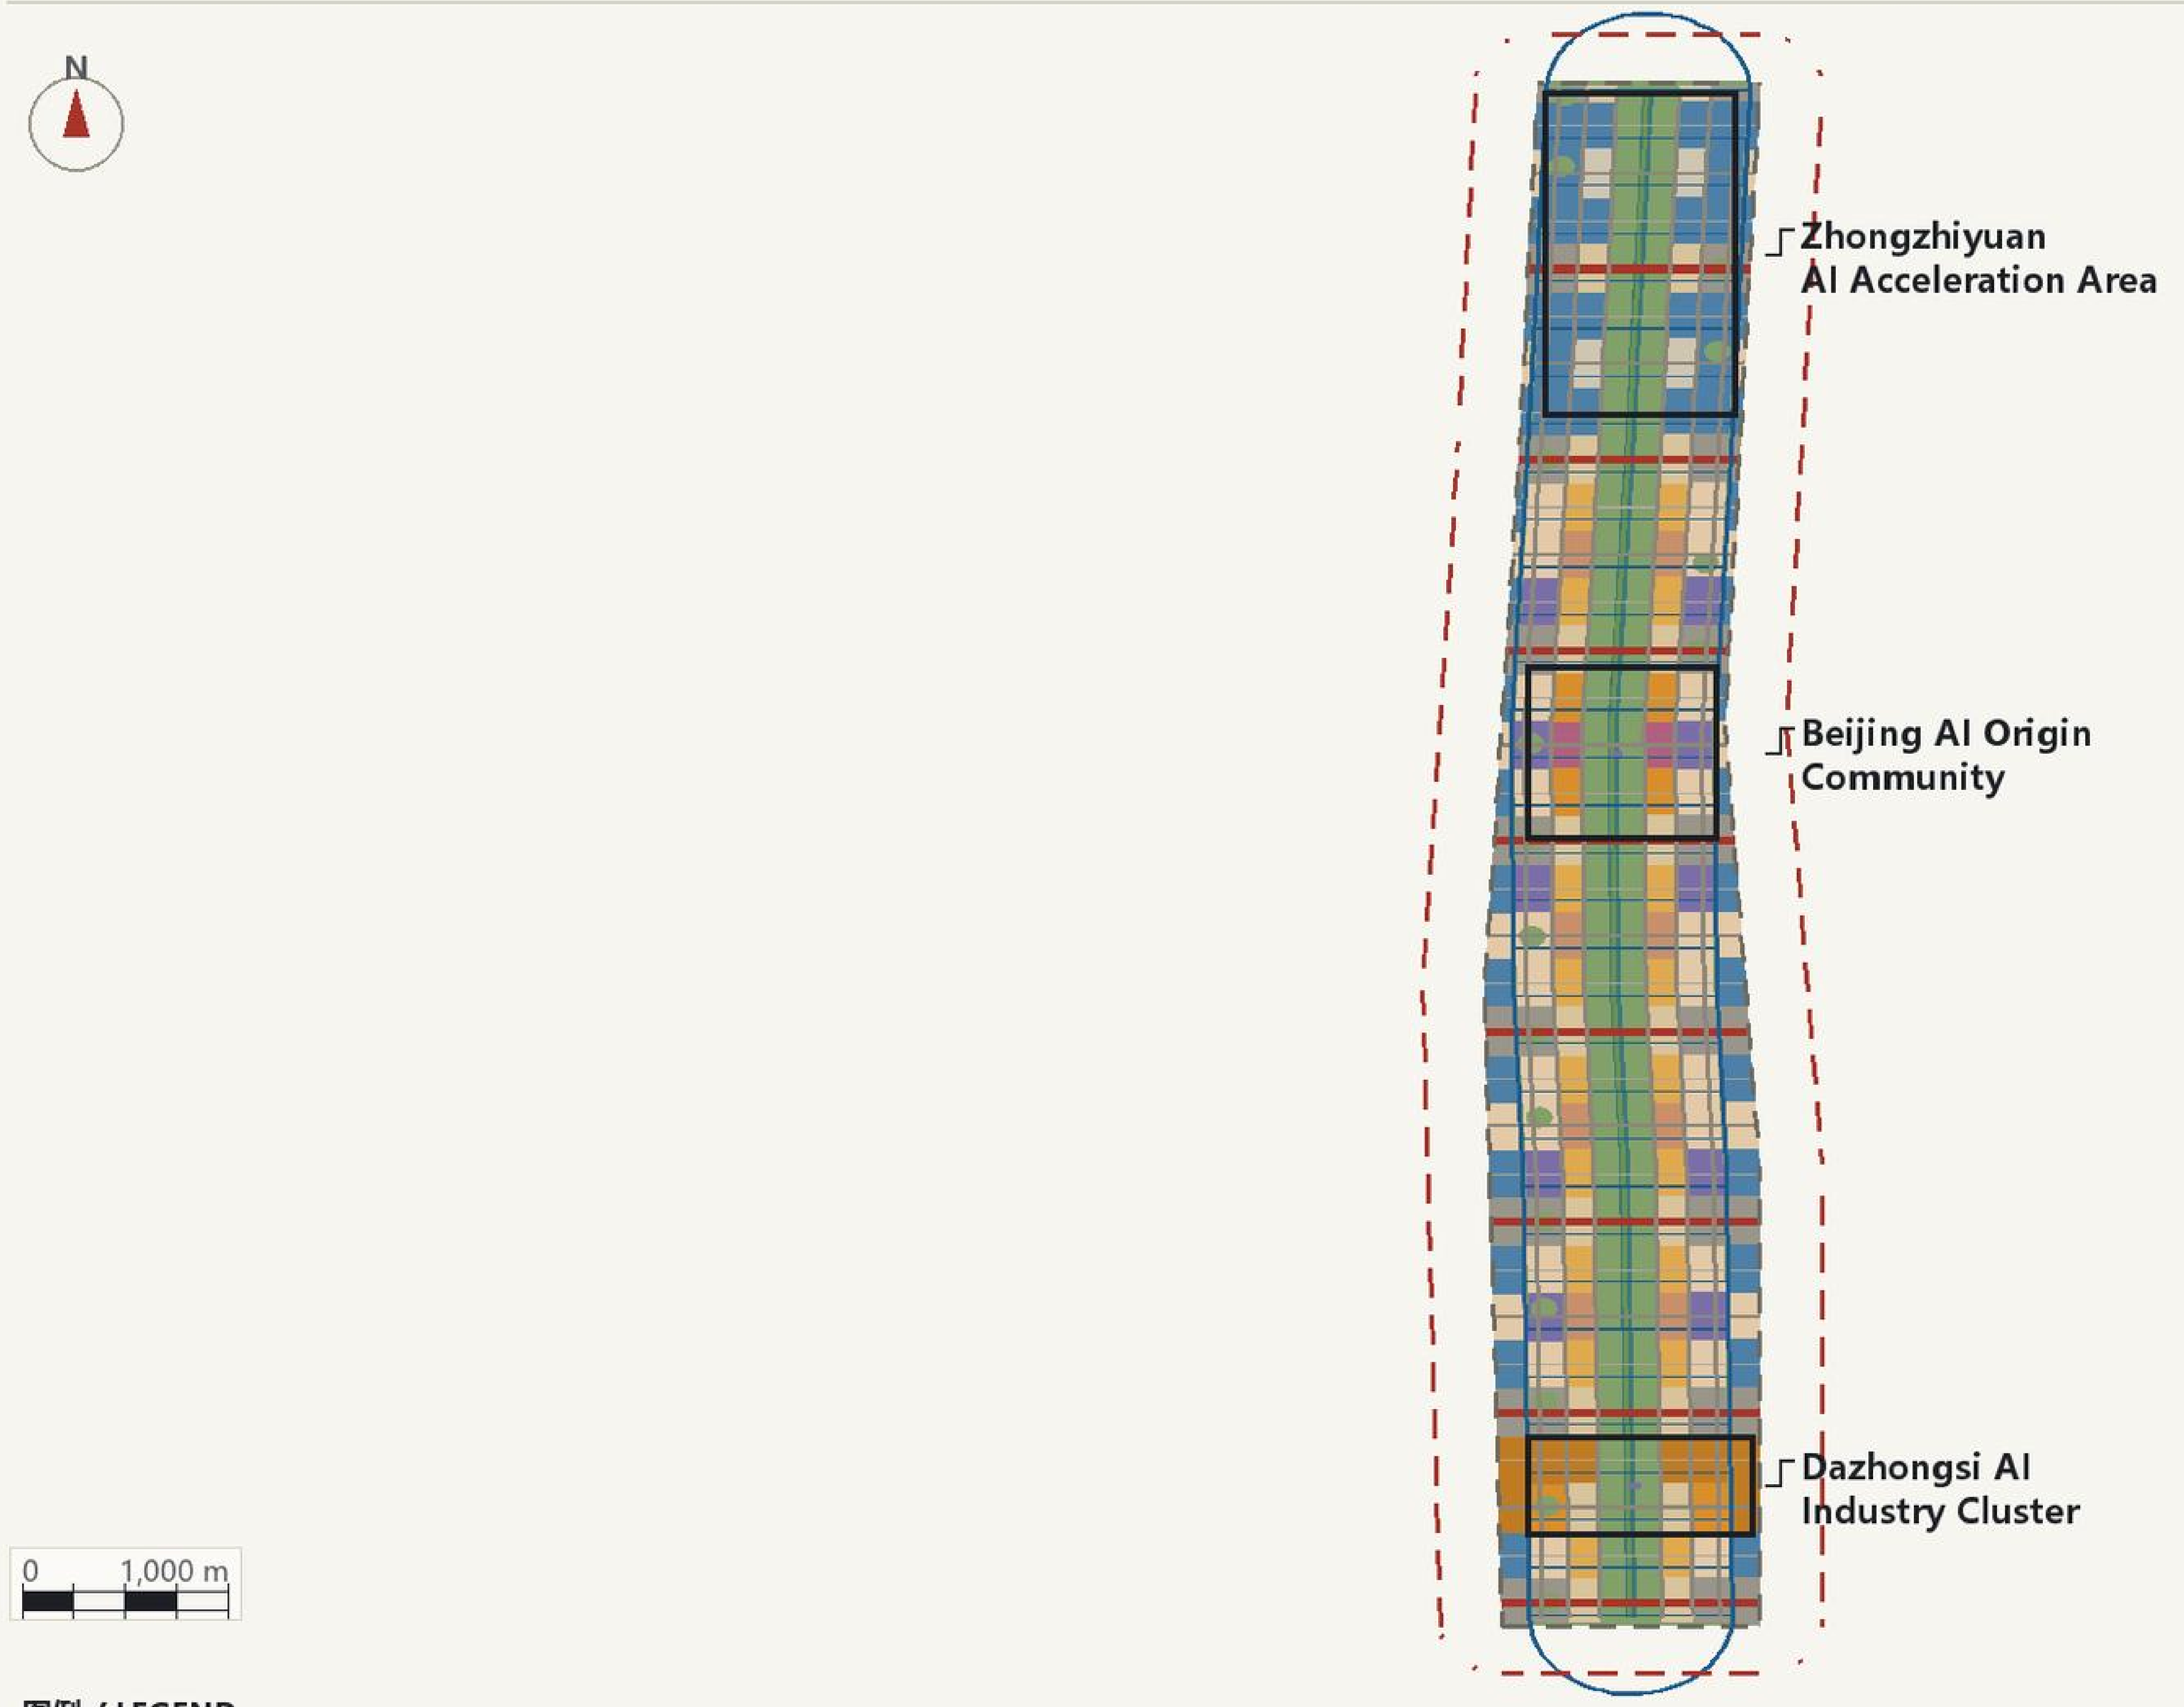

Land-use structure (share of submitted area)

1401 Park green	25.5%
0802 Research	16.0%
0701 Residential	14.5%
1207 Road	12.8%
1403 Square	7.4%
0904 Other commercial	7.1%
0804 Education	5.3%
0902 Business/finance	3.2%
0702 Community facility	3.2%
0901 Commercial	2.6%
16 Reserved	1.6%
0803 Cultural	0.8%

Near side 0-300 m	51.1%
Seepage 300-500 m	34.1%
Link >500 m	14.8%

图例 / LEGEND

Park green · Research · Residential · Road · Square · Other commercial · Education · Business/finance · Community facility · Commercial · Reserved · Cultural

Note: all geometry uses the repository provisional boundary (official_boundary=false, geometry_role=provisional_constraint, boundary_precision=provisional_rough) for generation, self-check, visualisation and design discussion only; it is not an official redline, approval basis or precise-area basis. A repository background cross-check found a 533-898 m (mean 667 m) consistent offset between the provisional boundary and OSM centre-lines of the announced boundary streets. The inferred spine is a measurement baseline for method demonstration, not the surveyed park alignment. When official polygons and the park edge face are published, all layers and metrics must be recalculated as a whole, not file by file. Source: submitted geometry and metrics.json; announced area text values; brief/site-package.

Centennial Jing-Zhang AI Innovation Belt · concept proposal / reference scheme

Detailed Design for the Three Key Areas

Each key area solves one kind of 'last 300 metres': the north reserves interfaces in new development, the middle opens institute walls, the south completes the last stretch from the transit station to the destination.

Criterion: any move claiming to bring AI into the city must first explain how it gets from the park edge to a door an ordinary person can reach. Three covenants: crossable - closable - countable

Zhongzhiyuan AI Acceleration Area Announced ~192.1 ha

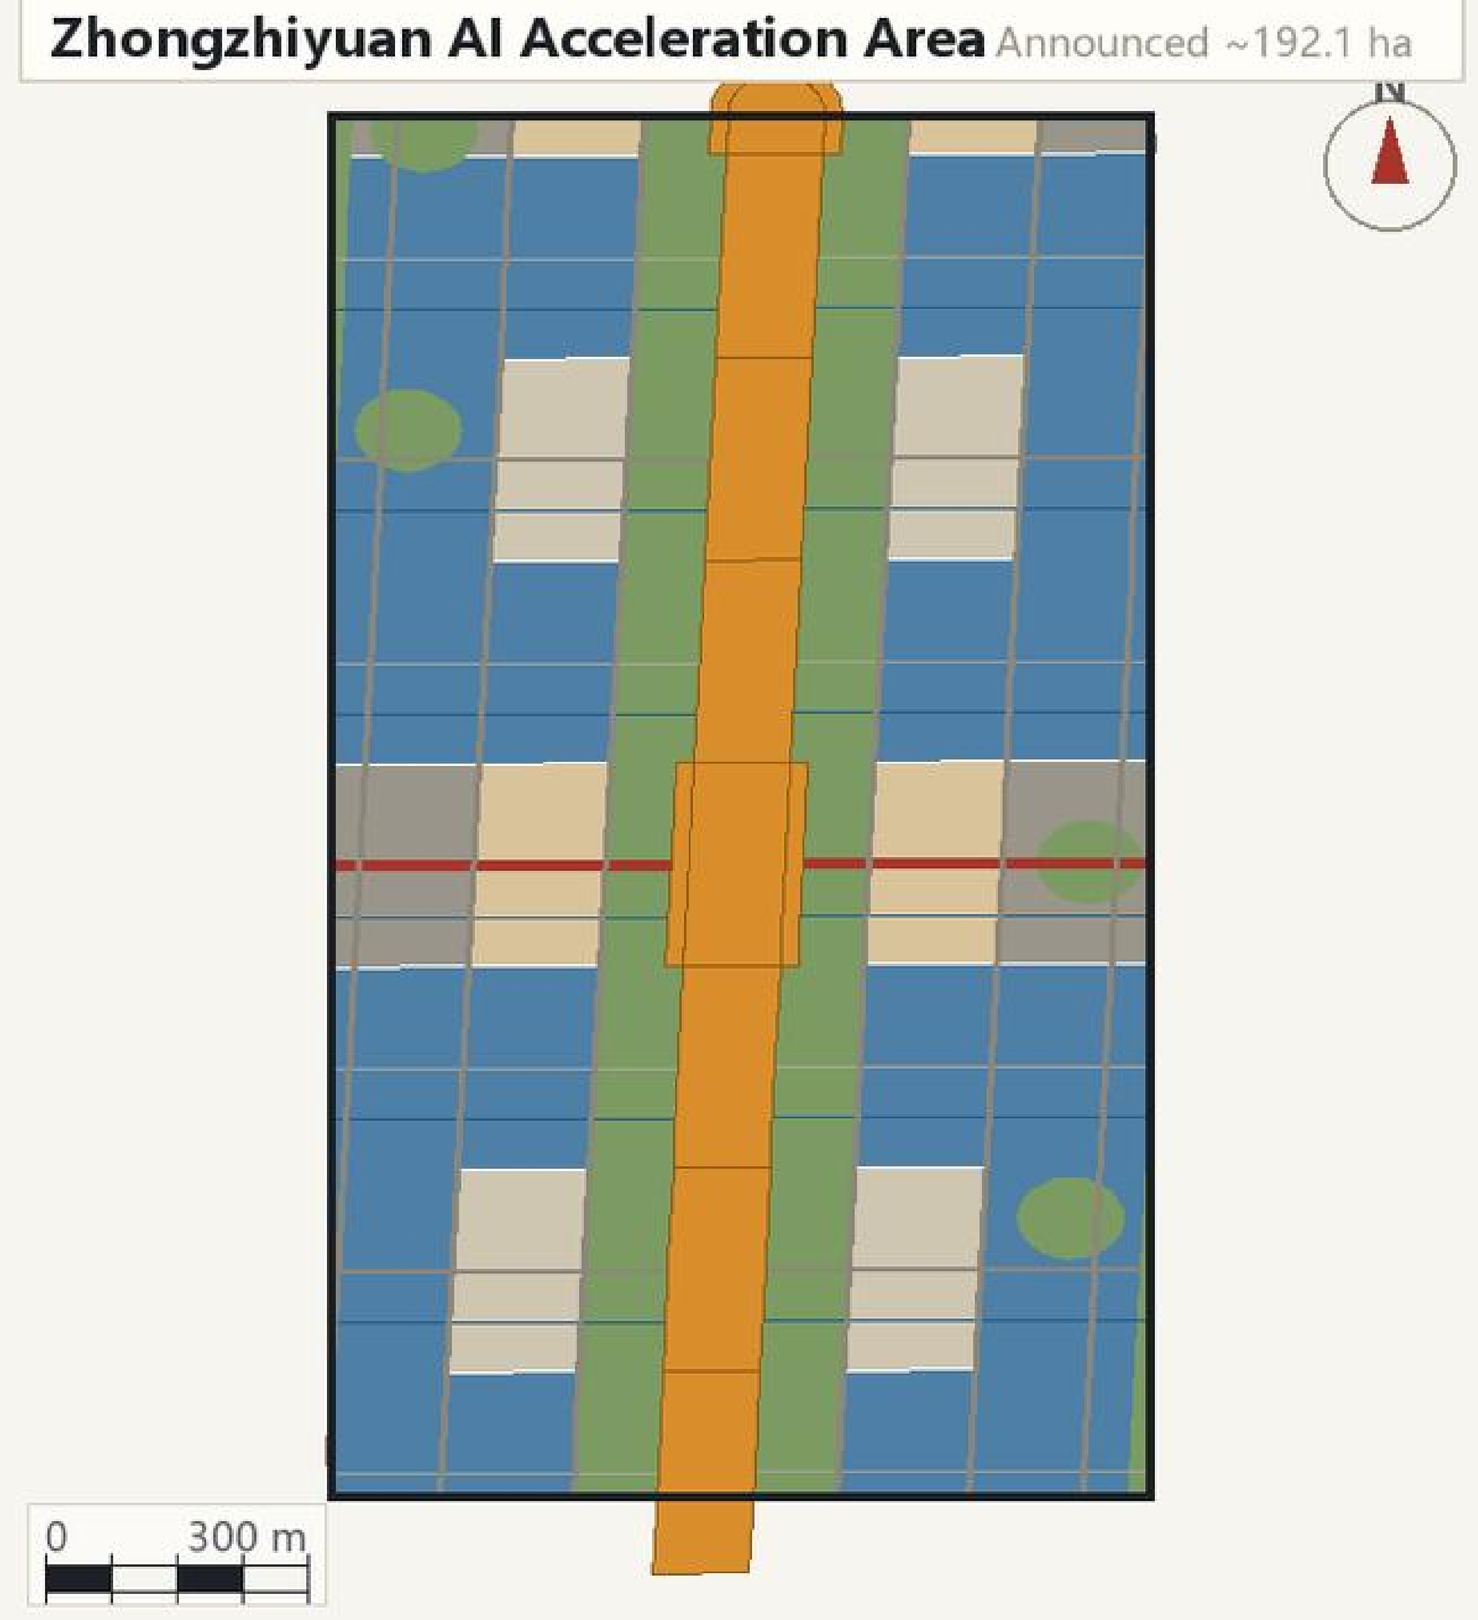

Beijing AI Origin Community Announced ~104.3 ha

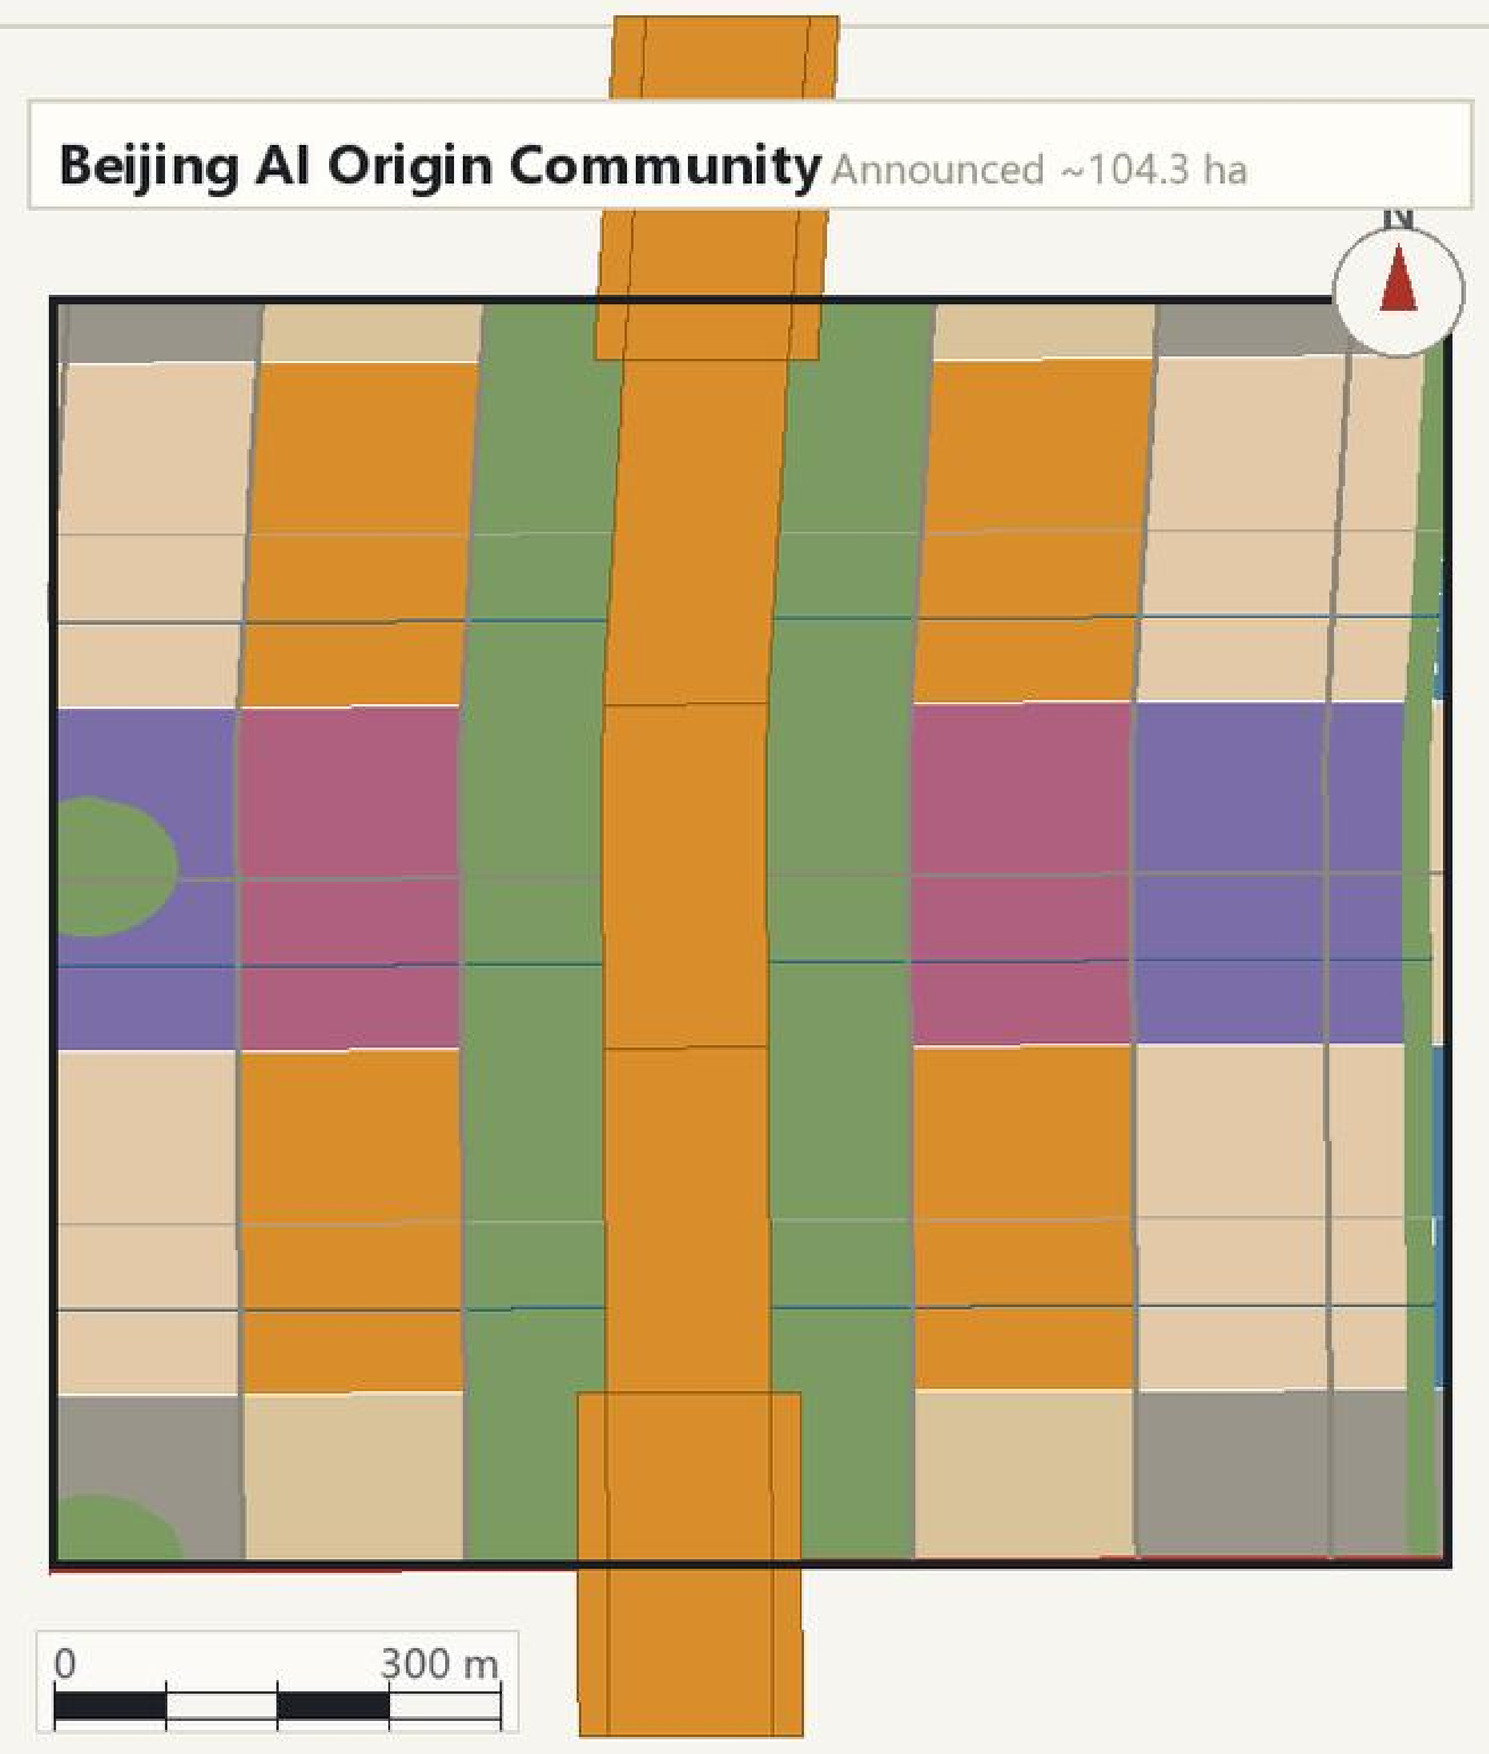

Dazhongsi AI Industry Cluster Announced ~72.0 ha

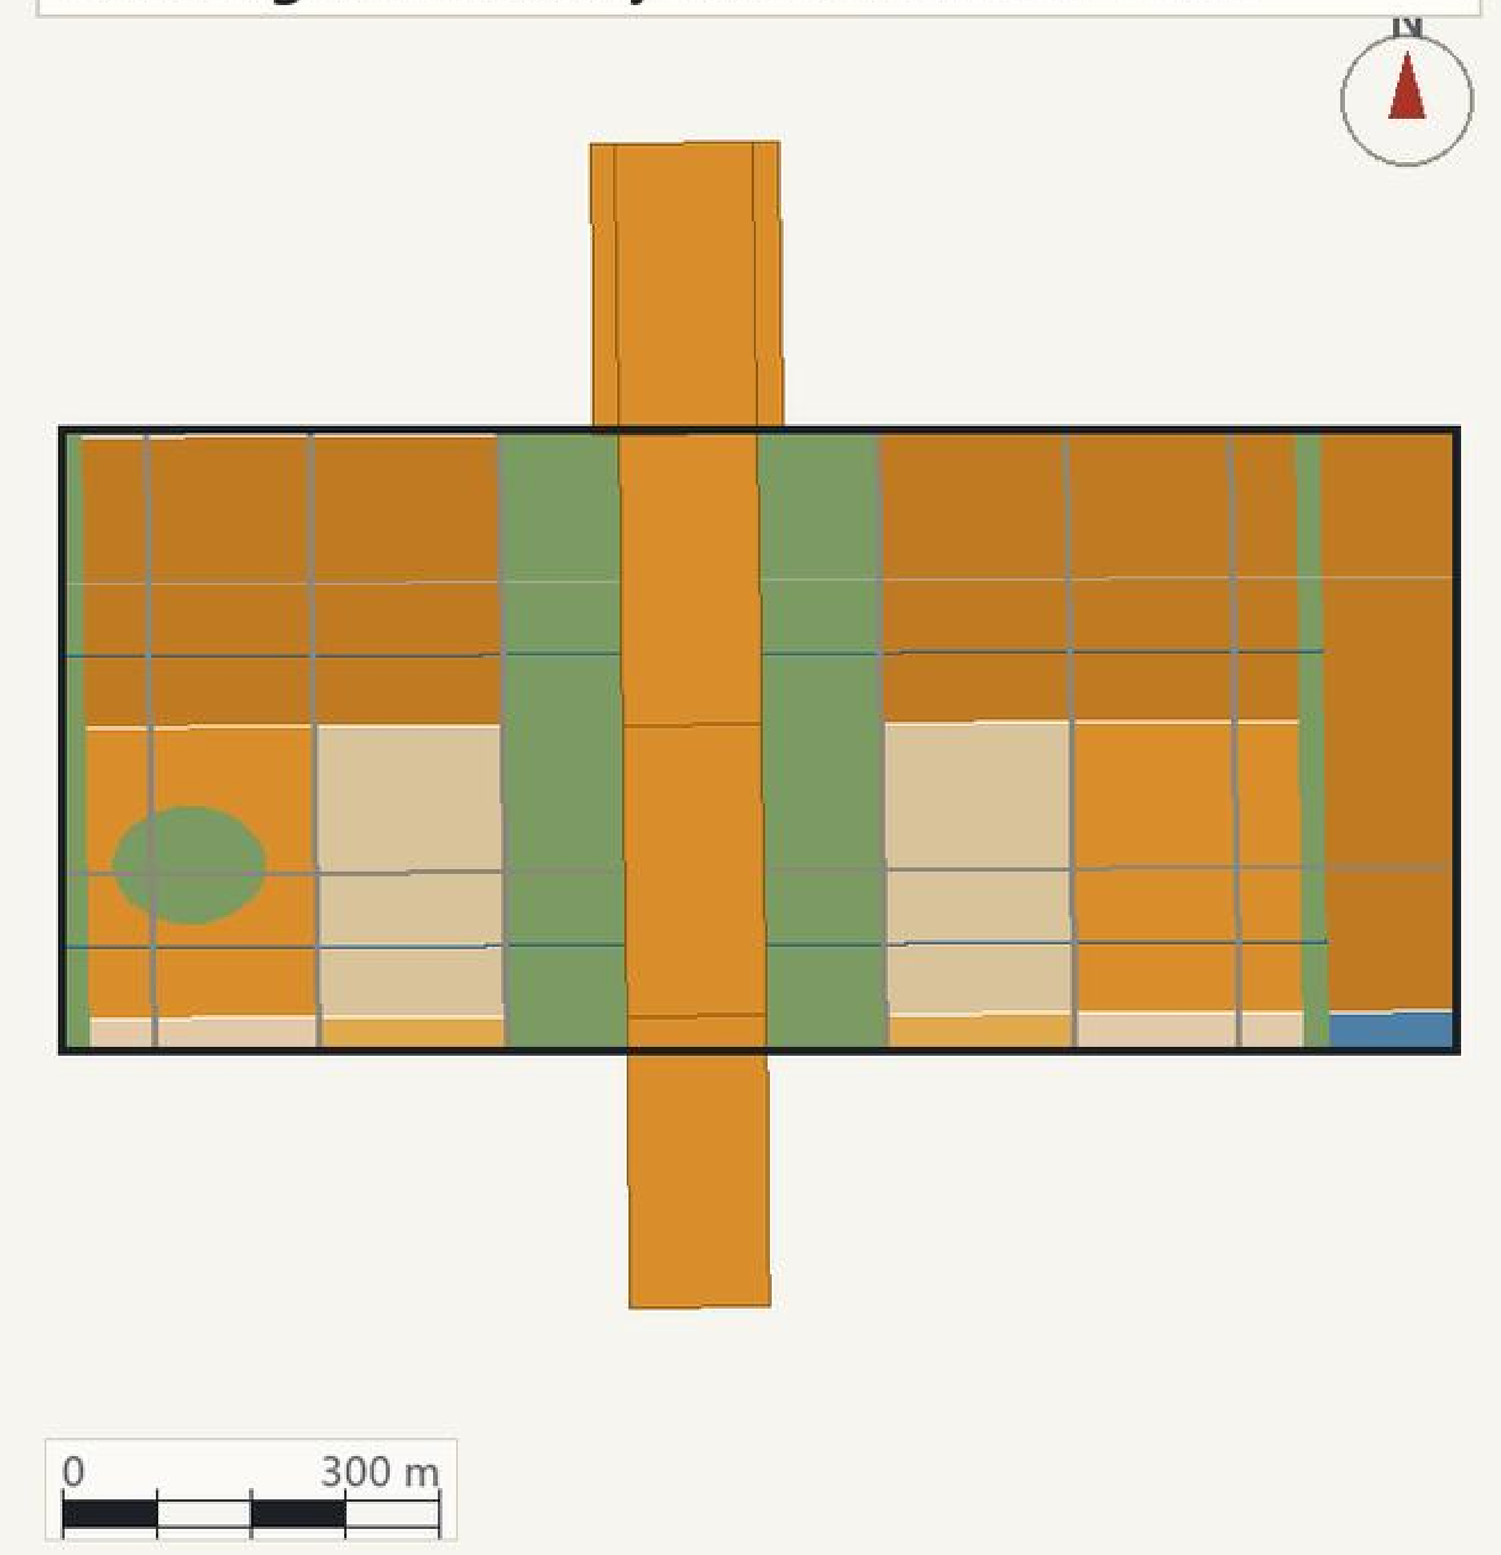

North • reserve the interfaces first

· A predominantly new-build key area. 18.0 ha of reserved land inside the 0-300 m near-side band hosts controlled validation of low-speed shuttles, delivery robots and smart fixtures.

· Near-side units NU-27 to NU-33: one near-side room and one 24-hour public passage each.

· Sequence: fix the park edge face, then the interface ledger, then the parcels. Never reversed.

Middle • turn institute walls into countable doors

· A predominantly existing-fabric key area. The move is not new construction but adding crossable, closable and countable public interfaces onto existing walls and compound edges.

· Near-side units NU-13 to NU-20: ground-floor frontage targets and an obstacle list per unit.

· Deliverable: a 'last-300-metre obstacle ledger' itemising walls, gates, dead ends, kerbside parking and accessibility breaks.

South • finish the last stretch from the station

· A transit-station and business cluster. Here the last 300 metres takes a concrete shape: exit the station, cross the street, enter the square, reach the ground floor.

· Near-side units NU-01 to NU-06: business and commercial near-side frontage with crossing squares.

· Move: no grand engineering - close the breaks in four path segments and name a responsible role for each.

图例 / LEGEND

Green · Near-side room / crossing square · Research · Residential · Commercial/business · Education · Reserved · Road

Note: all geometry uses the repository provisional boundary (official_boundary=false, geometry_role=provisional_constraint, boundary_precision=provisional_rough) for generation, self-check, visualisation and design discussion only; it is not an official redline, approval basis or precise-area basis. A repository background cross-check found a 533-898 m (mean 667 m) consistent offset between the provisional boundary and OSM centre-lines of the announced boundary streets. The inferred spine is a measurement baseline for method demonstration, not the surveyed park alignment. When official polygons and the park edge face are published, all layers and metrics must be recalculated as a whole, not file by file. Source: submitted geometry and metrics.json; announced area text values; brief/site-package.

Fig. 2 Land use and three rings: a complete partition with no gaps and no overlaps

· The partition has no gaps and no overlaps: 139 parcels cover 100% of the submitted area

· Park green is the largest single use at 291.5 ha (25.5%); 18.0 ha of reserve land hosts controlled tests

· Three rings: near side 51.1%, seepage ring 34.1%, link ring 14.8%

Fig. 3 Three key areas: reserve interfaces north, open gates mid, reach the ground floor south

· North, Zhongzhiyuan 192.9 ha: reserve interfaces - fix the park edge face, then the interface list, then parcels

· Middle, AI Origin Community 104.3 ha: add crossable, closable, countable doors onto existing walls

· South, Dazhongsi 72.0 ha: exit, cross, enter the square, reach the ground floor - close every break

Note: all geometry uses the repository provisional boundary (official_boundary=false, geometry_role=provisional_constraint, boundary_precision=provisional_rough) for generation, self-check, visualisation and design discussion only; not an official redline, approval basis or precise-area basis. The inferred spine is a measurement baseline, not the surveyed park alignment. All layers and metrics are recalculated when official data is published.

Centennial Jing-Zhang AI Innovation Belt

THE NEAR SIDE - The Last 300 Metres • A0 Boards

The submitted area averages 1,188 m wide (594 m half-width); 99.98% lies within 650 m of the inferred spine. Near side 51.1%, seepage ring 34.1%, link ring 14.8%.

Criterion: any move claiming to bring AI into the city must first explain how it gets from the park edge to a door an ordinary person can reach. Three covenants: crossable - closable - countable

Centennial Jing-Zhang AI Innovation Belt · concept proposal / reference scheme

Mobility, Blue-Green Network and the Near-Side Section

Design road-network density 12.93 km/km2, a 9,608 m continuous green spine, 42 public interface points and 33 near-side units. The section breaks the last 300 metres into five measurable bands.

Criterion: any move claiming to bring AI into the city must first explain how it gets from the park edge to a door an ordinary person can reach. Three covenants: crossable - closable - countable

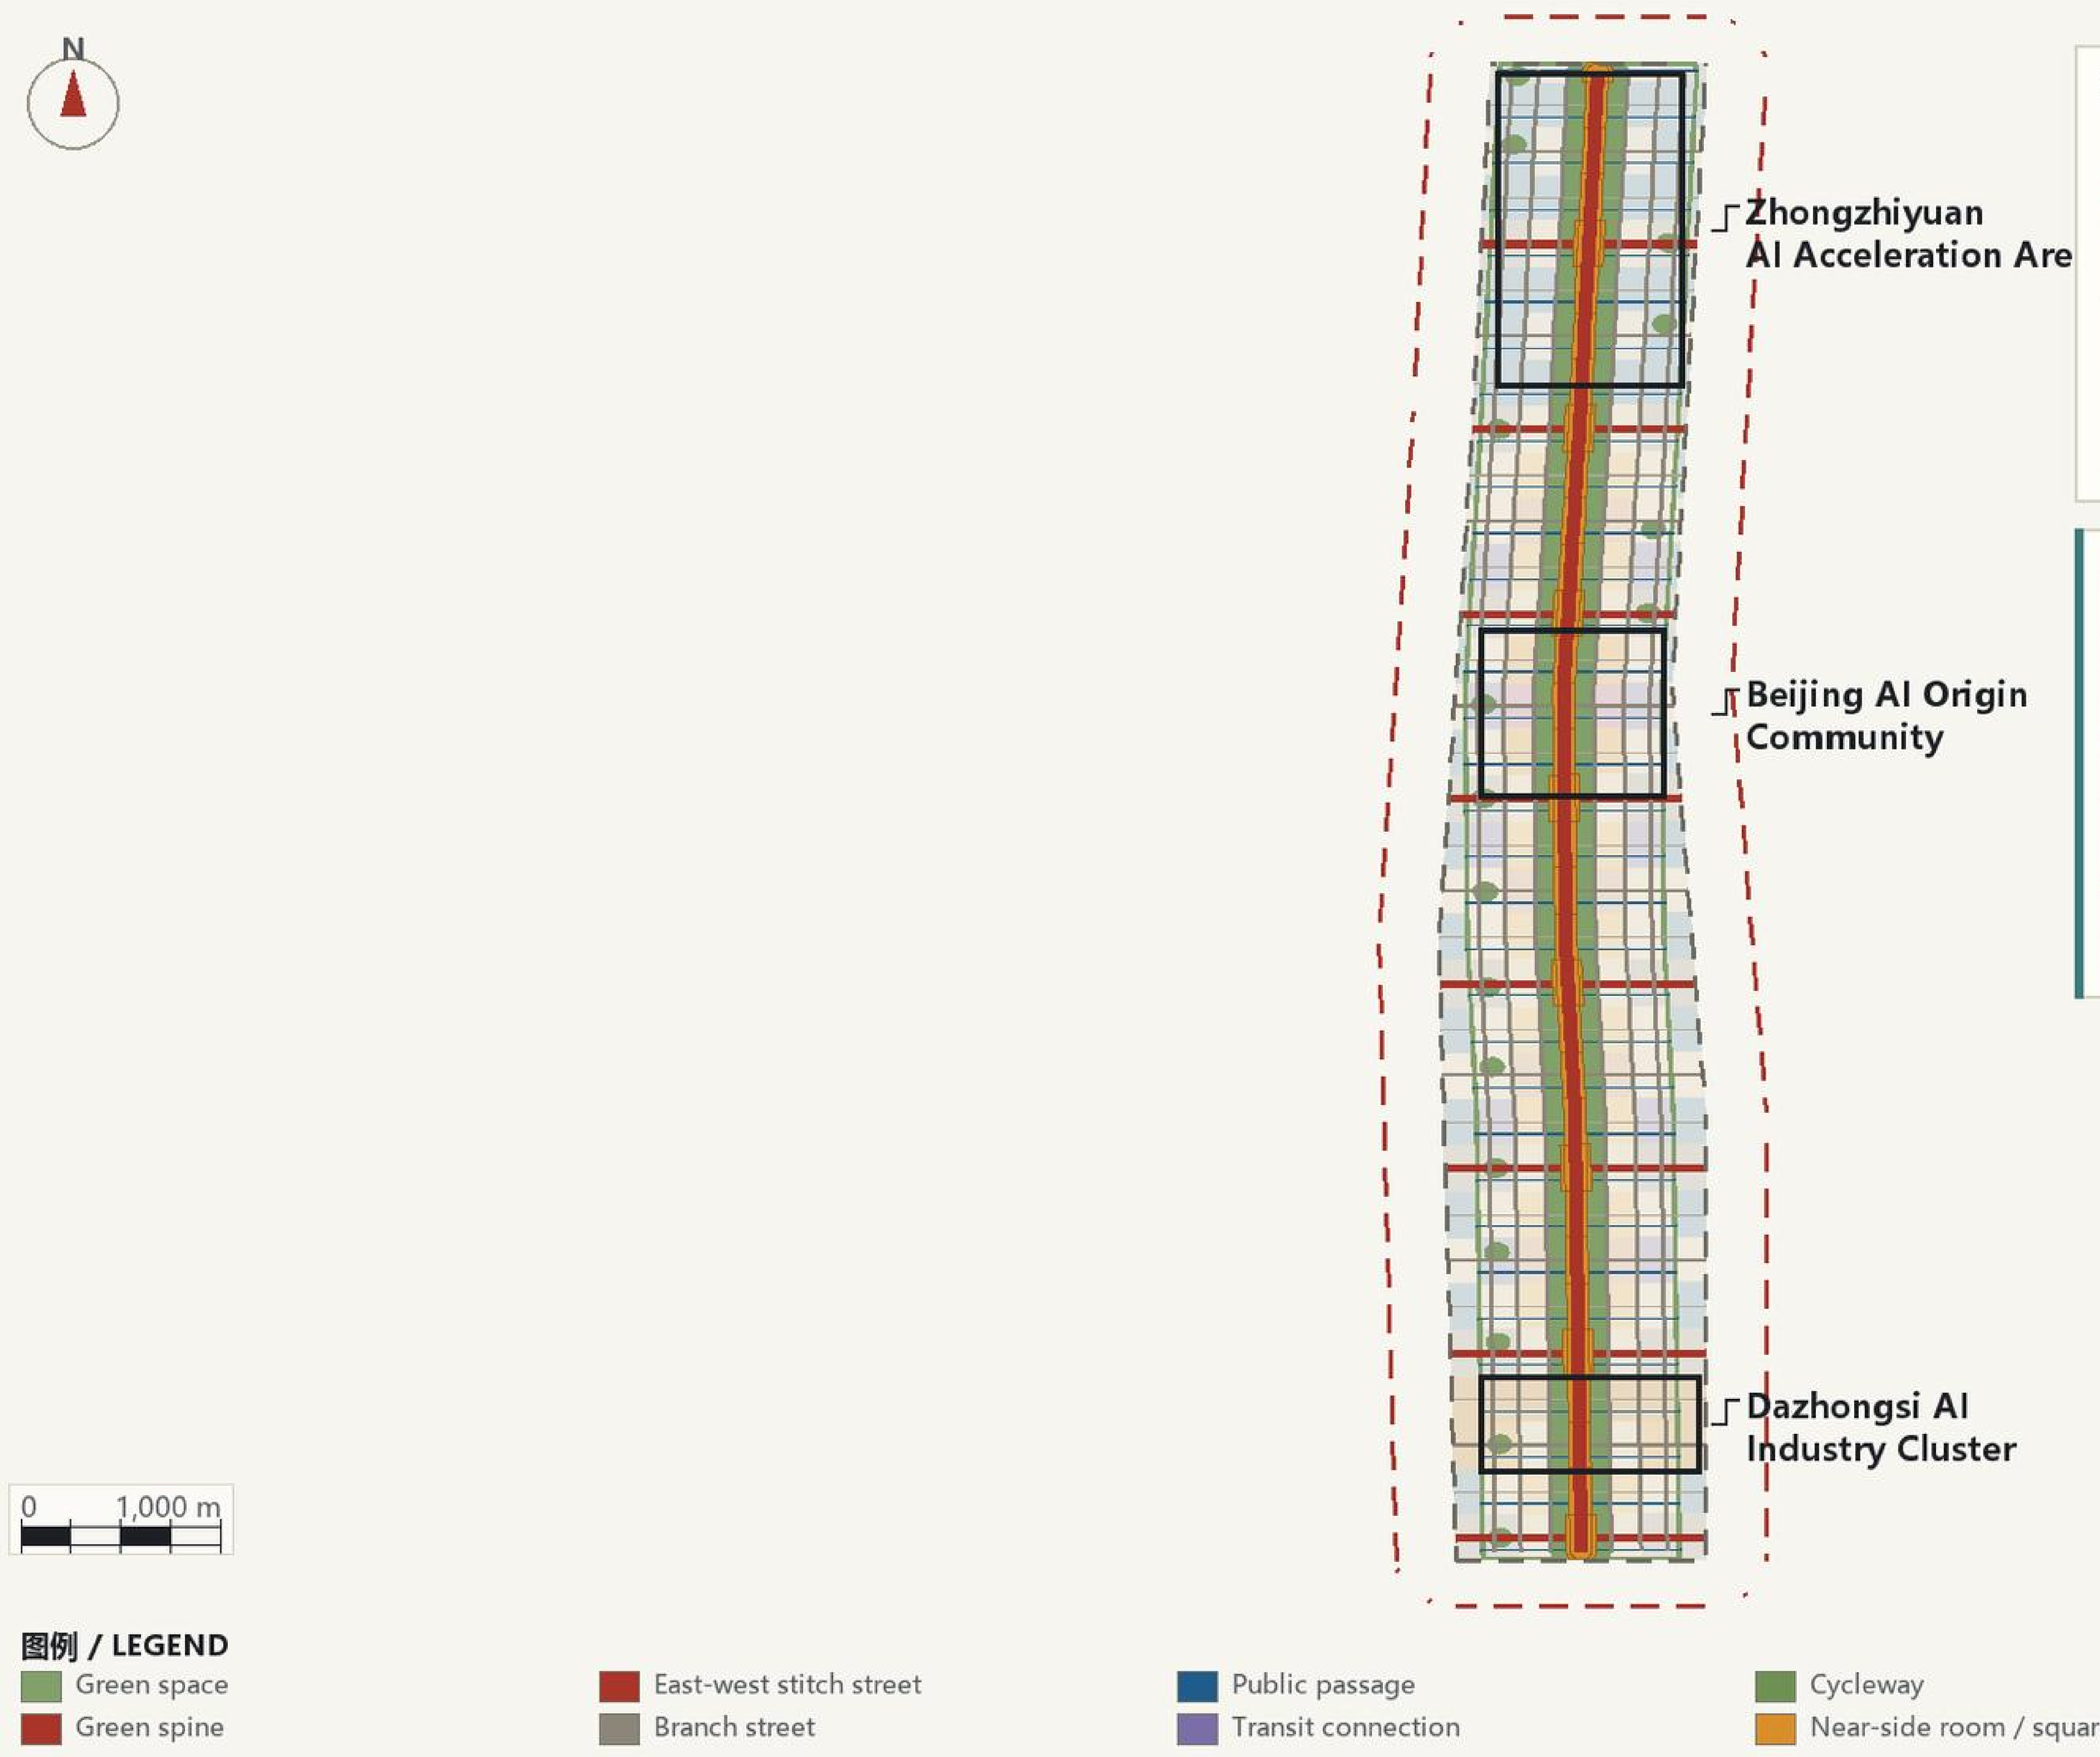

Near-side section: how the last 300 m is measured

Half-width 594 m: the average walk from spine to edge

12.93 km/km2 Road density
Design network incl. greenways and public passages

9.6 km Green spine length
Inferred alignment, not surveyed

42 Public interfaces
33 near-side rooms + 9 crossing squares

Note: all geometry uses the repository provisional boundary (official_boundary=false, geometry_role=provisional_constraint, boundary_precision=provisional_rough) for generation, self-check, visualisation and design discussion only; it is not an official redline, approval basis or precise-area basis. A repository background cross-check found a 533-898 m (mean 667 m) consistent offset between the provisional boundary and OSM centre-lines of the announced boundary streets. The inferred spine is a measurement baseline for method demonstration, not the surveyed park alignment. When official polygons and the park edge face are published, all layers and metrics must be recalculated as a whole, not file by file. Source: submitted geometry and metrics.json; announced area text values; brief/site-package.

Fig. 4 Mobility, blue-green and near-side section: the last 300 m split into five measurable bands

- Design network density 12.9 km/km2, of which 8.4 km/km2 carries vehicles
- 9.6 km green spine, 42 public interfaces, 33 near-side units
- The last 300 m is split into five measurable bands; the belt's half-width is only 594 m

Centennial Jing-Zhang AI Innovation Belt · concept proposal / reference scheme

Core Metric Recalculation and Evidence Chain

The three formal core visual metrics are recomputed from the submitted site_boundary, green_space and public_space geometry and match the numeric values declared in visual/index.html; metrics that depend on unpublished controls are recorded as pending official data.

Criterion: any move claiming to bring AI into the city must first explain how it gets from the park edge to a door an ordinary person can reach. Three covenants: crossable - closable - countable

Submitted site area
11.41 km2
metric: site_area_sqm
Announced ~11.4 km2; recomputed here 11.4128 km2

Green ratio
30.51%
metric: green_ratio
Green spine + pocket parks + tree-lined buffer

Public-space ratio
10.24%
metric: public_space_ratio
33 near-side rooms + 9 crossing squares

Recomputable metrics (all recalculated from geometry/ and metrics.json)

site_area_sqm	1,141.3	ha	known	recomputed from submitted boundary
green_ratio	30.5%	ratio	known	green_space / site_area
public_space_ratio	10.2%	ratio	known	public_space / site_area
building_footprint_area_sqm	197.8	ha	known	concept massing, low confidence
road_network_density_km_per_sqkm	12.9	km/km²	known	total design centreline / area
near_unit_count	33	count	known	one per 300 m
mean_distance_to_spine_m	295.7	m	known	area-weighted
share_within_300m	51.1%	ratio	known	near-side share
equivalent_access_coverage_ratio	100.0%	ratio	known	units with a 24h passage / total units
human_fallback_scenario_ratio	66.7%	ratio	known	cards with a human-review node / cards = 8 / 12
floor_area_ratio	pending	ratio	unknown	controls not public; pending official data
building_height_m	pending	m	unknown	controls not public; pending official data

Evidence chain: from public sources to recomputable conclusions

1. Source grading (source_registry)
2. Official/provisional boundary -> site_boundary
3. Layer generation geometry/*.geojson
4. EPSG:4548 recalculation -> metrics.json
5. Three matrices -> six agent tasks
6. Four gates -> figures and HTML

Wherever a step depends on unpublished material, the conclusion is demoted to background or provision

Precision warning: all geometry rests on the repository provisional boundary. Missing organiser polygons do not block content scoring, but this package does not claim its areas equal official precise areas. Everything is recalculated once official data is published.

Note: all geometry uses the repository provisional boundary (official_boundary=false, geometry_role=provisional_constraint, boundary_precision=provisional_rough) for generation, self-check, visualisation and design discussion only; it is not an official redline, approval basis or precise-area basis. A repository background cross-check found a 533-898 m (mean 667 m) consistent offset between the provisional boundary and OSM centre-lines of the announced boundary streets. The inferred spine is a measurement baseline for method demonstration, not the surveyed park alignment. When official polygons and the park edge face are published, all layers and metrics must be recalculated as a whole, not file by file. Source: submitted geometry and metrics.json; announced area text values; brief/site-package.

Fig. 5 Core metric recalculation and evidence chain

- The three formal core metrics are recomputed from the submitted geometry in EPSG:4548
- Every recomputable metric ships with a formula, source files and status
- Metrics depending on unpublished controls stay unknown rather than posing as known

Note: all geometry uses the repository provisional boundary (official_boundary=false, geometry_role=provisional_constraint, boundary_precision=provisional_rough) for generation, self-check, visualisation and design discussion only; not an official redline, approval basis or precise-area basis. The inferred spine is a measurement baseline, not the surveyed park alignment. All layers and metrics are recalculated when official data is published.