Releasing your creativity

STM32F3 series
Mainstream 32-bit MCUs

STM32 F3

Content

F3 inside STM32 family

By choosing one of ST's microcontrollers for your embedded application, you gain from our leading expertise in MCU architecture, technology, multi-source manufacturing and long-term supply.

The STM32® portfolio offers an extraordinary variety of options, now including ARM® Cortex®-M cores (M0, M0+, M3, M4 and M7), giving developers flexibility to find the perfect STM32 for their applications. Particular attention is paid to accommodate porting of applications from one device to another. The binary compatibility combined with the similar pinout assignment, hardware IPs proliferation and higher level programming language makes the development job far more convenient when dealing with the STM32 families.

9 PRODUCT SERIES - MORE THAN 30 PRODUCT LINES
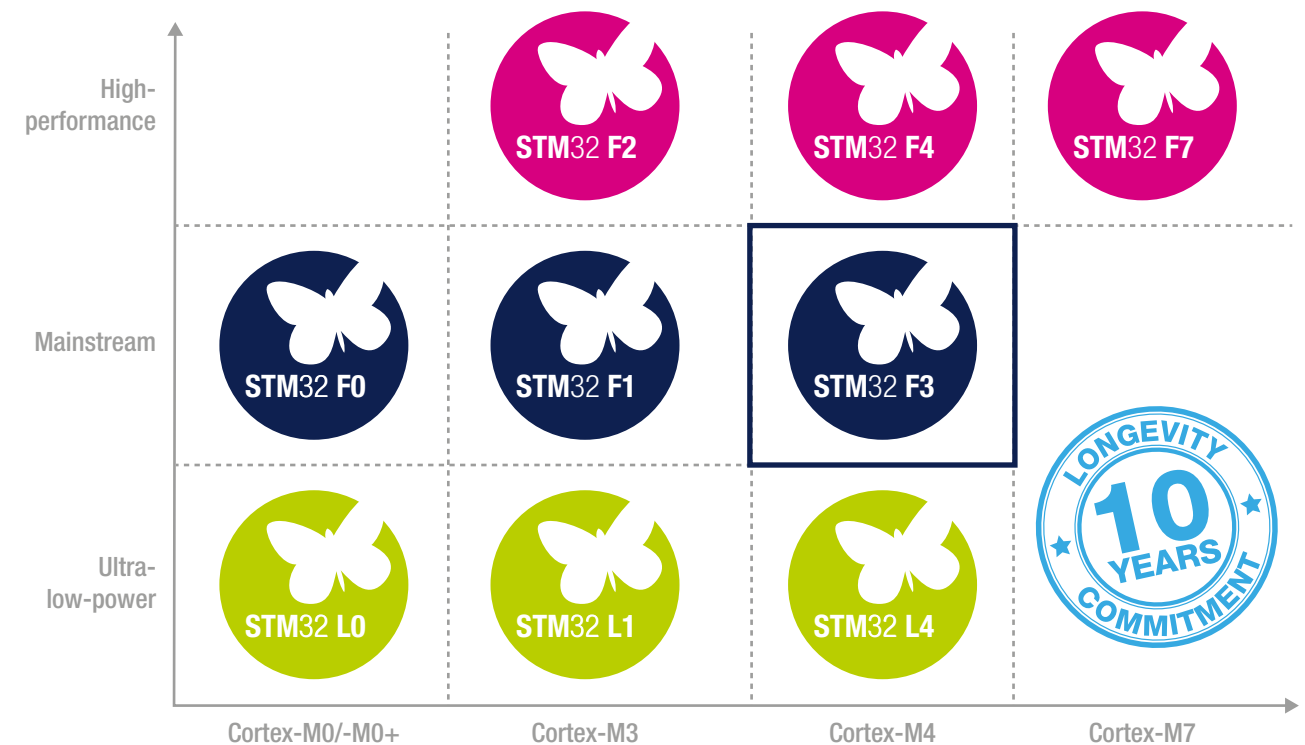
The Mainstream family addresses a large variety of needs found in general-purpose applications.

The STM32 portfolio offers the possibility to boost the performance with more MIPS or better ultra-low power specifications than other microcontroller families. The STM32F3 series is the upgraded class in the Mainstream family thanks to the powerful Cortex-M4 core combined with its advanced digital and analog peripheral set.

The pin compatibility between STM32F1, F0 and F3 series makes navigation across the board extremely convenient

The F3 series extends the scope of ST's STM32 family by allowing designers to tackle mixed-signal control applications. The STM32 F3 series is optimized for efficient handling and processing of mixed signals in applications such as three-phase motor controls, biometrics and industrial sensors, sonars and audio as well as digital power applications including power supplies, lighting, and welding.

3

STM32F3 key benefits

MAIN FEATURES AND BENEFITS

Features	Benefits
Performance and architecture • 72 MHz / 63 DMIPS (from Flash) or 90 DMIPS (from CCM-SRAM) • ARM® Cortex®-M4 with single cycle DSP MAC and floating point unit (FPU) • Routine Booster (CCM-SRAM for Core Coupled Memory-SRAM: SRAM mapped to the instruction bus • SRAM with parity bit • Memory Protection Unit (MPU) • Embedded Trace Macrocell (ETM) • Interconnect matrix • DMA controllers • Flexible Static Memory Controller (FSMC)	• Boosted execution of control algorithms • Better code efficiency • Fast time to market • Elimination of scaling and saturation • More performance for critical routines with zero wait state execution from safe CCM-SRAM • 100% deterministic execution from CCM-SRAM • Data and code reliability • Advanced debug functions • Peripheral connection flexibility and code size reduction • Large set of external memory accessible up to 36 MHz giving more flexibility • No code size limit
Outstanding power efficiency • Stop mode down to 6.7 µA (typ.) • RTC down to 0.5 µA (typ.) in V_{BAT} mode • 2.0 to 3.6 V or 1.8 V ± 8% power supply range	• Flexibility to reduce power consumption for applications requiring advanced analog peripherals and low-power modes • Ideal for running at low voltages or on a rechargeable battery
Superior and innovative peripherals • Analog: Fast 12-bit ADC at 5 Msps (0.2 µs), Precise 16-bit sigma-delta ADC, Fast and ultra-fast comparators (25 ns), Op amp with PGA (4 gains, 1% accuracy), 12-bit DACs • Up to 18 timers: 16- and 32-bit resolution running up to 144 MHz • Audio: Simplex or full duplex I²S interfaces • Large set of communication interfaces including USART (9 Mbit/s), SPI/I²S (18 Mbit/s), I²C (1 MHz fast mode plus), CAN (1 Mbit/s), and full-speed USB • Cyclic redundancy check (CRC) • Capacitive touch sensing (24 keys) • High-resolution timer (217 ps) with complex waveform builder and multi-event handler	• Mixed signal management within one chip • BOM cost reduction • Simpler PCB design • Reduced MCU layout footprint • Code reliability • Eases digital power conversion • Control loop
STM32 compatibility and scalable portfolio • Pin compatibility and same API with STM32F0 peripherals • From 16 up to 512 Kbytes of Flash memory • From 32 to 144 pins in QFN, LQFP, BGA, and WLCSP packages • Ambient temperature range: –40 °C to +105 °C (+125 °C junction)	• Eases platform development strategy from Cortex-M0 (F0 series) up to Cortex-M4 (F3 series) cores • Industrial grade

An upgraded MCU class

STM32 F3

The STM32F3 family of mixed-signal MCUs with DSP and FPU instructions

The STM32 F3 series shakes up the digital signal controller world by combining a 32-bit ARM® Cortex®-M4 core (DSP, FPU) running at 72 MHz with a high number of integrated analog and digital peripherals leading to cost reduction at application level and simplifying application design. The STM32F3 Series consists of six lines:
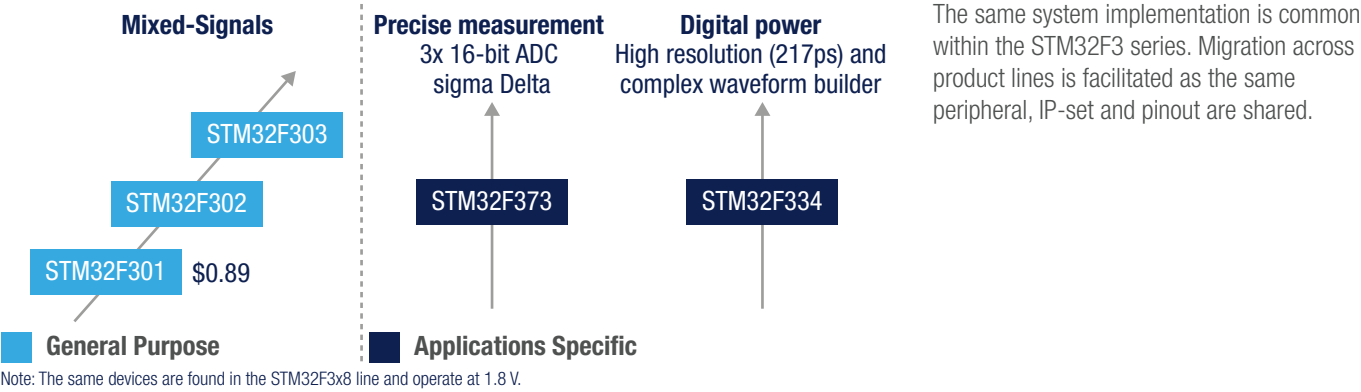
• The **STM32F301, STM32F302, STM32F303 lines** are general-purpose MCUs ranging from a basic, cost-efficient peripheral set to devices with more performance and analog functions.
• The **STM32F334 line** includes a versatile high-resolution timer (217 ps) for digital power conversion applications, such as D-SMPS, lighting, welding, solar and wireless charging.
• The **STM32F373 line** with its 16-bit sigma-delta ADC is designed for high-precision measurements in applications such as biometric sensors or smart metering.
• The **STM32F3x8 line** supporting 1.8 V operations.

STM32F3 PRODUCT LINES

ARM® Cortex®-M4 (DSP + FPU) - 72 MHz
• Routine booster (CCM)
• Interconnect Matrix
• DMA
• USART, SPI, I²C, I²S, USB and CAN
• 16- and 32-bit timers
• HW polynomial CRC
• SRAM with Parity check
• Low and high speed oscillator
• Reset + BOR PVD
• RTC
• Temperature sensor
• Capacitive Touch sensing
• FSMC

Product line	FLASH (KB)	RAM (KB)	CCM-SRAM	Power supply	ADC 12-bit	ADC 16-bit	12-bit DAC	Fast and Ultra Fast Comp.	Op-Amp (PGA)	Advanced 16-bit PMW Timer	High-Resolution timer
STM32F301	32 to 64	16		2.0 to 3.6 V	Up to 2		1	3	1	1	
STM32F302	32 to 512	16 to 64		2.0 to 3.6 V	Up to 2		1	Up to 4	Up to 2	1	
STM32F303	32 to 512	16 to 80	•	2.0 to 3.6 V	Up to 4		Up to 3	Up to 7	Up to 4	Up to 3	
STM32F3x4 Digital Power	16 to 64	16	•	2.0 to 3.6 V	2		3	2x Ultra Fast	1	1	• 10ch
STM32F373 Precision measurement	64 to 256	32		2.0 to 3.6 V	1	3	3	2			
STM32F3x8 1.8 V +/-8%	64 to 512	16 to 80	•	1.8 V +/- 8%	Up to 4		Up to 3	Up to 7	Up to 4	Up to 3	

A flexible interconnect matrix allows autonomous communication between peripherals and saves CPU resources and power consumption.

Mixed-Signals

STM32F303
STM32F302
STM32F301 $0.89

Precise measurement
3x 16-bit ADC sigma Delta

STM32F373

Digital power
High resolution (217ps) and complex waveform builder

STM32F334

The same system implementation is common within the STM32F3 series. Migration across product lines is facilitated as the same peripheral, IP-set and pinout are shared.
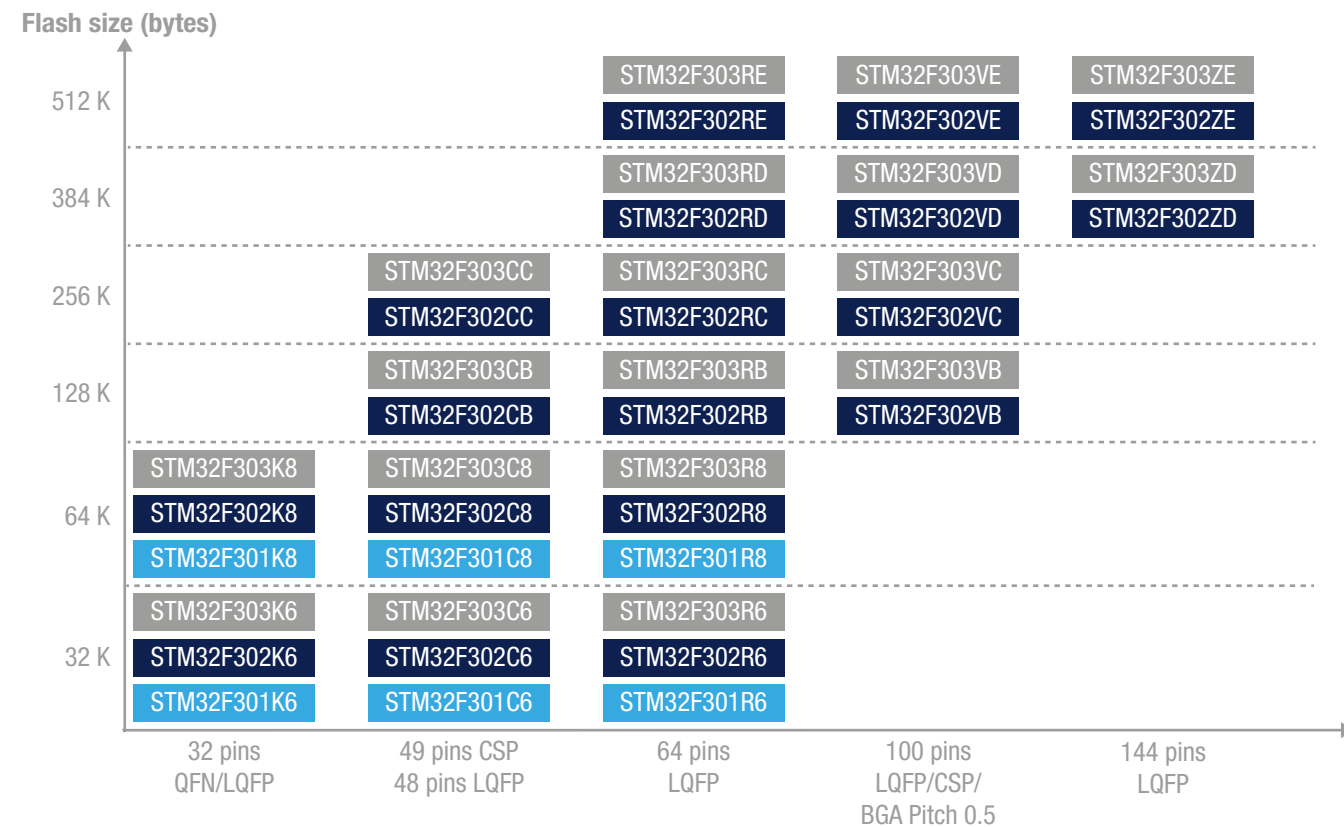
■ General Purpose   ■ Applications Specific

Note: The same devices are found in the STM32F3x8 line and operate at 1.8 V.

STM32F301/2/3 line

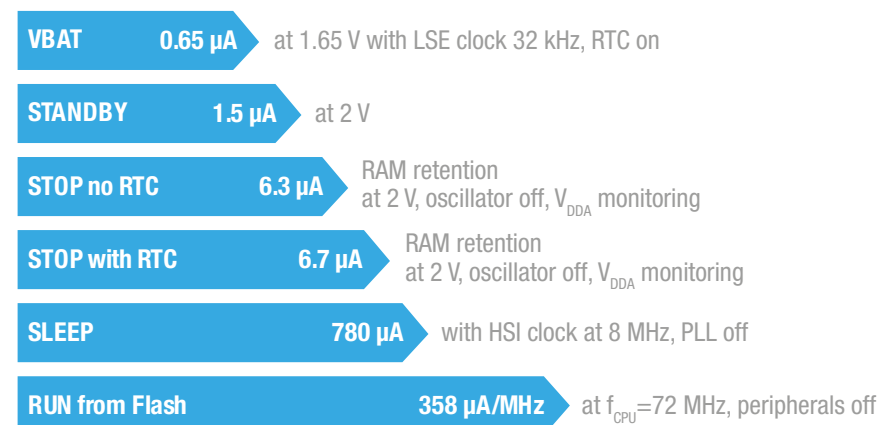## General-purpose MCUs ranging from basic to increased performance devices

The STM32F301/2/3 mixed-signal MCUs featuring an ARM® Cortex®-M4 core (DSP, FPU) at 72 MHz are tailored to address general-purpose applications in the continuity of the successful STM32F101/102/103 product lines.

STM32F30X PRODUCT LINES PORTFOLIO

Flash size (bytes)

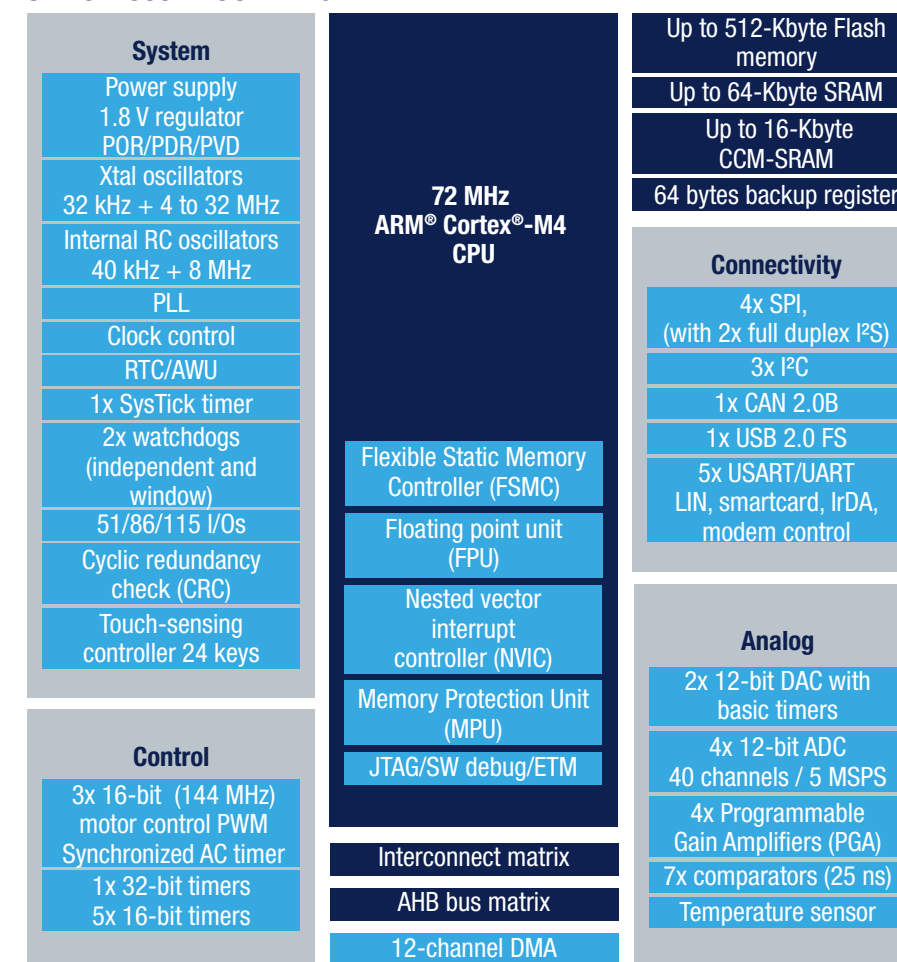|	32 pins QFN/LQFP	49 pins CSP / 48 pins LQFP	64 pins LQFP	100 pins LQFP/CSP/ BGA Pitch 0.5	144 pins LQFP
512 K			STM32F303RE / STM32F302RE	STM32F303VE / STM32F302VE	STM32F303ZE / STM32F302ZE
384 K			STM32F303RD / STM32F302RD	STM32F303VD / STM32F302VD	STM32F303ZD / STM32F302ZD
256 K		STM32F303CC / STM32F302CC	STM32F303RC / STM32F302RC	STM32F303VC / STM32F302VC	
128 K		STM32F303CB / STM32F302CB	STM32F303RB / STM32F302RB	STM32F303VB / STM32F302VB	
64 K	STM32F303K8 / STM32F302K8 / STM32F301K8	STM32F303C8 / STM32F302C8 / STM32F301C8	STM32F303R8 / STM32F302R8 / STM32F301R8		
32 K	STM32F303K6 / STM32F302K6 / STM32F301K6	STM32F303C6 / STM32F302C6 / STM32F301C6	STM32F303R6 / STM32F302R6 / STM32F301R6		

- **STM32F301**: STM32 Cortex-M4 entry level. First sub-dollar Cortex-M4 devices with FPU, the STM32F301 access line has from 32 to 64 Kbytes of on-chip Flash and 16 Kbytes of SRAM, offering an easy way to step into Cortex-M4-core-based MCU development.
- The **STM32F302 and STM32F303** MCUs, compatible with, but more powerful than the STM32F103, operate between 2.0 and 3.6 V. They integrate different levels of analog peripherals. The STM32F303 brings the capability to boost the execution of critical routines with its CCM-SRAM.

TYPICAL CONSUMPTION VALUES ACROSS STM32F3 POWER MODES

VBAT	0.65 µA	at 1.65 V with LSE clock 32 kHz, RTC on
STANDBY	1.5 µA	at 2 V
STOP no RTC	6.3 µA	RAM retention at 2 V, oscillator off, V_{DDA} monitoring
STOP with RTC	6.7 µA	RAM retention at 2 V, oscillator off, V_{DDA} monitoring
SLEEP	780 µA	with HSI clock at 8 MHz, PLL off
RUN from Flash	358 µA/MHz	at f_{CPU}=72 MHz, peripherals off

STM32F303 BLOCK DIAGRAM

System
- Power supply 1.8 V regulator POR/PDR/PVD
- Xtal oscillators 32 kHz + 4 to 32 MHz
- Internal RC oscillators 40 kHz + 8 MHz
- PLL
- Clock control
- RTC/AWU
- 1x SysTick timer
- 2x watchdogs (independent and window)
- 51/86/115 I/Os
- Cyclic redundancy check (CRC)
- Touch-sensing controller 24 keys

Control
- 3x 16-bit (144 MHz) motor control PWM Synchronized AC timer
- 1x 32-bit timers
- 5x 16-bit timers

72 MHz ARM® Cortex®-M4 CPU
- Flexible Static Memory Controller (FSMC)
- Floating point unit (FPU)
- Nested vector interrupt controller (NVIC)
- Memory Protection Unit (MPU)
- JTAG/SW debug/ETM
- Interconnect matrix
- AHB bus matrix
- 12-channel DMA

- Up to 512-Kbyte Flash memory
- Up to 64-Kbyte SRAM
- Up to 16-Kbyte CCM-SRAM
- 64 bytes backup register

Connectivity
- 4x SPI, (with 2x full duplex I²S)
- 3x I²C
- 1x CAN 2.0B
- 1x USB 2.0 FS
- 5x USART/UART LIN, smartcard, IrDA, modem control

Analog
- 2x 12-bit DAC with basic timers
- 4x 12-bit ADC 40 channels / 5 MSPS
- 4x Programmable Gain Amplifiers (PGA)
- 7x comparators (25 ns)
- Temperature sensor

ADVANCED PERIPHERALS
- Up to seven fast and ultra-fast comparators (down to 25 ns)
- Up to four op amps with programmable gain (PGA) at 1% accuracy
- Up to four ultra-fast 12-bit ADCs with 5 Msps and 21 ns sampling time (up to 18 Msps in Interleaved mode)
- Up to three fast 144 MHz motor control timers (resolution < 7 ns)
- SRAM with Parity bit and Polynomial CRC for better reliability
- Fast communication peripherals: 9 Mbits/s USART, 18 Mbits/s SPI, and 1 MHz I²C
- Full duplex I²S for audio applications
- 5 volts Tolerant I/Os (FT, Ftf)

The high mathematical computation brought by the Cortex-M4 core, combined with its rich and advanced analog peripherals set, make STM32F30x devices ideal for control loops such as in motor control applications.
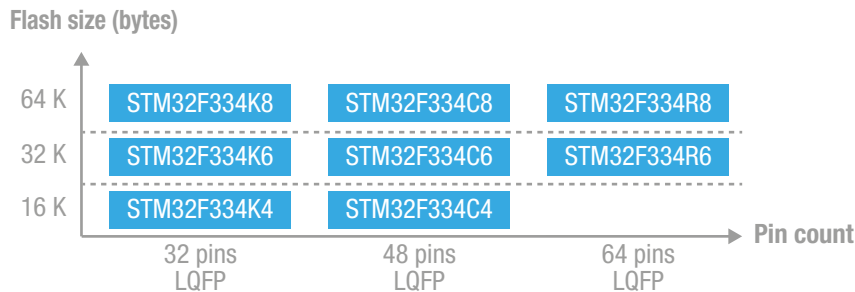
CCM-SRAM: THE ROUTINE BOOSTER
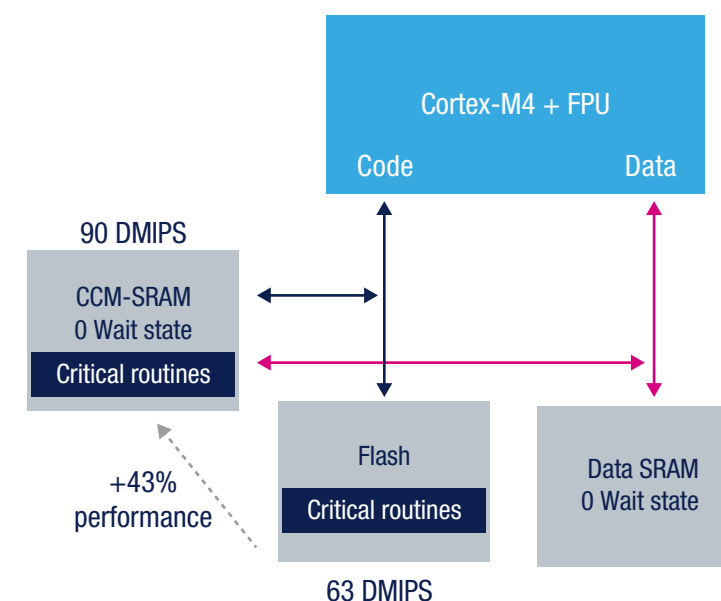
The routine booster (CCM-SRAM) accelerates the execution of critical routines. It consists of an SRAM plugged on both instruction and data buses where code is executed without any wait state, thus providing 43% more performance compared to Flash execution.

This 'static cache' offers 90 DMIPS or 245 CoreMark (equivalent to devices with CPU frequency > 100 MHz).

Cortex-M4 + FPU
Code | Data

90 DMIPS
CCM-SRAM 0 Wait state
Critical routines

+43% performance

Flash
Critical routines

63 DMIPS

Data SRAM 0 Wait state

Digital power line

The STM32F334 boosts digital power conversion

The STM32F334 product line specifically addresses digital power conversion applications, such as D-SMPS, lighting, welding, inverters for solar systems and wireless chargers, thanks to its agile high-resolution timer (HRTIM) providing 217 ps resolution on all operating modes with embedded powerful waveform generator and event handler. A complete ecosystem has been designed to ease digital power conversion based on STM32F334 devices.

STM32F334 PORTFOLIO

Flash size (bytes)

	32 pins LQFP	48 pins LQFP	64 pins LQFP
64 K	STM32F334K8	STM32F334C8	STM32F334R8
32 K	STM32F334K6	STM32F334C6	STM32F334R6
16 K	STM32F334K4	STM32F334C4	

Pin count

STM32 F3

Developing with the STM32F334 lets you manage complex PWM waveforms and handle numerous external events thanks to:

High-resolution timer with waveform builder and event handler (HRTIM)

- 217 ps high resolution (4.6 GHz equivalent) guaranteed on all channels vs voltage, temperature or manufacturing deviations
  - High resolution on all channels and any timing
  - 10-channel timer made of 6 timings units that can be cross-coupled or work independently
- Advanced PWM waveform generation with minimized software
  - Smart functions, such as a hardware burst mode controller
  - One DMA channel per timer
  - One parameter modification can change multiple events (timer chaining)
- Complex event management
  - 10 external events inputs and 5 fault inputs
- Numerous interconnects

High-speed ADCs for precise and accurate control

- 12-bit SAR – 5 Msps, single-ended and differential inputs
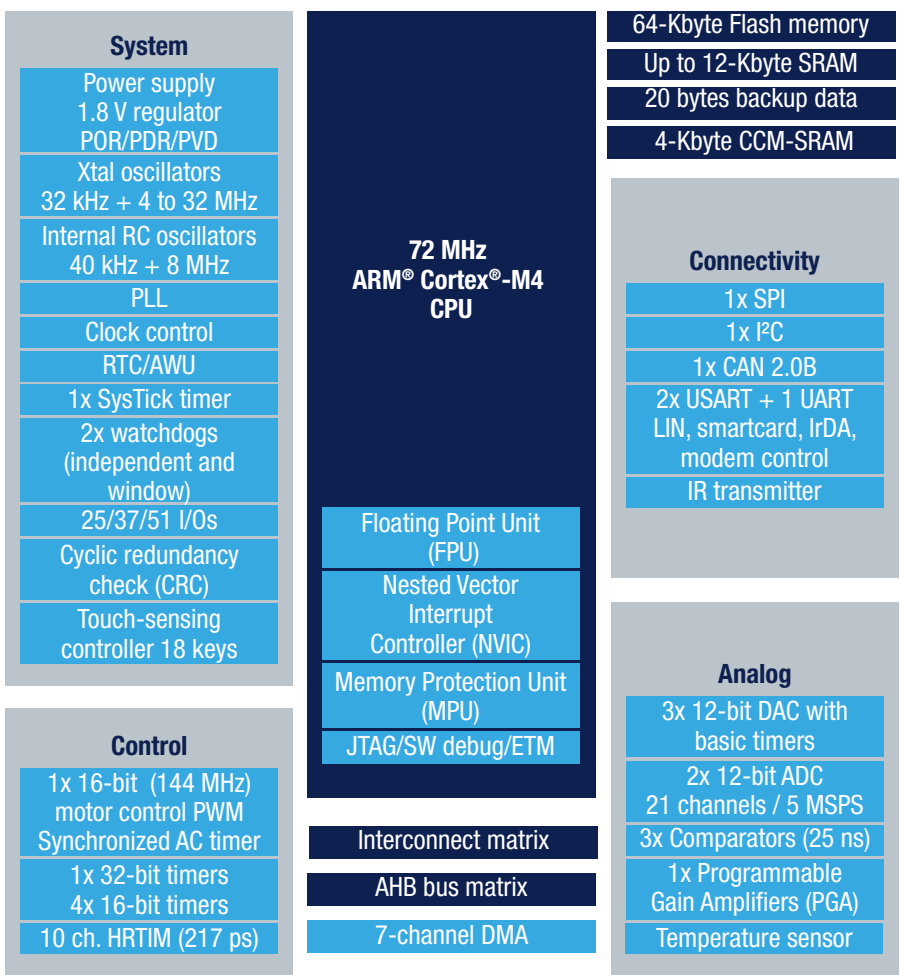- Sampling time down to 21 ns
- Multiple triggers for PWM

Built-in analog peripherals for signal conditioning and protection

- Ultra-fast comparators (25 ns)
- 12-bit digital-to-analog converter (DAC)

A High-Resolution timer cookbook (AN4539), a dedicated Discovery kit (32F3348DISCOVERY) plus and several dedicated D-SMPS evaluation board (ex: STEVAL-ISA147V2) help accelerate application development.

STM32F334 BLOCK DIAGRAM

System
- Power supply 1.8 V regulator POR/PDR/PVD
- Xtal oscillators 32 kHz + 4 to 32 MHz
- Internal RC oscillators 40 kHz + 8 MHz
- PLL
- Clock control
- RTC/AWU
- 1x SysTick timer
- 2x watchdogs (independent and window)
- 25/37/51 I/Os
- Cyclic redundancy check (CRC)
- Touch-sensing controller 18 keys

72 MHz ARM® Cortex®-M4 CPU
- Floating Point Unit (FPU)
- Nested Vector Interrupt Controller (NVIC)
- Memory Protection Unit (MPU)
- JTAG/SW debug/ETM

- 64-Kbyte Flash memory
- Up to 12-Kbyte SRAM
- 20 bytes backup data
- 4-Kbyte CCM-SRAM

Connectivity
- 1x SPI
- 1x I²C
- 1x CAN 2.0B
- 2x USART + 1 UART LIN, smartcard, IrDA, modem control
- IR transmitter

Control
- 1x 16-bit (144 MHz) motor control PWM Synchronized AC timer
- 1x 32-bit timers 4x 16-bit timers
- 10 ch. HRTIM (217 ps)

- Interconnect matrix
- AHB bus matrix
- 7-channel DMA

Analog
- 3x 12-bit DAC with basic timers
- 2x 12-bit ADC 21 channels / 5 MSPS
- 3x Comparators (25 ns)
- 1x Programmable Gain Amplifiers (PGA)
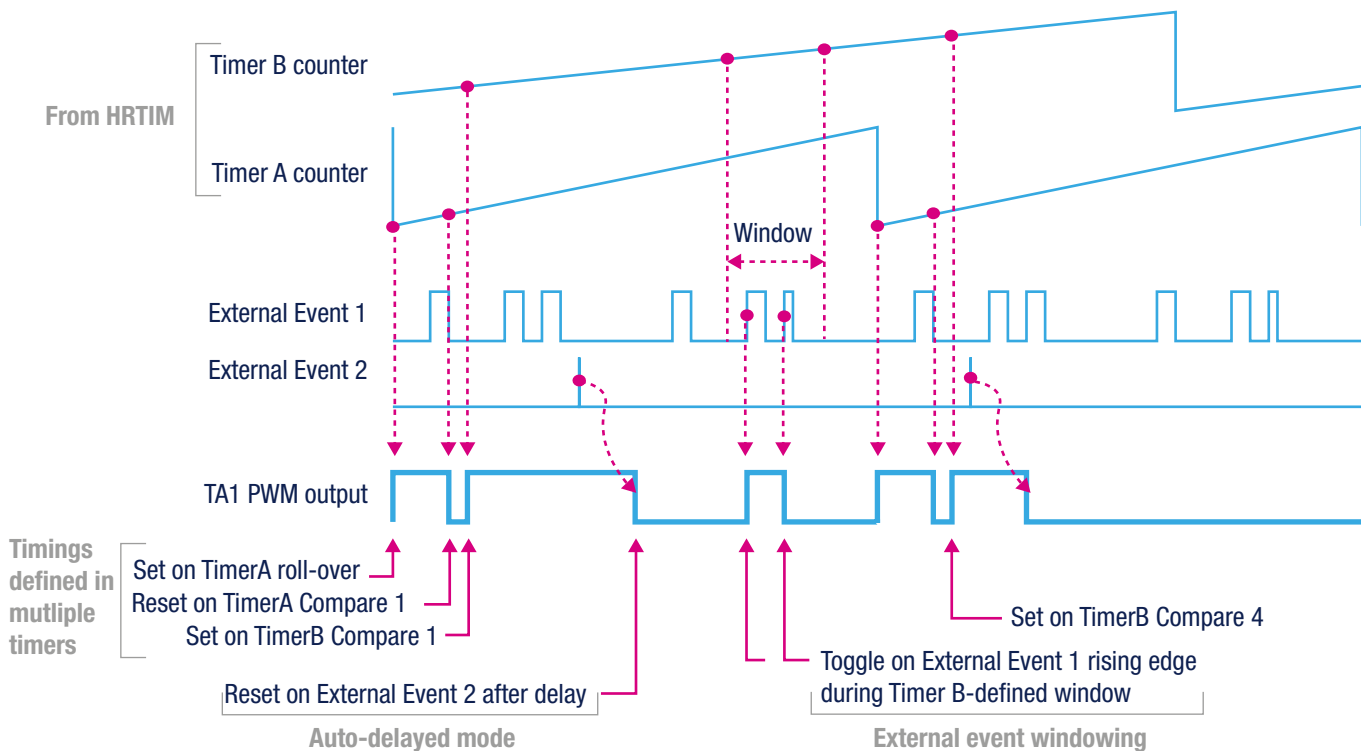- Temperature sensor

APPLICATION TARGET

STM32F334 devices greatly simplify digital control of complex power-supply topologies used in :

- Data servers
- Telecom infrastructure
- Wireless charging points
- Lighting
- Welding
- Industrial power supplies
- Digital Switch Mode Power Supply (D-SMPS)

COMPLEX WAVEFORM BUILDING AND MULTI-EVENT HANDLING (FROM HRTIM) - EXAMPLE

From HRTIM
- Timer B counter
- Timer A counter
- Window
- External Event 1
- External Event 2
- TA1 PWM output

Timings defined in mutliple timers
- Set on TimerA roll-over
- Reset on TimerA Compare 1
- Set on TimerB Compare 1
- Set on TimerB Compare 4
- Reset on External Event 2 after delay
- Toggle on External Event 1 rising edge during Timer B-defined window

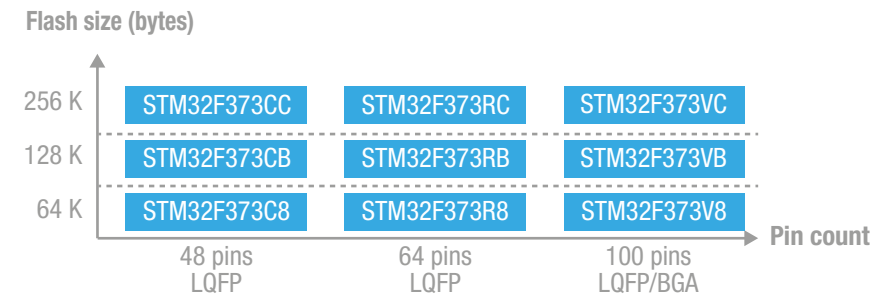Auto-delayed mode   External event windowing

High precision line

True 16-bit sigma delta ADC integration

The ARM® Cortex®-M4 based STM32F373 product line integrates 16-bit sigma-delta ADCs, making the devices a perfect fit for all kinds of sensor applications requiring high-precision measurements together with more demanding signal processing.
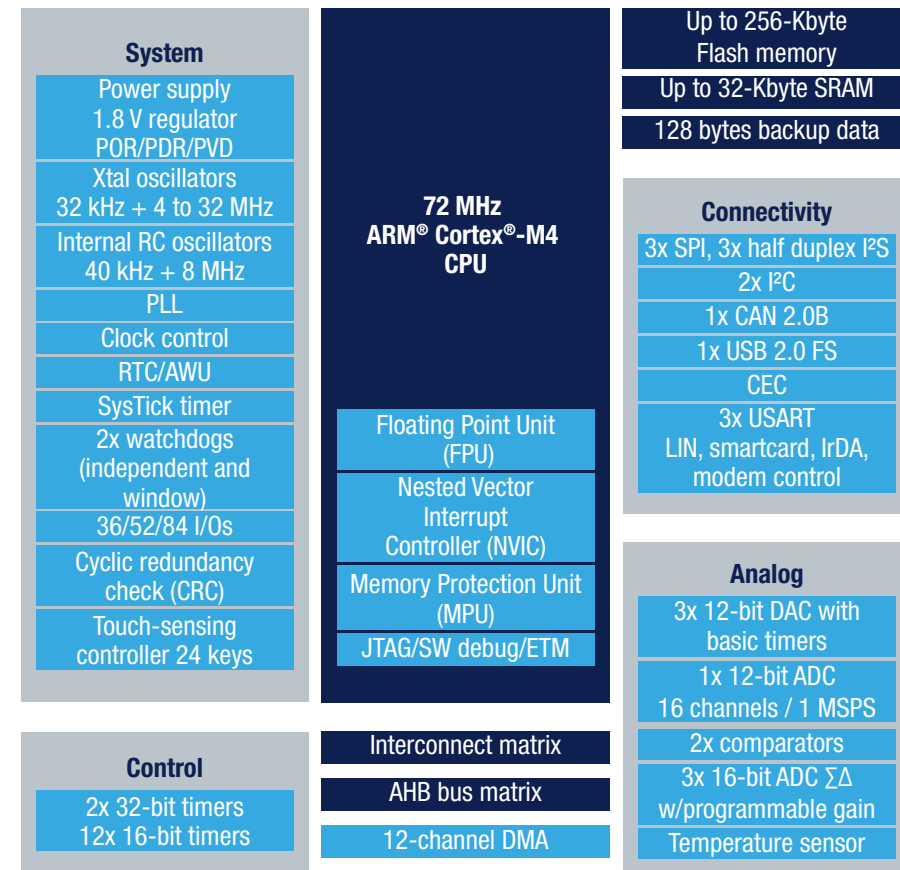
STM32F373 PORTFOLIO

Flash size (bytes)

256 K	STM32F373CC	STM32F373RC	STM32F373VC
128 K	STM32F373CB	STM32F373RB	STM32F373VB
64 K	STM32F373C8	STM32F373R8	STM32F373V8
	48 pins LQFP	64 pins LQFP	100 pins LQFP/BGA

Pin count

APPLICATION TARGET

- Portable medical equipment
- Entry-level consumer audio equipment
- Sensor hub for biometric sensors
- Portable fitness
- Gaming
- Metering equipment

STM32F373 BLOCK DIAGRAM

System
- Power supply 1.8 V regulator POR/PDR/PVD
- Xtal oscillators 32 kHz + 4 to 32 MHz
- Internal RC oscillators 40 kHz + 8 MHz
- PLL
- Clock control
- RTC/AWU
- SysTick timer
- 2x watchdogs (independent and window)
- 36/52/84 I/Os
- Cyclic redundancy check (CRC)
- Touch-sensing controller 24 keys

72 MHz ARM® Cortex®-M4 CPU
- Floating Point Unit (FPU)
- Nested Vector Interrupt Controller (NVIC)
- Memory Protection Unit (MPU)
- JTAG/SW debug/ETM

- Up to 256-Kbyte Flash memory
- Up to 32-Kbyte SRAM
- 128 bytes backup data

Connectivity
- 3x SPI, 3x half duplex I²S
- 2x I²C
- 1x CAN 2.0B
- 1x USB 2.0 FS
- CEC
- 3x USART LIN, smartcard, IrDA, modem control

Analog
- 3x 12-bit DAC with basic timers
- 1x 12-bit ADC 16 channels / 1 MSPS
- 2x comparators
- 3x 16-bit ADC ΣΔ w/programmable gain
- Temperature sensor

Control
- 2x 32-bit timers
- 12x 16-bit timers

- Interconnect matrix
- AHB bus matrix
- 12-channel DMA

ADVANCED PERIPHERALS

Each STM32F373 device is equipped with three 16-bit sigma-delta ADCs with the following characteristics:

- 16-bit output signed code
- 7 gain levels: ½, 1, 2 , 4 , 8, 16, and 32
- Differential or single ended mode:
  - Up to 11 differential input pairs or 21 single-ended combinations over three ΣΔ ADCs
  - Free input configuration as single ended or differential
- Up to 50 Ksps in Fast mode on one channel (per ΣΔ ADC)
- Independent power supply and V_{REF}
- Offset error < 1 LSB after calibration
- 3 different low power modes:
  - Slow: 600 µA (max.), Standby: 200 µA, Power down: 10 µA (max.)
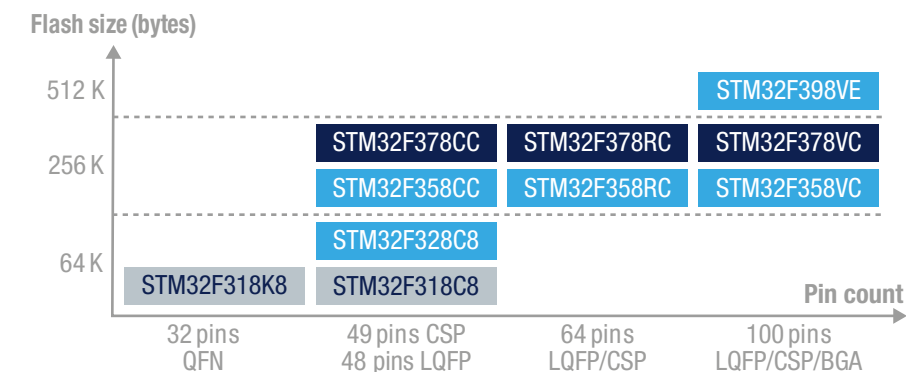- 5 volts Tolerant I/Os (FT, Ftf)

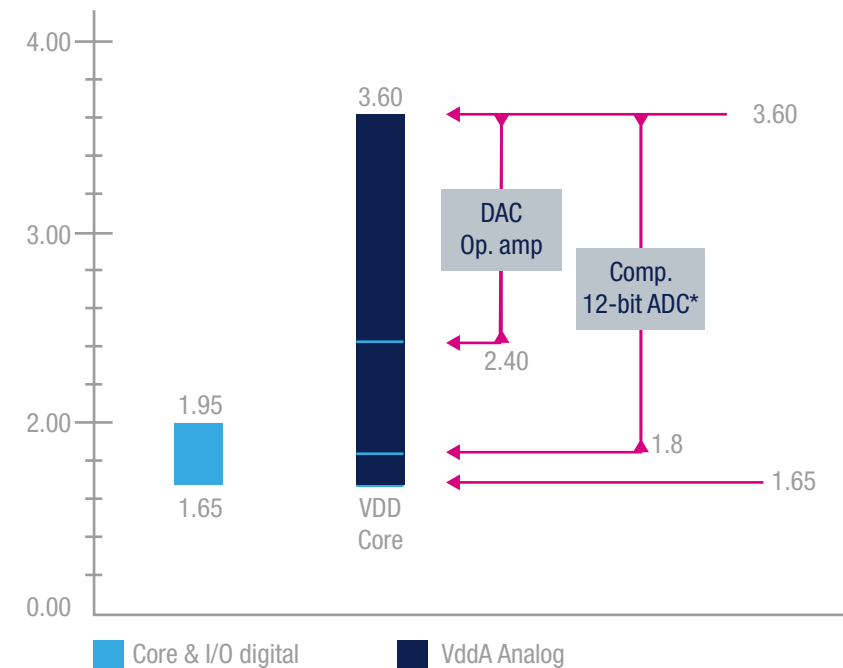STM32 **F3**

Low voltage line

The STM32F3x8 low voltage 1.8 V line

The STM32F3x8 line operates at 1.8 V ± 8%. It is well suited for use in portable consumer applications such as smartphones, accessories and media devices. Designers can take advantage of the same features as the STM32F3 series with no compromise or degradation in processing performance when operating at a lower voltage. The combination of 1.8 V digital supply voltage and an independent analog domain is an advantage in heterogeneous system architectures, leading to simplified system design and connected cost savings. The STM32F3x8 devices are ideal low-voltage companion microcontrollers, allowing to maintain a wide analog dynamic range.

STM32F3X8 PORTFOLIO

Flash size (bytes)

512 K				STM32F398VE
256 K		STM32F378CC	STM32F378RC	STM32F378VC
		STM32F358CC	STM32F358RC	STM32F358VC
		STM32F328C8		
64 K	STM32F318K8	STM32F318C8		
	32 pins QFN	49 pins CSP 48 pins LQFP	64 pins LQFP/CSP	100 pins LQFP/CSP/BGA

Pin count

STM32 **F3**

VOLTAGE RANGE (CORE, I/OS AND VDDA)

- 4.00
- 3.60
- 3.00
- 2.40
- 2.00 — 1.95 / 1.65 — VDD Core
- 1.8
- 1.65
- 0.00

DAC Op. amp
Comp. 12-bit ADC*

■ Core & I/O digital   ■ VddA Analog

* Except STM32F378

Simple interface with a 1.8 V application processor, ensuring maximum resolution (3.6 V) on ADC, DAC and op amp thanks to dual-voltage domains on the STM32F3.

STM32F3 Ecosystem

Hardware tools

Various types of development boards let you get started with STM32F3 products.

The STM32 Nucleo boards provide an affordable and flexible way for users to try out new ideas and build prototypes with a wide choice of specialized expansion boards. The Discovery kits let developers quickly explore key features of STM32F3 products, while the evaluation boards highlight all MCU functions. All these development boards include an integrated debugger/programmer as well as ready-to-use software examples helping developers to promptly get started.

STM32 Nucleo

Discovery kit
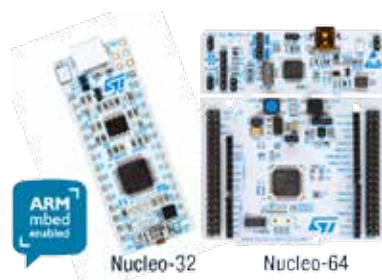
Evaluation board

Flexible prototyping
www.st.com/stm32nucleo

Key feature prototyping
www.st.com/stm32f3-discovery

Full feature evaluation
www.st.com/stm32evaltools

STM32 NUCLEO

- Open platform with a single STM32 MCU and integrated debugger/programmer.
- At least one board per main series.
- Different types of connectors for unlimited expansion possibilities.
- Support for multiple IDEs and mbed online tools.
- $10.32 recommended resale price.

www.st.com/stm32nucleo

USB power supply

Integrated ST-LINK/V2-1
mass storage device flash programming

Push buttons, color LEDs

ST morpho connectors
direct access to all MCU I/Os

Arduino™ connectors

● One STM32 MCU flavor
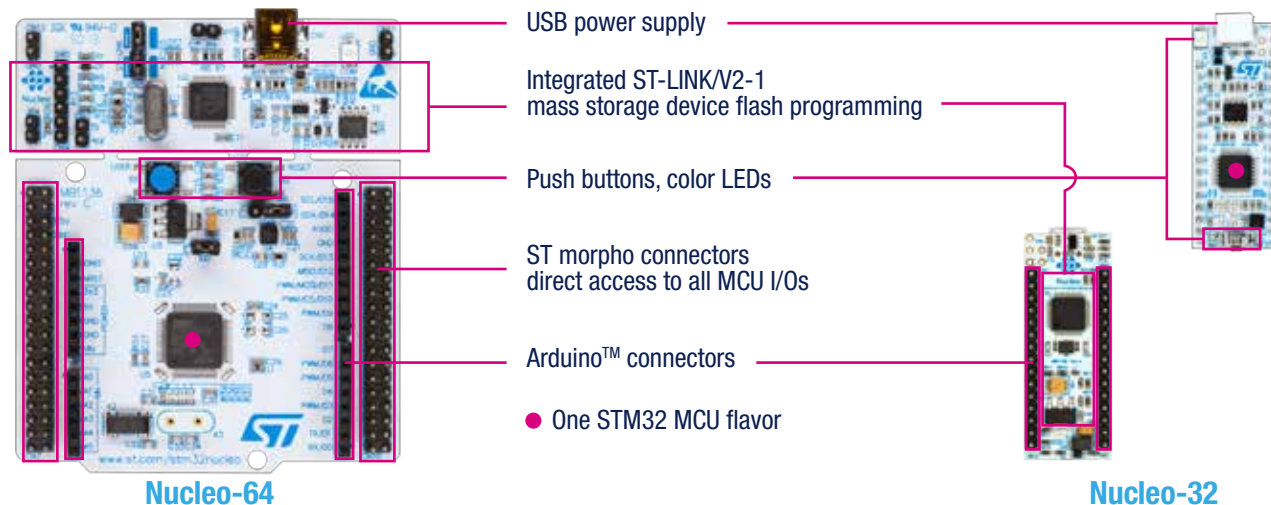
Nucleo-64

Nucleo-32

STM32 NUCLEO EXPANSION BOARDS

- The expansion boards let you add specialized functions (sense, connectivity…) with companion chips through Arduino™ or Morpho connectors.
- The portability of associated software components enables you to target several STM32 MCUs.

www.st.com/x-nucleo
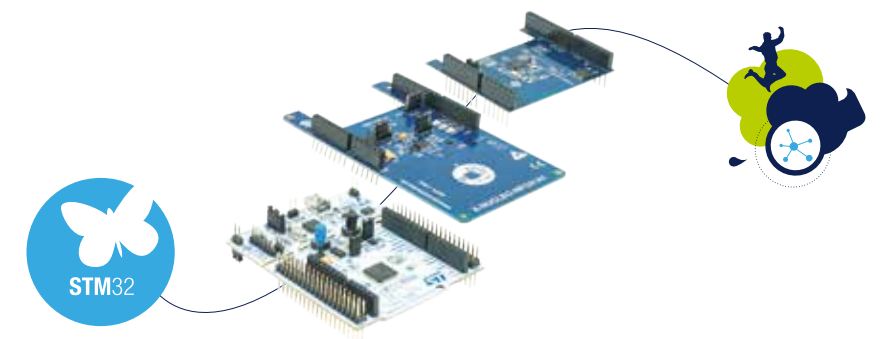
Software development tools offer

ST suggests a 3-step approach for standard development in C: configuration and generation, compile and debug, and then monitoring.

1. Configure the microcontroller using STM32CubeMX tool and optionally generate code depending on user choices.
2. Develop the application, compile and debug, using a partner integrated development environment (IDE) such as IAR, Keil, AC6, Atollic, Coocox, Emprog, iSystem, Keolabs, Rowley, Segger, Tasking,...
3. Monitor the application while it is running without being intrusive with STMStudio.

STM32CubeMX

Partner IDEs

STMStudio

Configure and generate code
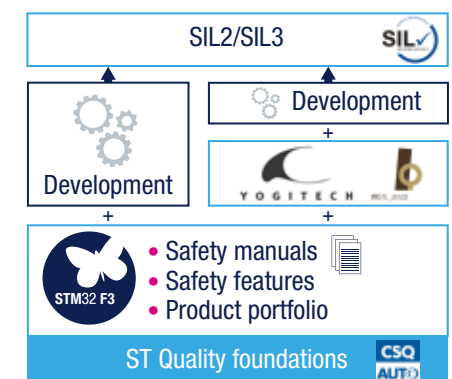
Compile and debug

Monitor
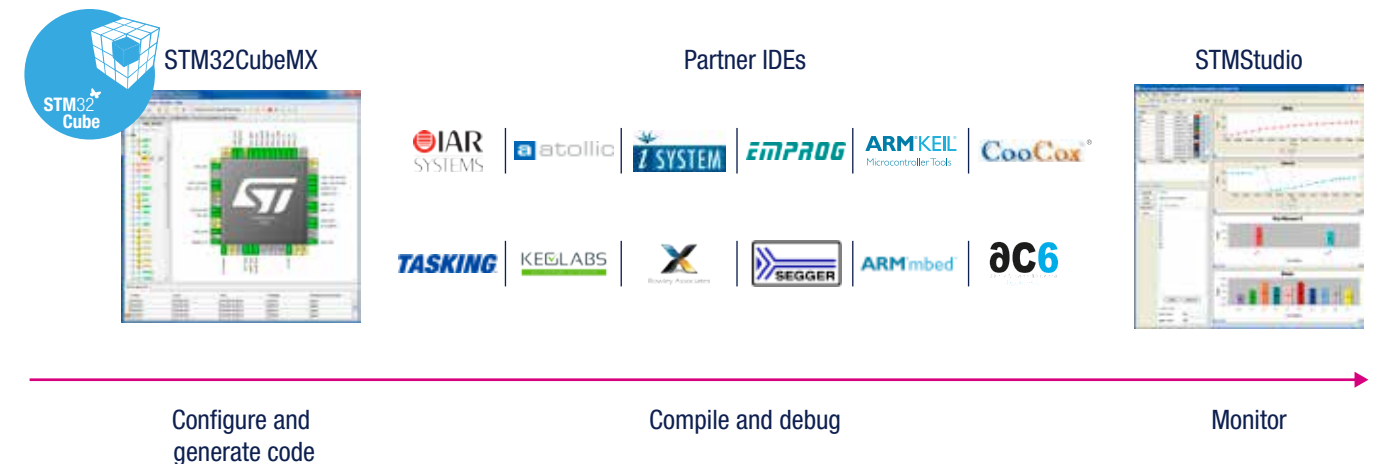
ACHIEVING SIL2/3 WITH STM32F3

Quickly achieve IEC 61508 Safety Integrity Level (SIL) certification with STM32F3 Functional Safety Package developed in partnership with Yogitech:

- STM32F3 Safety Manual: a user guide including detailed list of safety requirements and examples
- fRSTL_stm32f3 library: a set of ready to use, verified and application independent Software Test Libraries
  Visit www.yogitech.com

www.st.com/stm32safety

SIL Ready

SIL2/SIL3

Development

Development
+

+
- Safety manuals
- Safety features
- Product portfolio

ST Quality foundations

STM32 MOTOR CONTROL ECOSYSTEM

ST's STM32 MCU family offers the performance of the industry-standard Cortex®-M core with the service of vector control or field-oriented control (FOC) algorithms, widely used in high-performance motor drives.

The STM32 PMSM FOC software development kit (STSW-STM32100) is part of ST's motor control ecosystem which offers a wide range of hardware and software solutions for various motor control applications including toys, home appliances, and factory automation.

The STM32 PMSM FOC SDK lets users evaluate STM32 performance and develop a complete application for single or multiple 3-phase permanent-magnet motor drive systems (sensored or sensorless). This SDK includes:

- Permanent-magnet synchronous motor (PMSM) FOC firmware library
- ST MC Workbench (graphical user interface to set the MC library parameters)

The ST MC Workbench is PC software which reduces design effort and time when configuring the STM32 PMSM FOC firmware library. Using its GUI, the user generates all the parameter header files needed to configure the library according to application needs and can in real-time monitor and change certain variables of the algorithm.

Key features

The STM32 PMSM FOC SDK offers the following features (among others):

- Sensorless motor control algorithm for STM32F3 and STM32F4 microcontrollers (ST patent pending) based on the High Frequency Injection (HFI) method. The HFI algorithm allows precise rotor angle detection in field-oriented control (FOC). It enables very low or zero speed operation for compressor applications (refrigerators and air conditioners) with reliable and efficient motor start-up, and for washing machines where it increases the efficiency of each washing cycle (low speed, full torque)
- "Maximum torque per ampere" (MTPA) control that optimizes the motor torque for each load and increases efficiency
- "Feed-forward" control that improves current control at high speeds
- "Start on the fly" provides smooth drive insertion for applications where the rotor is already rotating (e.g. outdoor fans in air conditioners and smoke extractors)

And new additional features for easy motor "PLUG and SPIN" operation:

- "Motor Profiler" for automatic detection of motor parameters. Electrical (Rs, Ls, and Ke) and mechanical (J and F) parameters are detected by the ST MC Workbench letting the user quickly set up and run the motor in only a few tens of seconds.

- "One-touch tuning" using only a single parameter (part of the software algorithm used to control the motor) the user is able to control the motor speed.

With these new features, the user is able to plug, spin and control the motor in only a few seconds without any additional equipment nor advanced motor control skills.

A wide range of hardware boards, from standalone control boards and power boards up to a complete motor control kit, are available to evaluate ST's solutions for motor control applications.

The P-NUCLEO-IHM001 Nucleo pack is a $35 motor control kit designed to help engineers and hobbyists experiment with motor control in a very short time. It contains an STM32F3 Nucleo board preloaded with 6-step and FOC algorithms, a motor-driver expansion board based on the STSPIN L6230 motor-driver IC, and a 3-phase low voltage brushless motor using 6-step or FOC algorithms preloaded on the microcontroller.

Plug and Spin your Motor in less than 1 minute !

- Automatic detection of key parameters
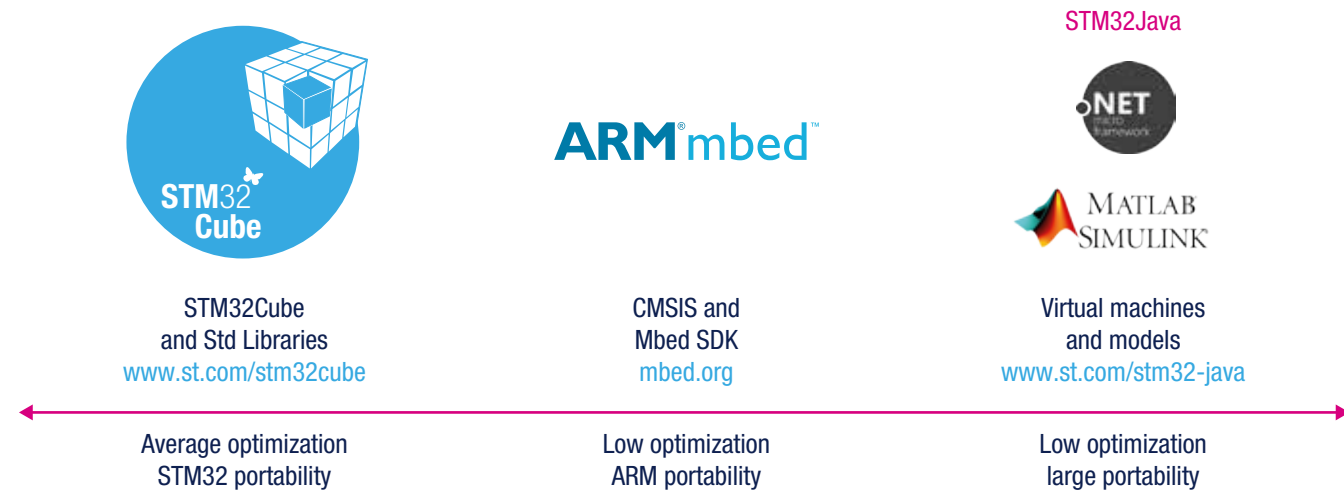- Zero equipment required
- Spin motor within < 1min.

- Single parameter to tune the speed controller
- Wide speed range
- Adapting to various load/inertia

STM32 MC SDK

Recommendations for choosing embedded software

When choosing between a strategy for code optimization or portability, here are some recommendations:

- Standard Peripheral Library offers a good tradeoff for users willing to remain within the STM32 F0 series in the future, with a portability level ensured among all STM32 F3 MCUs
- STM32CubeF3 embedded software is the correct choice for users who may want to easily port their application to another STM32 MCUs. In addition, this option also benefits from the full features of the STM32CubeMX tool on the PC, enabling access to code generation based on the user configuration and STM32CubeF3 embedded software

STM32Cube and Std Libraries www.st.com/stm32cube	CMSIS and Mbed SDK mbed.org	Virtual machines and models www.st.com/stm32-java
Average optimization STM32 portability	Low optimization ARM portability	Low optimization large portability

Focus on model development with MATLAB/Simulink

MATLAB and Simulink users can also benefit from the STM32 F3 series with their favorite environment.

A simple 3-step approach is possible using MATLAB and Simulink:

1. Create an algorithm model and simulate it on the host.
2. Generate Processor-in-the-Loop (PIL) code and verify it. This step uses MATLAB/Simulink to generate code optimized for the Cortex®-M4 devices using the DSP instruction set.
3. And finally, let everything run on the STM32F3 MCU using the peripheral blockset provided by ST, enabling the use of real STM32F3 peripherals such as the ADC, DAC, Timers, etc.

(More at www.st.com/stm32matlab)

Model development helps reduce development time and specification errors usually found with other methods.

Collaterals

is a valuable source of information and support with a documentation repository, forums, video and social media that help provide solutions for any issues or challenges that you may encounter. The existing community around ARM Cortex cores is already big enough that developers will likely find existing solutions or examples ready to be imported.

All ST MCUs are now in your hand with ST MCU Finder, the free mobile app available on Google Play and App Store.

st.com	ST MCU finder www.st.com/stmcufinder	Various social media
		ST forums on microcontrollers facebook.com/stm32 twitter.com/@ST_World youtube.com/STonlineMedia Mbed.org
Information	MCU selection	Communities and social media

STM32F3 shortcuts

www.st.com/stm32f3	www.st.com/stm32embeddedsoftware	www.st.com/stmcufinder
www.st.com/stm32evaltools	www.st.com/stm32cube	www.st.com/stmstudio
www.st.com/stm32discovery	mbed.org	www.yogitech.com
www.st.com/stm32nucleo	www.st.com/stm32matlab	www.st.com/x-nucleo
		www.st.com/stm32safety