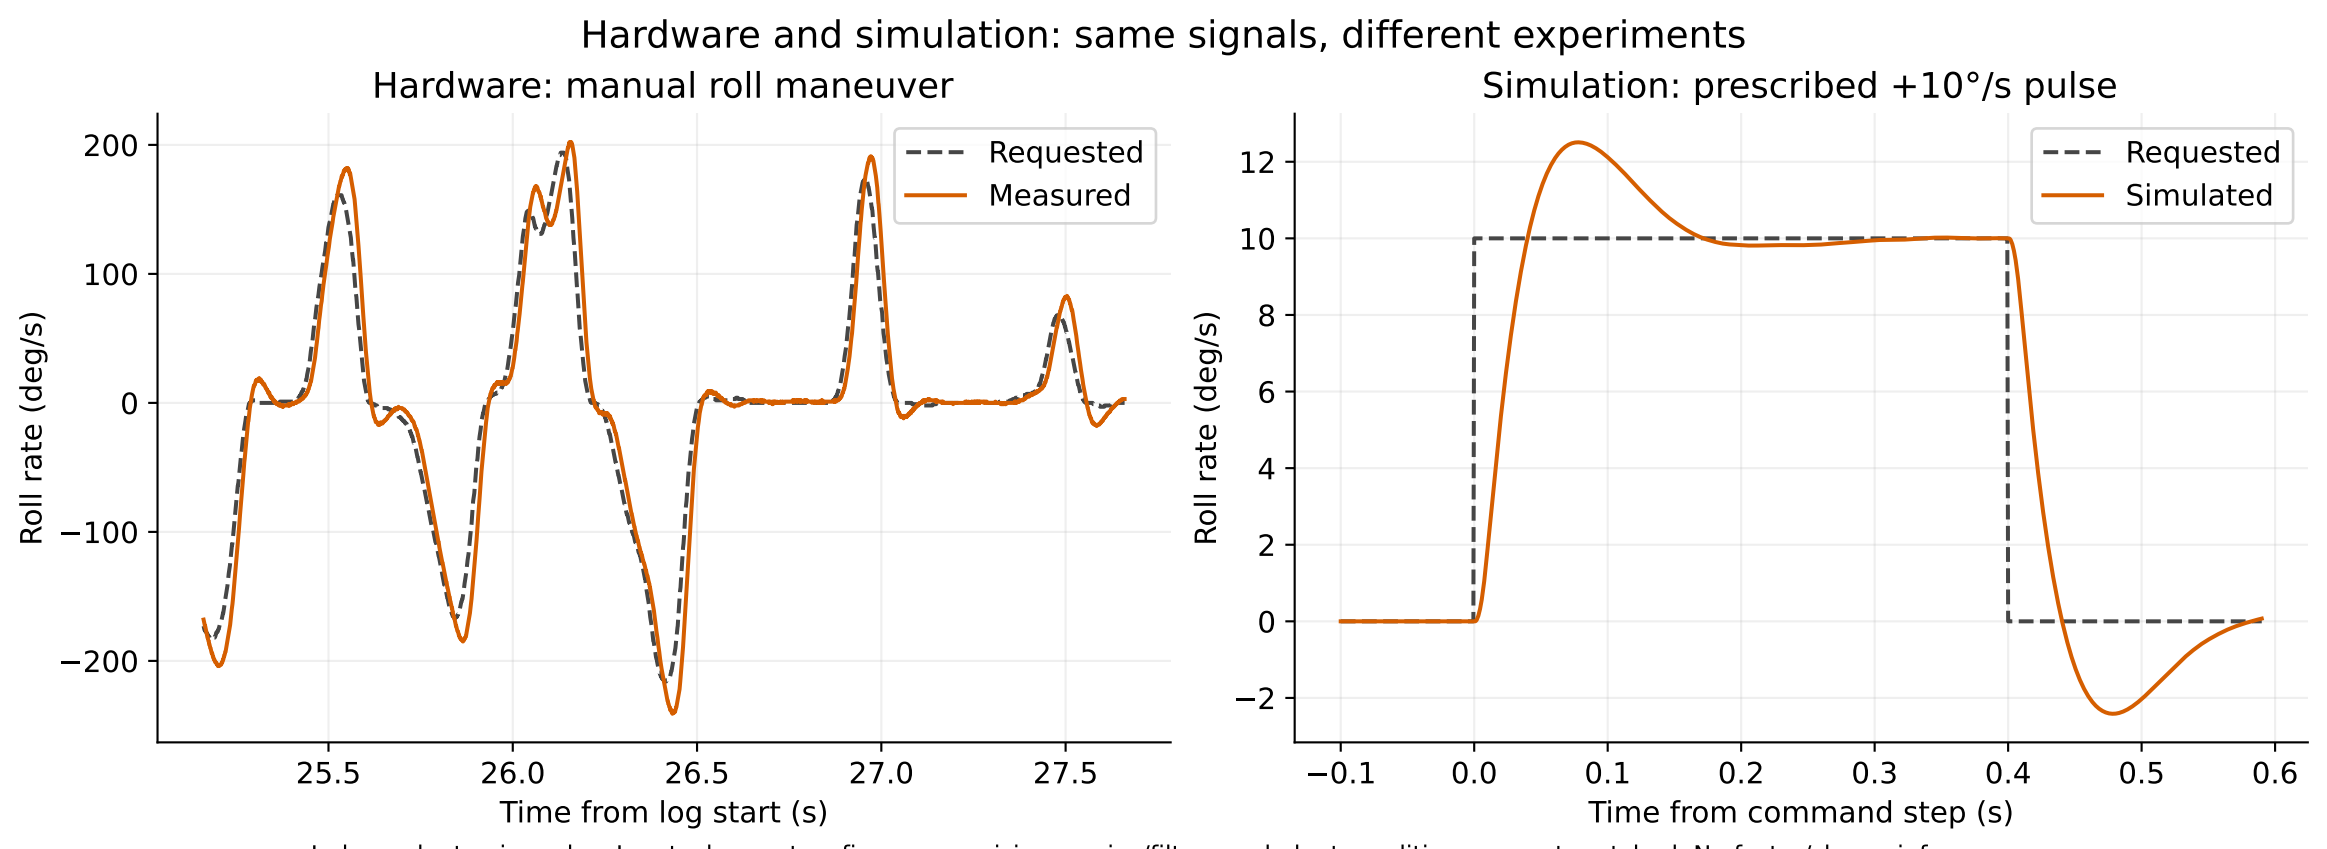
Hardware and simulation: same signals, different experiments
Hardware: manual roll maneuver
Simulation: prescribed +10°/s pulse
Requested
Measured
Simulated
Roll rate (deg/s)
Time from log start (s)
Time from command step (s)
200
100
0
−100
−200
12
10
8
6
4
2
0
−2
25.5
26.0
26.5
27.0
27.5
−0.1
0.0
0.1
0.2
0.3
0.4
0.5
0.6
Independent axis scales. Inputs, loop rates, firmware revisions, gains/filters and plant conditions are not matched. No faster/slower inference.