



1. Description

1.1. Project

Project Name	Industrial_Edge_Monitoring_System
Board Name	NUCLEO-F767ZI
Generated with:	STM32CubeMX 6.18.0
Date	07/06/2026

1.2. MCU

MCU Series	STM32F7
MCU Line	STM32F7x7
MCU name	STM32F767ZITx
MCU Package	LQFP144
MCU Pin number	144


1.3. Core(s) information

Core(s)	Arm Cortex-M7
---------	---------------

1.4. Caution

The report was generated although the configuration was in a modified state. It may be not accurate

2. Pinout Configuration

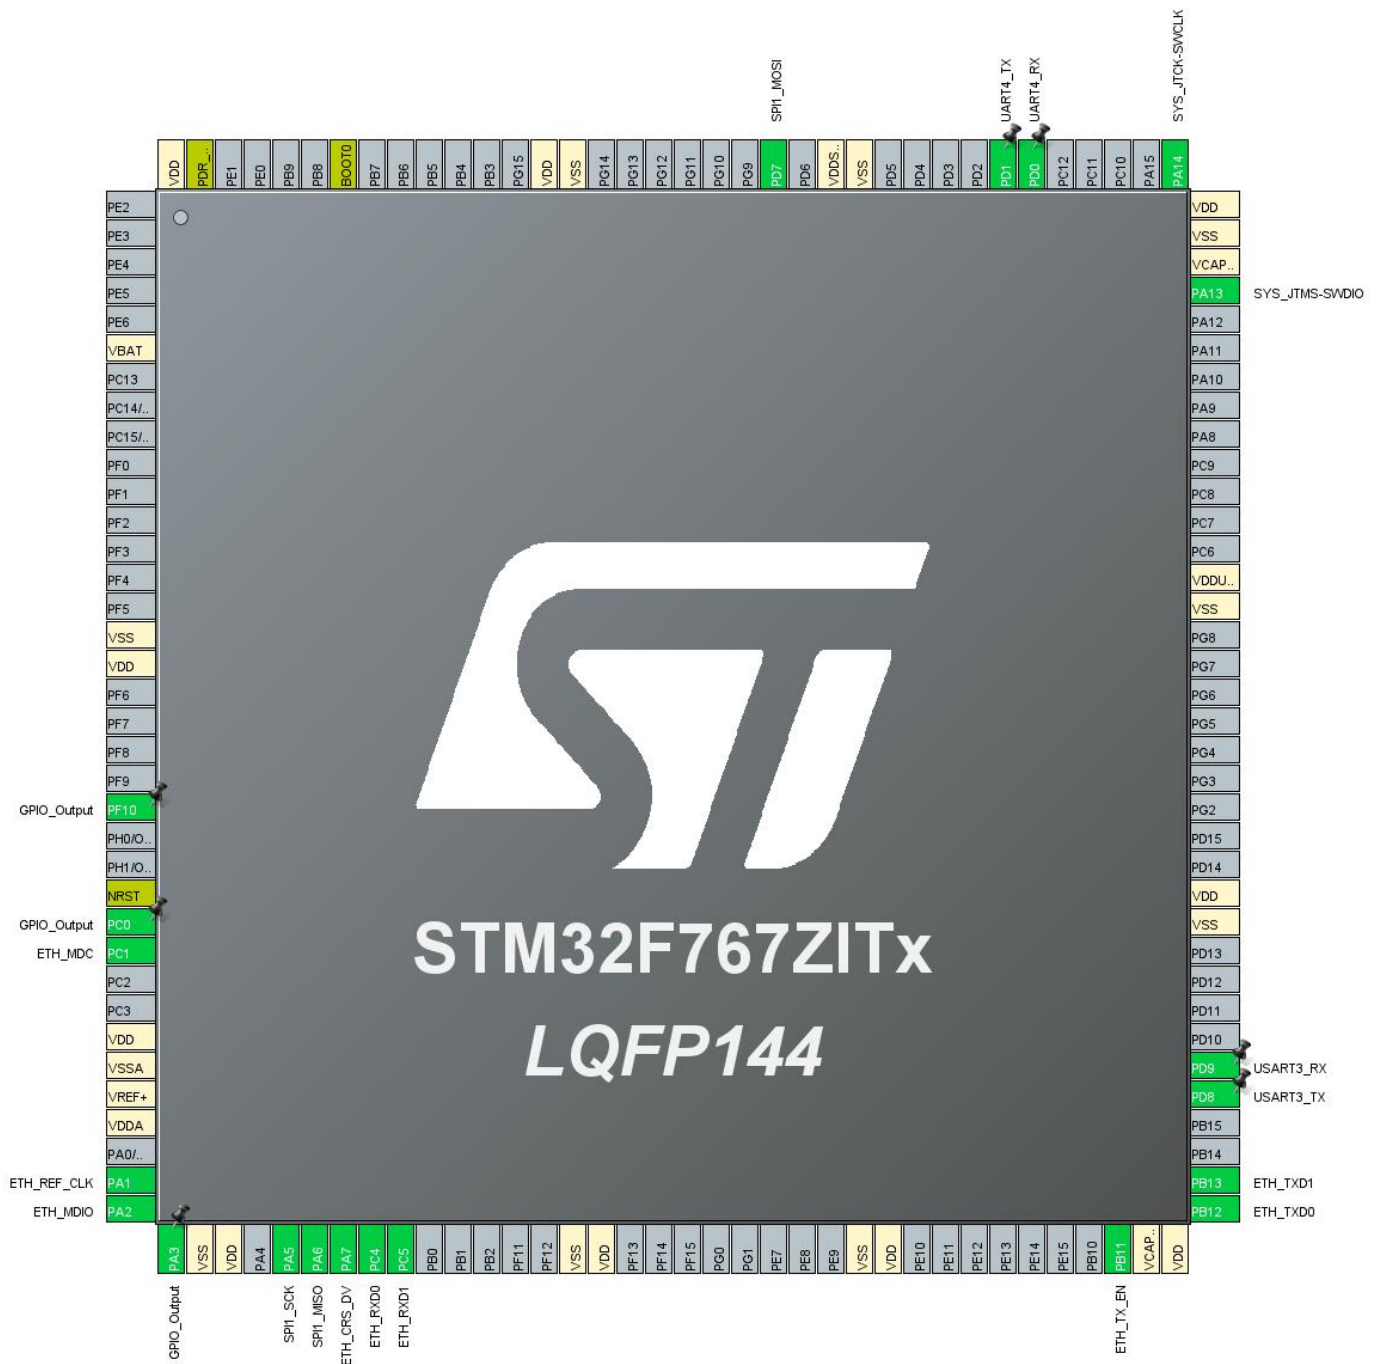

3. Pins Configuration


Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
16	VSS	Power		
17	VDD	Power		
22	PF10 *	I/O	GPIO_Output	
25	NRST	Reset		
26	PC0 *	I/O	GPIO_Output	
27	PC1	I/O	ETH_MDC	
30	VDD	Power		
31	VSSA	Power		
32	VREF+	Power		
33	VDDA	Power		
35	PA1	I/O	ETH_REF_CLK	
36	PA2	I/O	ETH_MDIO	
37	PA3 *	I/O	GPIO_Output	
38	VSS	Power		
39	VDD	Power		
41	PA5	I/O	SPI1_SCK	
42	PA6	I/O	SPI1_MISO	
43	PA7	I/O	ETH_CRS_DV	
44	PC4	I/O	ETH_RXD0	
45	PC5	I/O	ETH_RXD1	
51	VSS	Power		
52	VDD	Power		
61	VSS	Power		
62	VDD	Power		
70	PB11	I/O	ETH_TX_EN	
71	VCAP_1	Power		
72	VDD	Power		
73	PB12	I/O	ETH_TXD0	
74	PB13	I/O	ETH_TXD1	
77	PD8	I/O	USART3_TX	
78	PD9	I/O	USART3_RX	
83	VSS	Power		
84	VDD	Power		
94	VSS	Power		
95	VDDUSB	Power		

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
105	PA13	I/O	SYS_JTMS-SWDIO	
106	VCAP_2	Power		
107	VSS	Power		
108	VDD	Power		
109	PA14	I/O	SYS_JTCK-SWCLK	
114	PD0	I/O	UART4_RX	
115	PD1	I/O	UART4_TX	
120	VSS	Power		
121	VDDSDMMC	Power		
123	PD7	I/O	SPI1_MOSI	
130	VSS	Power		
131	VDD	Power		
138	BOOT0	Boot		
143	PDR_ON	Reset		
144	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

~~RIF configuration not available for STM32F767ZITx~~

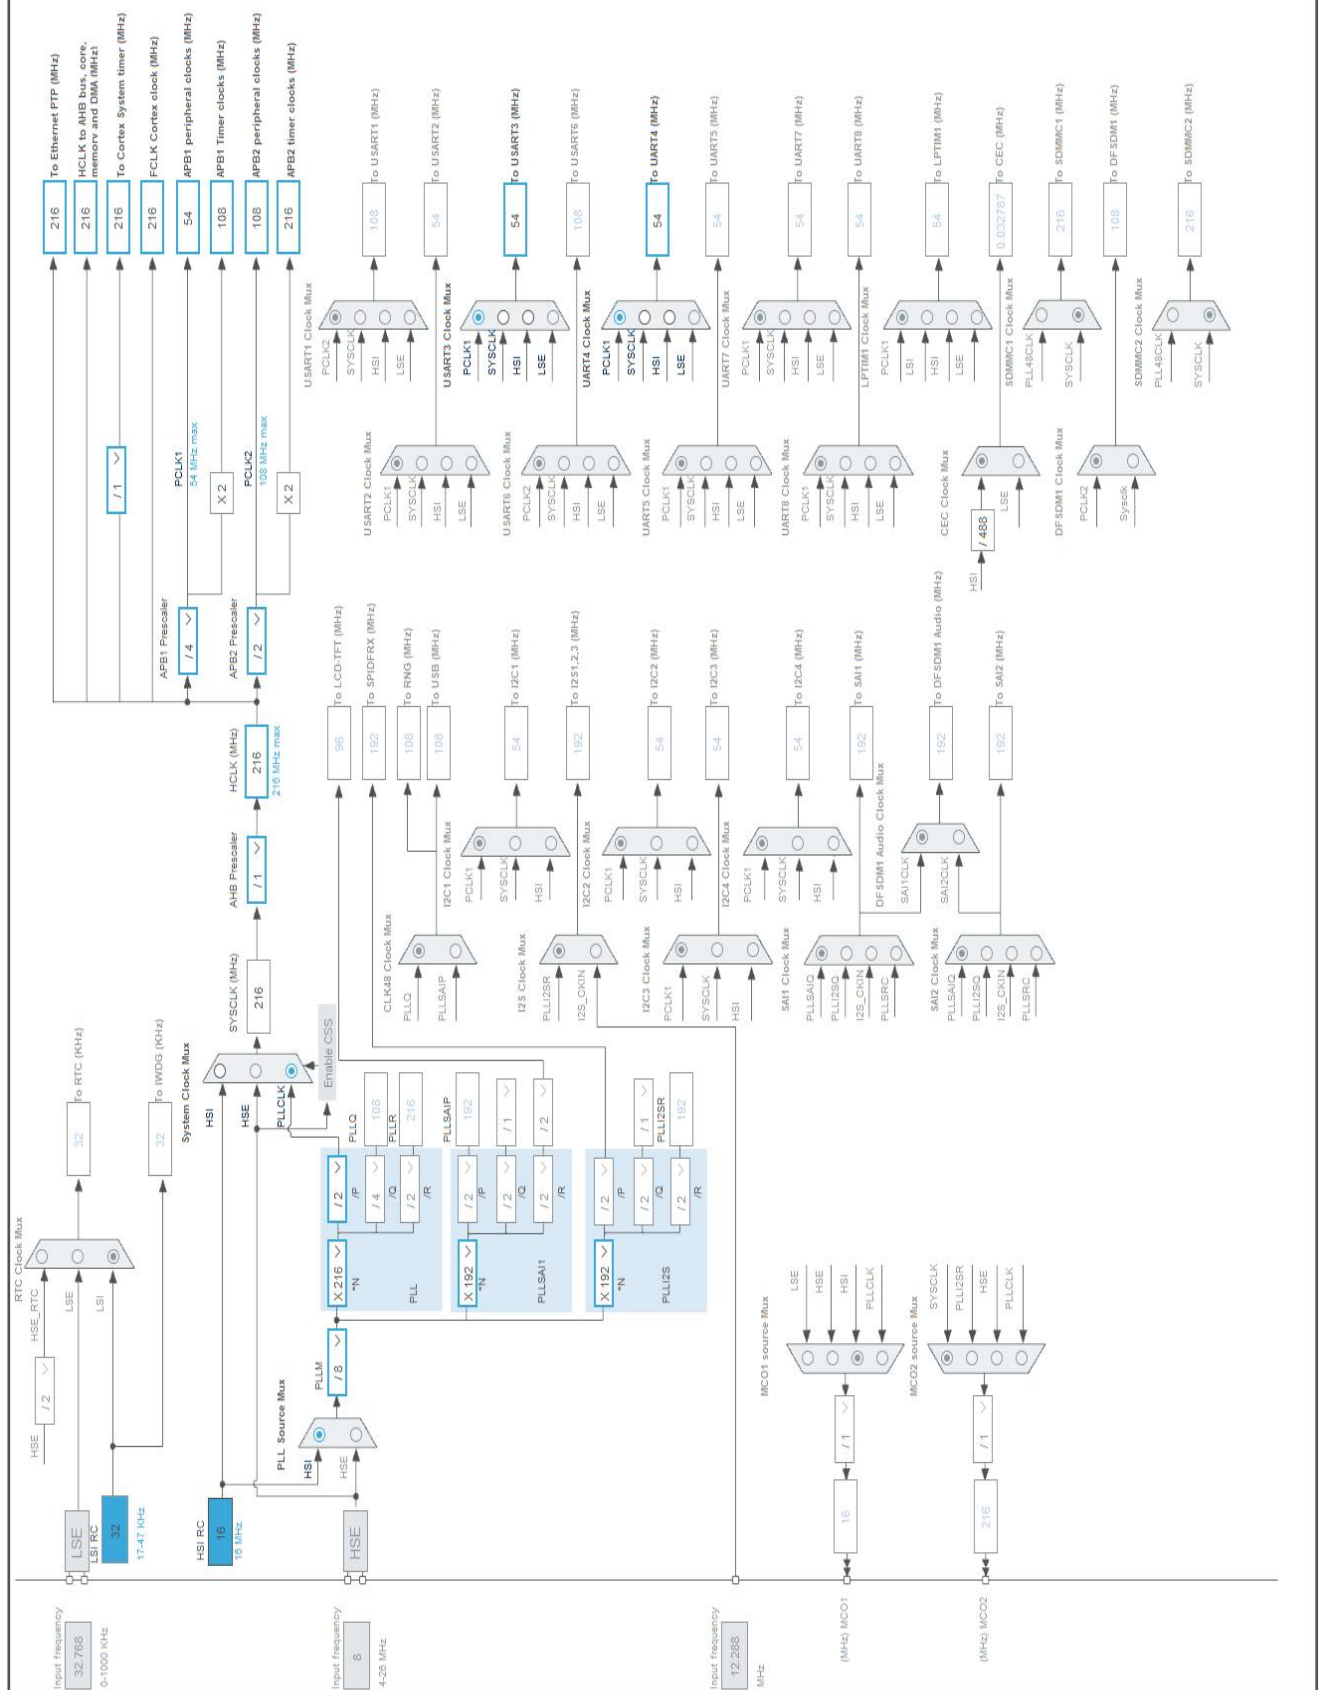

1. Power Consumption Calculator report

1.1. Microcontroller Selection

Series	STM32F7
Line	STM32F7x7
MCU	STM32F767ZITx
Datasheet	DS11532 Rev4

1.2. Parameter Selection

Temperature	25
Vdd	3.3

1.3. Battery Selection

Battery	Alkaline(9V)
Capacity	625.0 mAh
Self Discharge	0.3 %/month
Nominal Voltage	9.0 V
Max Cont Current	200.0 mA
Max Pulse Current	0.0 mA
Cells in series	1
Cells in parallel	1


1.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP_UDM (Under Drive)
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	Scale1-High	No Scale
Fetch Type	ICTM FLASH-SingleBank REGON	n/a
CPU Frequency	216 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator_LP Flash-PwrDwn
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	118 mA	130 μ A
Duration	0.1 ms	0.9 ms
DMIPS	462.0	0.0
Ta Max	89.42	104.98
Category	In DS Table	In DS Table

1.5. Results

Sequence Time	1 ms	Average Current	11.92 mA
Battery Life	2 days, 4 hours	Average DMIPS	462.24005 DMIPS

1.6. Chart

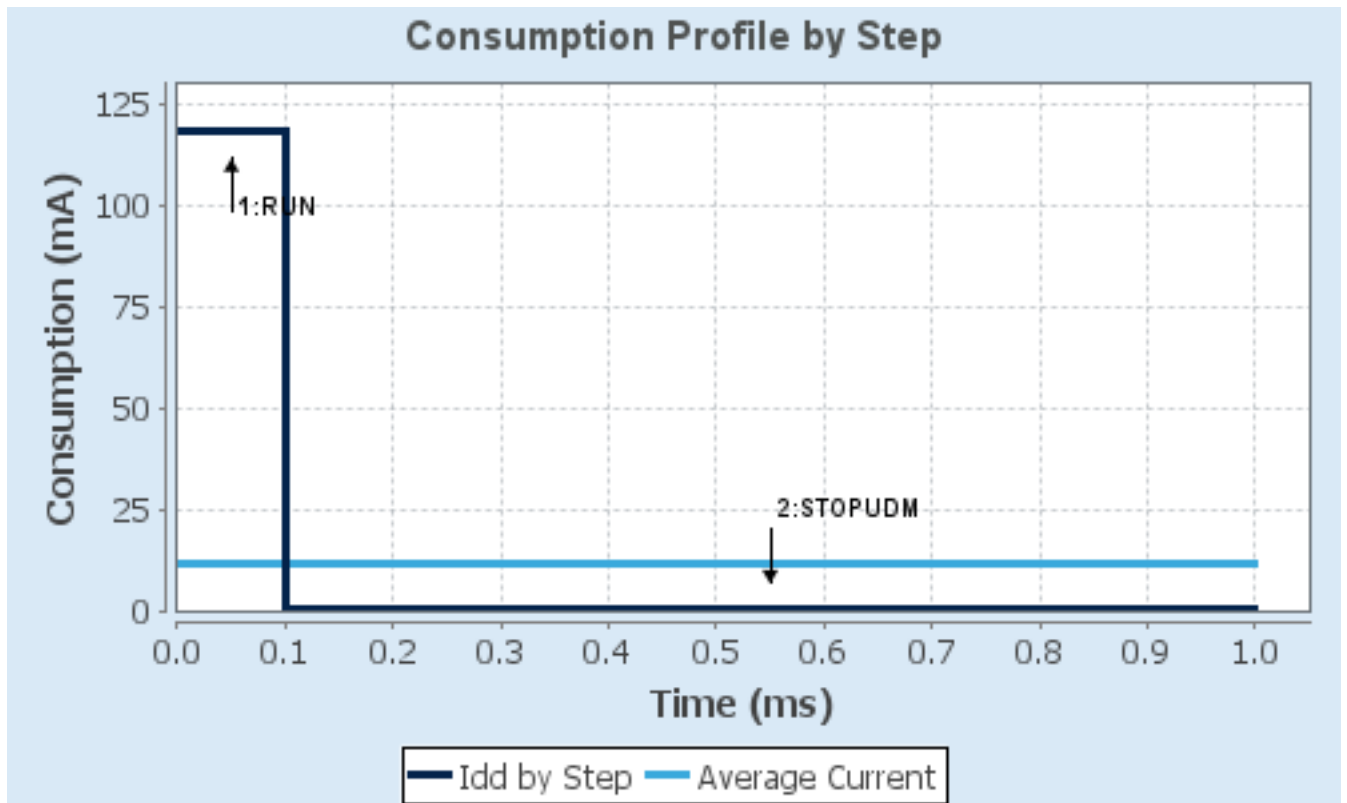

2. Software Project

2.1. Project Settings

Name	Value
Project Name	Industrial_Edge_Monitoring_System
Project Folder	D:\Industrial_Edge_Monitoring_System
Toolchain / IDE	CMake
Firmware Package Name and Version	STM32Cube FW_F7 V1.17.4
Application Structure	Advanced
Generate Under Root	No
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

2.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

2.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX_GPIO_Init	GPIO
3	MX_UART4_Init	UART4
4	MX_USART3_UART_Init	USART3
5	MX_SPI1_Init	SPI1
6	MX_FATFS_Init	FATFS
7	MX_ETH_Init	ETH

3. Peripherals and Middlewares Configuration

3.1. CORTEX_M7

3.1.1. Parameter Settings:

Speculation default mode Settings:

Speculation default mode **Enabled ***

Cortex Interface Settings:

Flash Interface	AXI Interface
ART ACCELERATOR	Disabled
Instruction Prefetch	Disabled
CPU ICache	Disabled
CPU DCache	Disabled

Cortex Memory Protection Unit Control Settings:

MPU Control Mode Background Region Privileged accesses only + MPU Disabled during hard fault, NMI and FAULTMASK handlers

Cortex Memory Protection Unit Region 0 Settings:

MPU Region	Enabled
MPU Region Base Address	0x0 *
MPU Region Size	4GB
MPU SubRegion Disable	0x87 *
MPU TEX field level	level 0
MPU Access Permission	ALL ACCESS NOT PERMITTED
MPU Instruction Access	DISABLE
MPU Shareability Permission	ENABLE
MPU Cacheable Permission	DISABLE
MPU Bufferable Permission	DISABLE

Cortex Memory Protection Unit Region 1 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 2 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 3 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 4 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 5 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 6 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 7 Settings:

MPU Region	Disabled
------------	----------

3.2. ETH

Mode: RMII

3.2.1. Parameter Settings:

General : Ethernet Configuration:

Ethernet MAC Address	00:80:E1:00:00:00
Tx Descriptor Length	4
First Tx Descriptor Address	0x2007c0a0 *
Rx Descriptor Length	4
First Rx Descriptor Address	0x2007c000 *
Rx Buffers Length	1524
Rx Mode	Polling Mode

3.3. RCC

3.3.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Flash Latency(WS)	7 WS (8 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

Power Parameters:

Power Over Drive	Enabled
Power Regulator Voltage Scale	Power Regulator Voltage Scale 1

3.4. SPI1

Mode: Full-Duplex Master

3.4.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits *
First Bit	MSB First
Clock Parameters:	
Prescaler (for Baud Rate)	256 *
Baud Rate	421.875 KBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge
Advanced Parameters:	
CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Software

3.5. SYS

Debug: Serial Wire

Timebase Source: SysTick

3.6. UART4

Mode: Asynchronous

3.6.1. Parameter Settings:

Basic Parameters:	
Baud Rate	19200 *
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1
Advanced Parameters:	
Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable
Advanced Features:	
Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable

MSB First	Disable
-----------	---------

3.7. USART3

Mode: Asynchronous

3.7.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

3.8. FATFS

mode: User-defined

3.8.1. Set Defines:

Version:

FATFS version	R0.12c
---------------	--------

Function Parameters:

FS_READONLY (Read-only mode)	Disabled
FS_MINIMIZE (Minimization level)	Disabled
USE_STRFUNC (String functions)	Enabled with LF -> CRLF conversion
USE_FIND (Find functions)	Disabled
USE_MKFS (Make filesystem function)	Enabled
USE_FASTSEEK (Fast seek function)	Enabled

USE_EXPAND (Use f_expand function)	Disabled
USE_CHMOD (Change attributes function)	Disabled
USE_LABEL (Volume label functions)	Disabled
USE_FORWARD (Forward function)	Disabled

Locale and Namespace Parameters:

CODE_PAGE (Code page on target)	Latin 1
USE_LFN (Use Long Filename)	Disabled
MAX_LFN (Max Long Filename)	255
LFN_UNICODE (Enable Unicode)	ANSI/OEM
STRF_ENCODE (Character encoding)	UTF-8
FS_RPATH (Relative Path)	Disabled

Physical Drive Parameters:

VOLUMES (Logical drives)	1
MAX_SS (Maximum Sector Size)	512
MIN_SS (Minimum Sector Size)	512
MULTI_PARTITION (Volume partitions feature)	Disabled
USE_TRIM (Erase feature)	Disabled
FS_NOFSINFO (Force full FAT scan)	0

System Parameters:

FS_TINY (Tiny mode)	Disabled
FS_EXFAT (Support of exFAT file system)	Disabled
FS_NORTC (Timestamp feature)	Dynamic timestamp
FS_REENTRANT (Re-Entrancy)	Disabled
FS_TIMEOUT (Timeout ticks)	1000
FS_LOCK (Number of files opened simultaneously)	2

*** User modified value**

4. System Configuration

4.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ETH	PC1	ETH_MDC	Alternate Function Push Pull	No pull-up and no pull-down	High	
	PA1	ETH_REF_CLK	Alternate Function Push Pull	No pull-up and no pull-down	High	
	PA2	ETH_MDIO	Alternate Function Push Pull	No pull-up and no pull-down	High	
	PA7	ETH_CRS_DV	Alternate Function Push Pull	No pull-up and no pull-down	High	
	PC4	ETH_RXD0	Alternate Function Push Pull	No pull-up and no pull-down	High	
	PC5	ETH_RXD1	Alternate Function Push Pull	No pull-up and no pull-down	High	
	PB11	ETH_TX_EN	Alternate Function Push Pull	No pull-up and no pull-down	High	
	PB12	ETH_TXD0	Alternate Function Push Pull	No pull-up and no pull-down	High	
	PB13	ETH_TXD1	Alternate Function Push Pull	No pull-up and no pull-down	High	
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PA6	SPI1_MISO	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PD7	SPI1_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
UART4	PD0	UART4_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PD1	UART4_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
USART3	PD8	USART3_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PD9	USART3_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
GPIO	PF10	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PC0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PA3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	

4.2. DMA configuration

nothing configured in DMA service

4.3. NVIC configuration

4.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
SPI1 global interrupt	unused		
USART3 global interrupt	unused		
UART4 global interrupt	unused		
Ethernet global interrupt	unused		
Ethernet wake-up interrupt through EXTI line 19	unused		
FPU global interrupt	unused		

4.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Pre-fetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true

* User modified value

5. System Views

5.1. Category view

5.1.1. Current

Middleware						
FATFS ✓						
System Core	Analog	Timers	Connectivity	Multimedia	Security	Computing
CORTEX_M7 ✓			ETH ✓			
DMA			SPI1 ✓			
GPIO ✓			UART4 ✓			
NVIC ✓			USART3 ✓			
RCC ✓						
SYS ✓						

6. Docs & Resources

Type	Link
BSDL files	https://www.st.com/resource/en/bsdl_model/stm32f7_bsd.zip
IBIS models	https://www.st.com/resource/en/ibis_model/stm32f7_ibis.zip
System View Description	https://www.st.com/resource/en/svd/stm32f7-svd.zip
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_embedded_software_solutions.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_eval_tools_portfolio.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_stm8_functional-safety-packages.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_software_development_tools.pdf
Presentations	https://www.st.com/resource/en/product_presentation/microcontrollers-stm32-family-overview.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32nucleo.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32trust.pdf
Security Bulletin	https://www.st.com/resource/en/technical_note/tn1489-security-bulletin-tn1489stpsirt-physical-attacks-on-stm32-and-stm32cube-firmware-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an1709-emc-design-guide-for-stm8-stm32-and-legacy-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4031-using-the-stm32f2-stm32f4-and-stm32f7-series-dma-controller-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4221-i2c-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4655-virtually-increasing-the-number-of-serial-communication-peripherals-in-stm32-applications-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4661-getting-started-with-stm32f7-series-mcu-hardware-development-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4676-stm32f7-series-peripheral-interconnections-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4731-stm32cube-mcu-package-examples-for-stm32f7-series-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4750-handling-of-soft-errors-in-stm32-applications-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4803-highspeed-si-simulations-using-ibis-and-boardlevel-simulations-using-hyperlynx-si-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4839-level-1-cache-on-stm32f7-series-and-stm32h7-series-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4850-stm32-mcus-spreadspectrum-clock-generation-principles-properties-and-implementation-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4990-getting-started-with-sigmadelta-digital-interface-on-applicable-stm32-microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5027-interfacing-pdm-digital-microphones-using-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5073-receiving-spdif-audio-stream-with-the-stm32f4f7h7-series-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4899-stm32-microcontroller-gpio-hardware-settings-and-lowpower-consumption-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5612-esd-protection-of-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5293-migration-guide-from-stm32f7-series-to-stmh74x75x-stm32h72x73x-and-stmh7a37bx-devices-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4838-introduction-to-memory-protection-unit-management-on-stm32-mcus-

stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4879-introduction-to-usb-hardware-and-pcb-guidelines-using-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5225-introduction-to-usb-typec-power-delivery-for-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5537-how-to-use-adc-oversampling-techniques-to-improve-signal-to-noise-ratio-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4230-introduction-to-random-number-generation-validation-using-the-nist-statistical-test-suite-for-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2867-guidelines-for-oscillator-design-on-stm8afals-and-stm32-mcus-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4013-introduction-to-timers-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4277-how-to-use-pwm-shutdown-for-motor-control-and-digital-power-conversion-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4861-introduction-to-lcd-ft-display-controller-lt-dc-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4908-getting-started-with-uart-automatic-baud-rate-detection-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5156-introduction-to-security-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5543-guidelines-for-enhanced-spi-communication-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/cd00211314-how-to-optimize-the-adc-accuracy-in-the-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2639-soldering-recommendations-and-package-information-for-leadfree-ecopack2-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5020-introduction-to-digital-camera-interface-dcml-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3154-how-to-use-can-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4566-how-to-extend-the-dac-performance-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5647-the-goertzel-algorithm-to-compute-individual-terms-of-the-discrete-fourier-transform-dft-in-stm32-products-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2606-introduction-to-system-memory-boot-mode-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5036-guidelines-for-thermal-management-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3126-how-to-use-dac-for-audio-and-waveform-generation-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3155-how-to-use-usart-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3156-how-to-use-usb-dfu-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4286-how-to-use-spi-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4759-introduction-to-using-the-hardware-realtime-clock-rtc-and-the-tamper-management-unit-tamp-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4760-introduction-to-quadspi-interface-for-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4776-how-to-use-generalpurpose-timer-peripheral-on-stm32-mcus-stmicroelectronics.pdf

Application Notes [---

Page 22](https://www.st.com/resource/en/application_note/an4936-migrating-</p></div><div data-bbox=)

applications-from-stm32f7-to-stm32h743h753-mcus-stmicroelectronics.pdf

Application Notes	https://www.st.com/resource/en/application_note/an4989-introduction-to-debug-toolbox-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4660-migrating-from-stm32f42xxx43xxx-to-stm32f7-mcus-stmicroelectronics.pdf
Design Notes & Tips	https://www.st.com/resource/en/design_tip/dt0117-microphone-array-beamforming-in-the-pcm-and-pdm-domain-stmicroelectronics.pdf
Errata Sheets	https://www.st.com/resource/en/errata_sheet/es0334-stm32f76xxx-and-stm32f77xxx-device-errata-stmicroelectronics.pdf
Datasheet	https://www.st.com/resource/en/datasheet/dm00273119.pdf
Programming Manuals	https://www.st.com/resource/en/programming_manual/pm0253-stm32f7-series-and-stm32h7-series-cortexm7-processor-programming-manual-stmicroelectronics.pdf
Reference Manuals	https://www.st.com/resource/en/reference_manual/rm0410-stm32f76xxx-and-stm32f77xxx-advanced-armbased-32bit-mcus-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1163-description-of-wlcsp-for-microcontrollers-and-recommendations-for-its-use-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1205-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-fpn-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1206-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-qfp-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1207-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-so-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1208-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-tssop-and-ssop-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1433-reference-device-marking-schematics-for-stm32-microcontrollers-and-microprocessors-

	stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1204-tape-and-reel-shipping-media-for-stm32-devices-in-bga-packages-stmicroelectronics.pdf
User Manuals	https://www.st.com/resource/en/user_manual/um2318-stm32f7-series-safety-manual-stmicroelectronics.pdf
User Manuals	https://www.st.com/resource/en/user_manual/um3251-stm32f7-series-ulcsaiec-607301603351-selftest-library-user-guide-stmicroelectronics.pdf