Chapter 7: Transmission Media

Sunghyun Cho
School of Computer Science
Hanyang University
chopro@hanyang.ac.kr

Figure 7.1 *Transmission medium and physical layer*

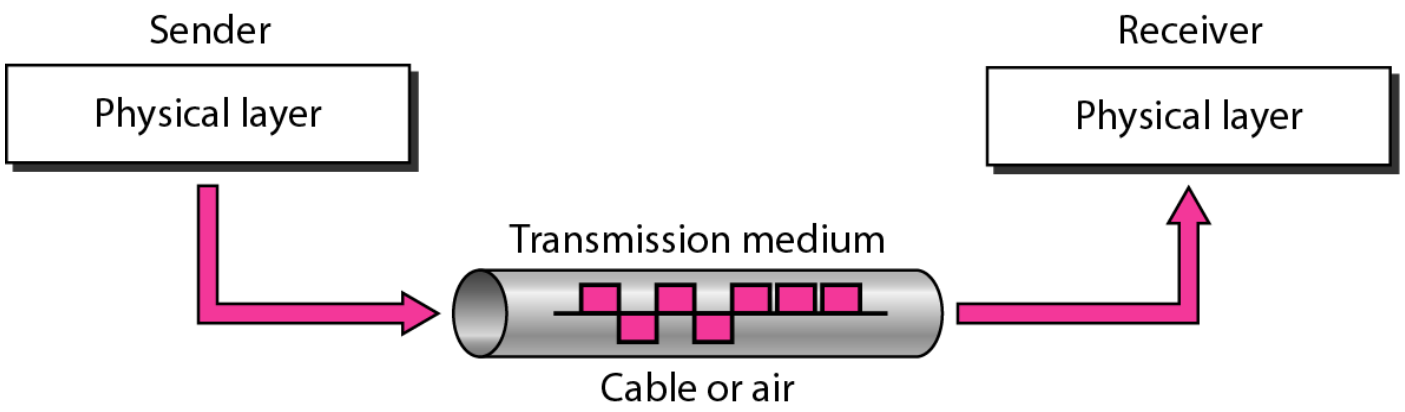

Figure 7.2 *Classes of transmission media*

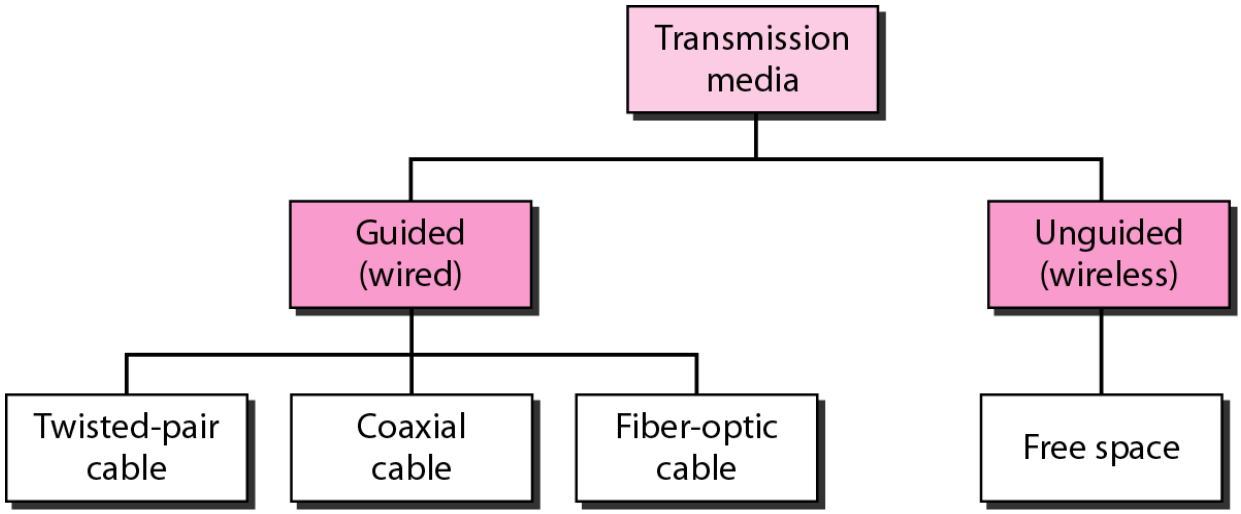

7-1 GUIDED MEDIA

Guided media, which are those that provide a conduit from one device to another, include twisted-pair cable, coaxial cable, and fiber-optic cable.

Topics discussed in this section:

Twisted-Pair Cable
Coaxial Cable
Fiber-Optic Cable

Figure 7.3 *Twisted-pair cable*

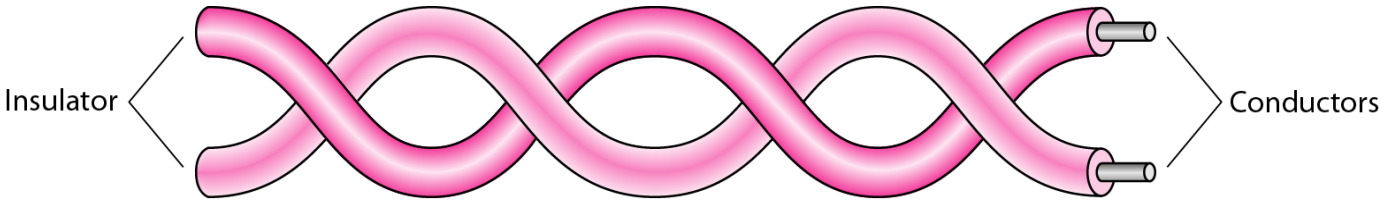

Figure 7.4 *UTP and STP cables*

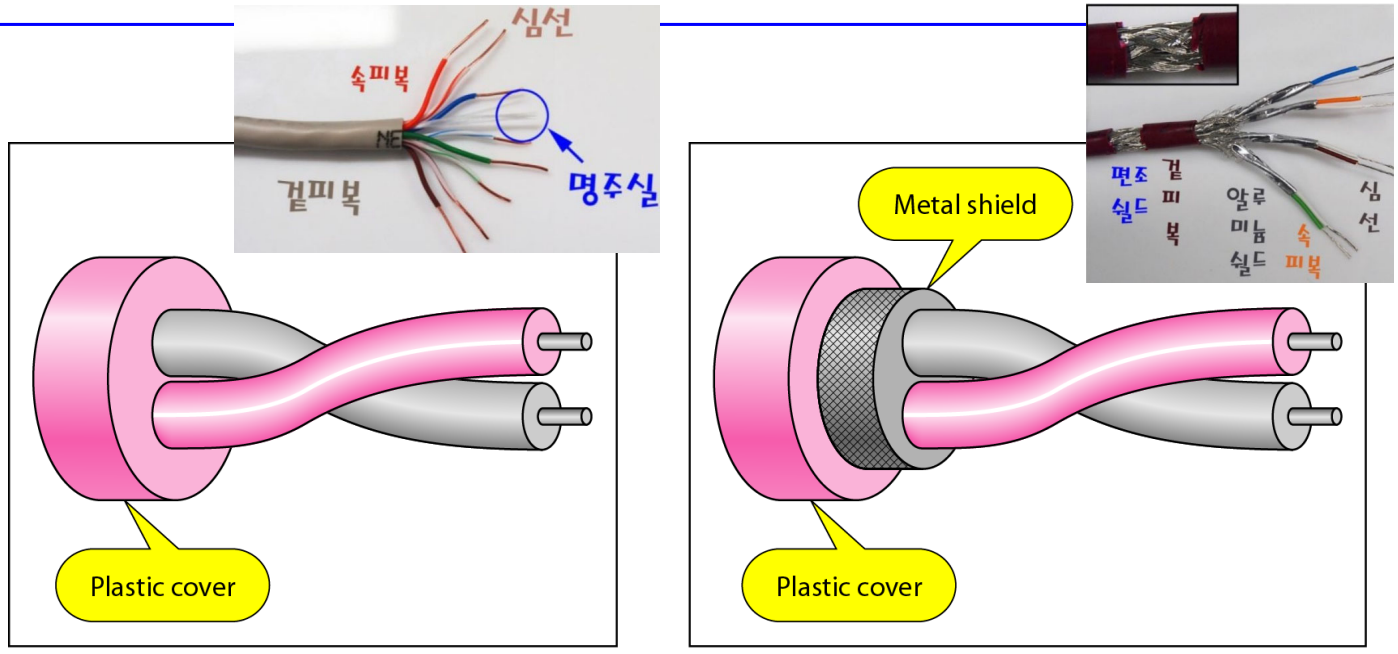

a. UTP
(Unshielded Twisted Pair)

b. STP
(Shielded Twisted Pair)

Table 7.1 *Categories of unshielded twisted-pair cables*

Category	*Specification*	*Data Rate (Mbps)*	*Use*
1	Unshielded twisted-pair used in telephone	< 0.1	Telephone
2	Unshielded twisted-pair originally used in T-lines	2	T-1 lines
3	Improved CAT 2 used in LANs	10	LANs
4	Improved CAT 3 used in Token Ring networks	20	LANs
5	Cable wire is normally 24 AWG with a jacket and outside sheath	100	LANs
5E	An extension to category 5 that includes extra features to minimize the crosstalk and electromagnetic interference	125	LANs
6	A new category with matched components coming from the same manufacturer. The cable must be tested at a 200-Mbps data rate.	200	LANs
7	Sometimes called SSTP (shielded screen twisted-pair). Each pair is individually wrapped in a helical metallic foil followed by a metallic foil shield in addition to the outside sheath. The shield decreases the effect of crosstalk and increases the data rate.	600	LANs

Figure 7.5 *UTP connector*

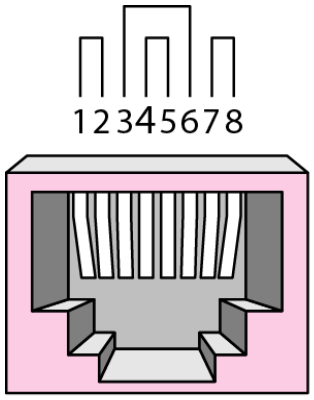

RJ-45 Female

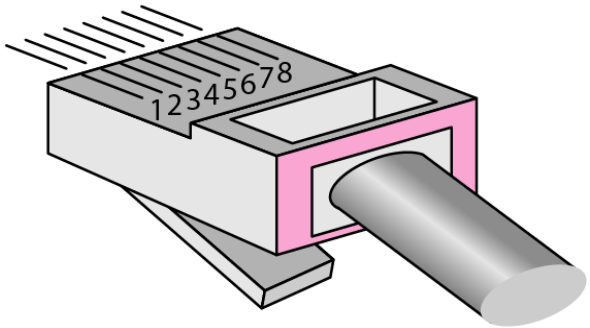

RJ-45 Male

Figure 7.7 *Coaxial cable*

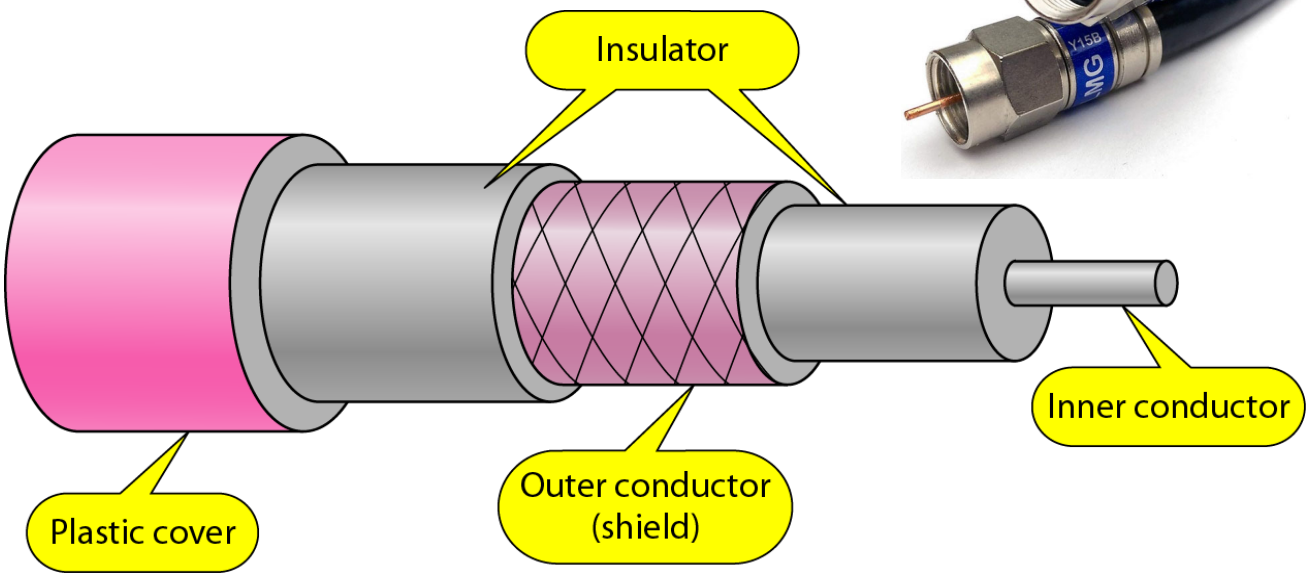

Table 7.2 *Categories of coaxial cables*

Category	*Impedance*	*Use*
RG-59	75 Ω	Cable TV
RG-58	50 Ω	Thin Ethernet
RG-11	50 Ω	Thick Ethernet

Figure 7.11 *Optical fiber*

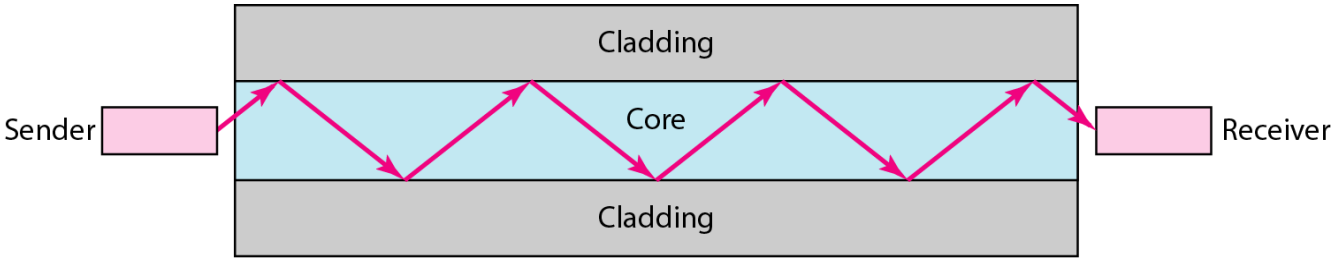

Figure 7.12 *Propagation modes*

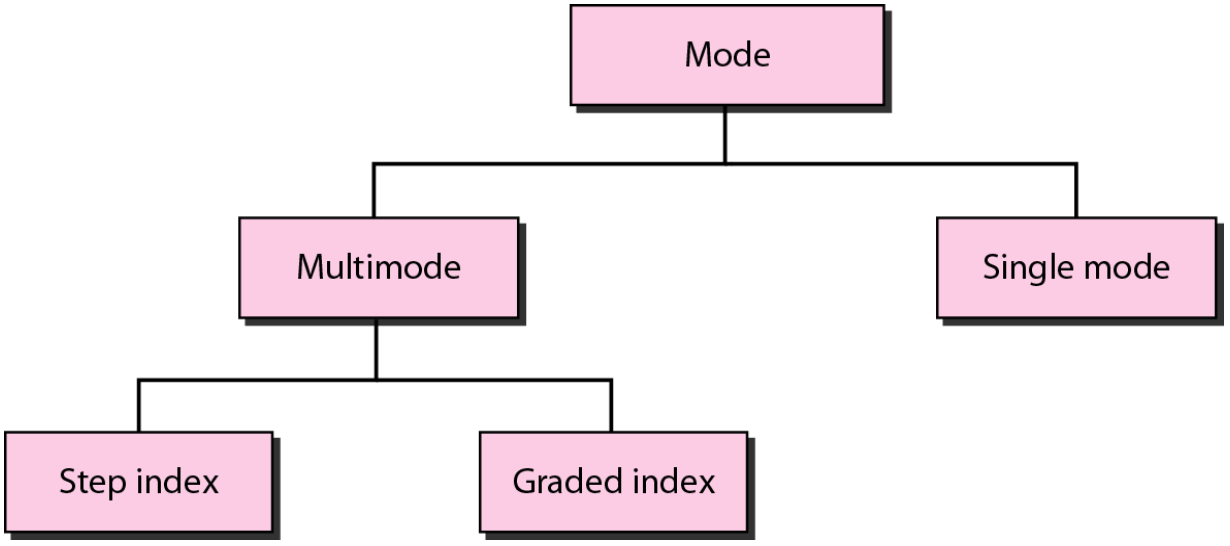

Figure 7.13 *Modes*

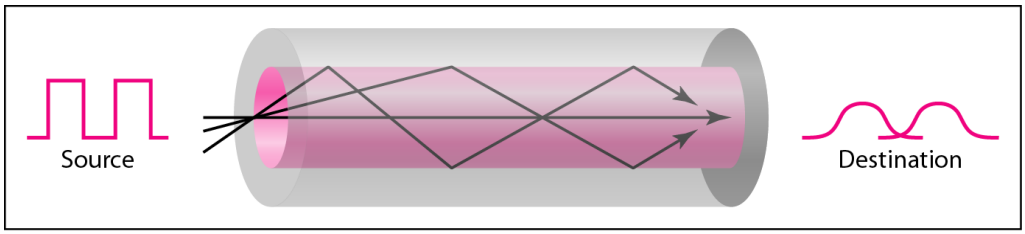

a. Multimode, step index

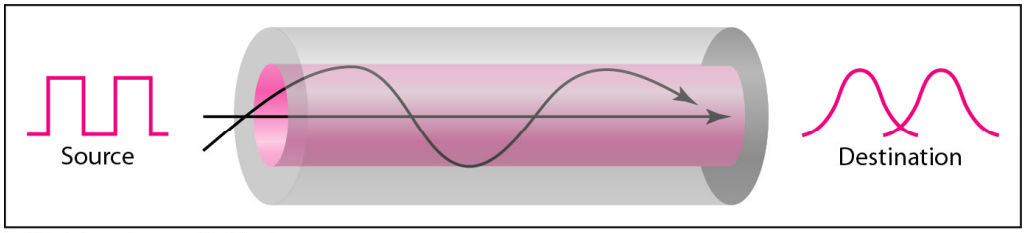

b. Multimode, graded index

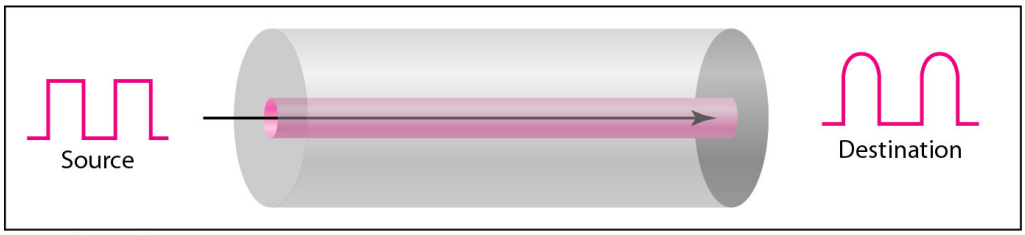

c. Single mode

Figure 7.14 *Fiber construction*

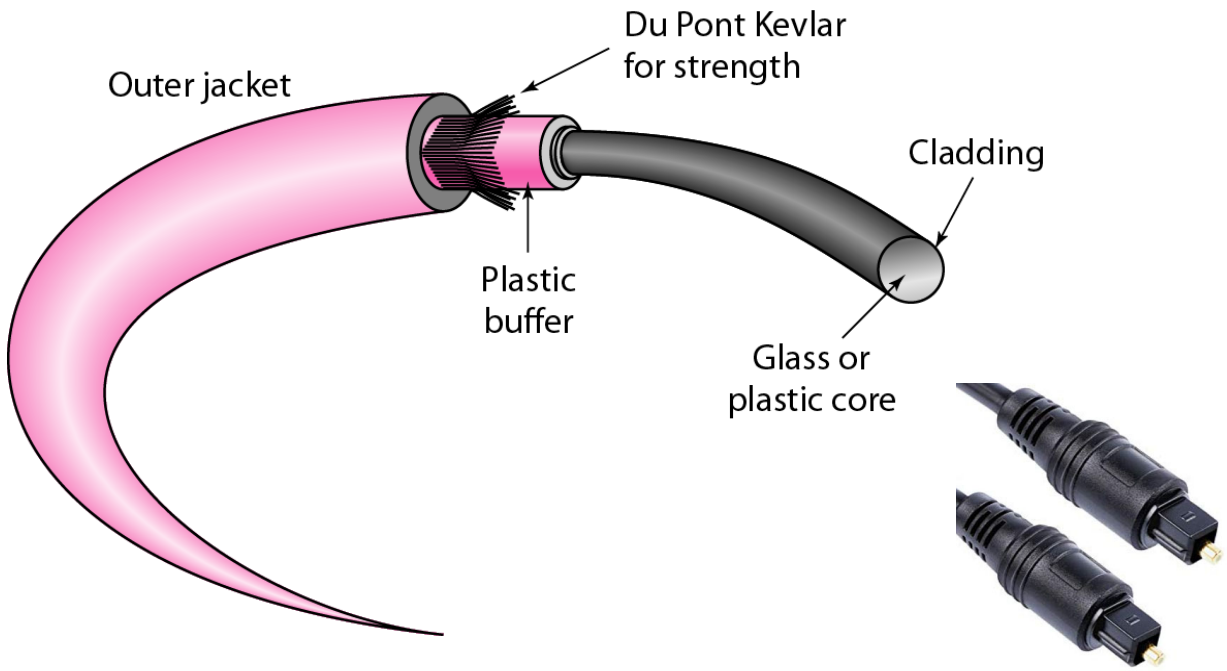

Figure 7.15 *Fiber-optic cable connectors*

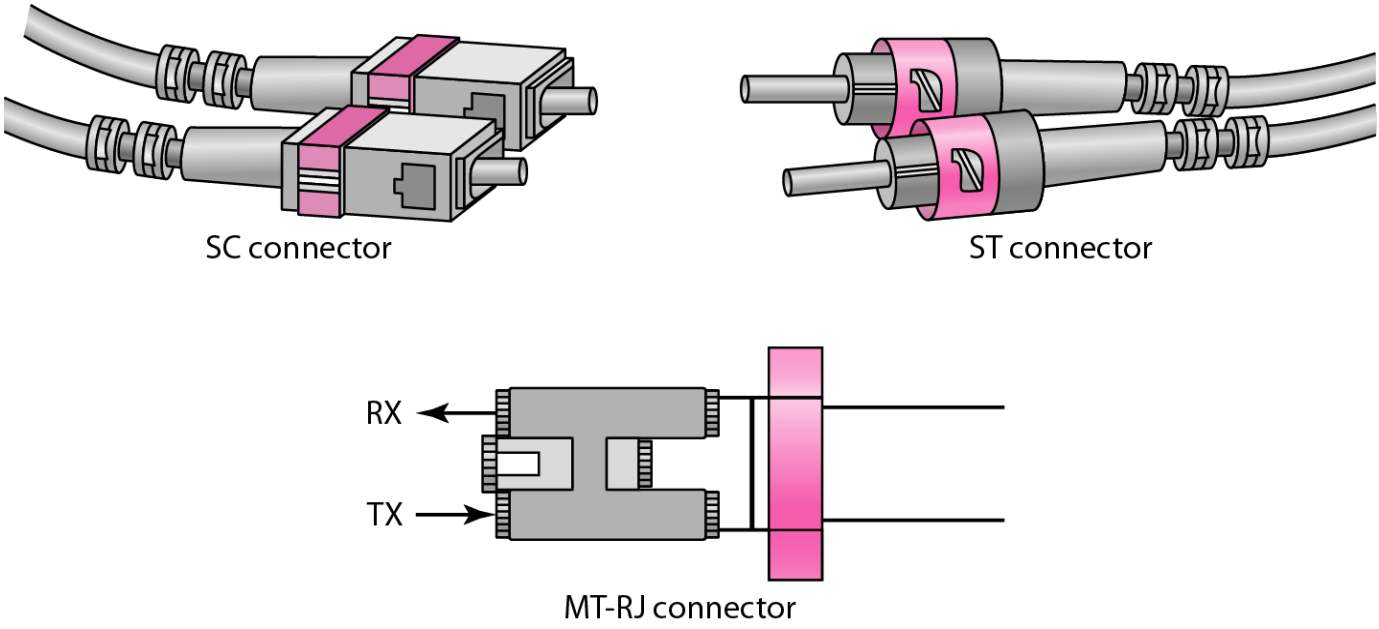

7-2 UNGUIDED MEDIA: WIRELESS

Unguided media transport electromagnetic waves without using a physical conductor. This type of communication is often referred to as wireless communication.

Topics discussed in this section:

Radio Waves
Microwaves
Infrared

Figure 7.17 *Electromagnetic spectrum for wireless communication*

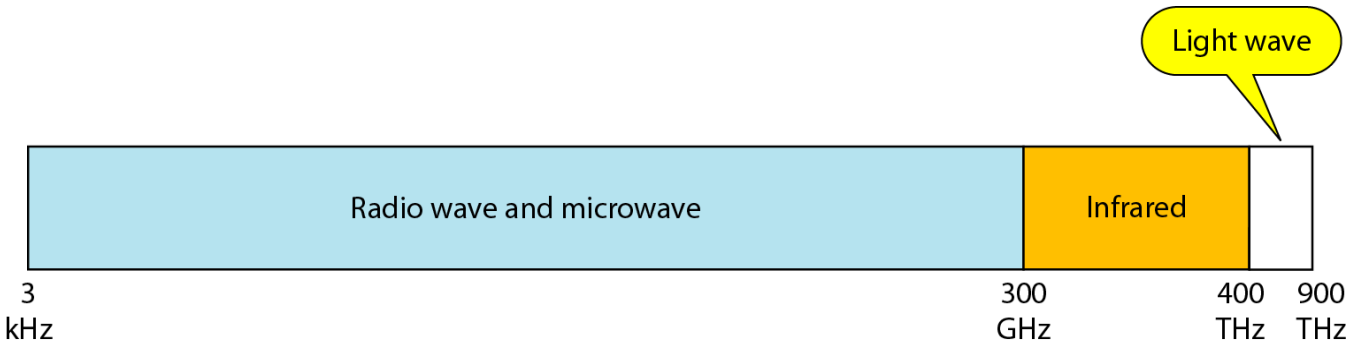

Figure 7.18 *Propagation methods*

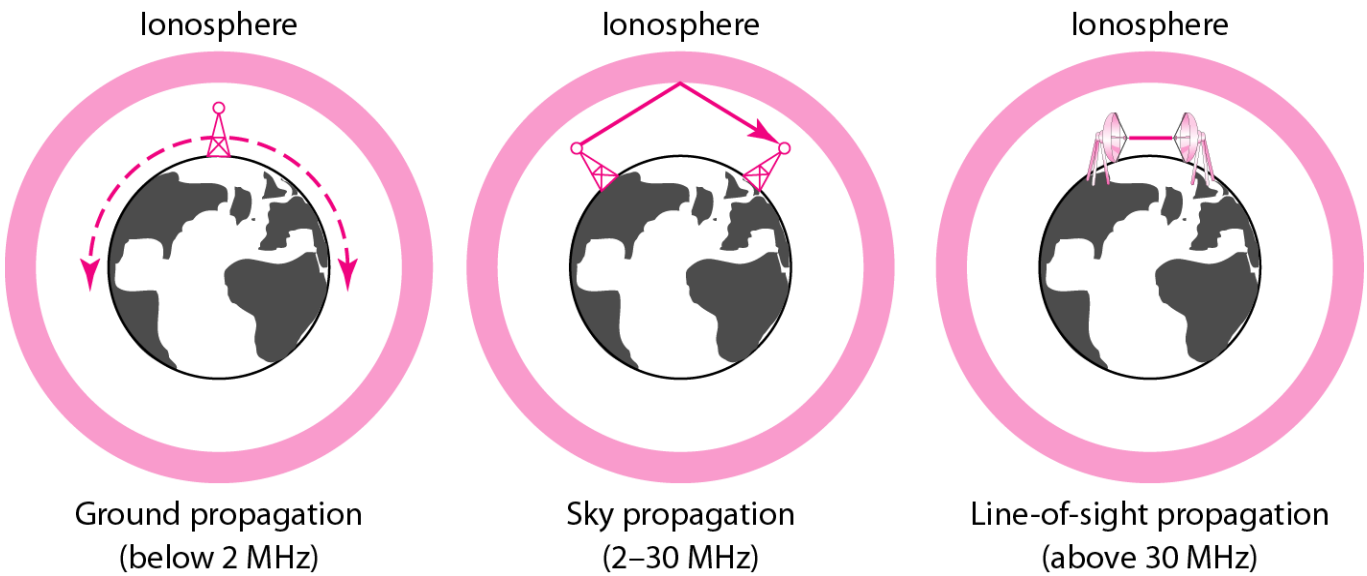

Table 7.4 *Bands*

Band	*Range*	*Propagation*	*Application*
VLF (very low frequency)	3–30 kHz	Ground	Long-range radio navigation
LF (low frequency)	30–300 kHz	Ground	Radio beacons and navigational locators
MF (middle frequency)	300 kHz–3 MHz	Sky	AM radio
HF (high frequency)	3–30 MHz	Sky	Citizens band (CB), ship/aircraft communication
VHF (very high frequency)	30–300 MHz	Sky and line-of-sight	VHF TV, FM radio
UHF (ultrahigh frequency)	300 MHz–3 GHz	Line-of-sight	UHF TV, cellular phones, paging, satellite
SHF (superhigh frequency)	3–30 GHz	Line-of-sight	Satellite communication
EHF (extremely high frequency)	30–300 GHz	Line-of-sight	Radar, satellite

Figure 7.19 *Wireless transmission waves*

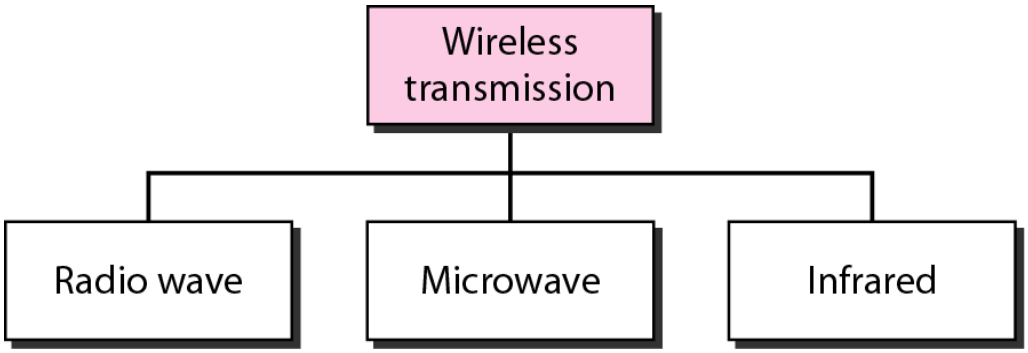

Name	Wavelength	Frequency (Hz)
Gamma ray	less than 0.02 nm	more than 15 EHz
X-ray	0.01 nm – 10 nm	30 EHz – 30 PHz
Ultraviolet	10 nm – 400 nm	30 PHz – 750 THz
Visible	390 nm – 750 nm	770 THz – 400 THz
Infrared	750 nm – 1 mm	400 THz – 300 GHz
Microwave	1 mm – 1 meter	300 GHz – 300 MHz
Radio	1 m – 100,000 km	300 MHz – 3 Hz

Figure 7.20 *Omnidirectional antenna*

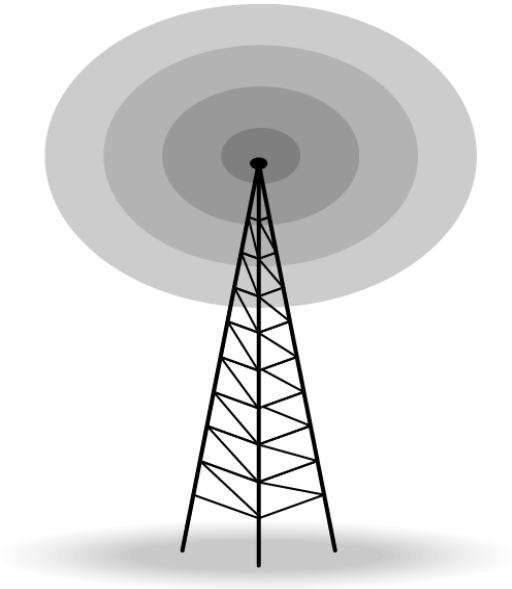

Note

Radio waves are used for multicast communications, such as radio and television, and paging systems.

Figure 7.21 *Unidirectional antennas*

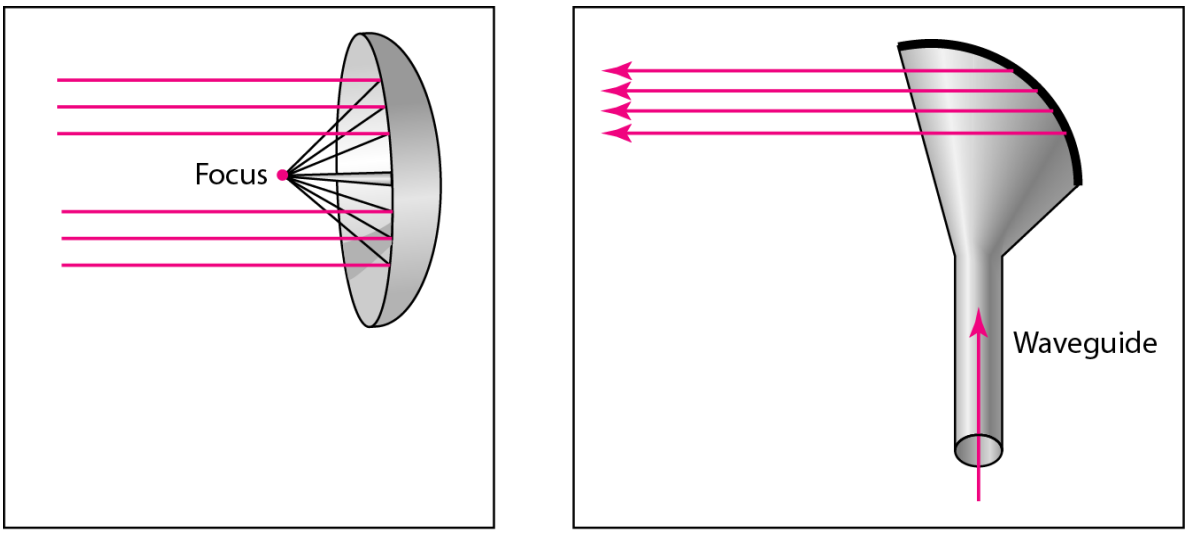

a. Dish antenna

b. Horn antenna

Note

Microwaves are used for unicast communication such as cellular telephones, satellite networks, and wireless LANs.

Note

Infrared signals can be used for short-range communication in a closed area using line-of-sight propagation.