

ML/F01AM CREW & OFFICER MESS

LES RACK - DK02 FR62 STBD - ELA EL. CABINET

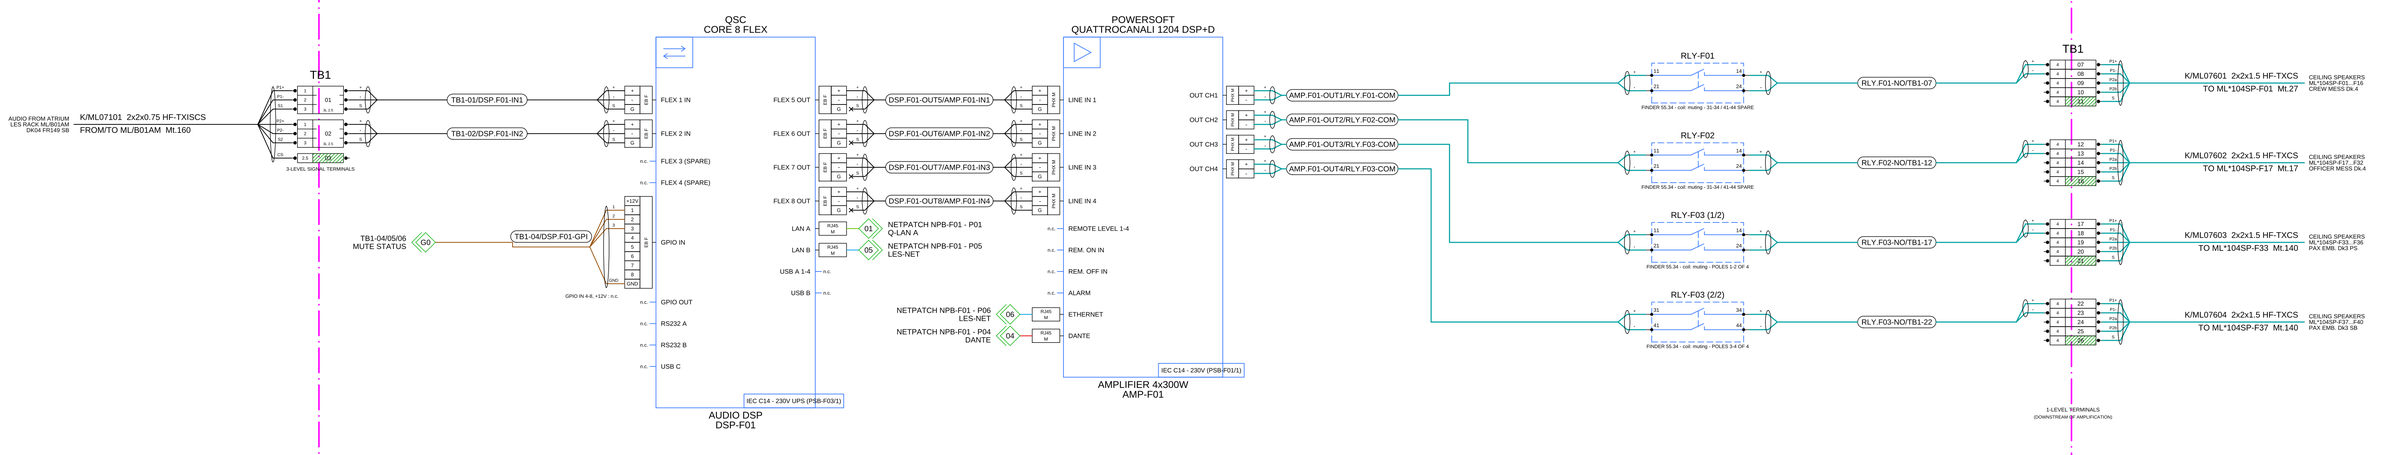

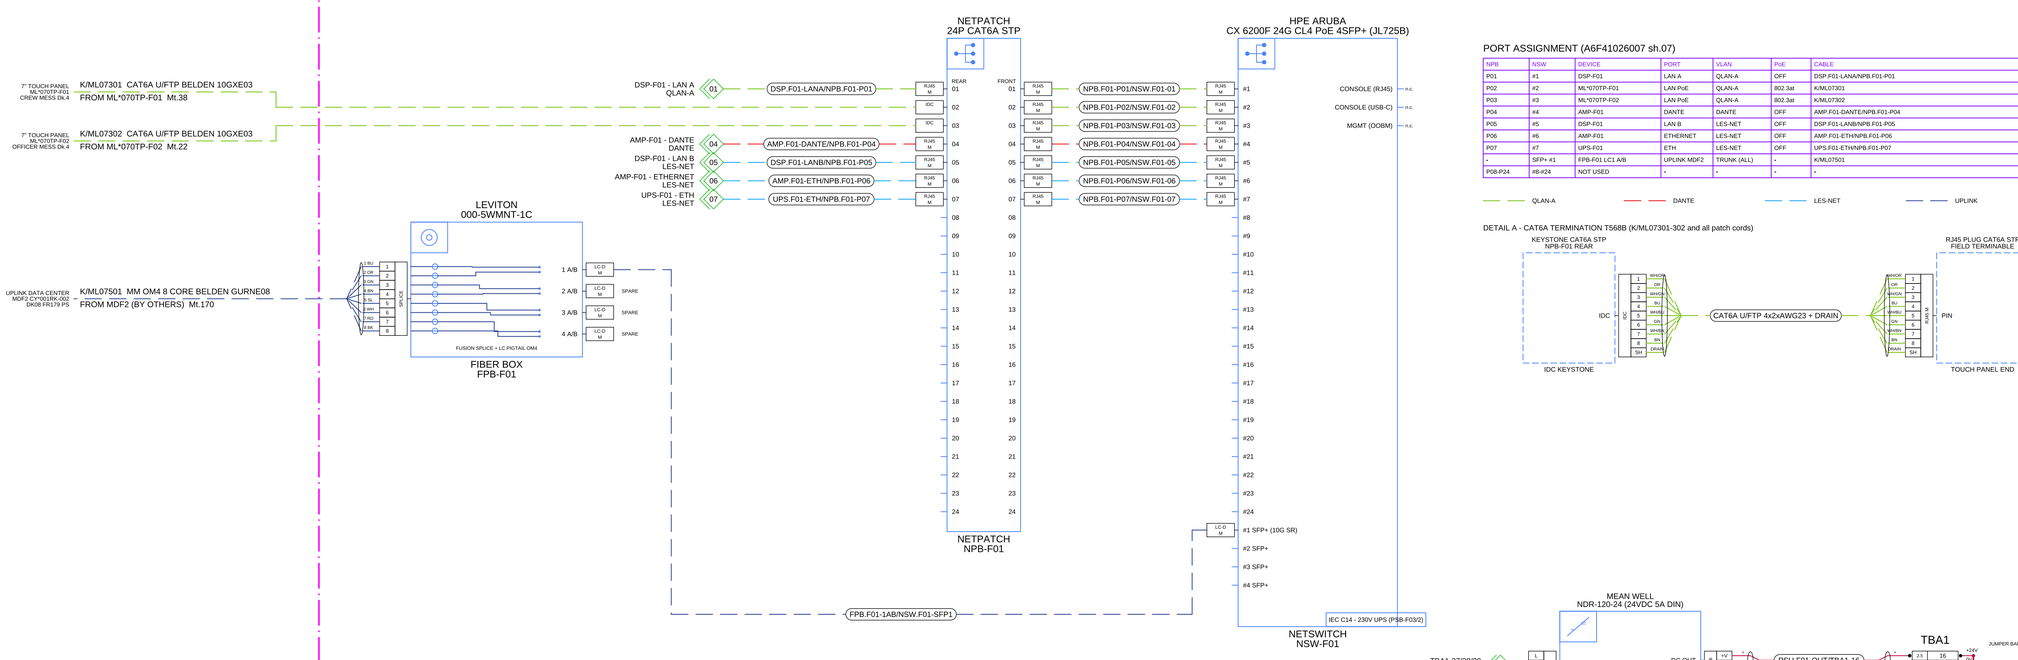


PORT ASSIGNMENT (A6F41026007 sh.07)

NPB	NSW	DEVICE	PORT	VLAN	PoE	CABLE
P01	#1	DSP-F01	LAN A	QLAN-A	OFF	DSP.F01-LANA/NPB.F01-P01
P02	#2	ML*070TP-F01	LAN PoE	QLAN-A	802.3at	K/ML07301
P03	#3	ML*070TP-F02	LAN PoE	QLAN-A	802.3at	K/ML07302
P04	#4	AMP-F01	DANTE	DANTE	OFF	AMP.F01-DANTE/NPB.F01-P04
P05	#5	DSP-F01	LAN B	LES-NET	OFF	DSP.F01-LANB/NPB.F01-P05
P06	#6	AMP-F01	ETHERNET	LES-NET	OFF	AMP.F01-ETH/NPB.F01-P06
P07	#7	UPS-F01	ETH	LES-NET	OFF	UPS.F01-ETH/NPB.F01-P07
-	SFP+ #1	FPB-F01 LC1 A/B	UPLINK MDF2	TRUNK (ALL)	-	K/ML07501
P08-P24	#8-#24	NOT USED	-	-	-	-

QLAN-A · DANTE · LES-NET · UPLINK

DETAIL A - CAT6A TERMINATION T568B (K/ML07301-302 and all patch cords)

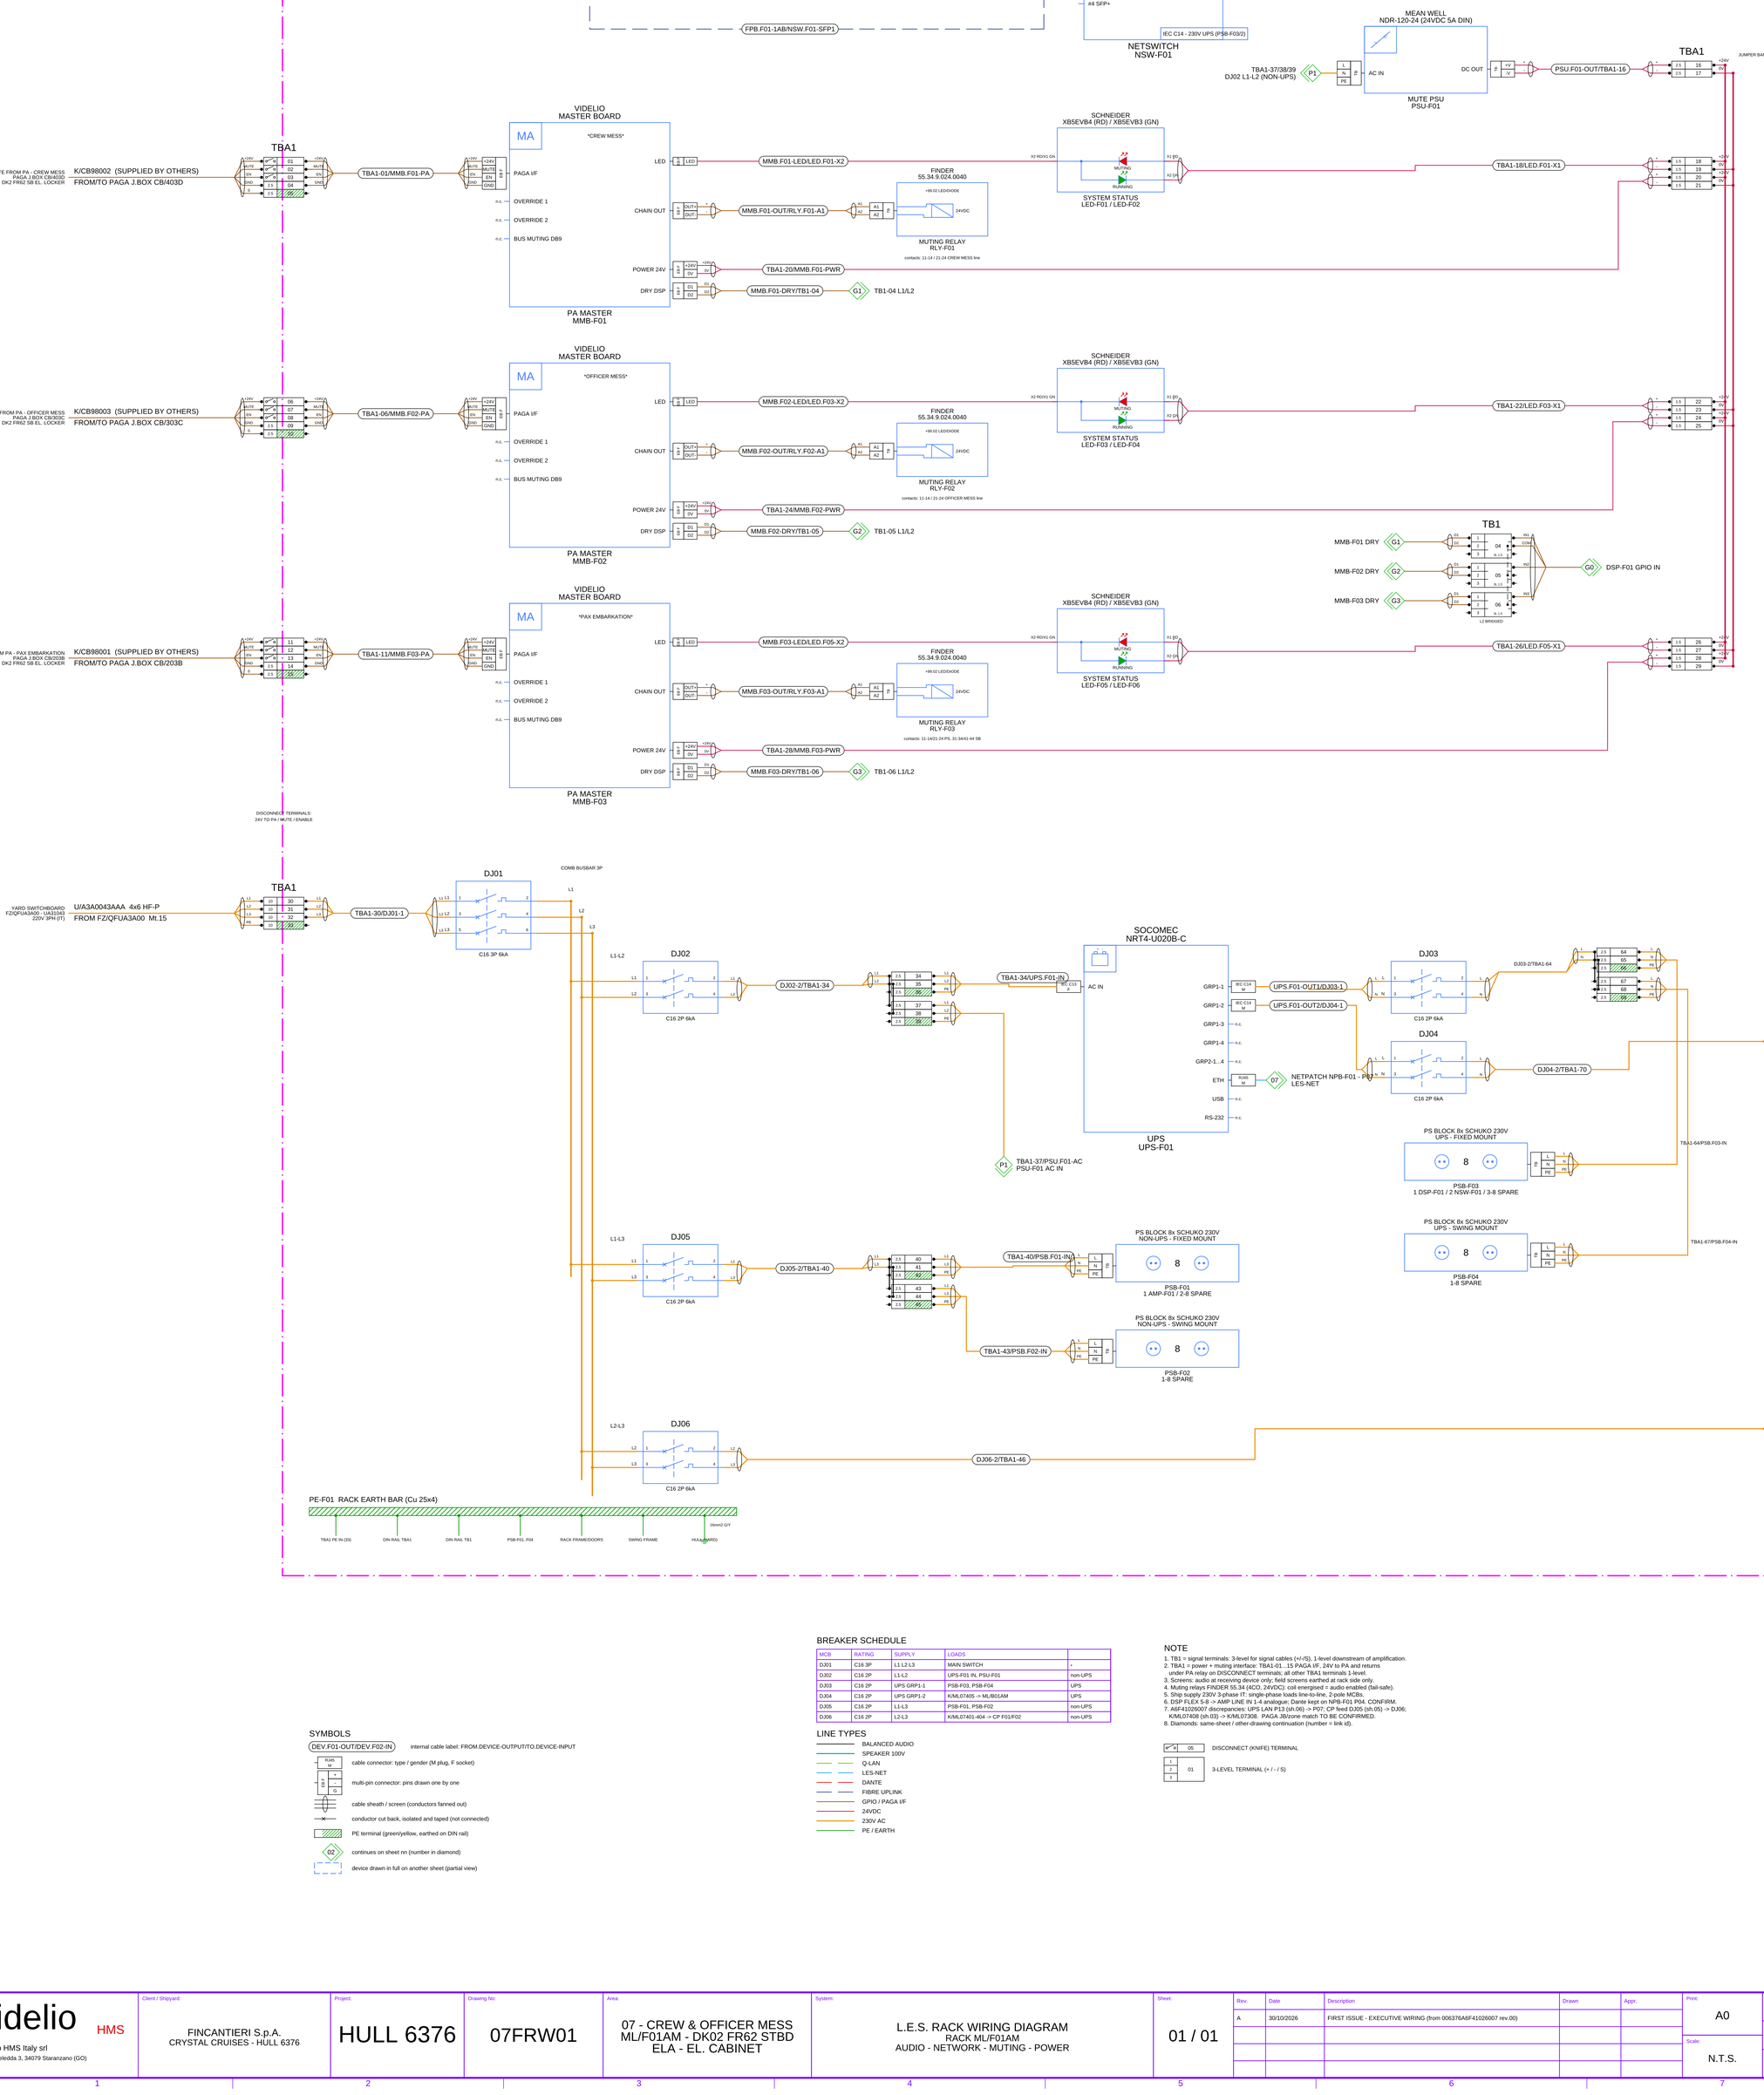

BREAKER SCHEDULE

MCB	RATING	SUPPLY	LOADS	
DJ01	C16 3P	L1 L2 L3	MAIN SWITCH	-
DJ02	C16 2P	L1-L2	UPS-F01 IN, PSU-F01	non-UPS
DJ03	C16 2P	UPS GRP1-1	PSB-F03, PSB-F04	UPS
DJ04	C16 2P	UPS GRP1-2	K/ML07405 -> ML/B01AM	UPS
DJ05	C16 2P	L1-L3	PSB-F01, PSB-F02	non-UPS
DJ06	C16 2P	L2-L3	K/ML07401-404 -> CP F01/F02	non-UPS

NOTE

1. TB1 = signal terminals: 3-level for signal cables (+/-/S), 1-level downstream of amplification.
2. TBA1 = power + muting interface: TBA1-01...15 PAGA I/F, 24V to PA and returns under PA relay on DISCONNECT terminals; all other TBA1 terminals 1-level.
3. Screens: audio at receiving device only; field screens earthed at rack side only.
4. Muting relays FINDER 55.34 (4CO, 24VDC): coil energised = audio enabled (fail-safe).
5. Ship supply 230V 3-phase IT: single-phase loads line-to-line, 2-pole MCBs.
6. DSP FLEX 5-8 -> AMP LINE IN 1-4 analogue; Dante kept on NPB-F01 P04. CONFIRM.
7. A6F41026007 discrepancies: UPS LAN P13 (sh.06) -> P07; CP feed DJ05 (sh.05) -> DJ06; K/ML07408 (sh.03) -> K/ML07308. PAGA J/Bzone match TO BE CONFIRMED.
8. Diamonds: same-sheet / other-drawing continuation (number = link id).

SYMBOLS

DEV.F01-OUT/DEV.F02-IN — internal cable label: FROM.DEVICE-OUTPUT/TO.DEVICE-INPUT

cable connector: type / gender (M plug, F socket)

multi-pin connector: pins drawn one by one

cable sheath / screen (conductors fanned out)

conductor cut back, isolated and taped (not connected)

PE terminal (green/yellow, earthed on DIN rail)

continues on sheet nn (number in diamond)

device drawn in full on another sheet (partial view)

LINE TYPES

- BALANCED AUDIO
- SPEAKER 100V
- Q-LAN
- LES-NET
- DANTE
- FIBRE UPLINK
- GPIO / PAGA I/F
- 24VDC
- 230V AC
- PE / EARTH

DISCONNECT (KNIFE) TERMINAL

3-LEVEL TERMINAL (+ / - / S)

Client / Shipyard:	Project:	Drawing No:	Area:	System:	Sheet:
FINCANTIERI S.p.A. CRYSTAL CRUISES - HULL 6376	HULL 6376	07FRW01	07 - CREW & OFFICER MESS ML/F01AM - DK02 FR62 STBD ELA - EL. CABINET	L.E.S. RACK WIRING DIAGRAM RACK ML/F01AM AUDIO - NETWORK - MUTINGS - POWER	01 / 01

Rev.	Date	Description	Drawn	Appr.
A	30/10/2026	FIRST ISSUE - EXECUTIVE WIRING (from 006376A6F41026007 rev.00)		

Print: A0 · Scale: N.T.S. · Date: 30/10/2026 · Drawn by: · Approved:

COPYRIGHT, REPRODUCTION AND/OR DISCLOSURE IS FORBIDDEN WITHOUT VIDELIO HMS WRITTEN AUTHORIZATION

Ref.: 006376A6F41026007 rev.00

videlio HMS
Videlio HMS Italy srl
via G. Deledda 3, 34079 Staranzano (GO)