FFC-80-A-100 — cable procurement and orientation

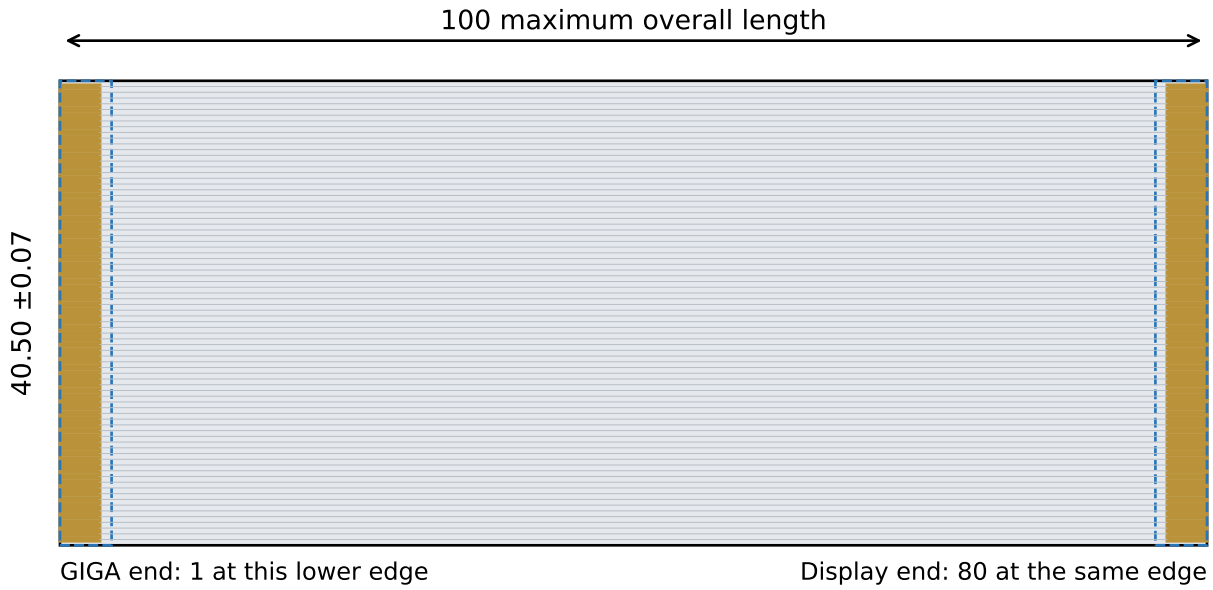

80 parallel conductors; pitch 0.50 mm; same-side exposed contacts (Type A). Gold-plated mating finish. Straight-sided ends; no latch ears or custom side notches.

Mating thickness 0.30 ±0.05 mm. Stiffener thickness at least 0.188 mm. Exposed contact length at least 3.5 mm; stiffener length at least 4.5 mm. All dimensions must also meet the Hirose FH28 cable-end drawing.

Dashed blue regions show the stiffeners on the opposite face. Gold regions are both on the face shown. Fit that exposed-contact face to the FH28 contact face shown in its manufacturer drawing; do not identify orientation from blue stiffener colour alone.

Both PCB sockets: Hirose FH28H-80S-0.5SH(05). With the two top-mounted sockets facing each other, GIGA pin n reaches display pin 81-n. Confirm this by continuity before applying power.

24V power: GIGA 1/3 <-> display 80/78. Panel 3.3V reference return: GIGA 5/7/9 <-> display 76/74/72. READY: GIGA 10 <-> display 71. 39 grounds; PCLK 31 <-> 50 has ground on both sides.

Rated at least 60V and 0.5A per conductor; copper cross-section >=0.0105 mm2 (e.g. 0.30 x 0.035 mm). Procure as custom drawing FFC-80-A-100 revision E if no catalogue cable meets every requirement. The cable is not part of either PCB SMT BOM.