



Contrasting network morphology


(a) Site A: Suzhou

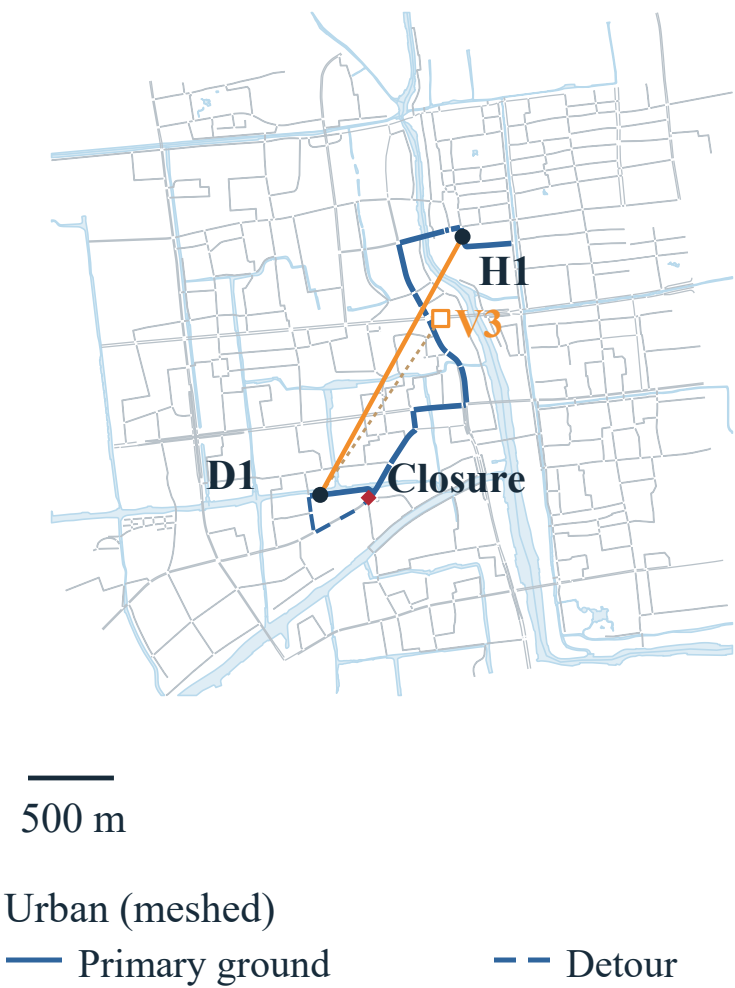


(b) Site B: Amsterdam

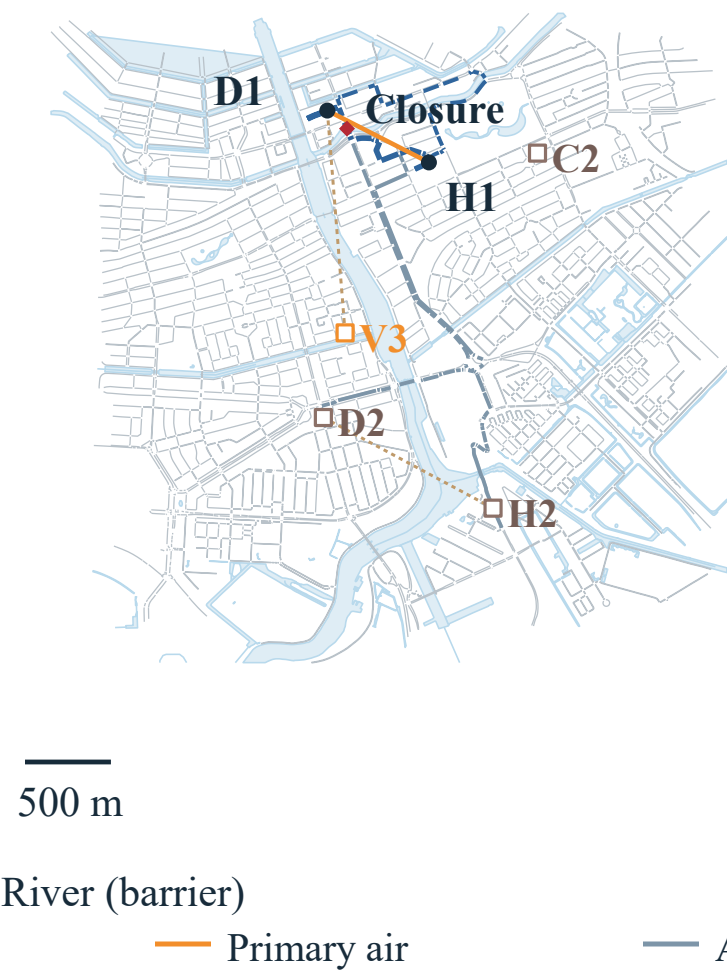


(c) Site C: Edmonton

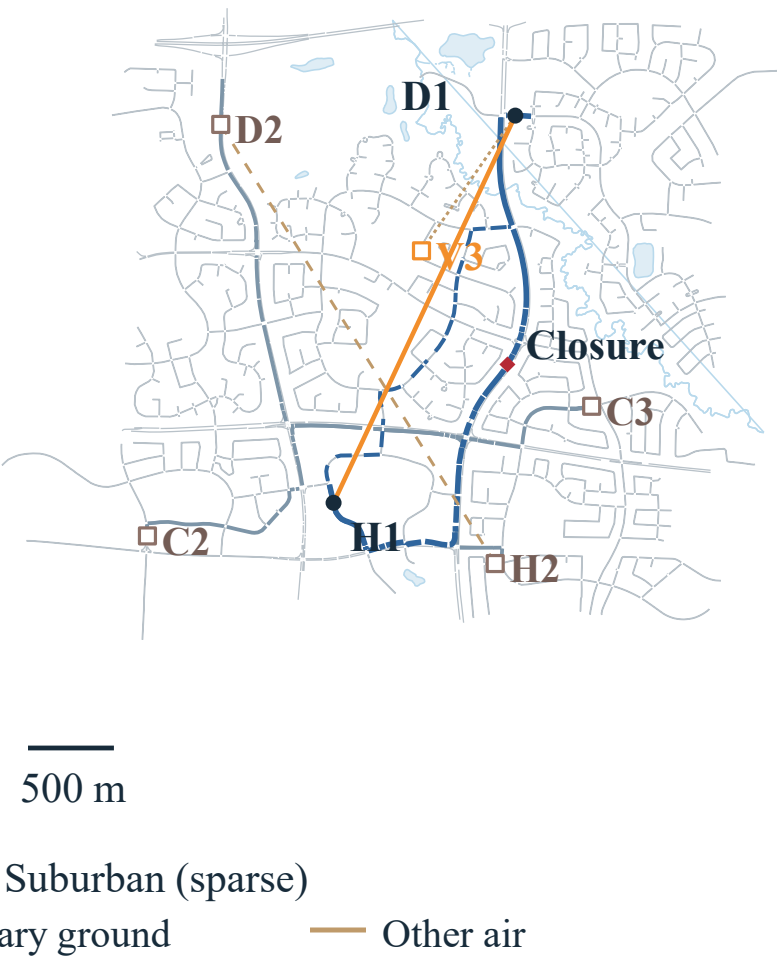


a Completion time

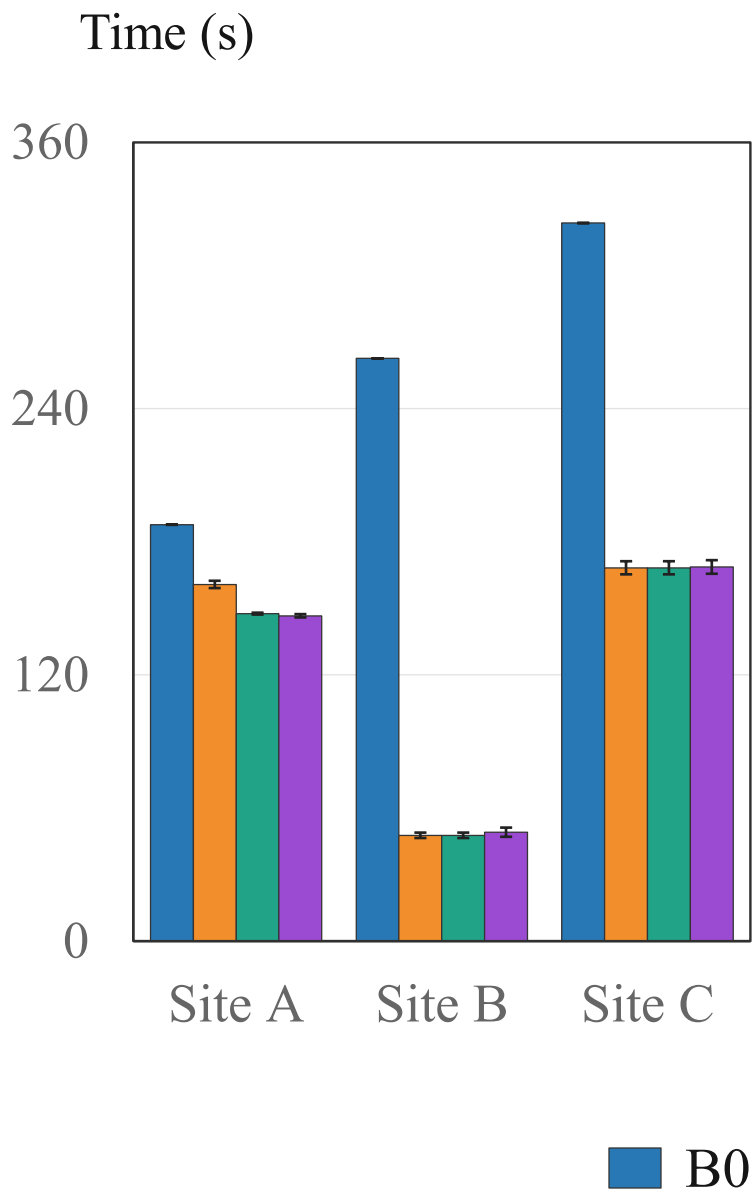

b Missed deadlines

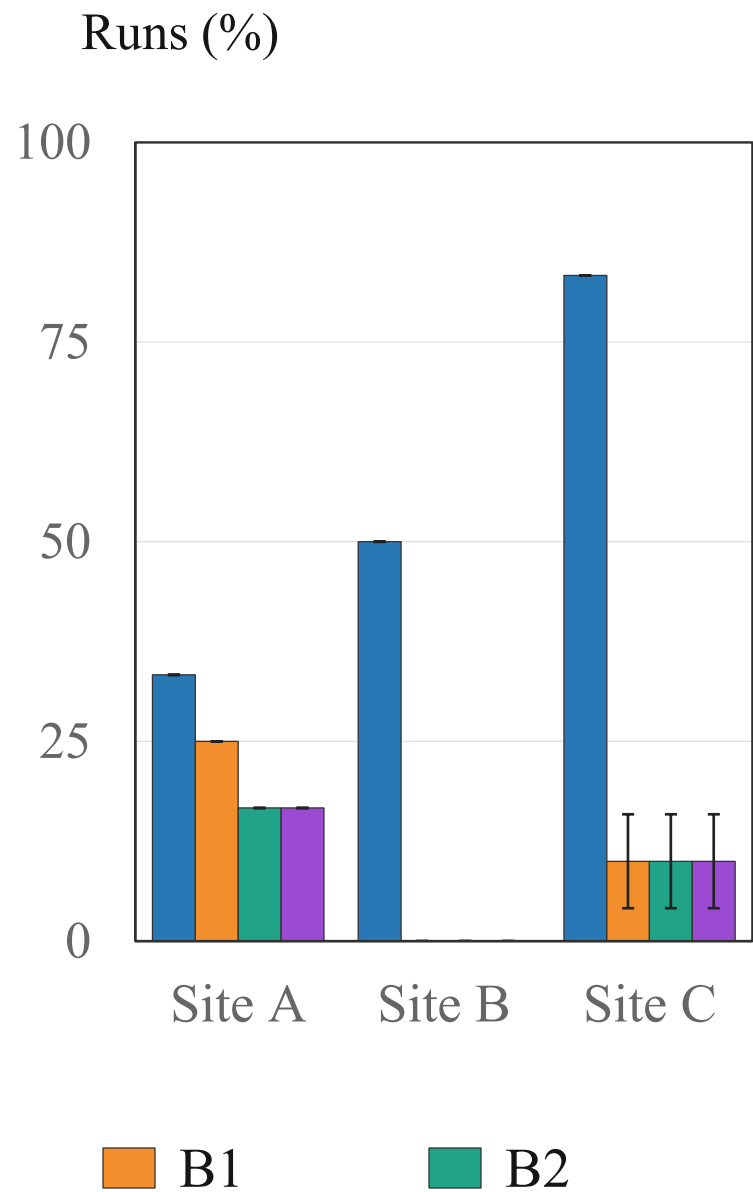


c Incumbent damage

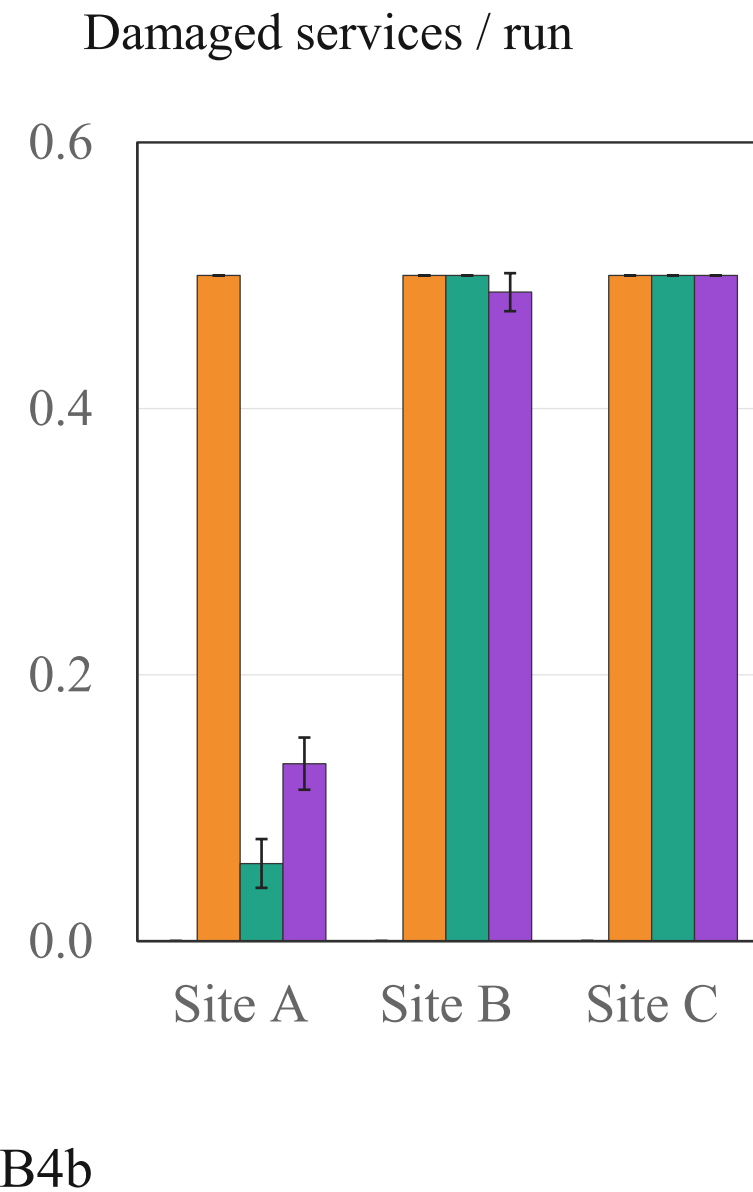


Supervisory decision regimes

(a) Candidate geometry at Site A

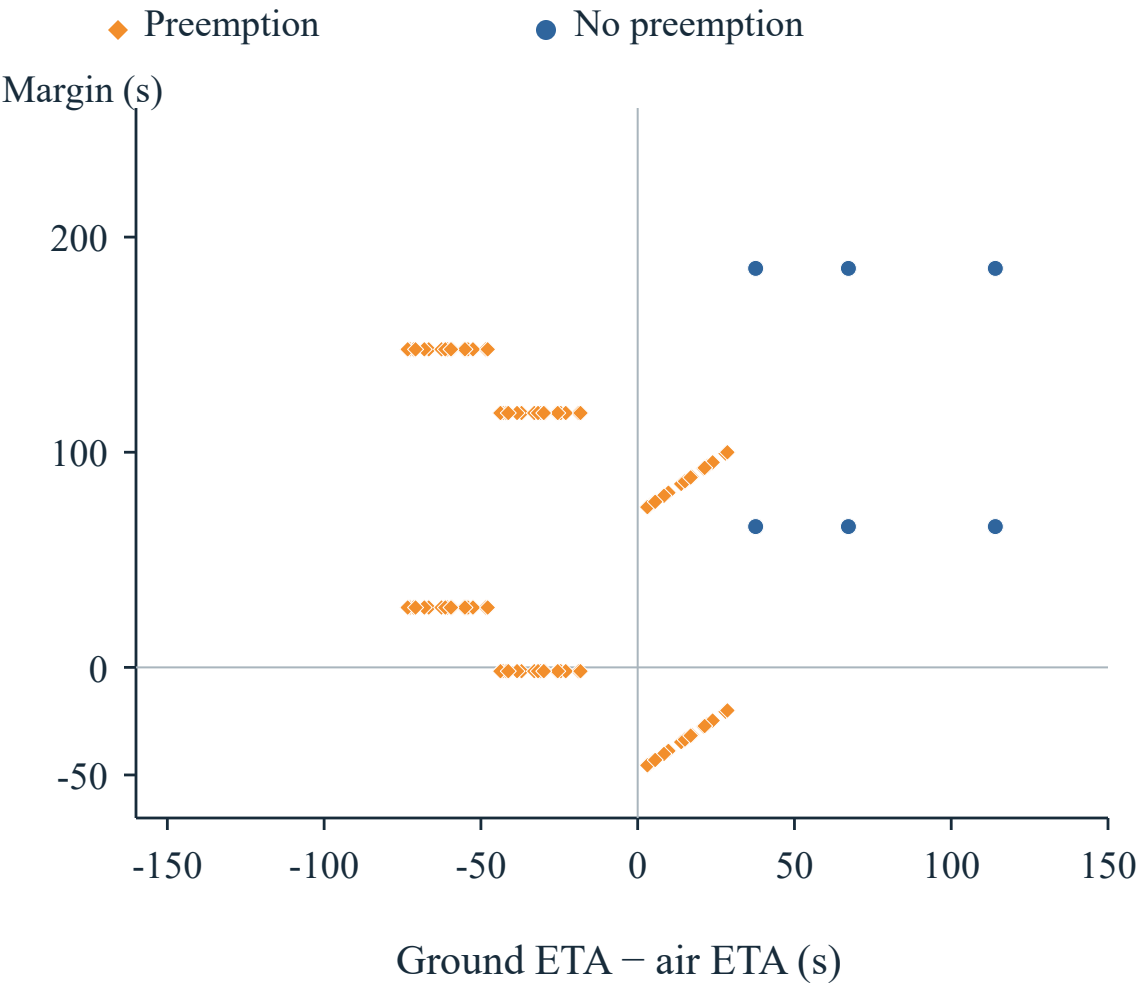


(b) Faster air vs timely ground

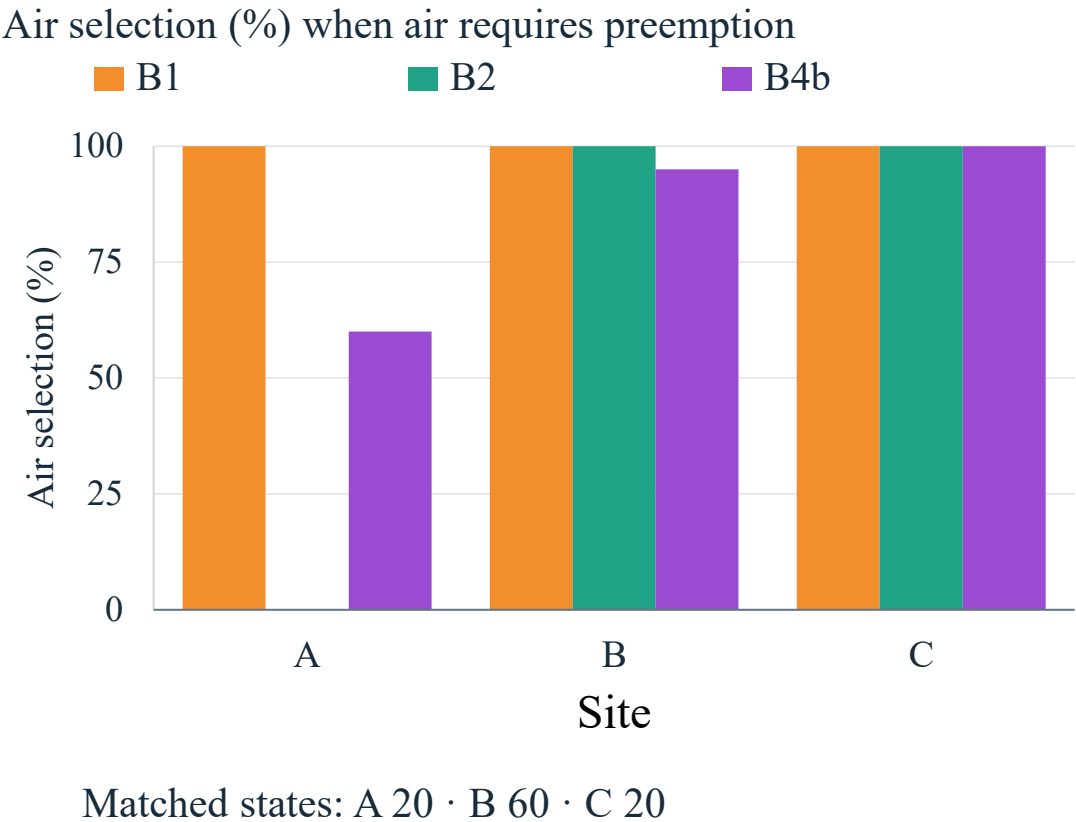

(c) No candidate predicted timely

Observed late: A 40/40 · C 24/27 per policy


a Site A

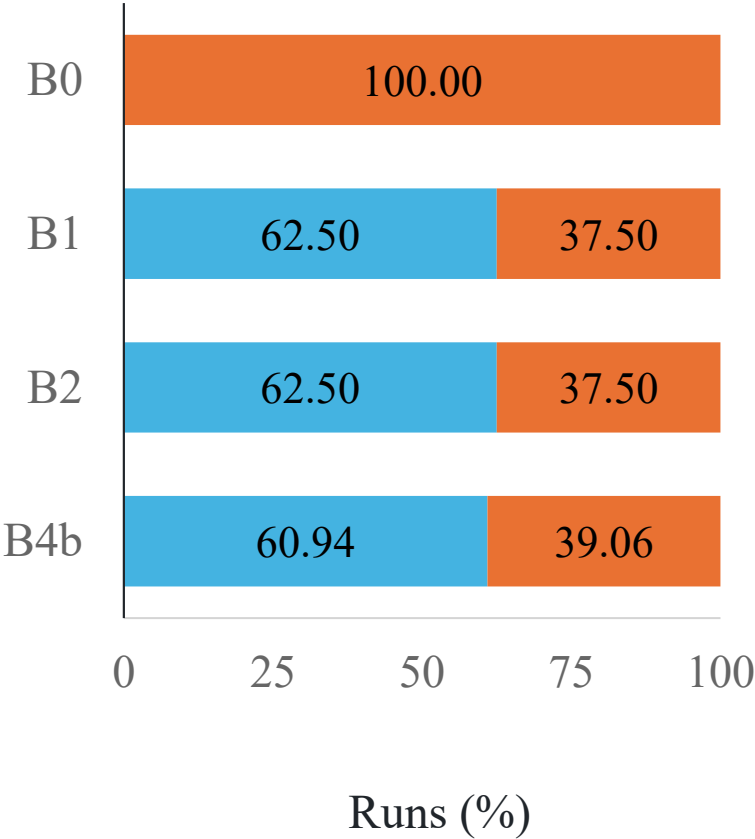

Path restored / affected

B1 200 / 200
B2 200 / 200
B4b 191 / 191


b Site B

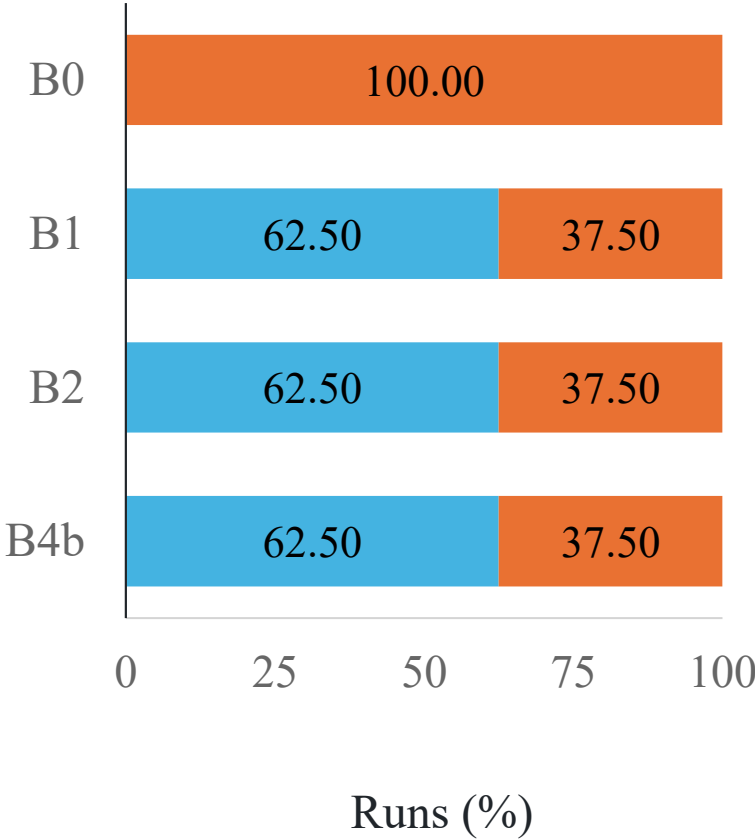

Path restored / affected

B1 200 / 200
B2 200 / 200
B4b 199 / 199

c Site C

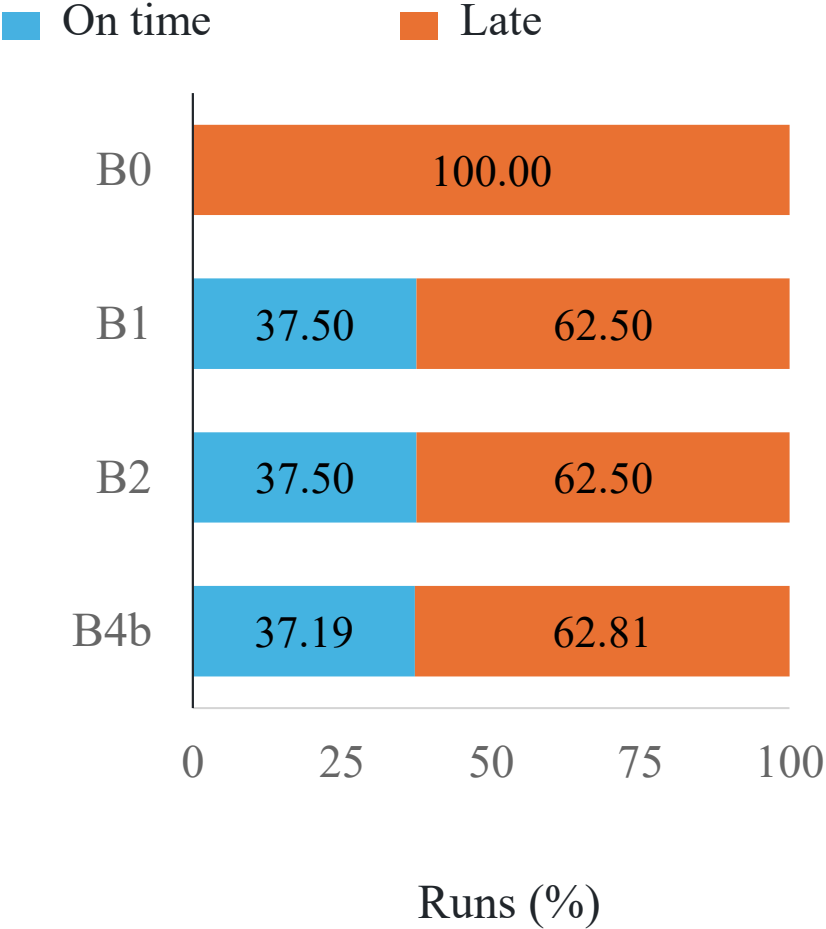

Path restored / affected

B1 200 / 200
B2 200 / 200
B4b 201 / 201

a Site A

	L1	L2	L3	L4
B0	240	240	240	240
B1	0	240	0	120
B2	0	240	0	120
B4b	6	240	1.7	123.4

b Site B


	L1	L2	L3	L4
B0	240	240	375	375
B1	0	120	135	255
B2	0	120	135	255
B4b	0	120	135	255

c Site C


	L1	L2	L3	L4
B0	240	240	375	375
B1	240	240	135	375
B2	240	240	135	375
B4b	240	240	135	375




d B4b – B0

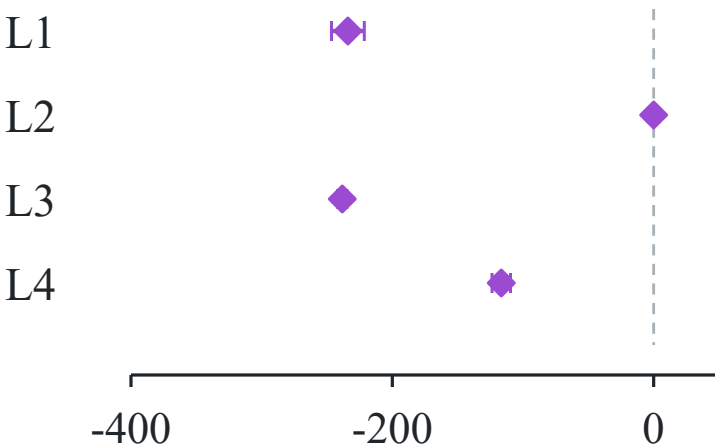

e B4b – B0

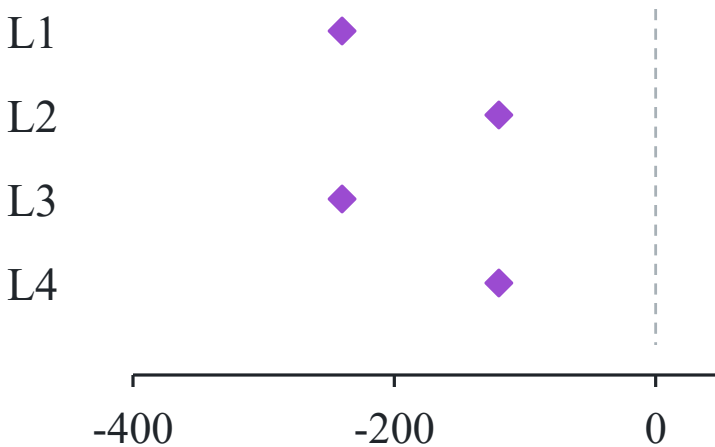


f B4b – B0

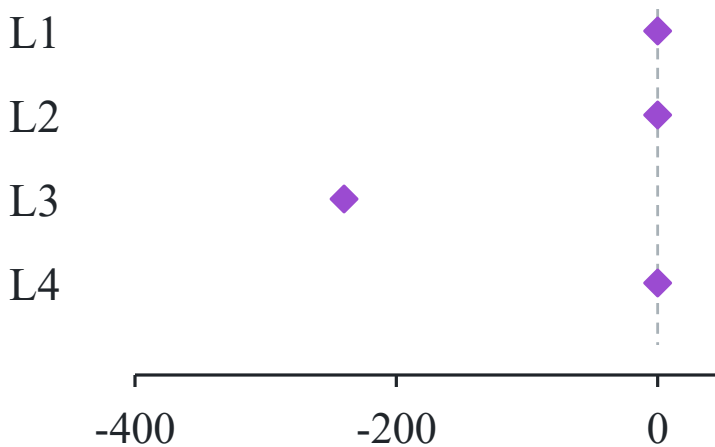


Paired change in SWL (negative values indicate lower loss)

a Observation interval

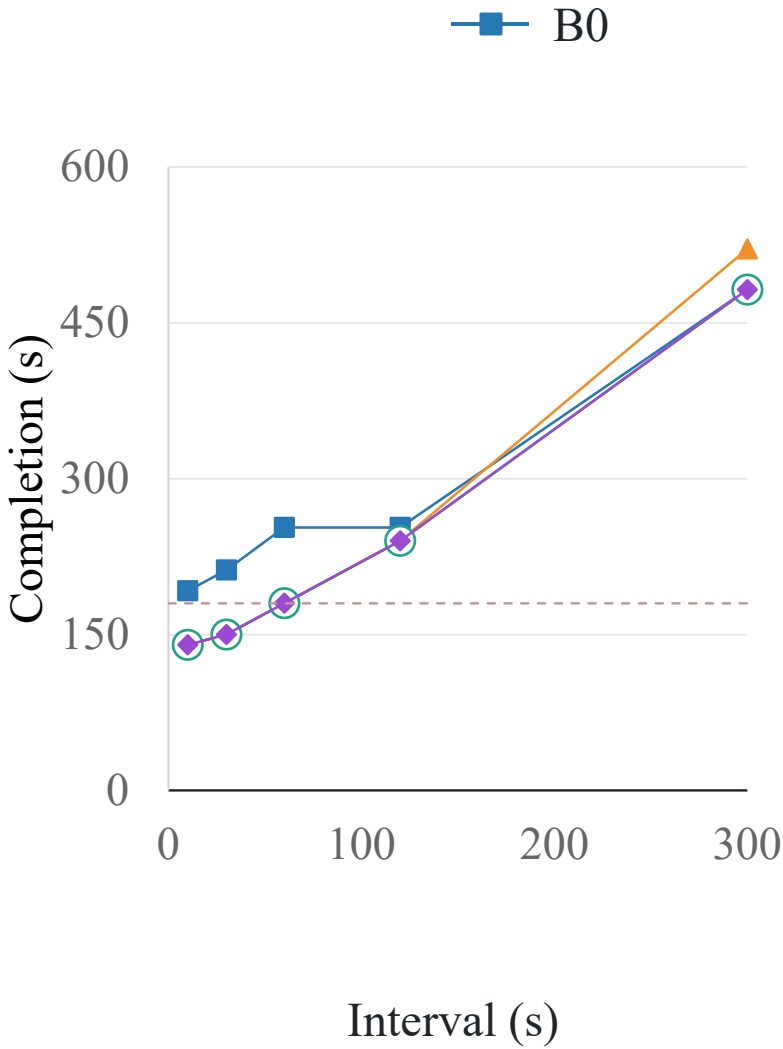


B2 = B4b at every interval
180 s service window

b Execution wait

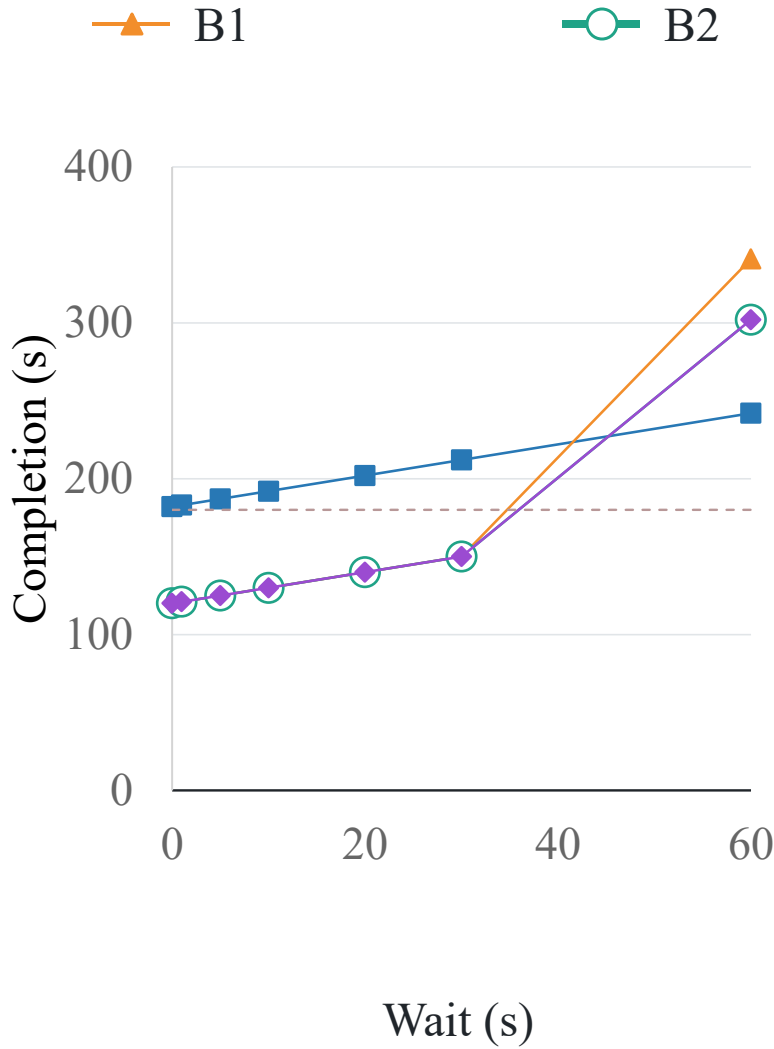

B1 = B2 = B4b at 0–30 s
B2 = B4b at 60 s

c Input burden

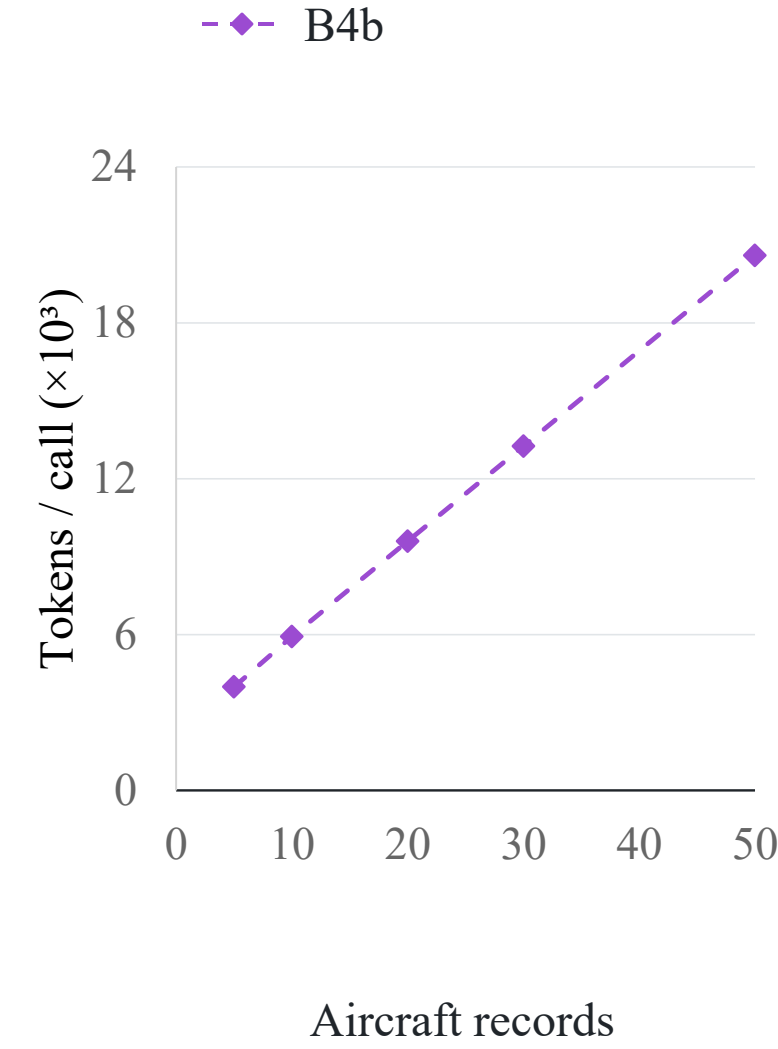

Four active aircraft
5–50 total records

a B0: repeated ground command



b B4b: air replaced by ground

