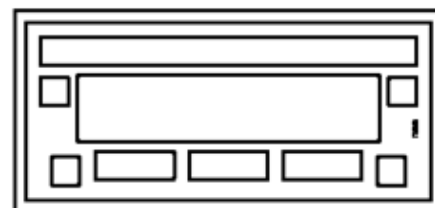


GRF0030D

50V, DC – 6.0GHz, 30W GaN HEMT, BARE DIE

FEATURES

- Operating Frequency Range: DC to 6GHz
- Operating Drain Voltage: 28V & 50V
- Maximum Output Power (P_{SAT}): 50W
- Suitable for CW, Pulsed, Linear applications
- 100% KGD DC Production Tested



1.630 x 0.755 mm Die

DESCRIPTION

The GRF0030D is a 50W (P3dB) unmatched discrete GaN-on-SiC HEMT which operates from DC to 6.0GHz on a 50V supply rail. The wide bandwidth of the GRF0030D makes it suitable for a variety of applications including cellular infrastructure, radar, communications, and test instrumentation, and can support CW, linear and pulse operations.

Bare die are shipped in 2 inch waffle trays for safe transport and storage.

Typical Performances Measured Loadpull 1 Tone pulsed CW (10% duty cycle, 100 μ s width) in DFN 3x3 package, 2nd Harmonics *NOT* optimized

- (1) Optimum Peak Power at 2.5dB in compression
(2) Optimum Peak Efficiency at 2.5dB in compression

V_{ds}=50V, I_{dq}= 50mA, T_A = 25°C

Frequency (MHz)	P _{out} ⁽¹⁾ (dBm)	Gain ⁽²⁾ (dB)	Eff ⁽²⁾ (%)
1000	46.2	23.7	65.2
1400	46.6	21.5	67.7
1800	46.7	20.8	64.7
2200	46.8	20.3	61.9
2600	46.9	18.9	66.1
3000	46.9	18.7	64.8
4000	46.9	17	64.5
5000	46.6	14.2	59.7
6000	46.8	13.5	60.8

V_{ds}=28V, I_{dq}= 50mA, T_A = 25°C

Frequency (MHz)	P _{out} ⁽¹⁾ (dBm)	Gain ⁽²⁾ (dB)	Eff ⁽²⁾ (%)
1000	43.7	20.2	68.9
1400	44.2	19.9	68
1800	44.4	19.4	66.9
2200	44.2	18.7	64
2600	44.4	17.1	68
3000	44.4	16.9	66.7
4000	44.3	14.9	65.7
5000	44	12.8	61.3
6000	44.2	11.3	63.3

GRF0030D

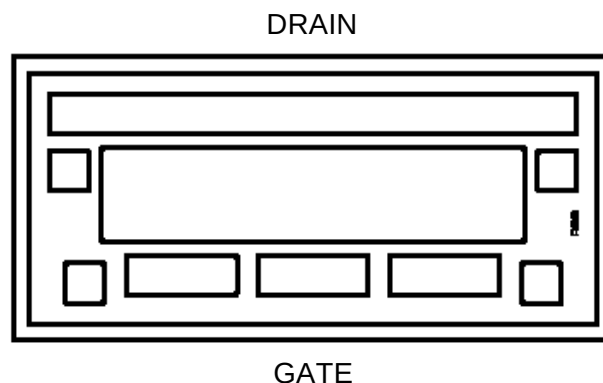
50V, DC – 6.0GHz, 30W GaN HEMT, BARE DIE

ABSOLUTE MAXIMUM RATINGS^(1, 2)

Parameter	Rating	Symbols and Units
Drain Source Voltage	150	V_{DS} (V)
Gate Source Voltage	-8 to +2	V_{GS} (V)
Operating Voltage	55	V_{dsq} (V)
Junction Temperature	+225	T_{JUNC} (°C)
Storage Temperature	-65 to +150	$T_{STORAGE}$ (°C)

1. Exceeding any of these limits may cause permanent damage to this device or seriously limit the lifetime (MTTF).
2. Guerrilla RF does not recommend sustained operation above maximum operating conditions.

BLOCK DIAGRAM

ELECTRICAL SPECIFICATIONS: $T_A = 25^\circ\text{C}$

Parameter	Min.	Typ.	Max.	Symbols and Units	Test conditions
Frequency Range	DC		6000	MHz	
DC Characteristics					
Drain Source Breakdown Voltage	150			V_{BDSS} (V)	
Drain Source Leakage Current		1.93		I_{DLK} (mA)	$V_{gs} = -8V, V_{ds} = 50V$
Gate Threshold Voltage	-3.4		-1.5	V_{GS} (V)	$V_{ds} = 50V$
Operating Conditions					
Gate Bias Voltage		-2.5		V_{GSQ} (V)	
Drain Voltage		50		V_{DSQ} (V)	
Quiescent Drain Current		50		I_{DQ} (mA)	

**GRF0030D****50V, DC – 6.0GHz, 30W GaN HEMT, BARE DIE**

RF ELECTRICAL TYPICAL PERFORMANCE: TA = 25°C, VDS = 50V, IDQ = 50mA, Freq = 3000MHz
Die packaged in DFN 3x

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Small Signal Gain	G_{SS}		15.5		dB	@ $I_{DS} \leq 1.1 \cdot I_{DQ}$
Power Gain	G_{MAX}		16.5		dB	Max gain vs. power
Saturated Gain	G_{SAT}		14		dB	@2.5dB compression referenced to G_{MAX}
Saturated Drain Efficiency	$DEff_{SAT}$		56		%	
Saturated Output Power	P_{SAT}		47		dBm	
Ruggedness	Ψ	@2.5dB compression; Output VSWR = 10:1, all angles				No damage or shift in performance

1. One Tone Pulse CW, pulse width 100us, duty cycle 10%.
2. Performance based on GRF EVB, 50Ω system.

**GRF0030D****50V, DC – 6.0GHz, 30W GaN HEMT, BARE DIE****LOADPULL MEASUREMENT, Vds = 50V Idq = 50mA**

Die Packaged in DFN 3x3. Measured 1 Tone Pulse CW, pulse width 100us, duty cycle 10%

For Optimum Peak Power @ 2.5dB Compression

Freq-MHz	Zin_F0	Zl_F0	Gain-dB	Pout-dBm	Pout-W	Eff-%	AMPM-deg
1000	4.2 j -13.2	21.1 j 4.4	22.6	46.2	42.3	58.4	1
1200	3.0 j -11.0	17.4 j 7.7	22.3	46.5	45.4	60.4	1.8
1400	2.5 j -8.7	16.3 j 7.9	21.7	46.6	46.2	60.2	2
1600	2.5 j -7.3	12.8 j 4.8	19.5	47	50.2	54.5	3.2
1800	1.9 j -5.5	15.2 j 5.8	19.9	46.7	47.2	55.6	2.3
2000	2.3 j -4.6	14.0 j 4.1	18.9	46.6	45.6	50.8	2.2
2200	1.8 j -3.3	13.9 j 4.6	18.1	46.8	47.6	53.1	2.7
2400	1.6 j -2.1	12.5 j 7.1	18	46.7	46.4	56.6	3.1
2800	1.7 j -0.3	11.5 j 5.2	17.7	47	50.6	57	1.1
3000	1.7 j 0.6	11.6 j 3.0	16.8	46.9	49	53.1	0.8
3500	1.8 j 2.6	9.3 j 1.4	15.5	46.8	48.1	50.2	-0.2
4000	1.7 j 4.7	7.9 j 1.1	15.3	46.9	48.7	53.7	-1.3
4500	1.7 j 6.5	7.7 j -1.0	13.4	46.7	47.5	48.6	-1.9
5000	1.8 j 9.1	7.0 j -0.5	13.7	46.6	46.2	54.5	-1.9
5500	2.0 j 10.5	6.1 j -2.5	12.7	46.7	47	54.9	-1.8
6000	2.5 j 14.3	7.2 j -5.0	11.8	46.8	48.4	52.5	-1.1

For Optimum Peak Efficiency @ 2.5dB Compression

Freq-MHz	Zin_F0	Zl_F0	Gain-dB	Pout-dBm	Pout-W	Eff-%	AMPM-deg
1000	2.6 j -11.5	24.9 j 13.0	23.7	45.9	38.9	65.2	-0.9
1200	2.5 j -9.8	20.9 j 14.0	23.1	46.1	40.7	65.8	0.5
1400	2.2 j -7.4	22.8 j 18.4	21.5	45.7	37.7	67.7	3.4
1600	2.1 j -5.1	17.5 j 19.1	21.1	45.4	34.9	68.3	-0.6
1800	1.7 j -4.3	15.9 j 14.7	20.8	46.1	41.4	64.7	2.2
2000	2.1 j -3.5	18.0 j 16.4	19.4	45.9	38.7	61.9	4.2
2200	1.4 j -2.4	12.9 j 12.4	20.3	46.2	41.3	61.9	1.6
2400	1.2 j -1.1	10.6 j 14.0	19.7	45.6	36.2	61.2	1.6
2800	1.3 j 0.6	9.1 j 13.5	18.4	45.7	37.4	65.1	1.5
3000	1.1 j 1.8	8.9 j 12.4	18.7	45.5	35.6	64.8	0.2
3500	1.1 j 3.7	5.8 j 7.2	17.6	45.8	38.7	63.4	-1.2
4000	1.0 j 5.7	4.9 j 5.9	17	45.5	35.5	64.5	-2.1
4500	1.3 j 7.3	4.4 j 3.6	15.4	45.7	37.3	61.8	-1.9
5000	1.3 j 9.6	4.7 j 1.1	14.2	45.9	39.4	59.7	-2.7
5500	1.5 j 11.3	3.0 j -0.3	13.9	44.8	30.2	60.7	-2.7
6000	1.8 j 15.1	3.5 j -2.2	13.5	45.4	34.9	60.8	-0.9

GRF0030D

50V, DC – 6.0GHz, 30W GaN HEMT, BARE DIE

LOADPULL MEASUREMENT, $V_{ds} = 28V$ $I_{dq} = 50mA$

Die packaged in DFN 3x3. Measured 1 Tone Pulse CW, pulse width 100us, duty cycle 10%

For Optimum Peak Power @ 2.5dB Compression

Freq-MHz	Zin_F0	ZI_F0	Gain-dB	Pout-dBm	Pout-W	Eff-%	AMPM-deg
1000	4.6 j -13.3	12.2 j -2.2	20.6	43.7	23.3	55.2	0.4
1200	3.7 j -11.0	12.3 j -1.0	19.7	43.9	24.8	57.1	1.4
1400	2.9 j -8.8	11.5 j 0.8	18.8	44.2	26.5	60.7	3.5
1600	2.9 j -7.1	10.4 j -0.8	18	44.4	27.4	56.1	0.6
1800	2.3 j -5.5	11.0 j 0.2	18.3	44.4	27.3	57.7	1.1
2000	2.1 j -4.3	11.5 j 0.7	17.8	44.1	25.8	56	1.6
2200	2.0 j -3.2	10.8 j -0.7	17	44.2	26.5	54.9	1.1
2400	1.8 j -2.1	10.7 j 0.3	16.8	44.2	26.1	56.1	0.7
2800	1.4 j 0.0	9.9 j 0.7	16.2	44.4	27.7	60.1	0.2
3000	1.5 j 0.9	9.4 j 0.3	16.4	44.4	27.5	60.4	-1.3
3500	1.6 j 2.9	7.9 j -1.0	15	44.4	27.2	58.1	-1.9
4000	1.4 j 5.1	7.1 j -1.3	14.5	44.3	26.8	60.9	-2.9
4500	1.9 j 6.7	8.2 j -3.9	12.4	44.2	26.1	53.6	-2.3
5000	1.4 j 9.5	5.9 j -4.7	12	44	25.4	57.2	-3.4
5500	1.8 j 10.9	6.6 j -6.1	10.9	44	25.9	57.3	-2.7
6000	2.2 j 14.8	7.9 j -7.1	10.6	44.2	26.5	58	-1.3

For Optimum Peak Efficiency @ 2.5dB Compression

Freq-MHz	Zin_F0	ZI_F0	Gain-dB	Pout-dBm	Pout-W	Eff-%	AMPM-deg
1000	3.5 j -11.7	20.0 j 1.7	20.2	43	20.4	68.9	0.1
1200	2.5 j -8.5	20.1 j 7.6	20.4	42.6	18.5	67.6	2.4
1400	2.3 j -7.5	19.3 j 8.4	19.9	42.8	19.2	68	3.1
1600	2.3 j -4.8	17.9 j 10.4	18.4	42.5	17.9	68.6	0
1800	1.5 j -3.9	13.7 j 8.0	19.4	43.2	21.1	66.9	0.7
2000	1.7 j -3.4	15.2 j 7.7	18	43.3	21.6	62.8	3
2200	1.1 j -1.8	10.6 j 7.6	18.7	43.2	20.7	64	0.1
2400	1.4 j -1.3	11.0 j 8.7	17.5	42.8	19	62.7	0.9
2800	1.1 j 1.2	9.3 j 8.1	16.8	42.9	19.6	67	-0.5
3000	1.0 j 2.1	8.7 j 7.1	16.9	42.7	18.8	66.7	-1.5
3500	1.1 j 3.5	6.6 j 2.5	15.3	43.7	23.9	66.2	-3
4000	1.1 j 5.8	6.1 j 1.9	14.9	43.2	21	65.7	-3.4
4500	1.3 j 7.7	4.6 j 0.5	13.6	42.8	19	64	-5
5000	1.3 j 9.8	5.1 j -1.8	12.8	43	19.9	61.3	-4.3
5500	1.4 j 11.5	3.7 j -4.1	11.6	42.8	19.5	63.1	-7.3
6000	1.7 j 15.4	4.2 j -6.0	11.3	43.2	21	63.3	-4.9

GRF0030D

50V, DC – 6.0GHz, 30W GaN HEMT, BARE DIE

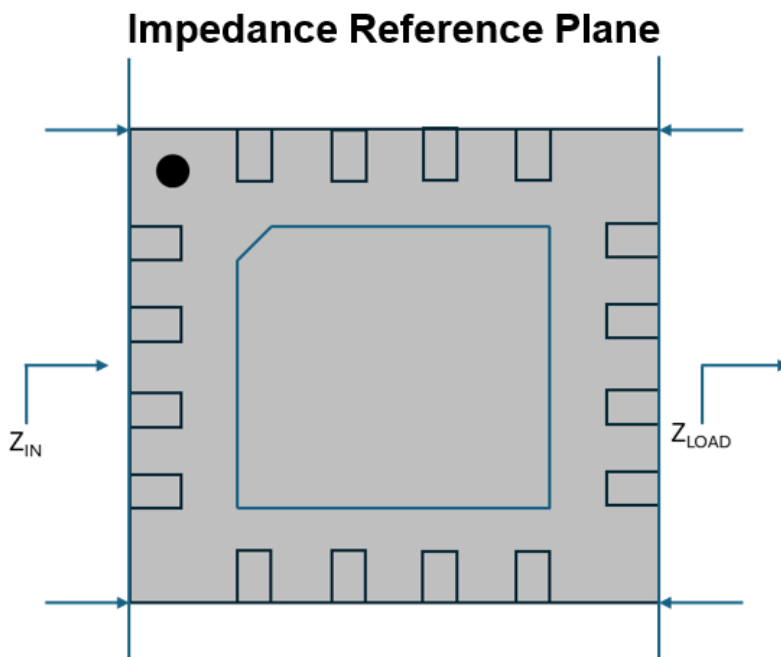
LOADPULL MEASUREMENT NOTES

Source and Load impedance at 2nd Harmonic are set to 10 Ohms.

With proper 2nd Harmonic termination, expect +5% Efficiency for Source and similar with Drain 2nd Harmonic.

Z_{LOAD} : Measured Impedance presented to the Drain of the device.

Z_{IN} : Measured input Impedance at the Gate of the device.

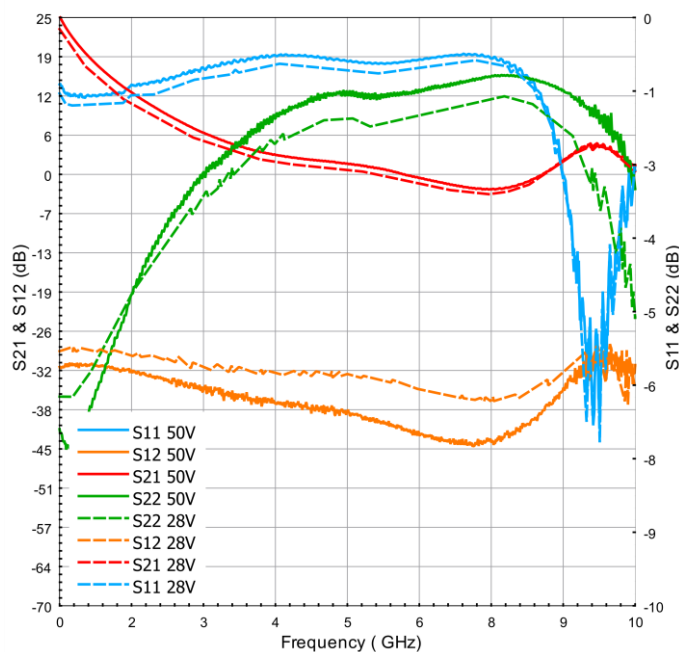
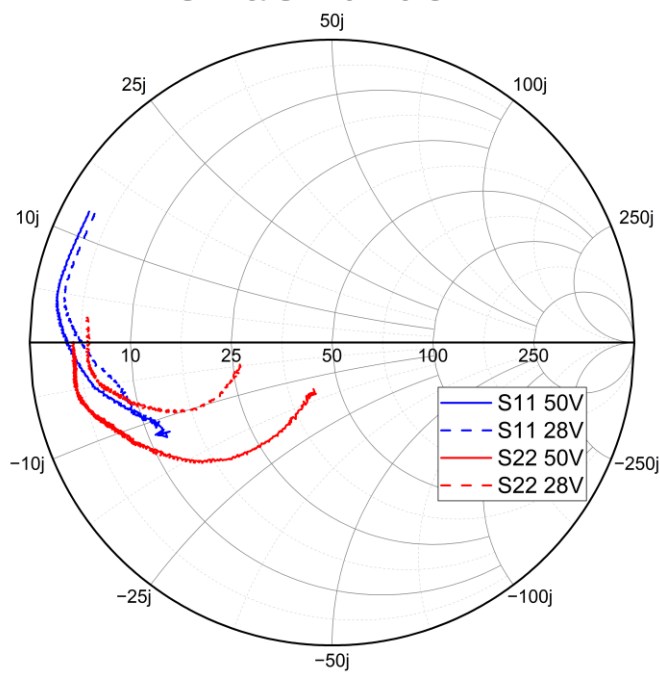


Raw data and full Loadpull measurement report available at request: sales@guerrilla-rf.com

GRF0030D

50V, DC – 6.0GHz, 30W GaN HEMT, BARE DIE

BROADBAND S-PARAMETERS MEASUREMENT, $V_{ds} = 28$ & $50V$ $I_{dq} = 50mA$
 Die packaged in DFN 3x3. Measured 1 Tone CW

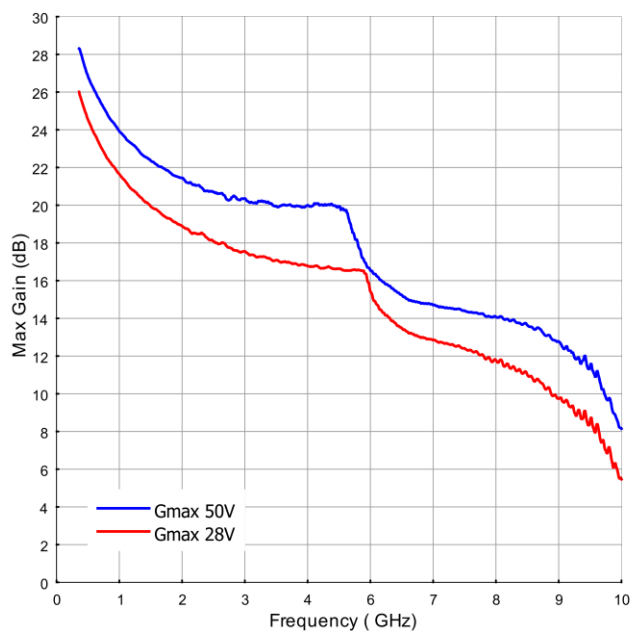
S Parameters (Mag-dB)**S11 & S22 0.4-6 GHz**

GRF0030D

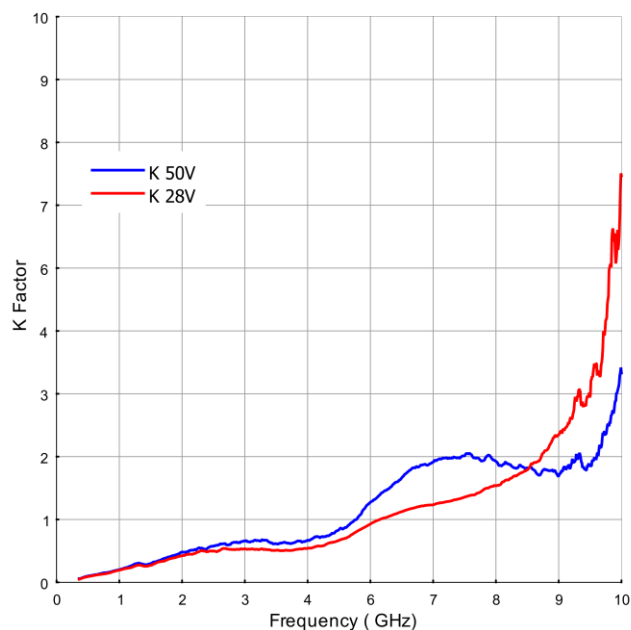
50V, DC – 6.0GHz, 30W GaN HEMT, BARE DIE

BROADBAND S-PARAMETERS MEASUREMENT, $V_{ds} = 28$ & $50V$ $I_{dq} = 50mA$
Die packaged in DFN 3x3. Measured 1 Tone CW

Maximum Available Gain



K Factor



**GRF0030D****50V, DC – 6.0GHz, 30W GaN HEMT, BARE DIE****GaN HEMT BIASING SEQUENCE**

To turn the transistor ON

1. Set V_{GS} to -5V.
2. Turn on V_{DS} to normal operation voltage (50V).
3. Slowly increase V_{GS} to set I_{DQ} current (50mA).
4. Apply RF power.

To turn the transistor OFF

1. Turn the RF power off.
2. Decrease V_{GS} to -5V.
3. Turn off V_{DS} . Wait a few seconds for drain capacitor to discharge.
4. Turn off V_{GS} .

GRF0030D

50V, DC – 6.0GHz, 30W GaN HEMT, BARE DIE

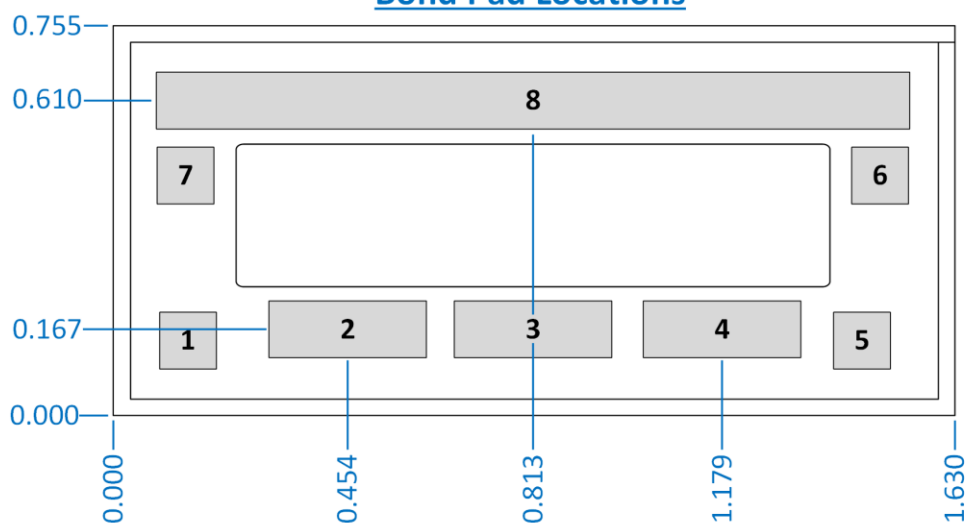
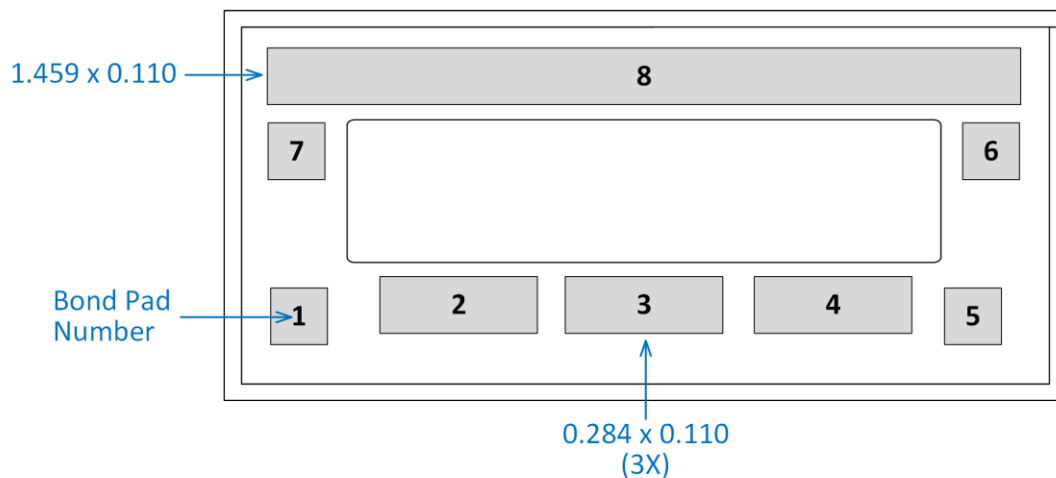
DIE DIMENSIONS

Notes:

- All dimensions are in mm
- Die size is 1.630 X 0.755 mm
- Die thickness is 75 μ m
- Bond pad metal is gold
- Backside metal is gold

Bond Pad IDs

- 1: No Connect
- 2: Gate
- 3: Gate
- 4: Gate
- 5: No Connect
- 6: No Connect
- 7: No Connect
- 8: Drain

Bond Pad Locations**Bond Pad Sizes**

GRF0030D

50V, DC – 6.0GHz, 30W GaN HEMT, BARE DIE

HANDLING PRECAUTIONS

Parameter	Symbol	Class	Test Methodology
ESD* – Human Body Model	HBM	Class 1A (250V)	ANSI/ESDA/JEDEC Standard JS-001
ESD* – Charged Device Model	CDM	Class C2A (500V)	ANSI/ESDA/JEDEC Standard JS-002

* Tested in DFN 3x3 package



Guerrilla RF Policy on EU RoHS available online:

https://www.guerrilla-rf.com/files/uqd/3748d3_1107b9788f9845f78f45d424097c4c97.pdf



GRF0030D

50V, DC – 6.0GHz, 30W GaN HEMT, BARE DIE

REVISION HISTORY

Revision Date	Description of Change
11/14/2024	Release 0 Data Sheet. Added new Z reference plane & die dimension drawings. Added 50V LP data.

CONTACT INFORMATION

To request the latest information and samples, please contact us at:

Web: www.guerrilla-rf.com • (336) 510-7840

Email: sales@guerrilla-rf.com • 2000 Pisgah Church Road. Greensboro, NC 27455

Data Sheet Classifications

Data Sheet Status	Notes
Advance	S-Parameter and NF data based on EM simulations for the fully packaged device using foundry-supplied transistor S-Parameters. Linearity estimates based on device size, bias condition and experience with related devices.
Preliminary	All data based on limited evaluation board measurements taken within the Guerrilla RF Applications Lab. All parametric values are subject to change pending the collection of additional data.
Release 0	All data based on measurements taken with <i>production-released</i> material. TYP values are based on a combination of ATE and bench-level measurements, with MIN/MAX limits defined using <i>modelled estimates</i> that account for part-to-part variations and expected process spreads. Although unlikely, future refinements to the TYP/MIN/MAX values may be in order as multiple lots are processed through the factory.
Release A-Z	All data based on measurements taken with production-released material <i>derived from multiple lots which have been fabricated over an extended period of time</i> . MIN/MAX limits may be refined over previous releases as more statistically significant data is collected to account for process spreads.

Guerrilla RF Proprietary Information. • ©2024 Guerrilla RF, Inc. • All rights reserved. • October 22, 2024

www.guerrilla-rf.com • (336) 510-7840 • sales@guerrilla-rf.com • 2000 Pisgah Church Road. Greensboro, NC 27455

**GRF0030D****50V, DC – 6.0GHz, 30W GaN HEMT, BARE DIE**

Information in this data sheet is specific to the Guerrilla RF, Inc. ("Guerrilla RF") product identified.

This data sheet, including the information contained in it, is provided by Guerrilla RF as a service to its customers and may be used for informational purposes only by the customer. Guerrilla RF assumes no responsibility for errors or omissions on this data sheet or the information contained herein. Information provided is believed to be accurate and reliable, however, no responsibility is assumed by Guerrilla RF for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. Guerrilla RF assumes no liability for any data sheet, data sheet information, materials, products, product information, or other information provided hereunder, including the sale, distribution, reproduction or use of Guerrilla RF products, information or materials.

No license, whether express, implied, by estoppel, by implication or otherwise is granted by this data sheet for any intellectual property of Guerrilla RF, or any third party, including without limitation, patents, patent rights, copyrights, trademarks and trade secrets. All rights are reserved by Guerrilla RF.

All information herein, products, product information, data sheets, and data sheet information are subject to change and availability without notice. Guerrilla RF reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice. Guerrilla RF may further change its data sheet, product information, documentation, products, services, specifications or product descriptions at any time, without notice. Guerrilla RF makes no commitment to update any materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

GUERRILLA RF INFORMATION, PRODUCTS, PRODUCT INFORMATION, DATA SHEETS AND DATA SHEET INFORMATION ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. GUERRILLA RF DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. GUERRILLA RF SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are solely responsible for their use of Guerrilla RF products in the Customer's products and applications or in ways which deviate from Guerrilla RF's published specifications, either intentionally or as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Guerrilla RF assumes no liability or responsibility for applications assistance, customer product design, or damage to any equipment resulting from the use of Guerrilla RF products outside of stated published specifications or parameters.