KB Bridge v0.7 — PCBA dimensions

Top view (component side)

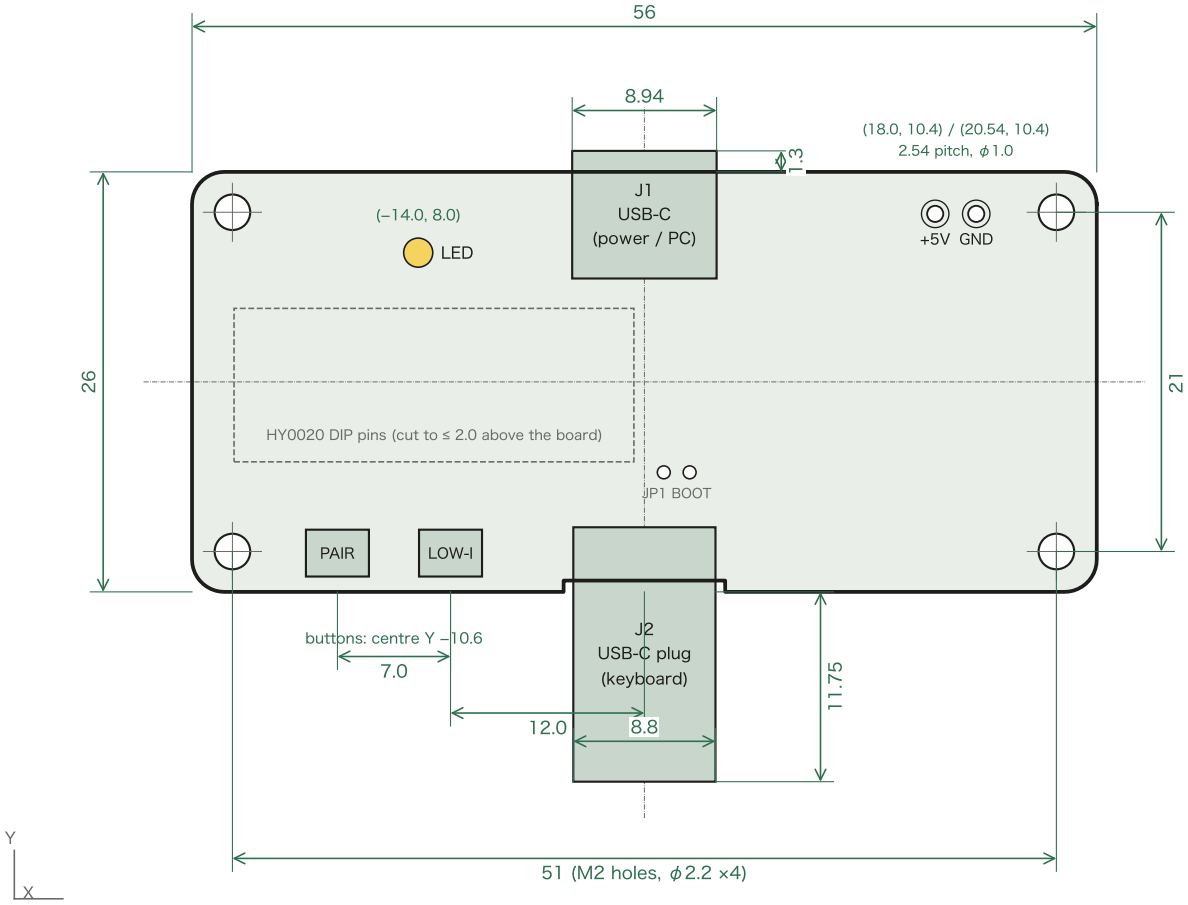

Side view (Y–Z, keyboard side left)

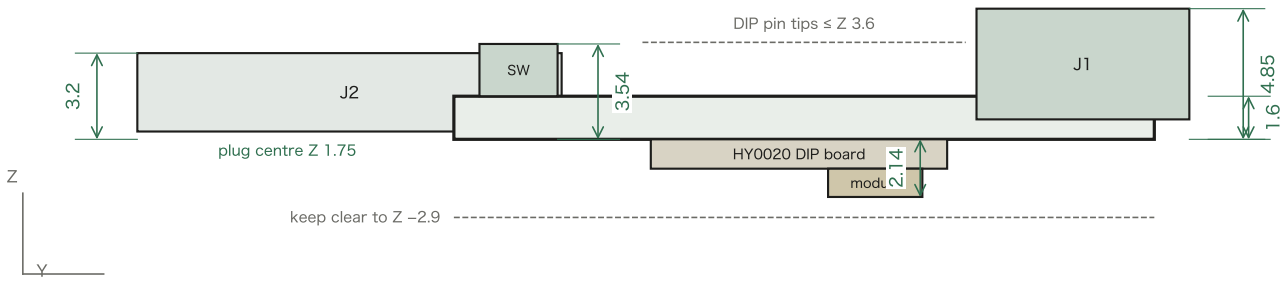

Origin

board centre, X right, +Y towards J1, Z = board bottom (0)

STL

kb_bridge_v0.7_pcba.stl: same frame (mm), HY0020 fitted

Board

56.0 × 26.0 × 1.6, corner R2.0, notch 10 × 0.7 behind J2

Mounting

4 × ϕ2.2 (M2) at (±25.5, ±10.5)

J1 power / PC

USB-C receptacle, front face Y +14.3 (1.3 out of the edge), Z 0.74–4.85

J2 keyboard

USB-C plug, tip Y –24.75 (11.75 out of the edge), Z 0.29–3.20, centre Z 1.75

Top side

tallest: J1 4.85, buttons 3.54 (TS-1088, pressed from the top), LED 2.70

Bottom

HY0020 DIP board + module down to Z –2.14; keep Z –2.9 free

5V / GND

two ϕ1.0 holes, 2.54 pitch at (18.0, 10.4) +5V and (20.54, 10.4) GND:
power without J1 (4.5–5.5 V; same input as J1, reverse-protected)

LED

bi-colour (red / green) at (–14.0, 8.0) on the top side: leave a light hole

Antenna

keep metal away from the HY0020 module (bottom side, Y +0.9 ⋯ +4.4)