

	Work Instruction	Doc. Revision	01
	AXI V810 PSP 2 EBLE Projector & Optical Camera R&R Procedure	Effective Date	2 Oct 2016

This procedure is applicable to below models:

V810 STD	☒	S1	☒	S2
V810 XXL	☒	S1	☒	S2
V810 S2EX	☒			
V810 Mini	☐			

REVISION HISTORY

Rev	Effective Date	Description	Doc Originator
00	01 Dec 2015	First Release	ONG KEAN SHENG
01	2 Oct 2016	Template Changes & Content Update	ONG KEAN SHENG

	Work Instruction	Doc. Revision	01
	AXI V810 PSP 2 EBLE Projector & Optical Camera R&R Procedure	Effective Date	2 Oct 2016

Content

Optical Camera Removal & Replacement Procedure.....	3
PSP 2 Projector Removal and Replacement Procedure.....	6

	Work Instruction	Doc. Revision	01
	AXI V810 PSP 2 EBLE Projector & Optical Camera R&R Procedure	Effective Date	2 Oct 2016

Optical Camera Removal & Replacement Procedure

Steps:

1. Remove the Triggering cable as below Figure 1.

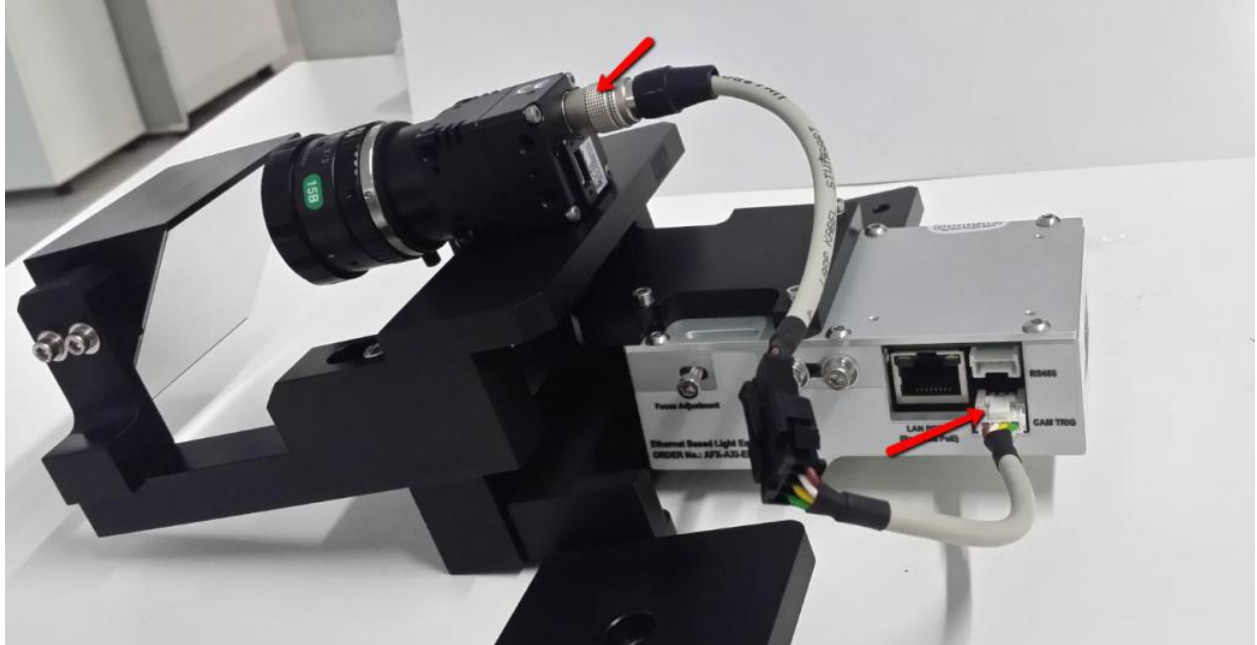


Figure 1 Triggering cable removal

2. Loosen both screw (M5 X 30) and remove the upper bracket as Figure 2.

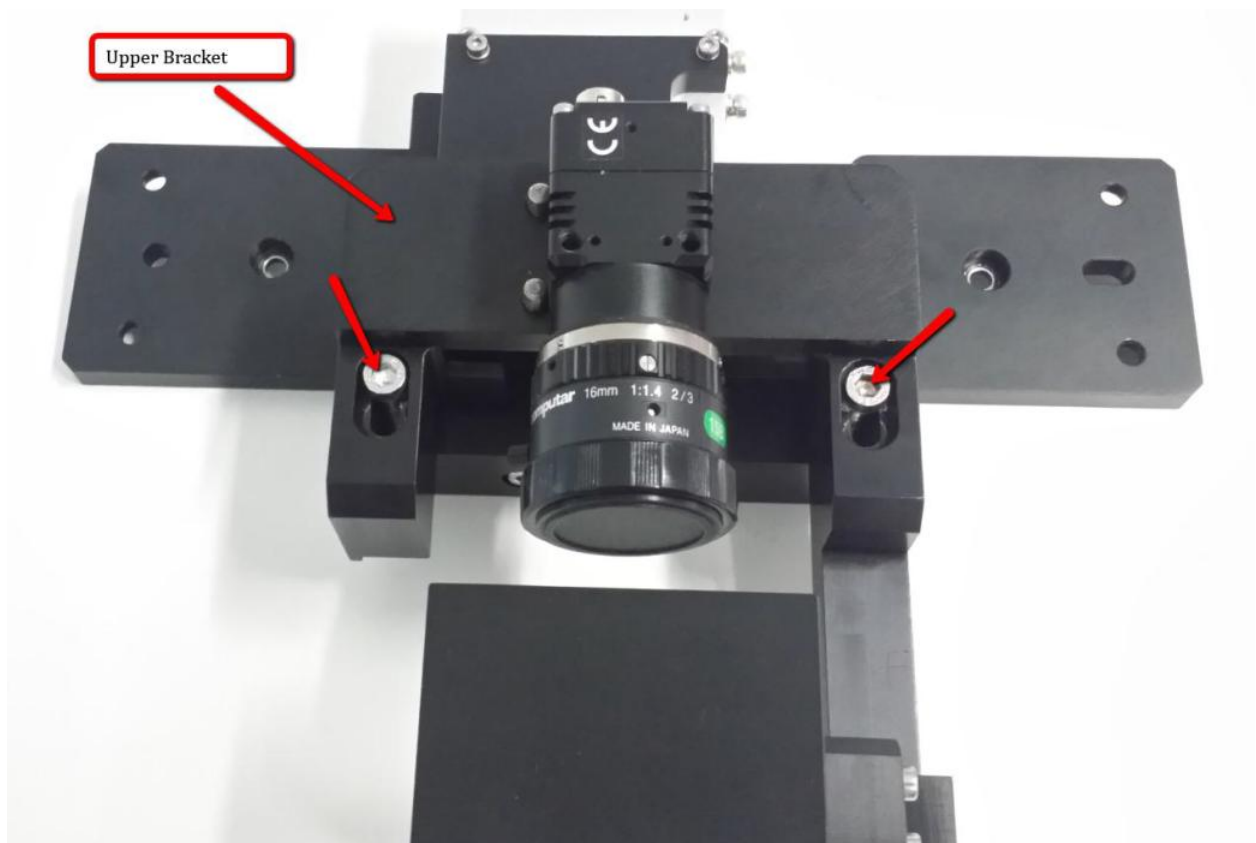


Figure 2 Upper Bracket Removal


ViTrox	Work Instruction	Doc. Revision	01
	AXI V810 PSP 2 EBLE Projector & Optical Camera R&R Procedure	Effective Date	2 Oct 2016

3. Flip the upper bracket and loosen 2 x screws (M4X8) as below Figure 3.




Figure 3 Optical Camera Removal

4. Remove the optical camera from the upper bracket.
5. Identify the module is either in Front or Rear Module. May refer to below camera orientation (Figure 4) during Optical camera assembly.

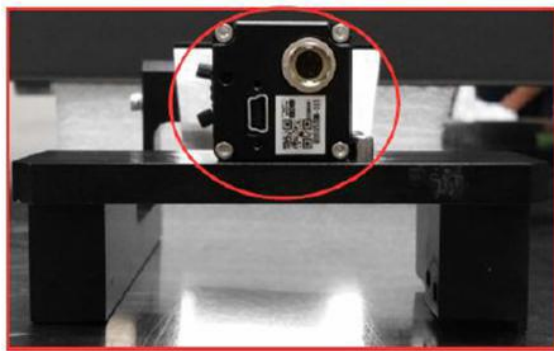

Front Camera Position Orientation

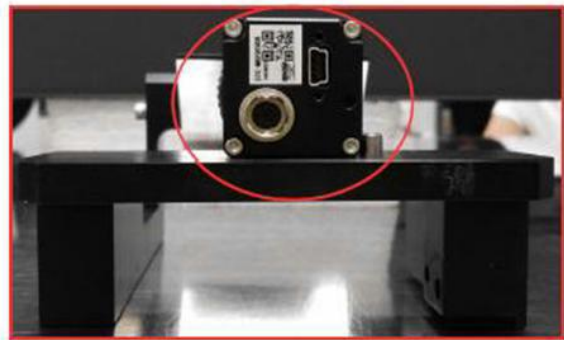

Rear Camera Position Orientation

Figure 4 Optical Camera Orientation

6. Assemble new optical and gently hand tight 2 x Screws (M4 X8) only. (Remarks : Will require to perform a minor alignment)

	Work Instruction	Doc. Revision	01
	AXI V810 PSP 2 EBLE Projector & Optical Camera R&R Procedure	Effective Date	2 Oct 2016

7. Next, push the Optical Camera towards dowel pin as below Figure 5.



Figure 5 Optical Camera Assembly

8. Hold on the Optical camera while towards the Dowel Pin. Tighten 2 x screws as below Figure 6.



Figure 6 Optical Camera Fastening

9. Plug back the Triggering Cable.

	Work Instruction	Doc. Revision	01
	AXI V810 PSP 2 EBLE Projector & Optical Camera R&R Procedure	Effective Date	2 Oct 2016

PSP 2 Projector Removal and Replacement Procedure

Steps:

1. Remove the Triggering cable as below Figure 7.

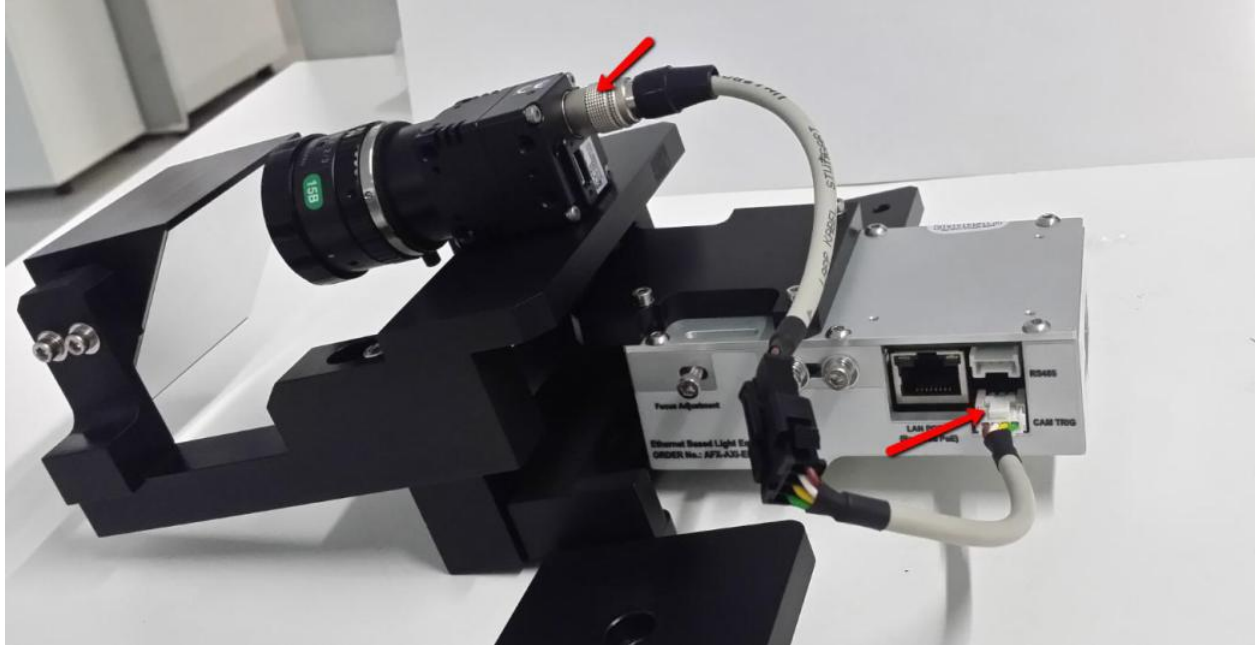


Figure 7 Triggering cable removal

2. Loosen 2 x Screws (M4 X 20) and remove the entire projector bracket as below Figure 8.

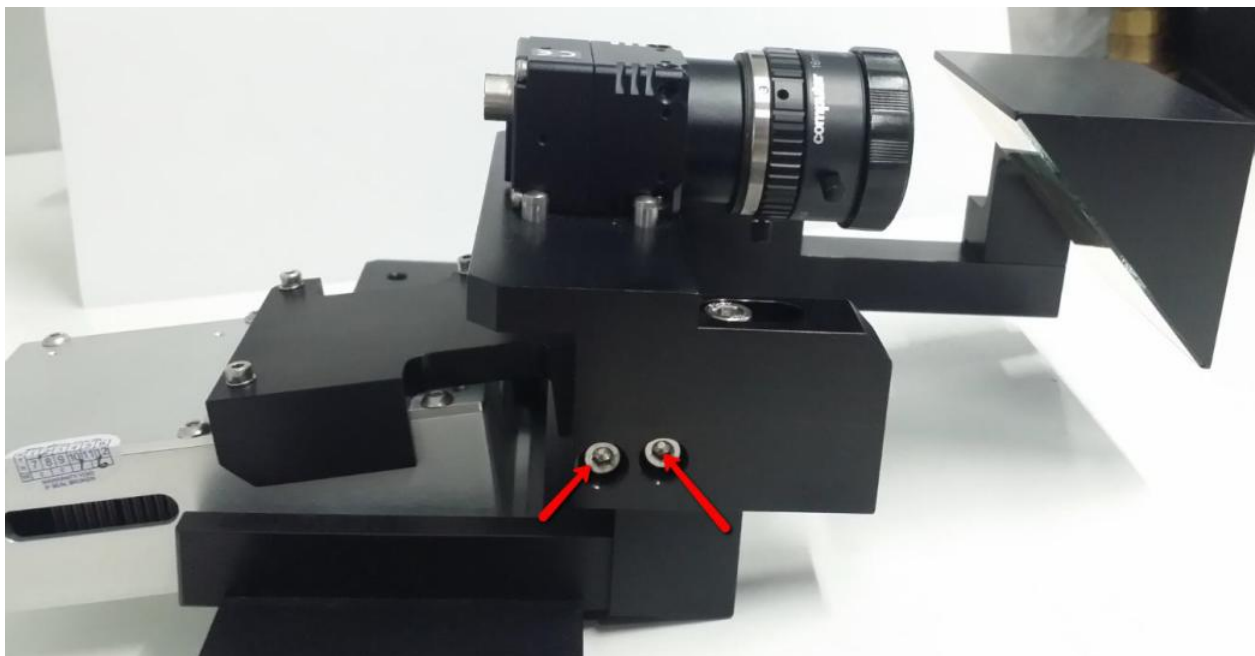


Figure 8 Projector Bracket removal

	Work Instruction	Doc. Revision	01
	AXI V810 PSP 2 EBLE Projector & Optical Camera R&R Procedure	Effective Date	2 Oct 2016

- Loosen 3 x Screws (M2.5 X 10) and remove the PSP 2 Projector from the bracket as below Figure 9.



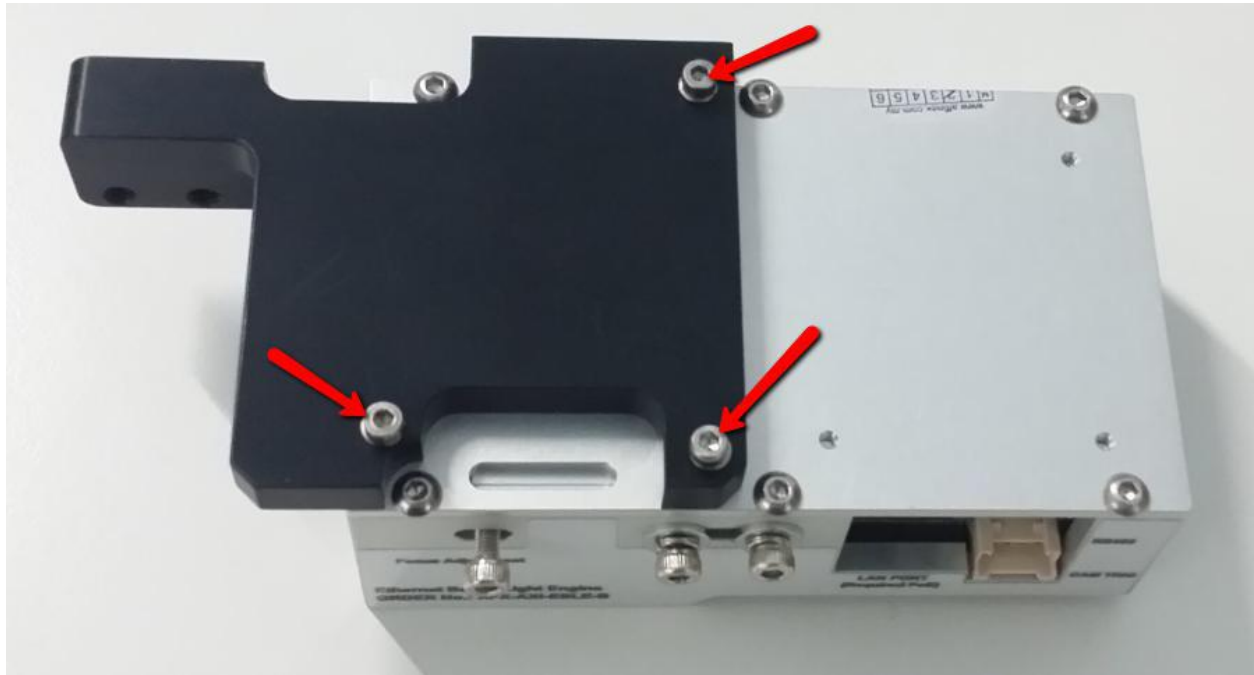


Figure 9 Projector Dismantle

- Identify current module is either in Front or Rear Module. May refer to below projector DIP switch set up (Figure 10) during PSP 2 projector assembly.

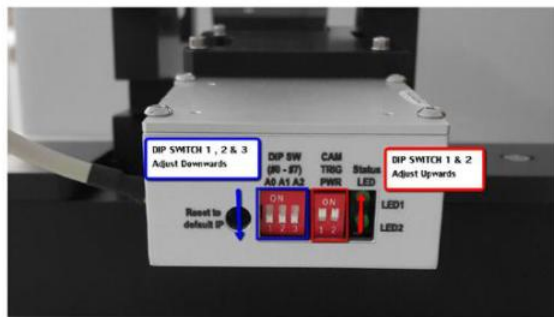

Front Projector Dip Switch Set Up

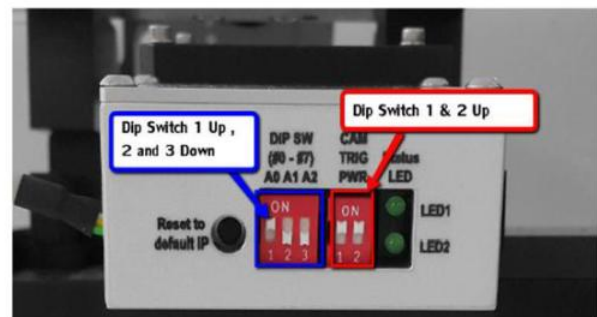

Rear Projector Dip Switch Set Up

Figure 10 Projector DIP Switch Set up

- Assemble new projector to the bracket as Figure 9.
- Assemble the entire projector bracket to entire module as Figure 8.
- Plug back the Triggering Cable