




PedalPCB

5lb Bag Fuzz

Revised 10/30/22

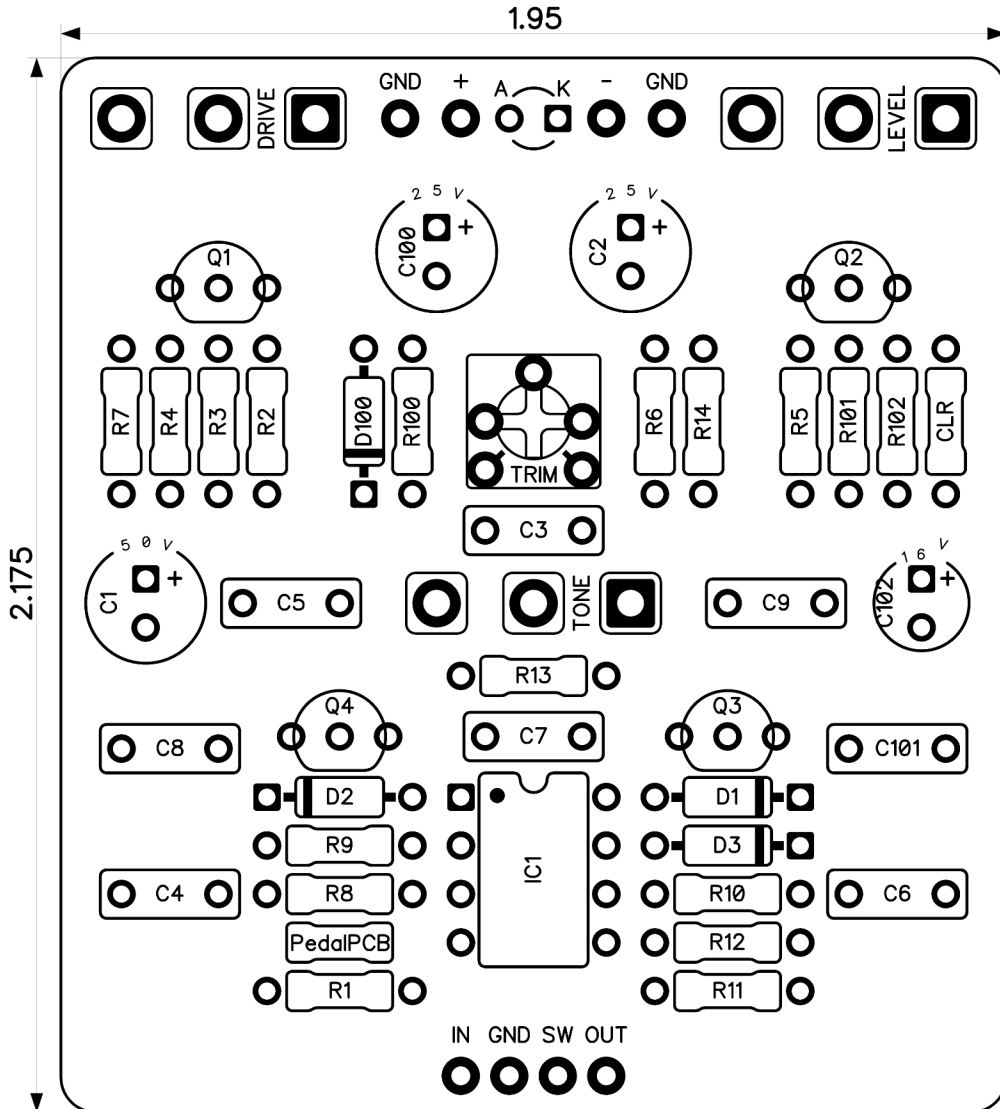

CONTROLS AND FEATURES


- Level
- Drive
- Tone


All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

LOCATION	VALUE	TYPE	NOTES
R1	33K	Resistor, 1/4W	
R2	33K	Resistor, 1/4W	
R3	100K	Resistor, 1/4W	
R4	1K	Resistor, 1/4W	
R5	1K	Resistor, 1/4W	
R6	470R	Resistor, 1/4W	
R7	47R	Resistor, 1/4W	
R8	120K	Resistor, 1/4W	
R9	82K	Resistor, 1/4W	
R10	4K7	Resistor, 1/4W	
R11	470K	Resistor, 1/4W	
R12	220K	Resistor, 1/4W	
R13	10K	Resistor, 1/4W	
R14	1K	Resistor, 1/4W	
R100	330R	Resistor, 1/4W	
R101	10K	Resistor, 1/4W	
R102	10K	Resistor, 1/4W	
CLR	4K7	Resistor, 1/4W	<i>*LED current limiting resistor</i>
C1	1u	Electrolytic capacitor, 5mm	
C2	22u	Electrolytic capacitor, 5mm	
C3	100n	Film capacitor, 7.2 x 2.5mm	
C4	100n	Film capacitor, 7.2 x 2.5mm	
C5	470n	Film capacitor, 7.2 x 5.0mm	
C6	100n	Film capacitor, 7.2 x 2.5mm	
C7	100p	Ceramic disc capacitor	
C8	3n3	Film capacitor, 7.2 x 2.5mm	
C9	470n	Film capacitor, 7.2 x 5.0mm	
C100	100u	Electrolytic capacitor, 5mm	
C101	100n	Film capacitor, 7.2 x 2.5mm	
C102	47u	Electrolytic capacitor, 5mm	
D1	BAT46	Schottky diode, DO-35	
D2	1N34A	Germanium diode	
D3	BAT46	Schottky diode, DO-35	
D100	1N4148	Signal diode, DO-35	
Q1	2N3906	BJT transistor, PNP TO-92	
Q2	2N3906	BJT transistor, PNP TO-92	
Q3	2N7000	N-Channel MOSFET	
Q4	2N7000	N-Channel MOSFET	
IC1	NE5532	Dual op-amp, DIP8	
TRIM	10K	Trimmer potentiometer, 3362P type	
LEVEL	B100K	16mm right-angle PCB mount pot	
TONE	B50K	16mm right-angle PCB mount pot	
DRIVE	C1K	16mm right-angle PCB mount pot	

5lb Bag Fuzz

Schematic Diagram

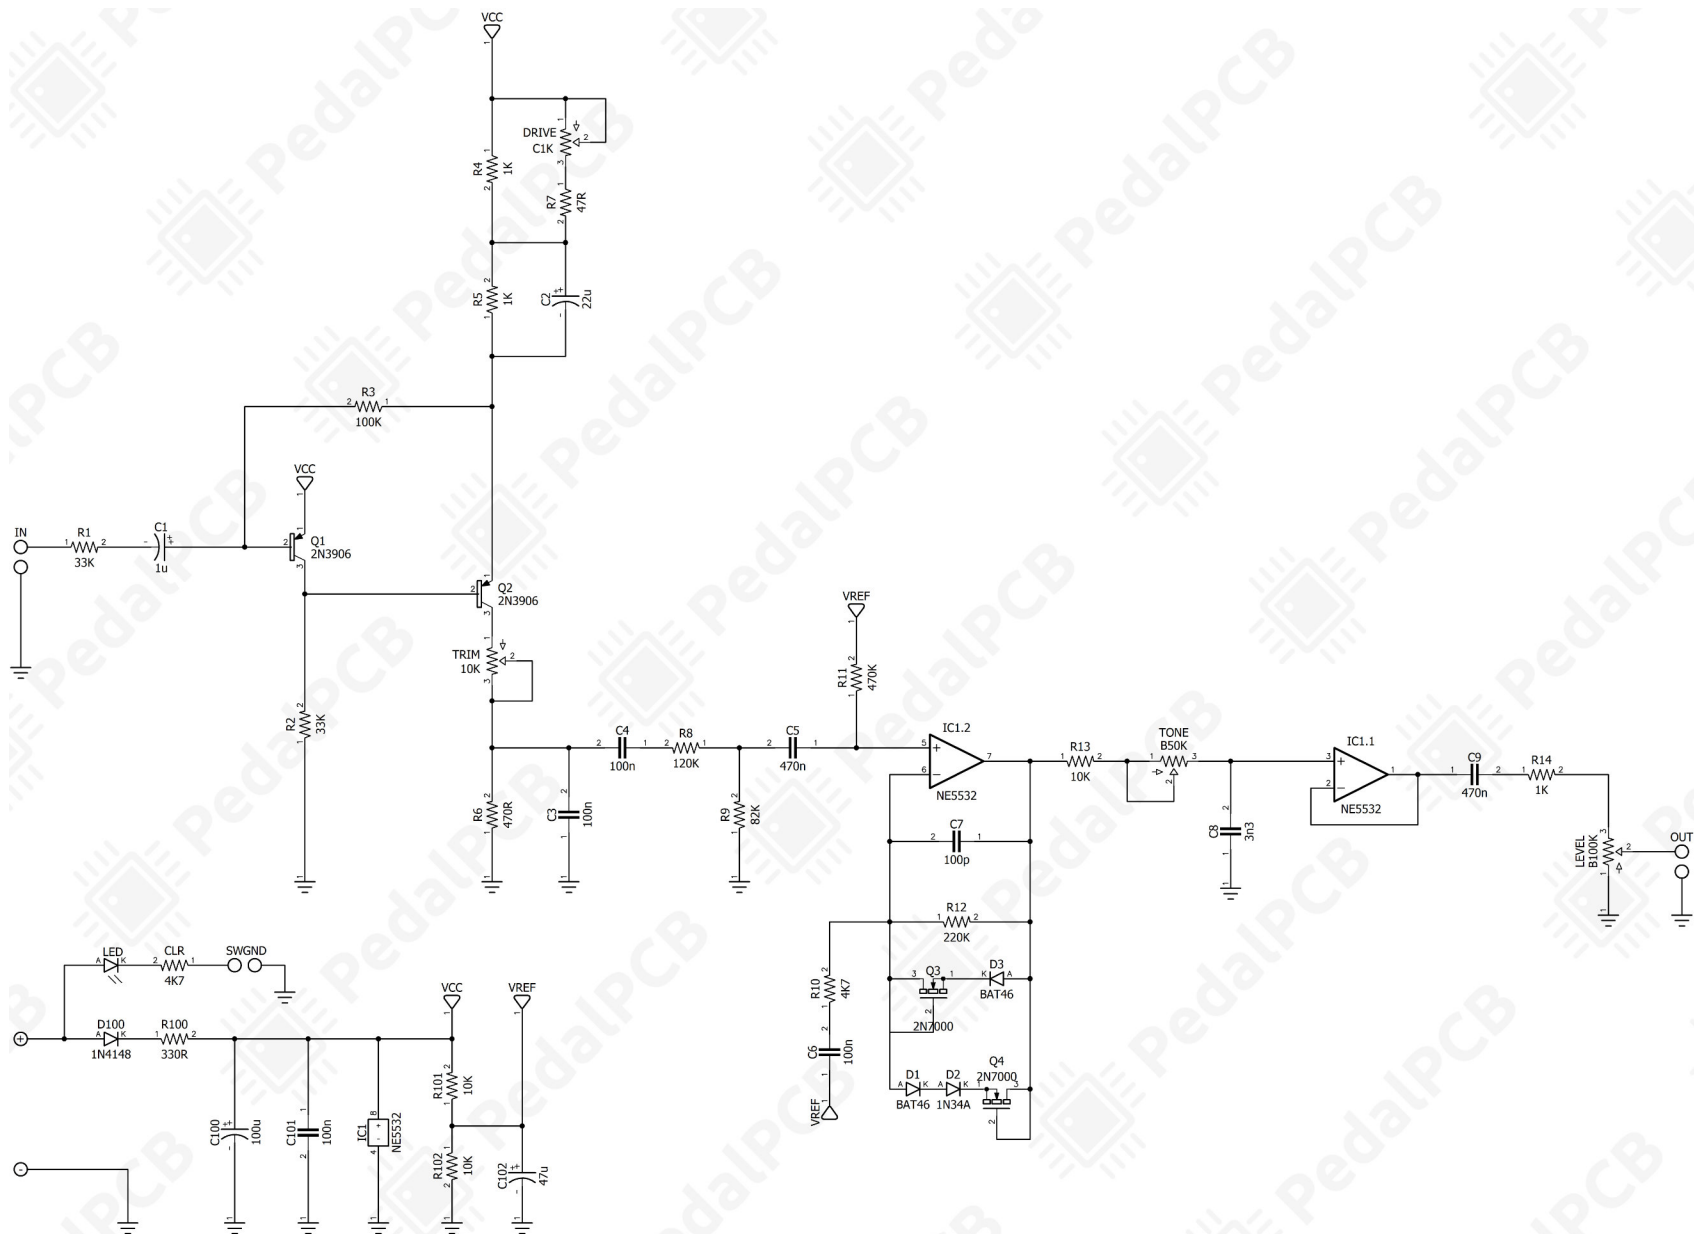

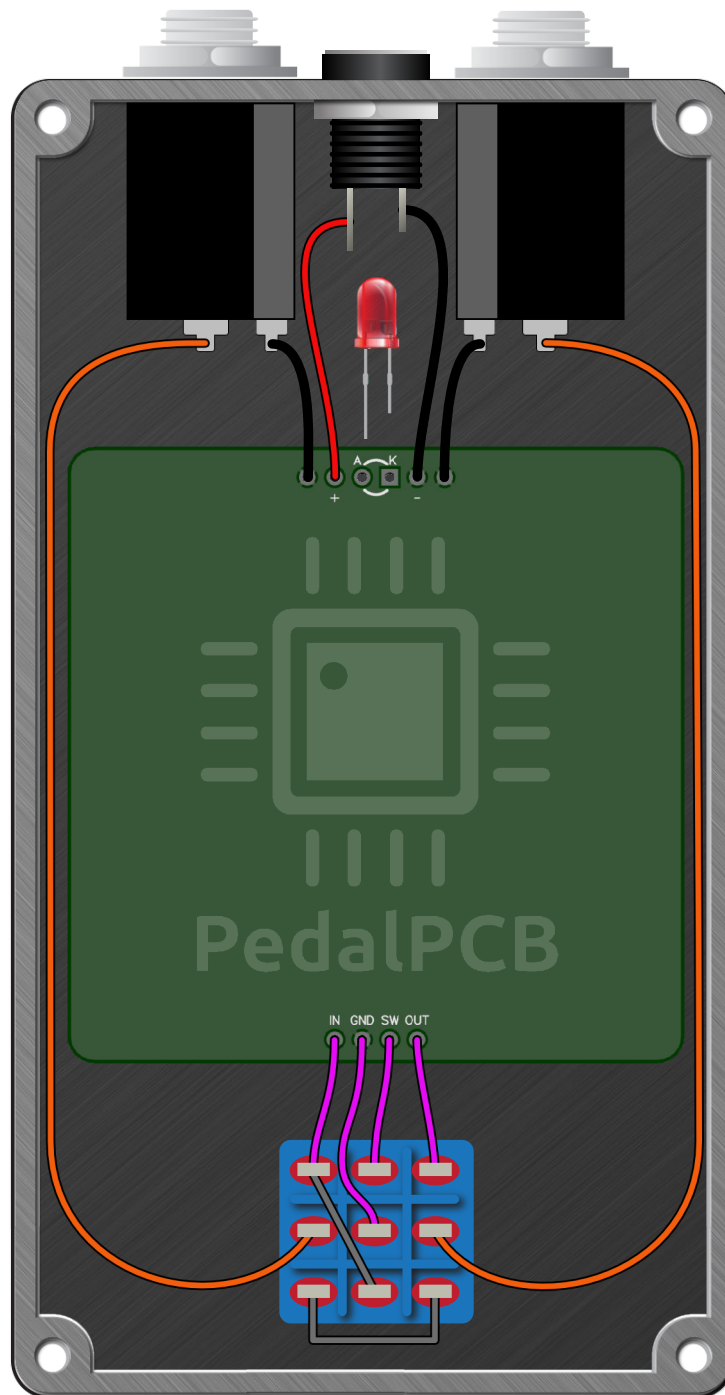

5lb Bag Fuzz

Drill Template
125B Enclosure

