


Revised 1/5/21

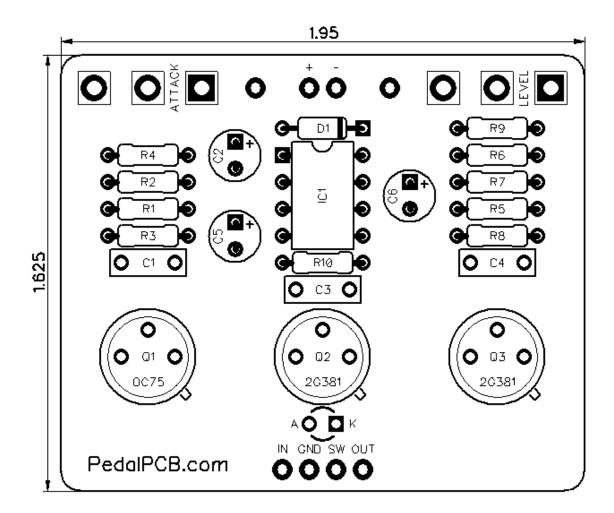

## **CONTROLS AND FEATURES**

- Level
- Attack


All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.



## **Tone Vendor MKI**


Parts List (Page 1 of 1)

LOCATION	VALUE	TYPE	NOTES
R1	1M	Resistor, 1/4W	
R2	8K2	Resistor, 1/4W	
R3	470K	Resistor, 1/4W	
R4	1K8	Resistor, 1/4W	
R5	2K2	Resistor, 1/4W	
R6	8K2	Resistor, 1/4W	
R7	15K	Resistor, 1/4W	
R8	47K	Resistor, 1/4W	
R9	2M2	Resistor, 1/4W	
R10	4K7	Resistor, 1/4W	
		,	
C1	10n	Film capacitor, 7.2 x 2.5mm	
C1 C2	25u	Electrolytic capacitor, 5mm	
C3	100n	Film capacitor, 7.2 x 2.5mm	
C4	100n	Film capacitor, 7.2 x 2.5mm	
C3 C4 C5	10u	Electrolytic capacitor, 5mm	
C6	47u	Electrolytic capacitor, 5mm	
	1		
D1	1N5817	Schottky diode, DO-41	
	1110011		
IC1	TC1044SCPA	Charge pump IC	
101	1010110017	Charge pamp 10	
Q1	OC75	PNP Germanium	
Q2	2G381	PNP Germanium	
Q3	2G381	PNP Germanium	
QU.	20001	1 W Germanian	
LEVEL	A500K	16mm right-angle PCB mount pot	
ATTACK	B50K	16mm right-angle PCB mount pot	
711 171011	Book	Tomin right ungle i OB mount pot	

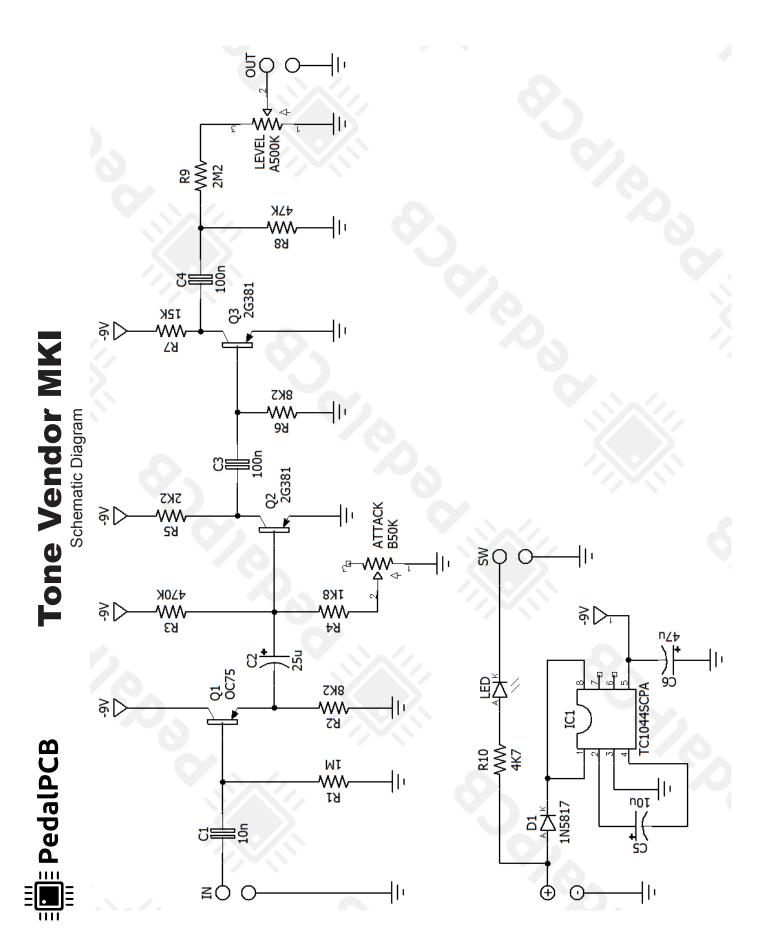



Wiring Diagram

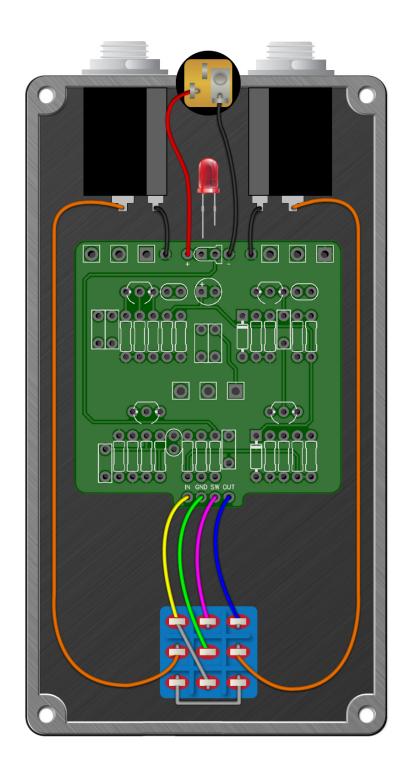



**Drill Template** 125B Enclosure

