


Revised 1/16/22

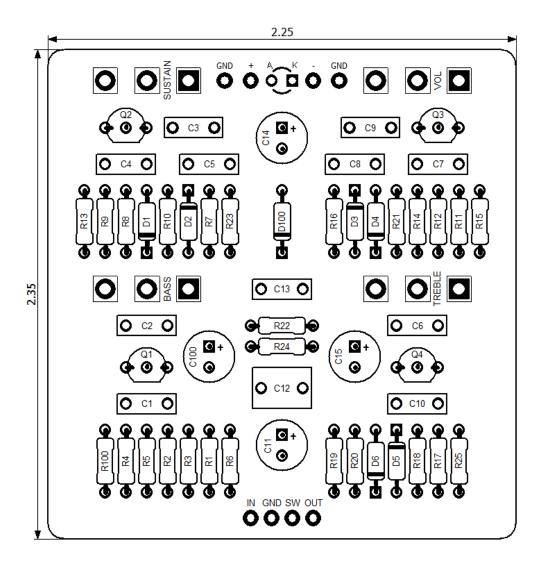

CONTROLS AND FEATURES

- Volume
- Sustain
- Treble
- Bass

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.



Pyrocumulus Fuzz

Parts List (Page 1 of 2)

LOCATION	VALUE	TYPE	NOTES
R1	1M	Resistor, 1/4W	
R2	3K3	Resistor, 1/4W	
R3	820R	Resistor, 1/4W	
R4	82K	Resistor, 1/4W	
R5	390K	Resistor, 1/4W	
R6	22K	Resistor, 1/4W	
R7	1K	Resistor, 1/4W	
R8	8K2	Resistor, 1/4W	
R9	390K	Resistor, 1/4W	
R10	150R	Resistor, 1/4W	
R11	390K	Resistor, 1/4W	
R12	8K2	Resistor, 1/4W	
R13	12K	Resistor, 1/4W	
R14	22K	Resistor, 1/4W	
R15	820R	Resistor, 1/4W	
R16	82K	Resistor, 1/4W	
R17	10K	Resistor, 1/4W	
R18	2M2	Resistor, 1/4W	
R19	150R	Resistor, 1/4W	
R20	4K7	Resistor, 1/4W	
R21	150R	Resistor, 1/4W	
R22	10K	Resistor, 1/4W	
R23	10K	Resistor, 1/4W	
R24	33K	Resistor, 1/4W	
R25	330R	Resistor, 1/4W	
R100	4K7	Resistor, 1/4W	
11100	7107	1700001, 17444	
C1	100n	Film capacitor, 7.2 x 2.5mm	
C2	100n	Film capacitor, 7.2 x 2.5mm	
C3	100n	Film capacitor, 7.2 x 2.5mm	
C4	560p	Ceramic capacitor	
C4 C5	47n	Film capacitor, 7.2 x 2.5mm	
C6	100n	Film capacitor, 7.2 x 2.5mm	
C7	560p	Ceramic capacitor	
C8	47n	Film capacitor, 7.2 x 2.5mm	
C9	2n2	Film capacitor, 7.2 x 2.5mm	
C10	2n2	Film capacitor, 7.2 x 2.5mm	
C11	4u7	Electrolytic capacitor, 5mm	
C12	1u	Film capacitor, 7.2 x 5.0mm	
C13	22n	Film capacitor, 7.2 x 2.5mm	
C14	4u7	Electrolytic capacitor, 5mm	
C15	47u	Electrolytic capacitor, 5mm	
C100	100u	Electrolytic capacitor, 5mm	
0100	1000	Electrory to capacitor, offilit	
D1	1N4148	Signal diode, DO-35	
D2	1N4148	Signal diode, DO-35	
	111-71-70	orginal aloue, DO-00	
		Continued on next page	




Pyrocumulus Fuzz

Parts List (Page 2 of 2)

LOCATION	VALUE	TYPE	NOTES
D3	1N4148	Signal diode, DO-35	
D4	1N4148	Signal diode, DO-35	
D5	1N4148	Signal diode, DO-35	
D6	1N4148	Signal diode, DO-35	
D100	1N5817	Schottky diode, DO-41	
2.00	1110011	Corrotaty diode, 20 11	
Q1	BC549C	BJT transistor, NPN TO-92	
Q2	BC549C	BJT transistor, NPN TO-92	
Q3	BC549C	BJT transistor, NPN TO-92	
Q4	BC549C	BJT transistor, NPN TO-92	
<u> </u>	200100	201 translater, 111 11 10 02	
VOLUME	A100K	16mm right-angle PCB mount pot	
SUSTAIN	B100K	16mm right-angle PCB mount pot	
TREBLE	B100K	16mm right-angle PCB mount pot	
BASS	B100K	16mm right-angle PCB mount pot	
	3.0010	The sugar sugar see mount pot	
	1		
	+		
	-		




Pyrocumulus Fuzz Schematic Diagram

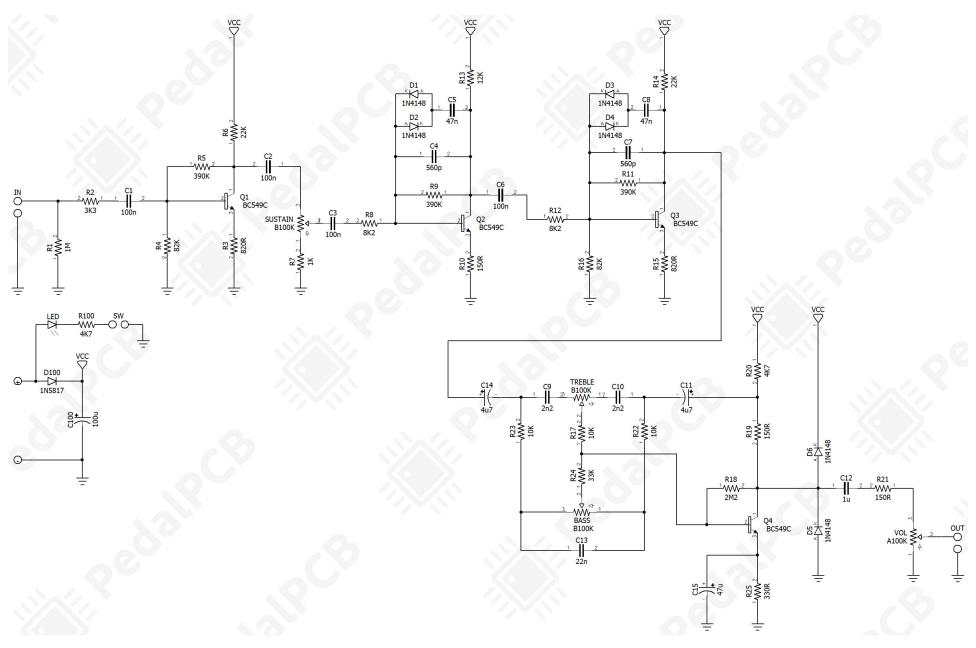



Pyrocumulus Fuzz Wiring Diagram

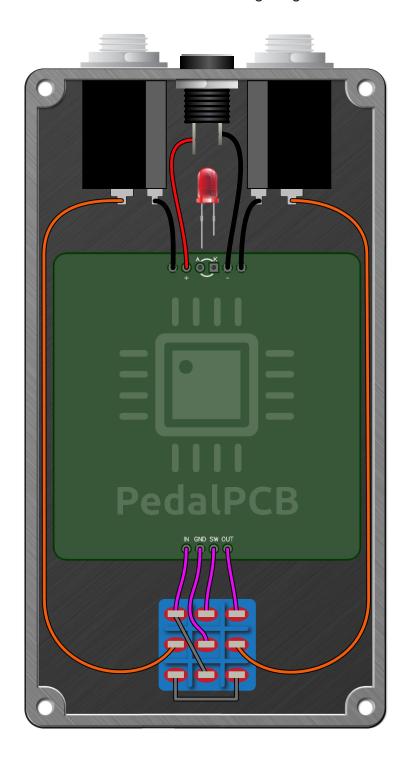



Pyrocumulus Fuzz

Drill Template

125B Enclosure

