


Revised 4/30/24

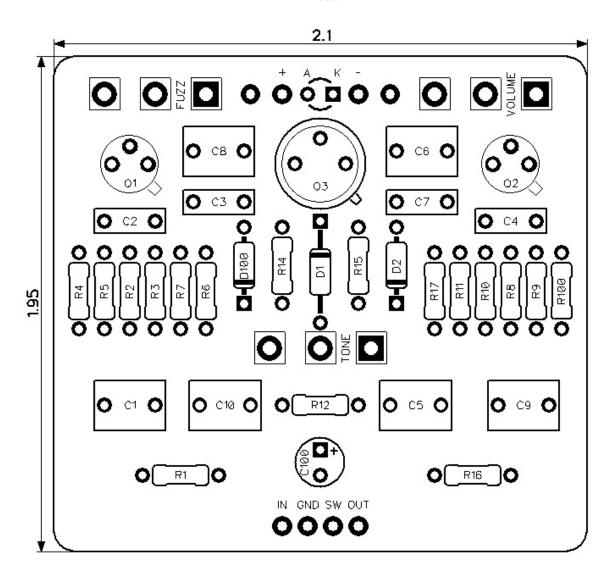

CONTROLS AND FEATURES

- Volume
- Tone
- Fuzz

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.




Marigold Fuzz Parts List (Page 1 of 1)

LOCATION	VALUE	TYPE	NOTES
R1	33K	Resistor, 1/4W	
R2	100K	Resistor, 1/4W	
R3	100R	Resistor, 1/4W	
R4	15K	Resistor, 1/4W	
R5	470K	Resistor, 1/4W	
R6	100R	Resistor, 1/4W	
R7	560R	Resistor, 1/4W	
R8	100K	Resistor, 1/4W	
R9	100R	Resistor, 1/4W	
R10	10K	Resistor, 1/4W	
R11	470K	Resistor, 1/4W	
R12	1K2	Resistor, 1/4W	
R14	3K3	Resistor, 1/4W	
R15	220K	Resistor, 1/4W	
R16	3K9	Resistor, 1/4W	
R17	3K9	Resistor, 1/4W	
R100	4K7	Resistor, 1/4W	
11100	7107	resistor, 1/4VV	
<u>C1</u>	100n	Film capacitor, 7.2 x 2.5mm	
C1 C2	470p	Ceramic capacitor	
C3	100n	Film capacitor, 7.2 x 2.5mm	
C4	470p	Ceramic capacitor	
C5	10n		
C5 C6 C7	470n	Film capacitor, 7.2 x 2.5mm Film capacitor, 7.2 x 5.0mm	
C7		<u> </u>	
C7 C8	470p 1u	Ceramic capacitor	
Co C9	33n	Film capacitor, 7.2 x 5.0mm	
C9 C10	100n	Film capacitor, 7.2 x 2.5mm	
	100n	Film capacitor, 7.2 x 2.5mm	
C100	1000	Electrolytic capacitor, 5mm	
D1	CG92H	Germanium diode	
D1 D2	4V7	Zener diode, 4.7V	
D100	1N5817	Schottky diode, DO-41	
ווע	IIIOOII	Schollky diode, DO-41	
Q1	BC107	BJT transistor, NPN TO-18	
	BC107	BJT transistor, NPN TO-18	
Q2 Q3		· · · · · · · · · · · · · · · · · · ·	
Q3	OC140	Germanium transistor, NPN TO-1	
VOLUME	A100K	16mm right-angle PCB mount pot	
TONE	W20K	16mm right-angle PCB mount pot	
FUZZ	A100K	16mm right-angle PCB mount pot	
FUZZ	ATOUR	Tomin right-angle i CB mount pot	
		i .	1


FILE PedalPCB

Marigold Fuzz

Schematic Diagram

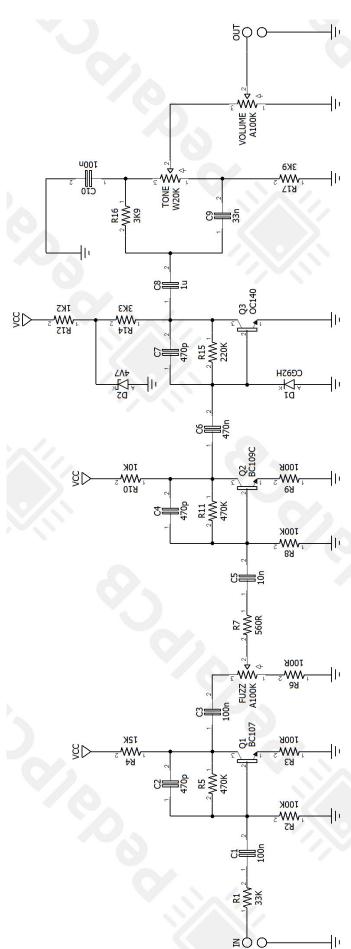








Marigold Fuzz Wiring Diagram

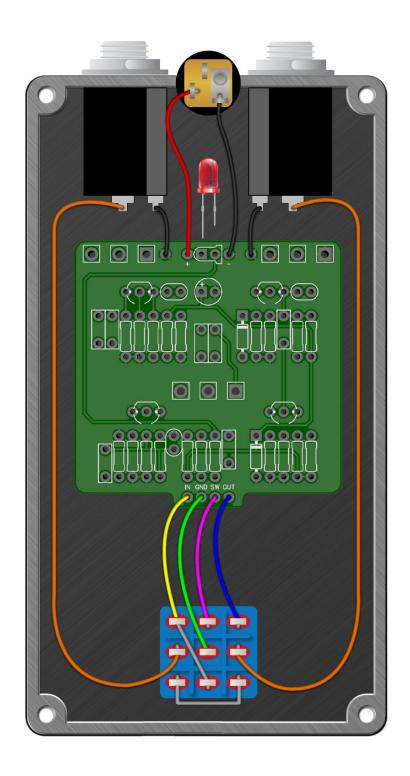



Marigold Fuzz Drill Template

125B Enclosure

