


Lot Lizard Octave Fuzz

Revised 4/26/23

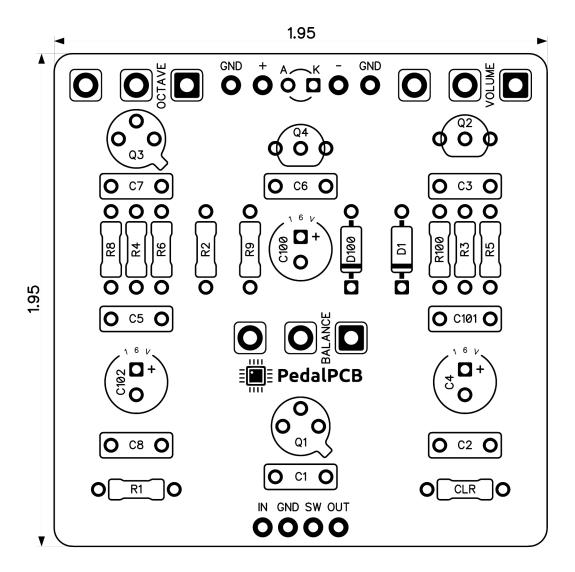

CONTROLS AND FEATURES

- Volume
- Balance
- Octave

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.




Parts List (Page 1 of 1)

LOCATION	VALUE	TYPE	NOTES
R1	1M	Resistor, 1/4W	
R2	100K	Resistor, 1/4W	
R3	1M	Resistor, 1/4W	
R4	470K	Resistor, 1/4W	
R5	10K	Resistor, 1/4W	
R6	10K	Resistor, 1/4W	
R8	10K	Resistor, 1/4W	
R9	470K	Resistor, 1/4W	
R100	470R	Resistor, 1/4W	
CLR	4K7	Resistor, 1/4W	* LED current limiting resistor
<u></u>	11.1.	1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1	
C1	100n	Film capacitor, 7.2 x 2.5mm	
C2	100n	Film capacitor, 7.2 x 2.5mm	
C3	47p	Ceramic capacitor	* Omitted in Nano version
C4	10u	Electrolytic capacitor, 5mm	2
C5	100n	Film capacitor, 7.2 x 2.5mm	
<u>C6</u>	100n	Film capacitor, 7.2 x 2.5mm	
C7	100n	Film capacitor, 7.2 x 2.5mm	
C8	47p	Ceramic capacitor	* Omitted in Big Box version
C100	100u	Electrolytic capacitor, 5mm	Onnitied in Big Box version
C101	100u	Film capacitor, 7.2 x 2.5mm	
C102	10u	Electrolytic capacitor, 5mm	
C 102	Tou	Electrorytic capacitor, offin	
D1	1N4148	Signal diode, DO-35	
D100	1N5817	Schottky diode, DO-41	
ווע	IINOOI7	Schottky diode, DO-41	
<u></u>	2N2222A	DIT transiator NDN TO 19	
Q1 Q2	2N5088	BJT transistor, NPN TO-18 BJT transistor, NPN TO-92	
Q2 Q3	2N2222A	BJT transistor, NPN TO-18	
Q3 Q4		,	
Q4	2N3906	BJT transistor, PNP TO-92	
	A 1001/	16mm right angle DCD mayer and	
VOLUME	A100K	16mm right-angle PCB mount pot	* C1V in Dia Day Varaina
BALANCE	B1K	16mm right-angle PCB mount pot	* C1K in Big Box Version
OCTAVE	B100K	16mm right-angle PCB mount pot	



PedalPCB Lot Lizard Octave Fuzz


Schematic Diagram

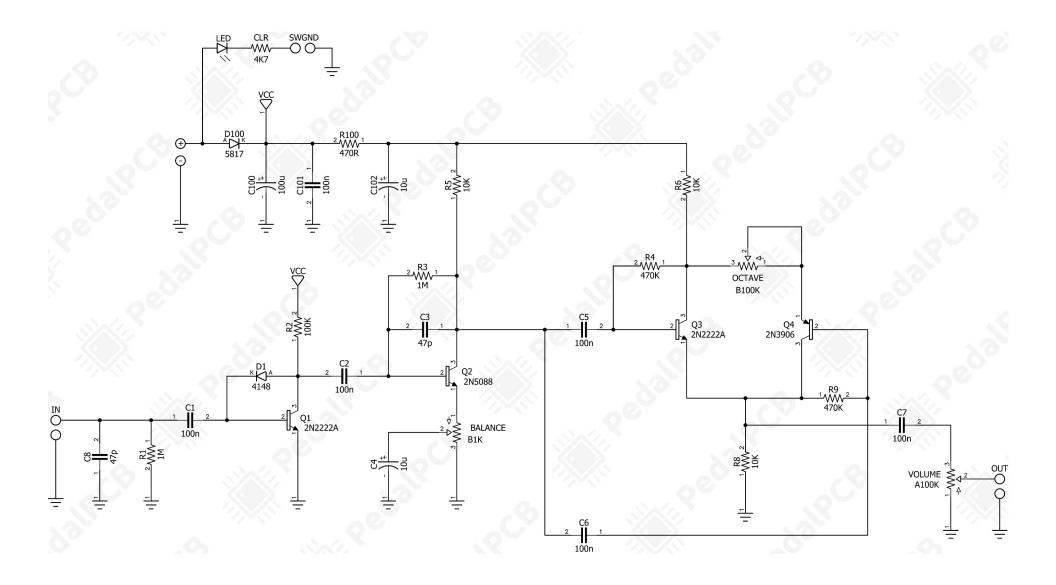



PedalPCB Lot Lizard Octave Fuzz

Wiring Diagram

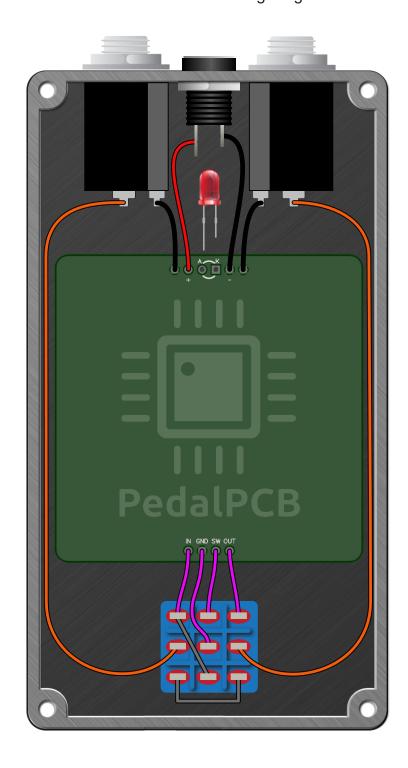



PedalPCB Lot Lizard Octave Fuzz

Drill Template 125B Enclosure

