


Revised 10/14/21

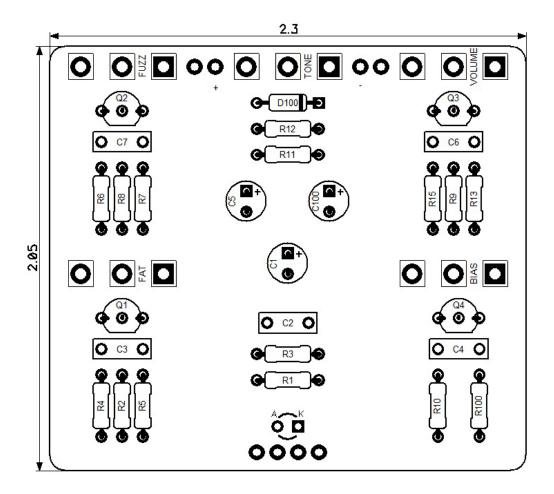

CONTROLS AND FEATURES

- Level
- Tone
- Fuzz
- Fat
- Bias

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.




Dung Beetle Fuzz Parts List (Page 1 of 1)

LOCATION	VALUE	TYPE	NOTES
R1	1M	Resistor, 1/4W	
R2	22K	Resistor, 1/4W	
R3	150K	Resistor, 1/4W	
R4	1K	Resistor, 1/4W	
R5	10K	Resistor, 1/4W	
R6	100R	Resistor, 1/4W	
R7	10K	Resistor, 1/4W	
R8	47K	Resistor, 1/4W	
R9	1K	Resistor, 1/4W	
R10	10K	Resistor, 1/4W	
R11	750R	Resistor, 1/4W	
R12	100R	Resistor, 1/4W	
R13	10K	Resistor, 1/4W	
R15	1K5	Resistor, 1/4W	
R100	4K7	Resistor, 1/4W	
11100	TIN	170313101, 1/477	
C1	10u	Electrolytic capacitor, 5mm	
C2	10u	Film capacitor, 7.2 x 2.5mm	
C2	100n	Film capacitor, 7.2 x 2.5mm	
C4	100n		
C1 C2 C3 C4 C5	4u7	Film capacitor, 7.2 x 2.5mm	
C6		Electrolytic capacitor, 5mm	
C7	100n	Film capacitor, 7.2 x 2.5mm	
	2n2	Film capacitor, 7.2 x 2.5mm	
C100	100u	Electrolytic capacitor, 5mm	
D400	4115047	0-1	
D100	1N5817	Schottky diode, DO-41	
0.4	0115000	DIT () (NIDNI TO 00	
Q1	2N5088	BJT transistor, NPN TO-92	
Q2	2N5088	BJT transistor, NPN TO-92	
Q3	2N5088	BJT transistor, NPN TO-92	
Q4	2N5088	BJT transistor, NPN TO-92	
VOLUME	A 40016	10	
VOLUME	A100K	16mm right-angle PCB mount pot	
TONE	B50K	16mm right-angle PCB mount pot	
FUZZ	B1K	16mm right-angle PCB mount pot	
BIAS	B25K	16mm right-angle PCB mount pot	
FAT	B100K	16mm right-angle PCB mount pot	
·	·		

500 VOLUME & u00T IKZ WW BIZ TONE B50K ₩ 10K MW KI3 TOK §D MW B10 Dung Beetle Fuzz Znt 100K -WW-Q3 2N5088 **Y50R** ₩V WW WV B3 FUZZ BIK BIAS B25K 100К VVV-В6 10K WW VZV 88 ¥ ¥ ¥ 5=3 Q1 100n 2N5088 10K VVV B2 IK VVV Bd 55K ₩₩ 85 120K -VVV-133 "" ■ PedalPCB 다. 2=5 100n SD S IW WW FAT B100K D100 1N5817 %¥ 4K7 Ф



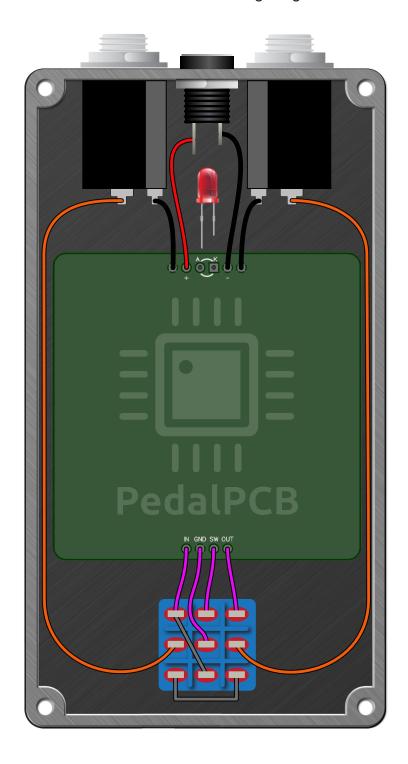



PedalPCB Dung Beetle Fuzz

Drill Template 125B Enclosure

