




Creamery Compressor


Revised 7/18/21

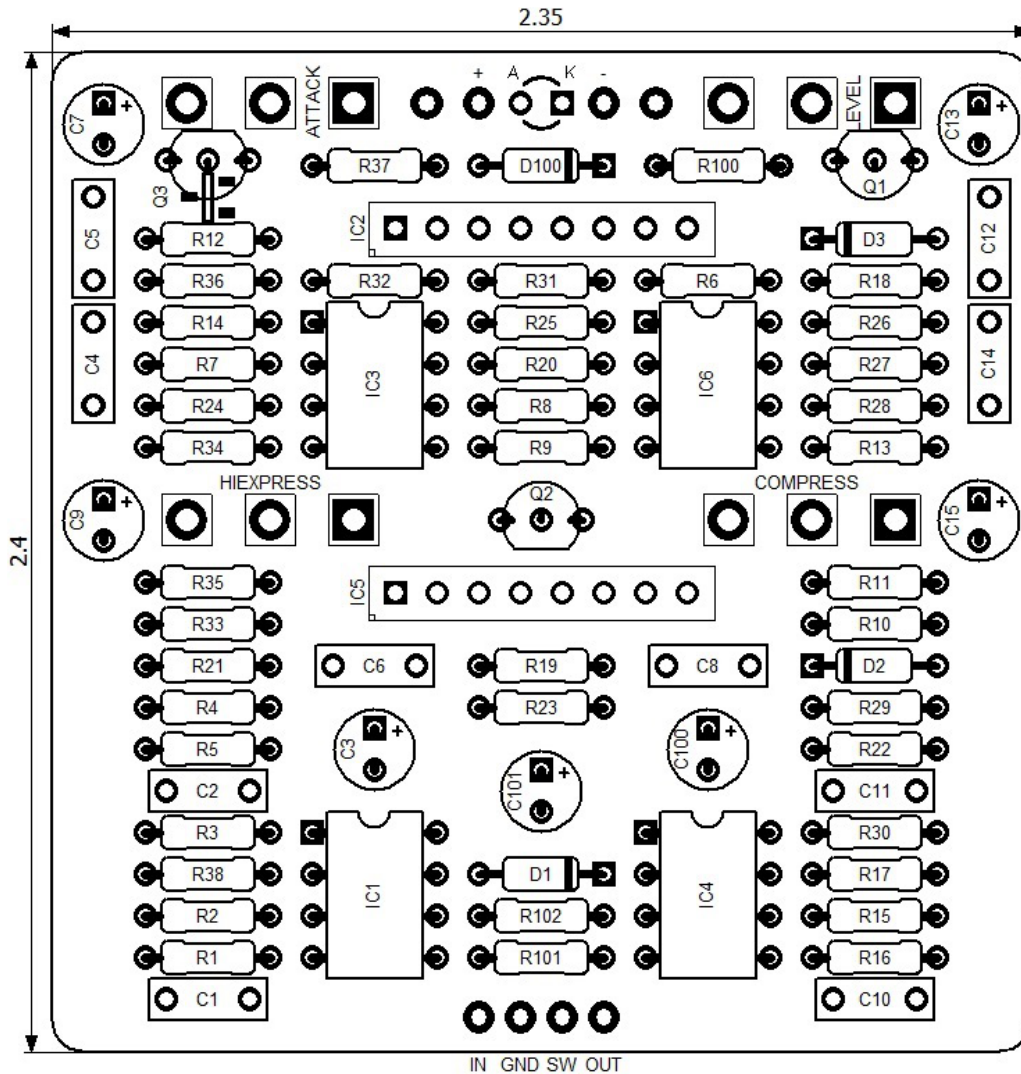

CONTROLS AND FEATURES

- Level
- Attack
- Compress
- Hi-Express

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.




LOCATION	VALUE	TYPE	NOTES
R1	1M	Resistor, 1/4W	
R2	1M	Resistor, 1/4W	
R3	470K	Resistor, 1/4W	
R4	33K	Resistor, 1/4W	
R5	1M	Resistor, 1/4W	
R6	2K7	Resistor, 1/4W	
R7	33K	Resistor, 1/4W	
R8	10K	Resistor, 1/4W	
R9	47K	Resistor, 1/4W	
R10	18K	Resistor, 1/4W	
R11	100K	Resistor, 1/4W	
R12	2K2	Resistor, 1/4W	
R13	1M	Resistor, 1/4W	
R14	47K	Resistor, 1/4W	
R15	100K	Resistor, 1/4W	
R16	100K	Resistor, 1/4W	
R17	47K	Resistor, 1/4W	
R18	1M	Resistor, 1/4W	
R19	33K	Resistor, 1/4W	
R20	33K	Resistor, 1/4W	
R21	7K5	Resistor, 1/4W	
R22	2K7	Resistor, 1/4W	
R23	33K	Resistor, 1/4W	
R24	33K	Resistor, 1/4W	
R25	33K	Resistor, 1/4W	
R26	1M	Resistor, 1/4W	
R27	20K	Resistor, 1/4W	
R28	20K	Resistor, 1/4W	
R29	100K	Resistor, 1/4W	
R30	100R	Resistor, 1/4W	
R31	51R	Resistor, 1/4W	
R32	1K	Resistor, 1/4W	
R33	4K7	Resistor, 1/4W	
R34	180K	Resistor, 1/4W	
R35	10K	Resistor, 1/4W	
R36	10K	Resistor, 1/4W	
R37	15K	Resistor, 1/4W	
R38	470K	Resistor, 1/4W	
R100	4K7	Resistor, 1/4W	
R101	10K	Resistor, 1/4W	
R102	10K	Resistor, 1/4W	
C1	47n	Film capacitor, 7.2 x 2.5mm	
C2	15p	Ceramic capacitor	
C3	1u	Electrolytic capacitor, 5mm	
C4	330p	Ceramic capacitor	
C5	4n7	Film capacitor, 7.2 x 2.5mm	
C6	330p	Ceramic capacitor	






Creamery Compressor

Parts List (Page 2 of 2)

[illegible]

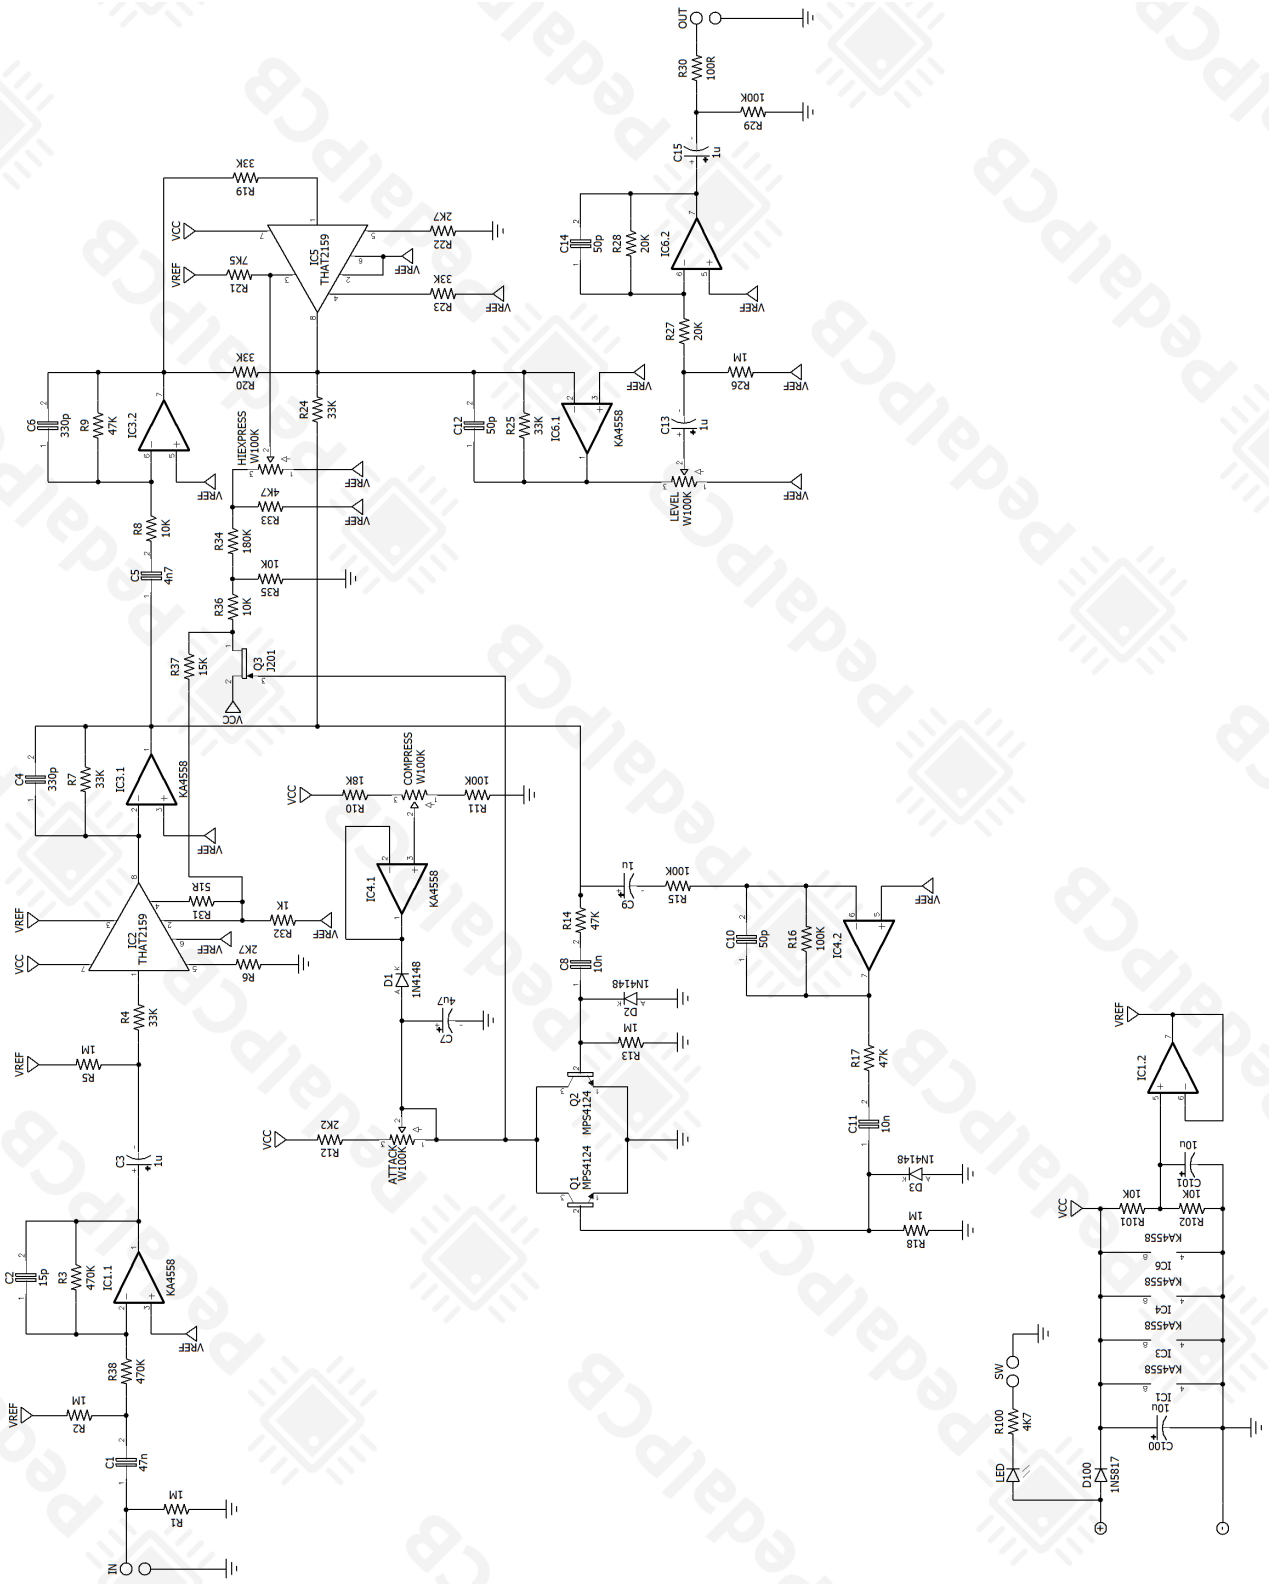

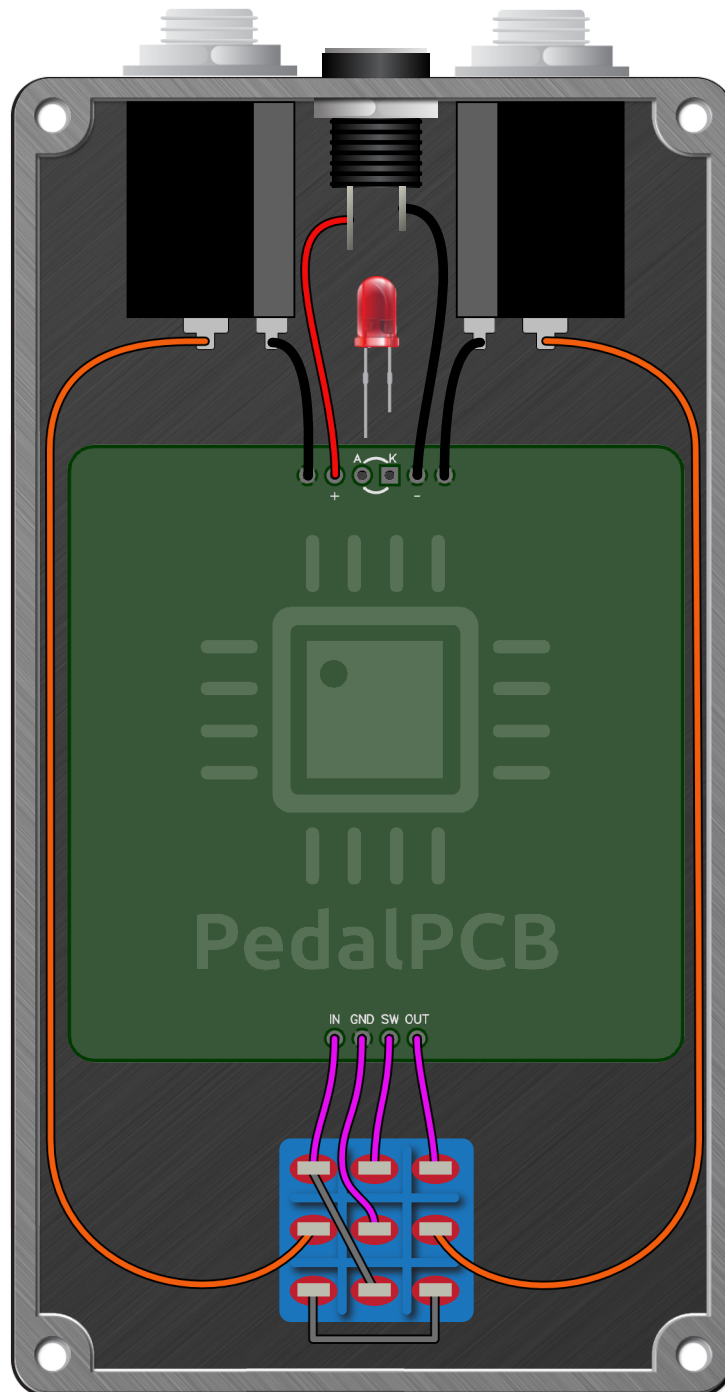



PedalPCB

Creamery Compressor

Drill Template
125B Enclosure

