


# PedalPCB

## Dark Rift Delay

Revision 05.01.20

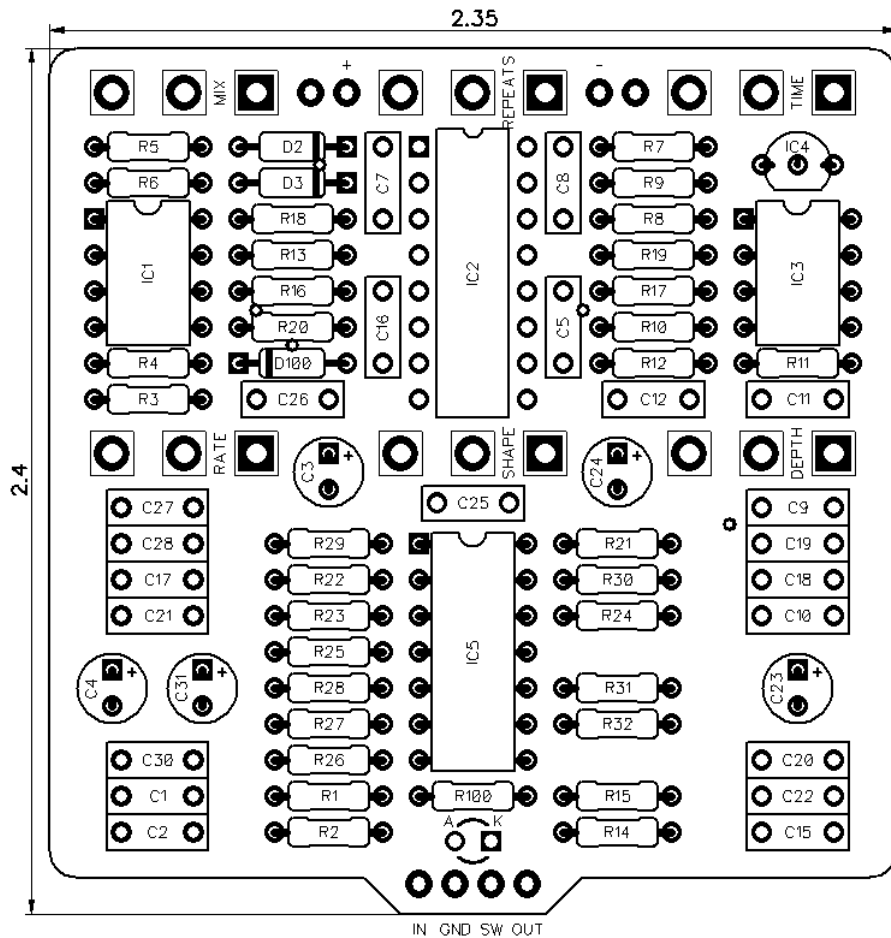

### Controls

- Time
- Repeats
- Mix
- Depth
- Shape
- Rate

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

# Dark Rift Delay

## Parts List

### RESISTORS (1/4W)

R1	1M
R2	1K
R3	1M
R4	47K
R5	47K
R6	47K
R7	8K2
R8	18K
R9	10K
R10	1K
R11	10K
R12	10K
R13	22K
R14	470R
R15	100K
R16	47K
R17	15K
R18	22K
R19	15K
R20	1K
R21	1K
R22	33K
R23	10K
R24	47K
R25	47K
R26	47K
R27	100K
R28	33K
R29	10K
R30	10K
R31	22K
R32	22K
R100	4K7

### CAPACITORS

C1	100p
C2	1u
C3	10u
C4	100u
C5	1u
C7	1u
C8	1n
C9	10n
C10	1u
C11	4n7
C12	100n
C15	1u
C16	1u
C17	1u
C18	4n7
C19	10n
C20	100n
C21	100n
C22	3n3
C23	100u
C24	47u
C25	330n
C26	100n
C27	100n
C28	1u
C30	10n
C31	10u

### INTEGRATED CIRCUITS

IC1	TL072
IC2	PT2399
IC3	LM833
IC4	78L05
IC5	LM324A


### DIODES

D2	1N4148
D3	1N4148
D100	1N5817

### POTENTIOMETERS

TIME	B50K
REPEATS	B50K
MIX	B50K
DEPTH	B50K
SHAPE	A100K
RATE	C1M

# Dark Rift Delay

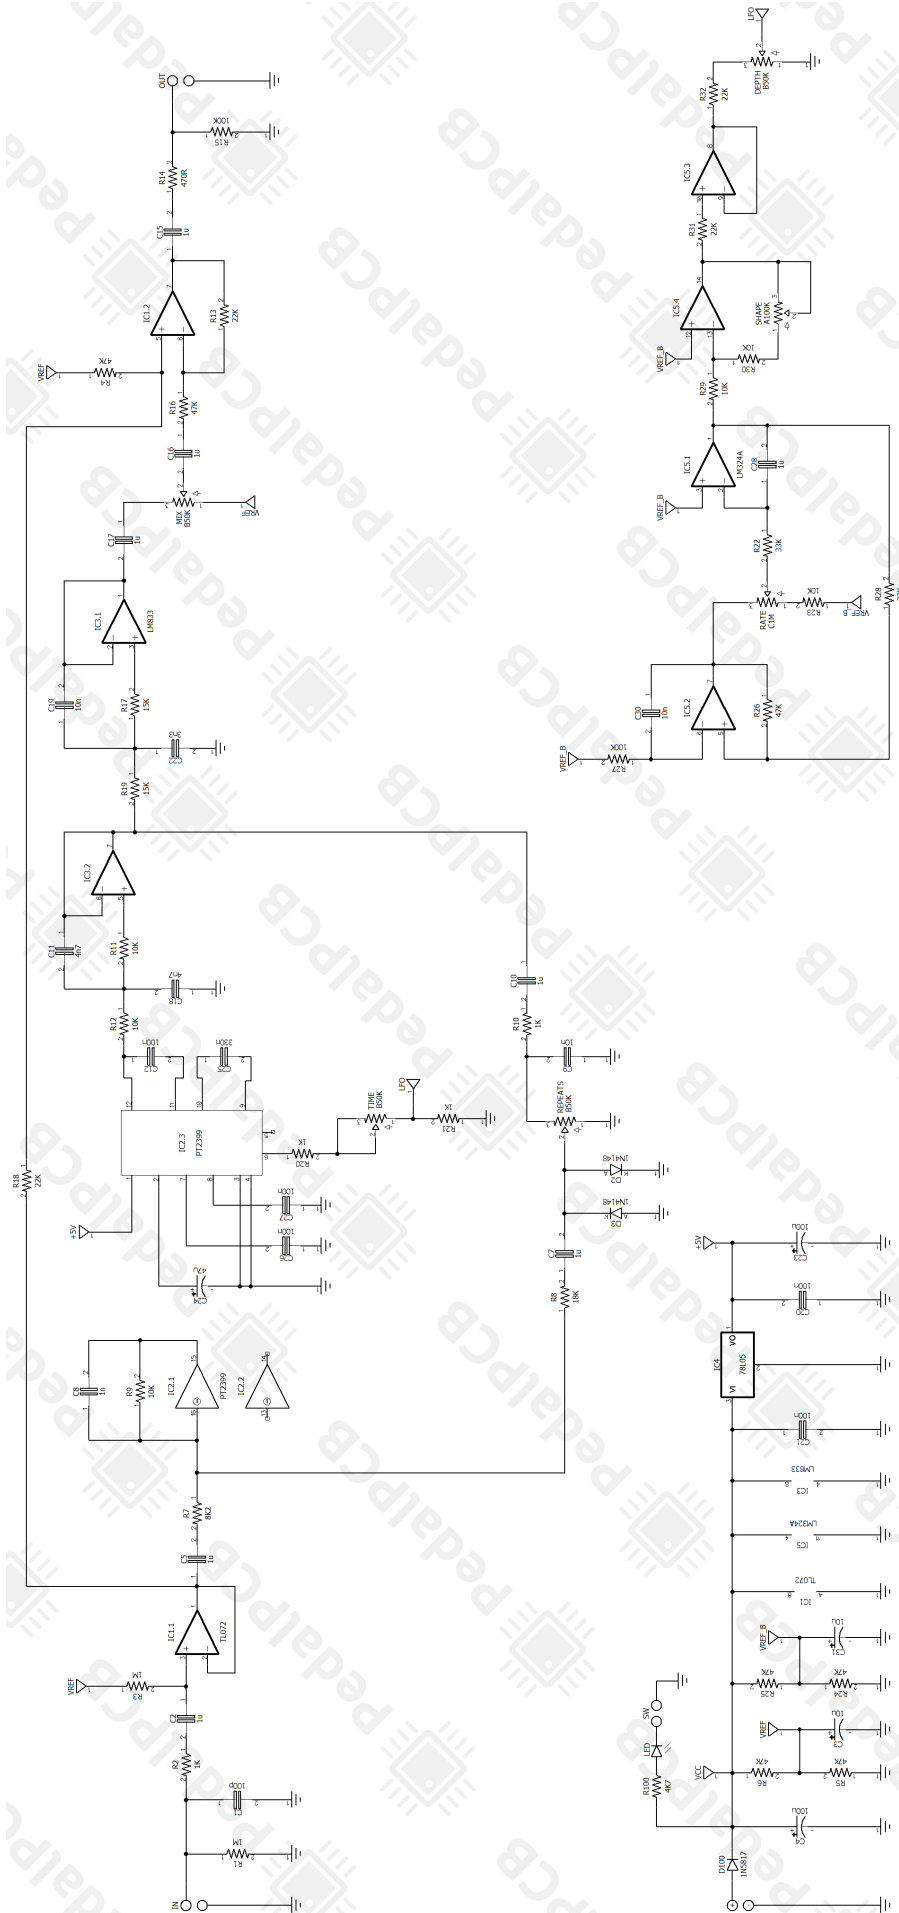

# Dark Rift Delay

Wiring Diagram

