


Revised 10/27/22

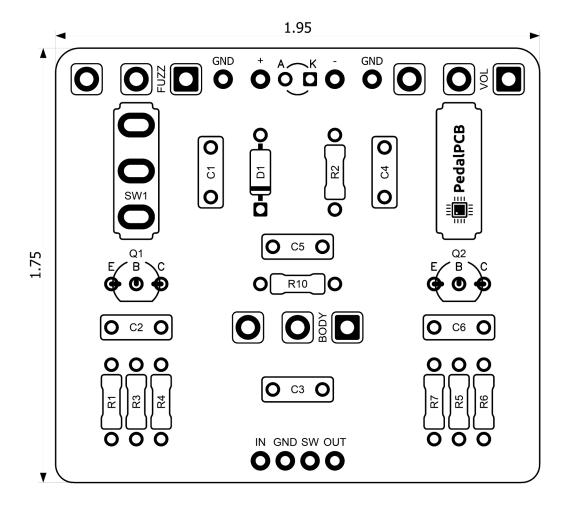

#### **CONTROLS AND FEATURES**

- Volume
- Fuzz
- Body
- Horn (Toggle Switch)

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.




Parts List (Page 1 of 1)

LOCATION	\/A	TVDE	NOTES
LOCATION	VALUE	TYPE	NOTES
R1	2K2	Resistor, 1/4W	
R2	4K7	Resistor, 1/4W	
R3	4M7	Resistor, 1/4W	
R4	22K	Resistor, 1/4W	
R5	1M	Resistor, 1/4W	
R6	47K	Resistor, 1/4W	
R7	100K	Resistor, 1/4W	
R10	5K6	Resistor, 1/4W	
	47		
C1	47n	Film capacitor, 7.2 x 2.5mm	
C1 C2 C3 C4 C5 C6	1n	Film capacitor, 7.2 x 2.5mm	
C3	47n	Film capacitor, 7.2 x 2.5mm	
C4	47n	Film capacitor, 7.2 x 2.5mm	
C5	470p	Ceramic disc capacitor	
C6	100n	Signal diode, DO-35	
D1	1N5817	Schottky diode, DO-41	
04	MDCC540	DIT to a sister NDN TO CO	
Q1	MPS6513	BJT transistor, NPN TO-92	
Q2	MPS6513	BJT transistor, NPN TO-92	
SW1	SPDT	Toggle switch, SPDT	3-position (ON/OFF/ON)
OVVI	SFD1	Toggle switch, SFD1	3-position (014/01 1 /014)
VOL	A100K	16mm right-angle PCB mount pot	
FUZZ	B100K	16mm right-angle PCB mount pot	
BODY	B250K	16mm right-angle PCB mount pot	




Schematic Diagram

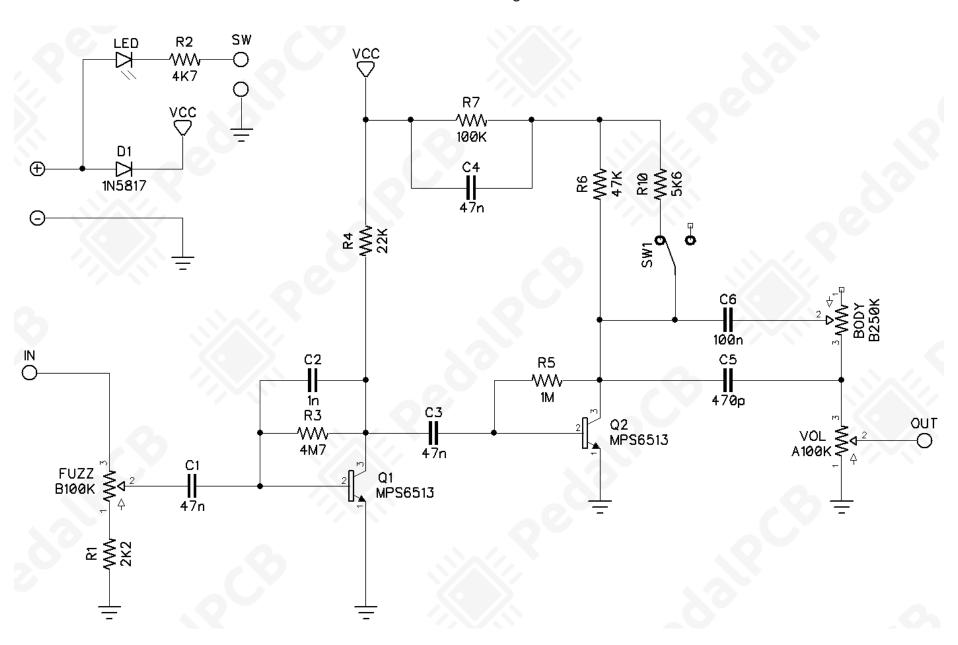



Wiring Diagram

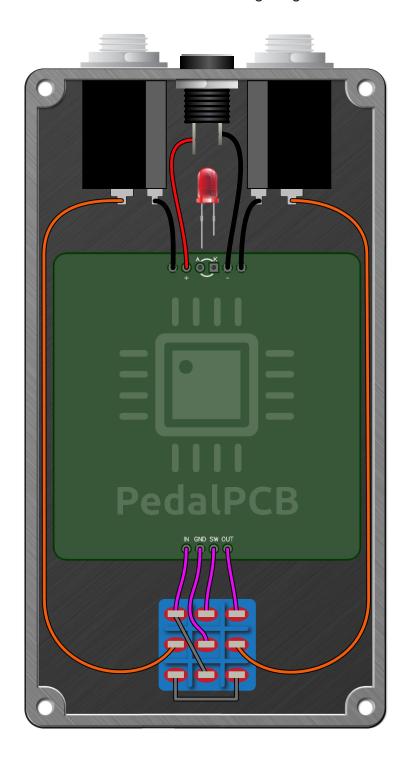



Drill Template

125B Enclosure

