

CONTROLS AND FEATURES

- Volume
- Fuzz
- Bias (Internal trim pot)

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.




Parts List (Page 1 of 1)

LOCATION	VALUE	TYPE	NOTES
R1	100K	Resistor, 1/4W	
R2	33K	Resistor, 1/4W	
R3	1K	Resistor, 1/4W	
R4	330R	Resistor, 1/4W	
R5	1M	Resistor, 1/4W	
CLR	4K7	Resistor, 1/4W	* LED current limiting resistor
	1111	, , , , , , , , , , , , , , , , , , , ,	
C1	2u2	Electrolytic capacitor, 5mm	
C1 C2 C3	22u	Electrolytic capacitor, 5mm	
C3	10n	Electrolytic capacitor, 5mm	
C100	47u	Electrolytic capacitor, 5mm	
D100	1N5817	Schottky diode, DO-41	
Q1	BC108	BJT transistor, NPN TO-18	
Q2	BC108	BJT transistor, NPN TO-18	
BIAS	10K	Trimmer potentiometer, 3362P type	
VOLUME	A500K	16mm right-angle PCB mount pot	
FUZZ	B1K	16mm right-angle PCB mount pot	
		1	




Schematic Diagram

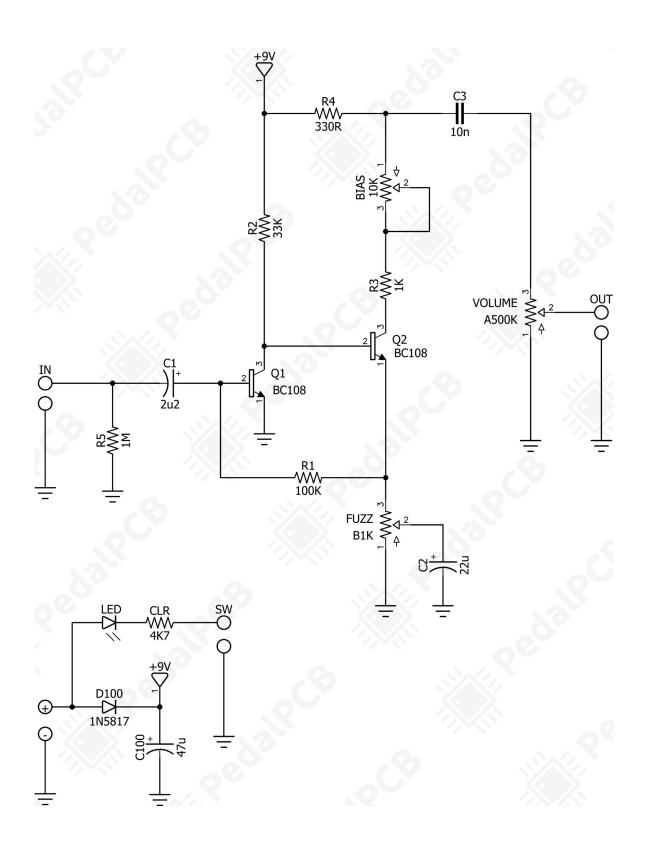



Wiring Diagram

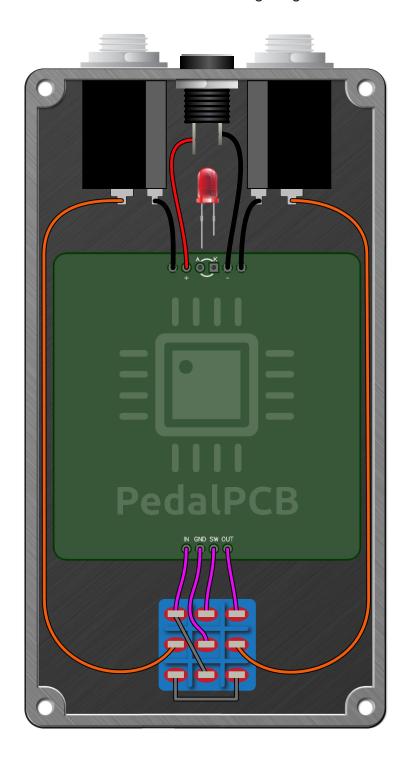



Drill Template 125B Enclosure

