

CLEESINK[®]


Automatic Dust Control Switch

Please read the operating instructions before use


- The CLEESINK Switch Box unit is intended for indoor use, in dry locations only
- Do not connect hazardous devices to the ACCESSORY OUTLET receptacle
- Do not connect to mains circuits that have a capacity of greater than 15A

Search "CLEESINK" on  Facebook to follow and message us. To get an additional year of warranty. For more information or help with product, please feel free to contact us by e-mail: service@cleesink.com


• USING THE CLEESINK AUTOSWITCH IS EASY AS 1-2-3



Plug Autoswitch into the wall socket.

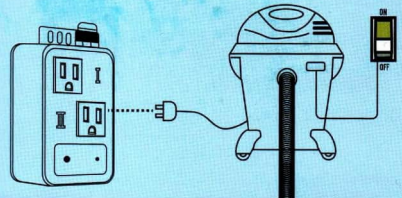


Plug vacuum into an ACCESSORY outlet.
switch ON vacuum.

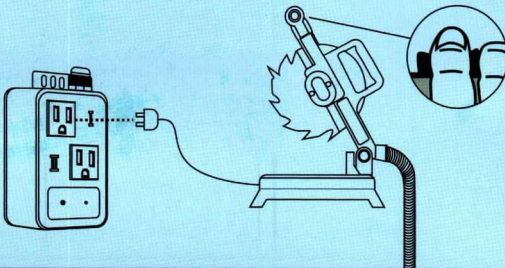

Vacuum is now activated by power tool button, once you turn on you power tool, the vacuum will turn on after 0.5 seconds; then you turn off you powel tool, the vacuum will tu-
rn off after 5 seconds to continueto clear the air.

Plug tool into POWER TOOL outlet, use your power tool as normal.

● **ALLOWS POWER TOOL TO TURN VACUUM/ACCESSORY ON & OFF AUTOMATICALLY**

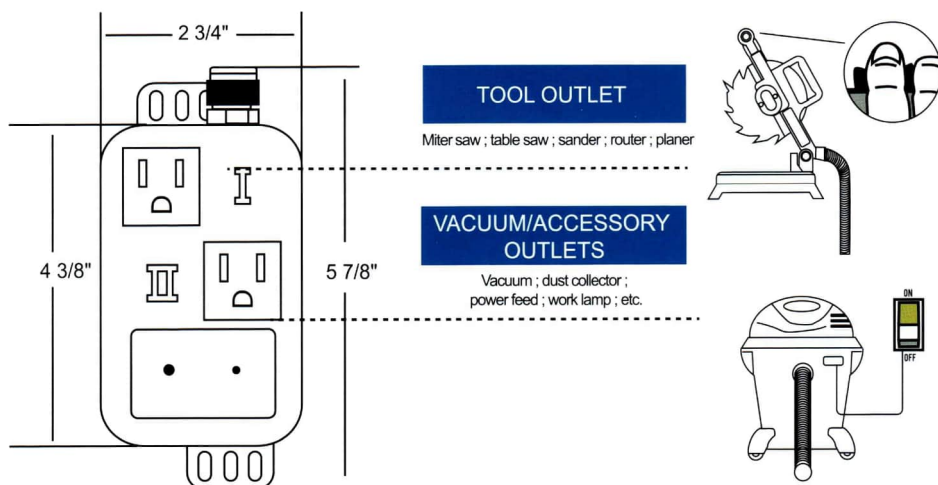

Runs the vacuum only while you're using your tool so you save time and electricity.
Automatically delays vacuum turn-on by 0.5 seconds to prevent circuit overload.
Automatically delays vacuum turn-off by 5 seconds to continue to clear the air while the moto spins down.

● **POWER TOOL OUTLET**

Tool Outlet Connection: 2 or 3 Prong Plug
Max motor rating should not exceed 110V/15A, 50/60Hz, 2000W
Table Saws from portable to contractor type
Miter Saws both 10" and 12"
Sanders-Handheld or Standing
Rotary/Oscillating Handheld Cutting Tools
Routers, Portable Joiners, Planers

● **PARAMETERS**

Outlet Required	Standard 110V/15A 50/60Hz Outlet
Input Connection	3 prong(grounded) male
Power Rating	110V/15A, 50/60Hz
Actuation Threshold	~0.25 Amps (About 30W at 120V)

● **ACCESSORY OUTLET**

Any standard shop type vacuum will run on the CLEESINK Autoswitch
Vacuum motor HP should not exceed 2000W
Dust collector motor should be rated at 110V/15A and HP should not exceed 2000W
Power Feeders can also be controlled

● **PHYSICAL SPECIFICATION**

Dimensions	4 1/4"L x 2 5/8"W x 1 3/8"H
Control Box Material	ABS
Finish	Black Textured

*** CAUTION: ONLY USE CUTTING TOOLS IN POWER TOOL OUTLET NEVER USE CUTTING TOOLS IN THE ACCESSORY OUTLET**