



YETDA INDUSTRY LTD.

5mm Full Color Led Lamps 500RGB4E

5mm with Red and Pure Green and Blue Dice °

Encapsulated with **Water Clear Lens** package °

Blue Dice with Patent °

Absolute Maximum Ratings :

Parameter	Maximum Rating	Unit
Peak Forward Current	120	mA
Continuous Forward Current	30	mA
Operating Temperature Range	-20°C to +75°C	
Storage Temperature Range	-40°C to +100°C	
Lead Soldering Temperature	260°C for 3 seconds 1.6mm(0.063 inch) from body	

Electro-Optical Characteristics (Ta = 25°C)


Parameter Radiant	Test Condition	Symbol	Min.	Typ.	Max.	Unit
Forward Voltage	If = 20mA	Vf	R	1.80	1.95	V
			G	3.0	3.3	
			B	3.0	3.3	
Reverse Current	Vr = 5V	Ir			50	uA
Luminous Flux	If = 20mA	Ø	R	1000	1500	mcd
			G	4000	5000	
			B	1000	1500	
Spectral Bandwidth	If = 20mA	Δλ	R		25	nm
			G		30	
			B		30	
Wavelength	If = 20mA	λp				nm
		λd	R	640	642	nm
			G	510	515	
			B	465	468	
Half View Angle	If = 20mA	2θ1/2		20		deg



YETDA INDUSTRY LTD.

Package





Item: 500RGB

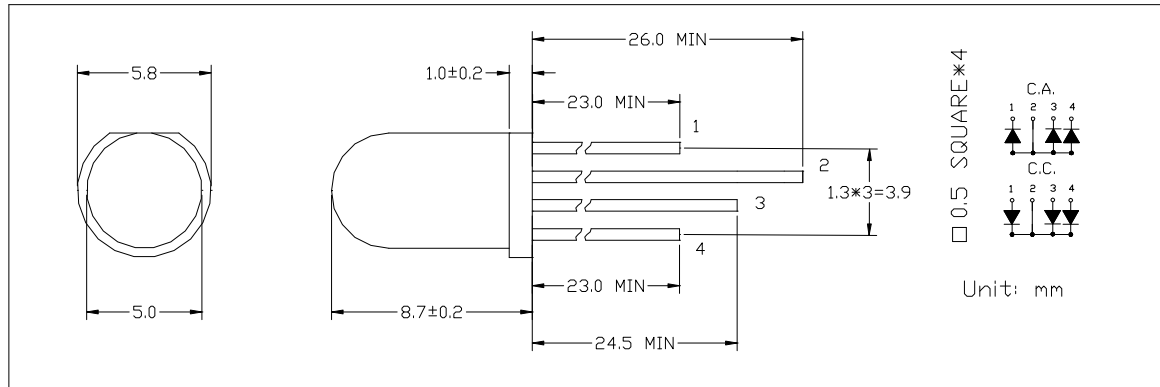



YETDA INDUSTRY LTD.

Typical Electro-Optical Characteristics Curve:

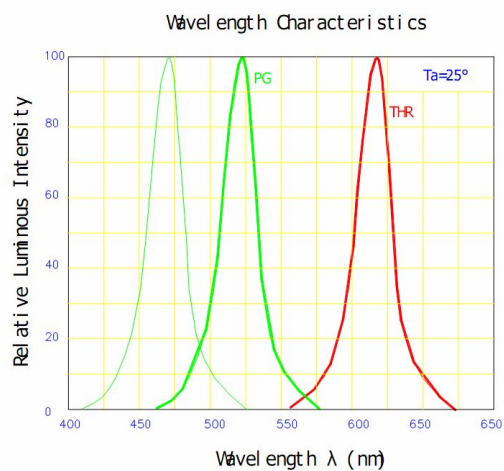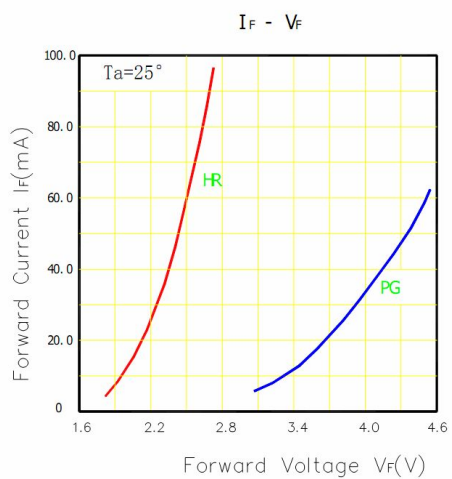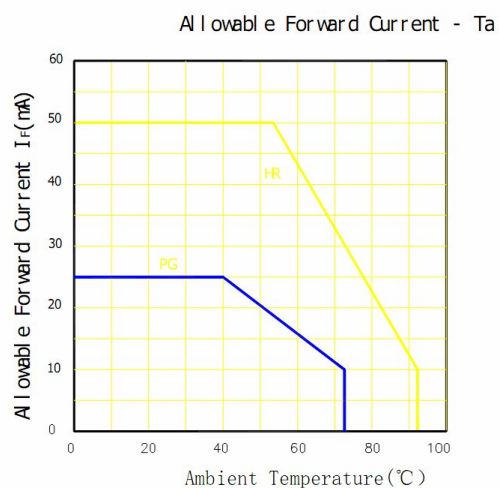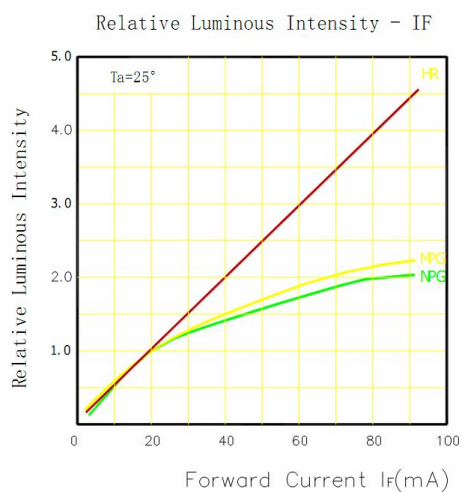



YETDA INDUSTRY LTD.

• Soldering:

1. Manual of soldering


The temperature of the iron tip should not be higher than 260°C and

Soldering within 3 seconds per solder-land is to be observed

2. DIP soldering (Wave Soldering):

Preheating: 120°C ~ 150°C within 5 sec. 260°C (Max)

Gradual Cooling (Avoid quenching)

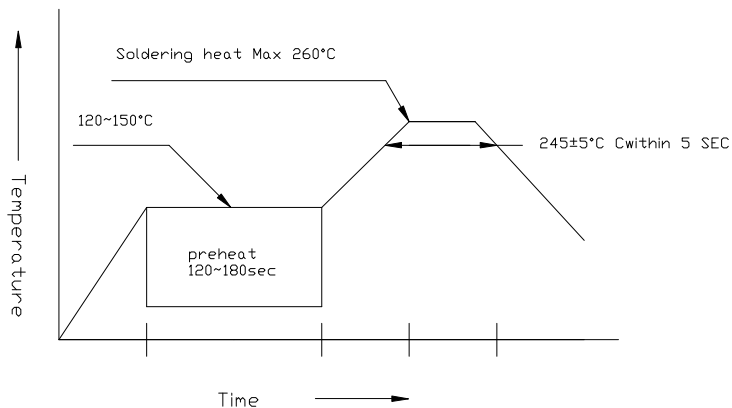


3. Reflow Soldering

Preheating: 140°C ~ 160°C ± 5°C, within 2 minutes.

Operation heating: 235°C (Max) within 10 seconds (Max)

Gradual Cooling (Avoid quenching)

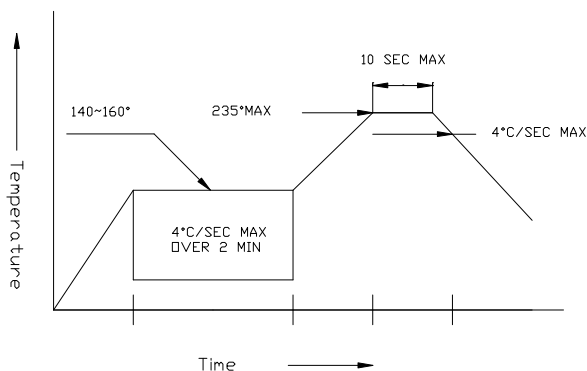

• Handling:

Care must be taken not to cause to the epoxy resin portion of Yetda LEDS while it is exposed to high temperature.

Care must be taken not rub the epoxy resin portion of Yetda LEDS with hard or sharp article such as the sand blast and the metal hook