
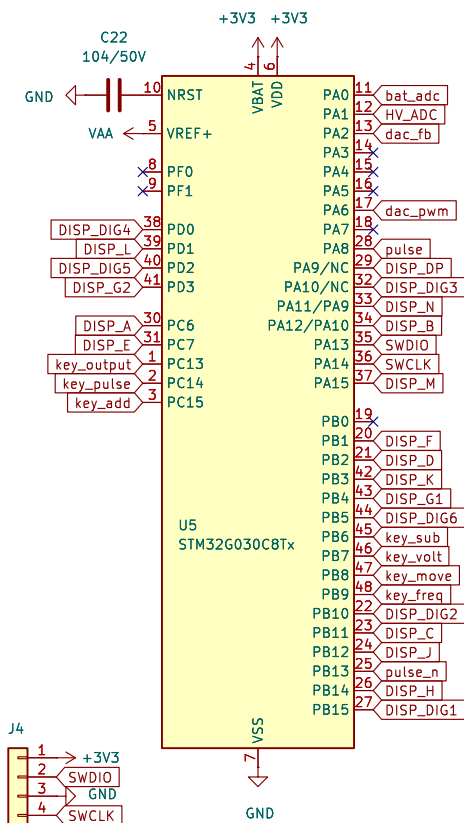
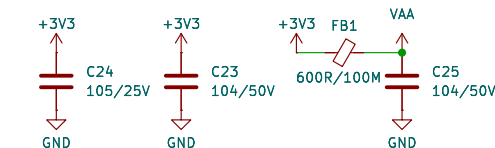
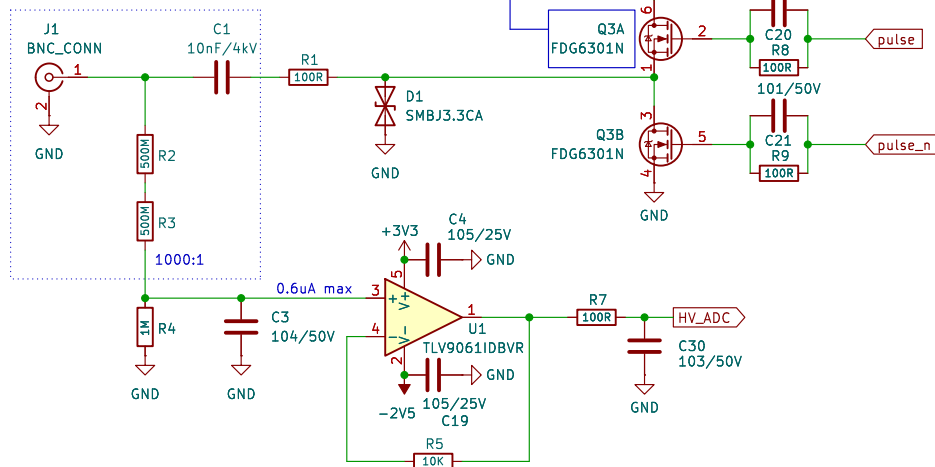


$V_{DS(sat)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}$, $I_D = 250\ \mu A$	0.65	0.65	1.5	V
$\Delta V_{DS(sat)} / \Delta T_J$	Gate Threshold Voltage Temperature Coefficient	$I_D = 250\ \mu A$, Referenced to 25°C	-	-21	-	mV/°C
$R_{DS(on)}$	Static Drain-Source On-Resistance	$V_{DS} = 4.5\ V$, $I_D = 0.22\ A$	-	2.6	4	Ω
		$V_{DS} = 4.5\ V$, $I_D = 0.22\ A$, $T_J = 25^\circ C$	-	5.3	7	
		$V_{DS} = 27\ V$, $I_D = 0.19\ A$	-	3.7	5	
$I_{DS(on)}$	On-State Drain Current	$V_{DS} = 4.5\ V$, $V_{GS} = 5\ V$	0.22	-	-	A
t_{rs}	Forward Transconductance	$V_{DS} = 5\ V$, $I_D = 0.22\ A$	-	0.2	-	S

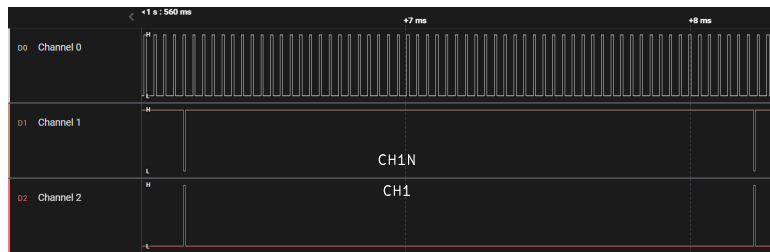

35





DISP

Sheet: /
File: pulsecal.kicad_sch

Title: 率表/定标器测试工具

Rev: V1.2

Id: 1/3

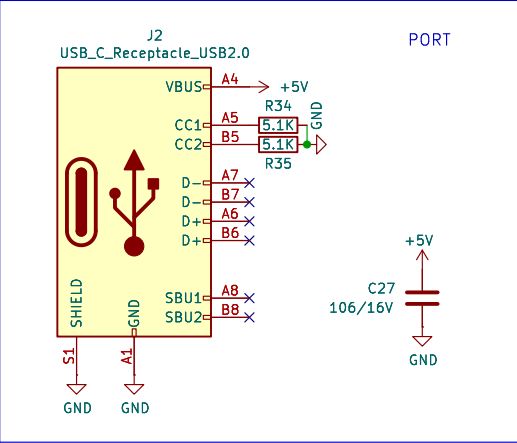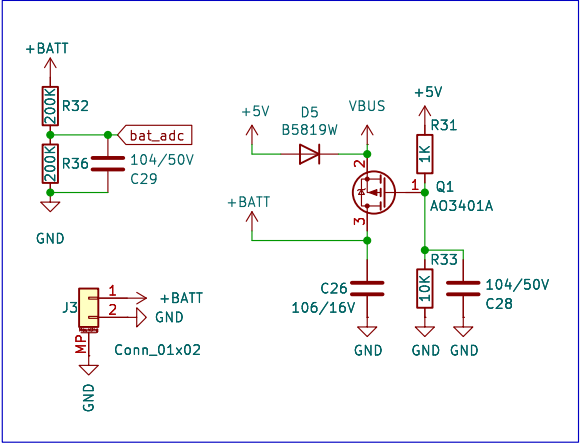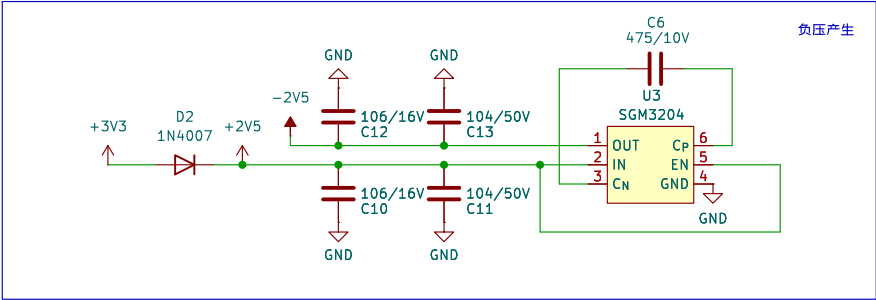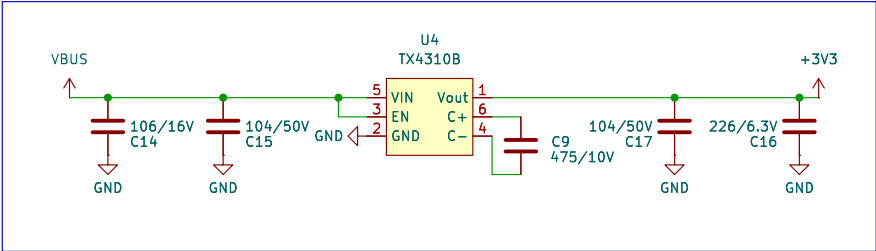

模拟龙仪器仪表

Sheet: /POWER/
File: power.kicad_sch



Title: 率表/定标器测试工具

Size: A4
KiCad E.D.A. 9.0.3

Date: 2025-10-28

Rev: V1.2

Id: 2/3

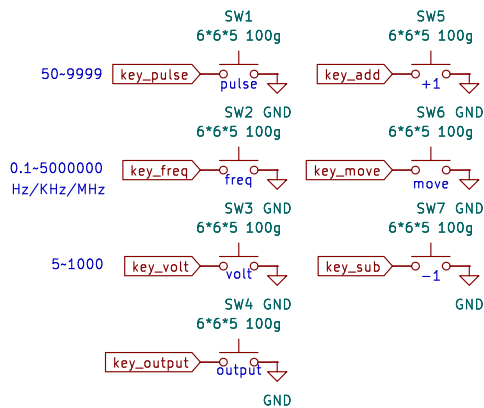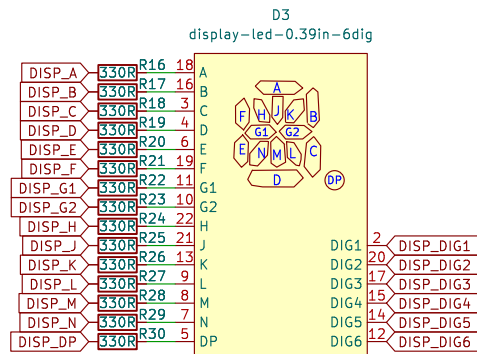

模拟龙仪器仪表

Sheet: /DISP/
File: disp.kicad_sch

Title: 率表/定标器测试工具

Size: A4

Date: 2025-10-28

Rev: V1.2

KiCad E.D.A. 9.0.3

Id: 3/3