

深圳市首韩科技有限公司

SHENZHEN SHOUHAN TECHNOLOGYCO.,LTD

Tel: 0755-27597601 Fax: 0755-27597491

承 认 书 SPECIFICATION FOR APPROVAL


客	户 Custome	er:				
产品名称 Project:		ct:	电感			
规格型号 Part No:			CYA0630-10UH			
	贵公司	司承认印	Approal	sIgnatures		
	料 号/Part	No.	签	章/Signatures		
				日期 Date:		
	拟制/Drawn	李春风		****		

钟华华

罗孝金

审核/Check

批准/Approved




1.Features


- ①. High performance (Isat) realize by metal dust core.
- ②. Low profile: Thickness max.2.0 \sim 5. 0mm.
- ③. Low loss and low resistance.
- ④. Capable of corresponding high frequency 1MHz~5MHz.
- ⑤ Ultra low buzz noise, due to composite construction.
- ⑥. The products contain no lead and also support lead-free soldering.

2. Applications area

Ideally used in NB/Desktop/server/Graphic card, LCD TV/Projector, etc as DC-DC Converter.


3. Externl Dimensions (unit: mm)





UNIT: mm A:7.2±0 .2 B:6.6±0 .2 C:3.0MAX D:3.0±0 .5 E:1.5±0 .2

4. Product Code

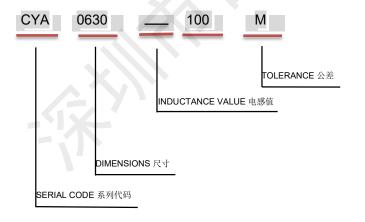

 Code 代码
 Tolerance 公差

 J
 ±5%

 K
 ±10%

 L
 ±15%

 M
 ±20%

 P
 ±25%

 N
 ±30%

• 电感值Inductance Value


(1R0:1.0uH; 100: 10uH; 101:100uH)



5. Electrical Characteristics

CYA0630 Series

Electrical Characteristics L0(uH) Rdo (mO) @35°C Heat Rating Saturation										
C.Y	Inductance (uH) @ (0A)	Rdc (mΩ) @25°C		Heat Rating Current DC	Current DC	TEST FREQ				
PART NO		Тур.	Max.	Amps . Idc (A)	Amps. Isat (A)	(KHZ)				
CYA0630-R10M	0.10±20%	1.5	1.7	32.5	60.0	100KHZ/1.0v				
CYA0630-R15M	0.15±20%	1.9	2.5	30.0	40.0	100KHZ/1.0v				
CYA0630-R20M	0.20±20%	2.4	3.0	21.0	34.0	100KHZ/1.0v				
CYA0630-R22M	0.22±20%	2.5	3.0	21.0	34.0	100KHZ/1.0v				
CYA0630-R33M	0.33±20%	3.0	3.5	21.0	25.0	100KHZ/1.0v				
CYA0630-R36M	0.36±20%	3.3	3.9	16.0	22.0	100KHZ/1.0v				
CYA0630-R47M	0.47±20%	3.5	4.1	18.0	20.0	100KHZ/1.0v				
CYA0630-R56M	0.56±20%	4.3	4.9	15.0	18.0	100KHZ/1.0v				
CYA0630-R68M	0.68±20%	5.0	5.7	14.0	17.0	100KHZ/1.0v				
CYA0630-R82M	0.82±20%	6.0	6.9	12.0	16.0	100KHZ/1.0v				
CYA0630-1R0M	1.00±20%	7.0	7.5	12.0	15.0	100KHZ/1.0v				
CYA0630-1R5M	1.50±20%	10.6	12.1	9.0	14.0	100KHZ/1.0v				
CYA0630-2R2M	2.20±20%	15.5	17.5	7.0	10.0	100KHZ/1.0v				
CYA0630-3R3M	3.30±20%	23.0	26.0	6.5	9.5	100KHZ/1.0v				
CYA0630-4R7M	4.70±20%	34.5	38.0	5.0	6.5	100KHZ/1.0v				
CYA0630-5R6M	5.60±20%	36.0	42.0	5.0	6.3	100KHZ/1.0v				
CYA0630-6R8M	6.80±20%	50.0	54.0	4.5	6.0	100KHZ/1.0v				
CYA0630-8R2M	8.20±20%	58.5	65.0	4.0	6.0	100KHZ/1.0v				
CYA0630-100M	10.00±20%	71.0	76.0	4.0	5.5	100KHZ/1.0v				
CYA0630-120M	12.00±20%	85.0	98.0	3.0	4.5	100KHZ/1.0v				
CYA0630-150M	15.00±20%	98.0	115.0	3.0	3.8	100KHZ/1.0\				
CYA0630-220M	22.00±20%	165.0	189.0	1.5	3.1	100KHZ/1.0\				
CYA0630-330M	33.00±20%	225.0	257.0	1.0	2.9	100KHZ/1.0v				
CYA0630-470M	47.00±20%	297.0	327.0	0.8	2.2	100KHZ/1.0\				




Notes

- 1.All test data is reference to 25℃ ambient.
- 2.ldc: DC current (A) that will cause an approximate △T of 40°C
- 3. Isat : DC current (A) that will cause L0 to drop approximately 30%
- 4. Operating Temperature Range -55°C to +125°C
- 5.The part temperature (ambient + temp rise) should not exceed 125 °C under worse case operating conditions. Circuit design, component. PWB trace size and thickness airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the den application.
- 6. The rated current as listde is either the saturation current or the heating current depending on which value is lower.

6.Minimum Packaging and storage

包装Packing

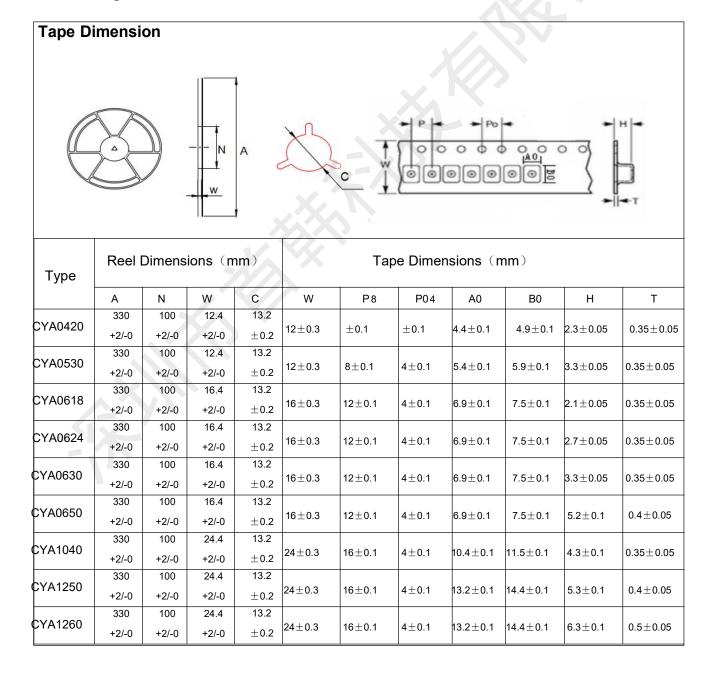




首邦 深圳市首韩科技有限公司

• Tape Carrier Packaging:

Туре	Standard Quantity (pcs/reel)	Туре	Standard Quantity (pcs/reel)
CYA0420	3000	CYA1250	400
CYA5030	2000	CYA1265	400
CYA6030	1000		
CYA1040	1000		

Tearing Off Force

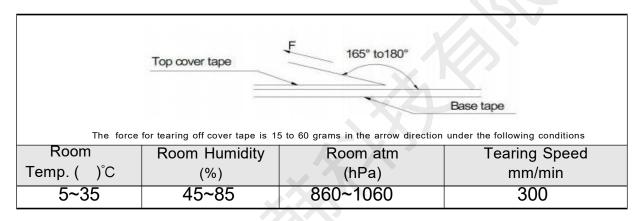

Application Notice

Storage ConditionsTo maintain the solderability of terminal electrodes:

- 1. Temperature and humidity conditions: Less than 30°C and 70% RH.
- 2. Recommended products should be used within 6 months form the time of delivery.
- 3. The packaging material should be kept where no chlorine or sulfur exists in the air. Transportation
- 1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- 2. The use of tweezers or vacuum pick up is strongly recommended for individual components. Bulk handling should ensure that abrasion and mechanical shock are minimized.