


VOLTAGES SUPPLY

P201 (Input Power Supply)

- 1- +VS
- 2- +VS
- 3- NC
- 4- GND
- 5- GND
- 6- +VA
- 7- +VA
- 8- GND
- 9- +5V
- 10- +5V

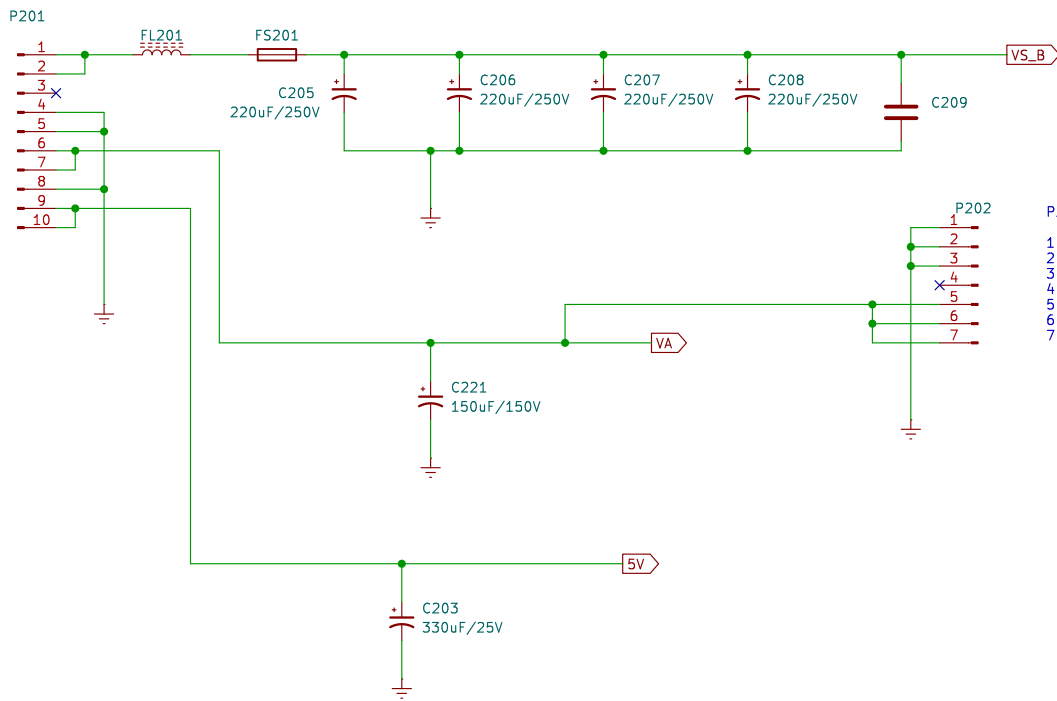

P202 (Output VA Supply)

- 1- GND
- 2- GND
- 3- GND
- 4- NC
- 5- +VA
- 6- +VA
- 7- +VA

VS Voltage supply
Author: Fábio Pereira da Silva

Sheet: /
File: y_board.kicad_sch


Title: Y BOARD LG PLASMA TV PANEL

Size: A4	Date: 2025-03-24	Rev: 1.0
KiCad E.D.A. 8.0.9		Id: 1/23

Input Control (Part 1 of 3)

P101

1- 15V	30- 15V
2- 5V	29- 5V
3- 5V	28- 5V
4- 5V	27- GND
5- GND	26- GND
6- GND	25- (1- L_DELTA_VY_DET)
7- (2- OE)	24- (3- L_OC2)
8- (4- L_SUS_DN_IN)	23- (5- L_DATA)
9- (6- L_YER_DN)	22- (7- L_OC1)
10- (8- L_SET_UP)	21- (9- L_STB)
11- (10- L_RAMP_SLOPE_OPT)	20- (11- L_CLK)
12- (12- L_PASS_TOP)	19- (13- L_DET_LEVEL_SEL)
13- (14- L_YER_UP)	18- (15- L_SLOPE_RATE_SEL)
14- (16- L_SUS_UP_IN)	17- (17- L_CTRL_OE)
15- (18- L_SET_DN)	16- GND

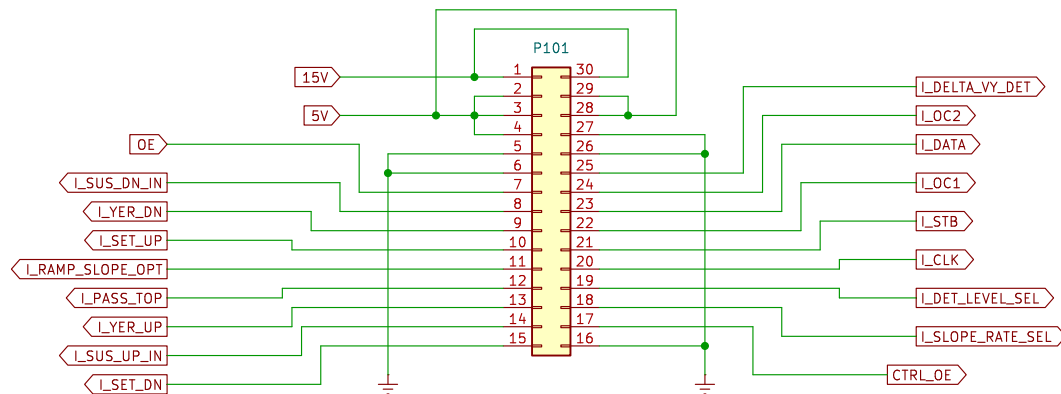

Input Control (Part 1 of 3)
Author: Fábio Pereira da Silva

Sheet: /Input control (Part 1 of 3)/
File: input_control.kicad_sch


Title: Y BOARD LG PLASMA TV PANEL

Size: A4
KiCad E.D.A. 8.0.9

Date: 2025-03-24

Rev: 1.0
Id: 2/23

Input Control (Part 2 of 3)

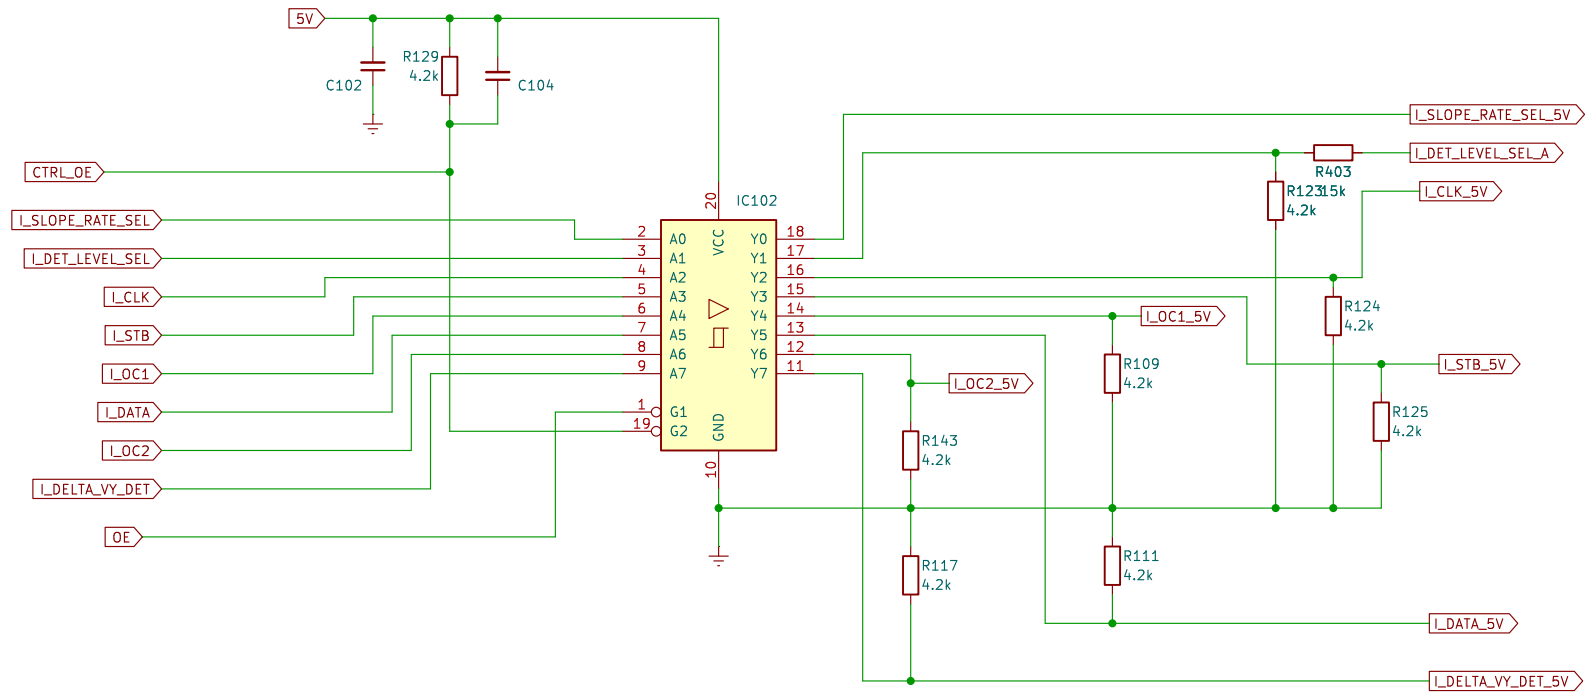


Input Control (Part 2 of 3)
Author: Fábio Pereira da Silva

Sheet: /Input control (Part 2 of 3)/
File: input_control2.kicad_sch

Title: Y BOARD LG PLASMA TV PANEL

Size: A4	Date: 2025-03-24	Rev: 1.0
KiCad E.D.A. 8.0.9		Id: 3/23

Input Control (Part 3 of 3)

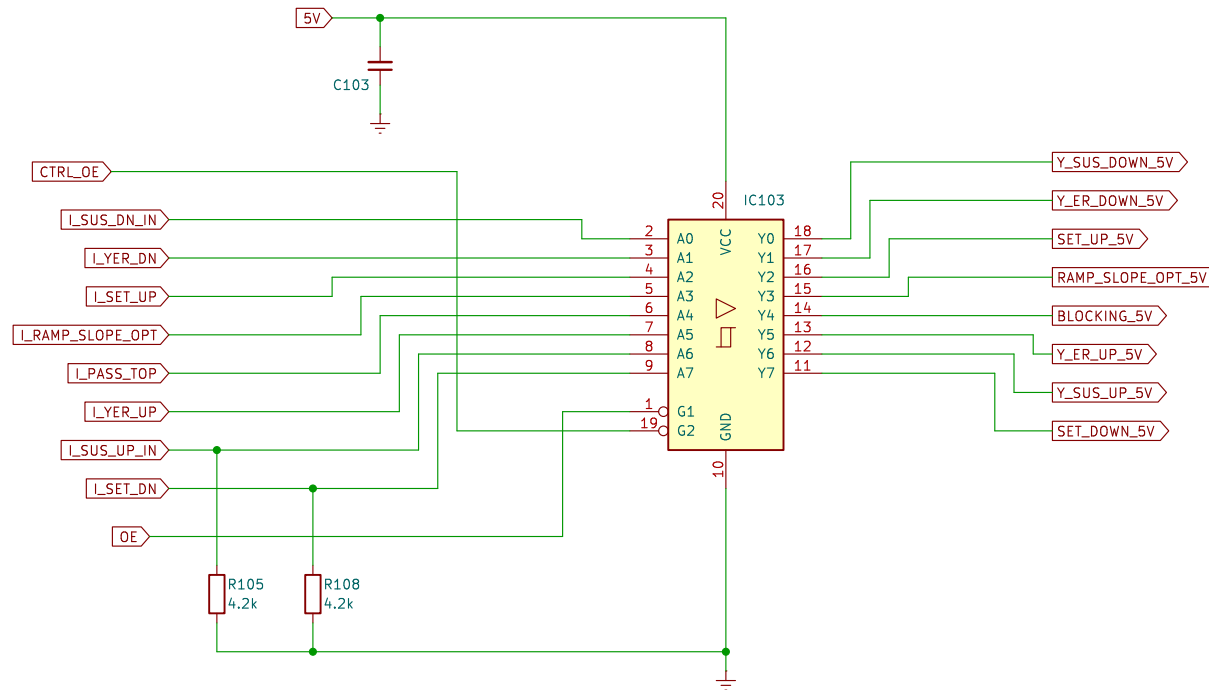


Input Control (Part 3 of 3)
Author: Fábio Pereira da Silva

Sheet: /Input control (Part 3 of 3)/
File: input_control3.kicad_sch

Title: Y BOARD LG PLASMA TV PANEL

Size: A4	Date: 2025-03-24	Rev: 1.0
KiCad E.D.A. 8.0.9		Id: 4/23

5VF, 15VF and 15V Supply

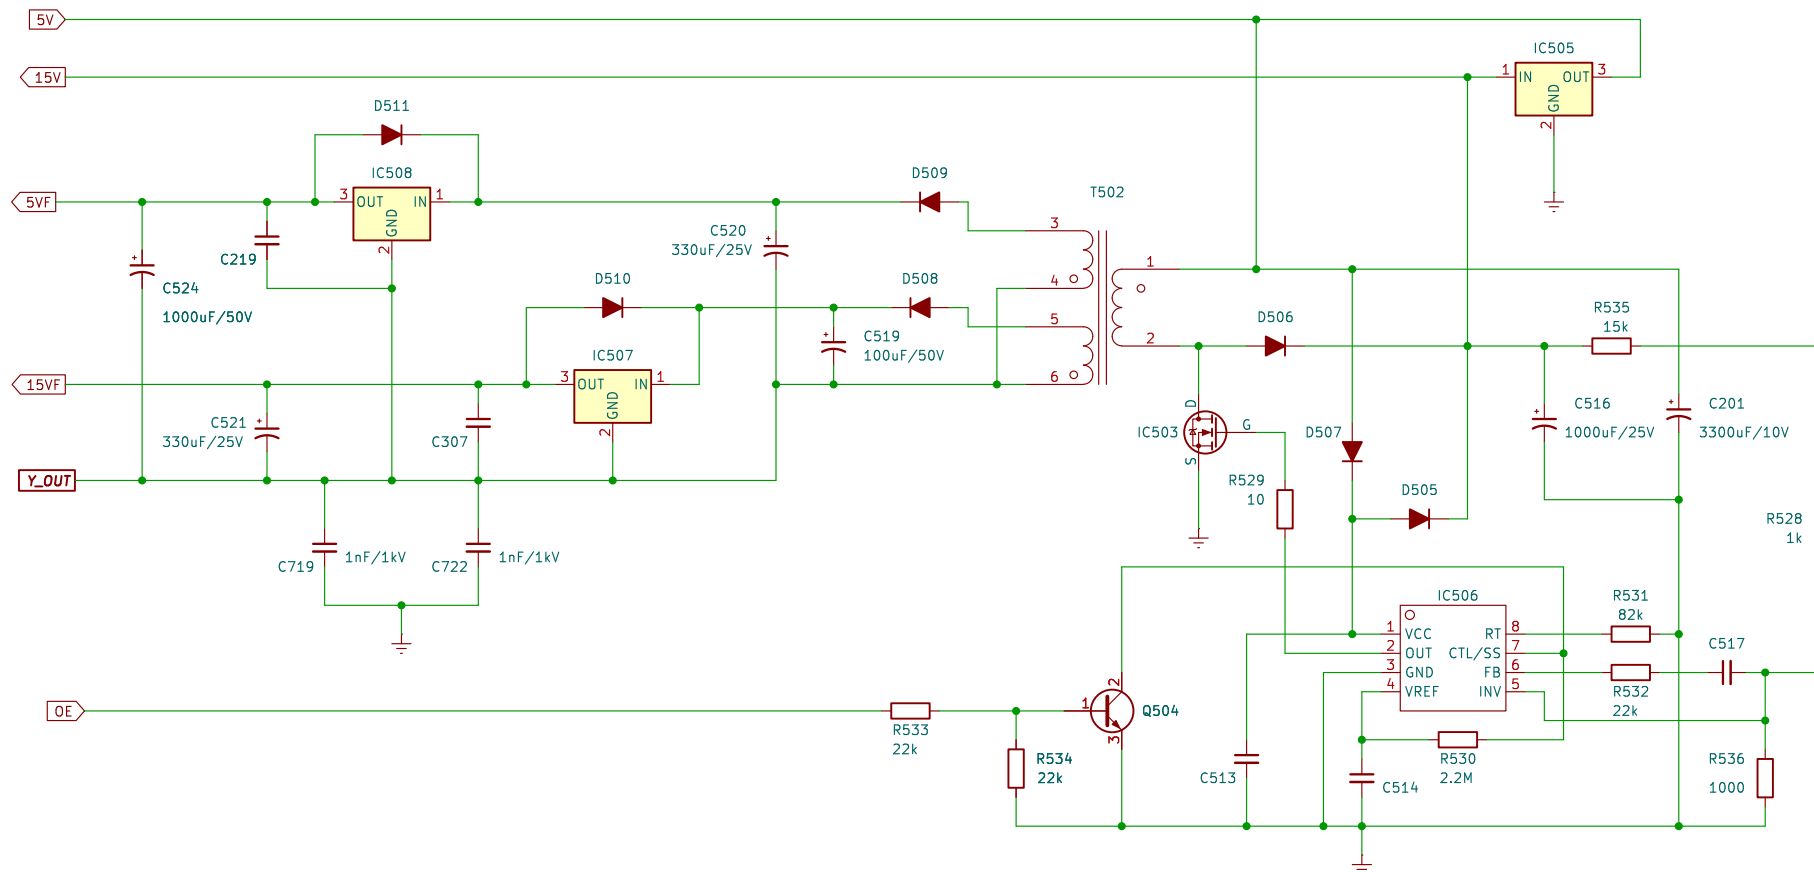

5VF, 15VF and 15V Supply
 Author: Fábio Pereira da Silva


Sheet: /5VF, 15VF 15v/
 File: 5VF_15VF_15V.kicad_sch

Title: Y BOARD LG PLASMA TV PANEL

Size: A4 Date: 2025-03-24
 KiCad E.D.A. 8.0.9

Rev: 1.0
 Id: 5/23

VSC and VY (Part 1 of 3)

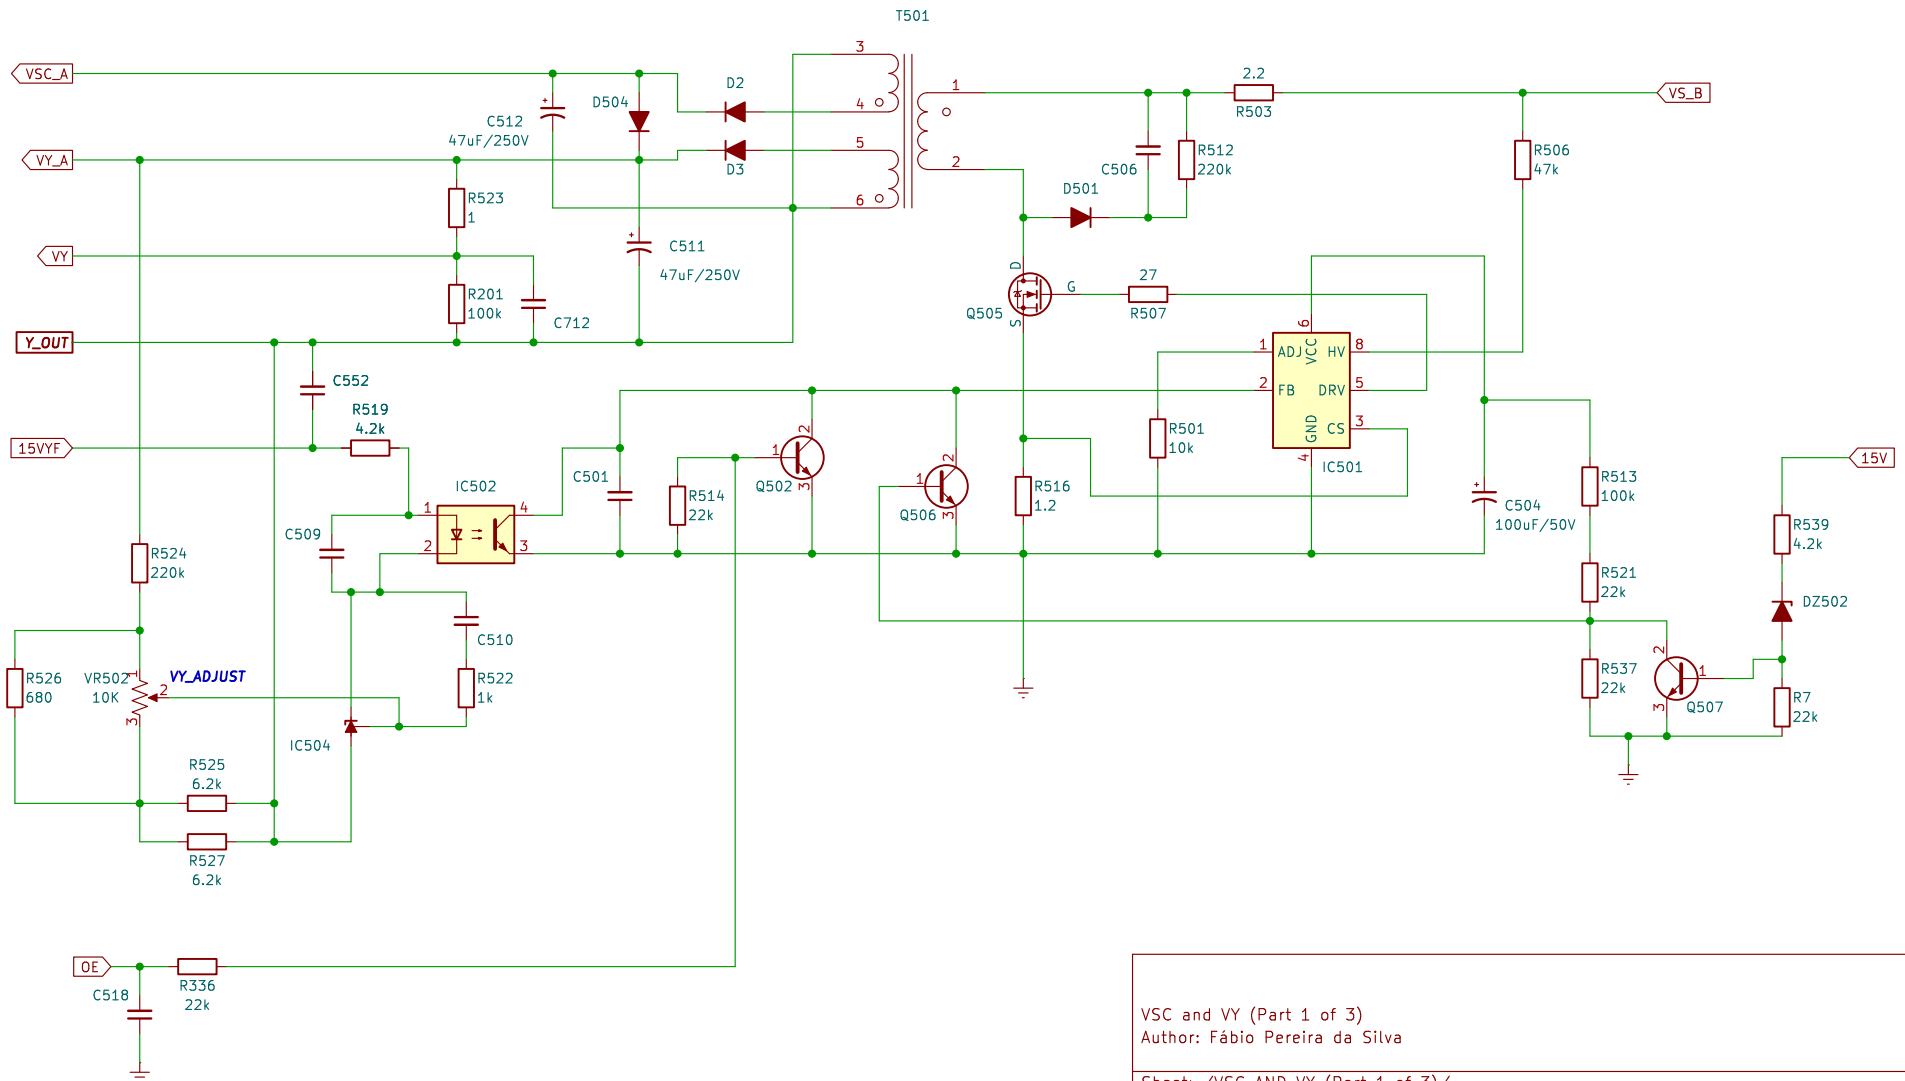

VSC and VY (Part 1 of 3)
Author: Fábio Pereira da Silva


Sheet: /VSC AND VY (Part 1 of 3)/
File: vsc_and_vy.kicad_sch

Title: Y BOARD LG PLASMA TV PANEL

Size: A4 Date: 2025-03-24
KiCad E.D.A. 8.0.9

Rev: 1.0
Id: 6/23

VSC and VY (Part 2 of 3)

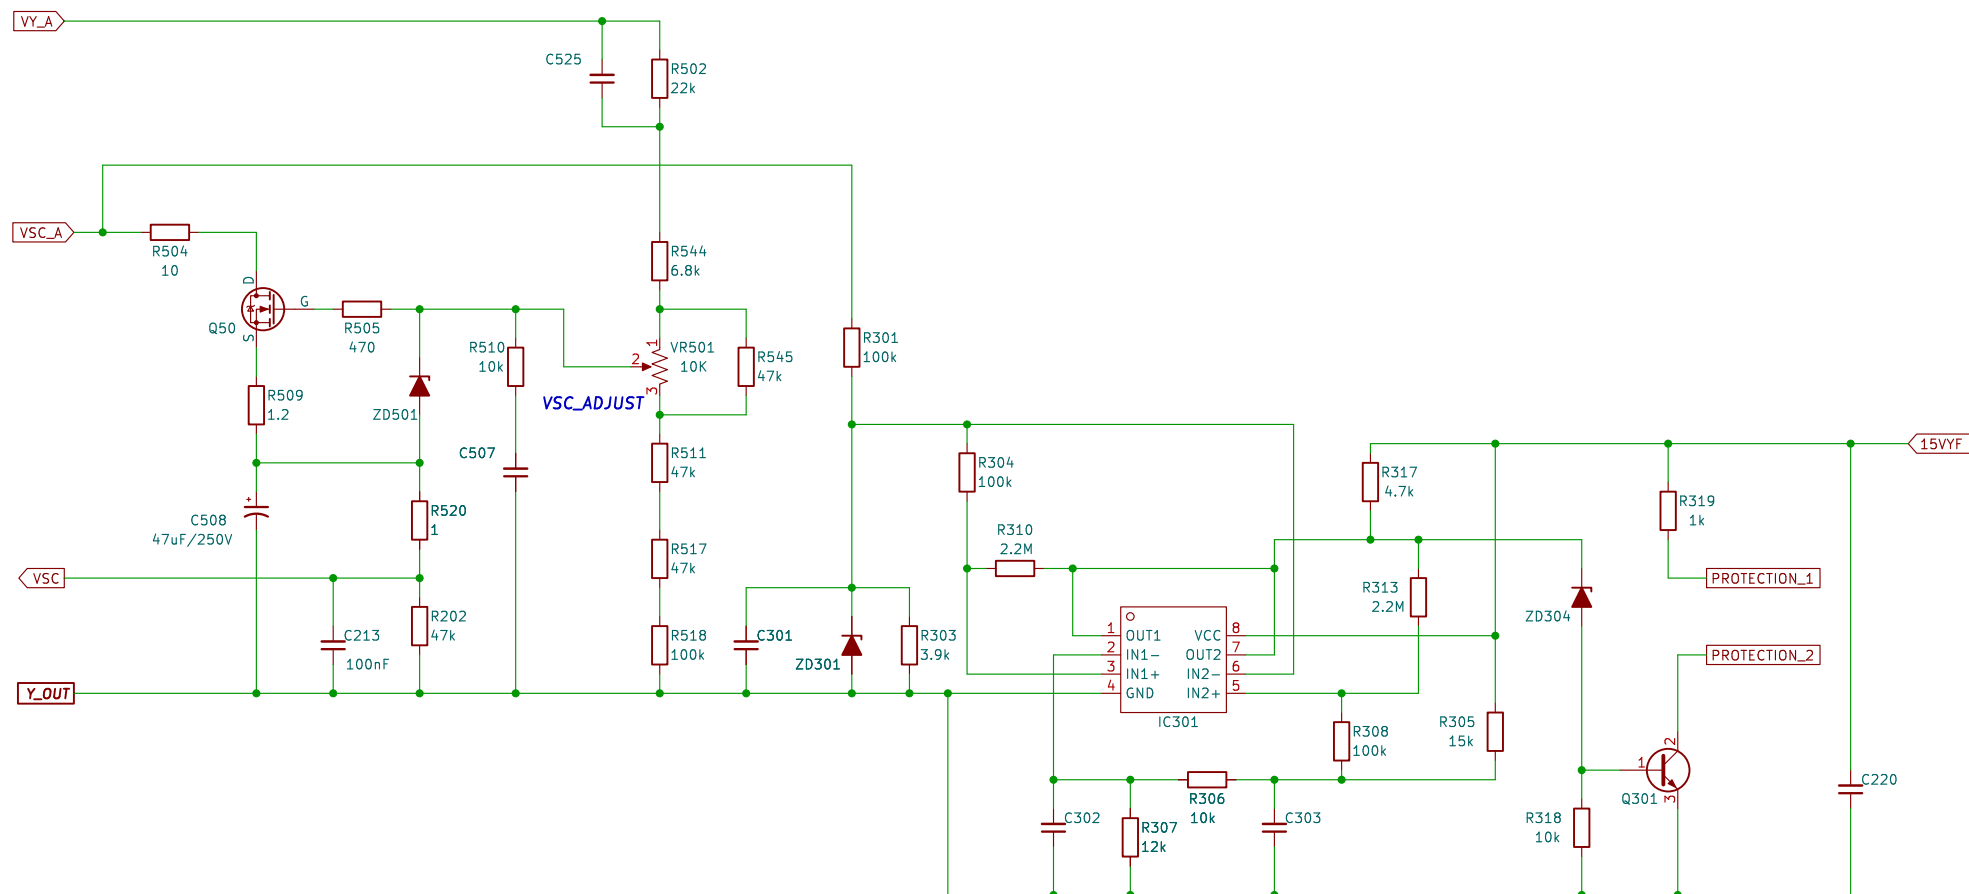

VSC and VY (Part 2 of 3)
Author: Fábio Pereira da Silva

Sheet: /VSC and VY (Part 2 of 3)/
File: vcs_and_vy_part2_of_3.kicad_sch

Title: Y BOARD LG PLASMA TV PANEL

Size: A4


Date: 2025-03-24

Rev: 1.0

KiCad E.D.A. 8.0.9

Id: 7/23

VSC and VY (Part 3 of 3)

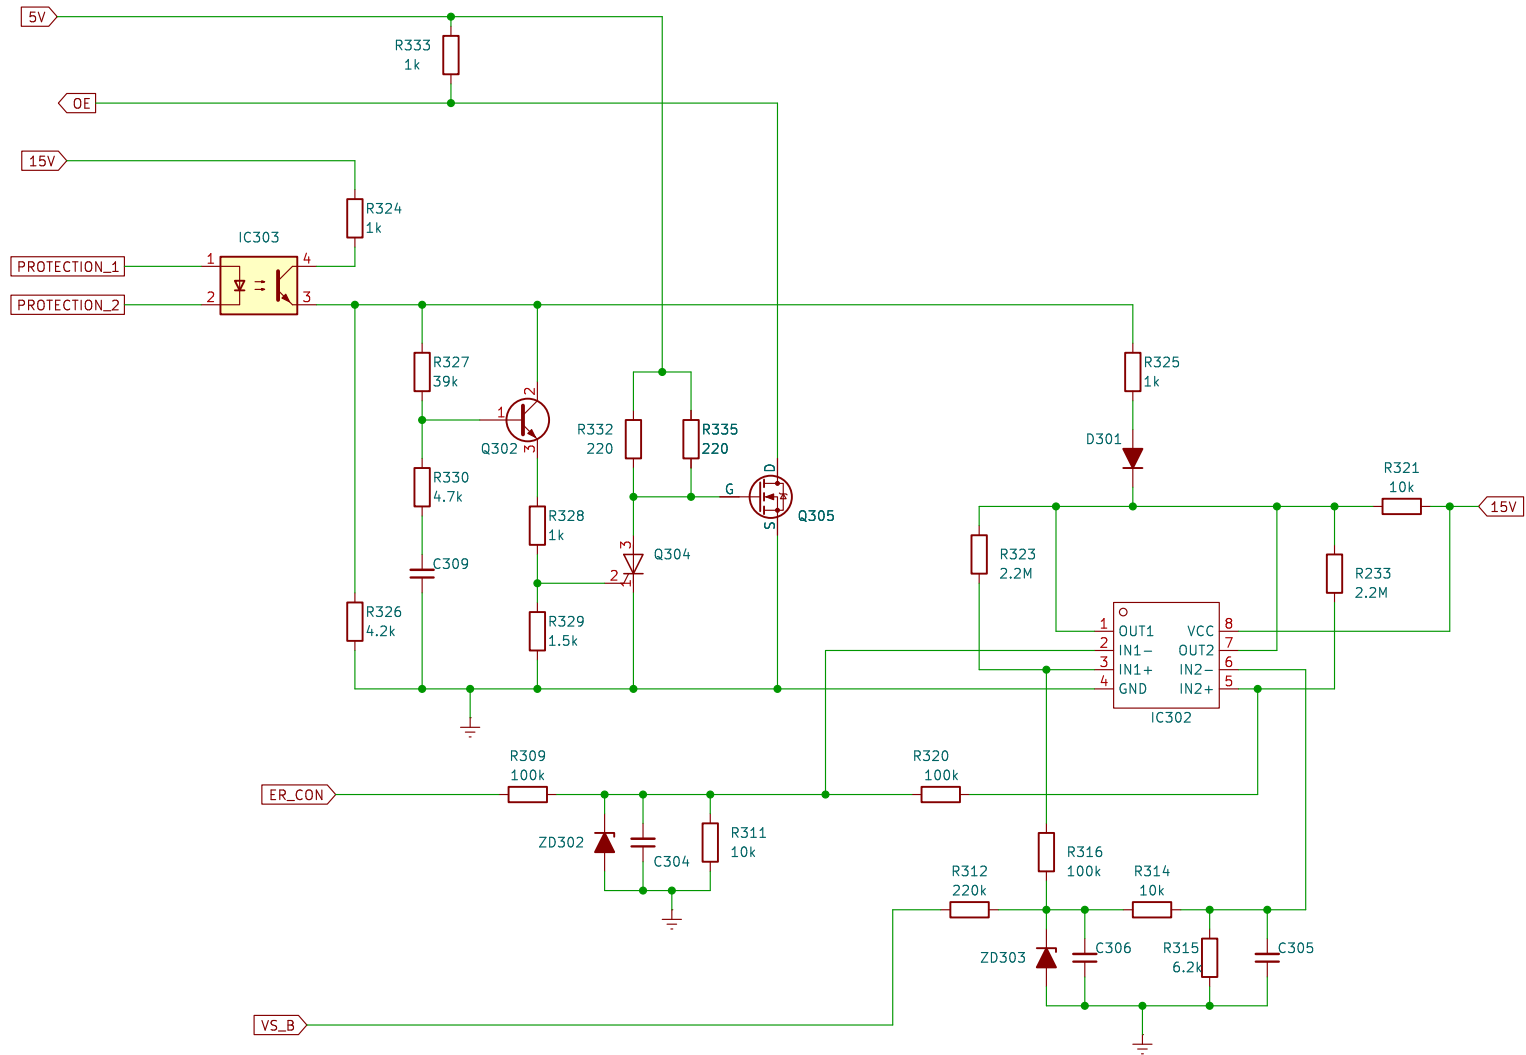

Author: Fábio Pereira da Silva

Sheet: /VSC and VY (Part 3 of 3)/
File: vsc_and_vy_part3_of_3.kicad_sch

Title: Y BOARD LG PLASMA TV PANEL

Size: A4

Date: 2025-03-24

Rev: 1.0

KiCad E.D.A. 8.0.9

Id: 8/23

Y BLOCKING AND Y SUS DOWN

The circuit is a schematic for Y Blocking and Y Sus Down in a Plasma TV panel. It is powered by a 15V supply, a 5V supply, and a 15VVF supply. The circuit includes several resistors (R540, R541, R542, R543, R722, R747, R719, R114, R718, R724, R726, R603, R606, R608, R118, R609, R613, R614, R615), capacitors (C202, C708, C603, C609, C724, C710, C16, C605, C606, C608), and integrated circuits (IC703, IC601). Transistors Q16, Q15, and Q601 are used for signal processing. Diodes D12, D608, and D603 are also present. The output is labeled Y_OUT.

Y_BLOCKING | Y_SUS_DOWN
Author: Fábio Pereira da Silva


Sheet: /Y_SUS_DOWN_AND_Y_BLOCKING/
File: y_sus_dn_and_blocking.kicad_sch

Title: Y BOARD LG PLASMA TV PANEL

Size: A4 Date: 2025-03-24 Rev: 1.0
KiCad E.D.A. 8.0.9 Id: 9/23

Size: A4	Date: 2025-03-24	Rev: 1.0
KiCad E.D.A. 8.0.9		Id: 9/23

Y ENERGY RECOVERY DOWN

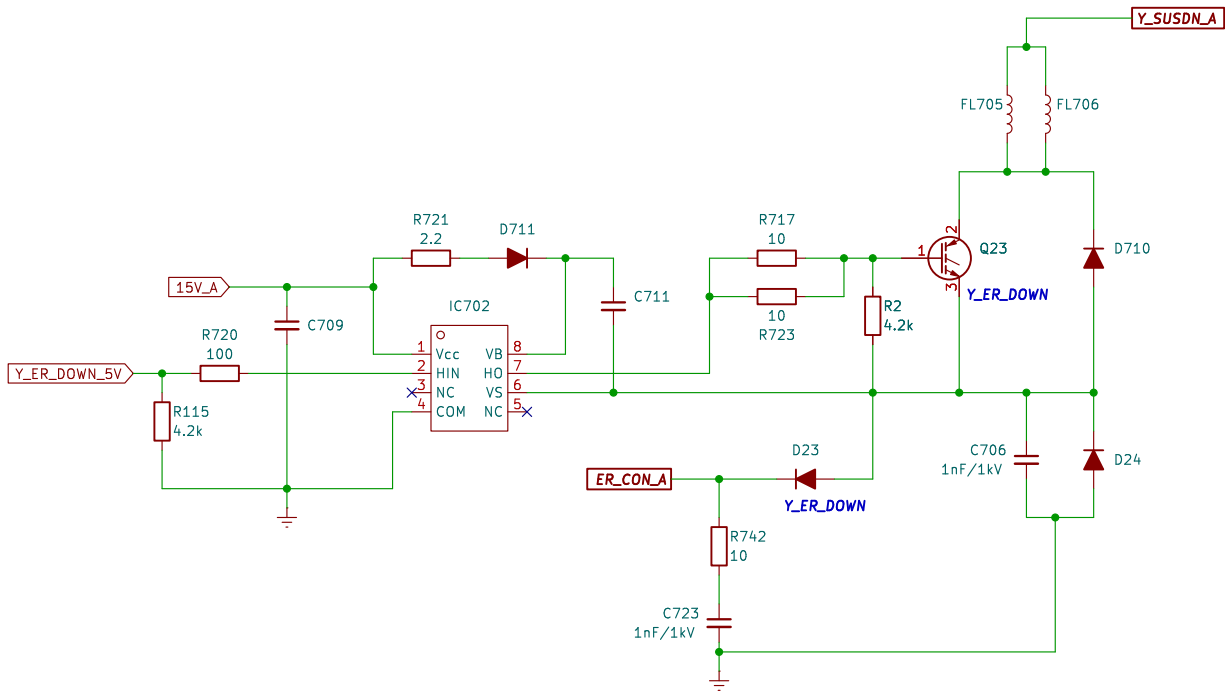

Y ER DOWN

Author: Fábio Pereira da Silva

Sheet: /y_er_down/

File: y_er_down.kicad_sch

Title: Y BOARD LG PLASMA TV PANEL

Size: A4


Date: 2025-03-24

Rev: 1.0

SIZE: A1	
KiCad E.D.A. 8.0.9	

Id: 10/23

Y ENERGY RECOVERY UP AND Y SUS UP

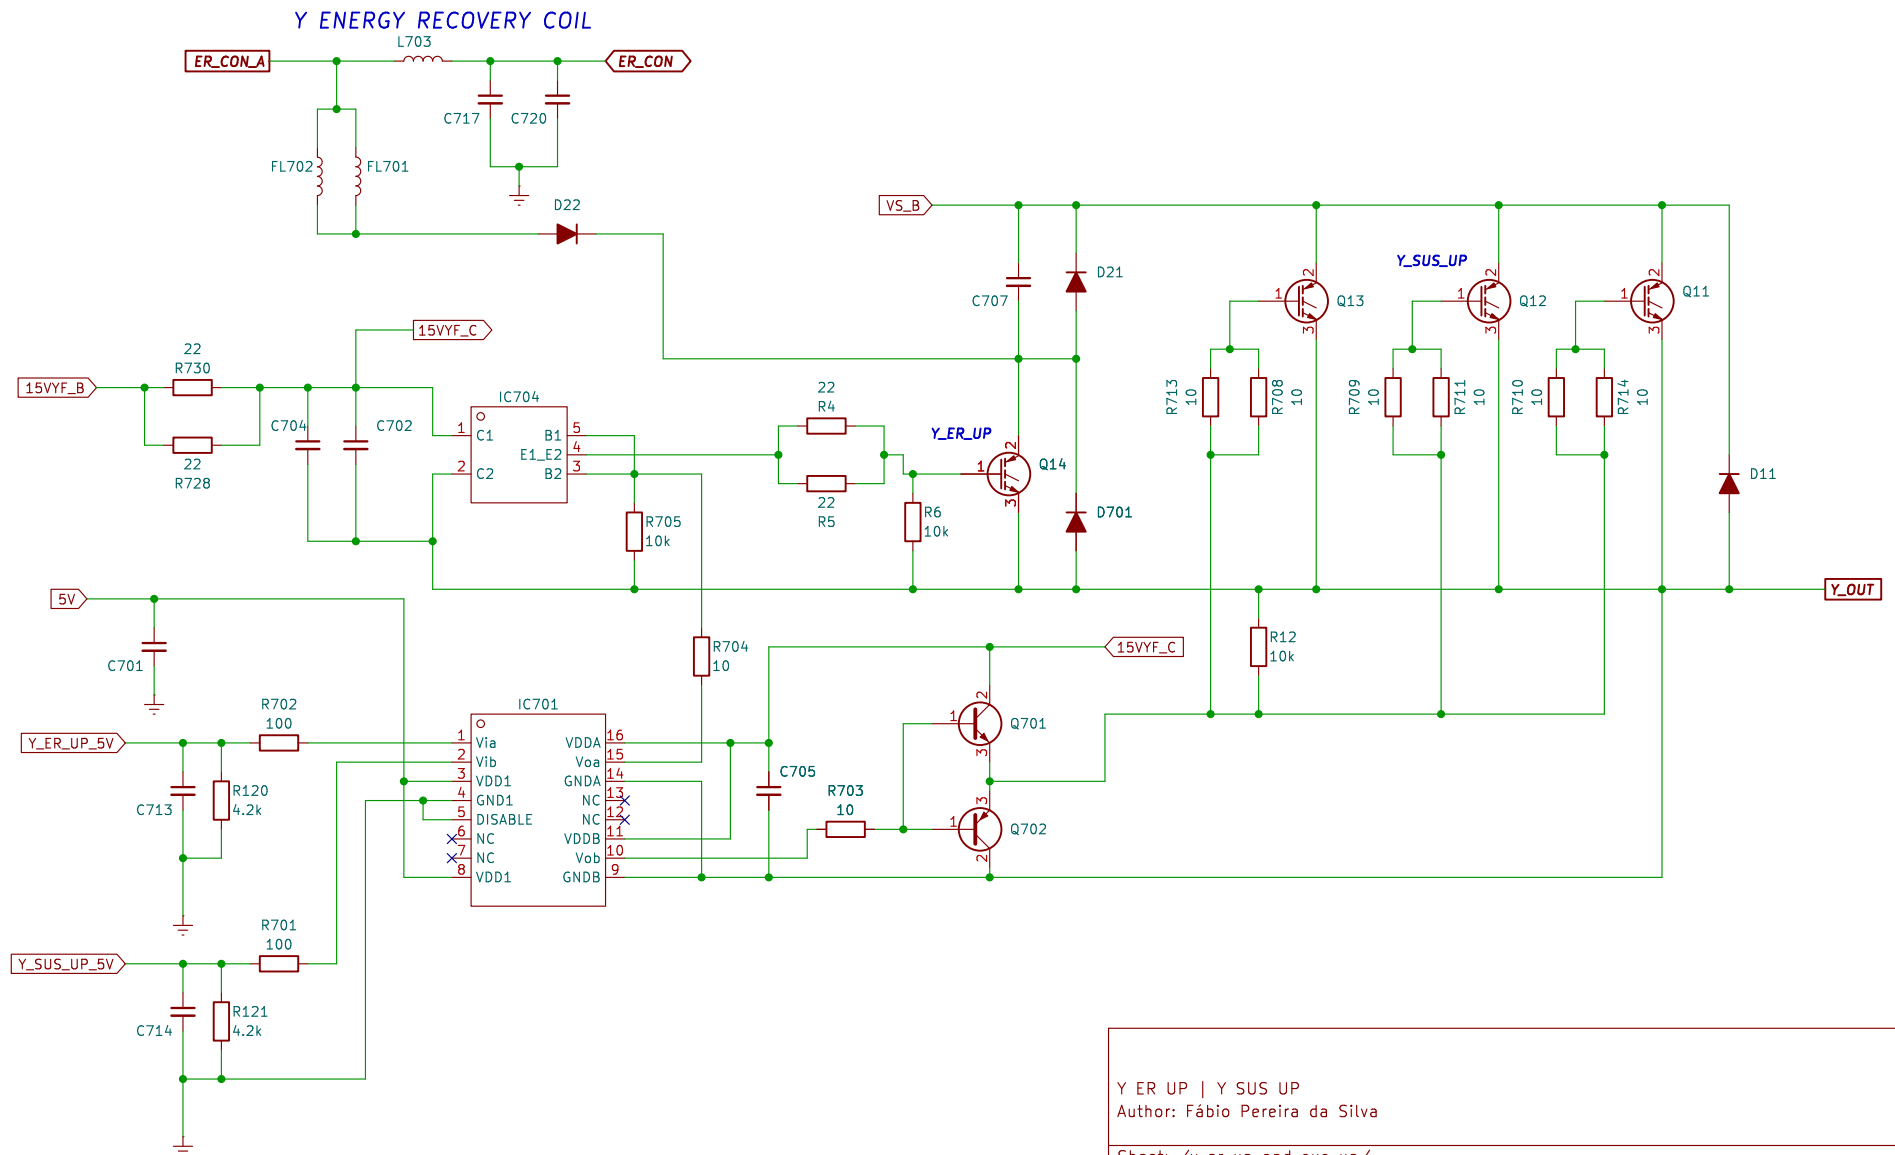

Y ER UP | Y SUS UP
Author: Fábio Pereira da Silva


Sheet: /y_er_up_and_sus_up/
File: y_er_up_and_sus_up.kicad_sch

Title: Y BOARD LG PLASMA TV PANEL

Size: A4	Date: 2025-03-24
KiCad E.D.A. 8.0.9	

Rev: 1.0
Id: 11/23

SET UP

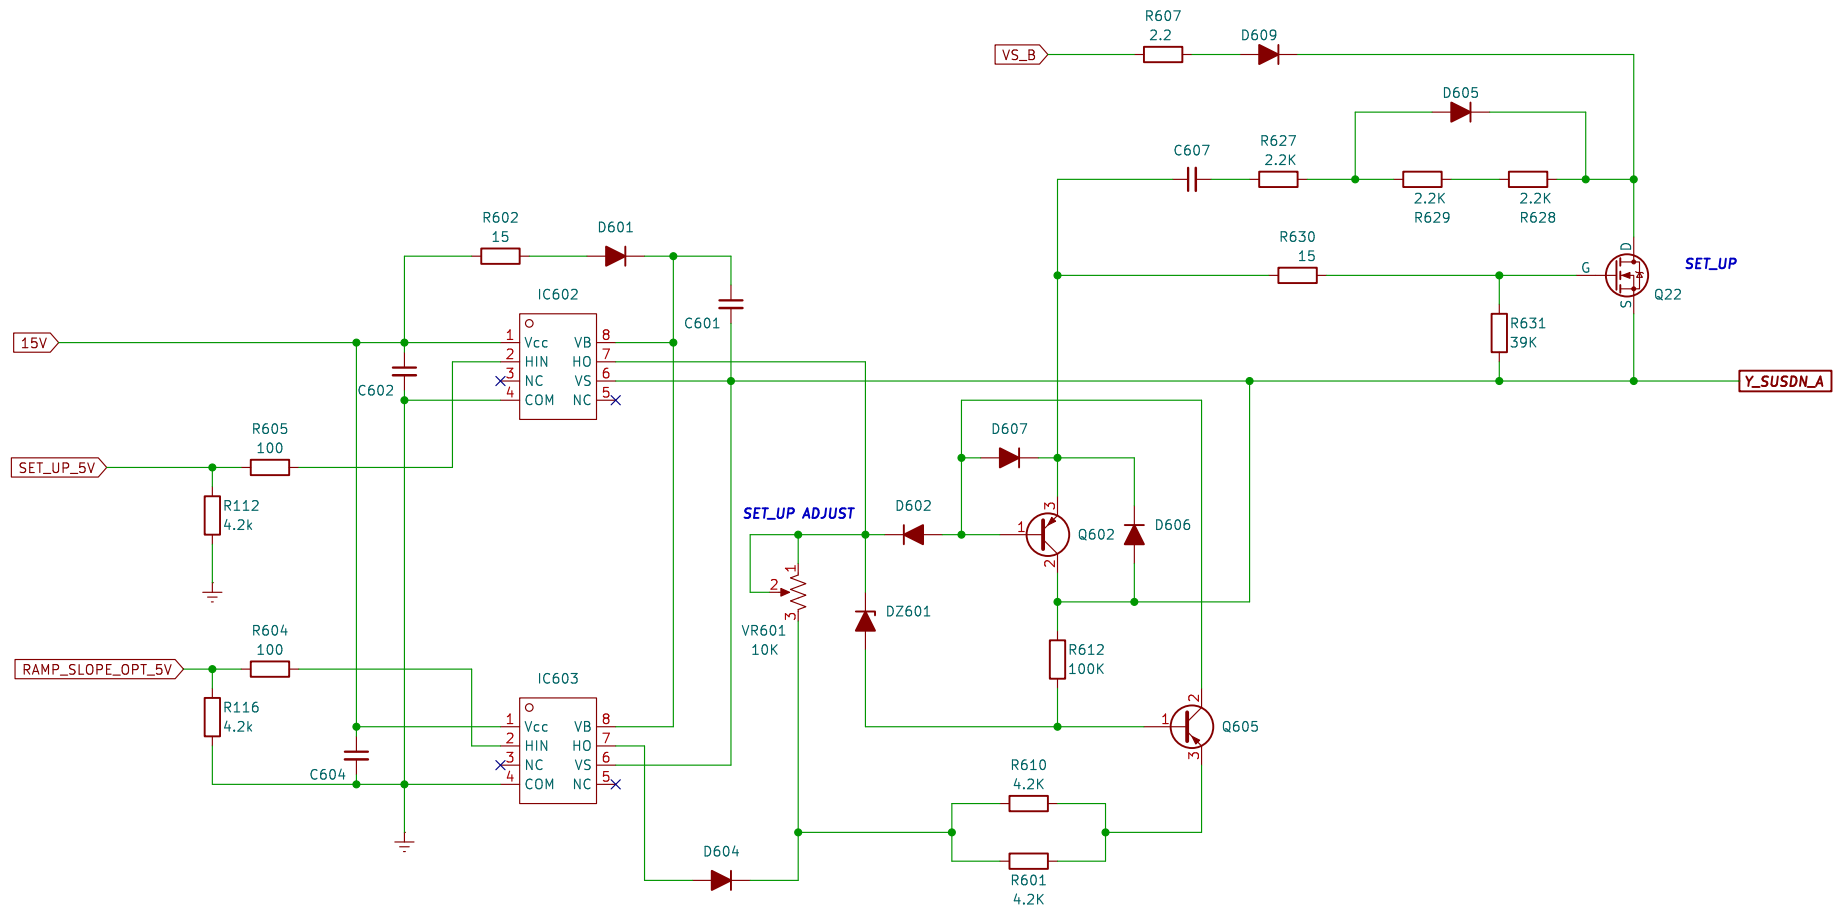

Set Up
Author: Fábio Pereira da Silva


Sheet: /SetUp/
File: set_up.kicad_sch

Title: Y BOARD LG PLASMA TV PANEL

Size: A4 Date: 2025-03-24
KiCad E.D.A. 8.0.9

Rev: 1.0
Id: 12/23

SET DOWN

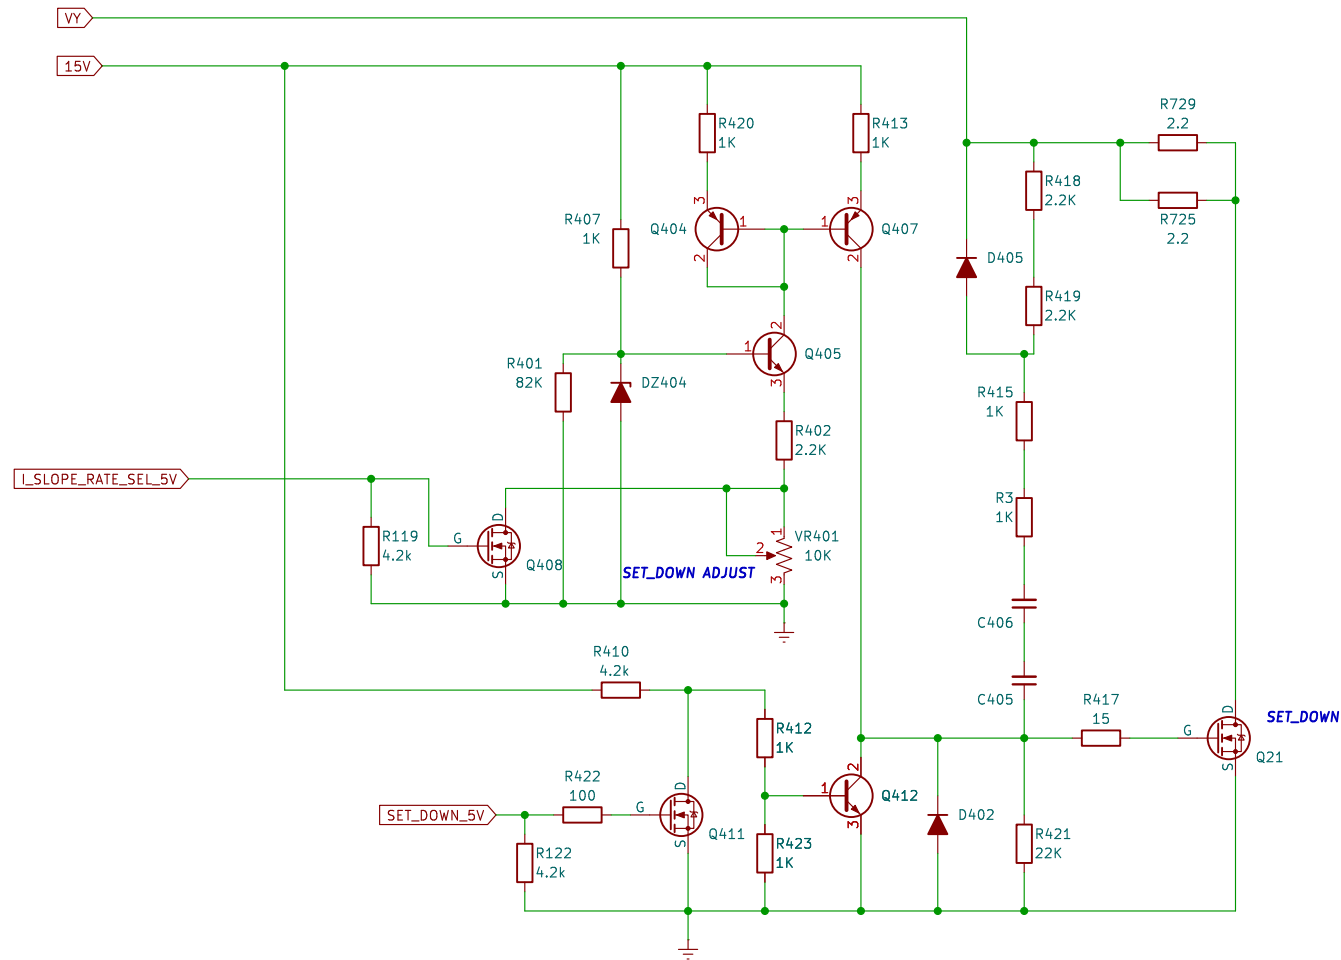

Author: Fábio Pereira da Silva


Sheet: /SetDown/
File: set_down.kicad_sch

Title: Y BOARD LG PLASMA TV PANEL

Size: A4 Date: 2025-03-24
KiCad E.D.A. 8.0.9

Rev: 1.0
Id: 13/23

OUTPUT CONTROL (Part 1 of 4)

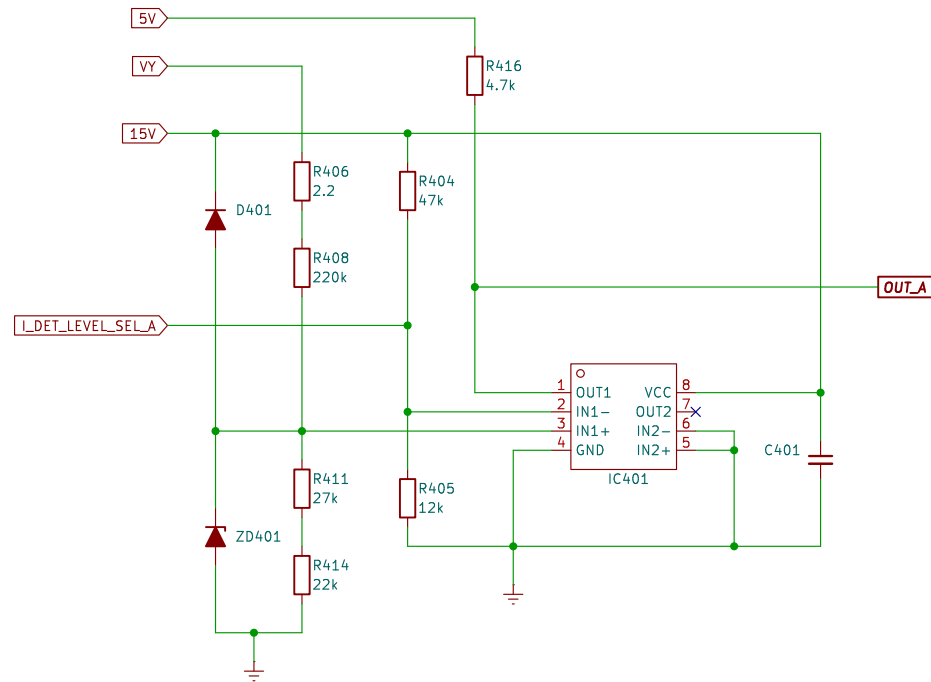


Output Control (Part 1 of 4)
Author: Fábio Pereira da Silva

Sheet: /Output Control (Part 1 of 4)/
File: output_control.kicad_sch

Title: Y BOARD LG PLASMA TV PANEL

Size: A4	Date: 2025-03-24	Rev: 1.0
KiCad E.D.A. 8.0.9		Id: 14/23

OUTPUT CONTROL (Part 2 of 4)

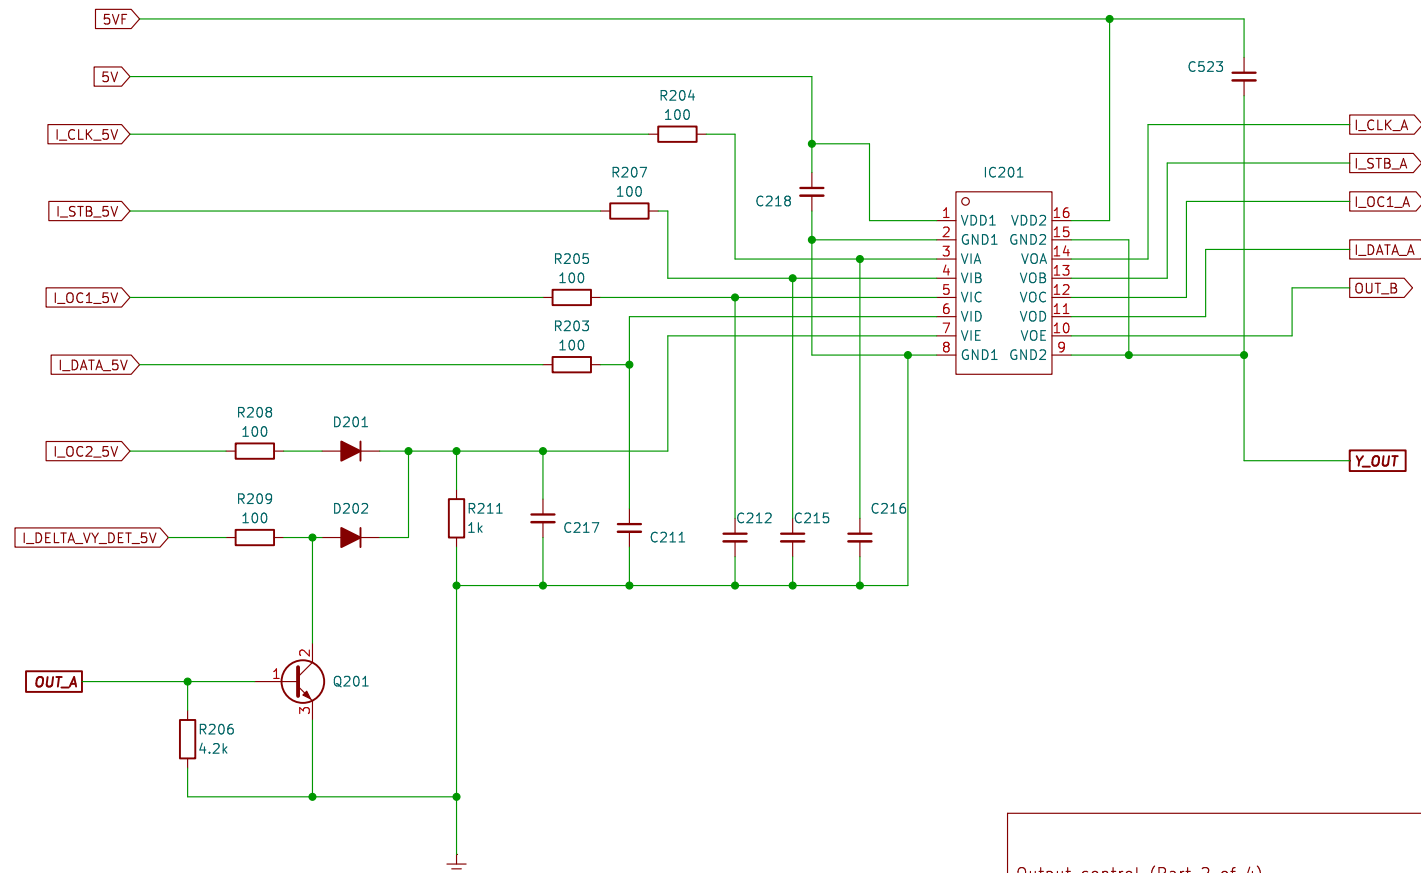


Output control (Part 2 of 4)
Author: Fábio Pereira da Silva

Sheet: /Output Control (Part 2 of 4)/
File: output_control2.kicad_sch

Title: Y BOARD LG PLASMA TV PANEL

Size: A4	Date: 2025-03-24	Rev: 1.0
KiCad E.D.A. 8.0.9		Id: 15/23

OUTPUT CONTROL (Part 3 of 4)

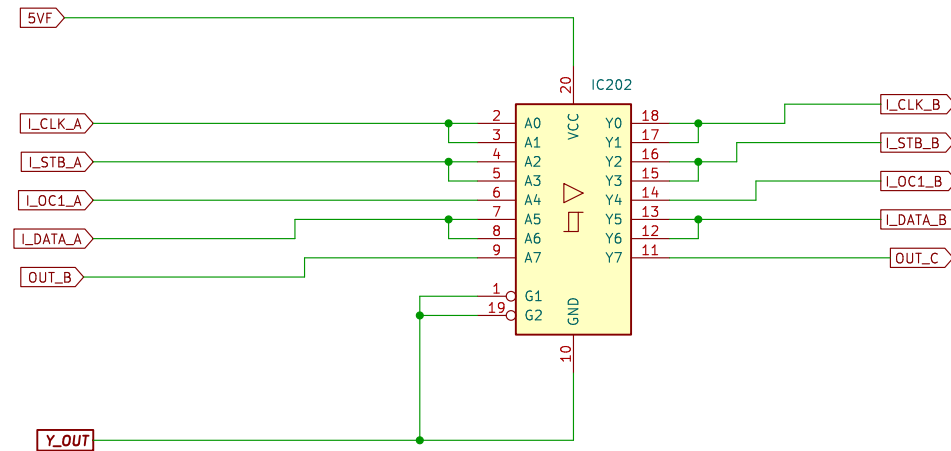

Output control (Part 3 of 4)
Author: Fábio Pereira da Silva

Sheet: /Output Control (Part 3 of 4)/
File: output_control3.kicad_sch

Title: Y BOARD LG PLASMA TV PANEL

Size: A4
KiCad E.D.A. 8.0.9

Date: 2025-03-24

Rev: 1.0
Id: 16/23

Measurements (P201)

P201

Res (OHMS)	Reverse bias (V)	Foward bias (V)
1 >200k	1- 0.551	1- OL
2 >200k	2- 0.551	2- OL
3- -	3- -	3- -
4- 0	4- 0	4- 0
5- 0	5- 0	5- 0
6- >1M	6- OL	6- OL
7- >1M	7- OL	7- OL
8- 0	8- 0	8- 0
9- 2.2k	9- 0.504	9- 1.1
10- 2.2k	10- 0.504	10- 1.1

MEASUREMENTS (P201)
Author: Fábio Pereira da Silva

Sheet: /Measurements P201/
File: measurements.kicad_sch

Title: Y BOARD LG PLASMA TV PANEL

Size: A4	Date: 2025-03-24	Rev: 1.0
KiCad E.D.A. 8.0.9		Id: 18/23

Measurements (P206)

P206

Res (OHMS)

1- 110k
2- 110k
3- OL
4- 0
5- 0
6- OL
7- OL
8- OL

Reverse bias (V)

1- 0.769
2- 0.769
3- OL
4- 0
5- 0
6- OL
7- 0.550
8- 0.550

Foward bias (V)

1- OL
2- OL
3- OL
4- 0
5- 0
6- OL
7- OL
8- OL

Measurements P206
Author: Fábio Pereira da Silva

Sheet: /Measurements P206/
File: measurements_p206.kicad_sch

Title: Y BOARD LG PLASMA TV PANEL

Size: A4	Date: 2025-03-24	Rev: 1.0
KiCad E.D.A. 8.0.9		Id: 19/23

Measurements (P101)

P101

Res (OHMS)	Reverse bias (V)	Foward bias (V)
1- 917	1- 0.495	1- 0.945
2- 918	2- 0.495	2- 0.944
3- 2.264k	3- 0.503	3- 1.089
4- 2.240k	4- 0.503	4- 1.090
5- 2.220k	5- 0.502	5- 1.089
6- 2.240k	6- 0.503	6- 1.089
7- 2.242k	7- 0.503	7- 1.089
8- 0	8- 0	8- 0
9- 0	9- 0	9- 0
10- 0	10- 0	10- 0
11- 0	11- 0	11- 0
12- 0L	12- 0.658	12- 0L
13- 3.2k	13- 0.614	13- 1.804
14- 0L	14- 0.659	14- 0L
15- 4.699k	15- 0.650	15- 2.723
16- 0L	16- 0.659	16- 0L
17- 4.695k	17- 0.650	17- 2.722
18- 0L	18- 0.660	18- 0L
19- 4.708k	19- 0.651	19- 2.724
20- 0L	20- 0.660	20- 0L
21- 0L	21- 0.657	21- 0L
22- 0L	22- 0.660	22- 0L
23- 4.689k	23- 0.650	23- 2.720
24- 0L	24- 0.660	24- 0L
25- 4.676k	25- 0.650	25- 2.718
26- 0L	26- 0.660	26- 0L
27- 4.699k	27- 0.650	27- 2.723
28- 7.7k	28- 0.617	28- 2.926
29- 4.685k	29- 0.649	29- 2.720
30- 0	30- 0	30- 0

Measurements (P101)
Author: Fábio Pereira da Silva

Sheet: /Measurements P101/
File: measurements_p101.kicad_sch

Title: Y BOARD LG PLASMA TV PANEL

Size: A4	Date: 2025-03-24	Rev: 1.0
KiCad E.D.A. 8.0.9		Id: 20/23

Measurements (P202)

P202

Res (OHMS)

1 0
2 0
3- 0
4- 0L
5- >50M
6- >50M
7- >50M

Reverse bias (V)

1- 0
2- 0
3- 0
4- 0L
5- 0L
6- 0L
7- 0L

Foward bias (V)

1- 0
2- 0
3- 0
4- 0L
5- 0L
6- 0L
7- 0L

Measurements (P202)
Author: Fábio Pereira da Silva

Sheet: /Measurements P202/
File: measurements_p202.kicad_sch

Title: Y BOARD LG PLASMA TV PANEL

Size: A4	Date: 2025-03-24	Rev: 1.0
KiCad E.D.A. 8.0.9		Id: 21/23

Measurements (P207)

NOTES:

=====

Measure is related to floating ground (Y OUT)

P207

Res (OHMS)

1- 29.2k

2- 29.2k

3- 0L

4- 5.97k

5- 5.97k

6- 0

7- 744k

8- 742k

9- 795k

10- 740k

11- 790k

12- 0

Reverse bias (V)

1- 3.209

2- 3.209

3- 0L

4- 0.590

5- 0.590

6- 0

7- 0.609

8- 0.600

9- 0.641

10- 0.601

11- 0.659

12- 0

Foward bias (V)

1- 0L

2- 0L

3- 0L

4- 1.916

5- 1.916

6- 0

7- 1.464

8- 1.466

9- 1.576

10- 1.490

11- 1.561

12- 0

Author: Fábio Pereira da Silva

Sheet: /Measurements P207/

File: measurements_p207.kicad_sch

Title: Y BOARD LG PLASMA TV PANEL

Size: A4

Date: 2025-03-24

Rev: 1.0

KiCad E.D.A. 8.0.9

Id: 22/23

Measurements (P203, P208 and P205)

NOTES:

=====

– All pins are Y Out connection (Floating ground)

1-> Y OUT related to Ground

=====

Res (OHMS)	Reverse bias (V)	Foward bias (V)
210k	OL	OL

2-> Y OUT related to +VS

=====

Res (OHMS)

–

Reverse bias (Black point in VS and Red point in Y Out) (V)
0.402

Foward bias (Red point in VS and Black point in Y Out) (V)
OL

Measurements (P203, P208 and P205)
Author: Fábio Pereira da Silva

Sheet: /Measurements P203, P208 and P205/
File: measurements_p203_p208_p205.kicad_sch

Title: Y BOARD LG PLASMA TV PANEL

Size: A4	Date: 2025-03-24	Rev: 1.0
KiCad E.D.A. 8.0.9		Id: 23/23